




供應商圖面

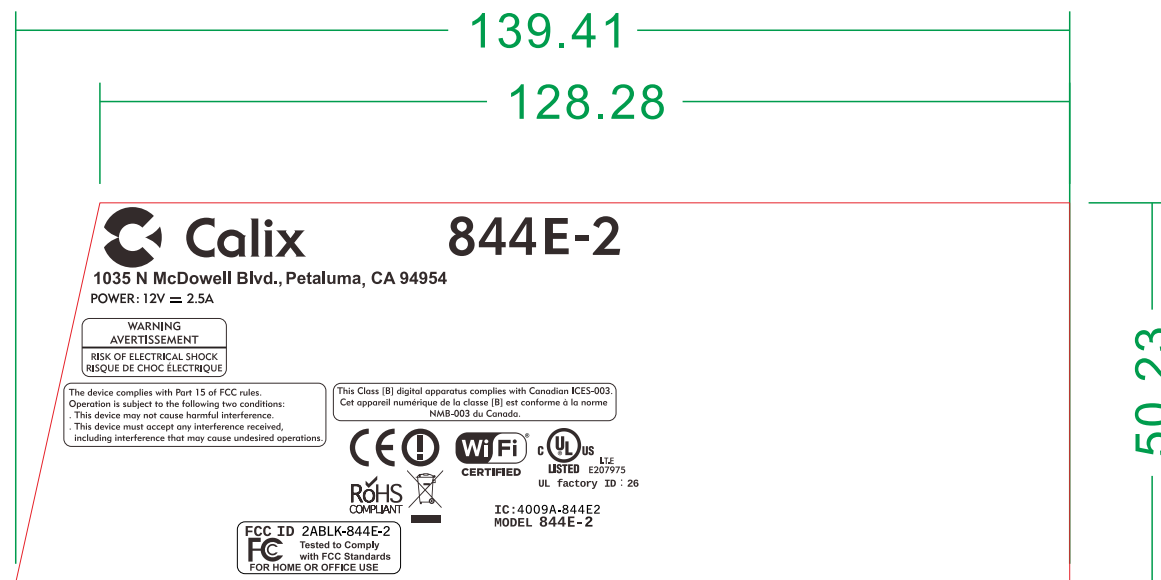

產線列印後

註：

1. 材質及表面處理：消銀龍
2. 顏色：印刷顏色為PANTONE Process Black C。
3. 背膠：一般膠。
4. 儲存溫度：
5. 供應商（需為UL及CSA合格廠商）：
6. 若為背貼，貼紙上需印刷供應商名稱代碼。

△															
△															
△															
△						NAME	DATE			盟創科技 MitraStar					
△					DRAWN	葉明珠			2015/01/06						
△					CHECKED										
△					APPROVED	王丽娟			2015/01/06						
△					TOLERANCE	<6	±0.1	<300	±0.5	TITLE	LABEL,HGW-2502GNAU-BC v2,ROHS,FOR CALIX 844E-2,BACK LABEL				
△	JRF:ID-201503038	X1	葉明珠	2015/03/20		<30	±0.2	<1000	±0.8	PART NO.	63-003-250211B				
△						<100	±0.3	<2000	±1.0	FILE NAME	HGW-2502GNAU-BC v2_CALIX 844E-2_WITHOUT CE_BACK LABEL_J63-003-250211B)20150106				
△	NEW DESIGN	X0	葉明珠	2015/01/06	MATERIAL					UNIT					
SYM	DESCRIPTION	REV	AUTH	DATE	FINISH					mm	SCALE	1:1			

Label

**Calix**
1035 N McDowell Blvd., Petaluma, CA 94954
POWER: 12V = 2.5A

844E-2


100-Level No.: 100-04011 10
300-Level No.: 300-02143 10
Serial No.: 26YYMMXXXXXX
FSAN/SSID: CXNKXXXXXXXX
ONU MAC: XXXXXXXXXXXX

MTA MAC: XXXXXXXXXXXX


WARNING
AVERTISSEMENT
RISK OF ELECTRICAL SHOCK
RISQUE DE CHOC ÉLECTRIQUE

The device complies with Part 15 of FCC rules.
Operation is subject to the following two conditions:
This device may not cause harmful interference.
This device must accept any interference received,
including interference that may cause undesired operations.

This Class [B] digital apparatus complies with Canadian ICES-003.
Cet appareil numérique de la classe [B] est conforme à la norme
NMB-003 du Canada.



IC: 4009A-844E2
MODEL 844E-2

Security Type: WPA2.AES
WPA Key: XXXXXXXXXXXXXXXX
IP Address: 192.168.1.1
User/Password: admin/XXXXXX

**BVMCH00ARA**

Label Location

