

TEST REPORT

FCC UNII Test for DA3501CGN
Certification

APPLICANT
HYUNDAI MOBIS CO., LTD.

REPORT NO.
HCT-RF-2301-FC008

DATE OF ISSUE
January 4, 2023

Tested by
Woong Jin Kim



Technical Manager
Jong Seok Lee



HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO

HCT CO., LTD.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si,
Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

TEST REPORT

FCC
UNII Test for
DA3501CGN

REPORT NO.

HCT-RF-2301-FC008

DATE OF ISSUE

January 04, 2023

Additional Model

-

Applicant

HYUNDAI MOBIS CO., LTD.

203, Teheran-ro, Gangnam-gu, Seoul, 135-977, South Korea

**Eut Type
Model Name**

CAR AUDIO SYSTEM
DA3501CGN

FCC ID

TQ8-DA3501CGN

Modulation type

OFDM

FCC Classification

Unlicensed National Information Infrastructure(NII)

FCC Rule Part(s)

Part 15.407

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	January 04, 2023	Initial Release

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

If this report is required to confirmation of authenticity, please contact to www.hct.co.kr

CONTENTS

1. GENERAL INFORMATION	5
EUT DESCRIPTION	5
2. MAXIMUM OUTPUT POWER	6
3. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	7
GENERAL TEST PROCEDURES	7
DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION	8
5. FACILITIES AND ACCREDITATIONS	8
5.1 FACILITIES	8
5.2 EQUIPMENT	8
6. ANTENNA REQUIREMENTS	9
7. MEASUREMENT UNCERTAINTY	9
8. DESCRIPTION OF TESTS	10
9. SUMMARY OF TEST RESULTS	26
10. TEST RESULT	27
10.1 DUTY CYCLE	27
10.2 26 dB BANDWIDTH	30
10.3 6 dB BANDWIDTH	39
10.4 OUTPUT POWER MEASUREMENT	42
10.5 FREQUENCY STABILITY.	46
10.5.1 80 MHz BW	46
10.6 POWER SPECTRAL DENSITY	62
10.7 STRADDLE CHANNEL	71
10.7.1 26 dB Bandwidth	71
10.7.2 6 dB Bandwidth	74
10.7.3 Output Power	77
10.7.4 Power Spectral Density	80
10.8 RADIATED SPURIOUS EMISSIONS	83
10.9 RADIATED RESTRICTED BAND EDGE	91
11. LIST OF TEST EQUIPMENT	113
12. ANNEX A_ TEST SETUP PHOTO	115

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	DA3501CGN	
Additional Model	DA3501CMG, DA3511CGG, DA3511CMG, DA3501CGG, DA3521CGG, DA3501CEG, DA3501CGL, DA3501CBB, DA3501CEP, DA3501CMP, DA3501CFN	
EUT Type	CAR AUDIO SYSTEM	
Power Supply	DC 14.4 V	
Modulation Type	OFDM : 802.11a, 802.11n, 802.11ac	
Frequency Range (MHz)	U-NII-1	20 MHz BW : 5180 - 5240 40 MHz BW : 5190 - 5230 80 MHz BW : 5210
	U-NII-2A	20 MHz BW : 5260 - 5320 40 MHz BW : 5270 - 5310 80 MHz BW : 5290
	U-NII-2C	20 MHz BW : 5500 - 5720 40 MHz BW : 5510 - 5710 80 MHz BW : 5530 - 5690
	U-NII-3	20 MHz BW : 5745 - 5825 40 MHz BW : 5755 - 5795 80 MHz BW : 5775
Antenna Specification	Antenna type: PCB Pattern ANT Peak Gain : UNII-1: -0.61 dBi, UNII-2A: -0.18 dBi UNII-2C: -0.77 dBi, UNII-3: -0.18 dBi	
Straddle channel	Supported	
TDWR Band	Not Supported	
Dynamic Frequency Selection	Slave without radar detection	
Date(s) of Tests	December 01, 2022 ~ January 04, 2023	
EUT serial numbers	Conducted : 96160-BC060 Radiated : 96160-BC060	

2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Band	Mode	RF Output Power (dBm)	RF Output Power (W)
UNII-1	802.11a	8.96	0.008
	802.11n (HT20)	8.75	0.007
	802.11n (HT40)	4.38	0.003
	802.11ac (VHT20)	8.71	0.007
	802.11ac (VHT40)	4.31	0.003
	802.11ac (VHT80)	5.53	0.004
UNII-2A	802.11a	8.82	0.008
	802.11n (HT20)	8.92	0.008
	802.11n (HT40)	7.38	0.005
	802.11ac (VHT20)	8.61	0.007
	802.11ac (VHT40)	7.52	0.006
	802.11ac (VHT80)	7.45	0.006
UNII-2C	802.11a	5.94	0.004
	802.11n (HT20)	5.58	0.004
	802.11n (HT40)	4.99	0.003
	802.11ac (VHT20)	5.41	0.003
	802.11ac (VHT40)	5.13	0.003
	802.11ac (VHT80)	5.34	0.003
UNII-3	802.11a	3.06	0.002
	802.11n (HT20)	2.83	0.002
	802.11n (HT40)	2.39	0.002
	802.11ac (VHT20)	2.72	0.002
	802.11ac (VHT40)	2.36	0.002
	802.11ac (VHT80)	2.18	0.002

3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’ were used in the measurement.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203, § 15.407 :

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203, § 15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

8. DESCRIPTION OF TESTS

8.1. Duty Cycle

Test Configuration

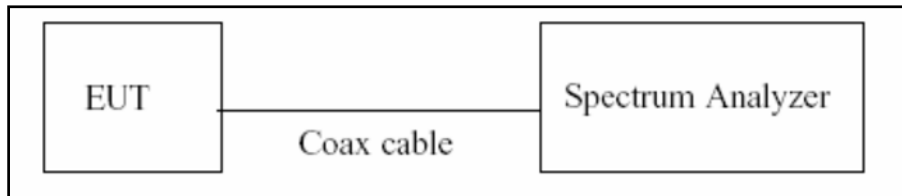

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = $T_{\text{on}} / T_{\text{total}}$ and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

8.2. 6 dB Bandwidth & 26 dB Bandwidth

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Configuration

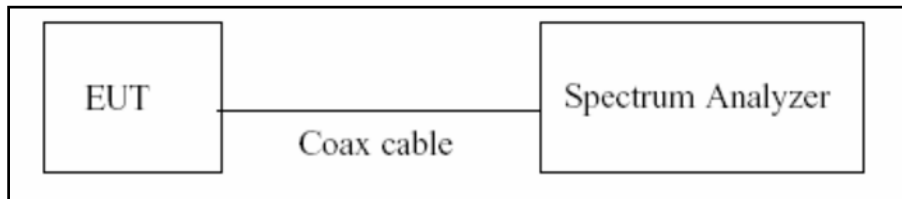

Test Procedure(26 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure (6 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. $VBW \geq 3 \times RBW$
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.


8.3. Output Power Measurement

Limit


Band	Limit
UNII 1	- Master : Not exceed 1 W(=30 dBm) - Slave : Not exceed 250 mW(=23.98 dBm)
UNII 2A, 2C	Not exceed the lesser of 250 mW or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)
UNII 3	Not exceed 1 W(= 30 dBm)

Test Configuration

Power Meter

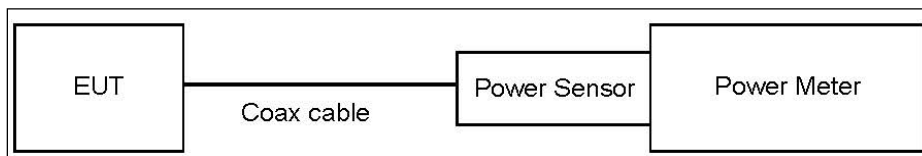

Spectrum Analyzer(Only Straddle Channel)

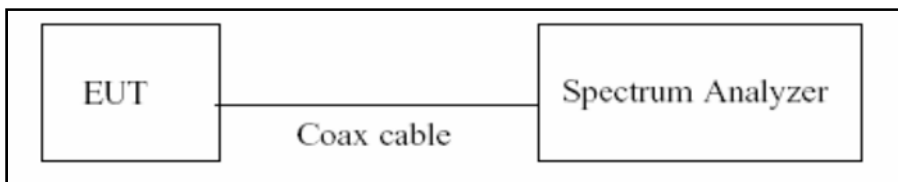

Test Procedure(Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test Procedure(Spectrum Analyzer)

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.

We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW \geq 3 MHz.
5. Number of points in sweep $\geq 2 \times \text{span/RBW}$.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Total Power(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss + EUT Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	22.02
UNII 2A	22.02

UNII 2C	22.02
UNII 3	22.02


(Actual value of loss for the attenuator and cable combination)

8.4. Power Spectral Density

Limit

Band	Limit
UNII 1	11 dBm/MHz
UNII 2A, 2C	11 dBm/MHz
UNII 3	30 dBm/500 kHz

Test Configuration

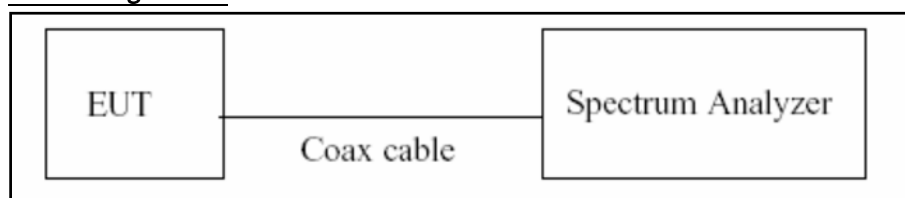

Test Procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW \geq 3 MHz
4. Number of points in sweep \geq 2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss + EUT Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	22.02
UNII 2A	22.02
UNII 2C	22.02
UNII 3	22.02


(Actual value of loss for the attenuator and cable combination)

8.5. Frequency Stability

Limit

Maintained within the band

Test Configuration

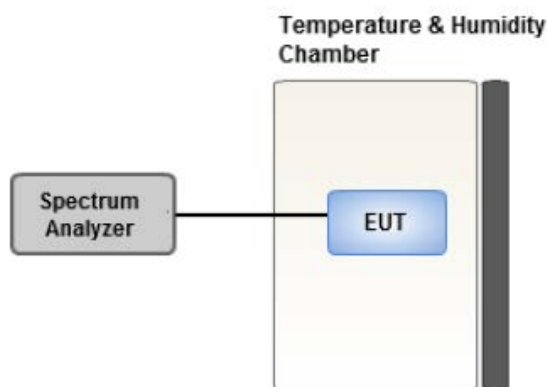

Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

8.6. Radiated Test


Limit

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
2. UNII 2A, 2C: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.
3. UNII 3: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
4. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

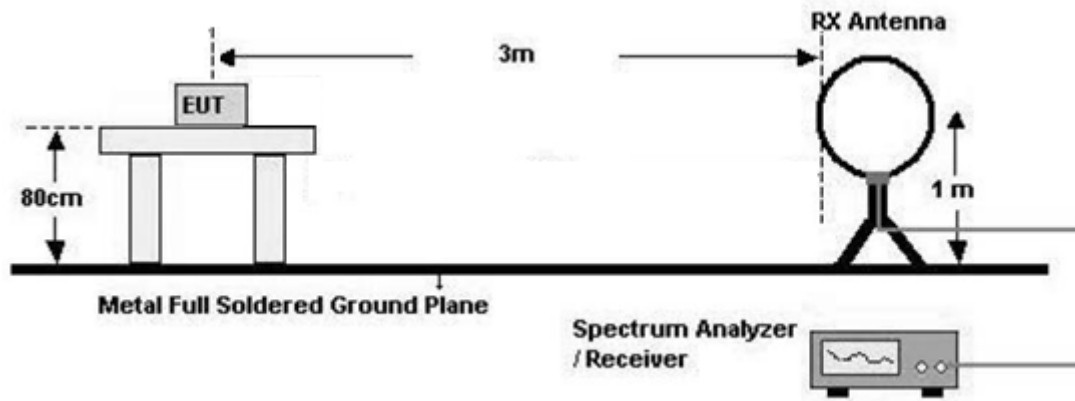

30 MHz - 1 GHz

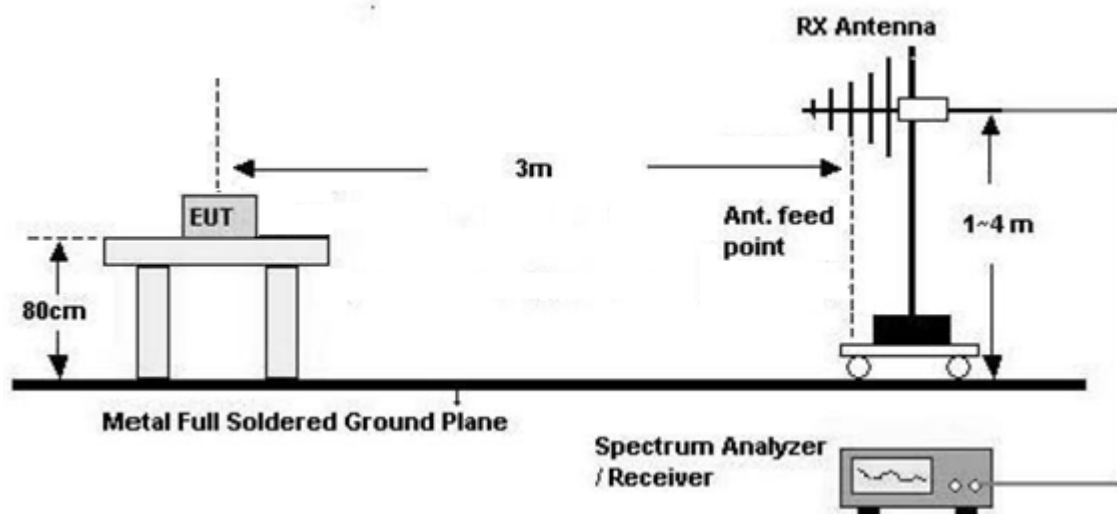

Above 1 GHz

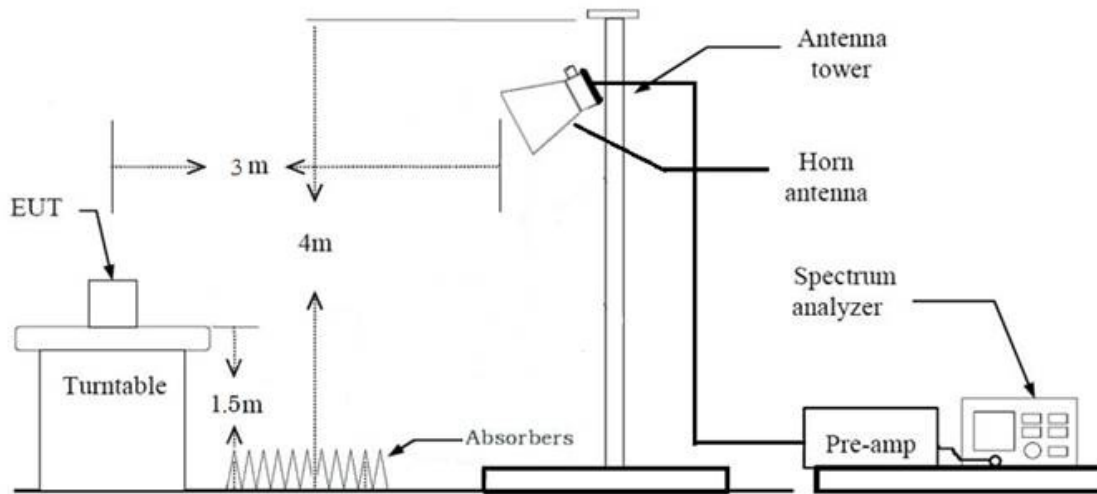

Test Procedure of Radiated spurious emissions (Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions (Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out

the highest emissions.

5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.

6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

7. The unit was tested with its standard battery.

8. Spectrum Setting

(1) Measurement Type (Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type (Average, G.6.c in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 %) = VBW \leq RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 %) = VBW \geq $1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 % duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor

10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency

11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

12. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep Time = auto
 - Trace mode = max hold
 - Allow sweeps to continue until the trace stabilizes.Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.
 - (2) Measurement Type (Average, G.6.c in KDB 789033 v02r01):
 - RBW = 1 MHz
 - VBW(Duty cycle \geq 98 %) = $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.
 - VBW(Duty cycle is < 98 %) = $VBW \geq 1/T$, where T is the minimum transmission duration.
 - The analyzer is set to linear detector mode.
 - Detector = Peak.
 - Sweep time = auto.
 - Trace mode = max hold.
 - Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 % duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.
9. Measured Frequency Range :
 - 4500 MHz ~ 5150 MHz
 - 5350 MHz ~ 5460 MHz
 - 5460 MHz ~ 5470 MHz
 - (75 MHz or more below the 5725 MHz) ~ 5725 MHz
 - 5850 MHz ~ (75 MHz or more above the 5850 MHz)
10. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)
11. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Attenuator(ATT) + Distance Factor(D.F)

The actual setting value of VBW

Mode	Worst Data rate (Mbps)	Duty Cycle	Duty Cycle Factor (dB)	The actual setting value of VBW (Hz)
802.11a	6	0.954	0.205	1 000
802.11n(HT20)	MCS 0(6.5)	0.951	0.218	1 000
802.11n(HT40)	MCS 0(13.5)	0.905	0.433	2 000
802.11ac(VHT20)	MCS 0(6.5)	0.949	0.228	1 000
802.11ac(VHT40)	MCS 0(13.5)	0.906	0.429	2 000
802.11ac(VHT80)	MCS 0(29.3)	0.823	0.847	3 000

8.7. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone , Stand alone + Shark Antenna
 - Mode : Stand alone + Shark Antenna
2. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : X
3. All datarate of operation were investigated and the worst case datarate results are reported
 - 802.11a : 6Mbps
 - 802.11n_HT20 : MCS0
 - 802.11n_HT40 : MCS0
 - 802.11ac_VHT20 : MCS0
 - 802.11ac_VHT40 : MCS0
 - 802.11ac_VHT80 : MCS0
4. Radiated Spurious Emission
 - All modulation of operation were investigated and the worst case modulation results are reported.
(Worstcase : 802.11a_6 Mbps)
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
6. DA3501CGN, Additional Models were tested and the worst case results are reported.
(Worst case : DA3501CGN)

AC Power line Conducted Emissions

1. We don't perform powerline conducted emission test. Because this EUT is used with vehicle.

Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported.
2. DA3501CGN, Additional Models were tested and the worst case results are reported.
(Worst case : DA3501CGN)

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26 dB Bandwidth	§ 15.407 (for Power Measurement)	N/A	Conducted	PASS
6 dB Bandwidth	§ 15.407(e)	>500 kHz (5725-5850 MHz)		PASS
Maximum Conducted Output Power	§ 15.407(a)(1),(2),(3)	< 250 mW(5150-5250 MHz) < 250 mW or 11+10log ₁₀ (BW) dBm (5250-5350 MHz) < 250 mW or 11+10log ₁₀ (BW) dBm (5470-5725 MHz) <1 W(5725-5850 MHz)		PASS
Peak Power Spectral Density	§ 15.407(a)(1),(2),(3)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
Frequency Stability	§ 15.407(g) § 2.1055	Maintained within the band		PASS
AC Conducted Emissions 150 kHz-30 MHz	§ 15.207 § 15.407(b)(8)	<FCC 15.207 limits		N/A (#Note1)
Undesirable Emissions	§ 15.407(b) (1)(2)(3)(4)	<-27 dBm/MHz EIRP (UNII1, 2A, 2C) cf. Section 8.7 (UNII 3)	Radiated	PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	§ 15.205, 15.407(b)(9), (10)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS

#Note1 : Not Tested.

10. TEST RESULT

10.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11a	6	2.063	2.162	0.954	0.205
	9	1.387	1.488	0.933	0.303
	12	1.046	1.147	0.912	0.398
	18	0.705	0.805	0.876	0.574
	24	0.534	0.634	0.843	0.744
	36	0.366	0.465	0.786	1.047
	48	0.277	0.378	0.734	1.343
	54	0.249	0.349	0.712	1.474


Mode	MCS Index	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11n (HT20)	0	1.923	2.022	0.951	0.218
	1	0.980	1.079	0.908	0.417
	2	0.666	0.764	0.871	0.601
	3	0.510	0.610	0.835	0.782
	4	0.354	0.453	0.780	1.078
	5	0.273	0.373	0.733	1.352
	6	0.250	0.349	0.715	1.459
	7	0.229	0.329	0.695	1.582
802.11n (HT40)	0	0.947	1.046	0.905	0.433
	1	0.493	0.593	0.832	0.799
	2	0.341	0.442	0.770	1.134
	3	0.267	0.366	0.729	1.372
	4	0.190	0.290	0.655	1.836
	5	0.154	0.254	0.607	2.165
	6	0.142	0.242	0.587	2.315
	7	0.130	0.229	0.566	2.471

Mode	MCS Index	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11ac (VHT20)	0	1.933	2.037	0.949	0.228
	1	0.990	1.089	0.909	0.414
	2	0.671	0.772	0.869	0.610
	3	0.518	0.618	0.839	0.765
	4	0.357	0.457	0.782	1.070
	5	0.280	0.381	0.735	1.338
	6	0.253	0.354	0.716	1.453
	7	0.232	0.334	0.695	1.583
	8	0.201	0.301	0.668	1.754
802.11ac (VHT40)	0	0.953	1.052	0.906	0.429
	1	0.497	0.597	0.832	0.797
	2	0.347	0.447	0.776	1.100
	3	0.269	0.370	0.726	1.392
	4	0.194	0.294	0.660	1.805
	5	0.158	0.258	0.614	2.121
	6	0.146	0.245	0.594	2.263
	7	0.134	0.233	0.573	2.417
	8	0.118	0.217	0.542	2.659
	9	0.114	0.213	0.532	2.738
802.11ac (VHT80)	0	0.462	0.562	0.823	0.847
	1	0.255	0.354	0.719	1.432
	2	0.182	0.282	0.647	1.891
	3	0.150	0.249	0.603	2.196
	4	0.114	0.213	0.533	2.730
	5	0.098	0.197	0.496	3.044
	6	0.090	0.190	0.474	3.240
	7	0.086	0.185	0.463	3.345
	8	0.078	0.177	0.439	3.573
	9	0.074	0.173	0.427	3.695


Note:

In order to simplify the report, attached plots were only the lowest datarate.


802.11a

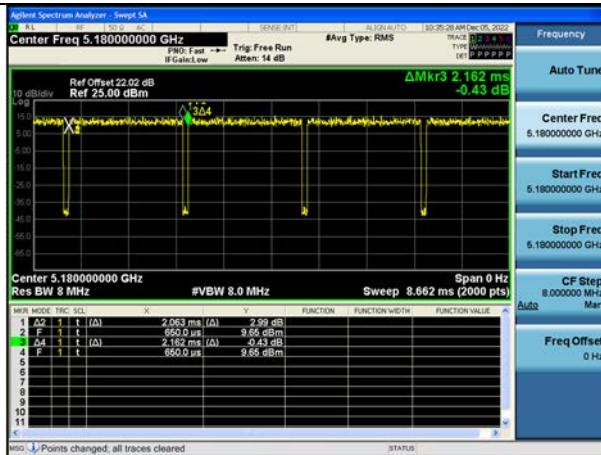


802.11n(HT20)

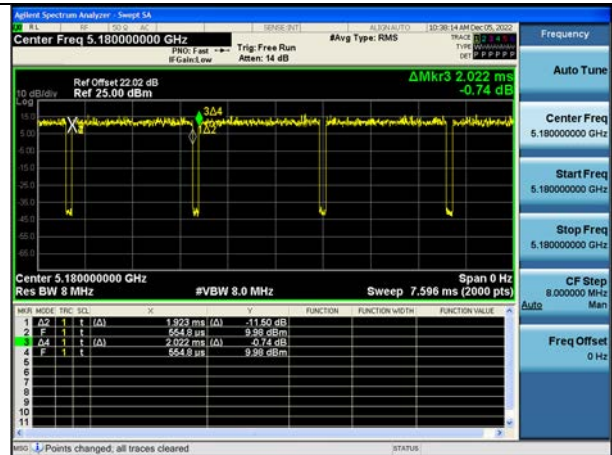


802.11n(HT40)

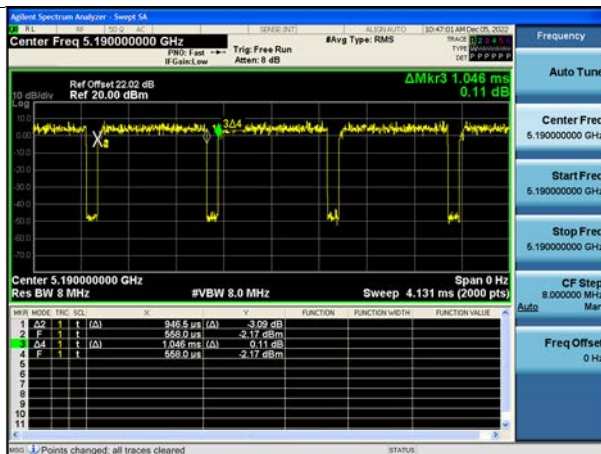


802.11ac(VHT20)

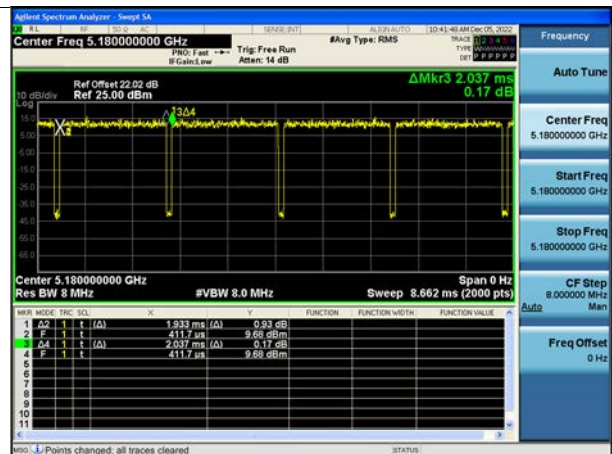

802.11ac(VHT40)

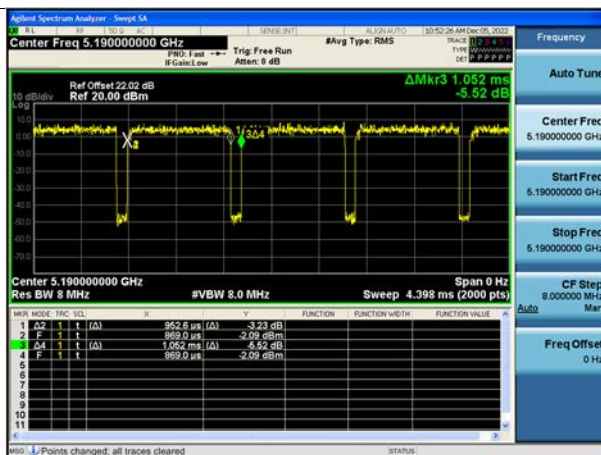

802.11ac(VHT80)

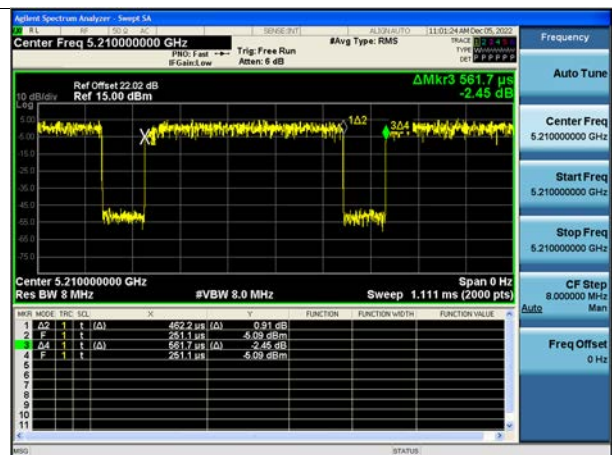

10.2 26 dB BANDWIDTH

802.11a Mode		26 dB Bandwidth [MHz]	99 % bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	21.19	16.646
5200	40	20.77	16.597
5240	48	20.92	16.607
5260	52	20.99	16.615
5300	60	21.19	16.592
5320	64	20.92	16.584
5500	100	20.94	16.644
5580	116	20.93	16.595
5720	144	20.74	16.622
5745	149	21.05	16.613
5785	157	20.90	16.633
5825	165	21.11	16.658

802.11n(HT20) Mode		26 dB Bandwidth [MHz]	99 % bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	21.27	17.788
5200	40	21.28	17.781
5240	48	21.26	17.729
5260	52	21.37	17.799
5300	60	21.35	17.750
5320	64	21.45	17.783
5500	100	21.39	17.793
5580	116	21.41	17.786
5720	144	21.48	17.740
5745	149	21.45	17.783
5785	157	21.42	17.823
5825	165	21.63	17.836

802.11n(HT40) Mode		26 dB Bandwidth [MHz]	99 % bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	39.56	36.185
5230	46	39.71	36.150
5270	54	39.24	36.065
5310	62	39.56	36.130
5510	102	39.47	36.073
5550	110	39.59	36.113
5710	142	39.57	36.146
5755	151	39.74	36.096
5795	159	39.57	36.143

802.11ac(VHT20) Mode		26 dB Bandwidth [MHz]	99 % bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	21.21	17.768
5200	40	21.49	17.821
5240	48	21.38	17.722
5260	52	21.28	17.746
5300	60	21.70	17.739
5320	64	21.29	17.772
5500	100	21.13	17.765
5580	116	21.37	17.773
5720	144	21.41	17.741
5745	149	21.23	17.819
5785	157	21.45	17.805
5825	165	21.50	17.788

802.11ac(VHT40) Mode		26 dB Bandwidth [MHz]	99 % bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	39.54	36.101
5230	46	39.61	36.064
5270	54	39.33	36.109
5310	62	39.54	36.078
5510	102	39.63	36.166
5550	110	39.54	36.143
5710	142	39.60	36.145
5755	151	39.67	36.142
5795	159	39.54	36.128


802.11ac(VHT80) Mode		26 dB Bandwidth [MHz]	99 % bandwidth [MHz]
Frequency [MHz]	Channel No.		
5210	42	81.21	75.497
5290	58	81.09	75.489
5530	106	80.96	75.529
5690	138	81.18	75.519
5775	155	81.16	75.556

■ Test Plots(802.11a)

Note:

In order to simplify the report, attached plots were only the widest channel.


802.11a UNII 1 BAND 26 dB Bandwidth (CH 36)

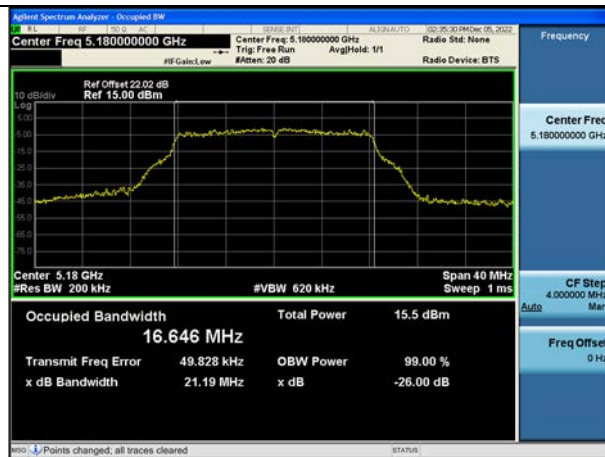

802.11a UNII 2A BAND 26 dB Bandwidth (CH 60)



802.11a UNII 2C BAND 26 dB Bandwidth (CH 100)

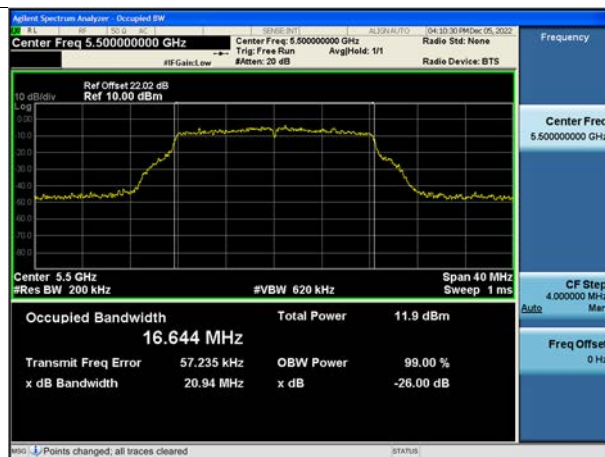

802.11a UNII 3 BAND 26 dB Bandwidth (CH 165)




☐ Test Plots(802.11n(HT20))


Note:

In order to simplify the report, attached plots were only the widest channel.


802.11n_HT20 UNII 1 BAND 26 dB Bandwidth(CH 40)

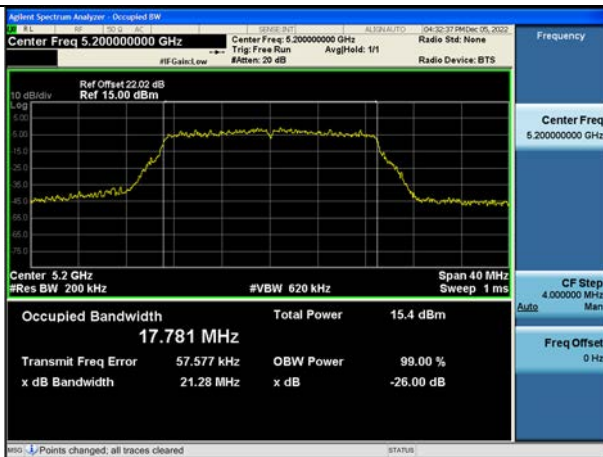


802.11n_HT20 UNII 2A BAND 26 dB Bandwidth(CH 64)

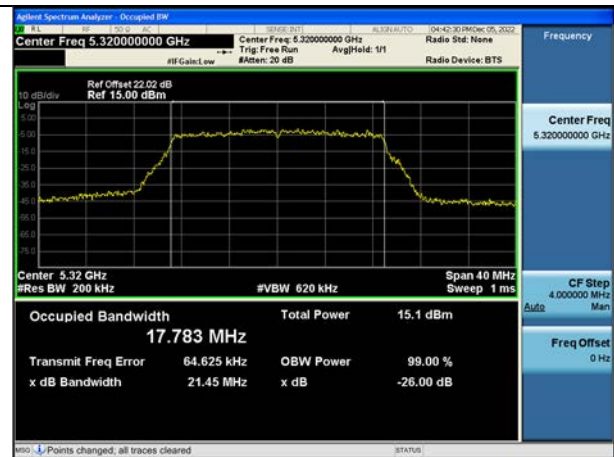

802.11n_HT20 UNII 2C BAND 26 dB Bandwidth(CH 144)

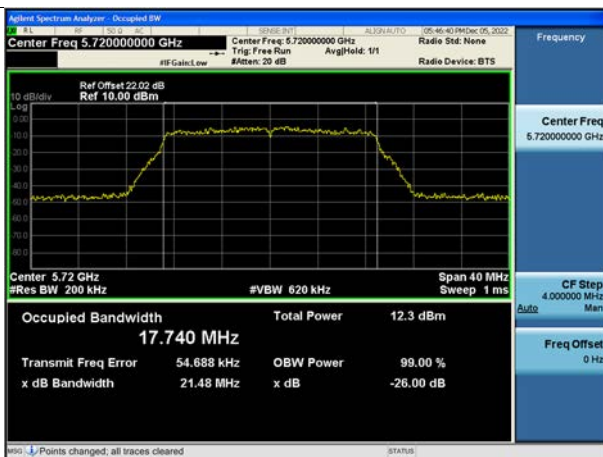

802.11n_HT20 UNII 3 BAND 26 dB Bandwidth(CH 165)

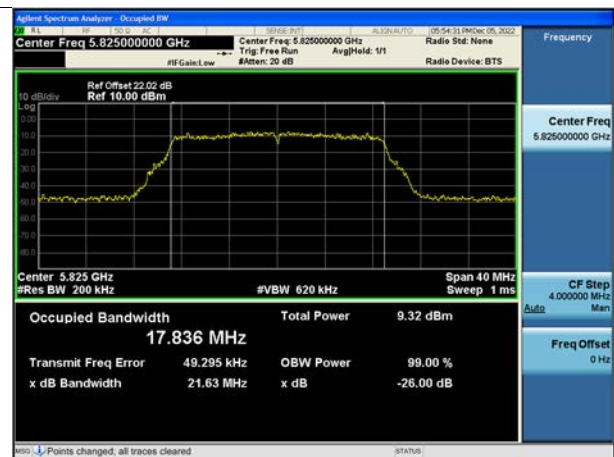


■ Test Plots(802.11n(HT40))

Note:

In order to simplify the report, attached plots were only the widest channel.


802.11n_HT40 UNII 1 BAND 26 dB Bandwidth(CH 46)

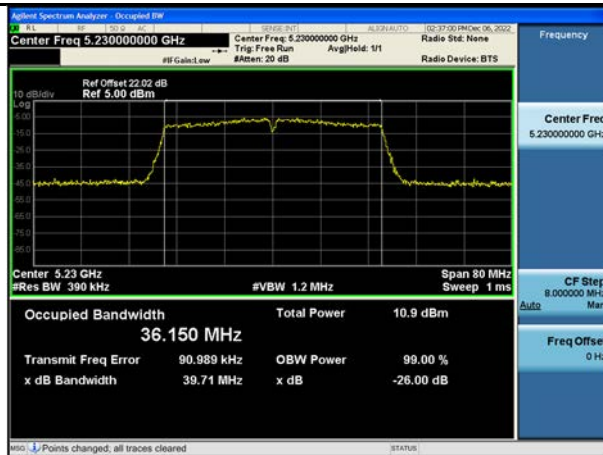

802.11n_HT40 UNII 2A BAND 26 dB Bandwidth (CH 62)



802.11n_HT40 UNII 2C BAND 26 dB Bandwidth(CH 110)

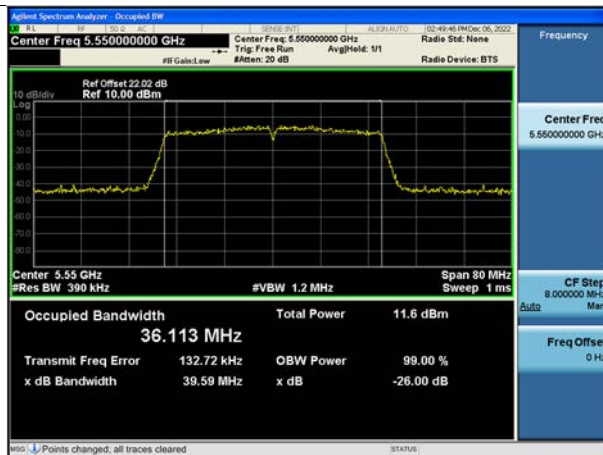

802.11n_HT40 UNII 3 BAND 26 dB Bandwidth (CH 151)




■ Test Plots(802.11ac(VHT20))

Note:

In order to simplify the report, attached plots were only the widest channel.


802.11ac_VHT20 UNII 1 BAND 26 dB Bandwidth(CH 40)

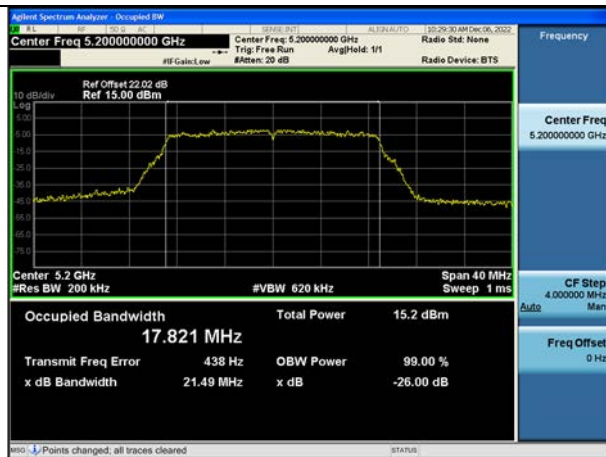


802.11ac_VHT20 UNII 2A BAND 26 dB Bandwidth(CH 60)



802.11ac_VHT20 UNII 2C BAND 26 dB Bandwidth(CH 144)

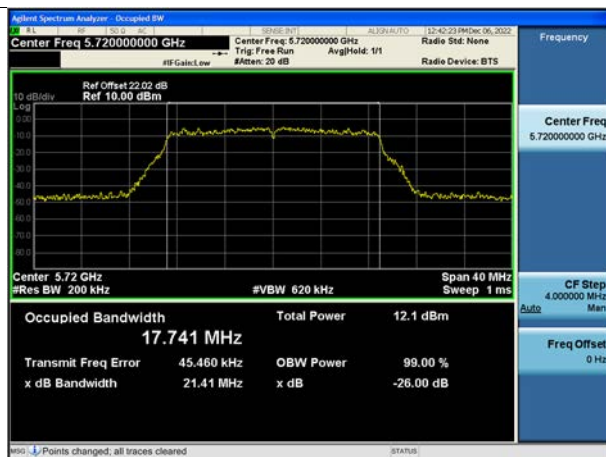

802.11ac_VHT20 UNII 3 BAND 26 dB Bandwidth(CH 165)

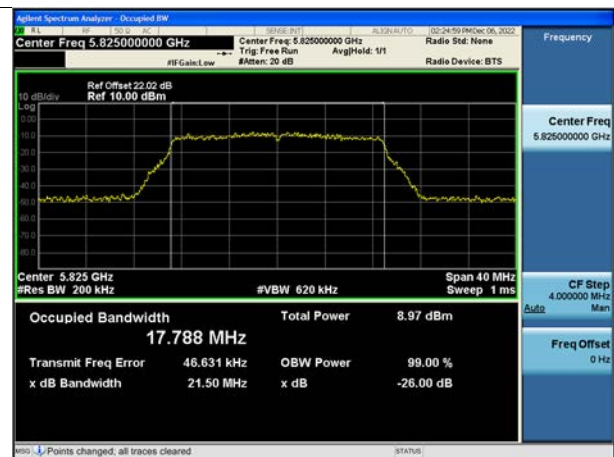

▣ Test Plots(802.11ac(VHT40))


Note:

In order to simplify the report, attached plots were only the widest channel.

802.11ac_VHT40 UNII 1 BAND 26 dB Bandwidth(CH 46)



802.11ac_VHT40 UNII 2A BAND 26 dB Bandwidth (CH 62)

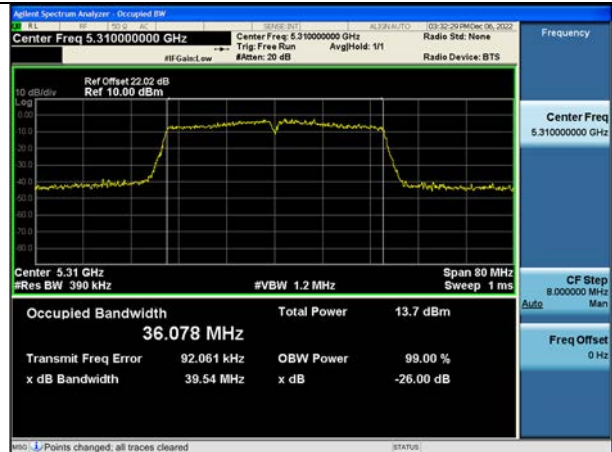

802.11ac_VHT40 UNII 2C BAND 26 dB Bandwidth(CH 102)



802.11ac_VHT40 UNII 3 BAND 26 dB Bandwidth (CH 151)



▣ Test Plots(802.11ac(VHT80))

Note:

In order to simplify the report, attached plots were only the widest channel.


802.11ac_VHT80 UNII 1 BAND 26 dB Bandwidth(CH 42)



802.11ac_VHT80 UNII 2A BAND 26 dB Bandwidth (CH 58)



802.11ac_VHT80 UNII 2C BAND 26 dB Bandwidth(CH 138)

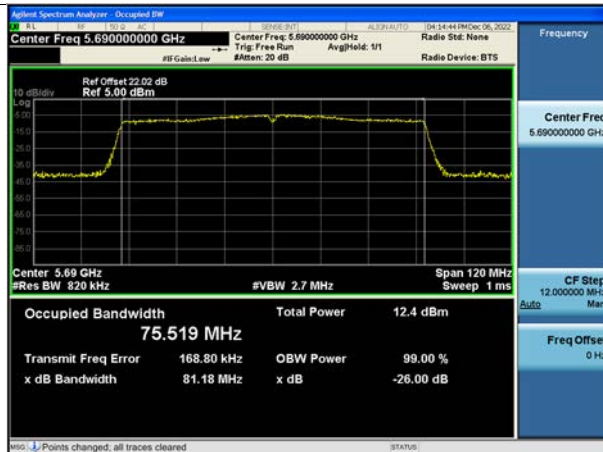

802.11ac_VHT80 UNII 3 BAND 26 dB Bandwidth (CH 155)



10.3 6 dB BANDWIDTH

802.11a Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	16.37	> 0.5	Pass
5785	157	16.36	> 0.5	Pass
5825	165	16.35	> 0.5	Pass

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.57	> 0.5	Pass
5785	157	17.60	> 0.5	Pass
5825	165	17.59	> 0.5	Pass

802.11n(HT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.46	> 0.5	Pass
5795	159	35.24	> 0.5	Pass

802.11ac(VHT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.59	> 0.5	Pass
5785	157	17.59	> 0.5	Pass
5825	165	17.57	> 0.5	Pass


802.11ac(VHT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.64	> 0.5	Pass
5795	159	35.78	> 0.5	Pass

802.11ac(VHT80) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	75.33	> 0.5	Pass

Test Plots

Note: In order to simplify the report, attached plots were only the narrowest channel.


802.11a (CH.165)

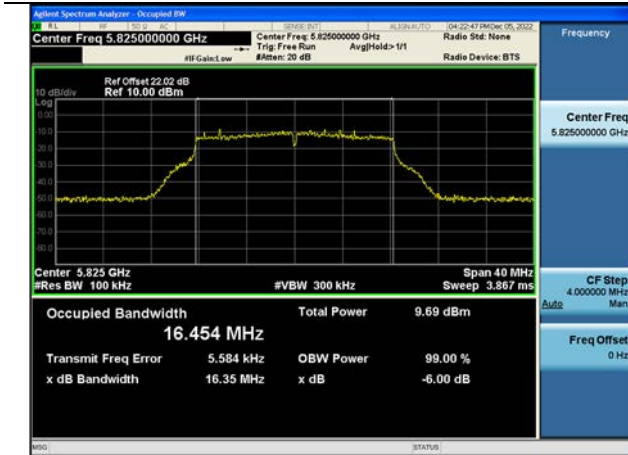


802.11n(HT20) (CH.149)




802.11n(HT40) (CH.159)

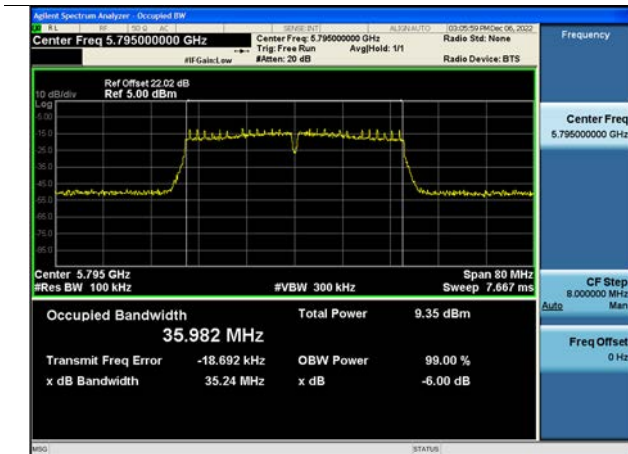


802.11ac(VHT20) (CH.165)

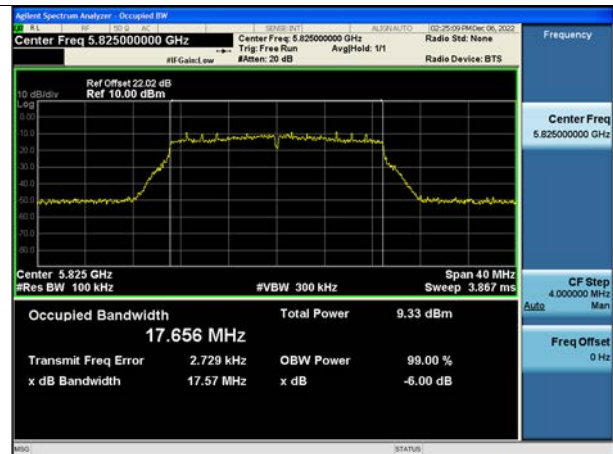

802.11ac(VHT40) (CH.151)

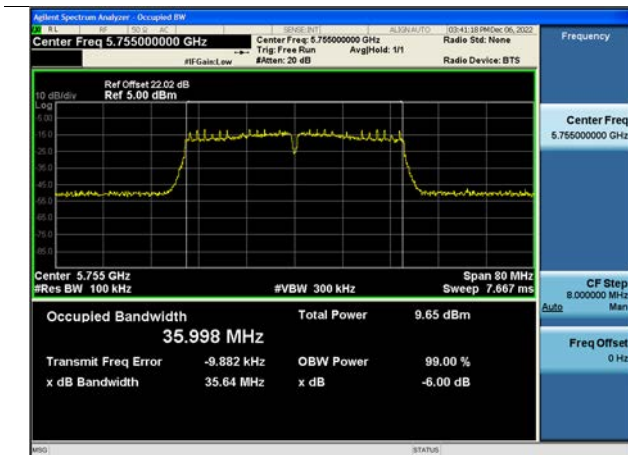

802.11ac(VHT80) (CH.155)

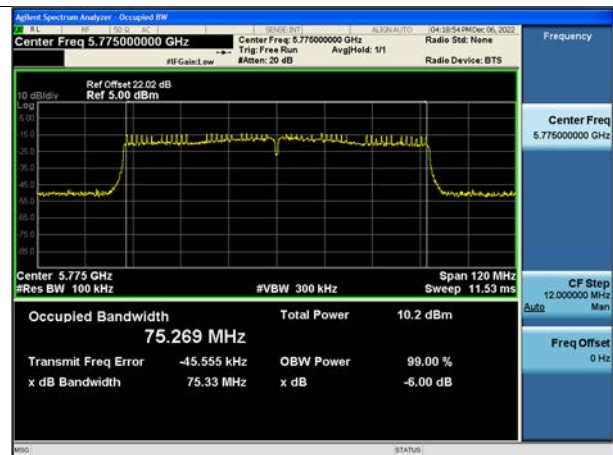

10.4 OUTPUT POWER MEASUREMENT

Straddle channel data in the table below are for reporting purposes only.

Straddle channel data were added in section 10.7.3.

Limit

(UNII 1) : 23.98 dBm

(UNII 2A, 2C) : 23.98 dBm or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)

(UNII 3) : 30.00 dBm

802.11a Mode		Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase Datarate [Mbps]
Frequency [MHz]	Channel No.					
5180	36	8.75	0.205	8.96	23.98	6M
5200	40	8.63	0.205	8.84	23.98	6M
5240	48	8.39	0.205	8.59	23.98	6M
5260	52	8.61	0.205	8.82	23.98	6M
5300	60	8.23	0.205	8.44	23.98	6M
5320	64	8.15	0.205	8.35	23.98	6M
5500	100	5.22	0.205	5.43	23.98	6M
5580	116	5.29	0.205	5.49	23.98	6M
5720	144	5.73	0.205	5.94	23.98	6M
5745	149	2.61	0.205	2.82	30.00	6M
5785	157	2.73	0.205	2.93	30.00	6M
5825	165	2.86	0.205	3.06	30.00	6M

802.11n(20 MHz) Mode		Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase MCS Index
Frequency [MHz]	Channel No.					
5180	36	8.53	0.218	8.75	23.98	MCS0
5200	40	8.39	0.218	8.61	23.98	MCS0
5240	48	8.44	0.218	8.66	23.98	MCS0
5260	52	8.71	0.218	8.92	23.98	MCS0
5300	60	8.37	0.218	8.58	23.98	MCS0
5320	64	8.26	0.218	8.48	23.98	MCS0
5500	100	5.23	0.218	5.45	23.98	MCS0
5580	116	5.11	0.218	5.33	23.98	MCS0
5720	144	5.36	0.218	5.58	23.98	MCS0
5745	149	2.54	0.218	2.76	30.00	MCS0
5785	157	2.61	0.218	2.83	30.00	MCS0
5825	165	2.45	0.218	2.67	30.00	MCS0

802.11n(40 MHz) Mode		Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase MCS Index
Frequency [MHz]	Channel No.					
5190	38	3.95	0.433	4.38	23.98	MCS0
5230	46	3.79	0.433	4.22	23.98	MCS0
5270	54	6.95	0.433	7.38	23.98	MCS0
5310	62	6.43	0.433	6.86	23.98	MCS0
5510	102	4.55	0.433	4.99	23.98	MCS0
5550	110	4.55	0.433	4.99	23.98	MCS0
5710	142	4.46	0.433	4.89	23.98	MCS0
5755	151	1.96	0.433	2.39	30.00	MCS0
5795	159	1.50	0.433	1.94	30.00	MCS0

802.11ac(20 MHz) Mode		Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase MCS Index
Frequency [MHz]	Channel No.					
5180	36	8.48	0.228	8.71	23.98	MCS0
5200	40	8.39	0.228	8.62	23.98	MCS0
5240	48	8.48	0.228	8.70	23.98	MCS0
5260	52	8.17	0.228	8.40	23.98	MCS0
5300	60	8.38	0.228	8.61	23.98	MCS0
5320	64	8.23	0.228	8.46	23.98	MCS0
5500	100	5.11	0.228	5.34	23.98	MCS0
5580	116	5.12	0.228	5.35	23.98	MCS0
5720	144	5.19	0.228	5.41	23.98	MCS0
5745	149	2.45	0.228	2.67	30.00	MCS0
5785	157	2.49	0.228	2.72	30.00	MCS0
5825	165	2.20	0.228	2.43	30.00	MCS0

802.11ac(40 MHz) Mode		Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase MCS Index
Frequency [MHz]	Channel No.					
5190	38	3.88	0.429	4.31	23.98	MCS0
5230	46	3.81	0.429	4.24	23.98	MCS0
5270	54	7.09	0.429	7.52	23.98	MCS0
5310	62	6.54	0.429	6.97	23.98	MCS0
5510	102	4.56	0.429	4.99	23.98	MCS0
5550	110	4.50	0.429	4.93	23.98	MCS0
5710	142	4.70	0.429	5.13	23.98	MCS0
5755	151	1.93	0.429	2.36	30.00	MCS0
5795	159	1.49	0.429	1.92	30.00	MCS0

802.11ac(80 MHz) Mode		Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase MCS Index
Frequency [MHz]	Channel No.					
5210	42	4.68	0.847	5.53	23.98	MCS0
5290	58	6.60	0.847	7.45	23.98	MCS0
5530	106	4.49	0.847	5.34	23.98	MCS0
5690	138	4.05	0.847	4.90	23.98	MCS0
5775	155	1.33	0.847	2.18	30.00	MCS0

10.5 FREQUENCY STABILITY.

10.5.1 80 MHz BW

Startup after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,210,000,000 Hz
CHANNEL:	42
REFERENCE VOLTAGE:	14.4 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	14.40	+20(Ref)	5210061.27	61.27
100%		-30	5210080.63	80.63
100%		-20	5210077.75	77.75
100%		-10	5210071.15	71.15
100%		0	5210067.54	67.54
100%		+10	5210064.85	64.85
100%		+30	5210063.44	63.44
100%		+40	5210072.90	72.90
100%		+50	5210077.55	77.55
High	16.00	+20	5210079.92	79.92
Low	9.00	+20	5210078.39	78.39

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2A
OPERATING FREQUENCY:	5,290,000,000 Hz
CHANNEL:	58
REFERENCE VOLTAGE:	14.4 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	14.40	+20(Ref)	5290062.54	62.54
100%		-30	5290081.96	81.96
100%		-20	5290079.39	79.39
100%		-10	5290072.81	72.81
100%		0	5290067.74	67.74
100%		+10	5290064.66	64.66
100%		+30	5290065.30	65.30
100%		+40	5290075.64	75.64
100%		+50	5290081.31	81.31
High	16.00	+20	5290082.21	82.21
Low	9.00	+20	5290082.35	82.35

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5530061.90	61.90
100%		-30	5530082.16	82.16
100%		-20	5530080.05	80.05
100%		-10	5530073.54	73.54
100%		0	5530068.96	68.96
100%		+10	5530065.85	65.85
100%		+30	5530064.66	64.66
100%		+40	5530073.61	73.61
100%		+50	5530079.54	79.54
High	16.00	+20	5530081.83	81.83
Low	9.00	+20	5530079.83	79.83

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	14.4 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	14.40	+20(Ref)	5775062.15	62.15
100%		-30	5775082.54	82.54
100%		-20	5775078.47	78.47
100%		-10	5775071.91	71.91
100%		0	5775068.59	68.59
100%		+10	5775065.62	65.62
100%		+30	5775064.76	64.76
100%		+40	5775072.95	72.95
100%		+50	5775078.10	78.10
High	16.00	+20	5775081.30	81.30
Low	9.00	+20	5775081.88	81.88

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

2 minutes after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,210,000,000 Hz
CHANNEL:	42
REFERENCE VOLTAGE:	14.4 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	14.40	+20(Ref)	5210066.32	66.32
100%		-30	5210085.63	85.63
100%		-20	5210082.48	82.48
100%		-10	5210077.20	77.20
100%		0	5210072.55	72.55
100%		+10	5210069.76	69.76
100%		+30	5210069.16	69.16
100%		+40	5210078.74	78.74
100%		+50	5210082.14	82.14
High	16.00	+20	5210083.72	83.72
Low	9.00	+20	5210084.07	84.07

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2A
OPERATING FREQUENCY:	5,290,000,000 Hz
CHANNEL:	58
REFERENCE VOLTAGE:	14.4 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	14.40	+20(Ref)	5290065.46	65.46
100%		-30	5290084.47	84.47
100%		-20	5290081.76	81.76
100%		-10	5290075.69	75.69
100%		0	5290070.62	70.62
100%		+10	5290067.75	67.75
100%		+30	5290068.14	68.14
100%		+40	5290078.38	78.38
100%		+50	5290084.31	84.31
High	16.00	+20	5290085.39	85.39
Low	9.00	+20	5290083.43	83.43

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5530067.28	67.28
100%		-30	5530086.84	86.84
100%		-20	5530083.41	83.41
100%		-10	5530077.66	77.66
100%		0	5530073.19	73.19
100%		+10	5530070.02	70.02
100%		+30	5530070.12	70.12
100%		+40	5530081.00	81.00
100%		+50	5530087.08	87.08
High	16.00	+20	5530087.36	87.36
Low	9.00	+20	5530085.54	85.54

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	14.4 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	14.40	+20(Ref)	5775068.57	68.57
100%		-30	5775087.57	87.57
100%		-20	5775084.11	84.11
100%		-10	5775078.65	78.65
100%		0	5775074.52	74.52
100%		+10	5775072.26	72.26
100%		+30	5775072.57	72.57
100%		+40	5775081.94	81.94
100%		+50	5775086.08	86.08
High	16.00	+20	5775086.71	86.71
Low	9.00	+20	5775086.22	86.22

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

5 minutes after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,210,000,000 Hz
CHANNEL:	42
REFERENCE VOLTAGE:	14.4 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	14.40	+20(Ref)	5210072.45	72.45
100%		-30	5210093.32	93.32
100%		-20	5210090.86	90.86
100%		-10	5210084.40	84.40
100%		0	5210081.18	81.18
100%		+10	5210077.09	77.09
100%		+30	5210075.60	75.60
100%		+40	5210085.36	85.36
100%		+50	5210089.39	89.39
High	16.00	+20	5210090.48	90.48
Low	9.00	+20	5210092.07	92.07

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2A
OPERATING FREQUENCY:	5,290,000,000 Hz
CHANNEL:	58
REFERENCE VOLTAGE:	14.4 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	14.40	+20(Ref)	5290076.81	76.81
100%		-30	5290097.26	97.26
100%		-20	5290093.62	93.62
100%		-10	5290087.70	87.70
100%		0	5290083.72	83.72
100%		+10	5290079.73	79.73
100%		+30	5290080.06	80.06
100%		+40	5290088.44	88.44
100%		+50	5290091.97	91.97
High	16.00	+20	5290094.34	94.34
Low	9.00	+20	5290095.52	95.52

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5530075.87	75.87
100%		-30	5530096.76	96.76
100%		-20	5530092.82	92.82
100%		-10	5530086.59	86.59
100%		0	5530082.62	82.62
100%		+10	5530079.38	79.38
100%		+30	5530079.69	79.69
100%		+40	5530089.17	89.17
100%		+50	5530094.37	94.37
High	16.00	+20	5530095.07	95.07
Low	9.00	+20	5530095.33	95.33

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	14.4 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	14.40	+20(Ref)	5775076.17	76.17
100%		-30	5775095.08	95.08
100%		-20	5775092.35	92.35
100%		-10	5775085.71	85.71
100%		0	5775080.83	80.83
100%		+10	5775077.69	77.69
100%		+30	5775079.41	79.41
100%		+40	5775088.22	88.22
100%		+50	5775093.13	93.13
High	16.00	+20	5775095.08	95.08
Low	9.00	+20	5775095.10	95.10

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10 minutes after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,210,000,000 Hz
CHANNEL:	42
REFERENCE VOLTAGE:	14.4 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	14.40	+20(Ref)	5210079.31	79.31
100%		-30	5210099.08	99.08
100%		-20	5210095.53	95.53
100%		-10	5210089.76	89.76
100%		0	5210084.70	84.70
100%		+10	5210081.42	81.42
100%		+30	5210082.75	82.75
100%		+40	5210091.50	91.50
100%		+50	5210095.60	95.60
High	16.00	+20	5210097.41	97.41
Low	9.00	+20	5210098.45	98.45

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2A
OPERATING FREQUENCY:	5,290,000,000 Hz
CHANNEL:	58
REFERENCE VOLTAGE:	14.4 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	14.40	+20(Ref)	5290079.68	79.68
100%		-30	5290098.89	98.89
100%		-20	5290095.51	95.51
100%		-10	5290088.63	88.63
100%		0	5290085.25	85.25
100%		+10	5290082.95	82.95
100%		+30	5290082.95	82.95
100%		+40	5290092.51	92.51
100%		+50	5290098.23	98.23
High	16.00	+20	5290099.40	99.40
Low	9.00	+20	5290098.80	98.80

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5530082.55	82.55
100%		-30	5530102.91	102.91
100%		-20	5530099.64	99.64
100%		-10	5530093.99	93.99
100%		0	5530089.30	89.30
100%		+10	5530085.91	85.91
100%		+30	5530084.78	84.78
100%		+40	5530092.30	92.30
100%		+50	5530096.15	96.15
High	16.00	+20	5530100.40	100.40
Low	9.00	+20	5530101.60	101.60

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	14.4 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	14.40	+20(Ref)	5775080.18	80.18
100%		-30	5775099.49	99.49
100%		-20	5775095.67	95.67
100%		-10	5775090.33	90.33
100%		0	5775085.50	85.50
100%		+10	5775083.20	83.20
100%		+30	5775082.79	82.79
100%		+40	5775091.75	91.75
100%		+50	5775097.36	97.36
High	16.00	+20	5775099.79	99.79
Low	9.00	+20	5775099.27	99.27

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10.6 POWER SPECTRAL DENSITY

802.11a Mode		Measured PSD [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm/MHz]	Worstcase Datarate [Mbps]	Limit
Frequency [MHz]	Channel No.					
5180	36	-1.876	0.205	-1.671	6M	11 dBm/MHz
5200	40	-1.217	0.205	-1.012	6M	
5240	48	-1.576	0.205	-1.371	6M	
5260	52	-1.447	0.205	-1.242	6M	
5300	60	-1.900	0.205	-1.695	6M	
5320	64	-1.387	0.205	-1.182	6M	
5500	100	-4.691	0.205	-4.486	6M	
5580	116	-4.729	0.205	-4.524	6M	
5720	144	-4.361	0.205	-4.156	6M	
5745	149	-10.153	0.205	-9.948	6M	30 dBm/500 kHz
5785	157	-9.919	0.205	-9.714	6M	
5825	165	-9.716	0.205	-9.511	6M	

802.11n(20 MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm/MHz]	Worstcase MCS Index	Limit
Frequency [MHz]	Channel No.					
5180	36	-1.869	0.218	-1.651	MCS0	11 dBm/MHz
5200	40	-1.934	0.218	-1.716	MCS0	
5240	48	-1.843	0.218	-1.625	MCS0	
5260	52	-1.611	0.218	-1.393	MCS0	
5300	60	-1.893	0.218	-1.675	MCS0	
5320	64	-2.133	0.218	-1.915	MCS0	
5500	100	-5.225	0.218	-5.007	MCS0	
5580	116	-5.277	0.218	-5.059	MCS0	
5720	144	-4.917	0.218	-4.699	MCS0	
5745	149	-10.555	0.218	-10.337	MCS0	30 dBm/500 kHz
5785	157	-10.375	0.218	-10.157	MCS0	
5825	165	-10.589	0.218	-10.371	MCS0	

802.11n(40 MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm/MHz]	Worstcase MCS Index	Limit
Frequency [MHz]	Channel No.					
5190	38	-9.410	0.433	-8.977	MCS0	11 dBm/MHz
5230	46	-9.227	0.433	-8.794	MCS0	
5270	54	-6.218	0.433	-5.785	MCS0	
5310	62	-6.499	0.433	-6.066	MCS0	
5510	102	-8.555	0.433	-8.122	MCS0	
5550	110	-8.559	0.433	-8.126	MCS0	
5710	142	-8.682	0.433	-8.249	MCS0	30 dBm /500 kHz
5755	151	-13.694	0.433	-13.261	MCS0	
5795	159	-14.373	0.433	-13.940	MCS0	

802.11ac(20 MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm/MHz]	Worstcase MCS Index	Limit
Frequency [MHz]	Channel No.					
5180	36	-1.833	0.228	-1.605	MCS0	11 dBm/MHz
5200	40	-1.851	0.228	-1.623	MCS0	
5240	48	-1.768	0.228	-1.540	MCS0	
5260	52	-1.499	0.228	-1.271	MCS0	
5300	60	-1.812	0.228	-1.584	MCS0	
5320	64	-1.949	0.228	-1.721	MCS0	
5500	100	-5.247	0.228	-5.019	MCS0	
5580	116	-5.540	0.228	-5.312	MCS0	
5720	144	-5.082	0.228	-4.854	MCS0	30 dBm/500 kHz
5745	149	-10.439	0.228	-10.211	MCS0	
5785	157	-10.197	0.228	-9.969	MCS0	
5825	165	-10.640	0.228	-10.412	MCS0	

802.11ac(40 MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm/MHz]	Worstcase MCS Index	Limit
Frequency [MHz]	Channel No.					
5190	38	-9.277	0.429	-8.848	MCS0	11 dBm/MHz
5230	46	-9.080	0.429	-8.651	MCS0	
5270	54	-5.831	0.429	-5.402	MCS0	
5310	62	-6.433	0.429	-6.004	MCS0	
5510	102	-8.474	0.429	-8.045	MCS0	
5550	110	-8.562	0.429	-8.133	MCS0	
5710	142	-8.073	0.429	-7.644	MCS0	30 dBm/500 kHz
5755	151	-13.881	0.429	-13.452	MCS0	
5795	159	-14.251	0.429	-13.822	MCS0	

802.11ac(80 MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm/MHz]	Worstcase MCS Index	Limit
Frequency [MHz]	Channel No.					
5210	42	-11.355	0.847	-10.508	MCS0	11 dBm/MHz
5290	58	-9.583	0.847	-8.736	MCS0	
5530	106	-11.636	0.847	-10.789	MCS0	
5690	138	-12.133	0.847	-11.286	MCS0	
5775	155	-17.813	0.847	-16.966	MCS0	30 dBm/500 kHz

■ Test Plots(802.11a)


Note:

In order to simplify the report, attached plots were only channel of the highest power.

UNII 1 (Ch. 40)



UNII 2A (Ch. 64)

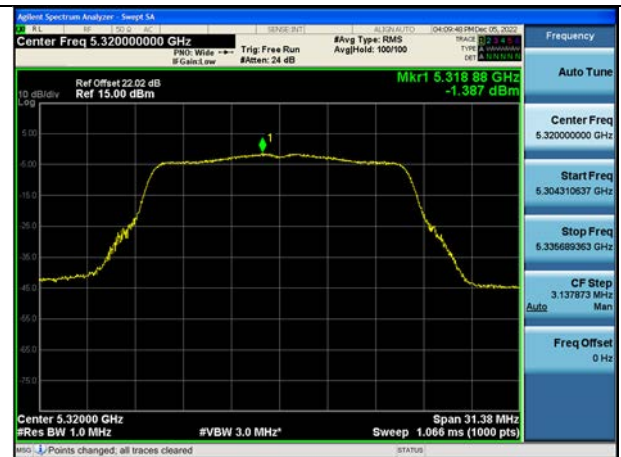

UNII 2C (Ch. 144)



UNII 3 (Ch. 165)



■ Test Plots(802.11n(HT20))


Note:

In order to simplify the report, attached plots were only channel of the highest power.

UNII 1 (Ch. 48)



UNII 2A (Ch. 52)

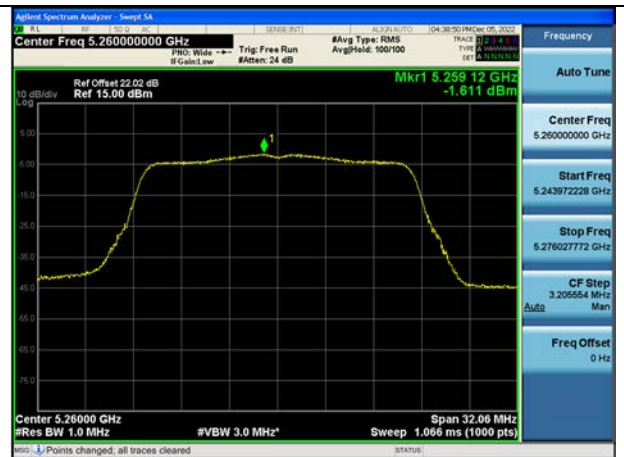

UNII 2C (Ch. 144)



UNII 3 (Ch. 157)



■ Test Plots(802.11n(HT40))

Note:

In order to simplify the report, attached plots were only channel of the highest power.


UNII 1 (Ch. 46)




UNII 2A (Ch. 54)



UNII 2C (Ch. 102)

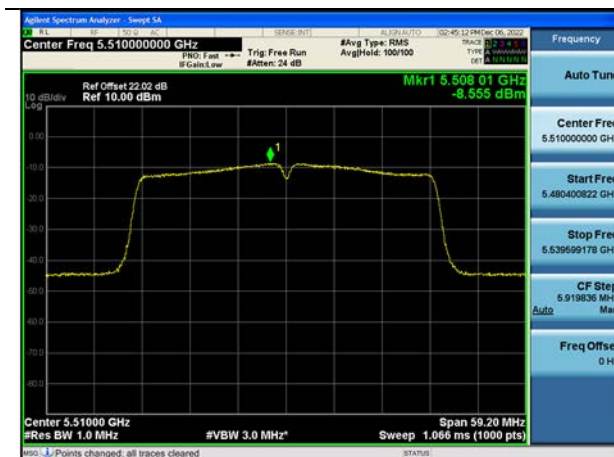


UNII 3 (Ch. 151)

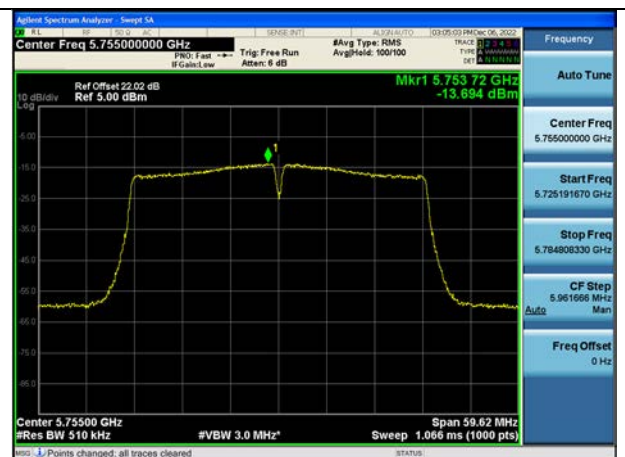

- Test Plots(802.11ac(VHT20))

Note:

In order to simplify the report, attached plots were only channel of the highest power.

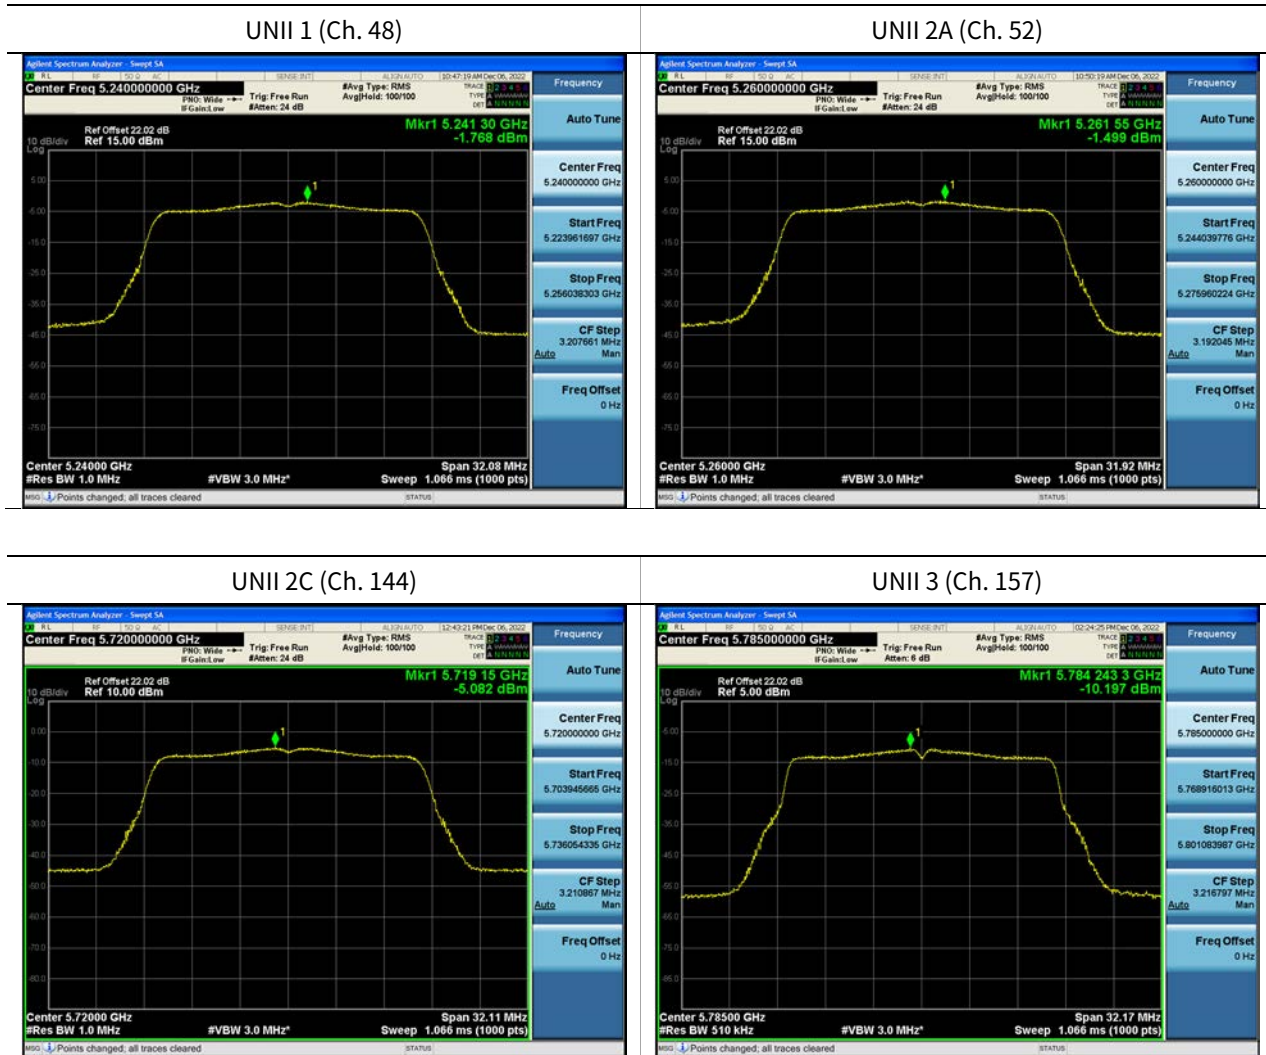

■ Test Plots(802.11ac(VHT40))

Note:

In order to simplify the report, attached plots were only channel of the highest power.


UNII 1 (Ch. 46)




UNII 2A (Ch. 54)



UNII 2C (Ch. 142)

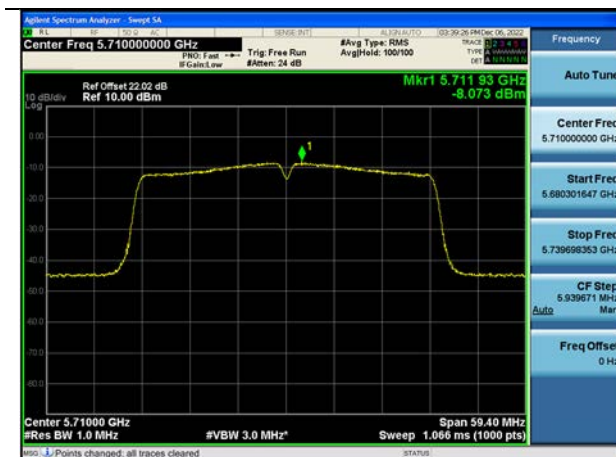

UNII 3 (Ch. 151)

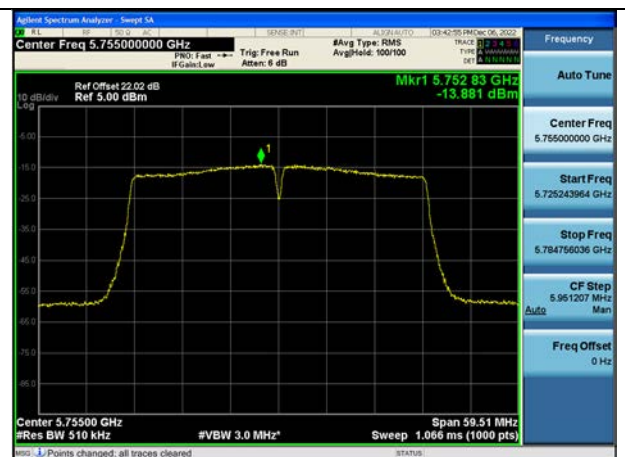


■ Test Plots(802.11ac(VHT80))

Note:

In order to simplify the report, attached plots were only channel of the highest power.


UNII 1 (Ch. 42)

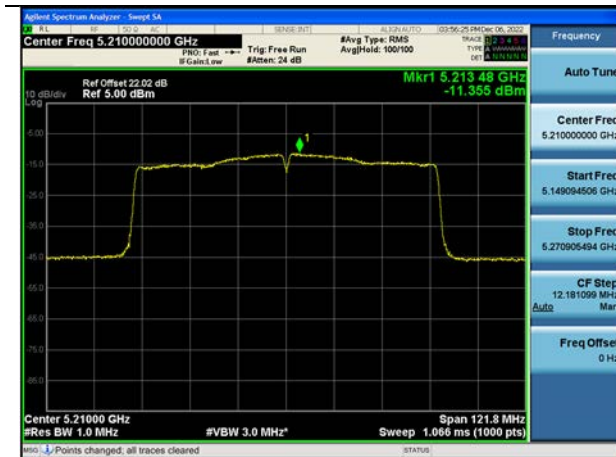

UNII 2A (Ch. 58)



UNII 2C (Ch. 106)

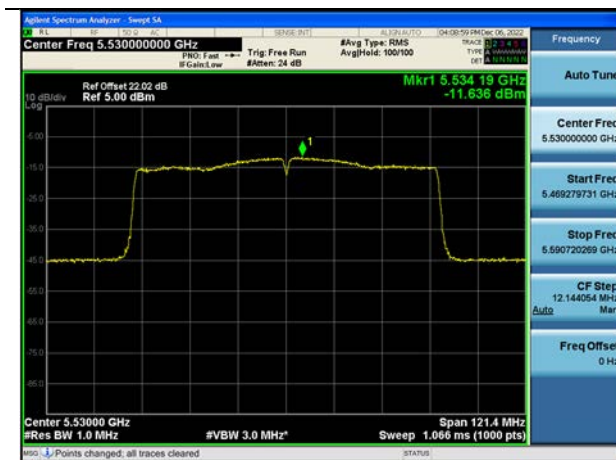

UNII 3 (Ch. 155)



10.7 STRADDLE CHANNEL

10.7.1 26 dB Bandwidth

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11a	UNII 2C	5720	144	5709.56	15.44
802.11n(HT20)				5709.24	15.76
802.11ac(VHT20)				5709.44	15.56
802.11a	UNII 3	5720	144	5730.48	5.48
802.11n(HT20)				5730.68	5.68
802.11ac(VHT20)				5730.64	5.64

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11n(HT40)	UNII 2C	5710	142	5690.40	34.60
802.11ac(VHT40)				5690.24	34.76
802.11n(HT40)	UNII 3	5710	142	5729.76	4.76
802.11ac(VHT40)				5729.92	4.92

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11ac(VHT80)	UNII 2C	5690	138	5649.68	75.32
	UNII 3	5690	138	5730.68	5.68

Note:

[UNII 2C] 26 dB Bandwidth = 5725 MHz - Measured Frequency[MHz]

[UNII 3C] 26 dB Bandwidth = Measured Frequency[MHz] -5725 MHz

■ Test Plots (26 dB Bandwidth)


802.11a UNII Band



802.11n(HT20) UNII Band



802.11ac(VHT20) UNII Band

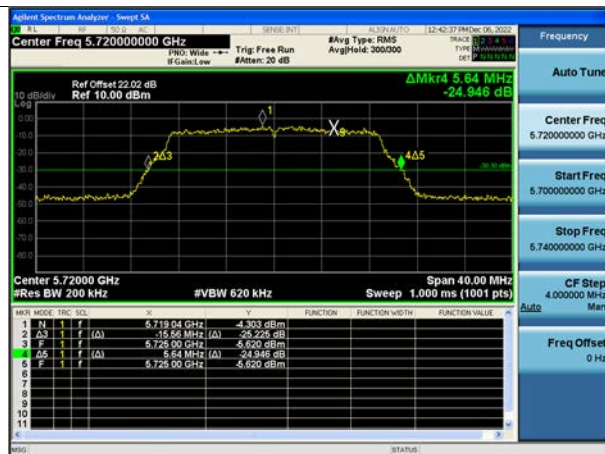

■ Test Plots (26 dB Bandwidth)

802.11n(HT40) UNII Band



802.11ac(VHT40) UNII Band



802.11ac(VHT80) UNII Band



10.7.2 6 dB Bandwidth

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
802.11a	UNII 3	5720	144	5728.20	3.20	> 0.5
802.11n(HT20)				5728.84	3.84	> 0.5
802.11ac(VHT20)				5728.84	3.84	> 0.5

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
802.11n(HT40)	UNII 3	5710	142	5727.68	2.68	> 0.5
802.11ac(VHT40)				5727.92	2.92	> 0.5


Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
802.11ac(VHT80)	UNII 3	5690	138	5727.68	2.68	> 0.5

Note:


6 dB Bandwidth = Measured Frequency[MHz] – 5725 MHz

Test Plots(UNII 3 Band 6 dB Bandwidth)

802.11a_CH.144

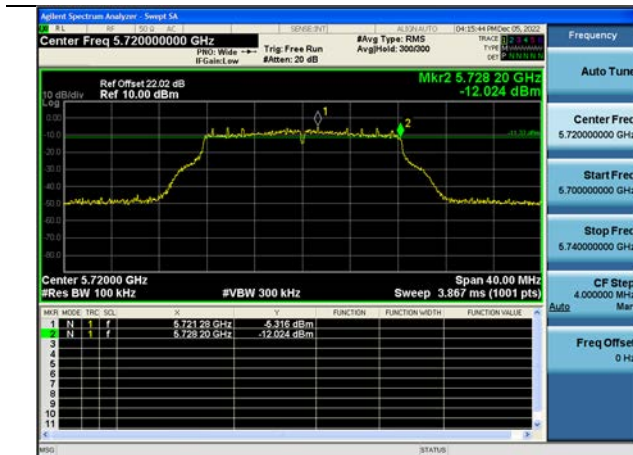


802.11n_HT20_CH.144

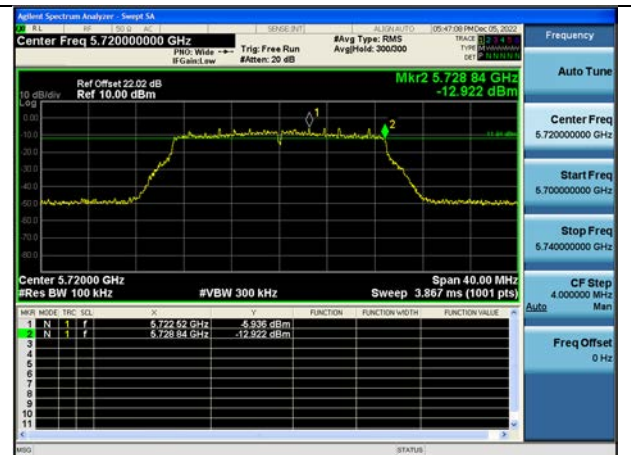


802.11ac_VHT20_CH.144




802.11n_HT40 CH.142

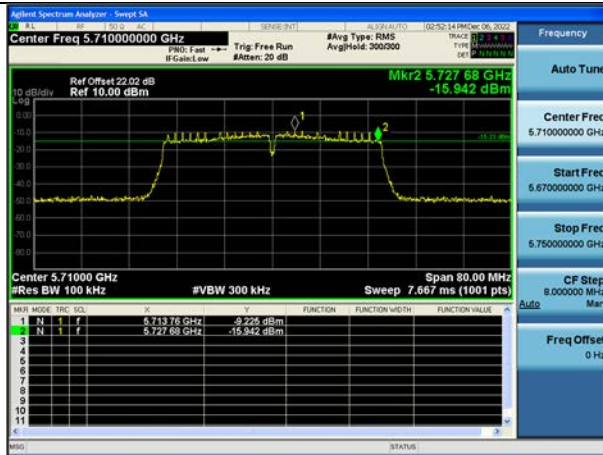

802.11ac_VHT40 CH.142

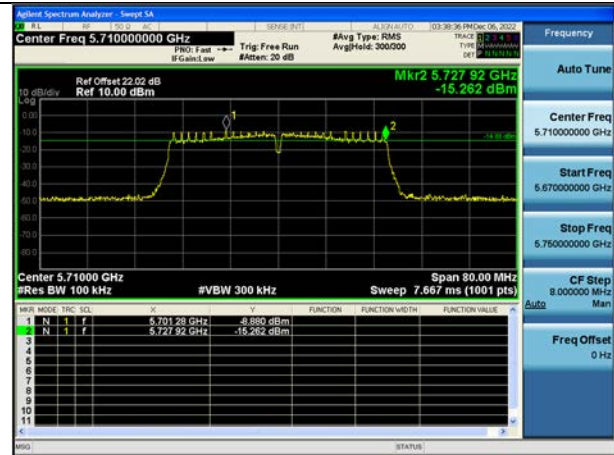

802.11ac_VHT80 CH.138

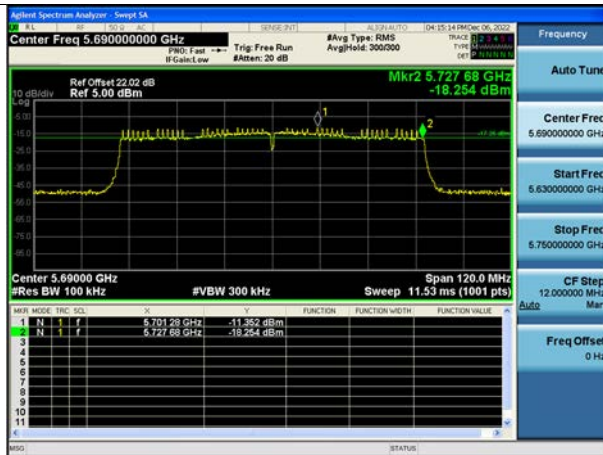

10.7.3 Output Power


Mode	Frequency [MHz]	Channel	Measured Power (dBm)	Duty Cycle Factor (dB)	Total Power (dBm)	Limit (dBm)
802.11a	5720 (UNII 2C Band)	144	5.00	0.205	5.21	22.89
802.11n(HT20)			4.53	0.218	4.75	22.98
802.11ac(VHT20)			4.36	0.228	4.59	22.92
802.11a	5720 (UNII 3 Band)	144	-2.23	0.205	-2.02	30.00
802.11n(HT20)			-2.17	0.218	-1.95	30.00
802.11ac(VHT20)			-2.35	0.228	-2.12	30.00

Mode	Frequency [MHz]	Channel	Measured Power (dBm)	Duty Cycle Factor (dB)	Total Power (dBm)	Limit (dBm)
802.11n(HT40)	5710 (UNII 2C Band)	142	4.28	0.433	4.71	23.98
802.11ac(VHT40)			4.50	0.429	4.93	23.98
802.11n(HT40)	5710 (UNII 3 Band)	142	-7.36	0.433	-6.92	30.00
802.11ac(VHT40)			-7.16	0.429	-6.73	30.00

Mode	Frequency [MHz]	Channel	Measured Power (dBm)	Duty Cycle Factor (dB)	Total Power (dBm)	Limit (dBm)
802.11ac(VHT80)	5690 (UNII 2C Band)	138	3.84	0.847	4.69	23.98
	5690 (UNII 3 Band)	138	-10.75	0.847	-9.90	30.00

Test Plots

802.11a UNII 2C Band

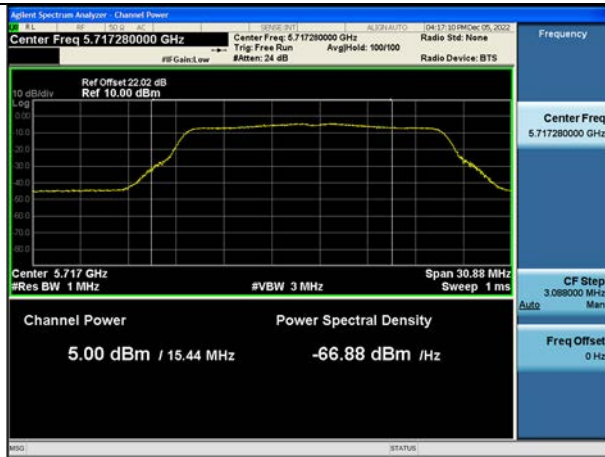


802.11a UNII 3 Band




802.11n(HT20) UNII 2C Band



802.11n(HT20) UNII 3 Band

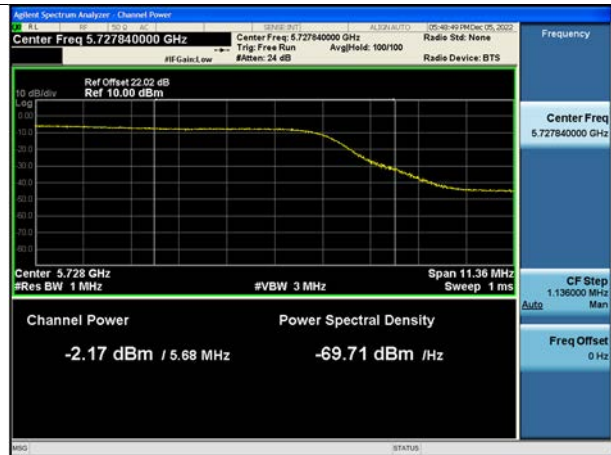


802.11ac(VHT20) UNII 2C Band

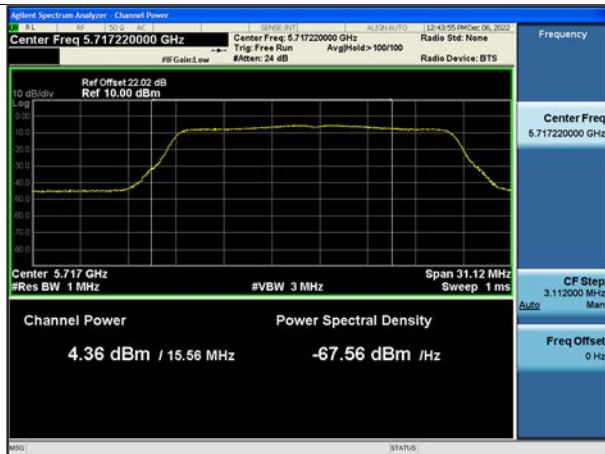

802.11ac(VHT20) UNII 3 Band




802.11n(HT40) UNII 2C Band

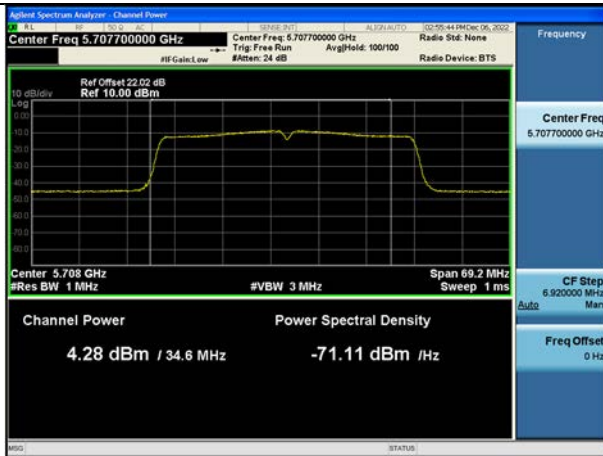


802.11n(HT40) UNII 3 Band




802.11ac(VHT40) UNII 2C Band

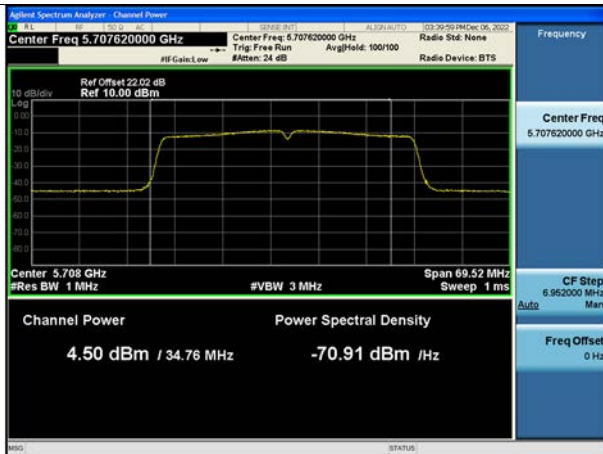


802.11ac(VHT40) UNII 3 Band

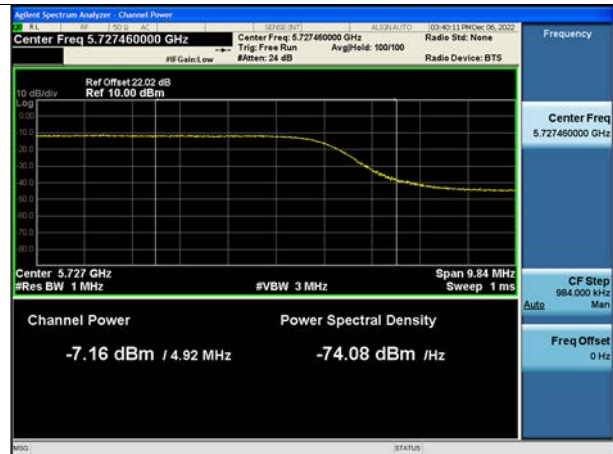

802.11ac(VHT80) UNII 2C Band

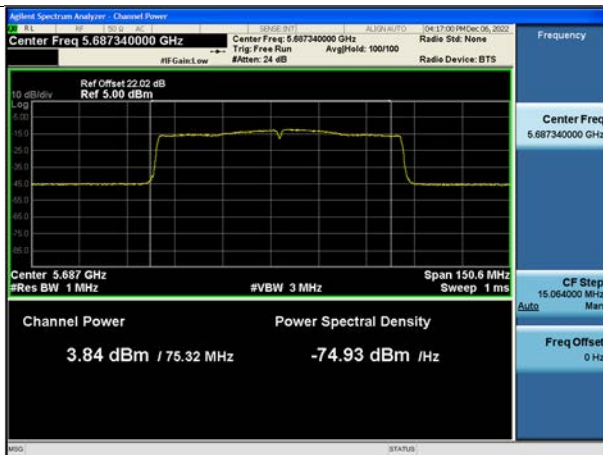

802.11ac(VHT80) UNII 3 Band

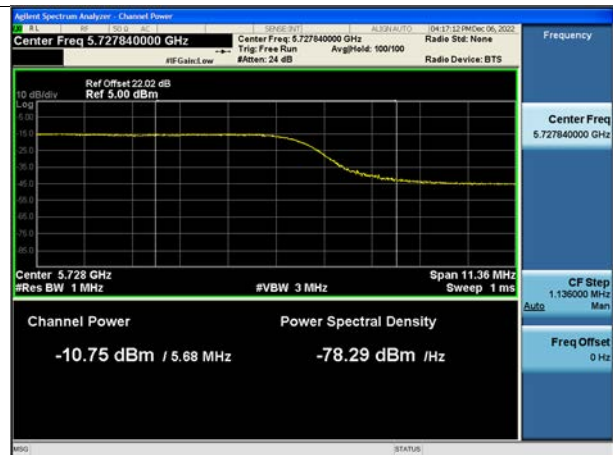

10.7.4 Power Spectral Density

Mode	Frequency [MHz]	Channel	Measured Density (dBm)	Duty Cycle Factor (dB)	Total PSD (dBm)	Limit (dBm)
802.11a	5720 (UNII 2C Band)	144	-4.257	0.205	-4.052	11 dBm/ MHz
802.11n(HT20)			-4.956	0.218	-4.738	
802.11ac(VHT20)			-4.965	0.228	-4.737	
802.11a	5720 (UNII 3 Band)	144	-9.389	0.205	-9.184	30 dBm
802.11n(HT20)			-10.099	0.218	-9.881	/
802.11ac(VHT20)			-9.976	0.228	-9.748	500 kHz

Mode	Frequency [MHz]	Channel	Measured Density (dBm)	Duty Cycle Factor (dB)	Total PSD (dBm)	Limit (dBm)
802.11n(HT40)	5710 (UNII 2C Band)	142	-8.429	0.433	-7.996	11 dBm/ MHz
802.11ac(VHT40)			-8.133	0.429	-7.704	
802.11n(HT40)	5710 (UNII 3 Band)	142	-14.660	0.433	-14.227	30 dBm/
802.11ac(VHT40)			-14.405	0.429	-13.976	500 kHz

Mode	Frequency [MHz]	Channel	Measured Density (dBm)	Duty Cycle Factor (dB)	Total PSD (dBm)	Limit (dBm)
802.11ac(VHT80)	5690 (UNII 2C Band)	138	-12.000	0.847	-11.153	11 dBm/ MHz
	5690 (UNII 3 Band)	138	-18.316	0.847	-17.469	30 dBm/ 500 kHz

Test Plots

802.11a UNII 2C Band



802.11a UNII 3 Band




802.11n(HT20) UNII 2C Band



802.11n(HT20) UNII 3 Band



802.11ac(VHT20) UNII 2C Band

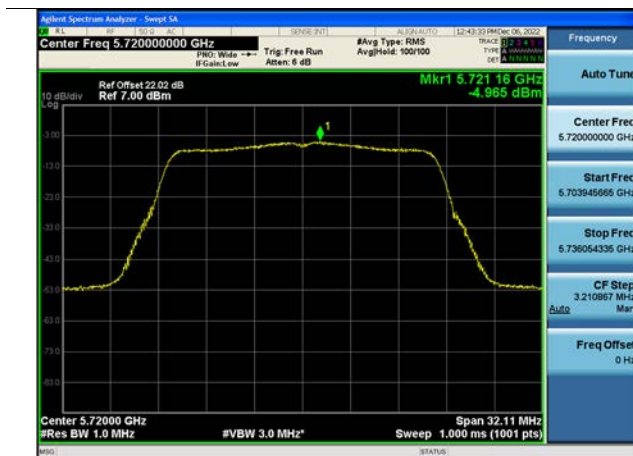

802.11ac(VHT20) UNII 3 Band



802.11n(HT40) UNII 2C Band



802.11n(HT40) UNII 3 Band



802.11ac(VHT40) UNII 2C Band



802.11ac(VHT40) UNII 3 Band



802.11ac(VHT80) UNII 2C Band



802.11ac(VHT80) UNII 3 Band



10.8 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+D.F+C.L	POL	Total	Limit	Margin
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]

No Critical peaks found

Note:

1. The Measured Level of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBμV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]

No Critical peaks found

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode

Frequency Range : Above 1 GHz

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
10360	44.35	8.12	V	52.47	68.20	15.73	PK
15540	40.72	12.95	V	53.67	73.98	20.31	PK
15540	27.21	12.95	V	40.16	53.98	13.82	AV
10360	43.05	8.12	H	51.17	68.20	17.03	PK
15540	40.48	12.95	H	53.43	73.98	20.55	PK
15540	26.89	12.95	H	39.84	53.98	14.14	AV

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
10400	44.55	8.14	V	52.69	68.20	15.51	PK
15600	40.16	13.29	V	53.45	73.98	20.53	PK
15600	26.92	13.29	V	40.21	53.98	13.77	AV
10400	43.28	8.14	H	51.42	68.20	16.78	PK
15600	39.72	13.29	H	53.01	73.98	20.97	PK
15600	26.23	13.29	H	39.52	53.98	14.46	AV

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
10480	44.87	8.62	V	53.49	68.20	14.71	PK
15720	45.80	13.21	V	59.01	73.98	14.97	PK
15720	28.16	13.21	V	41.37	53.98	12.61	AV
10480	43.67	8.62	H	52.29	68.20	15.91	PK
15720	44.97	13.21	H	58.18	73.98	15.80	PK
15720	27.49	13.21	H	40.70	53.98	13.28	AV

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5260 MHz
Channel No.	52 Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
10520	45.13	8.85	V	53.98	68.20	14.22	PK
15780	42.20	12.87	V	55.07	73.98	18.91	PK
15780	27.80	12.87	V	40.67	53.98	13.31	AV
10520	43.56	8.85	H	52.41	68.20	15.79	PK
15780	41.87	12.87	H	54.74	73.98	19.24	PK
15780	27.66	12.87	H	40.53	53.98	13.45	AV

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
10600	44.99	9.35	V	54.34	73.98	19.64	PK
10600	34.74	9.35	V	44.09	53.98	9.89	AV
15900	42.22	12.56	V	54.78	73.98	19.20	PK
15900	28.18	12.56	V	40.74	53.98	13.24	AV
10600	44.29	9.35	H	53.64	73.98	20.34	PK
10600	34.12	9.35	H	43.47	53.98	10.51	AV
15900	42.12	12.56	H	54.68	73.98	19.30	PK
15900	27.89	12.56	H	40.45	53.98	13.53	AV

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
10640	44.15	9.15	V	53.30	73.98	20.68	PK
10640	34.12	9.15	V	43.27	53.98	10.71	AV
15960	42.19	12.21	V	54.40	73.98	19.58	PK
15960	28.51	12.21	V	40.72	53.98	13.26	AV
10640	43.89	9.15	H	53.04	73.98	20.94	PK
10640	33.89	9.15	H	43.04	53.98	10.94	AV
15960	42.05	12.21	H	54.26	73.98	19.72	PK
15960	28.32	12.21	H	40.53	53.98	13.45	AV

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
11000	45.01	10.19	V	55.20	73.98	18.78	PK
11000	36.45	10.19	V	46.64	53.98	7.34	AV
16500	41.86	12.17	V	54.03	68.20	14.17	PK
11000	43.24	10.19	H	53.43	73.98	20.55	PK
11000	32.18	10.19	H	42.37	53.98	11.61	AV
16500	41.12	12.17	H	53.29	68.20	14.91	PK

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5580 MHz
Channel No.	116 Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
11160	44.80	10.46	V	55.26	73.98	18.72	PK
11160	34.36	10.46	V	44.82	53.98	9.16	AV
16740	46.97	12.65	V	59.62	68.20	8.58	PK
11160	42.69	10.46	H	53.15	73.98	20.83	PK
11160	32.03	10.46	H	42.49	53.98	11.49	AV
16740	45.50	12.65	H	58.15	68.20	10.05	PK

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5720 MHz
Channel No.	144 Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
11440	43.15	10.43	V	53.58	73.98	20.40	PK
11440	31.79	10.43	V	42.22	53.98	11.76	AV
17160	48.02	13.78	V	61.80	68.20	6.40	PK
11440	42.32	10.43	H	52.75	73.98	21.23	PK
11440	30.84	10.43	H	41.27	53.98	12.71	AV
17160	47.97	13.78	H	61.75	68.20	6.45	PK

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5745 MHz
Channel No.	149 Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
11490	42.01	10.81	V	52.82	73.98	21.16	PK
11490	30.91	10.81	V	41.72	53.98	12.26	AV
17235	41.16	14.28	V	55.44	68.20	12.76	PK
11490	40.98	10.81	H	51.79	73.98	22.19	PK
11490	29.12	10.81	H	39.93	53.98	14.05	AV
17235	40.78	14.28	H	55.06	68.20	13.14	PK

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
11570	43.61	10.13	V	53.74	73.98	20.24	PK
11570	33.88	10.13	V	44.01	53.98	9.97	AV
17355	41.28	15.62	V	56.90	68.20	11.30	PK
11570	43.34	10.13	H	53.47	73.98	20.51	PK
11570	31.59	10.13	H	41.72	53.98	12.26	AV
17355	41.03	15.62	H	56.65	68.20	11.55	PK

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency	Measured Value	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
11650	44.93	9.58	V	54.51	73.98	19.47	PK
11650	36.88	9.58	V	46.46	53.98	7.52	AV
17475	41.25	17.18	V	58.43	68.20	9.77	PK
11650	42.75	9.58	H	52.33	73.98	21.65	PK
11650	36.51	9.58	H	46.09	53.98	7.89	AV
17475	40.85	17.18	H	58.03	68.20	10.17	PK

Note:


All Modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

- UNII 1, 2A, 2C, 3 : 802.11a

Test Plots

Peak Result (802.11a, Ch.144 3rd Harmonic, X-V)

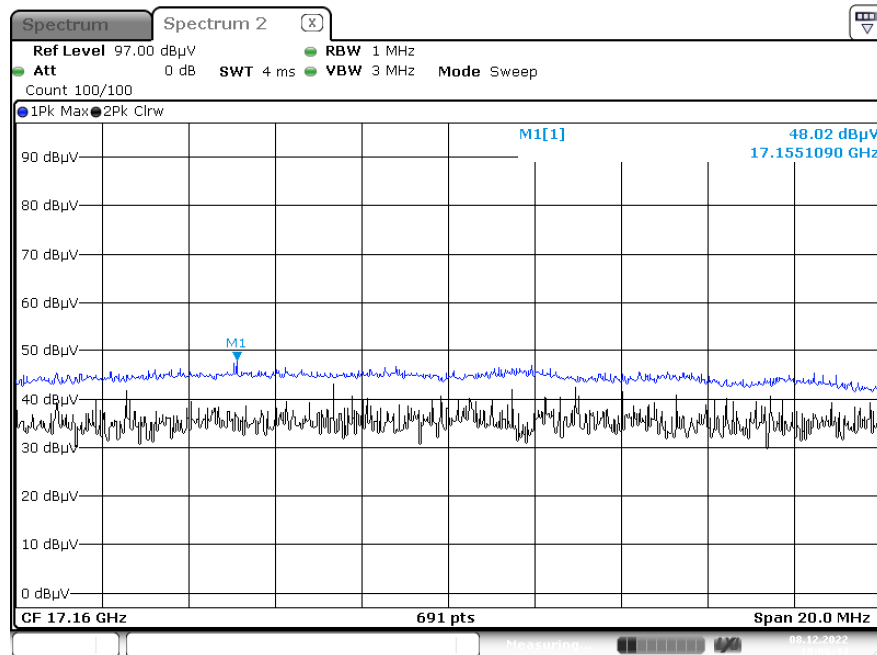

Note:

Only the worst case plots for Radiated Spurious Emissions.

10.9 RADIATED RESTRICTED BAND EDGE

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5150	45.28	8.43	H	53.71	73.98	20.27	PK
5150	32.43	8.43	H	40.86	53.98	13.12	AV
5150	45.63	8.43	V	54.06	73.98	19.92	PK
5150	32.72	8.43	V	41.15	53.98	12.83	AV

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350	49.41	8.23	H	57.64	73.98	16.34	PK
5350	36.15	8.23	H	44.38	53.98	9.60	AV
5350	48.07	8.23	V	56.30	73.98	17.68	PK
5350	34.83	8.23	V	43.06	53.98	10.92	AV

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5460	43.02	8.98	H	52.00	73.98	21.98	PK
5460	30.98	8.98	H	39.96	53.98	14.02	AV
5470	45.16	8.75	H	53.91	68.20	14.29	PK
5460	43.54	8.98	V	52.52	73.98	21.46	PK
5460	31.25	8.98	V	40.23	53.98	13.75	AV
5470	45.57	8.75	V	54.32	68.20	13.88	PK

Band :	UNII 1
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5150	43.31	8.43	H	51.74	73.98	22.24	PK
5150	32.24	8.43	H	40.67	53.98	13.31	AV
5150	43.79	8.43	V	52.22	73.98	21.76	PK
5150	32.58	8.43	V	41.01	53.98	12.97	AV

Band :	UNII 2A
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350	47.86	8.23	H	56.09	73.98	17.89	PK
5350	34.66	8.23	H	42.89	53.98	11.09	AV
5350	46.69	8.23	V	54.92	73.98	19.06	PK
5350	33.83	8.23	V	42.06	53.98	11.92	AV

Band :	UNII 2C
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5460	43.10	8.98	H	52.08	73.98	21.90	PK
5460	30.23	8.98	H	39.21	53.98	14.77	AV
5470	44.47	8.75	H	53.22	68.20	14.98	PK
5460	43.47	8.98	V	52.45	73.98	21.53	PK
5460	30.88	8.98	V	39.86	53.98	14.12	AV
5470	45.03	8.75	V	53.78	68.20	14.42	PK

Band :	UNII 1
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5150	44.82	8.43	H	53.25	73.98	20.73	PK
5150	32.01	8.43	H	40.44	53.98	13.54	AV
5150	45.11	8.43	V	53.54	73.98	20.44	PK
5150	32.32	8.43	V	40.75	53.98	13.23	AV

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350	47.53	8.23	H	55.76	73.98	18.22	PK
5350	34.65	8.23	H	42.88	53.98	11.10	AV
5350	46.62	8.23	V	54.85	73.98	19.13	PK
5350	33.79	8.23	V	42.02	53.98	11.96	AV

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5460	42.62	8.98	H	51.60	73.98	22.38	PK
5460	29.89	8.98	H	38.87	53.98	15.11	AV
5470	44.25	8.75	H	53.00	68.20	15.20	PK
5460	43.16	8.98	V	52.14	73.98	21.84	PK
5460	30.38	8.98	V	39.36	53.98	14.62	AV
5470	44.91	8.75	V	53.66	68.20	14.54	PK

Band :	UNII 1
Operation Mode:	802.11 n_HT40
Transfer MCS Index:	0
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5150	41.22	8.43	H	49.65	73.98	24.33	PK
5150	30.33	8.43	H	38.76	53.98	15.22	AV
5150	41.61	8.43	V	50.04	73.98	23.94	PK
5150	30.49	8.43	V	38.92	53.98	15.06	AV

Band :	UNII 2A
Operation Mode:	802.11 n_HT40
Transfer MCS Index:	0
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350	50.90	8.23	H	59.13	73.98	14.85	PK
5350	35.42	8.23	H	43.65	53.98	10.33	AV
5350	49.25	8.23	V	57.48	73.98	16.50	PK
5350	34.27	8.23	V	42.50	53.98	11.48	AV

Band :	UNII 2C
Operation Mode:	802.11 n_HT40
Transfer MCS Index:	0
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5460	44.51	8.98	H	53.49	73.98	20.49	PK
5460	32.12	8.98	H	41.10	53.98	12.88	AV
5470	45.83	8.75	H	54.58	68.20	13.62	PK
5460	44.93	8.98	V	53.91	73.98	20.07	PK
5460	32.50	8.98	V	41.48	53.98	12.50	AV
5470	46.24	8.75	V	54.99	68.20	13.21	PK

Band :	UNII 1
Operation Mode:	802.11 ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5150	42.34	8.43	H	50.77	73.98	23.21	PK
5150	30.96	8.43	H	39.39	53.98	14.59	AV
5150	42.63	8.43	V	51.06	73.98	22.92	PK
5150	31.18	8.43	V	39.61	53.98	14.37	AV

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350	49.78	8.23	H	58.01	73.98	15.97	PK
5350	35.47	8.23	H	43.70	53.98	10.28	AV
5350	49.18	8.23	V	57.41	73.98	16.57	PK
5350	34.69	8.23	V	42.92	53.98	11.06	AV

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5460	43.19	8.98	H	52.17	73.98	21.81	PK
5460	31.76	8.98	H	40.74	53.98	13.24	AV
5470	42.38	8.75	H	51.13	68.20	17.07	PK
5460	43.52	8.98	V	52.50	73.98	21.48	PK
5460	32.03	8.98	V	41.01	53.98	12.97	AV
5470	45.23	8.75	V	53.98	68.20	14.22	PK

Band :	UNII 1
Operation Mode:	802.11 ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5210 MHz
Channel No.	42 Ch

Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5150	42.67	8.43	H	51.10	73.98	22.88	PK
5150	32.07	8.43	H	40.50	53.98	13.48	AV
5150	42.99	8.43	V	51.42	73.98	22.56	PK
5150	32.27	8.43	V	40.70	53.98	13.28	AV

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5290 MHz
Channel No.	58 Ch


Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350	51.84	8.23	H	60.07	73.98	13.91	PK
5350	36.36	8.23	H	44.59	53.98	9.39	AV
5350	51.32	8.23	V	59.55	73.98	14.43	PK
5350	36.45	8.23	V	44.68	53.98	9.30	AV

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5530 MHz
Channel No.	106 Ch


Frequency	Measured Value	A.F+C.L-A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5460	43.51	8.98	H	52.49	73.98	21.49	PK
5460	31.89	8.98	H	40.87	53.98	13.11	AV
5470	47.12	8.75	H	55.87	68.20	12.33	PK
5460	43.83	8.98	V	52.81	73.98	21.17	PK
5460	32.16	8.98	V	41.14	53.98	12.84	AV
5470	47.50	8.75	V	56.25	68.20	11.95	PK

Test Plots(UNII 1, 2A, 2C)_X-H

Average Result (802.11 ac_VHT80, Ch.58)

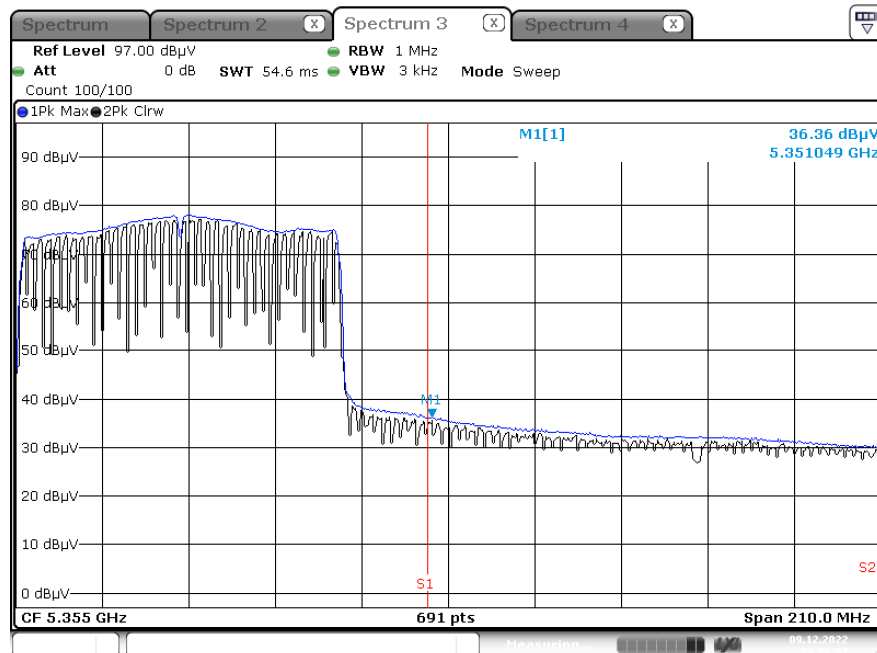

Peak Result (802.11 ac_VHT80, Ch.58)

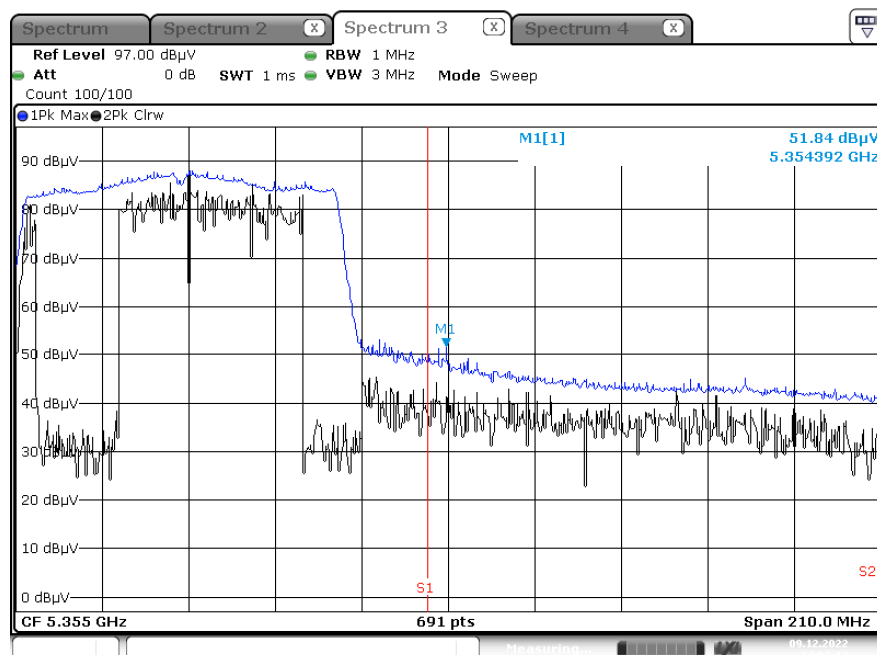


Note:


Only the worst case plots for Radiated Restricted Band Edge.

Test Plots(UNII 3)


Peak Result (802.11a, Ch.149, X-V)

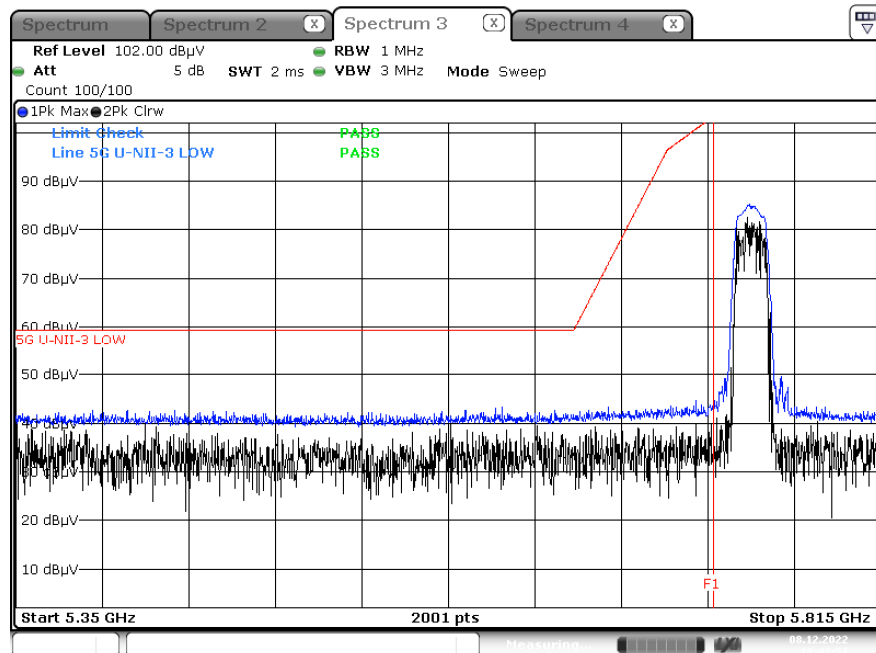


Peak Result (802.11n_HT20, Ch.149, X-V)

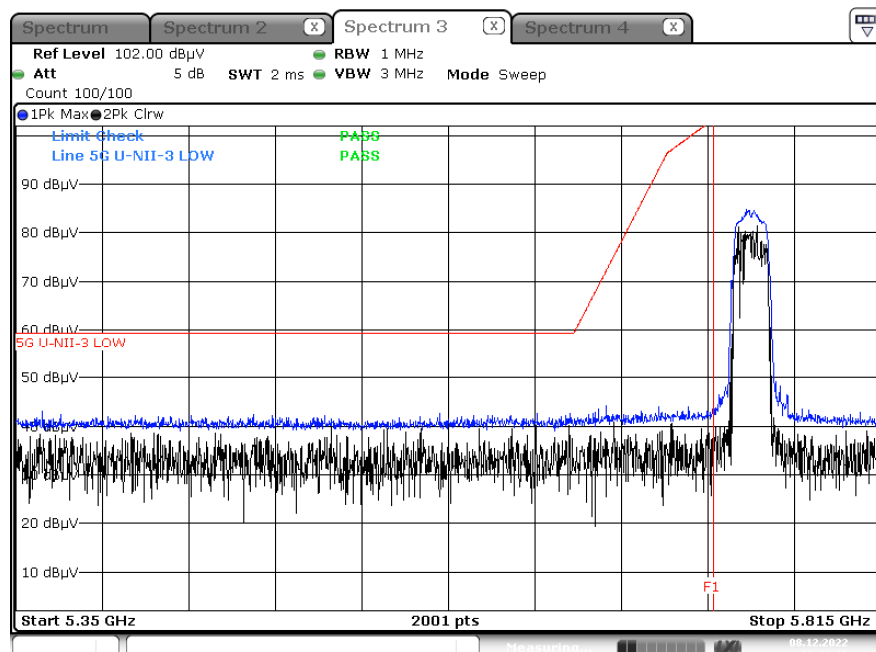


Peak Result (802.11ac_VHT20, Ch.149, X-V)

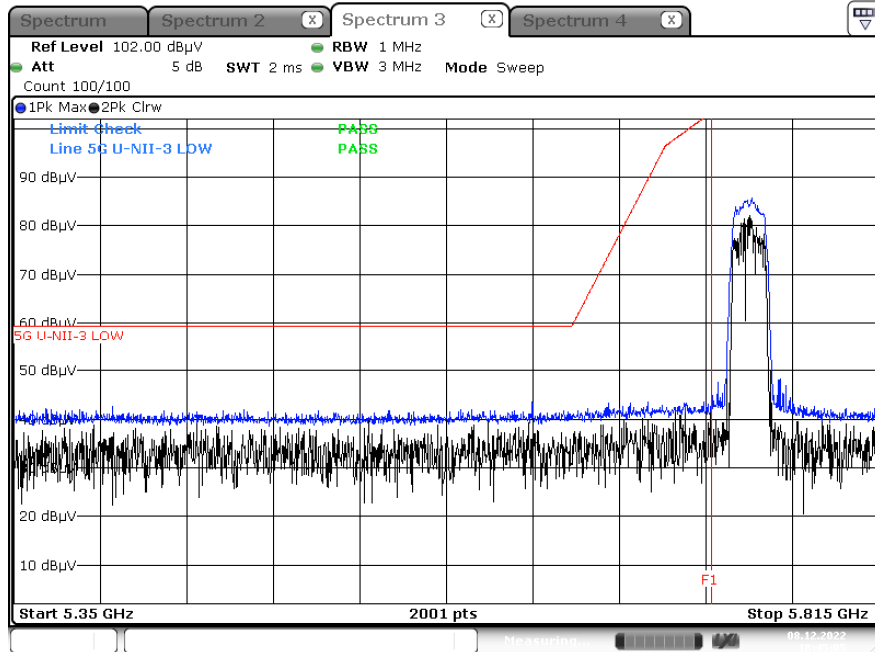


Peak Result (802.11n_HT40, Ch.151, X-V)

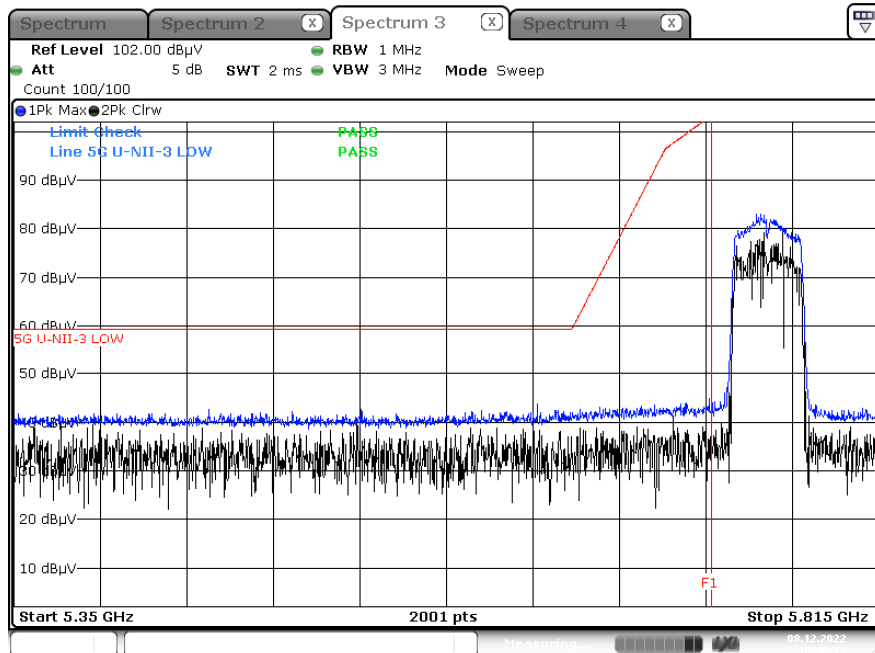


Peak Result (802.11ac_VHT40, Ch.151, X-V)

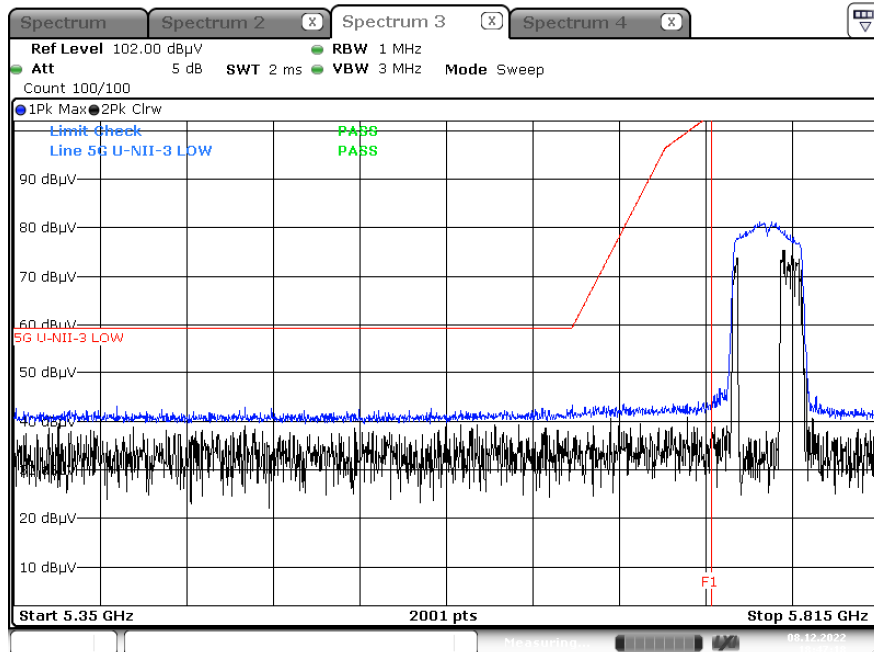


Peak Result (802.11ac_VHT80, Ch.155, X-V)

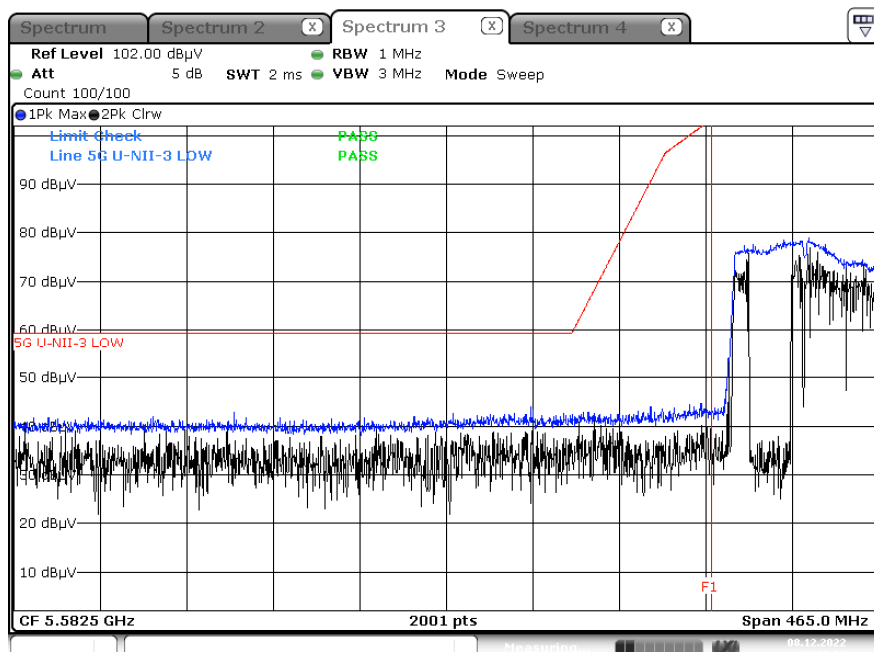


Peak Result (802.11a, Ch.165, X-V)

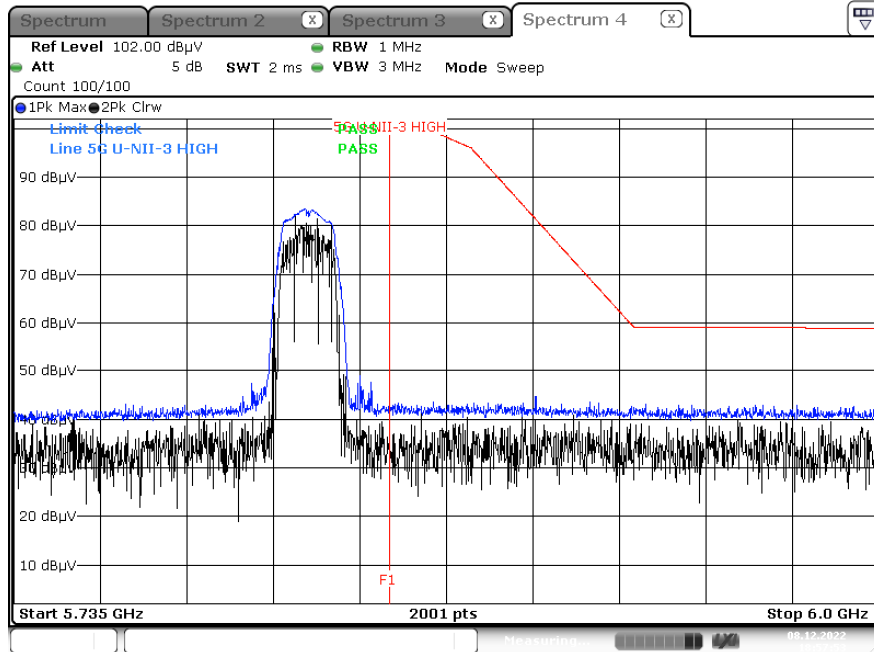


Peak Result (802.11n_HT20, Ch.165, X-V)

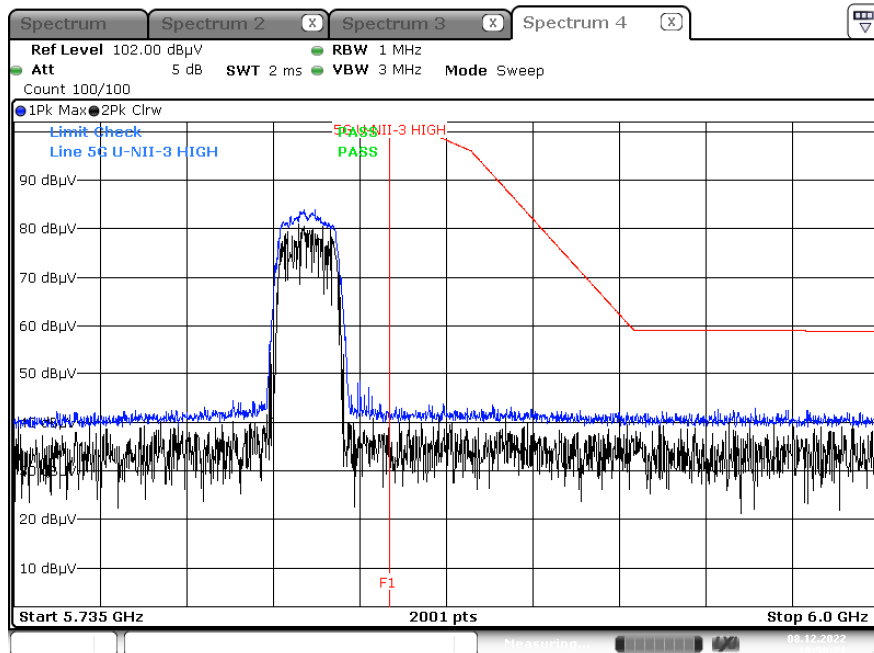


Peak Result (802.11ac_VHT20, Ch.165, X-V)

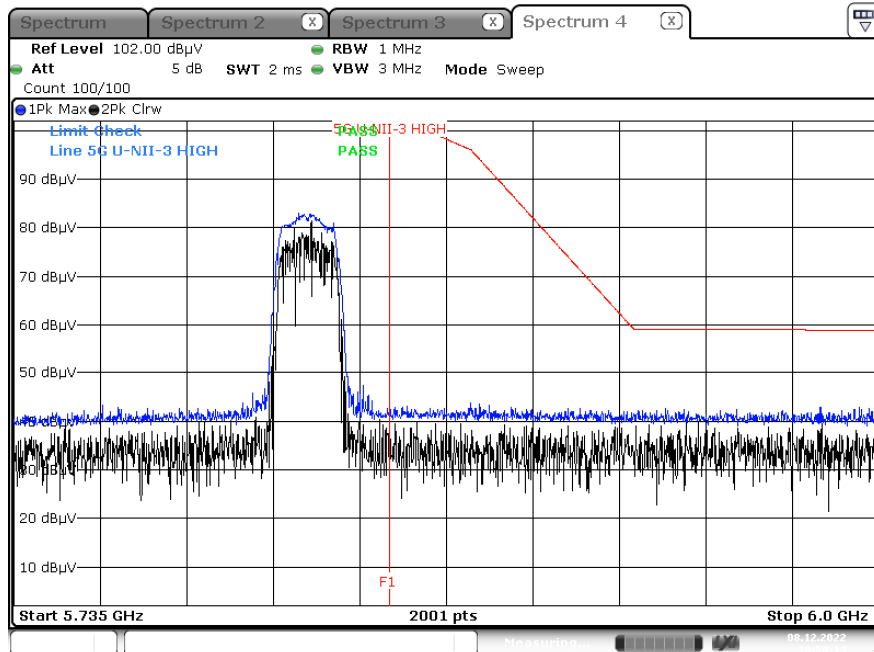


Peak Result (802.11n_HT40, Ch.159, X-V)

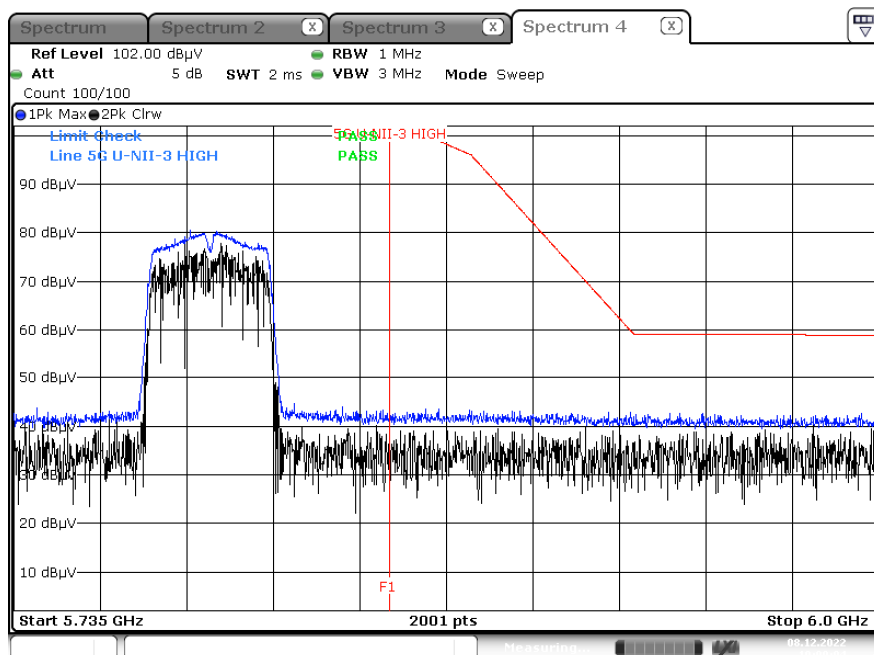

Peak Result (802.11ac_VHT40, Ch.159, X-V)

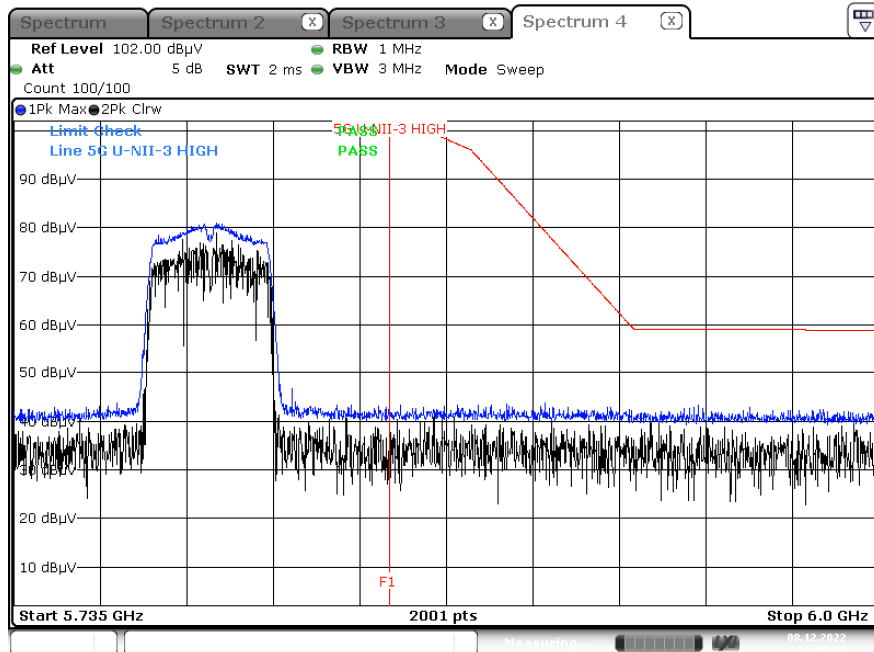

Peak Result (802.11ac_VHT80, Ch.155, X-V)

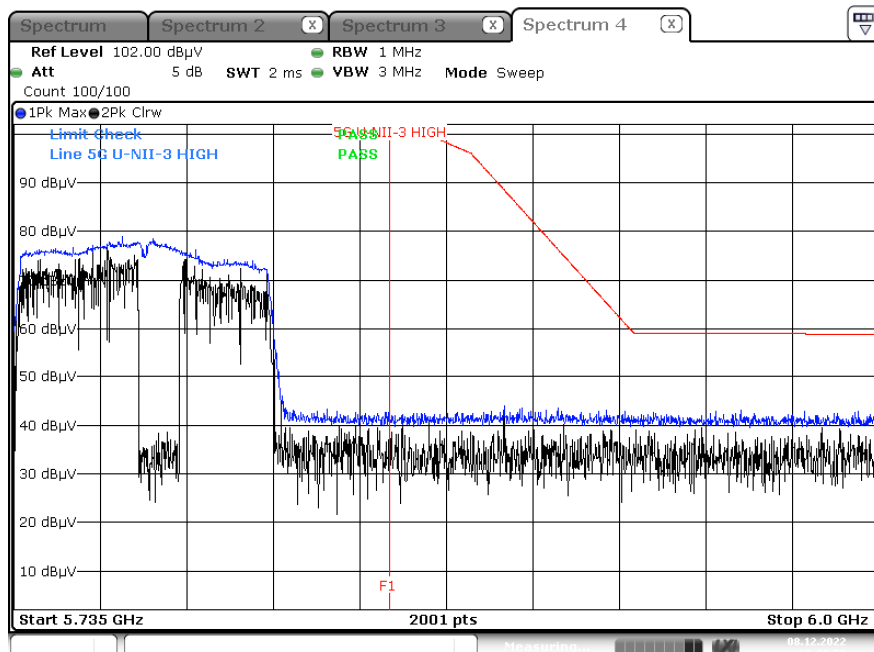


Note :


1. Only the worst case plots for U-NII-3 Out of Band e.i.r.p Emission.
2. U-NII-3 Low & High Band Edge RedLine is Final Test Limit about factor value compensation.

Test Plots(Straddle Channel)


Peak Result (802.11a, Ch.144, X-V)

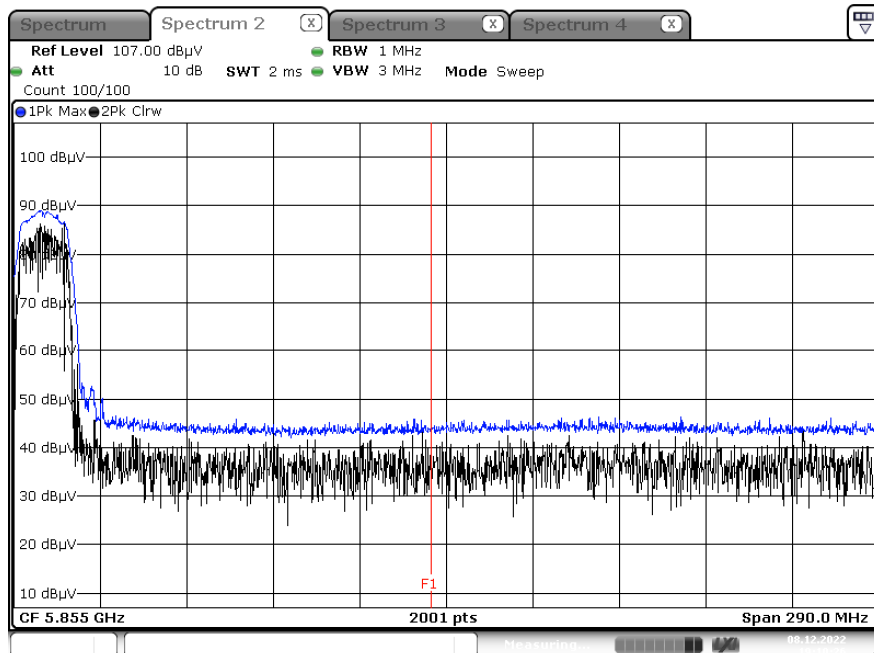


Peak Result (802.11n_HT20, Ch.144, X-V)

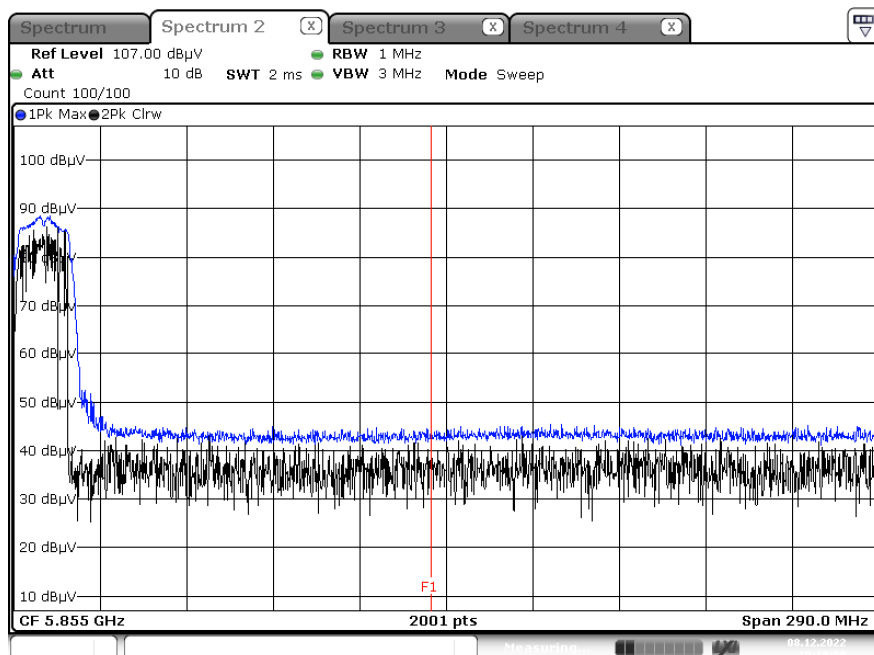


Peak Result (802.11ac_VHT20, Ch.144, X-V)

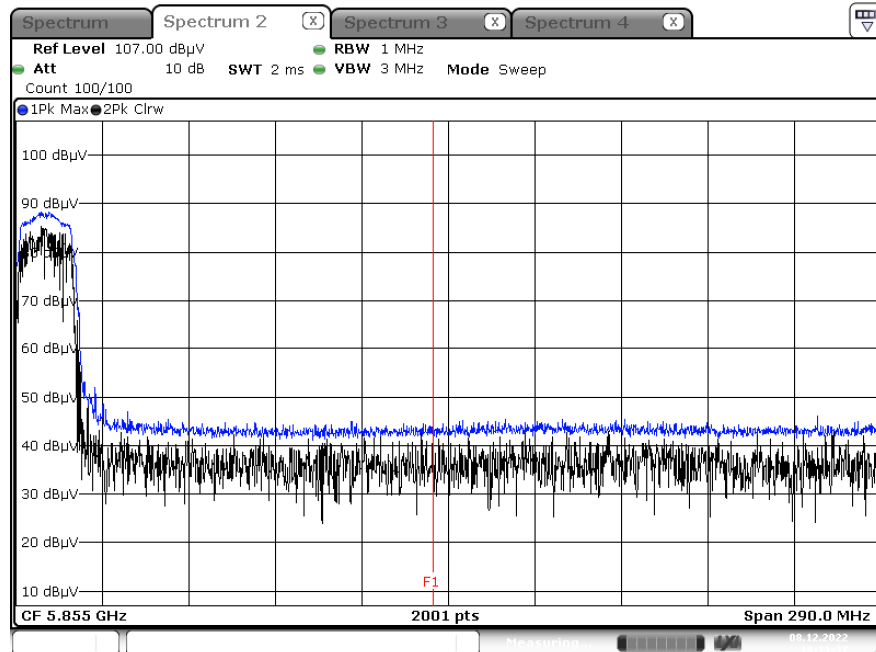


Peak Result (802.11n_HT40, Ch.142, X-V)

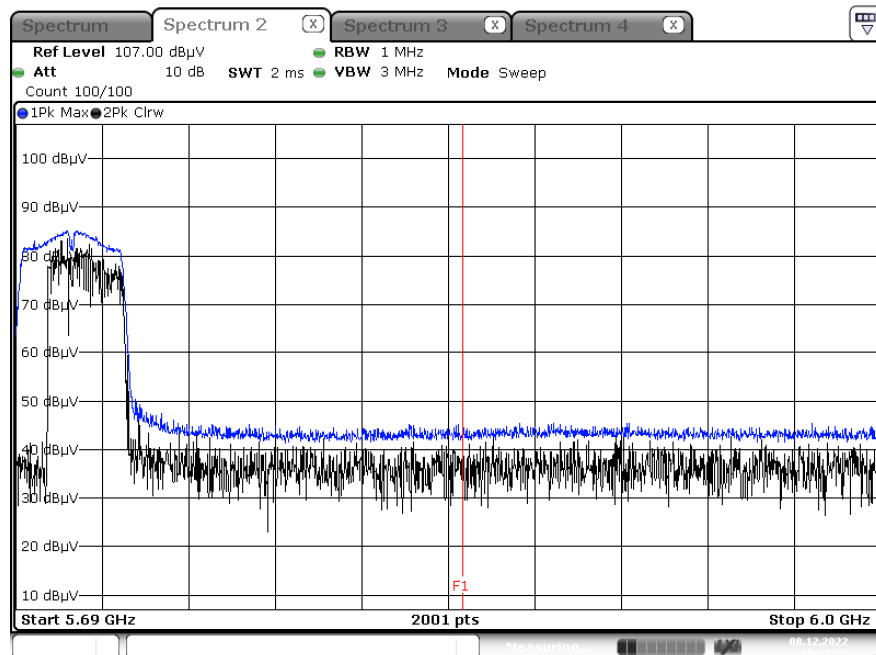

Peak Result (802.11ac_VHT40, Ch.142, X-V)

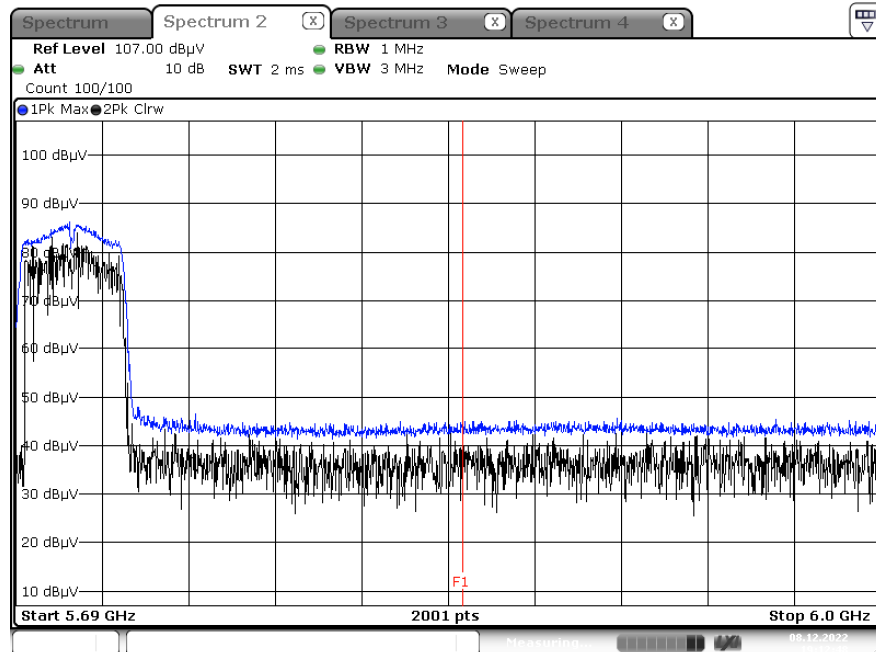

Peak Result (802.11ac_VHT80, Ch.138, X-V)

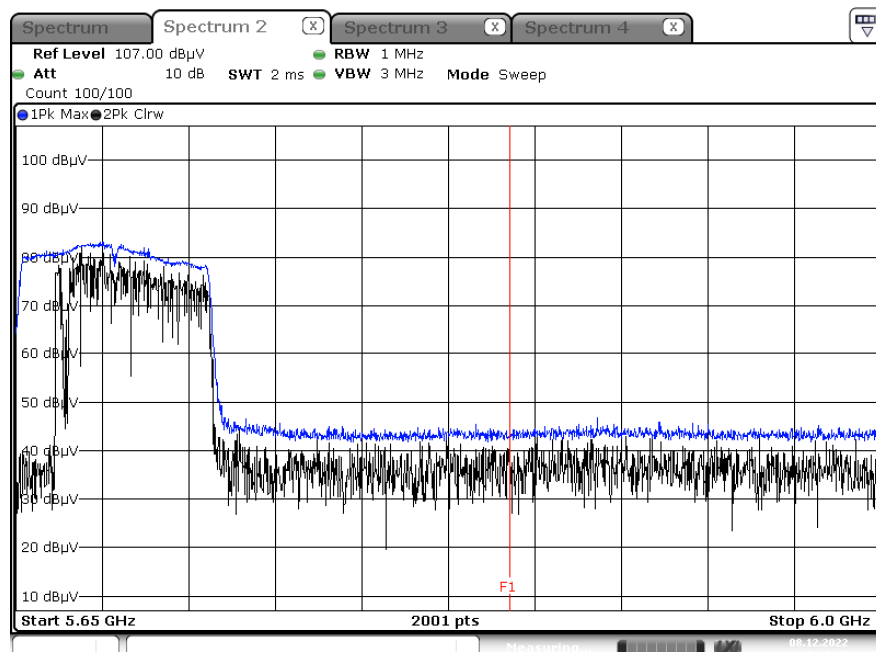

Note :

1. Only the worst case plots for Radiated Restricted Band Edge.
2. Red line : 5 850 MHz
3. Ambient Noise (Because of ambient noise, We attached only the worst plot without a data table)

11. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/22/2023	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/07/2023	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	03/04/2023	Annual
Signal Analyzer	N9030A	Agilent	MY49432108	03/08/2023	Annual
Power Measurement Set	OSP 120	Rohde & Schwarz	101231	06/14/2023	Annual
Power Meter	N1911A	Agilent	MY45100523	03/24/2023	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/24/2023	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2023	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/03/2023	Annual
DC Power Supply	E3632A	HP	KR75303243	04/25/2023	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	08285	06/21/2023	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/07/2023	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
EM1000 / Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	TNM system	TM19050002	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1300	01/18/2024	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Spectrum Analyzer	FSV(10 Hz ~ 40 GHz)	Rohde & Schwarz	101055	05/16/2023	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/06/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/13/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/13/2023	Annual
High Pass Filter(7 GHz ~ 18 GHz)	WHKX10-7150-8000-18000-50SS	Wainwright Instruments	1	03/11/2023	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/11/2023	Annual
HPF(3~18GHz)+LNA1(1~18GHz)	FMSR-05B	TNM system	F6	01/19/2023	Annual
ATT(10dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/19/2023	Annual
ATT(3dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/19/2023	Annual
LNA1(1~18GHz)	FMSR -05B	TNM system	25540	01/19/2023	Annual
HPF(7~18GHz)+LNA2(6~18GHz)	FMSR -05B	TNM system	28550	01/19/2023	Annual
Thru(30MHz ~ 18GHz)	FMSR -05B	TNM system	None	01/19/2023	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2301-FC008-P