



RADIO TEST REPORT

Report No.:STS2002025W09

Issued for

DTEN Inc

97 E. Brokaw Road, Suite180, San Jose, CA 95112

Product Name:	DTEN D7
Brand Name:	DTEN
Model Name:	DB50475
Series Model:	N/A
FCC ID:	2AQ7Q-DB50475
Test Standard:	FCC Part 15.407

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample





TEST RESULT CERTIFICATION

Applicant's Name..... : DTEN Inc

Address : 97 E. Brokaw Road, Suite180, San Jose, CA 95112

Manufacture's Name..... : DTEN Inc

Address : 97 E. Brokaw Road, Suite180, San Jose, CA 95112

Product Description

Product Name..... : DTEN D7

Brand Name : DTEN

Model Name : DB50475

Series Model..... : N/A

Test Standards..... : FCC Part15.407

Test Procedure..... ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test..... :

Date of receipt of test item : 02 Mar. 2020

Date (s) of performance of tests..... : 02 Mar. 2020 ~ 14 Apr. 2020

Date of Issue..... : 15 Apr. 2020

Test Result..... : **Pass**

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sean she)

Authorized Signatory :

(Vita Li)





Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF TEST MODES	11
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	13
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	14
3 . EMC EMISSION TEST	15
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT	19
4. CONDUCTED SPURIOUS EMISSIONS AND BANDEDGE	37
4.1 LIMIT	37
4.2 TEST PROCEDURE	37
4.3 DEVIATION FROM STANDARD	37
4.4 TEST SETUP	38
4.5 EUT OPERATION CONDITIONS	38
4.6 TEST RESULTS	38
5. POWER SPECTRAL DENSITY TEST	39
5.1 LIMIT	39
5.2 TEST PROCEDURE	39
5.3 DEVIATION FROM STANDARD	40
5.4 TEST SETUP	40
5.5 EUT OPERATION CONDITIONS	40
5.6 TEST RESULTS	40
6. BANDWIDTH MEASUREMENT	43
6.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	43
6.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	46
6.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	49
7. MAXIMUM CONDUCTED OUTPUT POWER	50
7.1 LIMIT	50
7.2 TEST PROCEDURE	50
7.3 DEVIATION FROM STANDARD	50



Table of Contents	Page
7.4 TEST SETUP	50
7.5 EUT OPERATION CONDITIONS	50
7.6 TEST RESULTS	51
8. AUTOMATICALLY DISCONTINUE TRANSMISSION	58
8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	58
8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	58
9. ANTENNA REQUIREMENT	59
9.1 STANDARD REQUIREMENT	59
9.2 EUT ANTENNA	59
APPENDIX - PHOTOS OF TEST SETUP	60



**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	15 Apr. 2020	STS2002025W09	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

§ 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
§ 15.407 (2) (26 dB) / § 15.407 (e) (6 dB) / § 15.407 (a) (99%)	26dB/6dB & 99% Bandwidth	PASS
15.407(a) (1).(2).(3).(4).(5)	Maximum Conducted Output Power	PASS
15.407(b) & 15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(b)7	Conducted Emission And (bandedge Emissions) Measurement	PASS
15.407(a) (1).(2).(3).(4).(5)	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203/15.204	Antenna Requirement	PASS

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 30-1GHz	$\pm 6.7\text{dB}$
4	All emissions, radiated 1G-6GHz	$\pm 5.5\text{dB}$
5	All emissions, radiated >6G	$\pm 5.8\text{dB}$
6	Conducted Emission (9KHz-150KHz)	$\pm 4.43\text{dB}$
7	Conducted Emission (150KHz-30MHz)	$\pm 5\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	DTEN D7																																							
Trade Name	DTEN																																							
Model Name	DB50475																																							
Series Model	N/A																																							
Model Difference	N/A																																							
Product Description	The EUT is a DTEN D7																																							
	Operation Frequency:	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.310GHz IEEE 802.11ac(VHT80): 5.210GHz																																						
		IEEE 802.11a/ n(HT20)/ac(VHT20): 5.260GHz-5.320GHz IEEE 802.11n(HT40)/ac(VHT40): 5.270GHz-5.310GHz IEEE 802.11ac(VHT80): 5.290GHz																																						
		IEEE 802.11a/ n(HT20)/ac(VHT20): 5.500GHz-5.700GHz IEEE 802.11n(HT40)/ac(VHT40): 5.510GHz-5.670GHz IEEE 802.11ac(VHT80): 5.530GHz-5.610GHz																																						
	Modulation Type:	802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM																																						
	Antenna Designation:	Please refer to the Note 3.																																						
	Max.Output Power:	11.52 dBm																																						
More details of EUT technical specification, please refer to the User's Manual.																																								
Test Channel	Please refer to the Note 2.																																							
Adapter	Input: 100-240V~ 50/60Hz 3.0A Output:																																							
	2.2.1 Table 2 Constant Voltage Output Specification（恒压输出规格） <table><tr><td>Output Channel 输出通道</td><td>Output Rated Voltage 输出额定电压</td><td>Voltage Regulation 电压调整率</td><td>Min. current 最小电流</td><td>Rated current 额定电流</td><td>Peak current 峰值电流</td></tr><tr><td>STB</td><td>+5V</td><td>±5%</td><td>0.03A</td><td>1.0A</td><td>2.0A</td></tr><tr><td>V5</td><td>+5V</td><td>±5%</td><td>0.1A</td><td>2.5A</td><td>3.0A</td></tr><tr><td>V12</td><td>+12V</td><td>±10%</td><td>0.1A</td><td>3.0A</td><td>4.0A</td></tr><tr><td>V19</td><td>+19V</td><td>±10%</td><td>0.1A</td><td>5.0A</td><td>6.5A</td></tr><tr><td>V24</td><td>+24V</td><td>±10%</td><td>0.1A</td><td>1.0A</td><td>1.2A</td></tr></table>					Output Channel 输出通道	Output Rated Voltage 输出额定电压	Voltage Regulation 电压调整率	Min. current 最小电流	Rated current 额定电流	Peak current 峰值电流	STB	+5V	±5%	0.03A	1.0A	2.0A	V5	+5V	±5%	0.1A	2.5A	3.0A	V12	+12V	±10%	0.1A	3.0A	4.0A	V19	+19V	±10%	0.1A	5.0A	6.5A	V24	+24V	±10%	0.1A	1.0A
Output Channel 输出通道	Output Rated Voltage 输出额定电压	Voltage Regulation 电压调整率	Min. current 最小电流	Rated current 额定电流	Peak current 峰值电流																																			
STB	+5V	±5%	0.03A	1.0A	2.0A																																			
V5	+5V	±5%	0.1A	2.5A	3.0A																																			
V12	+12V	±10%	0.1A	3.0A	4.0A																																			
V19	+19V	±10%	0.1A	5.0A	6.5A																																			
V24	+24V	±10%	0.1A	1.0A	1.2A																																			
Hardware version number	CV3458H-J																																							
Software version number	2.1.2																																							
Connecting I/O Port(s)	Please refer to the Note 1.																																							



Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.

Operation Frequency of channel			
5.180GHz-5.240GHz		5.500GHz-5.720GHz	
Channel	Frequency	Channel	Frequency
36	5180	100	5500
38	5190	102	5510
40	5200	104	5520
42	5210	108	5540
44	5220	110	5550
46	5230	112	5560
48	5240	116	5580
		118	5590
		120	5600
5.260GHz-5.320GHz		124	5620
Channel	Frequency	126	5630
52	5260	128	5640
54	5270	132	5660
56	5280	134	5670
58	5290	136	5680
60	5300	140	5700
62	5310		
64	5320		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

5GHz:

For 802.11a/n(HT20) /ac (VHT20)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
36	5180	52	5260
40	5200	60	5300
48	5240	64	5320

For 802.11a/n(HT20) /ac (VHT20)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
100	5500	116	5580
140	5700		

For 802.11n(HT40) /ac (VHT40)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
38	5190	54	5270
46	5230	62	5310



For 802.11n(HT40) /ac (VHT40)

Channel	Freq.(MHz)	Channel	Freq.(MHz)
102	5510	110	5550
134	5670		

For 802.11ac (VHT80)

Channel	Freq.(MHz)	Channel	Freq.(MHz)
42	5210	155	5775

For 802.11ac (VHT80)

Channel	Freq.(MHz)	Channel	Freq.(MHz)
106	5530	122	5610

3.	Ant	Brand	Model Name	Ant Type	Connector	Gain (dBi)	NOTE
	A	DTEN	DB50475	External	N/A	6.85 dBi	WLAN Ant



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11a HT20 CH52&CH60&CH64	6 Mbps
Mode 3	TX IEEE 802.11a HT20 CH100&CH116&CH140	6 Mbps
Mode 4	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 5	TX IEEE 802.11ac HT20 CH36&CH40&CH48	NSS1 MCS0
Mode 6	TX IEEE 802.11n HT20 CH52&CH60&CH64	MCS 0
Mode 7	TX IEEE 802.11ac HT20 CH52&CH60&CH64	NSS1 MCS0
Mode 8	TX IEEE 802.11n HT20 CH100&CH116&CH140	MCS 0
Mode 9	TX IEEE 802.11ac HT20 CH100&CH116&CH140	NSS1 MCS0
Mode 10	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 11	TX IEEE 802.11ac HT40 CH38&CH46	NSS1 MCS0
Mode 12	TX IEEE 802.11n HT40 CH54 &CH62	MCS 0
Mode 13	TX IEEE 802.11ac HT40 CH54 &CH62	NSS1 MCS0
Mode 14	TX IEEE 802.11n HT40 CH102&CH110&CH134	MCS 0
Mode 15	TX IEEE 802.11ac HT40 CH102&CH110&CH134	NSS1 MCS0
Mode 16	TX IEEE 802.11ac HT80 CH42	NSS1 MCS0
Mode 17	TX IEEE 802.11ac HT80 CH58	NSS1 MCS0
Mode 18	TX IEEE 802.11ac HT80 CH106&122	NSS1 MCS0


- Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
(3) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.

AC Conducted Emission


Test Case	
AC Conducted Emission	Mode 19: Keeping TX + WLAN Link

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

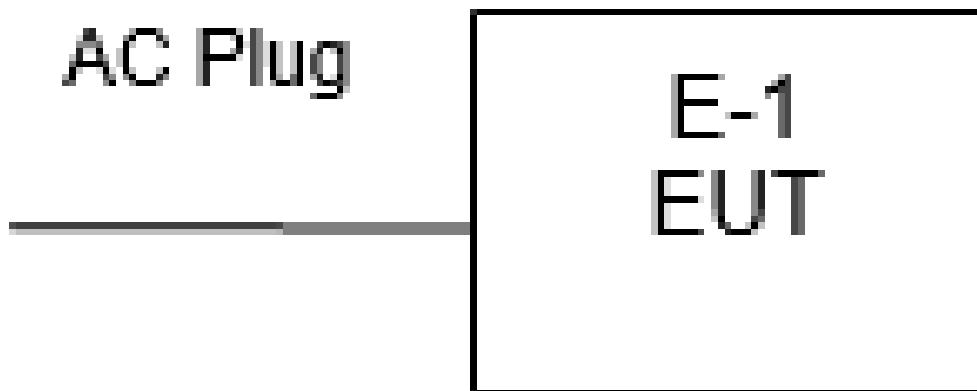

Conducted Emission Test

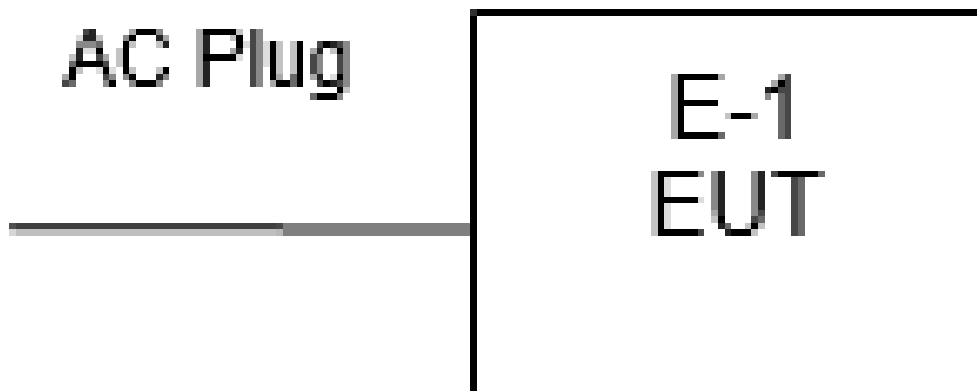



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
N/A	N/A	N/A	N/A	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESCI	101427	2019.07.29	2020.07.28
Signal Analyzer	Agilent	N9020A	MY51110105	2020.03.05	2021.03.04
Active loop Antenna	ZHINAN	ZN30900C	16035	2018.03.11	2021.03.10
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.01
Horn Antenna	SCHWARZBECK	BBHA 9120D(1201)	9120D-1343	2018.10.19	2021.10.18
Horn Antenna (18-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2021.03.10
Pre-Amplifier (18G-40G)	SKET	LNPA_1840-50	SK2018101801	2019.10.22	2020.10.21
Spectrum Analyzer	R&S	FSV40-N	101823	2019.06.05	2020.06.04
Pre-Amplifier(0.1 M-3GHz)	EM	EM330	060665	2019.10.09	2020.10.08
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-4 5	SK2018080901	2019.10.12	2020.10.11
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
Turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Test SW	BULUN	BL410-E/18.905			

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2019.07.29	2020.07.28
LISN	R&S	ENV216	101242	2019.10.09	2020.10.08
LISN	EMCO	3810/2NM	23625	2019.10.09	2020.10.08
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 CE)			

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2019.10.09	2020.10.08
Signal Analyzer	Agilent	N9020A	MY49100060	2019.10.09	2020.10.08
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
Test SW	FARAD	LZ-RF /LzRf-3A3			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

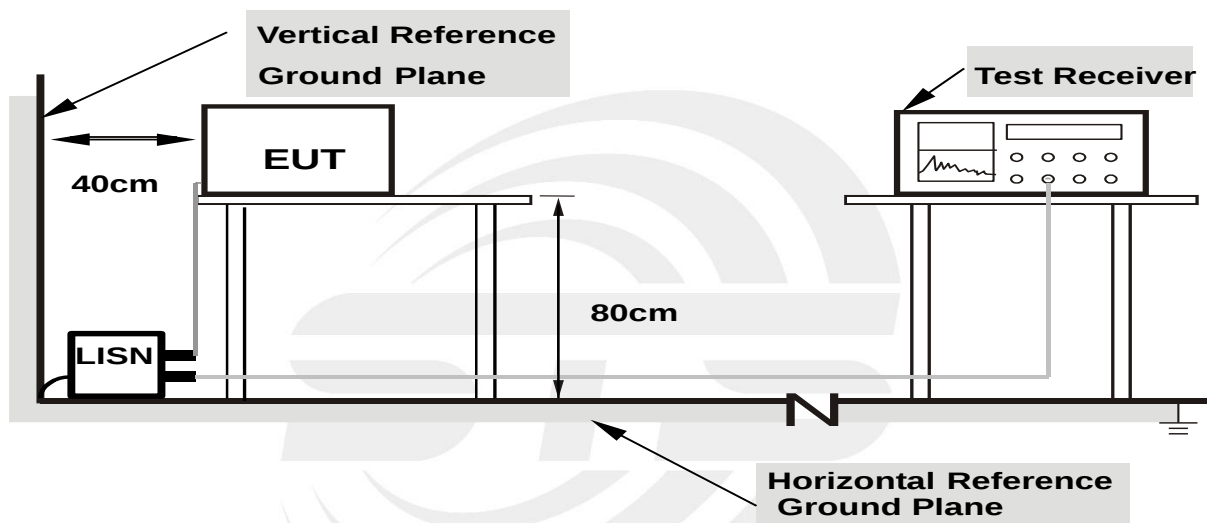

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.6 TEST RESULTS


Temperature:	24.9(C)	Relative Humidity:	50%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode :	Mode 19		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1540	38.77	20.59	59.36	65.78	-6.42	QP
2	0.1540	31.63	20.59	52.22	55.78	-3.56	AVG
3	0.4900	23.86	20.02	43.88	56.17	-12.29	QP
4	0.4900	17.48	20.02	37.50	46.17	-8.67	AVG
5	0.8300	25.86	20.11	45.97	56.00	-10.03	QP
6	0.8300	11.76	20.11	31.87	46.00	-14.13	AVG
7	2.1020	25.45	19.95	45.40	56.00	-10.60	QP
8	2.1020	8.03	19.95	27.98	46.00	-18.02	AVG
9	6.6220	23.94	20.34	44.28	60.00	-15.72	QP
10	6.6220	7.37	20.34	27.71	50.00	-22.29	AVG
11	15.5380	24.62	20.81	45.43	60.00	-14.57	QP
12	15.5380	8.53	20.81	29.34	50.00	-20.66	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor)–Limit

100.0 dBuV

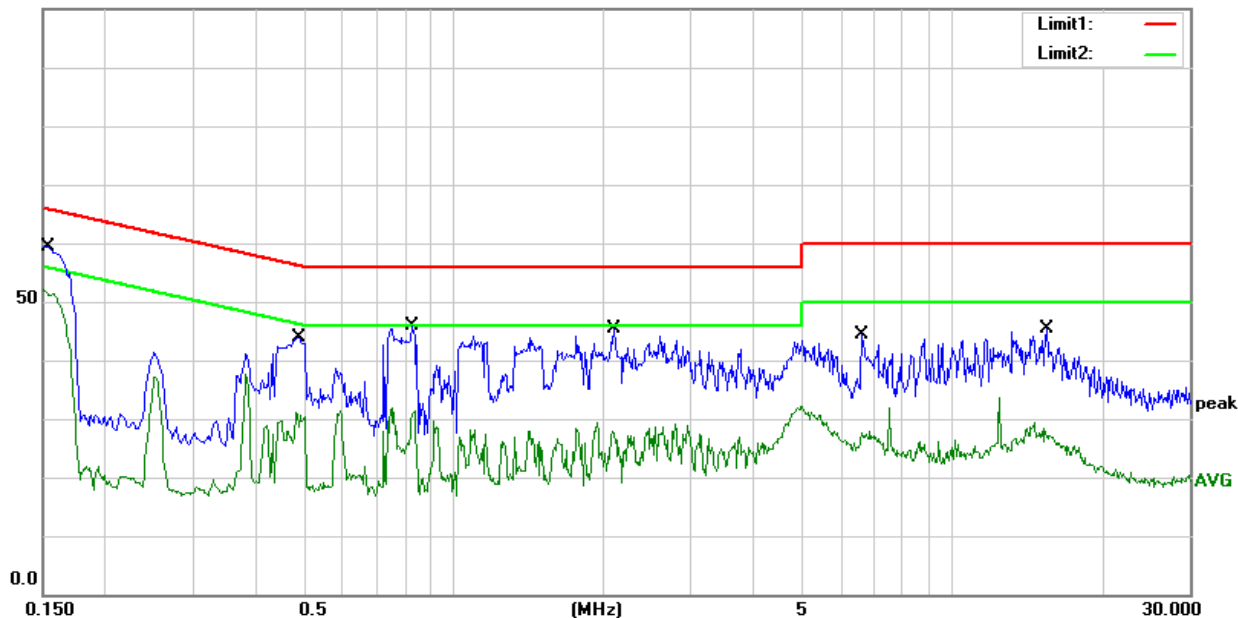




Temperature:	24.9(C)	Relative Humidity:	50%RH
Test Voltage	AC 120V/60Hz	Phase:	N
Test Mode	Mode 19		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	39.68	20.59	60.27	66.00	-5.73	QP
2	0.1500	31.91	20.59	52.50	56.00	-3.50	AVG
3	0.4820	23.10	20.05	43.15	56.30	-13.15	QP
4	0.4820	9.83	20.05	29.88	46.30	-16.42	AVG
5	0.8340	25.56	20.12	45.68	56.00	-10.32	QP
6	0.8340	12.02	20.12	32.14	46.00	-13.86	AVG
7	2.2580	24.15	19.99	44.14	56.00	-11.86	QP
8	2.2580	8.23	19.99	28.22	46.00	-17.78	AVG
9	5.4220	25.47	20.38	45.85	60.00	-14.15	QP
10	5.4220	13.44	20.38	33.82	50.00	-16.18	AVG
11	13.3980	27.10	20.70	47.80	60.00	-12.20	QP
12	13.3980	10.35	20.70	31.05	50.00	-18.95	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) - Limit

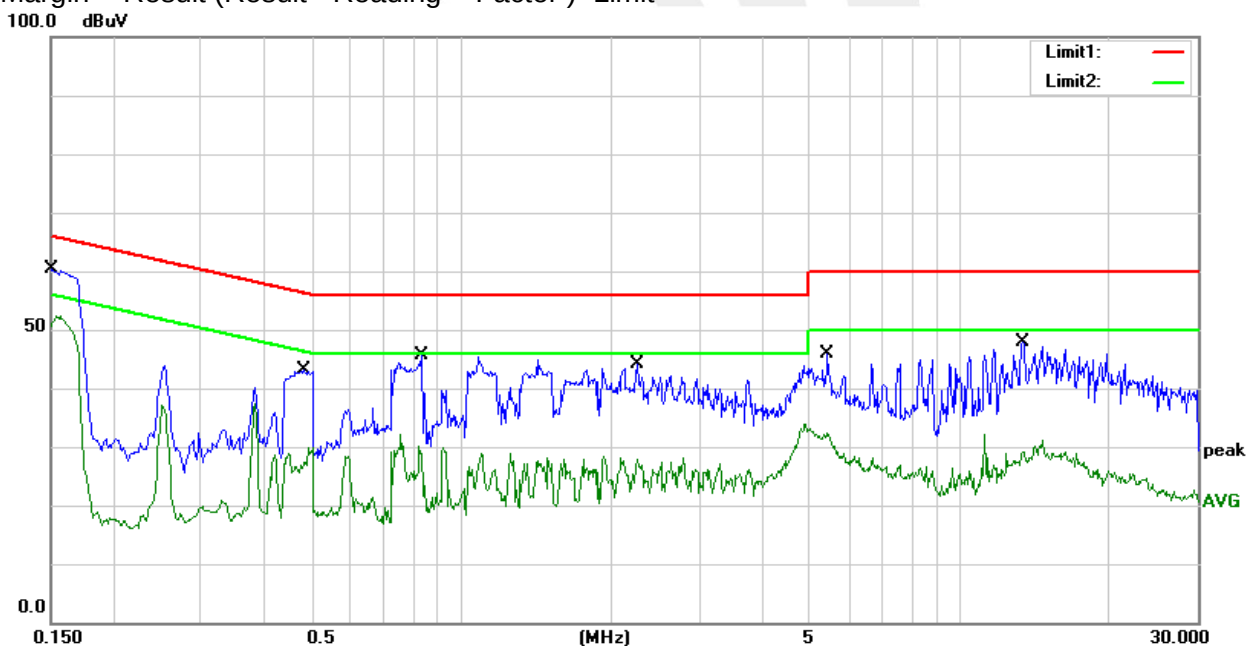



3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7& 15.205/209(a), then the (a); limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	68.2	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the antenna are set to make the measurement
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed test to three orthogonal axis. The worst case emissions were reported

3.2.2 DEVIATION FROM TEST STANDARD


No deviation

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

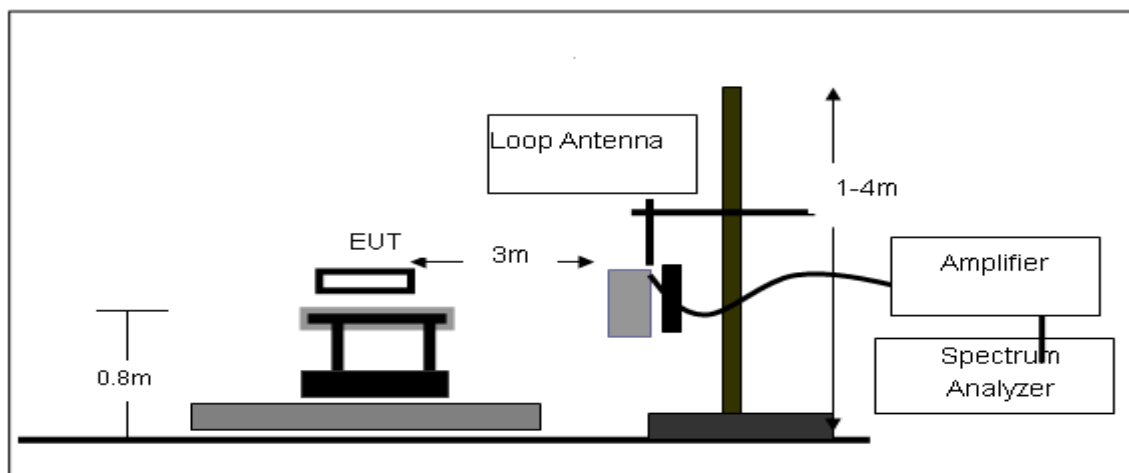

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

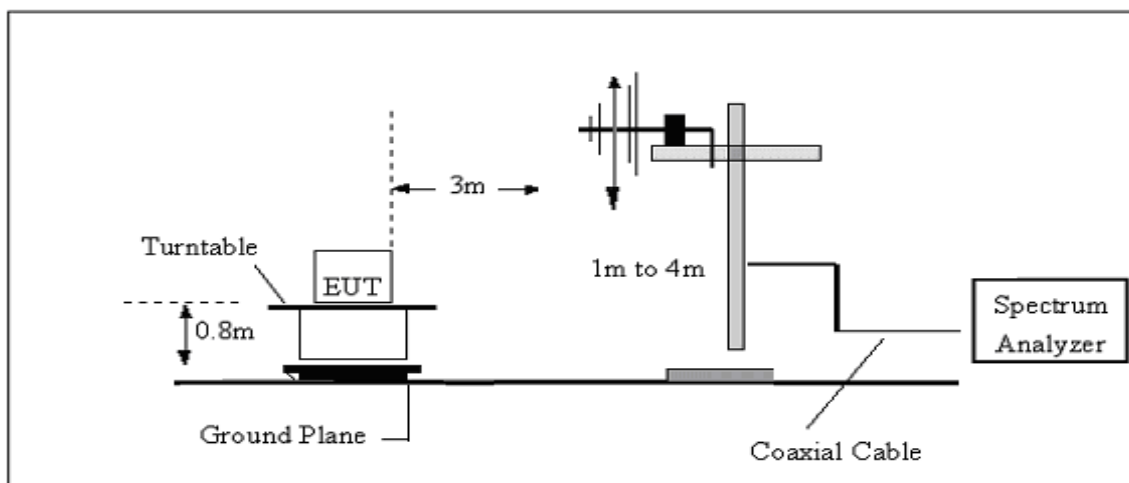

(C) Radiated Emission Test-Up Frequency Above 1GHz

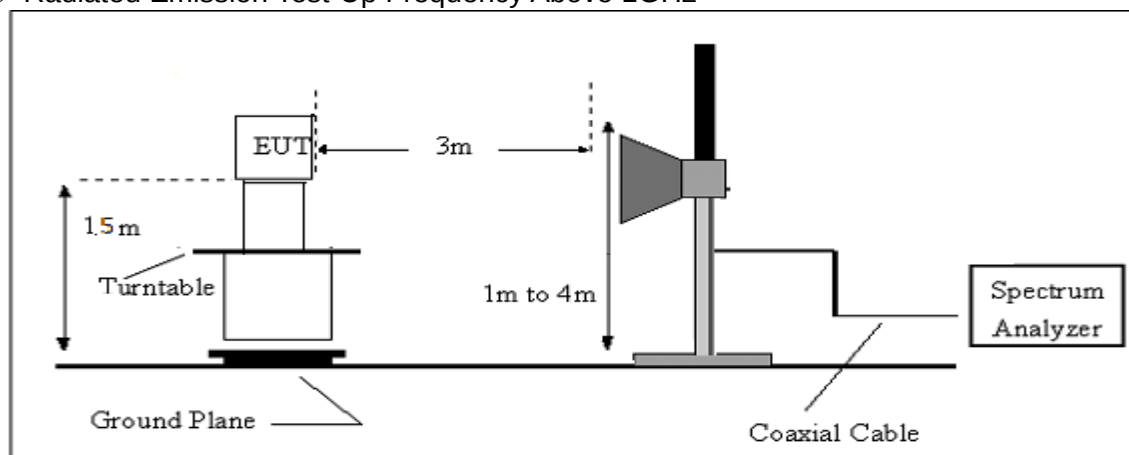



3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

**3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)**

Temperature:	23.2(C)	Relative Humidity:	48%RH
Test Voltage :	AC 120V/60Hz	Polarization :	--
Test Mode :	TX Mode		


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuV) + distance extrapolation factor.

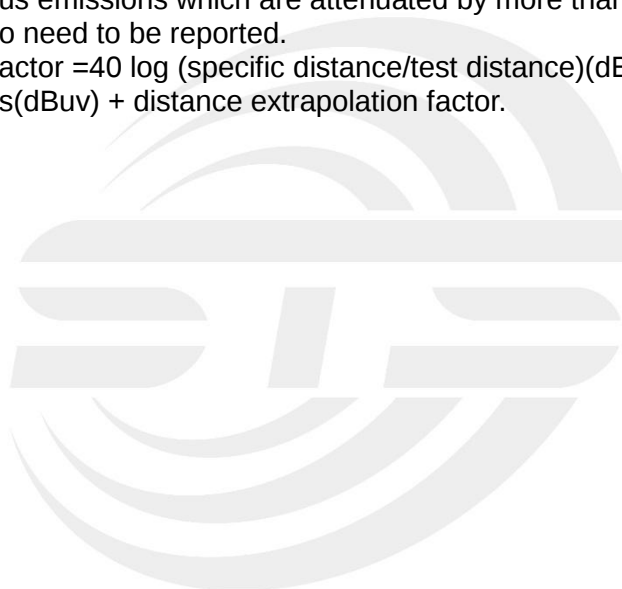


**3.2.7 TEST RESULTS (Between 30MHz – 1GHz)**

Temperature	23.2(C)	Relative Humidity:	48%RH
Test Voltage	AC 120V/60Hz	Polarization:	Horizontal
Test Mode	Mode 1~18(Mode 3 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	89.1700	58.76	-21.57	37.19	43.50	-6.31	QP
2	296.7500	50.64	-14.92	35.72	46.00	-10.28	QP
3	445.1600	50.88	-9.87	41.01	46.00	-4.99	QP
4	593.5700	47.24	-5.83	41.41	46.00	-4.59	QP
5	741.9800	44.05	-2.12	41.93	46.00	-4.07	QP
6	1000.0000	41.80	2.04	43.84	54.00	-10.16	QP

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit

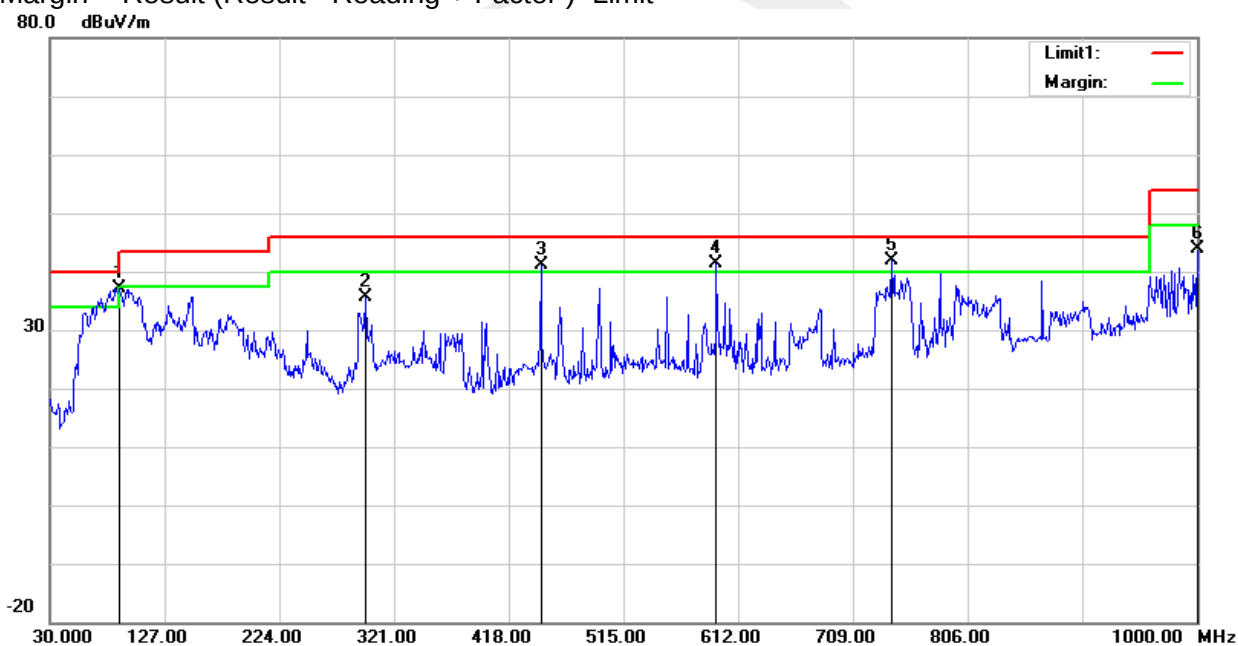




Temperature	23.2(C)	Relative Humidity:	48%RH
Test Voltage	AC 120V/60Hz	Polarization:	Vertical
Test Mode	Mode 1~18(Mode 3 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	55.2200	61.16	-25.04	36.12	40.00	-3.88	QP
2	398.6000	46.82	-11.20	35.62	46.00	-10.38	QP
3	445.1600	49.77	-9.87	39.90	46.00	-6.10	QP
4	593.5700	40.90	-5.83	35.07	46.00	-10.93	QP
5	741.9800	42.74	-2.12	40.62	46.00	-5.38	QP
6	799.2100	40.68	-2.04	38.64	46.00	-7.36	QP

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit

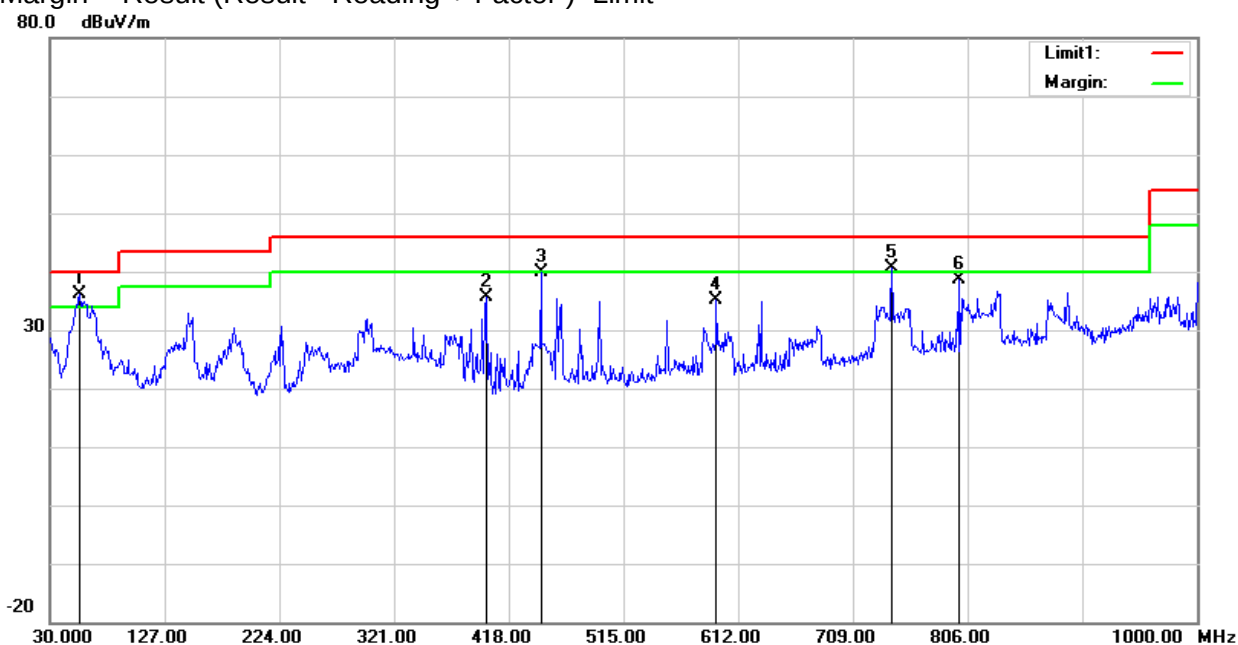



3.2.8 TEST RESULTS (Above 1000 MHz)

Band I 5150-5250MHz

Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11a20/ 5180 MHz)										
3247.31	45.23	44.70	6.70	28.20	-9.80	35.43	68.20	-32.77	Pk	Vertical
3247.31	41.27	44.70	6.70	28.20	-9.80	31.47	54.00	-22.53	AV	Vertical
3247.66	44.11	44.70	6.70	28.20	-9.80	34.31	68.20	-33.89	Pk	Horizontal
3247.66	41.25	44.70	6.70	28.20	-9.80	31.45	54.00	-22.55	AV	Horizontal
3982.95	39.98	44.20	7.90	29.70	-6.60	33.38	68.20	-34.82	Pk	Vertical
3982.95	35.69	44.20	7.90	29.70	-6.60	29.09	54.00	-24.91	AV	Vertical
3986.79	39.07	44.20	7.90	29.70	-6.60	32.47	68.20	-35.73	Pk	Horizontal
3986.79	35.79	44.20	7.90	29.70	-6.60	29.19	54.00	-24.81	AV	Horizontal
7233.60	37.40	43.50	11.40	35.50	3.40	40.80	68.20	-27.40	Pk	Vertical
7233.60	34.91	43.50	11.40	35.50	3.40	38.31	54.00	-15.69	AV	Vertical
7232.72	37.75	43.50	11.40	35.50	3.40	41.15	68.20	-27.05	Pk	Horizontal
7232.72	33.87	43.50	11.40	35.50	3.40	37.27	54.00	-16.73	AV	Horizontal
10360.25	39.68	44.50	13.80	38.80	8.10	47.78	68.20	-20.42	Pk	Vertical
10360.25	36.24	44.50	13.80	38.80	8.10	44.34	54.00	-9.66	AV	Vertical
10360.25	39.93	44.50	13.80	38.80	8.10	48.03	68.20	-20.17	Pk	Horizontal
10360.25	36.04	44.50	13.80	38.80	8.10	44.14	54.00	-9.86	AV	Horizontal
11021.77	33.44	43.60	14.30	39.50	10.20	43.64	68.20	-24.56	Pk	Vertical
11021.77	30.85	43.60	14.30	39.50	10.20	41.05	54.00	-12.95	AV	Vertical
11029.07	33.83	43.60	14.30	39.50	10.20	44.03	68.20	-24.17	Pk	Horizontal
11029.07	31.04	43.60	14.30	39.50	10.20	41.24	54.00	-12.76	AV	Horizontal
13299.88	32.40	42.60	15.90	38.90	12.20	44.60	68.20	-23.60	Pk	Vertical
13299.88	29.47	42.60	15.90	38.90	12.20	41.67	54.00	-12.33	AV	Vertical
13299.93	33.03	42.60	15.90	38.90	12.20	45.23	68.20	-22.97	Pk	Horizontal
13299.93	28.73	42.60	15.90	38.90	12.20	40.93	54.00	-13.07	AV	Horizontal
Mid Channel (802.11a20/ 5200 MHz)										
3254.46	44.16	44.70	6.70	28.20	-9.80	34.36	68.20	-33.84	Pk	Vertical
3254.46	41.65	44.70	6.70	28.20	-9.80	31.85	54.00	-22.15	AV	Vertical
3255.56	44.97	44.70	6.70	28.20	-9.80	35.17	68.20	-33.03	Pk	Horizontal
3255.56	41.84	44.70	6.70	28.20	-9.80	32.04	54.00	-21.96	AV	Horizontal
3990.80	39.69	44.20	7.90	29.70	-6.60	33.09	68.20	-35.11	Pk	Vertical
3990.80	36.91	44.20	7.90	29.70	-6.60	30.31	54.00	-23.69	AV	Vertical
3991.11	39.13	44.20	7.90	29.70	-6.60	32.53	68.20	-35.67	Pk	Horizontal
3991.11	36.92	44.20	7.90	29.70	-6.60	30.32	54.00	-23.68	AV	Horizontal
7225.06	36.89	43.50	11.40	35.50	3.40	40.29	68.20	-27.91	Pk	Vertical
7225.06	34.62	43.50	11.40	35.50	3.40	38.02	54.00	-15.98	AV	Vertical
7234.88	37.63	43.50	11.40	35.50	3.40	41.03	68.20	-27.17	Pk	Horizontal
7234.88	33.54	43.50	11.40	35.50	3.40	36.94	54.00	-17.06	AV	Horizontal
10400.26	39.54	44.50	13.80	38.80	8.10	47.64	68.20	-20.56	Pk	Vertical
10400.26	36.15	44.50	13.80	38.80	8.10	44.25	54.00	-9.75	AV	Vertical
10400.36	39.69	44.50	13.80	38.80	8.10	47.79	68.20	-20.41	Pk	Horizontal
10400.36	36.11	44.50	13.80	38.80	8.10	44.21	54.00	-9.79	AV	Horizontal
11030.53	32.95	43.60	14.30	39.50	10.20	43.15	68.20	-25.05	Pk	Vertical
11030.53	30.24	43.60	14.30	39.50	10.20	40.44	54.00	-13.56	AV	Vertical
11028.30	33.13	43.60	14.30	39.50	10.20	43.33	68.20	-24.87	Pk	Horizontal
11028.30	29.93	43.60	14.30	39.50	10.20	40.13	54.00	-13.87	AV	Horizontal
13286.14	32.49	42.60	15.90	38.90	12.20	44.69	68.20	-23.51	Pk	Vertical
13286.14	29.23	42.60	15.90	38.90	12.20	41.43	54.00	-12.57	AV	Vertical
13293.45	32.87	42.60	15.90	38.90	12.20	45.07	68.20	-23.13	Pk	Horizontal
13293.45	29.40	42.60	15.90	38.90	12.20	41.60	54.00	-12.40	AV	Horizontal



High Channel (802.11a20/ 5240 MHz)										
3253.17	43.85	44.70	6.70	28.20	-9.80	34.05	68.20	-34.15	Pk	Vertical
3253.17	41.12	44.70	6.70	28.20	-9.80	31.32	54.00	-22.68	AV	Vertical
3261.27	44.00	44.70	6.70	28.20	-9.80	34.20	68.20	-34.00	Pk	Horizontal
3261.27	42.22	44.70	6.70	28.20	-9.80	32.42	54.00	-21.58	AV	Horizontal
3993.30	39.34	44.20	7.90	29.70	-6.60	32.74	68.20	-35.46	Pk	Vertical
3993.30	36.44	44.20	7.90	29.70	-6.60	29.84	54.00	-24.16	AV	Vertical
3989.87	38.98	44.20	7.90	29.70	-6.60	32.38	68.20	-35.82	Pk	Horizontal
3989.87	36.56	44.20	7.90	29.70	-6.60	29.96	54.00	-24.04	AV	Horizontal
7221.30	36.55	43.50	11.40	35.50	3.40	39.95	68.20	-28.25	Pk	Vertical
7221.30	33.79	43.50	11.40	35.50	3.40	37.19	54.00	-16.81	AV	Vertical
7216.75	36.93	43.50	11.40	35.50	3.40	40.33	68.20	-27.87	Pk	Horizontal
7216.75	33.76	43.50	11.40	35.50	3.40	37.16	54.00	-16.84	AV	Horizontal
10479.95	39.81	44.50	13.80	38.80	8.10	47.91	68.20	-20.29	Pk	Vertical
10479.95	36.13	44.50	13.80	38.80	8.10	44.23	54.00	-9.77	AV	Vertical
10480.19	39.54	44.50	13.80	38.80	8.10	47.64	68.20	-20.56	Pk	Horizontal
10480.19	37.05	44.50	13.80	38.80	8.10	45.15	54.00	-8.85	AV	Horizontal
11025.63	33.40	43.60	14.30	39.50	10.20	43.60	68.20	-24.60	Pk	Vertical
11025.63	30.55	43.60	14.30	39.50	10.20	40.75	54.00	-13.25	AV	Vertical
11030.92	34.14	43.60	14.30	39.50	10.20	44.34	68.20	-23.86	Pk	Horizontal
11030.92	30.53	43.60	14.30	39.50	10.20	40.73	54.00	-13.27	AV	Horizontal
13294.20	32.96	42.60	15.90	38.90	12.20	45.16	68.20	-23.04	Pk	Vertical
13294.20	29.58	42.60	15.90	38.90	12.20	41.78	54.00	-12.22	AV	Vertical
13292.23	32.18	42.60	15.90	38.90	12.20	44.38	68.20	-23.82	Pk	Horizontal
13292.23	28.61	42.60	15.90	38.90	12.20	40.81	54.00	-13.19	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11a.
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



Band II 5250-5350MHz

Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11n40/ 5270 MHz)										
3266.25	44.41	44.70	6.70	28.20	-9.80	34.61	68.20	-33.59	Pk	Vertical
3266.25	42.22	44.70	6.70	28.20	-9.80	32.42	54.00	-21.58	AV	Vertical
3258.02	43.82	44.70	6.70	28.20	-9.80	34.02	68.20	-34.18	Pk	Horizontal
3258.02	41.39	44.70	6.70	28.20	-9.80	31.59	54.00	-22.41	AV	Horizontal
4003.39	39.37	44.20	7.90	29.70	-6.60	32.77	68.20	-35.43	Pk	Vertical
4003.39	36.50	44.20	7.90	29.70	-6.60	29.90	54.00	-24.10	AV	Vertical
4000.90	39.09	44.20	7.90	29.70	-6.60	32.49	68.20	-35.71	Pk	Horizontal
4000.90	36.59	44.20	7.90	29.70	-6.60	29.99	54.00	-24.01	AV	Horizontal
7230.11	37.03	43.50	11.40	35.50	3.40	40.43	68.20	-27.77	Pk	Vertical
7230.11	34.14	43.50	11.40	35.50	3.40	37.54	54.00	-16.46	AV	Vertical
7243.24	36.60	43.50	11.40	35.50	3.40	40.00	68.20	-28.20	Pk	Horizontal
7243.24	34.39	43.50	11.40	35.50	3.40	37.79	54.00	-16.21	AV	Horizontal
10540.11	39.74	44.50	13.90	38.80	8.20	47.94	68.20	-20.26	Pk	Vertical
10540.11	35.76	44.50	13.90	38.80	8.20	43.96	54.00	-10.04	AV	Vertical
10540.36	39.32	44.50	13.90	38.80	8.20	47.52	68.20	-20.68	Pk	Horizontal
10540.36	37.06	44.50	13.90	38.80	8.20	45.26	54.00	-8.74	AV	Horizontal
11043.39	32.77	43.60	14.30	39.50	10.20	42.97	68.20	-25.23	Pk	Vertical
11043.39	30.05	43.60	14.30	39.50	10.20	40.25	54.00	-13.75	AV	Vertical
11044.86	32.71	43.60	14.30	39.50	10.20	42.91	68.20	-25.29	Pk	Horizontal
11044.86	30.73	43.60	14.30	39.50	10.20	40.93	54.00	-13.07	AV	Horizontal
13322.25	31.61	42.60	15.90	38.90	12.20	43.81	68.20	-24.39	Pk	Vertical
13322.25	29.20	42.60	15.90	38.90	12.20	41.40	54.00	-12.60	AV	Vertical
13318.24	32.56	42.60	15.90	38.90	12.20	44.76	68.20	-23.44	Pk	Horizontal
13318.24	29.65	42.60	15.90	38.90	12.20	41.85	54.00	-12.15	AV	Horizontal
High Channel (802.11n40/ 5310 MHz)										
3245.72	44.78	44.70	6.70	28.20	-9.80	34.98	68.20	-33.22	Pk	Vertical
3245.72	41.76	44.70	6.70	28.20	-9.80	31.96	54.00	-22.04	AV	Vertical
3243.85	45.21	44.70	6.70	28.20	-9.80	35.41	68.20	-32.79	Pk	Horizontal
3243.85	40.96	44.70	6.70	28.20	-9.80	31.16	54.00	-22.84	AV	Horizontal
3979.32	39.73	44.20	7.90	29.70	-6.60	33.13	68.20	-35.07	Pk	Vertical
3979.32	36.54	44.20	7.90	29.70	-6.60	29.94	54.00	-24.06	AV	Vertical
3991.47	39.19	44.20	7.90	29.70	-6.60	32.59	68.20	-35.61	Pk	Horizontal
3991.47	36.16	44.20	7.90	29.70	-6.60	29.56	54.00	-24.44	AV	Horizontal
7211.23	37.92	43.50	11.40	35.50	3.40	41.32	68.20	-26.88	Pk	Vertical
7211.23	34.65	43.50	11.40	35.50	3.40	38.05	54.00	-15.95	AV	Vertical
7203.59	37.49	43.50	11.40	35.50	3.40	40.89	68.20	-27.31	Pk	Horizontal
7203.59	33.98	43.50	11.40	35.50	3.40	37.38	54.00	-16.62	AV	Horizontal
10620.36	39.40	44.50	13.80	38.80	8.10	47.50	68.20	-20.70	Pk	Vertical
10620.36	36.34	44.50	13.80	38.80	8.10	44.44	54.00	-9.56	AV	Vertical
10620.14	39.06	44.50	13.80	38.80	8.10	47.16	68.20	-21.04	Pk	Horizontal
10620.14	35.81	44.50	13.80	38.80	8.10	43.91	54.00	-10.09	AV	Horizontal
11002.16	33.32	43.60	14.30	39.50	10.20	43.52	68.20	-24.68	Pk	Vertical
11002.16	31.15	43.60	14.30	39.50	10.20	41.35	54.00	-12.65	AV	Vertical
11002.49	33.05	43.60	14.30	39.50	10.20	43.25	68.20	-24.95	Pk	Horizontal
11002.49	30.78	43.60	14.30	39.50	10.20	40.98	54.00	-13.02	AV	Horizontal
13260.89	32.34	42.70	18.00	37.10	12.40	44.74	68.20	-23.46	Pk	Vertical
13260.89	29.27	42.70	18.00	37.10	12.40	41.67	54.00	-12.33	AV	Vertical
13257.45	32.29	42.70	18.00	37.10	12.40	44.69	68.20	-23.51	Pk	Horizontal
13257.45	29.39	42.70	18.00	37.10	12.40	41.79	54.00	-12.21	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11n (HT-40).
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



Band III 5470-5725MHz

Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11n20/ 5500 MHz)										
3260.79	44.23	44.70	6.70	28.20	-9.80	34.43	68.20	-33.77	Pk	Vertical
3260.79	41.52	44.70	6.70	28.20	-9.80	31.72	54.00	-22.28	AV	Vertical
3248.13	43.93	44.70	6.70	28.20	-9.80	34.13	68.20	-34.07	Pk	Horizontal
3248.13	41.25	44.70	6.70	28.20	-9.80	31.45	54.00	-22.55	AV	Horizontal
3989.86	39.80	44.20	7.90	29.70	-6.60	33.20	68.20	-35.00	Pk	Vertical
3989.86	35.77	44.20	7.90	29.70	-6.60	29.17	54.00	-24.83	AV	Vertical
3991.07	38.92	44.20	7.90	29.70	-6.60	32.32	68.20	-35.88	Pk	Horizontal
3991.07	36.16	44.20	7.90	29.70	-6.60	29.56	54.00	-24.44	AV	Horizontal
7229.21	36.98	43.50	11.40	35.50	3.40	40.38	68.20	-27.82	Pk	Vertical
7229.21	34.59	43.50	11.40	35.50	3.40	37.99	54.00	-16.01	AV	Vertical
7234.77	37.94	43.50	11.40	35.50	3.40	41.34	68.20	-26.86	Pk	Horizontal
7234.77	33.80	43.50	11.40	35.50	3.40	37.20	54.00	-16.80	AV	Horizontal
10351.18	39.82	44.50	13.80	38.80	8.10	47.92	68.20	-20.28	Pk	Vertical
10351.18	36.55	44.50	13.80	38.80	8.10	44.65	54.00	-9.35	AV	Vertical
10344.35	38.96	44.50	13.80	38.80	8.10	47.06	68.20	-21.14	Pk	Horizontal
10344.35	36.55	44.50	13.80	38.80	8.10	44.65	54.00	-9.35	AV	Horizontal
11000.27	33.24	43.60	14.30	39.50	10.20	43.44	68.20	-24.76	Pk	Vertical
11000.27	30.25	43.60	14.30	39.50	10.20	40.45	54.00	-13.55	AV	Vertical
11000.25	33.06	43.60	14.30	39.50	10.20	43.26	68.20	-24.94	Pk	Horizontal
11000.25	29.85	43.60	14.30	39.50	10.20	40.05	54.00	-13.95	AV	Horizontal
13288.86	32.19	42.60	15.90	38.90	12.20	44.39	68.20	-23.81	Pk	Vertical
13288.86	28.86	42.60	15.90	38.90	12.20	41.06	54.00	-12.94	AV	Vertical
13285.92	32.08	42.60	15.90	38.90	12.20	44.28	68.20	-23.92	Pk	Horizontal
13285.92	28.88	42.60	15.90	38.90	12.20	41.08	54.00	-12.92	AV	Horizontal
Mid Channel (802.11n20/ 5580 MHz)										
3248.68	44.30	44.70	6.70	28.20	-9.80	34.50	68.20	-33.70	Pk	Vertical
3248.68	42.13	44.70	6.70	28.20	-9.80	32.33	54.00	-21.67	AV	Vertical
3249.11	44.06	44.70	6.70	28.20	-9.80	34.26	68.20	-33.94	Pk	Horizontal
3249.11	42.11	44.70	6.70	28.20	-9.80	32.31	54.00	-21.69	AV	Horizontal
3982.67	38.96	44.20	7.90	29.70	-6.60	32.36	68.20	-35.84	Pk	Vertical
3982.67	35.80	44.20	7.90	29.70	-6.60	29.20	54.00	-24.80	AV	Vertical
3988.53	39.13	44.20	7.90	29.70	-6.60	32.53	68.20	-35.67	Pk	Horizontal
3988.53	35.64	44.20	7.90	29.70	-6.60	29.04	54.00	-24.96	AV	Horizontal
7225.50	37.28	43.50	11.40	35.50	3.40	40.68	68.20	-27.52	Pk	Vertical
7225.50	34.80	43.50	11.40	35.50	3.40	38.20	54.00	-15.80	AV	Vertical
7233.50	37.81	43.50	11.40	35.50	3.40	41.21	68.20	-26.99	Pk	Horizontal
7233.50	34.16	43.50	11.40	35.50	3.40	37.56	54.00	-16.44	AV	Horizontal
10383.97	39.95	44.50	13.80	38.80	8.10	48.05	68.20	-20.15	Pk	Vertical
10383.97	36.05	44.50	13.80	38.80	8.10	44.15	54.00	-9.85	AV	Vertical
10394.67	39.40	44.50	13.80	38.80	8.10	47.50	68.20	-20.70	Pk	Horizontal
10394.67	36.01	44.50	13.80	38.80	8.10	44.11	54.00	-9.89	AV	Horizontal
11160.42	32.92	43.60	14.30	39.50	10.20	43.12	68.20	-25.08	Pk	Vertical
11160.42	29.87	43.60	14.30	39.50	10.20	40.07	54.00	-13.93	AV	Vertical
11160.20	33.60	43.60	14.30	39.50	10.20	43.80	68.20	-24.40	Pk	Horizontal
11160.20	30.46	43.60	14.30	39.50	10.20	40.66	54.00	-13.34	AV	Horizontal
13293.22	31.97	42.60	15.90	38.90	12.20	44.17	68.20	-24.03	Pk	Vertical
13293.22	29.41	42.60	15.90	38.90	12.20	41.61	54.00	-12.39	AV	Vertical
13284.73	33.00	42.60	15.90	38.90	12.20	45.20	68.20	-23.00	Pk	Horizontal
13284.73	28.90	42.60	15.90	38.90	12.20	41.10	54.00	-12.90	AV	Horizontal



High Channel (802.11n20/ 5700 MHz)										
3254.55	44.24	44.70	6.70	28.20	-9.80	34.44	68.20	-33.76	Pk	Vertical
3254.55	41.85	44.70	6.70	28.20	-9.80	32.05	54.00	-21.95	AV	Vertical
3253.50	44.59	44.70	6.70	28.20	-9.80	34.79	68.20	-33.41	Pk	Horizontal
3253.50	41.80	44.70	6.70	28.20	-9.80	32.00	54.00	-22.00	AV	Horizontal
3990.62	39.79	44.20	7.90	29.70	-6.60	33.19	68.20	-35.01	Pk	Vertical
3990.62	35.82	44.20	7.90	29.70	-6.60	29.22	54.00	-24.78	AV	Vertical
3996.19	39.78	44.20	7.90	29.70	-6.60	33.18	68.20	-35.02	Pk	Horizontal
3996.19	36.47	44.20	7.90	29.70	-6.60	29.87	54.00	-24.13	AV	Horizontal
7220.15	36.61	43.50	11.40	35.50	3.40	40.01	68.20	-28.19	Pk	Vertical
7220.15	34.79	43.50	11.40	35.50	3.40	38.19	54.00	-15.81	AV	Vertical
7233.63	37.64	43.50	11.40	35.50	3.40	41.04	68.20	-27.16	Pk	Horizontal
7233.63	33.90	43.50	11.40	35.50	3.40	37.30	54.00	-16.70	AV	Horizontal
10479.55	39.57	44.50	13.80	38.80	8.10	47.67	68.20	-20.53	Pk	Vertical
10479.55	35.83	44.50	13.80	38.80	8.10	43.93	54.00	-10.07	AV	Vertical
10478.17	38.88	44.50	13.80	38.80	8.10	46.98	68.20	-21.22	Pk	Horizontal
10478.17	36.03	44.50	13.80	38.80	8.10	44.13	54.00	-9.87	AV	Horizontal
11400.12	33.54	43.60	14.30	39.50	10.20	43.74	68.20	-24.46	Pk	Vertical
11400.12	30.99	43.60	14.30	39.50	10.20	41.19	54.00	-12.81	AV	Vertical
11400.02	33.70	43.60	14.30	39.50	10.20	43.90	68.20	-24.30	Pk	Horizontal
11400.02	30.74	43.60	14.30	39.50	10.20	40.94	54.00	-13.06	AV	Horizontal
13283.36	32.63	42.60	15.90	38.90	12.20	44.83	68.20	-23.37	Pk	Vertical
13283.36	29.11	42.60	15.90	38.90	12.20	41.31	54.00	-12.69	AV	Vertical
13280.41	32.44	42.60	15.90	38.90	12.20	44.64	68.20	-23.56	Pk	Horizontal
13280.41	29.45	42.60	15.90	38.90	12.20	41.65	54.00	-12.35	AV	Horizontal


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11n (HT-20).
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.




3.2.9 Band Edge

Band I 5150-5250MHz

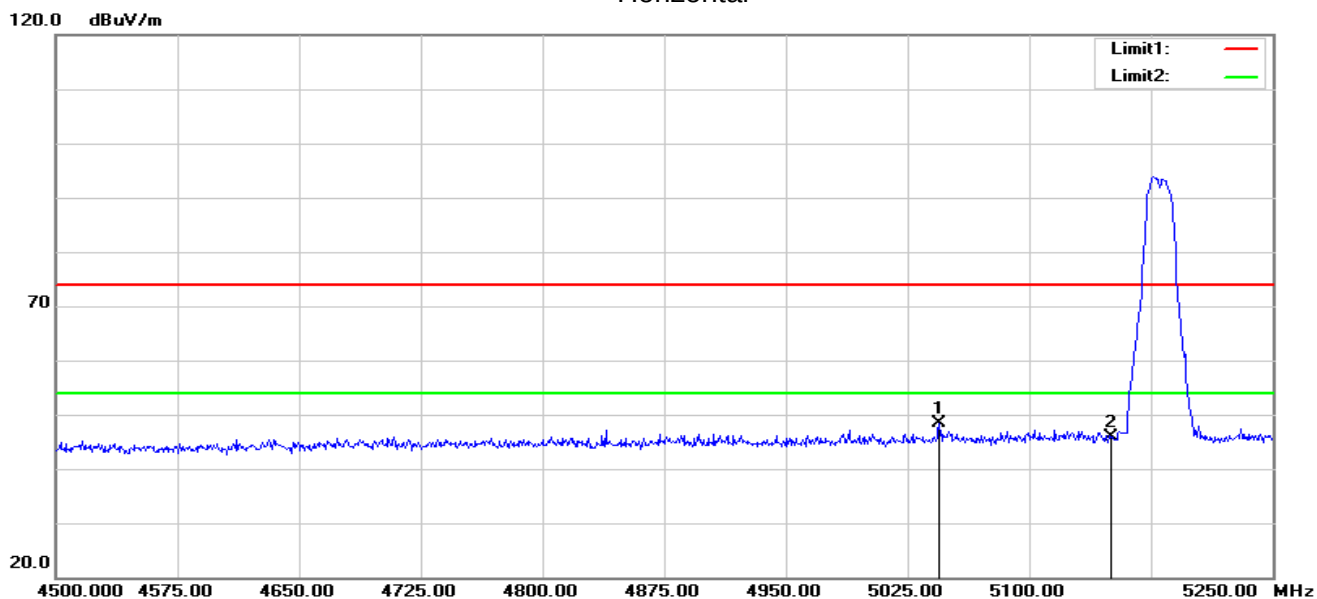
802.11a Low
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5044.500	54.26	-5.99	48.27	74.00	-25.73	peak
2	5150.000	51.52	-5.73	45.79	74.00	-28.21	peak

Vertical

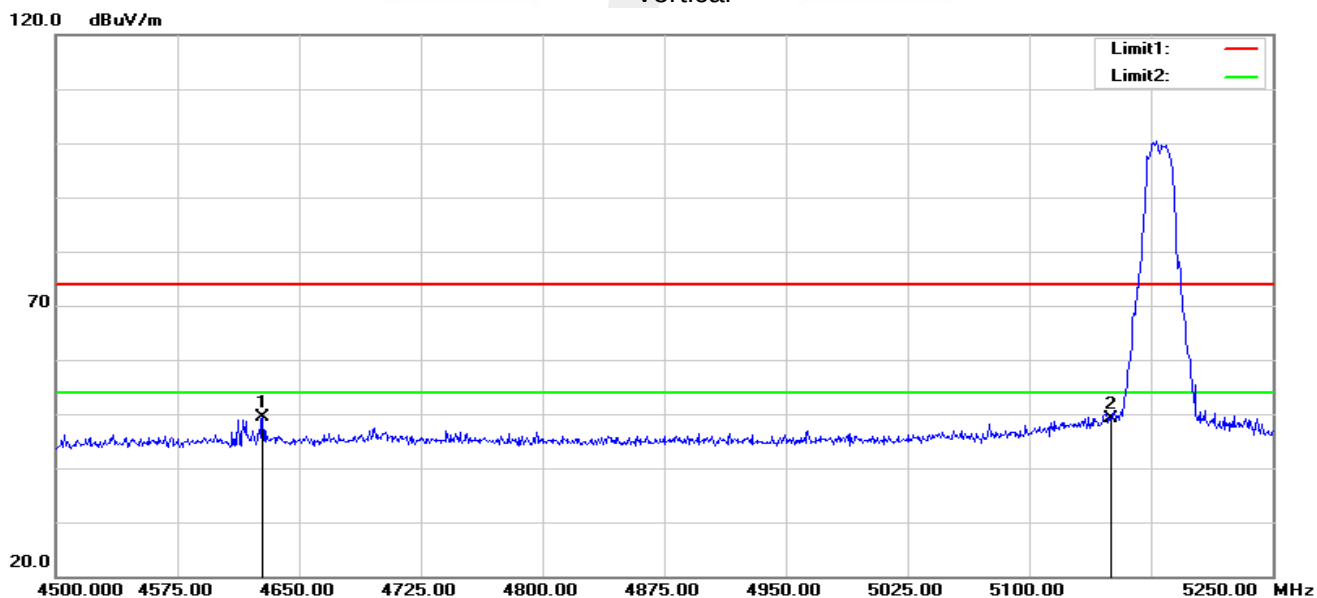


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4627.500	57.03	-7.72	49.31	74.00	-24.69	peak
2	5150.000	54.96	-5.73	49.23	74.00	-24.77	peak

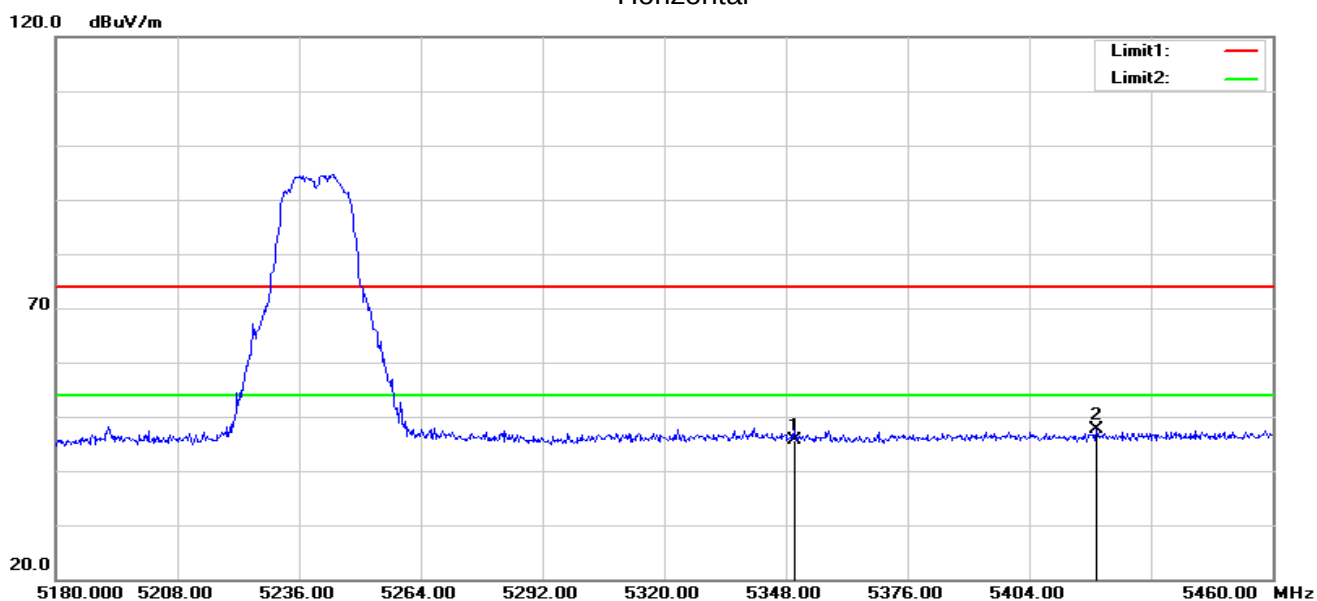**802.11a High**
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	50.86	-5.23	45.63	74.00	-28.37	peak
2	5419.400	52.89	-5.20	47.69	74.00	-26.31	peak

Vertical

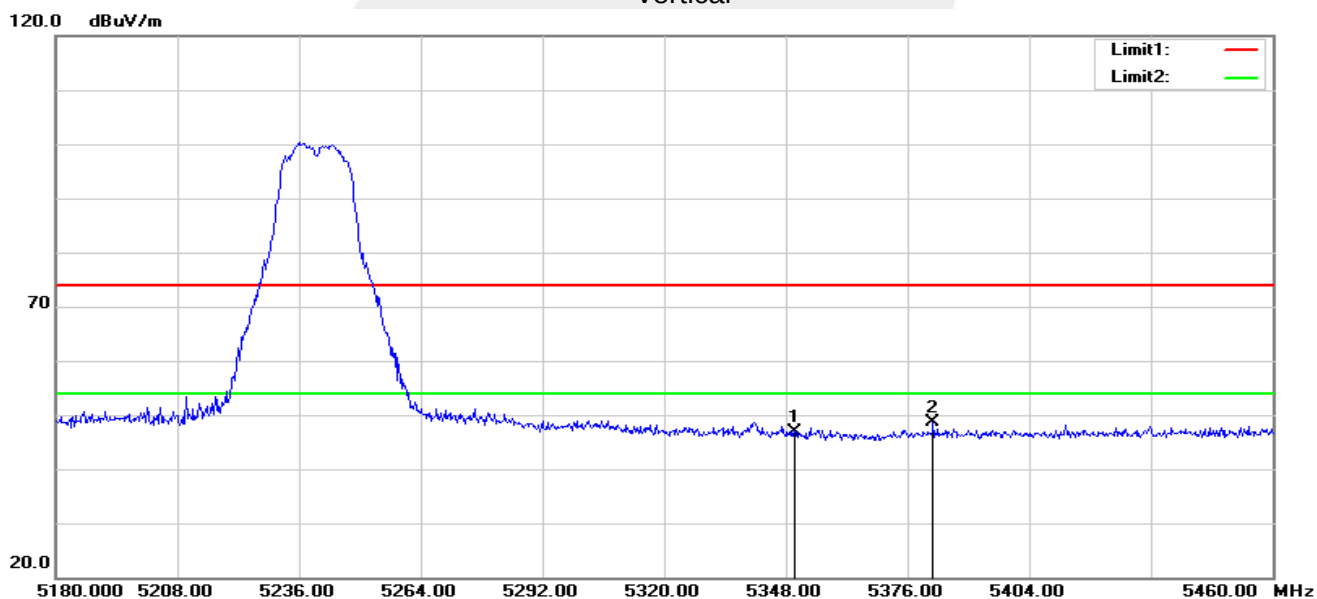


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	52.17	-5.23	46.94	74.00	-27.06	peak
2	5381.880	53.77	-5.24	48.53	74.00	-25.47	peak

Note: 802.11a,802.11n (HT-20),802.11n (HT-40), 802.11ac (VHT-20),802.11ac (VHT-40), 802.11ac (VHT-80) all has been tested, the worst case is 802.11a,only shown the worst case.




Band II 5250-5350MHz

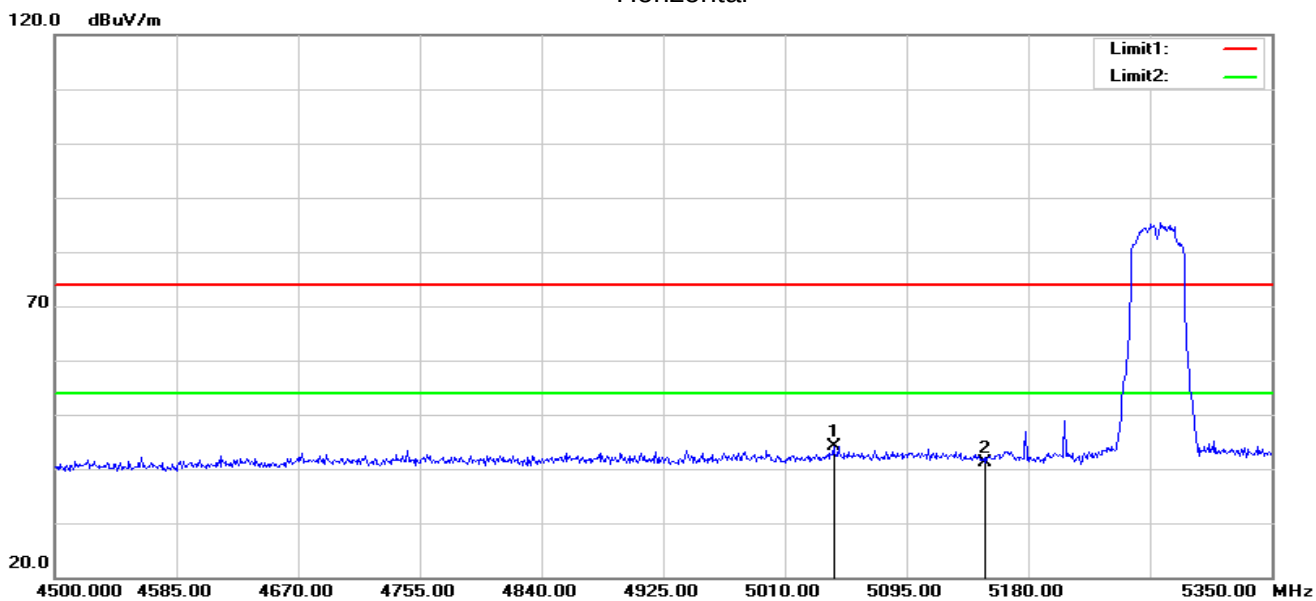
802.11n (HT-40) Low
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5044.000	50.04	-5.99	44.05	74.00	-29.95	peak
2	5150.000	46.89	-5.73	41.16	74.00	-32.84	peak


Vertical

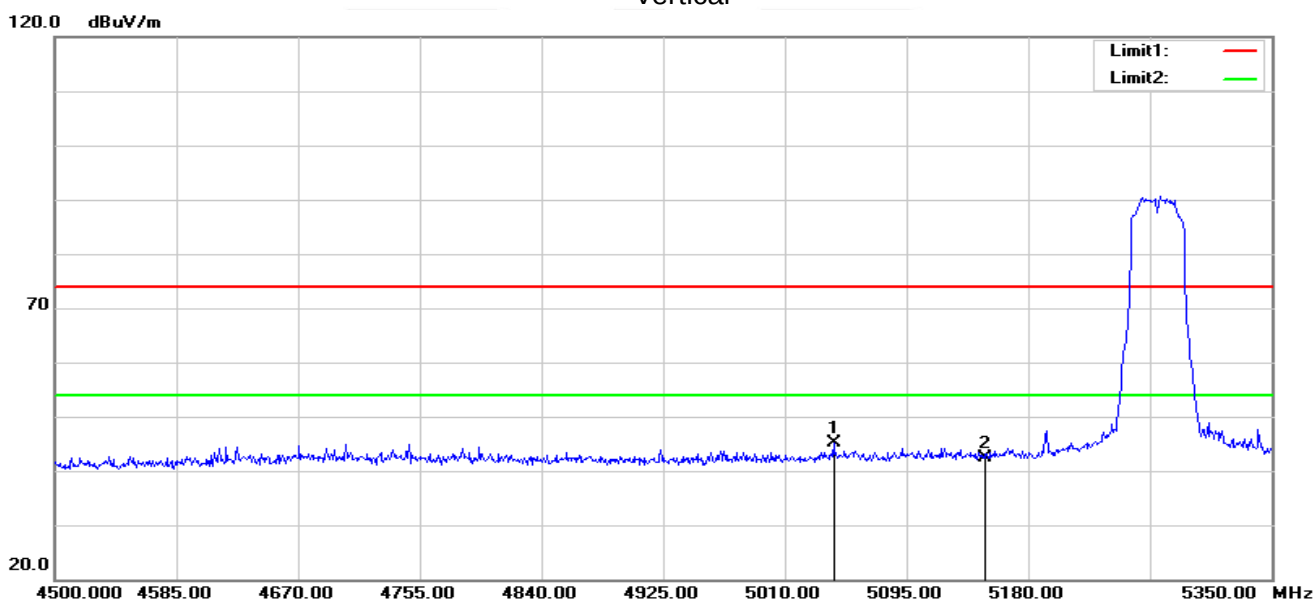

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5044.000	51.22	-5.99	45.23	74.00	-28.77	peak
2	5150.000	48.06	-5.73	42.33	74.00	-31.67	peak

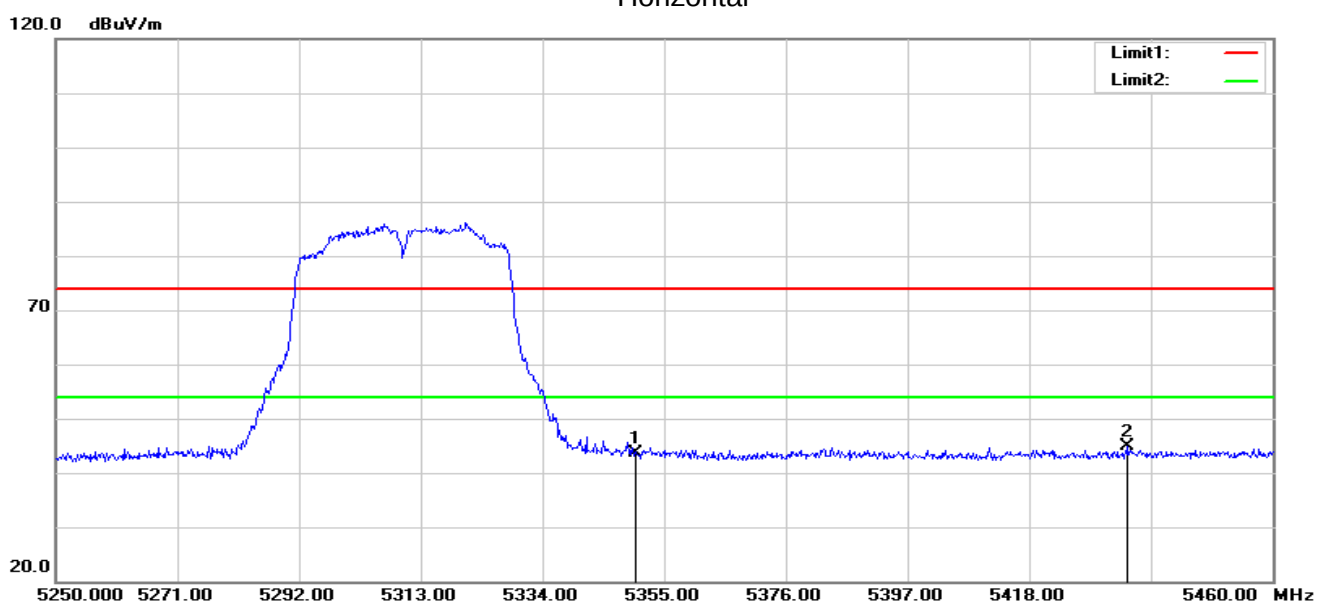**802.11n (HT-40) High
Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	48.83	-5.23	43.60	74.00	-30.40	peak
2	5435.010	50.02	-5.17	44.85	74.00	-29.15	peak

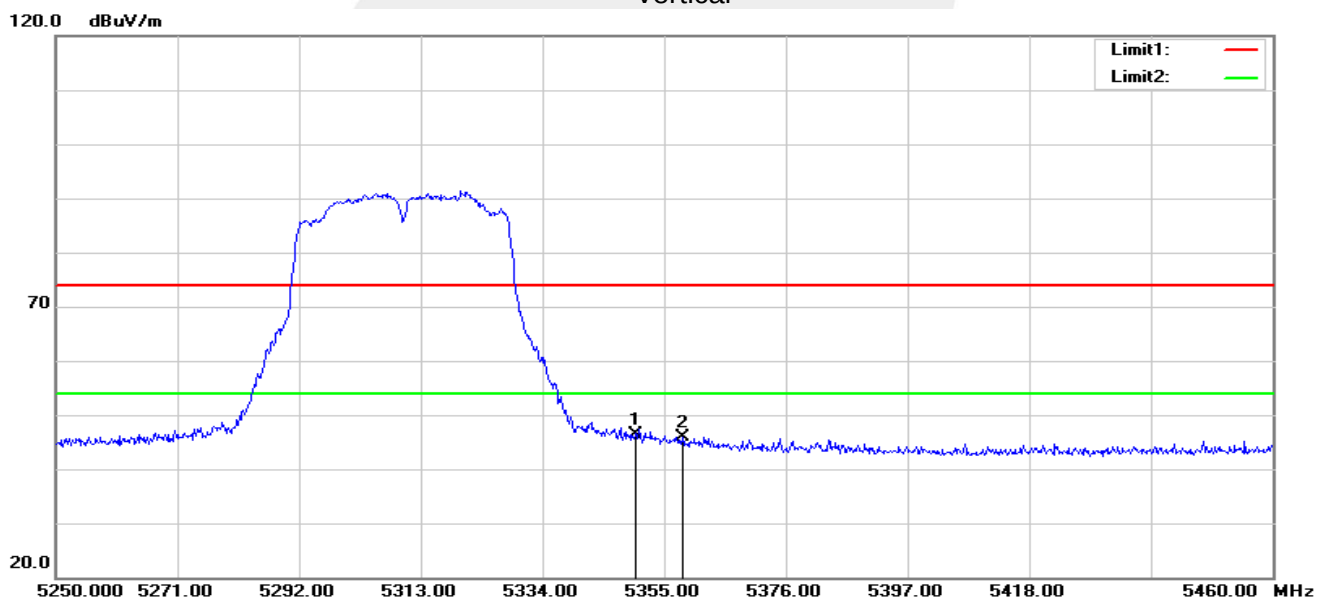
Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	51.73	-5.23	46.50	74.00	-27.50	peak
2	5358.150	51.10	-5.23	45.87	74.00	-28.13	peak

Note: 802.11a,802.11n (HT-20),802.11n (HT-40), 802.11ac (VHT-20),802.11ac (VHT-40), 802.11ac (VHT-80) all has been tested, the worst case is 802.11n (HT-40),only shown the worst case.




Band III 5470-5725MHz

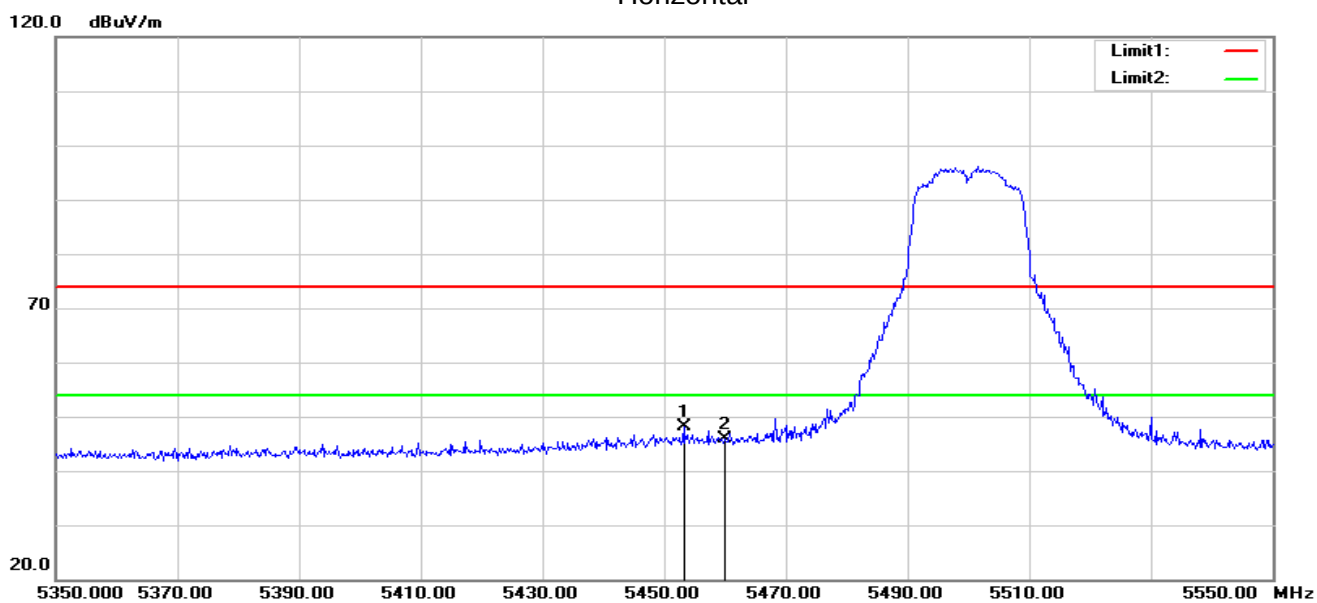
802.11n (HT-20) Low
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.200	53.20	-5.13	48.07	74.00	-25.93	peak
2	5460.000	51.09	-5.11	45.98	74.00	-28.02	peak

Vertical

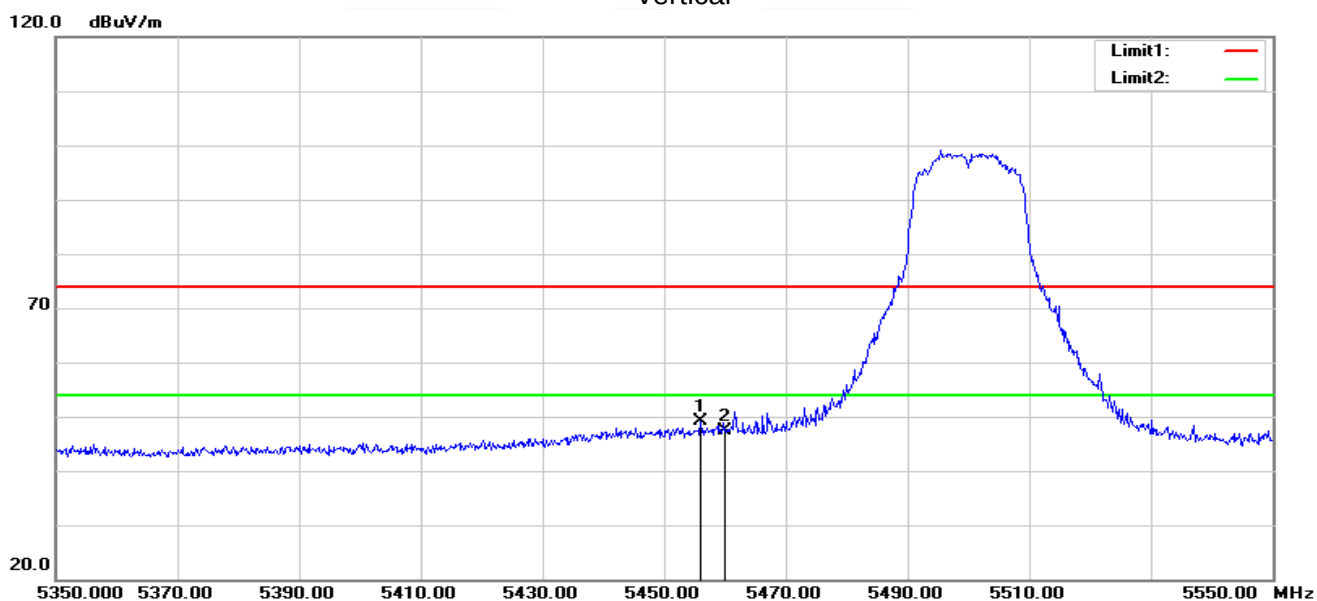


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.000	54.38	-5.13	49.25	74.00	-24.75	peak
2	5460.000	52.44	-5.11	47.33	74.00	-26.67	peak

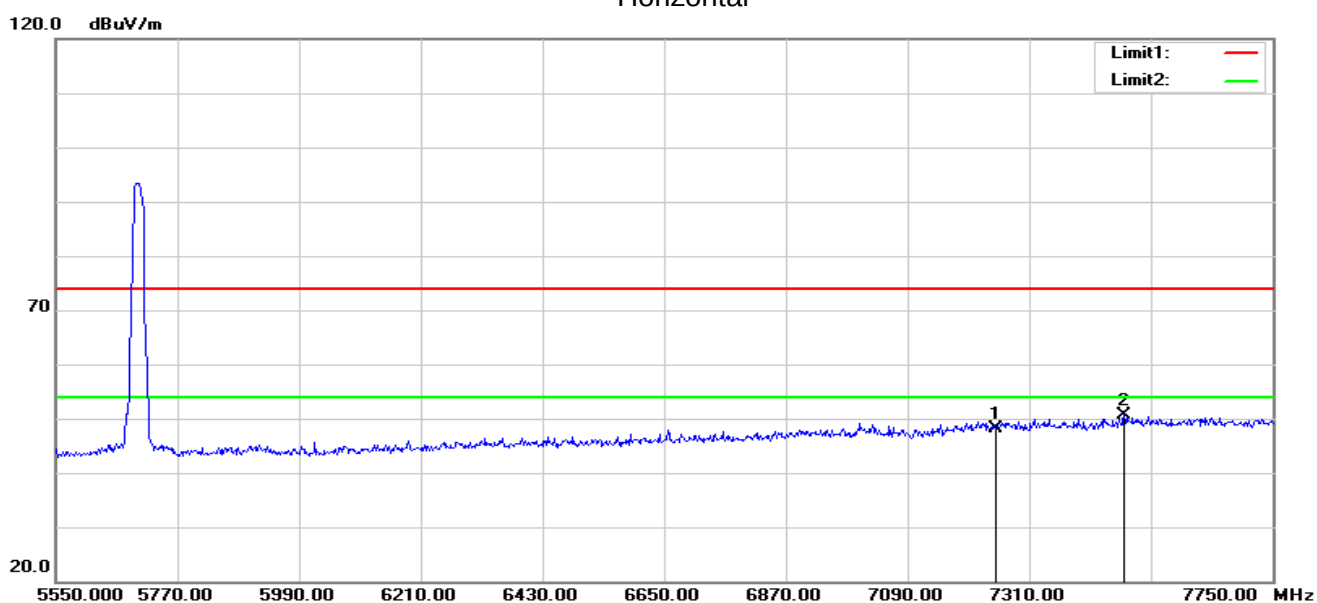**802.11n (HT-20) High**
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7250.000	47.36	0.72	48.08	74.00	-25.92	peak
2	7481.600	49.19	1.56	50.75	74.00	-23.25	peak

Vertical

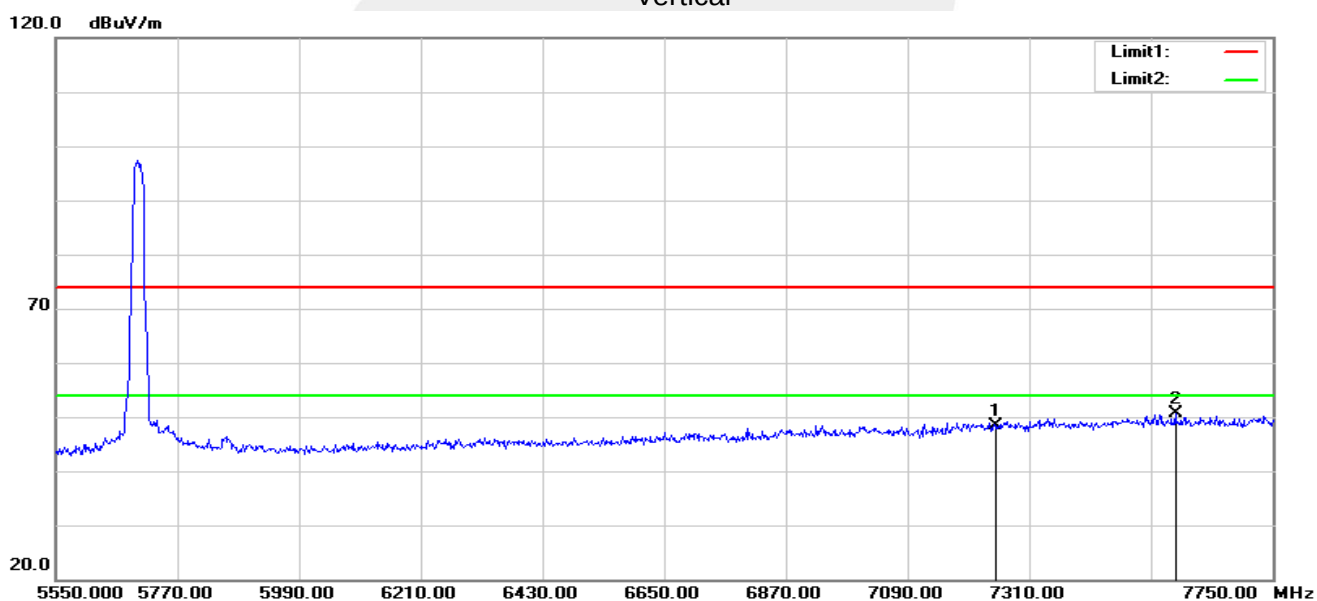

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7250.000	47.58	0.72	48.30	74.00	-25.70	peak
2	7574.000	48.82	1.71	50.53	74.00	-23.47	peak

Note: 802.11a,802.11n (HT-20),802.11n (HT-40), 802.11ac (VHT-20),802.11ac (VHT-40), 802.11ac (VHT-80) all has been tested, the worst case is 802.11n (HT-20),only shown the worst case.



4. CONDUCTED SPURIOUS EMISSIONS AND BANDEDGE

4.1 LIMIT

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	1000 KHz/3000 KHz
Trace-Mode:	Max hold


For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 5700 to 5725 MHz Upper Band Edge: 5850 to 5870 MHz
RB / VB (emission in restricted band)	1000 KHz/3000 KHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP

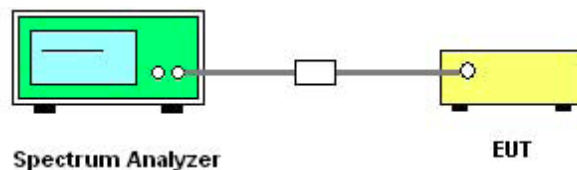

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1000 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

Data See Attachment A





5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB D02 General UNII Test Procedures New Rules v01r03.

For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz.

Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used.

The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.


Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHZ}$ is available on nearly all spectrum analyzers.



5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

5150-5250MHz					
Frequency	Power Density(dBm)	Duty cycle factor (dB)	Power Density(dBm)	Limit	Result
802.11a					
5180	-6.410	0.196	-6.214	9.15	PASS
5200	-6.810	0.196	-6.614	9.15	PASS
5240	-6.269	0.196	-6.073	9.15	PASS
802.11n20					
5180	-6.566	0.156	-6.410	9.15	PASS
5200	-6.358	0.156	-6.202	9.15	PASS
5240	-6.719	0.156	-6.563	9.15	PASS
802.11n40					
5190	-11.284	0.675	-10.609	9.15	PASS
5230	-11.371	0.675	-10.696	9.15	PASS
802.11ac20					
5180	-6.466	0.155	-6.311	9.15	PASS
5200	-6.063	0.155	-5.908	9.15	PASS
5240	-6.248	0.155	-6.093	9.15	PASS
802.11ac40					
5190	-11.278	0.681	-10.597	9.15	PASS
5230	-10.684	0.681	-10.003	9.15	PASS
802.11ac80					
5210	-19.867	0.662	-19.205	9.15	PASS



5250-5350MHz					
Frequency	Power Density(dBm)	Duty cycle factor (dB)	Power Density(dBm)	Limit	Result
802.11a					
5260	-9.214	0.196	-9.018	9.15	PASS
5300	-9.141	0.196	-8.945	9.15	PASS
5320	-8.391	0.196	-8.195	9.15	PASS
802.11n20					
5260	-9.275	0.156	-9.119	9.15	PASS
5300	-9.285	0.156	-9.129	9.15	PASS
5320	-8.529	0.156	-8.373	9.15	PASS
802.11n40					
5270	-12.316	0.675	-11.641	9.15	PASS
5310	-12.447	0.675	-11.772	9.15	PASS
802.11ac20					
5260	-9.189	0.166	-9.023	9.15	PASS
5300	-8.702	0.166	-8.536	9.15	PASS
5320	-8.878	0.166	-8.712	9.15	PASS
802.11ac40					
5270	-12.299	0.683	-11.616	9.15	PASS
5310	-12.288	0.683	-11.605	9.15	PASS
802.11ac80					
5290	-19.667	0.688	-18.979	9.15	PASS



5470-5725MHz					
Frequency	Power Density(dBm)	Duty cycle factor (dB)	Power Density(dBm)	Limit	Result
802.11a					
5500	-0.425	0.185	-0.240	9.15	PASS
5580	-0.385	0.185	-0.200	9.15	PASS
5700	-1.101	0.185	-0.916	9.15	PASS
802.11n20					
5500	-0.994	0.155	-0.839	9.15	PASS
5580	-0.611	0.155	-0.456	9.15	PASS
5700	-1.449	0.155	-1.294	9.15	PASS
802.11n40					
5510	-5.221	0.680	-4.541	9.15	PASS
5550	-5.164	0.680	-4.484	9.15	PASS
5670	-7.420	0.680	-6.740	9.15	PASS
802.11ac20					
5500	-0.689	0.166	-0.523	9.15	PASS
5580	-0.380	0.166	-0.214	9.15	PASS
5700	-1.622	0.166	-1.456	9.15	PASS
802.11ac40					
5510	-5.316	0.675	-4.641	9.15	PASS
5550	-5.471	0.675	-4.796	9.15	PASS
5670	-7.070	0.675	-6.395	9.15	PASS
802.11ac80					
5530	-12.696	0.669	-12.027	9.15	PASS
5610	-13.706	0.669	-13.037	9.15	PASS

Note:

1. The antenna gain is 6.85dBi, greater than 6dBi, the limit will be reduced by 1.85dBm, so the limit is 9.15dBm.
2. Test plots see Attachment B.

6. BANDWIDTH MEASUREMENT

6.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

See list of measuring instruments of this test report.


6.1.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW $\geq$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

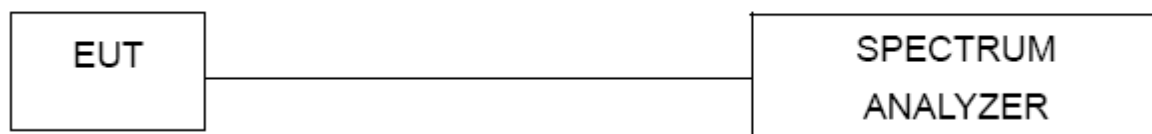

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**

Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5180	22.31	Pass
5200	22.42	Pass
5240	22.91	Pass
802.11n(HT20)		
5180	23.55	Pass
5200	22.49	Pass
5240	22.90	Pass
802.11n(HT40)		
5190	42.56	Pass
5230	41.81	Pass
802.11ac(VHT20)		
5180	23.09	Pass
5200	22.46	Pass
5240	22.46	Pass
802.11ac(VHT40)		
5190	42.72	Pass
5230	42.85	Pass
802.11ac(VHT80)		
5210	80.96	Pass

Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5260	22.28	Pass
5300	22.92	Pass
5320	22.36	Pass
802.11n(HT20)		
5260	24.01	Pass
5300	22.72	Pass
5320	22.60	Pass
802.11n(HT40)		
5270	42.59	Pass
5310	41.52	Pass
802.11ac(VHT20)		
5260	23.07	Pass
5300	22.86	Pass
5320	22.58	Pass
802.11ac(VHT40)		
5270	43.07	Pass
5310	42.18	Pass
802.11ac(VHT80)		
5290	80.98	Pass



Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5500	23.02	Pass
5580	22.53	Pass
5700	22.86	Pass
802.11n(HT20)		
5500	23.43	Pass
5580	22.72	Pass
5700	22.78	Pass
802.11n(HT40)		
5510	41.97	Pass
5550	42.41	Pass
5670	42.50	Pass
802.11ac(VHT20)		
5500	22.35	Pass
5580	22.39	Pass
5700	22.32	Pass
802.11ac(VHT40)		
5510	42.25	Pass
5550	41.66	Pass
5670	42.09	Pass
802.11ac(VHT80)		
5530	80.61	Pass
5610	80.92	Pass

Test plot see Attachment C



6.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth:

6.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.


The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.2.2 DEVIATION FROM STANDARD

No deviation.

6.2.3 TEST SETUP

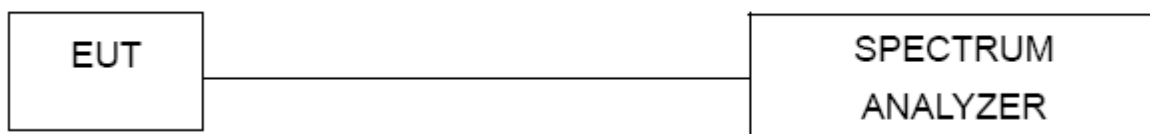

6.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.2.5 TEST RESULTS**

Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5180	16.46	Pass
5200	16.44	Pass
5240	16.46	Pass
802.11n(HT20)		
5180	17.61	Pass
5200	17.61	Pass
5240	17.62	Pass
802.11n(HT40)		
5190	36.02	Pass
5230	36.90	Pass
802.11ac(VHT20)		
5180	17.62	Pass
5200	17.62	Pass
5240	17.61	Pass
802.11ac(VHT40)		
5190	36.06	Pass
5230	36.01	Pass
802.11ac(VHT80)		
5210	75.35	Pass

Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5260	16.44	Pass
5300	16.45	Pass
5320	16.44	Pass
802.11n(HT20)		
5260	17.63	Pass
5300	17.62	Pass
5320	17.62	Pass
802.11n(HT40)		
5270	36.06	Pass
5310	36.01	Pass
802.11ac(VHT20)		
5260	17.61	Pass
5300	17.61	Pass
5320	17.62	Pass
802.11ac(VHT40)		
5270	36.03	Pass
5310	36.07	Pass
802.11ac(VHT80)		
5290	75.38	Pass



Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5500	16.43	Pass
5580	16.47	Pass
5700	16.42	Pass
802.11n(HT20)		
5500	17.62	Pass
5580	17.63	Pass
5700	17.60	Pass
802.11n(HT40)		
5510	35.98	Pass
5550	35.99	Pass
5670	36.07	Pass
802.11ac(VHT20)		
5500	17.61	Pass
5580	17.63	Pass
5700	17.61	Pass
802.11ac(VHT40)		
5510	36.04	Pass
5550	36.05	Pass
5670	36.06	Pass
802.11ac(VHT80)		
5530	75.32	Pass
5610	75.32	Pass

Test plot See Attachment C



6.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:


6.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.2 DEVIATION FROM STANDARD

No deviation.

6.3.3 TEST SETUP

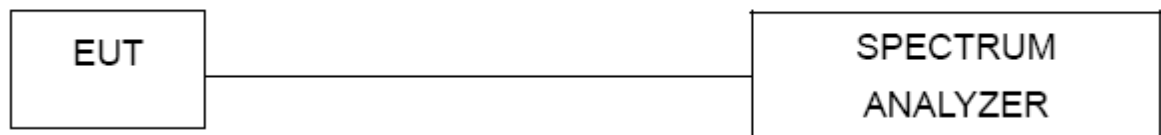

6.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.3.5 TEST RESULTS

Note: The EUT not support band 5.725-5.85 GHz, not apply.

7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Peak Output Power	0.25 watt	5150-5250	PASS
		The lesser of 250 mW or 11 dBm + 10 log (26 dB emission bandwidth)	5250-5350 5470-5725	
15.407(a) (3)		1 watt	5725-5825	


7.2 TEST PROCEDURE

The EUT was directly connected to the Power Sensor&PC

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

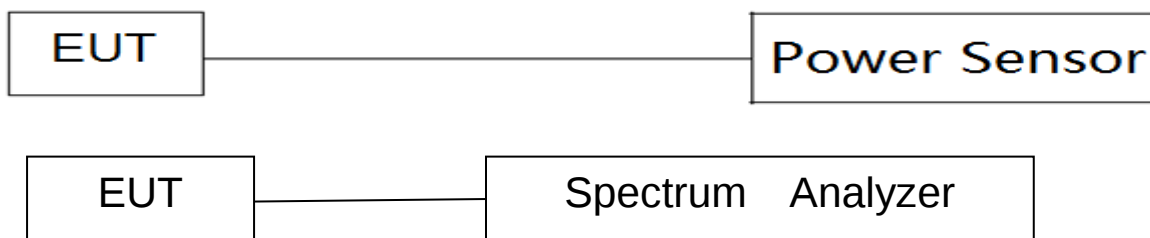

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULTS

Note:


1. For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 0.25 W, However, the antenna gain is 6.85dBi, greater than 6dBi, the limit will be reduced by 1.85dBm, so the limit is 22.13dBm.
2. For mobile and portable client devices in the 5.25-5.35 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 0.25 W. However, the antenna gain is 6.85dBi, greater than 6dBi, the limit will be reduced by 1.85dBm, so the limit is 22.13dBm.
3. For mobile and portable client devices in the 5.47-5.725 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 0.25 W. However, the antenna gain is 6.85dBi, greater than 6dBi, the limit will be reduced by 1.85dBm, so the limit is 22.13dBm.

Band I (5.15-5.25GHz)					
Test Channel	Frequency (MHz)	AV Power (dBm)	Duty cycle factor	AV Power (dBm)	LIMIT (dBm)
802.11a					
36	5180	6.37	0.196	6.57	22.13
40	5200	6.36	0.196	6.56	22.13
48	5240	6.42	0.196	6.62	22.13
802.11n(HT20)					
36	5180	5.71	0.156	5.87	22.13
40	5200	6.09	0.156	6.25	22.13
48	5240	6.67	0.156	6.83	22.13
802.11n(HT40)					
38	5190	4.55	0.675	5.23	22.13
46	5230	4.64	0.675	5.32	22.13
802.11ac(VHT20)					
36	5180	5.97	0.155	6.12	22.13
40	5200	6.01	0.155	6.16	22.13
48	5240	6.19	0.155	6.34	22.13
802.11ac(VHT40)					
38	5190	4.64	0.681	5.32	22.13
46	5230	4.74	0.681	5.42	22.13
802.11ac(VHT80)					
42	5210	3.67	0.662	4.33	22.13




Band II(5.25-5.35GHz)					
Test Channel	Frequency (MHz)	AV Power (dBm)	Duty cycle factor	AV Power (dBm)	LIMIT (dBm)
802.11a					
52	5260	3.97	0.196	4.17	22.13
60	5300	4.06	0.196	4.26	22.13
64	5320	4.15	0.196	4.35	22.13
802.11n(HT20)					
52	5260	3.87	0.156	4.03	22.13
60	5300	4.01	0.156	4.17	22.13
64	5320	4.08	0.156	4.24	22.13
802.11n(HT40)					
54	5270	4.30	0.675	4.98	22.13
62	5310	4.34	0.675	5.02	22.13
802.11ac(VHT20)					
52	5260	3.54	0.166	3.71	22.13
60	5300	4.10	0.166	4.27	22.13
64	5320	4.11	0.166	4.28	22.13
802.11ac(VHT40)					
54	5270	4.17	0.683	4.85	22.13
62	5310	4.28	0.683	4.96	22.13
802.11ac(VHT80)					
58	5290	3.58	0.688	4.27	22.13


Band III(5.47-5.725GHz)					
Test Channel	Frequency (MHz)	AV Power (dBm)	Duty cycle factor	AV Power (dBm)	LIMIT (dBm)
802.11a					
100	5500	11.22	0.185	11.40	22.13
116	5580	11.34	0.185	11.52	22.13
140	5700	10.75	0.185	10.93	22.13
802.11n(HT20)					
100	5500	11.17	0.155	11.33	22.13
116	5580	11.24	0.155	11.40	22.13
140	5700	11.09	0.155	11.25	22.13
802.11n(HT40)					
102	5510	9.61	0.680	10.29	22.13
110	5550	9.39	0.680	10.07	22.13
134	5670	8.69	0.680	9.37	22.13
802.11ac(VHT20)					
100	5500	11.28	0.166	11.45	22.13
116	5580	11.41	0.166	11.58	22.13
140	5700	10.00	0.166	10.17	23.98
802.11ac(VHT40)					
102	5510	9.55	0.675	10.22	22.13
110	5550	9.41	0.675	10.08	22.13
134	5670	8.62	0.675	9.29	22.13
802.11ac(VHT80)					
106	5530	9.74	0.669	10.41	22.13
122	5610	9.66	0.669	10.33	22.13

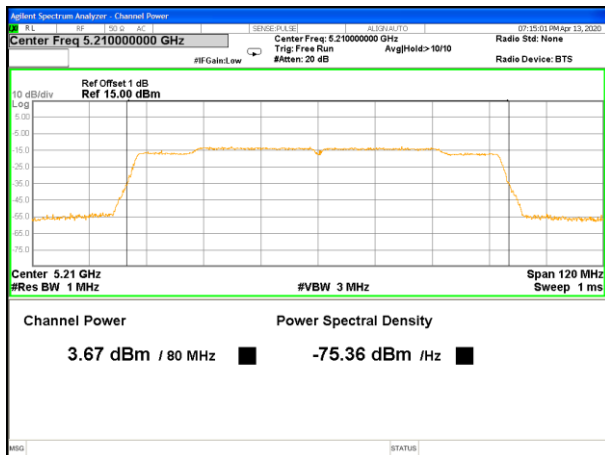


5210MHz

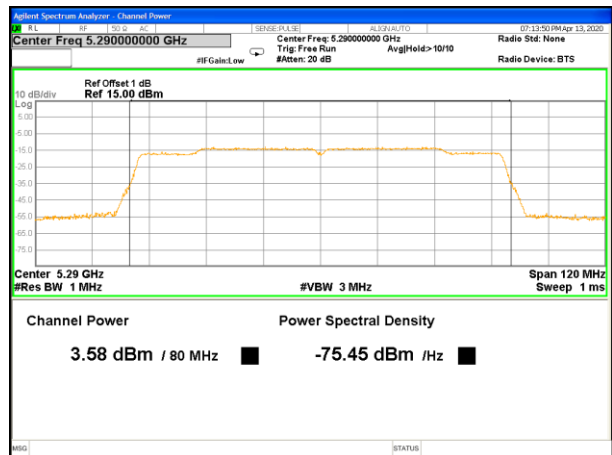

5290MHz

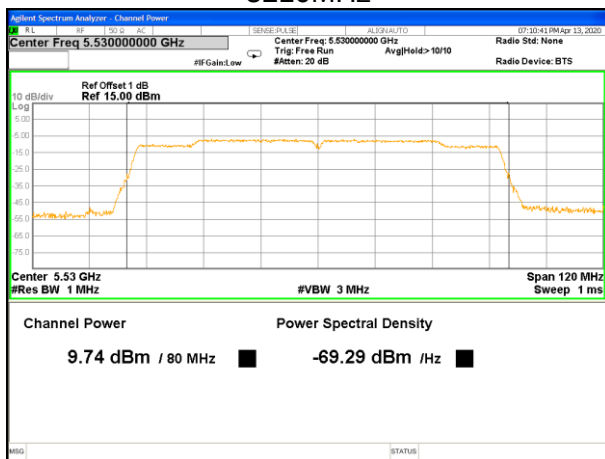

5530MHz

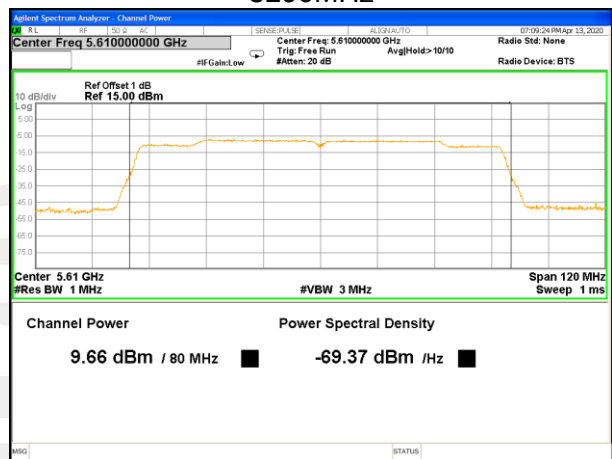


5610MHz




Duty cycle

Band1				
Mode	Ton(ms)	Tp(ms)	Duty cycle(%)	Duty factor(dB)
a	2.060	2.155	95.59%	0.196
n20	1.920	1.990	96.48%	0.156
n40	0.945	1.104	85.60%	0.675
ac20	1.930	2.000	96.50%	0.155
ac40	0.954	1.116	85.48%	0.681
ac80	0.466	0.543	85.87%	0.662
Band2				
Mode	Ton(ms)	Tp(ms)	Duty cycle(%)	Duty factor(dB)
a	2.060	2.155	95.59%	0.196
n20	1.920	1.990	96.48%	0.156
n40	0.945	1.104	85.60%	0.675
ac20	1.925	2.000	96.25%	0.166
ac40	0.951	1.113	85.44%	0.683
ac80	0.465	0.544	85.36%	0.688
Band3				
Mode	Ton(ms)	Tp(ms)	Duty cycle(%)	Duty factor(dB)
a	2.070	2.160	95.83%	0.185
n20	1.925	1.995	96.49%	0.155
n40	0.944	1.104	85.51%	0.680
ac20	1.930	2.005	96.26%	0.166
ac40	0.952	1.112	85.61%	0.675
ac80	0.468	0.546	85.71%	0.669

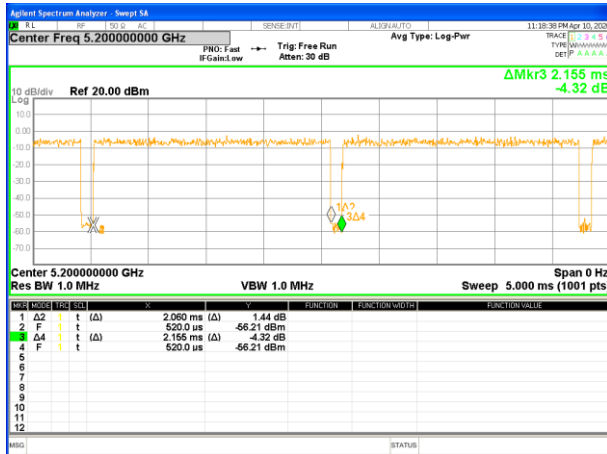


Band 1-a20

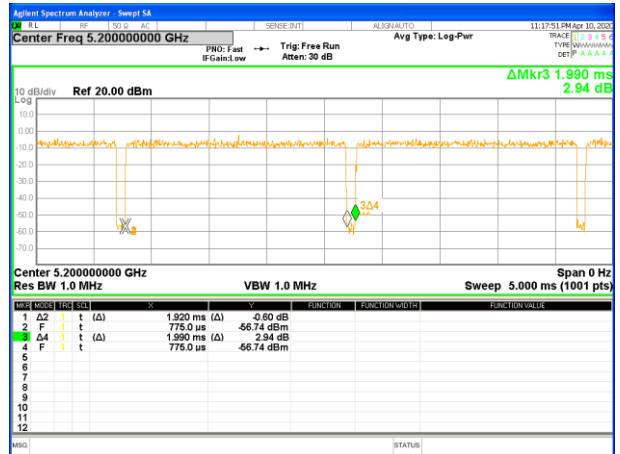


Band 1-n20




Band 1-n40

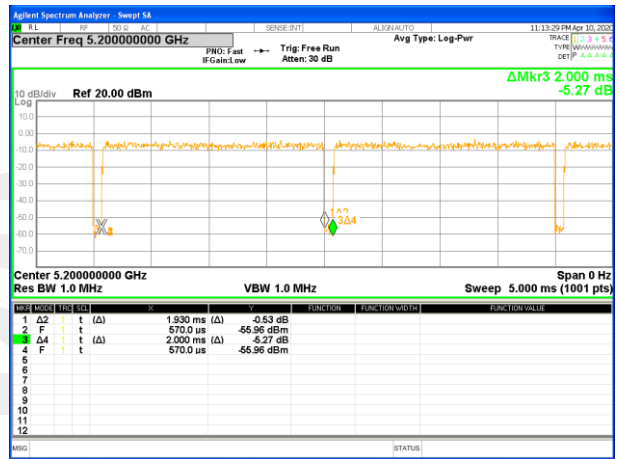


Band 1-ac20

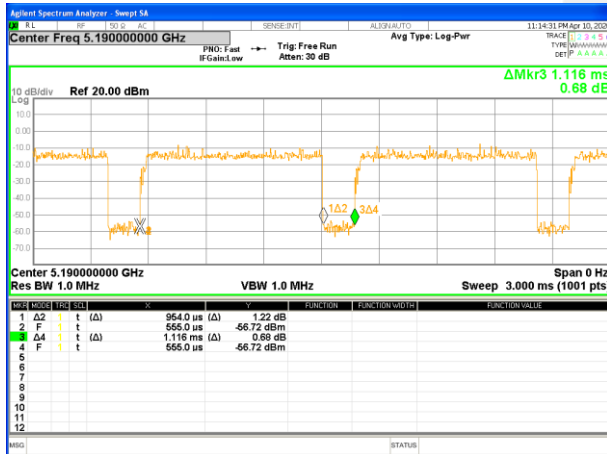


Band 1-ac40

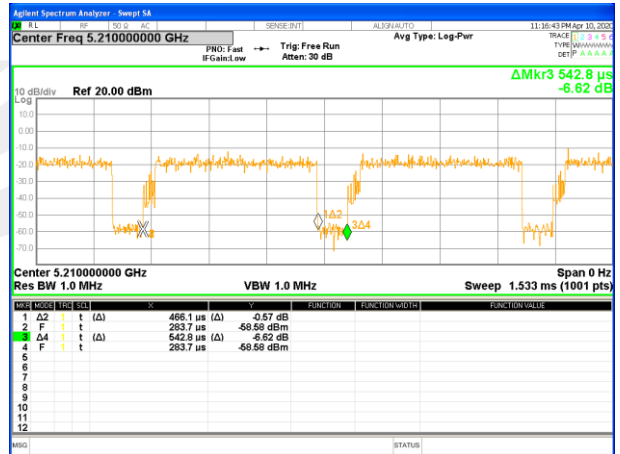


Band 1-ac80

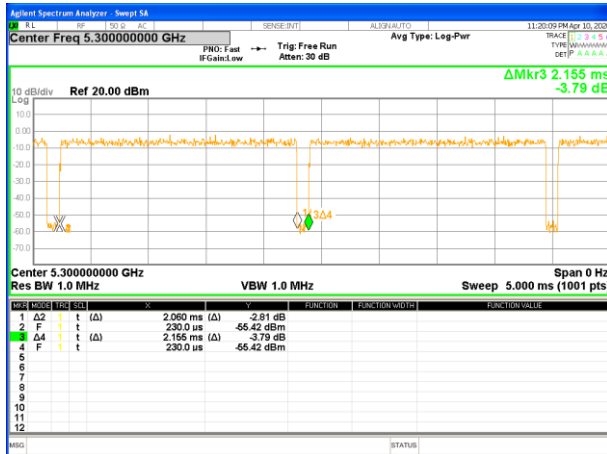


Band 2-a20

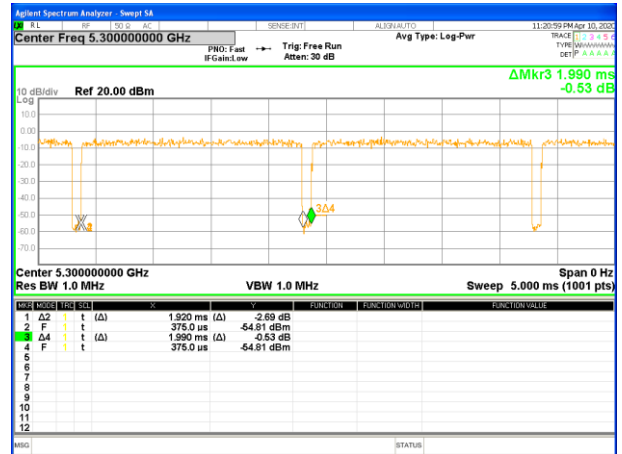


Band 2-n20

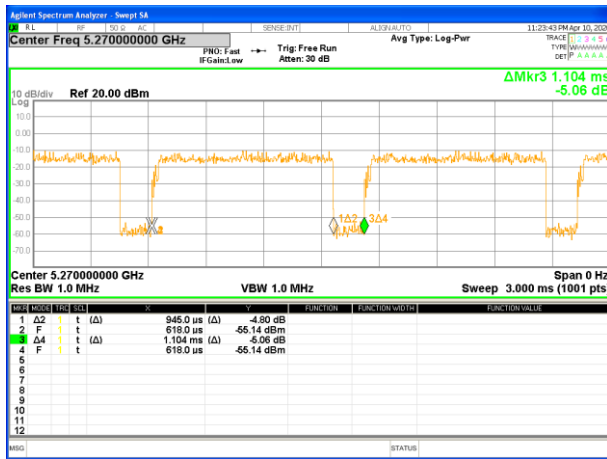


Band 2-n40

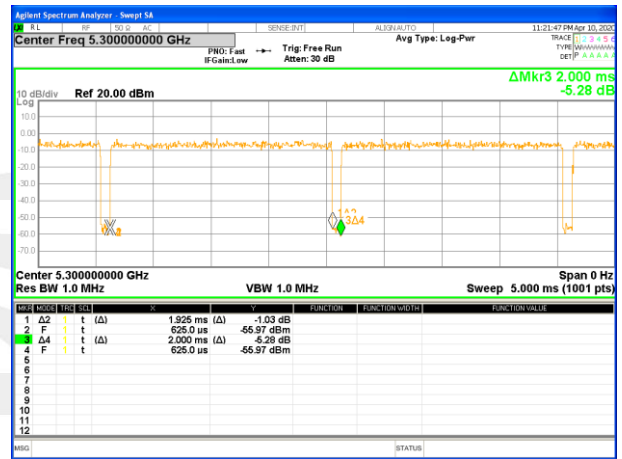


Band 2-ac20

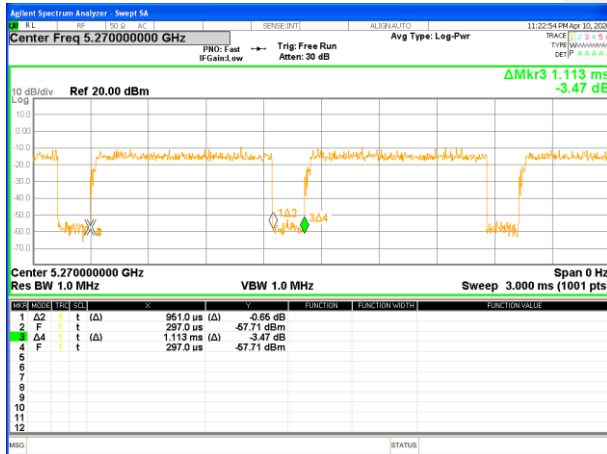

Band 2-ac40

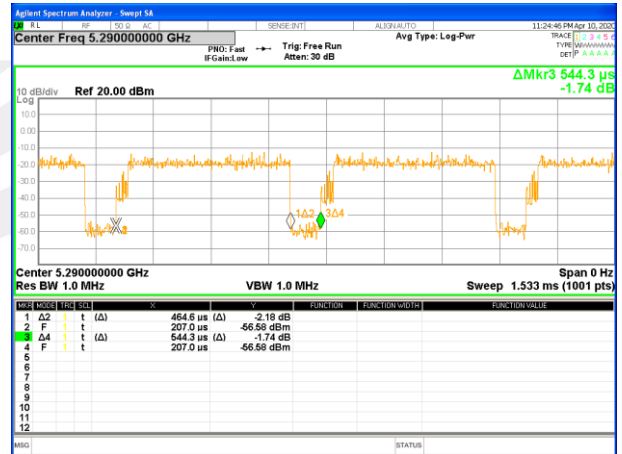

Band 2-ac80

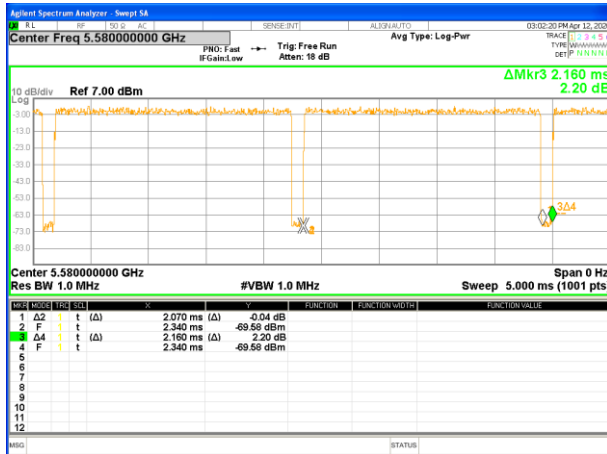

Band 3-a20




Band 3-n20




Band 3-n40



Band 3-ac20

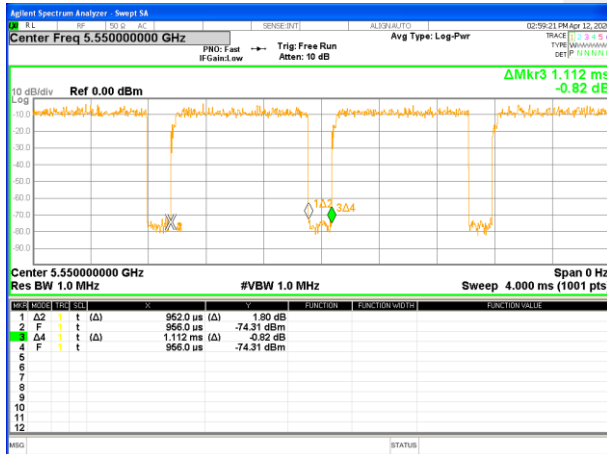

Band 3-ac40

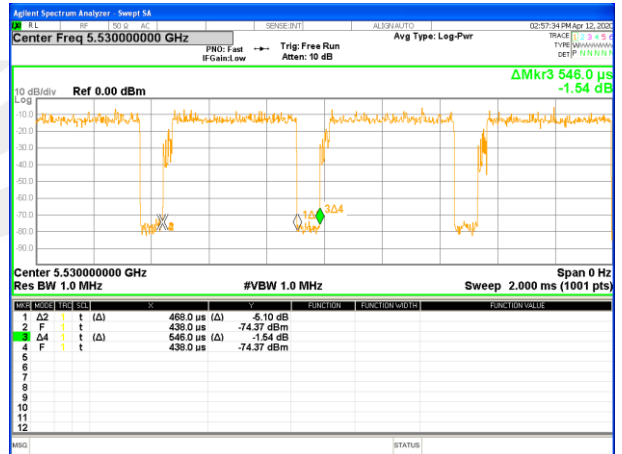

Band 3-ac80


8. AUTOMATICALLY DISCONTINUE TRANSMISSION

8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission

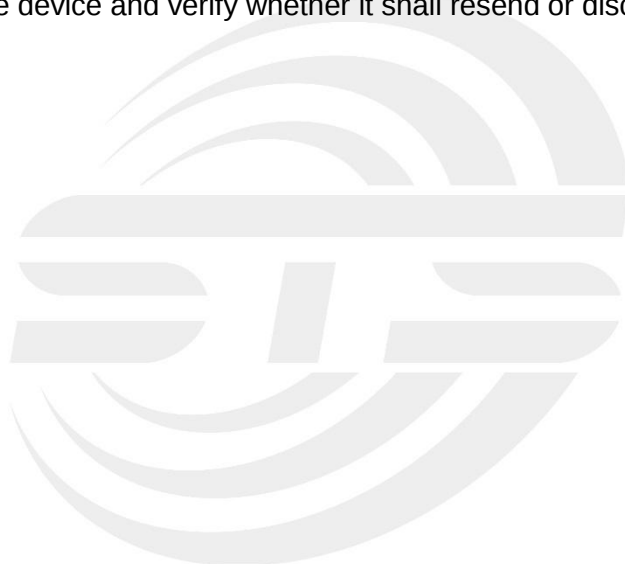



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is External Antenna. It comply with the standard requirement.



**APPENDIX - PHOTOS OF TEST SETUP**

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※

