




11N40SISO_Ant1_5550



11N40SISO_Ant1_5670

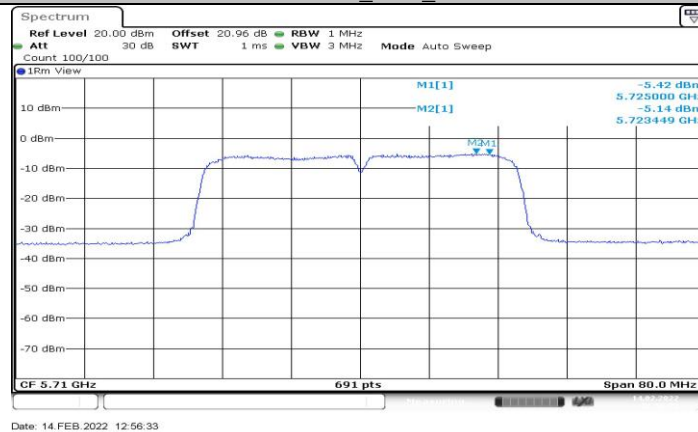


11N40SISO_Ant1_5710_UNII-2C



11N40SISO_Ant1_5710_UNII-3




11N40SISO_Ant1_5755

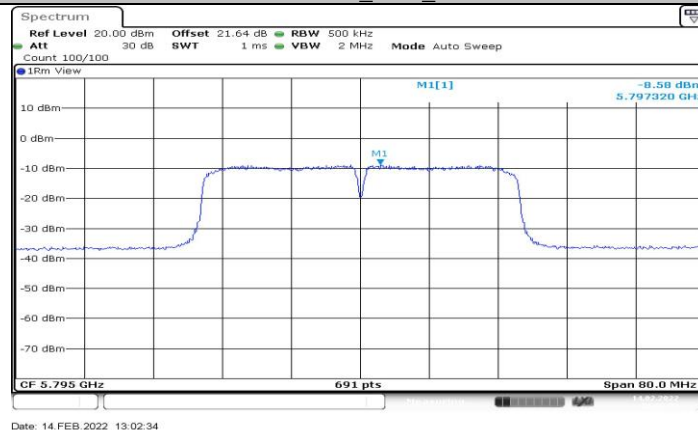


11N40SISO_Ant1_5795




11AC80SISO_Ant1_5210

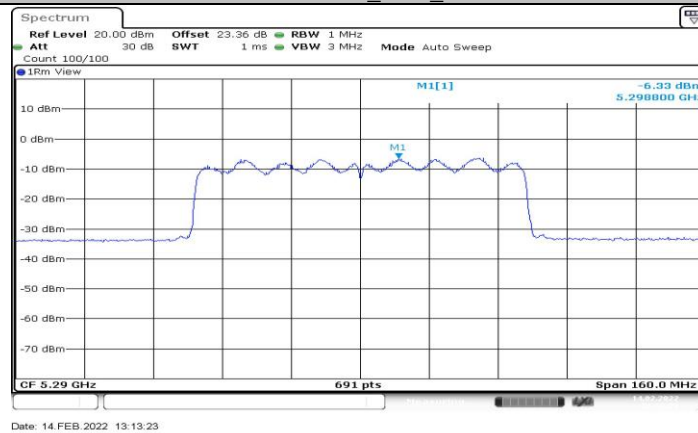


11AC80SISO_Ant1_5290

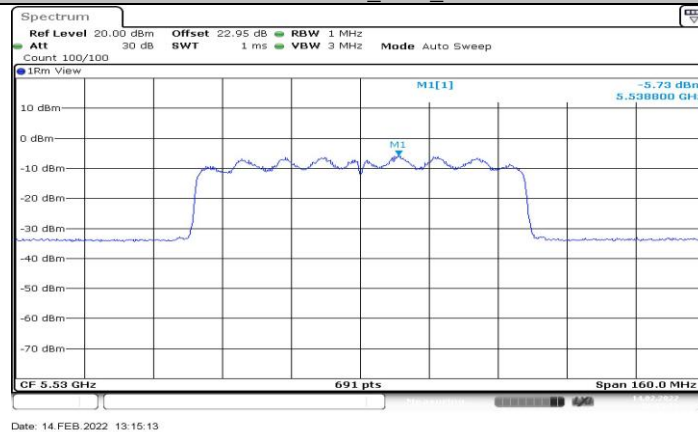


11AC80SISO_Ant1_5530

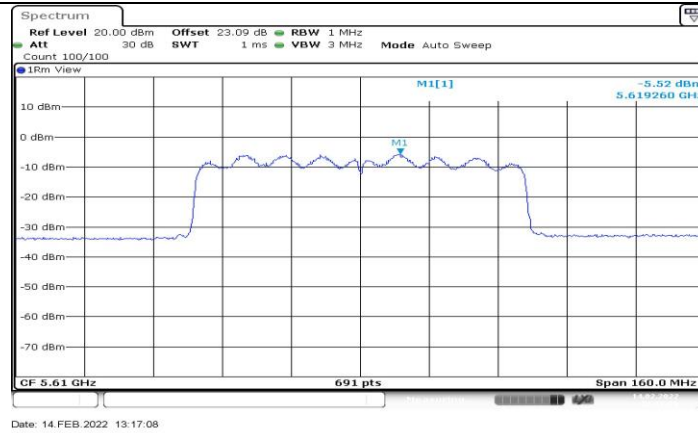

11AC80SISO_Ant1_5610

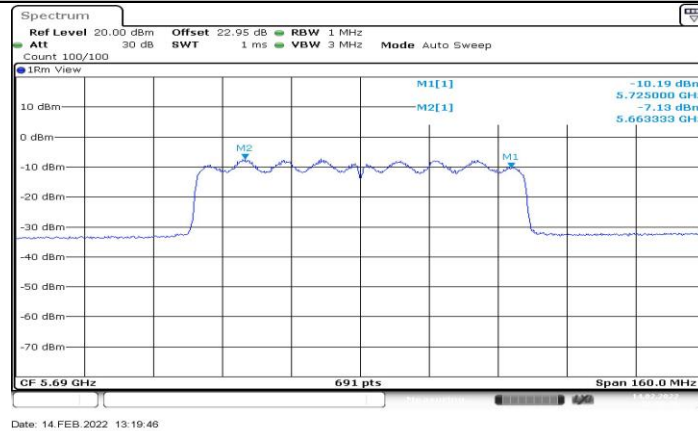

11AC80SISO_Ant1_5690_UNII-2C

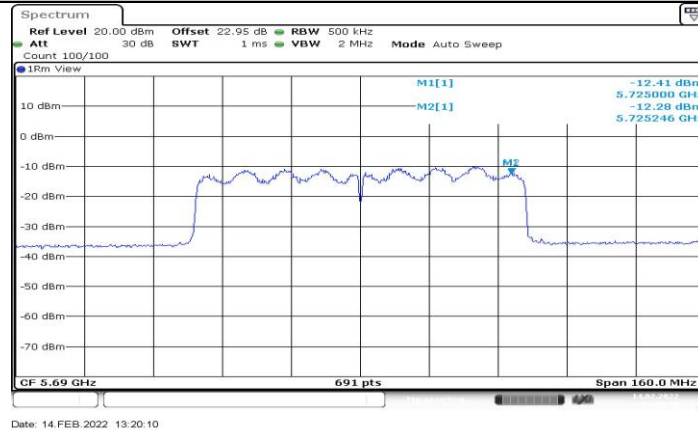

11AC80SISO_Ant1_5690_UNII-3





12.6. Appendix D: Duty Cycle

12.6.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11A	1.35	2.34	0.5769	57.69	2.39	0.74	1
11N20SISO	1.26	2.25	0.5600	56.00	2.52	0.79	1
11N40SISO	0.62	1.61	0.3851	38.51	4.14	1.61	2
11AC80SISO	0.31	1.30	0.2385	23.85	6.23	3.23	4

Note:


Duty Cycle Correction Factor= $10\log(1/x)$.


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

12.6.2. Test Graphs

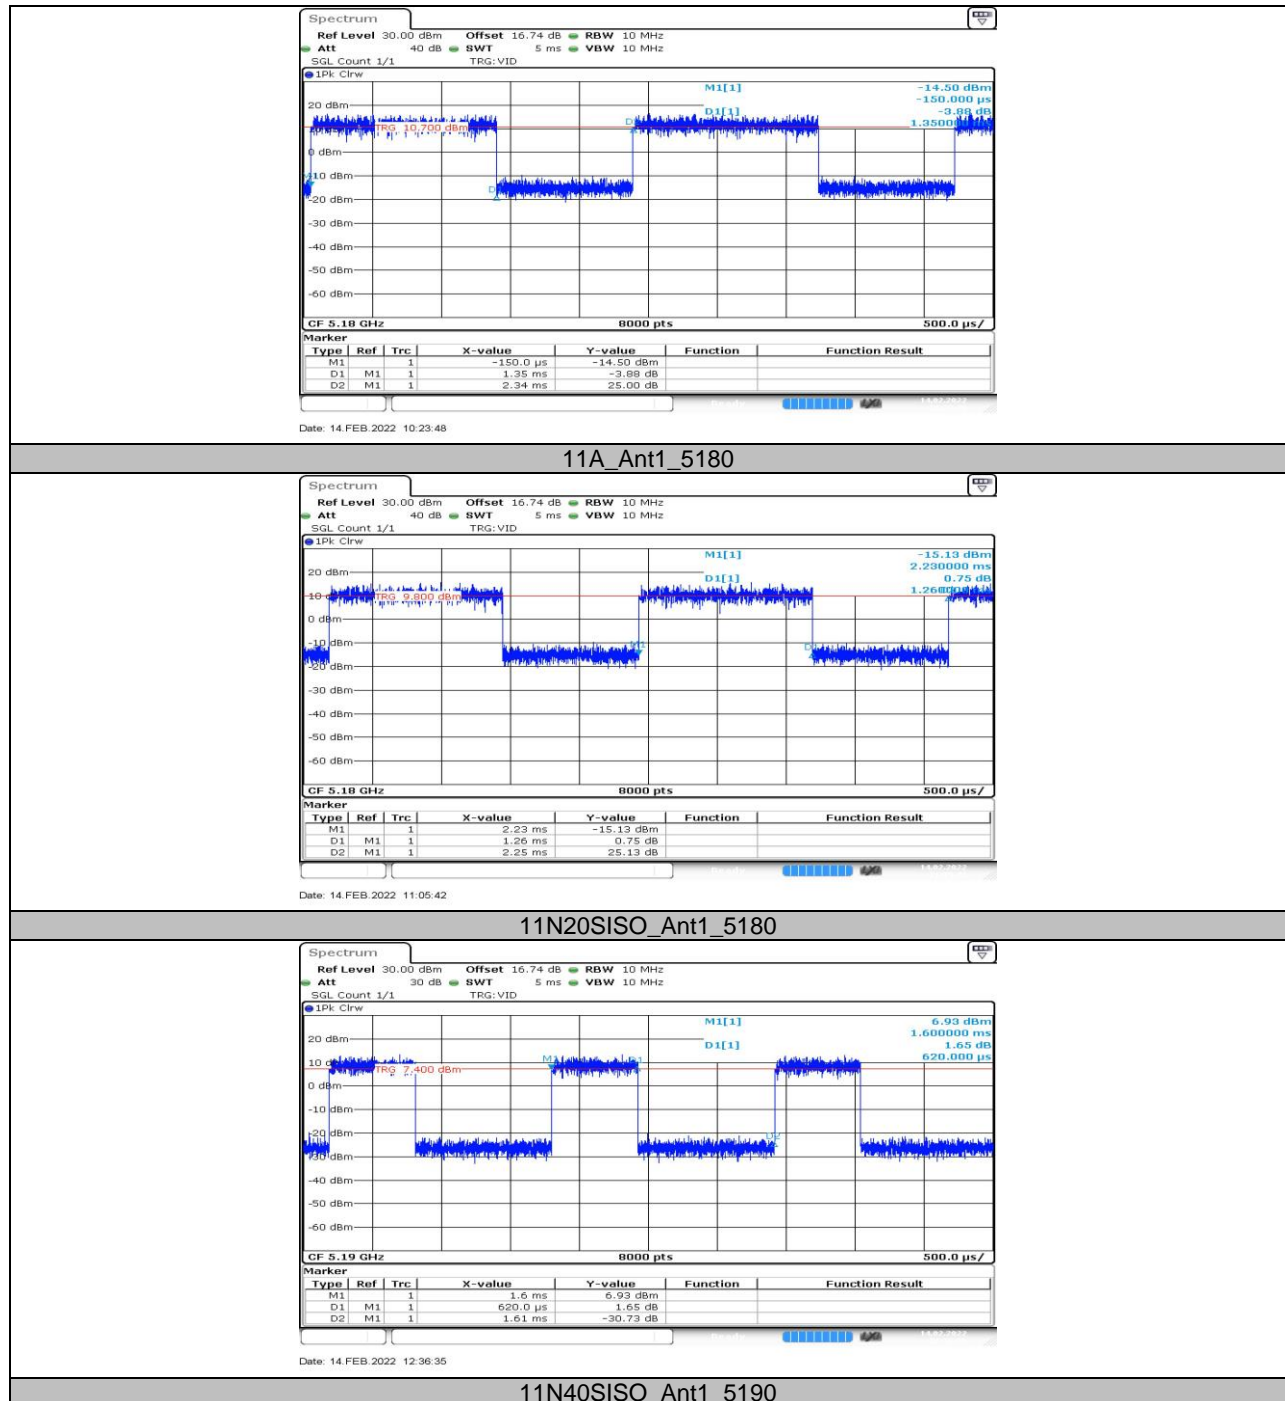

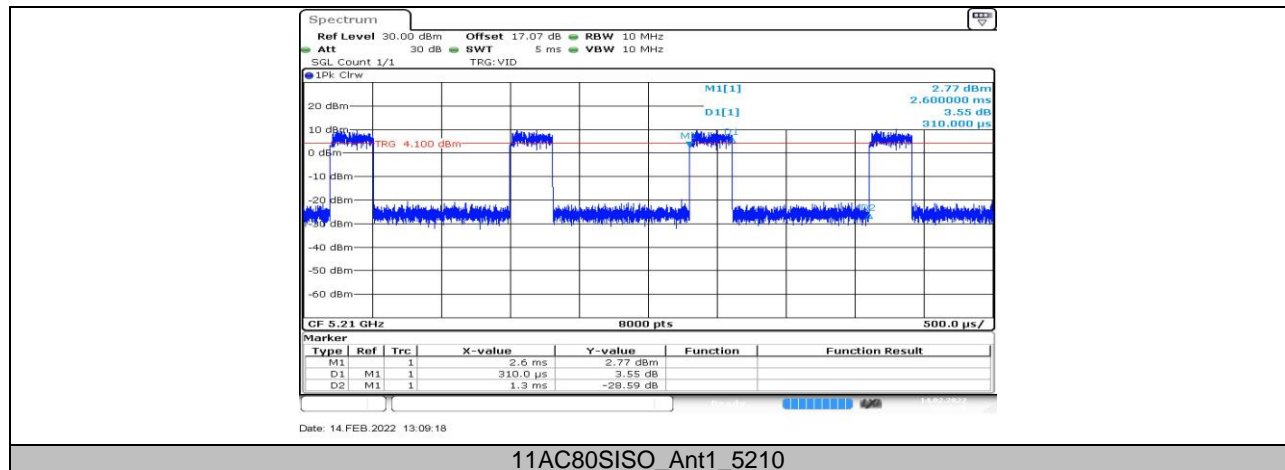




12.7. Appendix E: DFS Detection Thresholds

12.7.1. Test Result

Test Mode	Channel	Radar Type	Result	Limit[dbm]	Verdict
11AC80MIMO	5530	Type0	-62.42	-62.00	PASS

12.7.2. Test Graphs

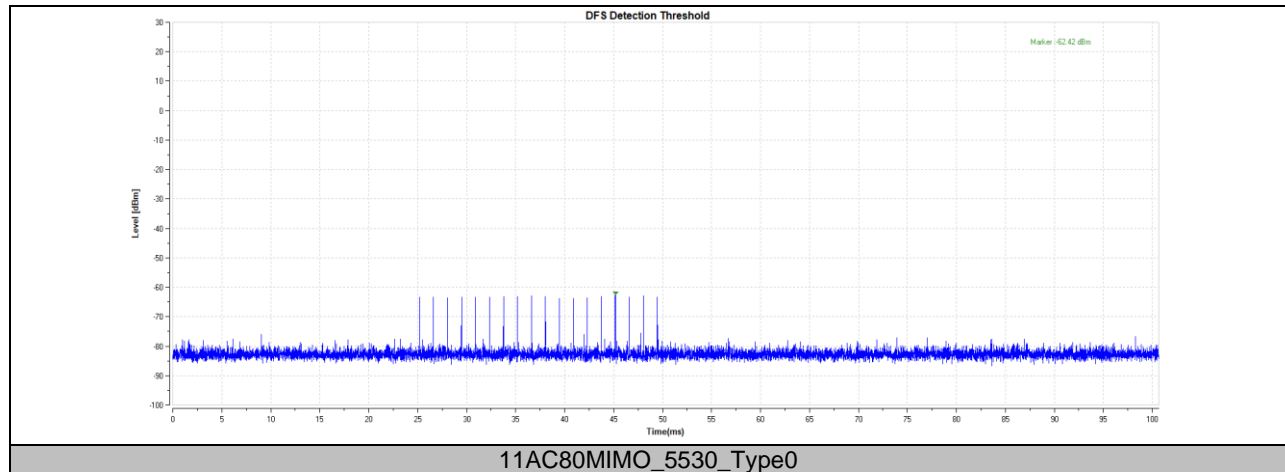




12.8. Appendix F: Channel Move Time and Channel Closing Transmission Time

12.8.1. Test Result

Test Mode	Channel	CCT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11AC80MIMO	5530	200+3.9	200+60	433.9	10000	PASS

12.8.2. Test Graphs

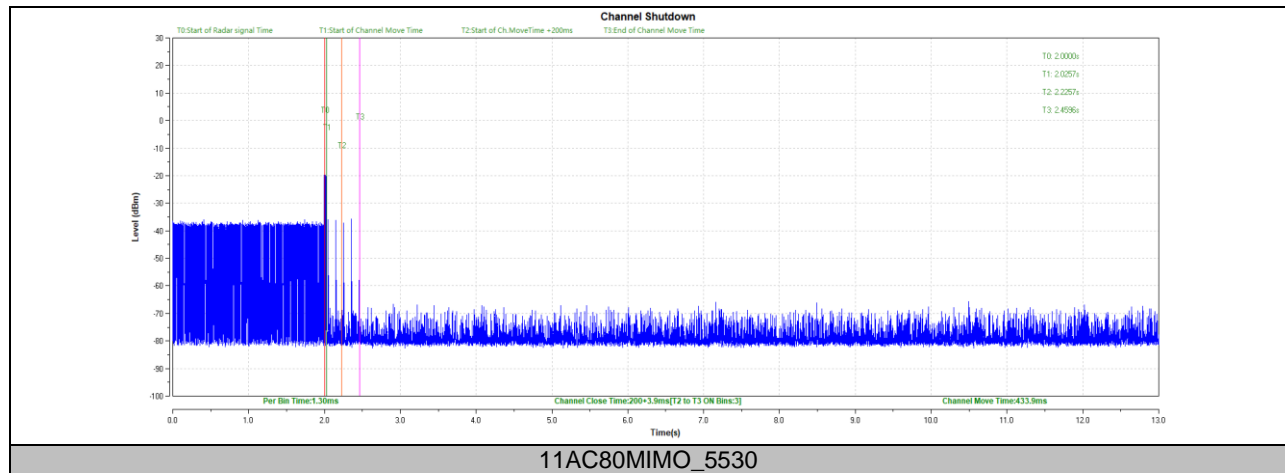




12.9. Appendix G: Non-Occupancy Period

Test Result

Test Mode	Channel	Result	Limit[s]	Verdict
11AC80MIMO	5530	see test graph	≥1800	PASS



12.9.1. Test Graphs

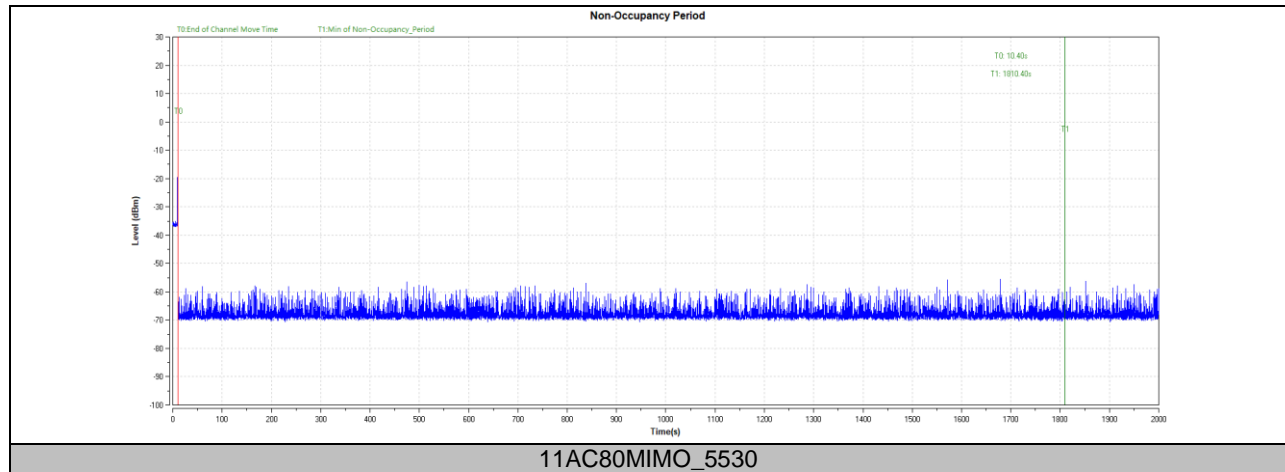

**12.10. Appendix H: Frequency Stability****12.10.1. Test Result**

Frequency Error vs. Voltage									
802.11a20:5200MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
TN	VL	5199.9901	-1.91	5199.9807	-3.71	5200.0019	0.36	5199.9817	-3.53
TN	VN	5200.0115	2.22	5199.9931	-1.32	5200.0016	0.30	5199.9874	-2.42
TN	VH	5199.9911	-1.71	5199.9902	-1.89	5200.0212	4.07	5199.9892	-2.09
Frequency Error vs. Temperature									
802.11a:5200MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
70	VN	5200.0160	3.07	5200.0223	4.29	5200.0017	0.32	5199.9898	-1.96
60	VN	5200.0106	2.04	5200.0133	2.56	5199.9909	-1.74	5199.9962	-0.73
50	VN	5199.9893	-2.06	5199.9939	-1.16	5200.0077	1.47	5199.9852	-2.85
40	VN	5200.0014	0.26	5199.9797	-3.91	5200.0107	2.05	5200.0001	0.02
30	VN	5200.0114	2.19	5200.0066	1.26	5199.9839	-3.09	5200.0192	3.68
20	VN	5199.9838	-3.12	5200.0248	4.77	5199.9963	-0.71	5199.9764	-4.55
10	VN	5200.0243	4.68	5199.9997	-0.06	5199.9959	-0.78	5200.0108	2.07
0	VN	5199.9891	-2.09	5199.9895	-2.01	5200.0214	4.11	5200.0013	0.25
-10	VN	5200.0160	3.07	5200.0223	4.29	5200.0017	0.32	5199.9898	-1.96

Note:

1. All antennas and test modes have been tested, only the worst data record in the report.
2. For the detail Test Conditions, please refer to section 10 TEST ENVIRONMENT.



Frequency Error vs. Voltage									
802.11a:5825MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
TN	VL	5824.9813	-3.20	5825.0061	1.04	5824.9906	-1.61	5825.0049	0.84
TN	VN	5824.9828	-2.96	5824.9879	-2.08	5824.9988	-0.21	5824.9798	-3.46
TN	VH	5825.0219	3.76	5824.9937	-1.08	5824.9877	-2.12	5824.9847	-2.63
Frequency Error vs. Temperature									
802.11a:5825MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
70	VN	5824.9839	-2.76	5825.0068	1.16	5824.9791	-3.59	5825.0178	3.05
60	VN	5824.9830	-2.91	5825.0147	2.52	5824.9871	-2.21	5825.0120	2.06
50	VN	5824.9974	-0.44	5824.9949	-0.88	5825.0236	4.05	5824.9918	-1.42
40	VN	5825.0080	1.38	5824.9823	-3.05	5825.0235	4.03	5824.9951	-0.84
30	VN	5824.9931	-1.19	5824.9894	-1.82	5824.9988	-0.20	5825.0035	0.61
20	VN	5824.9931	-1.18	5825.0222	3.81	5824.9818	-3.13	5824.9824	-3.03
10	VN	5824.9938	-1.06	5824.9879	-2.09	5825.0200	3.43	5825.0054	0.92
0	VN	5824.9772	-3.92	5825.0139	2.39	5824.9844	-2.67	5824.9865	-2.31
-10	VN	5824.9838	-2.79	5825.0064	1.10	5824.9868	-2.26	5825.0071	1.23

Note:

1. All antennas and test modes have been tested, only the worst data record in the report.
2. For the detail Test Conditions, please refer to section 10 TEST ENVIRONMENT.

END OF REPORT