



# **RADIO TEST REPORT**

## **FCC ID: 2ABOSSKYFUEGO40M**

**Product:** Smart phone  
**Trade Name:** SKY  
**Model No.:** Fuego 4.0M  
**Serial Model:** N/A  
**Report No.:** NTEK-2016NT11049703F2  
**Issue Date:** 11 Nov. 2016

### **Prepared for**

Sky Phone LLC  
1348 Washington Av. Suite 350, Miami Beach, Florida 33139,  
United States

### **Prepared by**

NTEK TESTING TECHNOLOGY CO., LTD.  
1/F, Building E, Fenda Science Park, Sanwei Community,  
Xixiang Street Bao'an District, Shenzhen, 518126 P.R. China  
Tel.: +86-755-6115 6588  
Fax.: +86-755-6115 6599  
Website: <http://www.ntek.org.cn>

## TABLE OF CONTENTS

<b>1</b>	<b>TEST RESULT CERTIFICATION .....</b>	<b>3</b>
<b>2</b>	<b>SUMMARY OF TEST RESULTS.....</b>	<b>4</b>
<b>3</b>	<b>FACILITIES AND ACCREDITATIONS .....</b>	<b>5</b>
3.1	FACILITIES.....	5
3.2	LABORATORY ACCREDITATIONS AND LISTINGS .....	5
3.3	MEASUREMENT UNCERTAINTY .....	5
<b>4</b>	<b>GENERAL DESCRIPTION OF EUT .....</b>	<b>7</b>
<b>5</b>	<b>DESCRIPTION OF TEST MODES .....</b>	<b>8</b>
<b>6</b>	<b>SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>10</b>
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	10
6.2	SUPPORT EQUIPMENT.....	11
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS.....	12
<b>7</b>	<b>TEST REQUIREMENTS .....</b>	<b>14</b>
7.1	CONDUCTED EMISSIONS TEST .....	14
7.2	RADIATED SPURIOUS EMISSION .....	19
7.3	6DB BANDWIDTH.....	28
7.4	20DB BANDWIDTH.....	32
7.5	DUTY CYCLE.....	36
7.6	MAXIMUM OUTPUT POWER.....	38
7.7	POWER SPECTRAL DENSITY .....	40
7.8	CONDUCTED BAND EDGE MEASUREMENT.....	44
7.9	SPURIOUS RF CONDUCTED EMISSIONS.....	50
7.10	ANTENNA APPLICATION .....	63

# 1 TEST RESULT CERTIFICATION

Applicant's name .....	Sky Phone LLC
Address .....	1348 Washington Av. Suite 350, Miami Beach, Florida 33139, United States
Manufacturer's Name .....	Shenzhen OVVI Technology CO., Ltd.
Address .....	Room 201, Block D, Number 16 LangShan Road, North of Science Technology Park
Product description	
Product name .....	Smart phone
Model and/or type reference .....	Fuego 4.0M
Serial Model .....	N/A

Measurement Procedure Used:

APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J:2016 FCC 47 CFR Part 15, Subpart C:2016 KDB 174176 D01 Line Conducted FAQ v01r01 ANSI C63.10-2013 FCC KDB 558074 D01 DTS Meas Guidance v03r05	Complied

This device described above has been tested by NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK Testing Technology Co., Ltd., this document may be altered or revised by NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : 04 Nov. 2016 ~ 11 Nov. 2016

Testing Engineer :   
(Lake Xie)

Technical Manager :   
(Jason Chen)

Authorized Signatory :   
(Sam Chen)

## 2 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C			
Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Maximum Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Emission in non-restricted Band	PASS	
15.203	Antenna Requirement	PASS	

**Remark:**

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

### 3 FACILITIES AND ACCREDITATIONS

#### 3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

#### 3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: Accredited by CNAS, 2014.09.04

The certificate is valid until 2017.09.03

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L5516.

Accredited by Industry Canada, August 29, 2012

The Certificate Registration Number is 9270A-1.

Accredited by FCC, September 06, 2013

The Certificate Registration Number is 238937.

Name of Firm : NTEK Testing Technology Co., Ltd

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

#### 3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

### Revision History

Report No.	Version	Description	Issued Date
NTEK-2016NT11049703F2	Rev.01	Initial issue of report	Nov 11, 2016

#### 4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	Smart phone
Trade Name	SKY
FCC ID	2ABOSSKYFUEGO40M
Model No.	Fuego 4.0M
Serial Model	N/A
Model Difference	N/A
Operating Frequency	2412-2462MHz for 802.11b/g/11n(HT20); 2422-2452MHz for 802.11n(HT40);
Modulation	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Number of Channels	11 channels for 802.11b/g/11n(HT20); 7 channels for 802.11n(HT40);
Antenna	PCB /1dBi
Power supply	<input checked="" type="checkbox"/> DC supply: DC 3.7V/1150mAh from Battery or DC 5V from Adapter.
	<input checked="" type="checkbox"/> Adapter supply: Model:Fuego 4.0M Input:AC 100~240V 50/60Hz 0.15A Output:DC 5V,500mA
HW Version	JY729_MB_V3
SW Version	Android 4.4

Note 1: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

## 5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.

Frequency and Channel list for 802.11b/g/n (HT20):

Channel	Frequency(MHz)
1	2412
2	2417
...	...
5	2432
6	2437
...	...
10	2457
11	2462

Note:  $f_c = 2412\text{MHz} + k \times 5\text{MHz}$   $k=0$  to 10

Frequency and Channel list for 802.11n (HT40):

Channel	Frequency(MHz)
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452

Note:  $f_c = 2422\text{MHz} + k \times 5\text{MHz}$   $k=0$  to 6

1. EUT built-in battery-powered, fully-charged battery use of the test battery




## Test Mode:

Test Items	Mode	Data Rate	Channel	Ant
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
Radiated Emissions Below 1GHz	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
Radiated Emissions Above 1GHz	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1


## 6 SETUP OF EQUIPMENT UNDER TEST

### 6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For AC Conducted Emission Mode

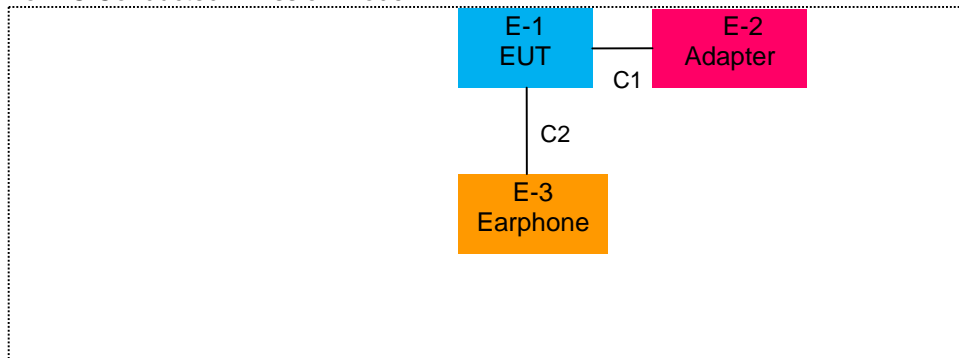

For Radiated Test Cases

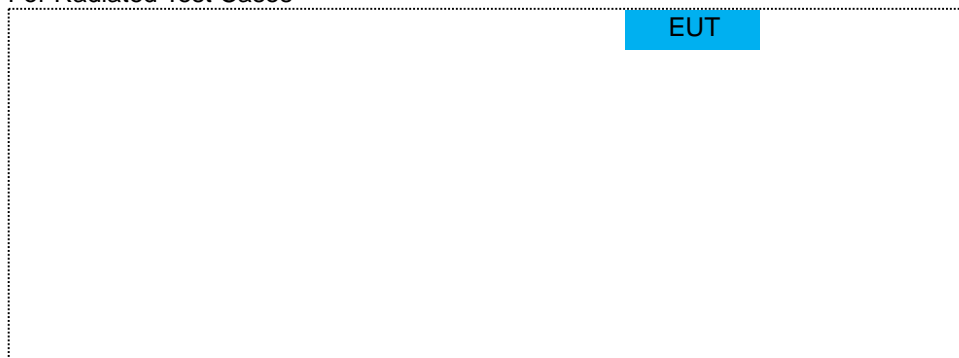

For Conducted Test Cases

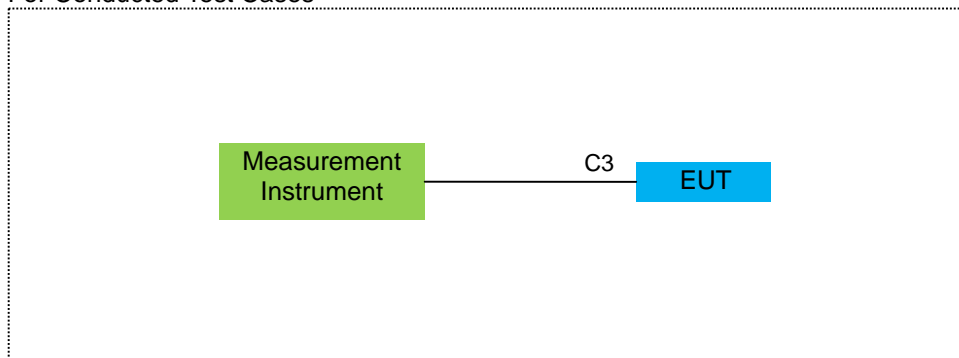

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
E-1	Smart phone	SKY	Fuego 4.0M	2ABOSSKYFUEGO 40M	EUT
E-2	Adapter	N/A	WA-10P05FU	N/A	Peripherals
E-3	Earphone	N/A	L662	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable	NO	NO	1.0m	
C-2	Earphone	YES	YES	1.0m	
C-3	RF Cable	NO	NO	0.5m	

### Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

### 6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

#### RF Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2016.07.06	2017.07.05	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2016.07.06	2017.07.05	1 year
3	EMI Test Receiver	Agilent	N9038A	MY53227146	2016.06.06	2017.06.05	1 year
4	Test Receiver	R&S	ESPI	101318	2016.06.06	2017.06.05	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2016.07.06	2017.07.05	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.06	2017.06.05	1 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2016.07.06	2017.07.05	1 year
8	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
9	Amplifier	EM	EM-30180	060538	2015.12.22	2016.12.21	1 year
10	Amplifier	MITEQ	TTA1840-35-HG	177156	2016.06.06	2017.06.05	1 year
11	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.06	2017.06.05	1 year
12	Power Meter	DARE	RPR3006W	100696	2016.07.06	2017.07.05	1 year
13	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2016.07.06	2017.07.05	1 year
14	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2016.07.06	2017.07.05	1 year
15	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2016.06.06	2017.06.05	1 year
16	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2016.06.06	2017.06.05	1 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

#### Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test  
And this temporary antenna connector is listed within the instrument list

## AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2016.06.06	2017.06.05	1 year
2	LISN	R&S	ENV216	101313	2016.08.24	2017.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2016.08.24	2017.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.06.07	2017.06.06	1 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2016.06.08	2017.06.07	1 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2016.06.08	2017.06.07	1 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2016.06.08	2017.06.07	1 year

Note: Each piece of equipment is scheduled for calibration once a year.

## 7 TEST REQUIREMENTS

### 7.1 CONDUCTED EMISSIONS TEST

#### 7.1.1 Applicable Standard

According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01

#### 7.1.2 Conformance Limit


Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. \*Decreases with the logarithm of the frequency  
2. The lower limit shall apply at the transition frequencies  
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

#### 7.1.4 Test Configuration

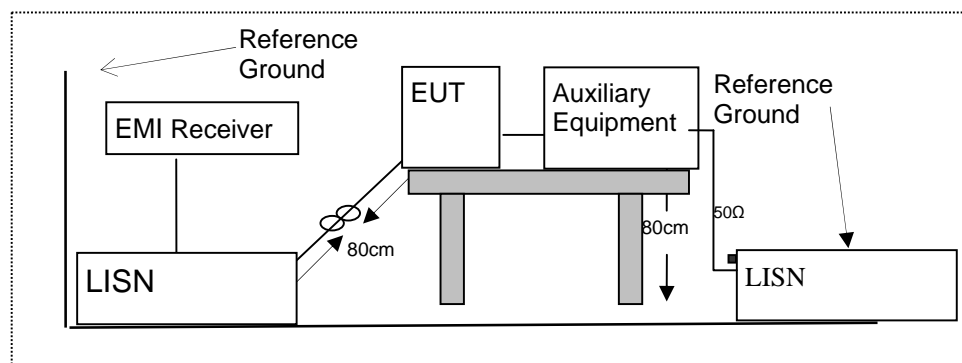

#### 7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.


### 7.1.6 Test Results

EUT:	Smart phone	Model Name. :	Fuego 4.0M
Temperature:	26 °C	Relative Humidity:	56%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 5V from adapter AC120V/60Hz	Test Mode:	Normal Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1539	40.93	10.13	51.06	65.78	-14.72	QP
0.1539	23.48	10.13	33.61	55.78	-22.17	AVG
0.1700	40.30	10.15	50.45	64.96	-14.51	QP
0.1700	23.17	10.15	33.32	54.96	-21.64	AVG
0.3420	30.39	10.04	40.43	59.15	-18.72	QP
0.3420	21.65	10.04	31.69	49.15	-17.46	AVG
0.7420	27.19	9.77	36.96	56.00	-19.04	QP
0.7420	13.34	9.77	23.11	46.00	-22.89	AVG
2.4980	31.99	9.76	41.75	56.00	-14.25	QP
2.4980	18.29	9.76	28.05	46.00	-17.95	AVG
13.3259	27.31	9.92	37.23	60.00	-22.77	QP
13.3259	11.63	9.92	21.55	50.00	-28.45	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

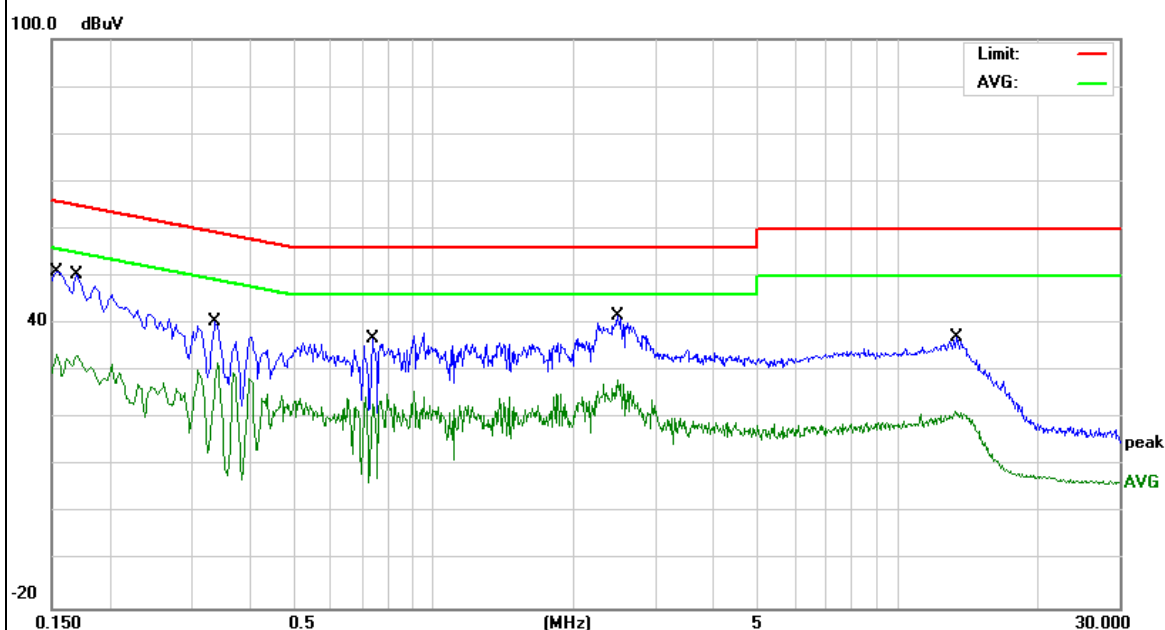


EUT:	Smart phone	Model Name. :	Fuego 4.0M
Temperature:	26 °C	Relative Humidity:	56%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 5V from adapter AC120V/60Hz	Test Mode:	Normal Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1499	39.17	10.13	49.30	66.00	-16.70	QP
0.1499	20.61	10.13	30.74	56.00	-25.26	AVG
0.1740	36.84	10.15	46.99	64.76	-17.77	QP
0.1740	21.13	10.15	31.28	54.76	-23.48	AVG
0.1980	34.46	10.17	44.63	63.69	-19.06	QP
0.1980	15.71	10.17	25.88	53.69	-27.81	AVG
0.3460	28.53	10.03	38.56	59.06	-20.50	QP
0.3460	13.66	10.03	23.69	49.06	-25.37	AVG
2.4820	25.62	9.76	35.38	56.00	-20.62	QP
2.4820	11.05	9.76	20.81	46.00	-25.19	AVG
13.7659	27.72	9.92	37.64	60.00	-22.36	QP
13.7659	10.14	9.92	20.06	50.00	-29.94	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

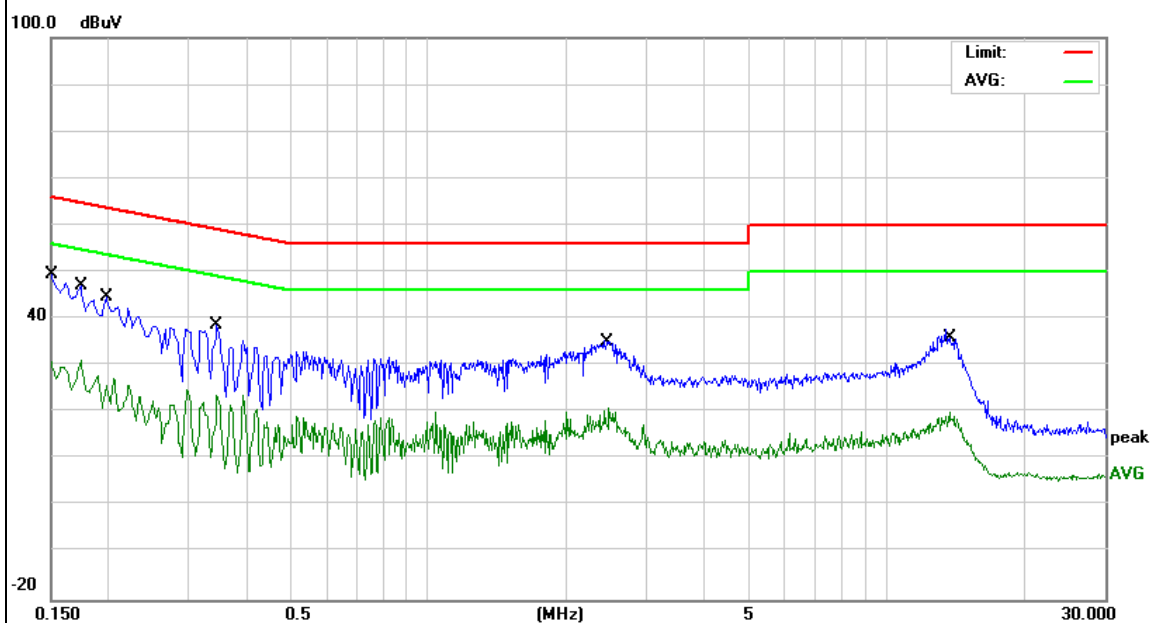




EUT:	Smart phone	Model Name. :	Fuego 4.0M
Temperature:	26 °C	Relative Humidity:	56%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 5V from adapter AC240V/60Hz	Test Mode:	Normal Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1666	44.26	10.14	54.40	65.12	-10.72	QP
0.1666	28.77	10.14	38.91	55.12	-16.21	AVG
0.1824	38.84	10.16	49.00	64.37	-15.37	QP
0.1824	23.33	10.16	33.49	54.37	-20.88	AVG
0.2540	34.96	10.14	45.10	61.62	-16.52	QP
0.2540	20.31	10.14	30.45	51.62	-21.17	AVG
0.3083	31.60	10.10	41.70	60.01	-18.31	QP
0.3083	20.40	10.10	30.50	50.01	-19.51	AVG
2.2099	33.85	9.75	43.60	56.00	-12.40	QP
2.2099	20.86	9.75	30.61	46.00	-15.39	AVG
12.9018	28.50	9.90	38.40	60.00	-21.60	QP
12.9018	14.13	9.90	24.03	50.00	-25.97	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

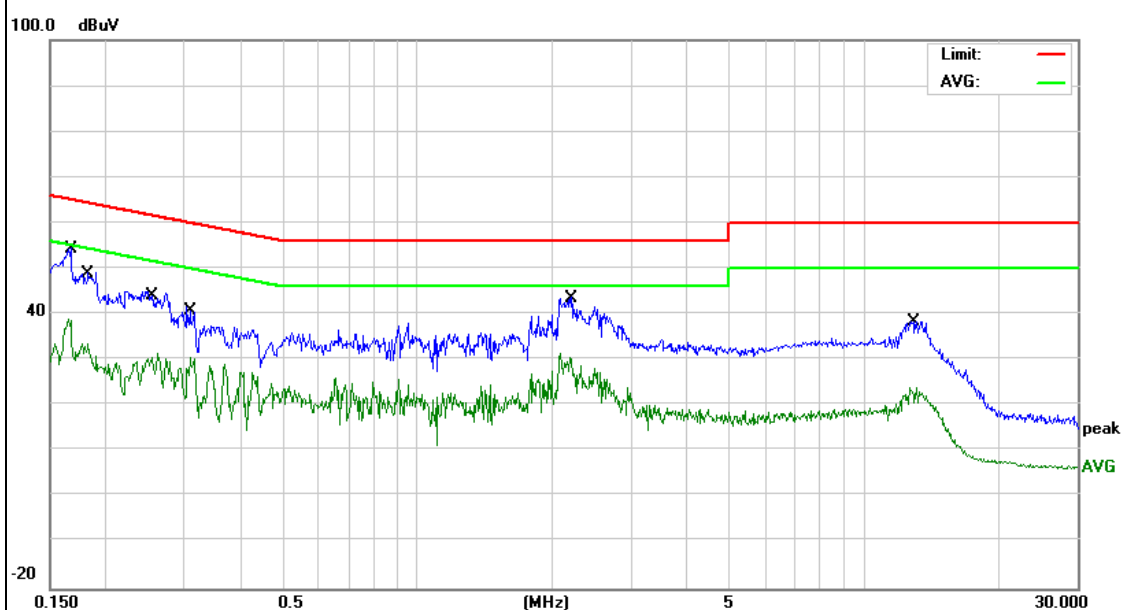


EUT:	Smart phone	Model Name. :	Fuego 4.0M
Temperature:	26 °C	Relative Humidity:	56%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 5V from adapter AC240V/60Hz	Test Mode:	Normal Link

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1524	43.17	10.13	53.30	65.86	-12.56	QP
0.1524	24.20	10.13	34.33	55.86	-21.53	AVG
0.2116	41.14	10.16	51.30	63.14	-11.84	QP
0.2116	22.54	10.16	32.70	53.14	-20.44	AVG
0.2260	38.64	10.16	48.80	62.59	-13.79	QP
0.2260	22.17	10.16	32.33	52.59	-20.26	AVG
0.2979	30.88	10.12	41.00	60.30	-19.30	QP
0.2979	14.86	10.12	24.98	50.30	-25.32	AVG
2.3460	31.04	9.76	40.80	56.00	-15.20	QP
2.3460	14.49	9.76	24.25	46.00	-21.75	AVG
12.7659	30.40	9.90	40.30	60.00	-19.70	QP
12.7659	13.34	9.90	23.24	50.00	-26.76	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

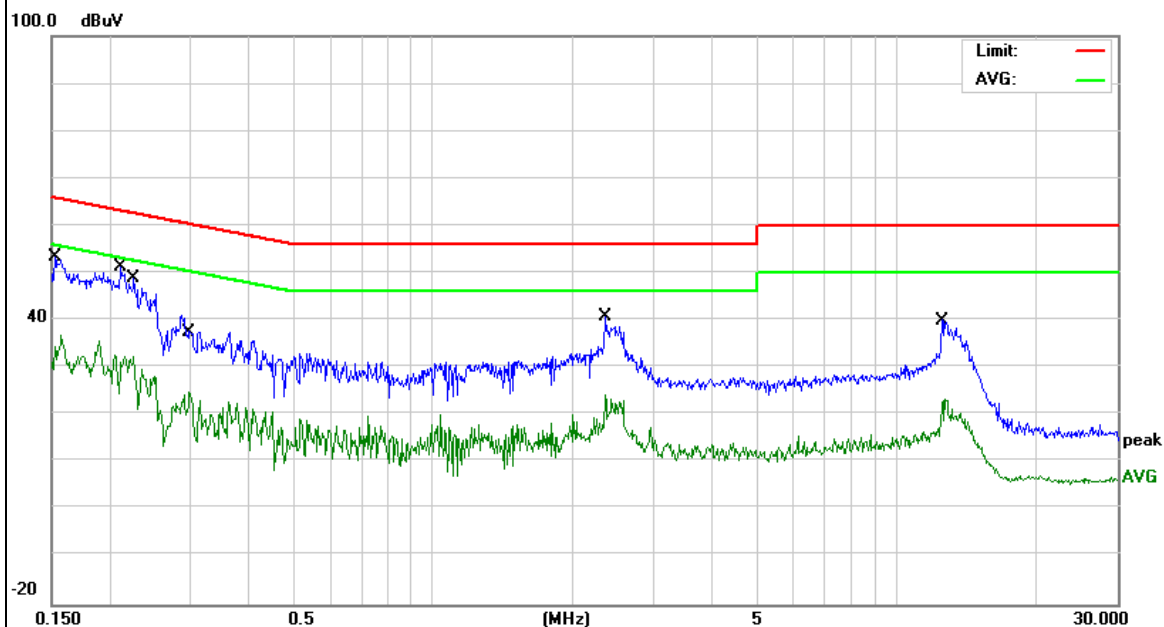

## 7.2 RADIATED SPURIOUS EMISSION

### 7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

### 7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).  
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

#### Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54


- Remark :1. Emission level in dBuV/m=20 log (uV/m)  
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.  
3. Distance extrapolation factor =40log(Specific distance/ test distance)( dB);  
Limit line=Specific limits(dBuV) + distance extrapolation factor.

### 7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

### 7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

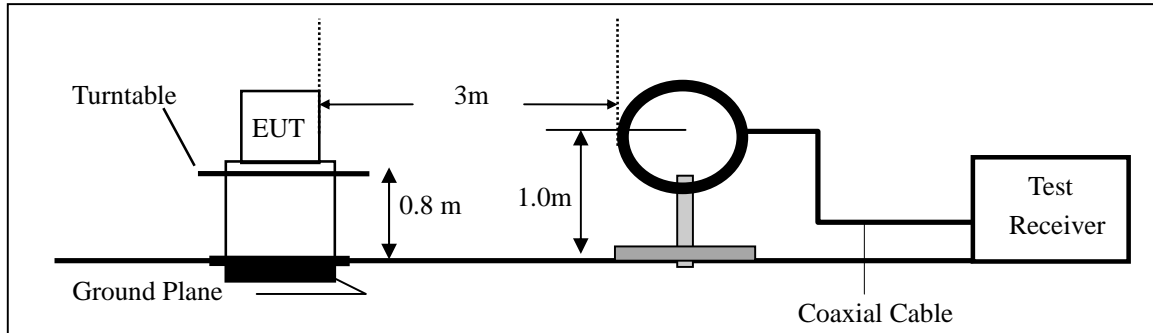

(b) For radiated emissions from 30MHz to 1000MHz

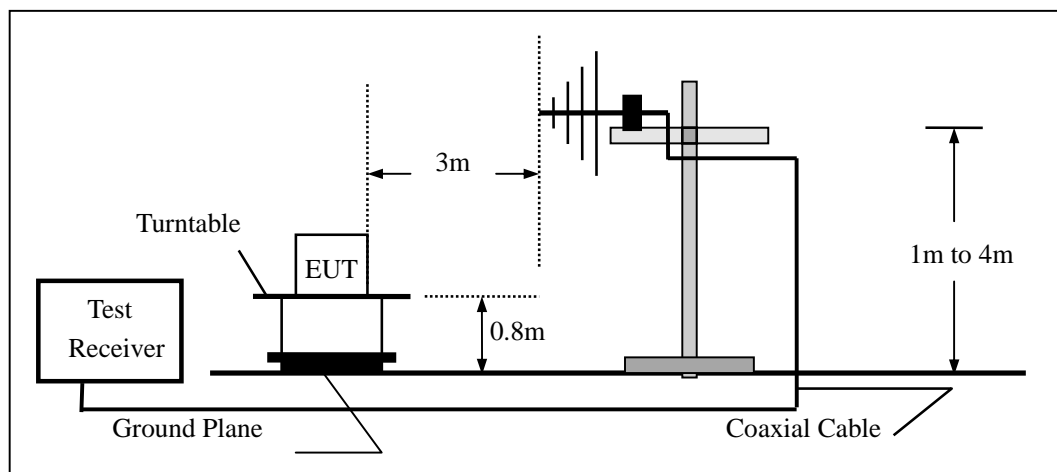

(c) For radiated emissions above 1000MHz

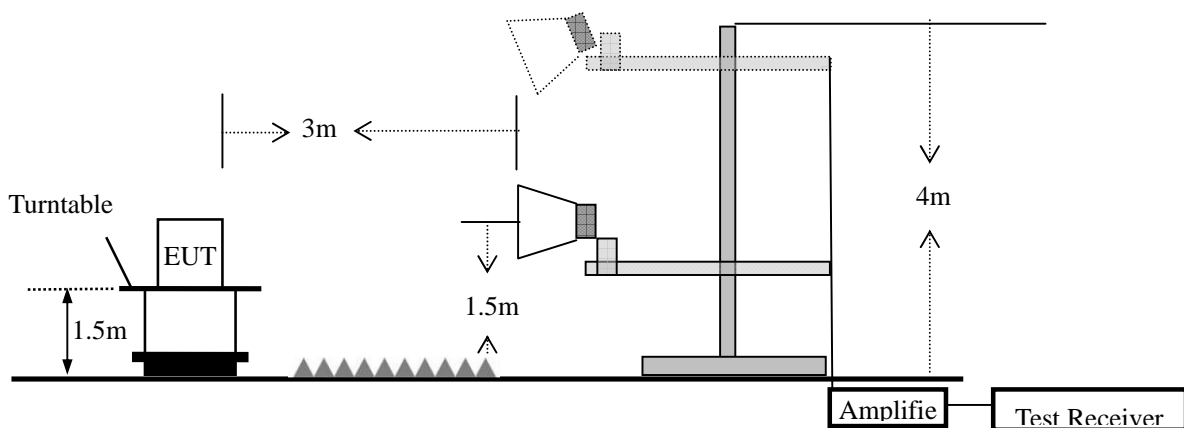

### 7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz and frequencies above 1GHz,
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

## 7.2.6 Test Results

### ■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	Smart phone	Model No.:	Fuego 4.0M
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Normal Link	Test By:	Lake Xie

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor  $= 20 \log(\text{Specific distance} / \text{test distance})$  ( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission below 1GHz (30MHz to 1GHz)


EUT:	Smart phone	Model Name :	Fuego 4.0M
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX (802.11b/g/n20/n40)		

All the modulation modes have been tested, and the worst result 802.11b-CH01 was report as below:

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	33.7986	12.24	17.86	30.10	40.00	-9.90	QP
V	37.8121	10.90	16.00	26.90	40.00	-13.10	QP
V	43.5056	12.79	12.31	25.10	40.00	-14.90	QP
V	125.4457	11.93	13.59	25.52	43.50	-17.98	QP
V	162.0414	13.41	12.05	25.46	43.50	-18.04	QP
V	576.6443	7.40	24.71	32.11	46.00	-13.89	QP

**Remark:**


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

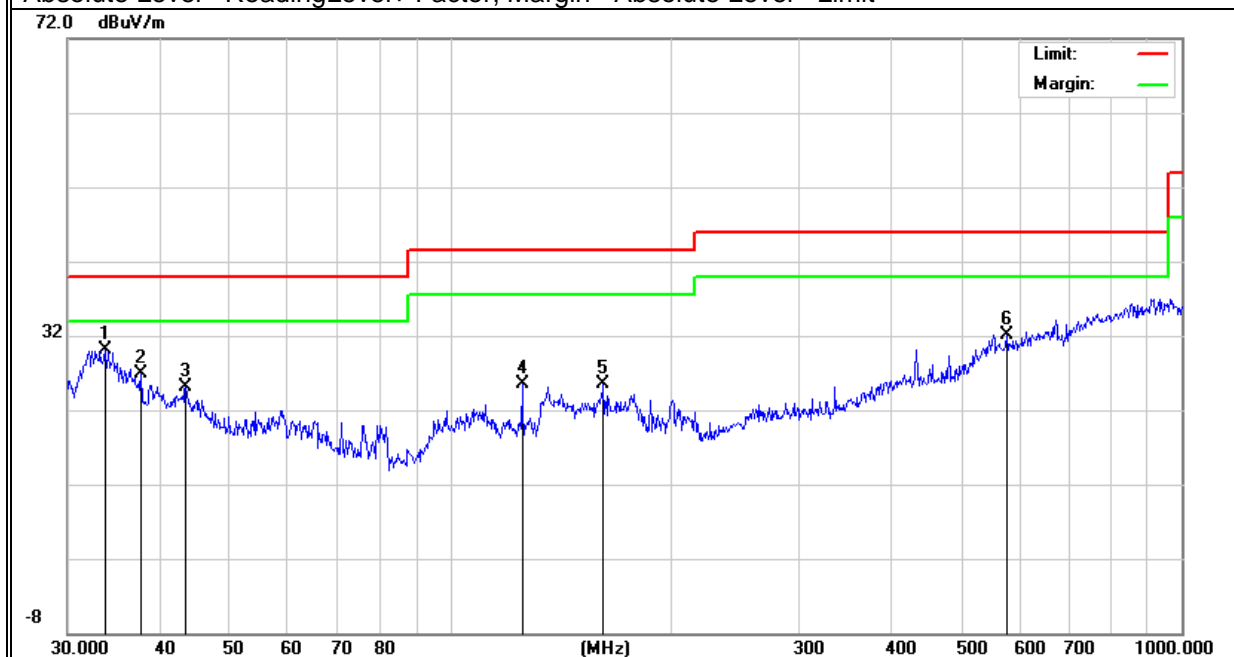

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	30.1051	6.27	19.82	26.09	40.00	-13.91	QP
H	63.7588	15.68	6.34	22.02	40.00	-17.98	QP
H	132.6850	10.33	13.24	23.57	43.50	-19.93	QP
H	336.0350	10.00	17.38	27.38	46.00	-18.62	QP
H	744.8659	7.80	27.45	35.25	46.00	-10.75	QP
H	890.7278	11.23	29.32	40.55	46.00	-5.45	QP

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

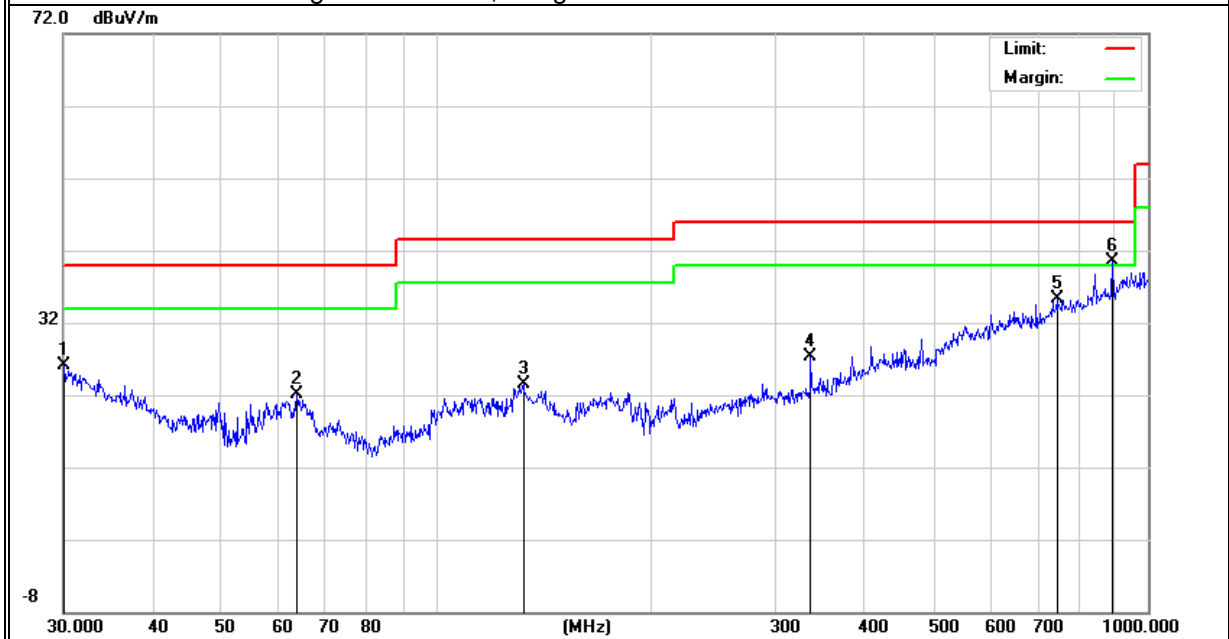



# ■ Spurious Emission Above 1GHz (1GHz to 27GHz)

EUT:	Smart phone	Model No.:	Fuego 4.0M
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	TX(802.11b/g/n20/n40)	Test By:	Lake Xie

All the modulation modes have been tested, and the worst result was report as below:

Frequency (MHz)	Read Level (dBμV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark	Comment
Low Channel (2412 MHz)(802.11b)--Above 1G									
4824	56.87	5.21	35.59	44.30	53.37	74.00	-20.62854707	Pk	Vertical
4824	43.02	5.21	35.59	44.30	39.52	54.00	-14.48096974	AV	Vertical
7236	52.40	6.48	36.27	44.60	50.55	74.00	-23.44770663	Pk	Vertical
7236	43.44	6.48	36.27	44.60	41.59	54.00	-12.41146179	AV	Vertical
4824	50.65	5.21	35.55	44.30	47.11	74.00	-26.89242106	Pk	Horizontal
4824	41.98	5.21	35.55	44.30	38.44	54.00	-15.55551469	AV	Horizontal
7236	50.94	6.48	36.27	44.52	49.17	74.00	-24.8333308	Pk	Horizontal
7236	42.56	6.48	36.27	44.52	40.79	54.00	-13.21322391	AV	Horizontal
Low Channel (2437 MHz)(802.11b)--Above 1G									
4874	54.20	5.21	35.66	44.20	50.87	74.00	-23.13	Pk	Vertical
4874	43.67	5.21	35.66	44.20	40.34	54.00	-13.66	AV	Vertical
7311	51.02	7.10	36.50	44.43	50.19	74.00	-23.81	Pk	Vertical
7311	43.71	7.10	36.50	44.43	42.88	54.00	-11.12	AV	Vertical
4874	52.69	5.21	35.66	44.20	49.36	74.00	-24.64	Pk	Horizontal
4874	43.81	5.21	35.66	44.20	40.48	54.00	-13.52	AV	Horizontal
7311	52.29	7.10	36.50	44.43	51.46	74.00	-22.54	Pk	Horizontal
7311	41.31	7.10	36.50	44.43	40.48	54.00	-13.52	AV	Horizontal
Low Channel (2462 MHz)(802.11b)--Above 1G									
4924	55.84	5.21	35.52	44.21	52.36	74.00	-21.64	Pk	Vertical
4924	43.38	5.21	35.52	44.21	39.90	54.00	-14.10	AV	Vertical
7386	52.33	7.10	36.53	44.60	51.36	74.00	-22.64	Pk	Vertical
7386	43.43	7.10	36.53	44.60	42.46	54.00	-11.54	AV	Vertical
4924	54.08	5.21	35.52	44.21	50.60	74.00	-23.40	Pk	Horizontal
4924	41.50	5.21	35.52	44.21	38.02	54.00	-15.98	AV	Horizontal
7386	50.22	7.10	36.53	44.60	49.25	74.00	-24.75	Pk	Horizontal
7386	42.16	7.10	36.53	44.60	41.19	54.00	-12.80563906	AV	Horizontal

- Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
(2) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor  
(3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.  
(4)"802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average didn't record.

■ Spurious Emission in Restricted Band 2310MHz-18000MHz the worst result was report as below:

Frequency (MHz)	Meter Reading (dBμV)	Cable Loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
802.11b									
2310	52.73	2.97	27.80	43.80	39.70	74	-34.2985	Pk	Horizontal
2310	43.06	2.97	27.80	43.80	30.03	54	-23.9741	AV	Horizontal
2310	53.97	2.97	27.80	43.80	40.94	74	-33.0567	Pk	Vertical
2310	42.69	2.97	27.80	43.80	29.66	54	-24.3438	AV	Vertical
2390	51.61	3.14	27.21	43.80	38.16	74	-35.8351	Pk	Vertical
2390	40.58	3.14	27.21	43.80	27.13	54	-26.8658	AV	Vertical
2390	53.89	3.14	27.21	43.80	40.44	74	-33.5593	Pk	Horizontal
2390	43.28	3.14	27.21	43.80	29.83	54	-24.1746	AV	Horizontal
2483.5	54.90	3.58	27.70	44.00	42.18	74	-31.8225	Pk	Vertical
2483.5	43.45	3.58	27.70	44.00	30.73	54	-23.2689	AV	Vertical
2483.5	52.54	3.58	27.70	44.00	39.82	74	-34.177	Pk	Horizontal
2483.5	40.99	3.58	27.70	44.00	28.27	54	-25.7263	AV	Horizontal
802.11g									
2310	51.83	2.97	27.80	43.80	38.80	74	-35.1977	Pk	Horizontal
2310	41.70	2.97	27.80	43.80	28.67	54	-25.3269	AV	Horizontal
2310	50.42	2.97	27.80	43.80	37.39	74	-36.6065	Pk	Vertical
2310	41.14	2.97	27.80	43.80	28.11	54	-25.8902	AV	Vertical
2390	54.59	3.14	27.21	43.80	41.14	74	-32.863	Pk	Vertical
2390	44.16	3.14	27.21	43.80	30.71	54	-23.2906	AV	Vertical
2390	51.18	3.14	27.21	43.80	37.73	74	-36.2737	Pk	Horizontal
2390	42.88	3.14	27.21	43.80	29.43	54	-24.5656	AV	Horizontal
2483.5	54.08	3.58	27.70	44.00	41.36	74	-32.6446	Pk	Vertical
2483.5	42.13	3.58	27.70	44.00	29.41	54	-24.5934	AV	Vertical
2483.5	51.94	3.58	27.70	44.00	39.22	74	-34.7835	Pk	Horizontal
2483.5	40.60	3.58	27.70	44.00	27.88	54	-26.1201	AV	Horizontal
802.11n20									
2310	54.30	2.97	27.80	43.80	41.27	74	-32.7291	Pk	Horizontal
2310	41.70	2.97	27.80	43.80	28.67	54	-25.3269	AV	Horizontal
2310	54.11	2.97	27.80	43.80	41.08	74	-32.9159	Pk	Vertical
2310	41.30	2.97	27.80	43.80	28.27	54	-25.7271	AV	Vertical
2390	52.98	3.14	27.21	43.80	39.53	74	-34.4655	Pk	Vertical
2390	41.24	3.14	27.21	43.80	27.79	54	-26.2137	AV	Vertical
2390	53.55	3.14	27.21	43.80	40.10	74	-33.9	Pk	Horizontal
2390	42.96	3.14	27.21	43.80	29.51	54	-24.4866	AV	Horizontal
2483.5	51.66	3.58	27.70	44.00	38.94	74	-35.056	Pk	Vertical
2483.5	43.31	3.58	27.70	44.00	30.59	54	-23.4144	AV	Vertical
2483.5	53.46	3.58	27.70	44.00	40.74	74	-33.2637	Pk	Horizontal
2483.5	40.40	3.58	27.70	44.00	27.68	54	-26.3157	AV	Horizontal
802.11n40									
2310	53.97	2.97	27.80	43.80	40.94	74	-33.0595	Pk	Horizontal
2310	44.59	2.97	27.80	43.80	31.56	54	-22.4367	AV	Horizontal
2310	53.77	2.97	27.80	43.80	40.74	74	-33.2553	Pk	Vertical
2310	44.17	2.97	27.80	43.80	31.14	54	-22.862	AV	Vertical
2390	51.45	3.14	27.21	43.80	38.00	74	-36	Pk	Vertical
2390	42.33	3.14	27.21	43.80	28.88	54	-25.1244	AV	Vertical
2390	51.97	3.14	27.21	43.80	38.52	74	-35.4775	Pk	Horizontal
2390	44.63	3.14	27.21	43.80	31.18	54	-22.822	AV	Horizontal
2483.5	50.17	3.58	27.70	44.00	37.45	74	-36.5539	Pk	Vertical
2483.5	44.09	3.58	27.70	44.00	31.37	54	-22.6327	AV	Vertical
2483.5	52.39	3.58	27.70	44.00	39.67	74	-34.333	Pk	Horizontal
2483.5	40.52	3.58	27.70	44.00	27.80	54	-26.2043	AV	Horizontal

(1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

Spurious Emission in Restricted Bands 3260MMHz- 18000MHz

All the modulation modes have been tested, the worst result was report as below:

Frequency (MHz)	Reading Level (dBμV)	Cable Loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
3260	63.78	4.04	29.57	44.70	52.69	74	-21.31	Pk	Vertical
3260	57.53	4.04	29.57	44.70	46.44	54	-7.56	AV	Vertical
3260	64.54	4.04	29.57	44.70	53.45	74	-20.55	Pk	Horizontal
3260	57.61	4.04	29.57	44.70	46.52	54	-7.48	AV	Horizontal
3332	64.36	4.26	29.87	44.40	54.09	74	-19.91	Pk	Vertical
3332	57.10	4.26	29.87	44.40	46.83	54	-7.17	AV	Vertical
3332	60.38	4.26	29.87	44.40	50.11	74	-23.89	Pk	Horizontal
3332	54.57	4.26	29.87	44.40	44.30	54	-9.70	AV	Horizontal
17789	60.78	10.99	43.95	43.50	72.22	74	-1.78	Pk	Vertical
17789	50.04	10.99	43.95	43.50	61.48	54	7.48	AV	Vertical
17957	58.05	11.81	43.69	44.60	68.95	74	-5.05	Pk	Horizontal
17957	52.35	11.81	43.69	44.60	63.25	54	9.25	AV	Horizontal

802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average didn't record.

### **7.3 6DB BANDWIDTH**

#### **7.3.1 Applicable Standard**

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v03r05

#### **7.3.2 Conformance Limit**

The minimum permissible 6dB bandwidth is 500 kHz.

#### **7.3.3 Measuring Instruments**

The Measuring equipment is listed in the section 6.3 of this test report.

#### **7.3.4 Test Setup**

Please refer to Section 6.1 of this test report.

#### **7.3.5 Test Procedure**

The testing follows KDB 558074 DTS 01 Meas. Guidance v03r05

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

VBW  $\geq$  3\*RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 7.3.6 Test Results

EUT:	Smart phone	Model No.:	Fuego 4.0M
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	TX 802.11b/g/n(20/40M)	Test By:	Lake Xie


Mode	Channel	Frequency (MHz)	6dB bandwidth	Limit (kHz)	Result
			(MHz)		
802.11b	Low	2412	10.10	500	Pass
	Middle	2437	10.10	500	Pass
	High	2462	10.07	500	Pass
802.11g	Low	2412	16.38	500	Pass
	Middle	2437	16.39	500	Pass
	High	2462	16.37	500	Pass
802.11n20	Low	2412	17.61	500	Pass
	Middle	2437	17.62	500	Pass
	High	2462	17.61	500	Pass
802.11n40	Low	2422	36.33	500	Pass
	Middle	2437	36.33	500	Pass
	High	2452	36.33	500	Pass

### Test plot


(802.11b) 6dB Bandwidth plot on channel 1




(802.11g) 6dB Bandwidth plot on channel 1

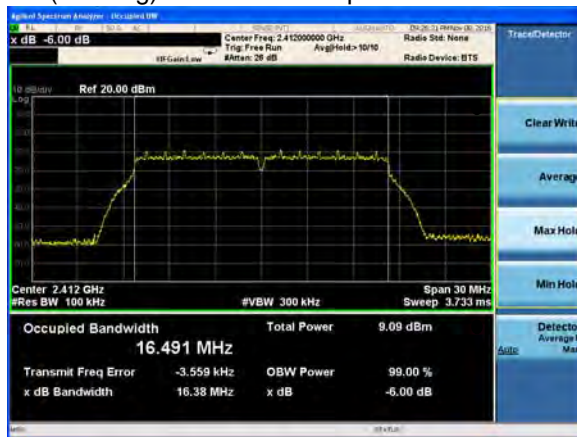

(802.11b) 6dB Bandwidth plot on channel 6

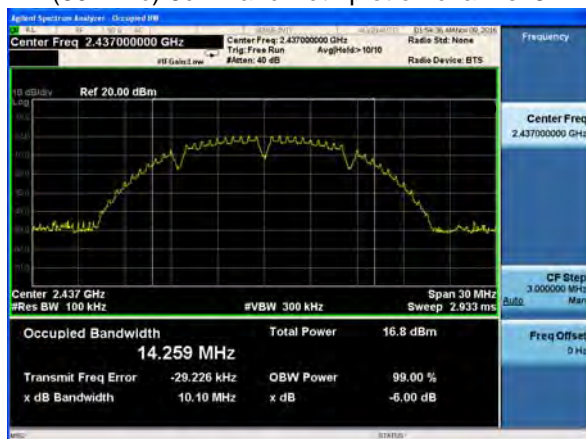


(802.11g) 6dB Bandwidth plot on channel 6

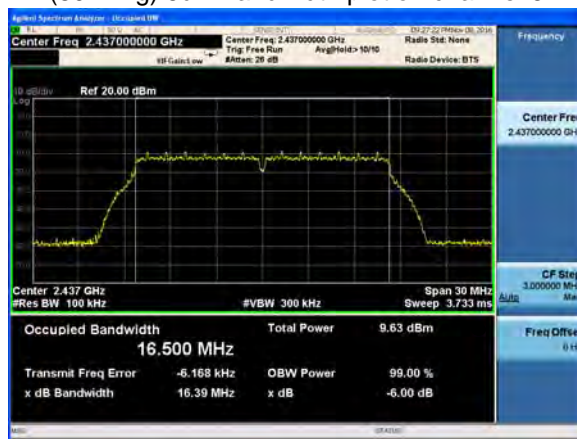

(802.11b) 6dB Bandwidth plot on channel 11




(802.11g) 6dB Bandwidth plot on channel 11

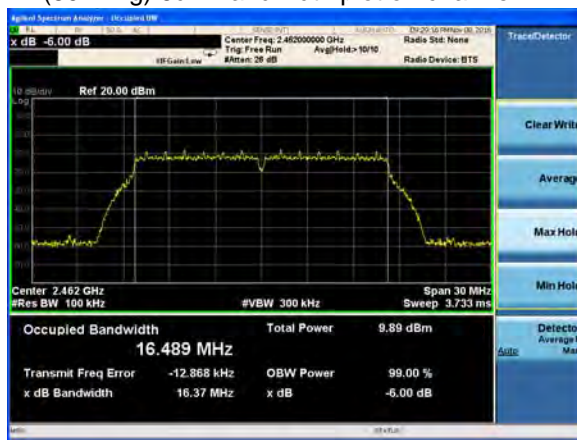




### Test plot


(802.11n20) 6dB Bandwidth plot on channel 1

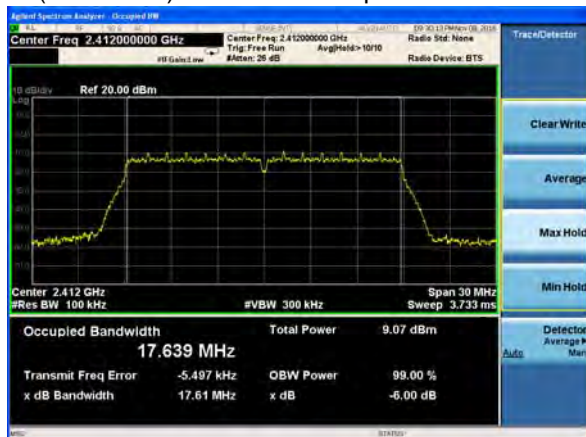


(802.11n40) 6dB Bandwidth plot on channel 3

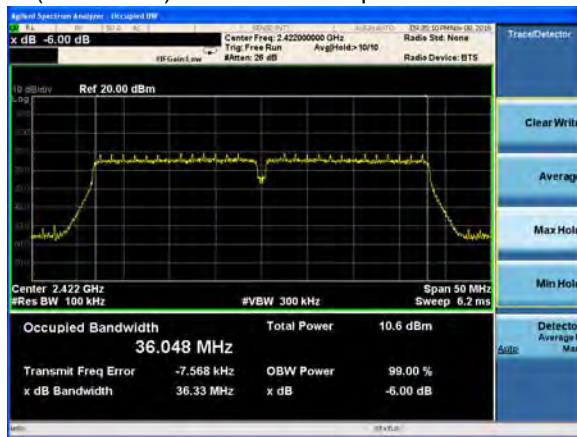


(802.11n20) 6dB Bandwidth plot on channel 6

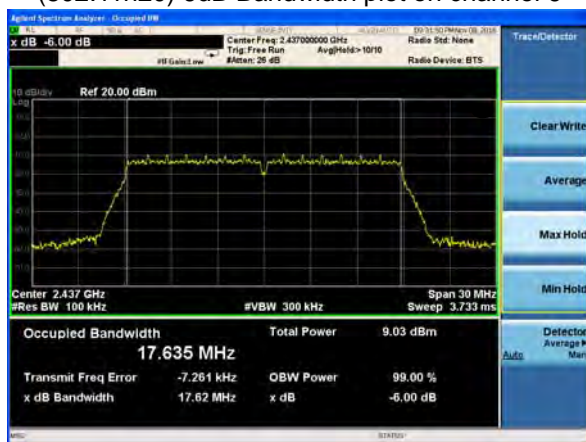


(802.11n40) 6dB Bandwidth plot on channel 6

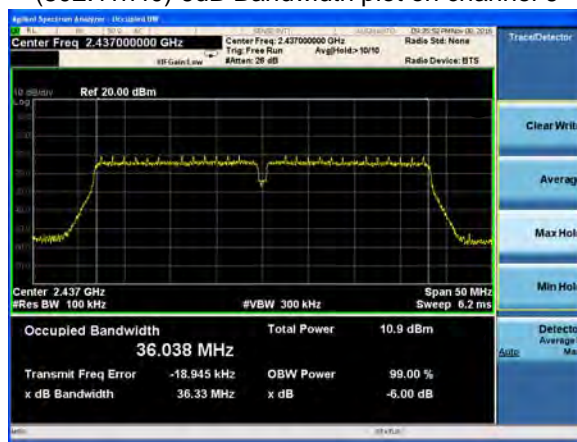

(802.11n20) 6dB Bandwidth plot on channel 11

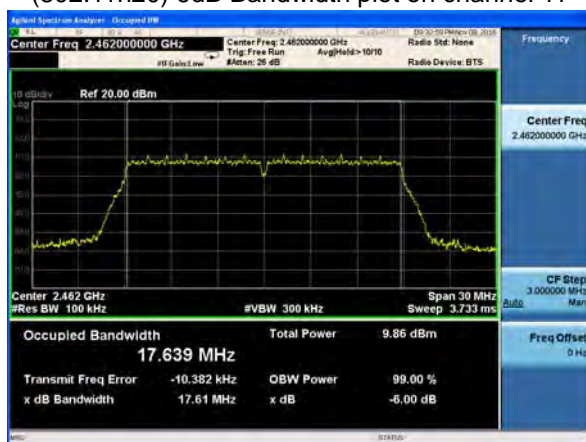

(802.11n40) 6dB Bandwidth plot on channel 9

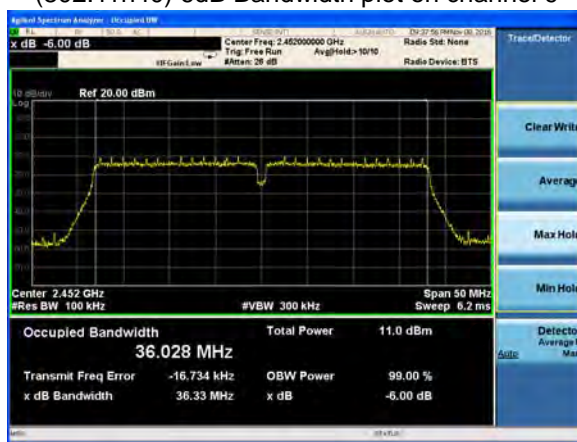

## **7.4 20DB BANDWIDTH**

### **7.4.1 Applicable Standard**

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v03r05

### **7.4.2 Conformance Limit**

N/A

### **7.4.3 Measuring Instruments**

The Measuring equipment is listed in the section 6.3 of this test report.

### **7.4.4 Test Setup**

Please refer to Section 6.1 of this test report.

### **7.4.5 Test Procedure**

The testing follows KDB 558074 DTS 01 Meas. Guidance v03r05

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

VBW  $\geq$  3\*RBW

Sweep = auto

Detector function = peak

Trace = max hold




#### 7.4.6 Test Results

EUT:	Smart phone	Model No.:	Fuego 4.0M
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	TX 802.11b/g/n(20/40M)	Test By:	Lake Xie


Mode	Channel	Frequency (MHz)	-20dB bandwidth	Result
			(MHz)	
802.11b	Low	2412	16.15	Pass
	Middle	2437	16.15	Pass
	High	2462	16.12	Pass
802.11g	Low	2412	18.10	Pass
	Middle	2437	18.10	Pass
	High	2462	18.10	Pass
802.11n20	Low	2412	18.81	Pass
	Middle	2437	18.82	Pass
	High	2462	18.82	Pass
802.11n40	Low	2422	37.46	Pass
	Middle	2437	37.22	Pass
	High	2452	37.56	Pass

### Test plot


(802.11b) -20dB Bandwidth plot on channel 1

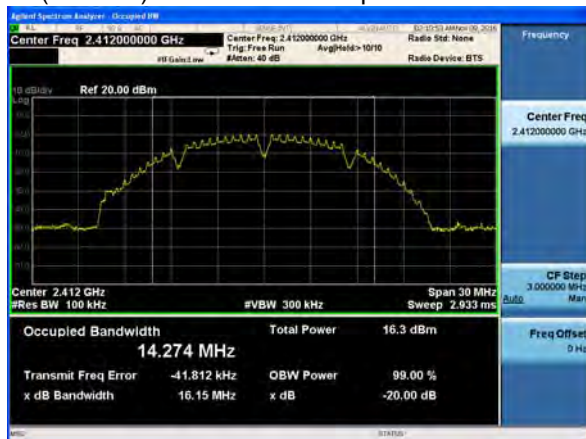


(802.11g) -20dB Bandwidth plot on channel 1

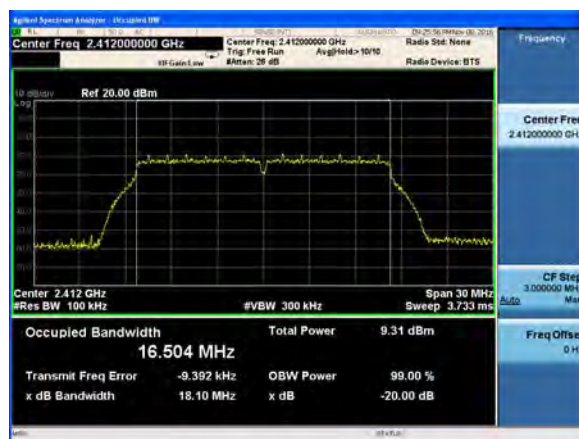

(802.11b) -20dB Bandwidth plot on channel 6

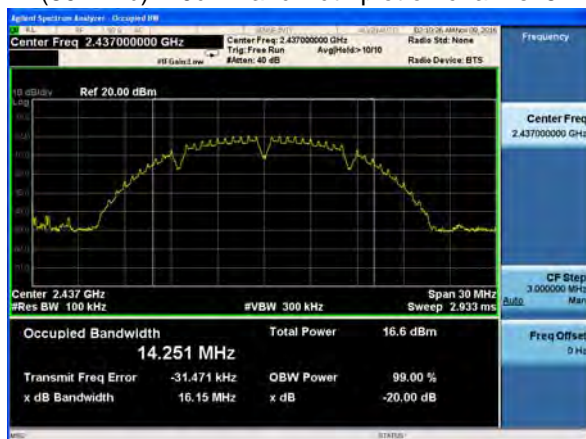


(802.11g) -20dB Bandwidth plot on channel 6

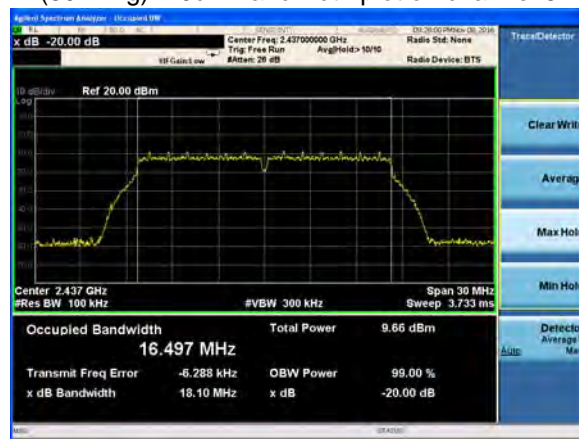

(802.11b) -20dB Bandwidth plot on channel 11




(802.11g) -20dB Bandwidth plot on channel 11

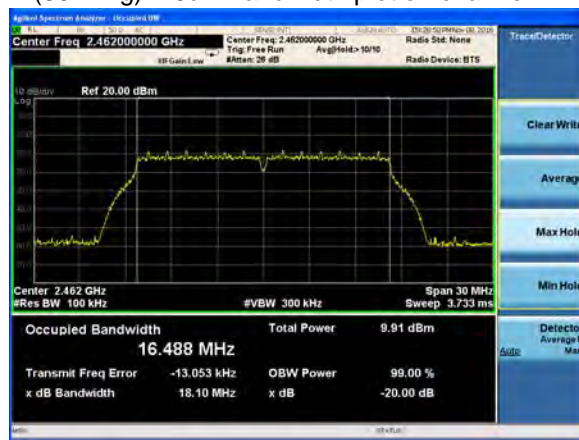


### Test plot


(802.11n20) -20dB Bandwidth plot on channel 1

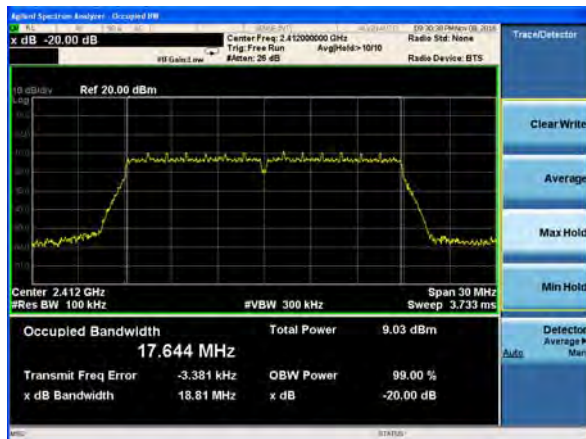

(802.11n40) -20dB Bandwidth plot on channel 3

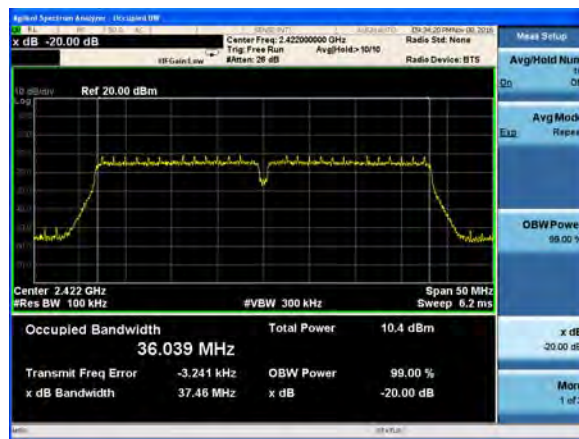


(802.11n20) -20dB Bandwidth plot on channel 6

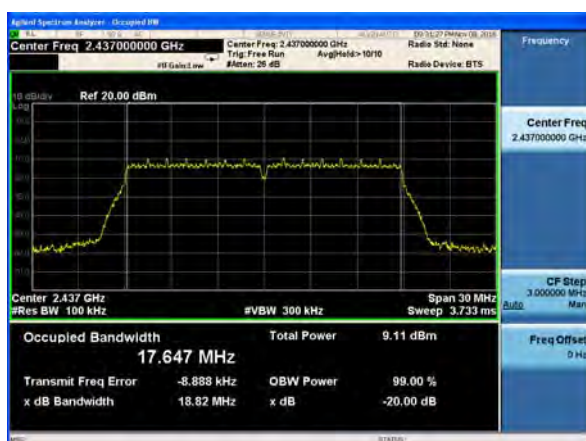


(802.11n40) -20dB Bandwidth plot on channel 6



(802.11n20) -20dB Bandwidth plot on channel 11

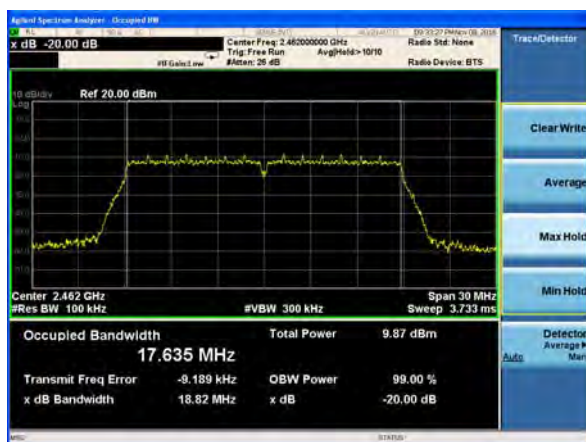

(802.11n40) -20dB Bandwidth plot on channel 9

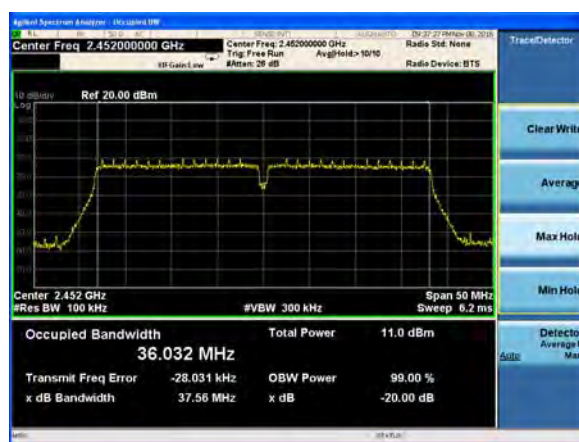



## 7.5 DUTY CYCLE

### 7.5.1 Applicable Standard

According to KDB 558074)6)b), issued 06/09/2015

### 7.5.2 Conformance Limit

No limit requirement.

### 7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

### 7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

### 7.5.5 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value. Set  $VBW \geq RBW$ . Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074(issued 06/09/2015)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

RBW = 8MHz(the largest available value)

VBW = 8MHz ( $\geq RBW$ )

Number of points in Sweep  $> 100$

Detector function = peak

Trace = Clear write

Measure  $T_{total}$  and  $T_{on}$

Calculate Duty Cycle =  $T_{on} / T_{total}$  and Duty Cycle Factor =  $10 \cdot \log(1/\text{Duty Cycle})$

### 7.5.6 Test Results

EUT:	Smart phone	Model No.:	Fuego 4.0M
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	TX 802.11b/g/n(20/40M)	Test By:	Lake Xie

#### Test Results

Mode	Data rate	Channel	T <sub>on</sub>	T <sub>total</sub>	Duty Cycle %	Duty Cycle Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1Mbps	6	10	10	100	0.00	0.01
802.11g	6Mbps	6	10	10	100	0.00	0.01
802.11n HT20	MCS0	6	10	10	100	0.00	0.01
802.11n HT40	MCS0	6	10	10	100	0.00	0.01

## 7.6 MAXIMUM OUTPUT POWER

### 7.6.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 DTS 01 Meas. Guidance v03r05

### 7.6.2 Conformance Limit


The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 7.6.3 Measuring Instruments

The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

### 7.6.4 Test Setup

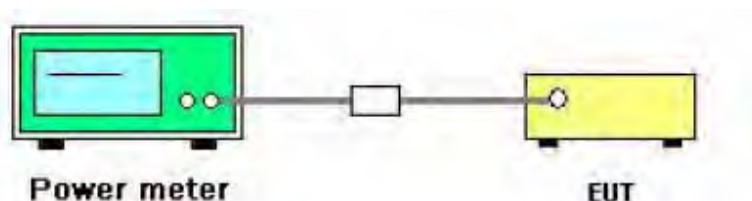

### 7.6.5 Test Procedure

1. Test procedures refer KDB 558074 D01 v03r05 section 9.2.3.2 Measurement using a power meter (PM).
2. Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

### 7.6.6 EUT operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 7.6.7 Test Results

EUT:	Smart phone	Model No.:	Fuego 4.0M
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	TX 802.11b/g/n(20/40M)	Test By:	Lake Xie

Mode	Channel	Frequency (MHz)	Conducted Output Power	Limit (dBm)	Result
			(dBm)		
802.11b	Low	2412	13.03	30.00	Pass
	Middle	2437	12.68	30.00	Pass
	High	2462	13.20	30.00	Pass
802.11g	Low	2412	9.81	30.00	Pass
	Middle	2437	10.02	30.00	Pass
	High	2462	10.49	30.00	Pass
802.11n20	Low	2412	9.81	30.00	Pass
	Middle	2437	10.02	30.00	Pass
	High	2462	10.58	30.00	Pass
802.11n40	Low	2422	11.93	30.00	Pass
	Middle	2437	11.68	30.00	Pass
	High	2452	11.82	30.00	Pass

## 7.7 POWER SPECTRAL DENSITY

### 7.7.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 DTS 01 Meas. Guidance v03r05

### 7.7.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

### 7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

### 7.7.5 Test Procedure

The testing follows Measurement Procedure 10.3 Method AVGPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05

This procedure may be used when the maximum (average) conducted output power was used to demonstrate compliance to the output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has an RMS power averaging detector, it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously (duty cycle  $\geq 98\%$ ); otherwise sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter off time is to be considered).

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

a) Set instrument center frequency to DTS channel center frequency.

b) Set span to at least 1.5 times the OBW.

c) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .

d) Set VBW  $\geq 3 \times \text{RBW}$ .

e) Detector = power averaging (RMS) or sample detector (when RMS not available).

f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .

g) Sweep time = auto couple.

h) Employ trace averaging (RMS) mode over a minimum of 100 traces.

i) Use the peak marker function to determine the maximum amplitude level.

j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducin



### 7.7.6 Test Results

EUT:	Smart phone	Model No.:	Fuego 4.0M
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	TX 802.11b/g/n(20/40M)	Test By:	Lake Xie


Mode	Channel	Frequency (MHz)	Power Density	Limit (dBm/3KHz)	Result
			(dBm/3KHz)		
802.11b	Low	2412	-15.752	8.00	Pass
	Middle	2437	-14.781	8.00	Pass
	High	2462	-15.983	8.00	Pass
802.11g	Low	2412	-22.882	8.00	Pass
	Middle	2437	-23.282	8.00	Pass
	High	2462	-23.083	8.00	Pass
802.11n20	Low	2412	-23.869	8.00	Pass
	Middle	2437	-22.921	8.00	Pass
	High	2462	-23.270	8.00	Pass
802.11n40	Low	2422	-24.992	8.00	Pass
	Middle	2437	-25.513	8.00	Pass
	High	2452	-25.928	8.00	Pass

### Test plot


(802.11b) PSD plot on channel 1




(802.11g) PSD plot on channel 1

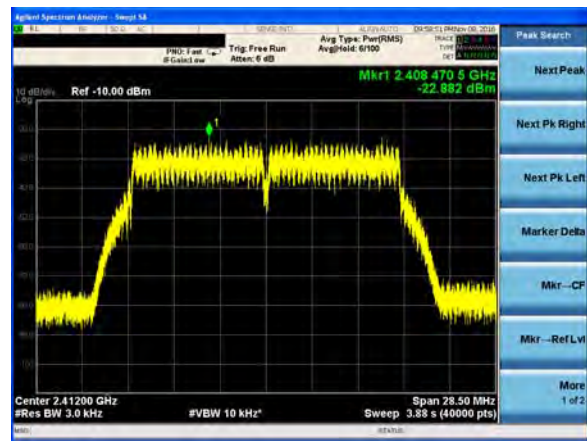


(802.11b) PSD plot on channel 6

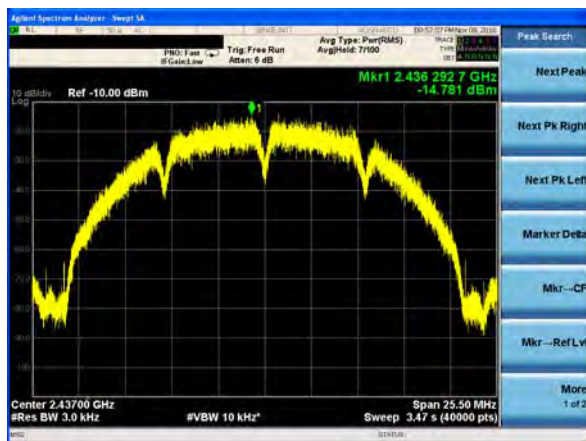


(802.11g) PSD plot on channel 6

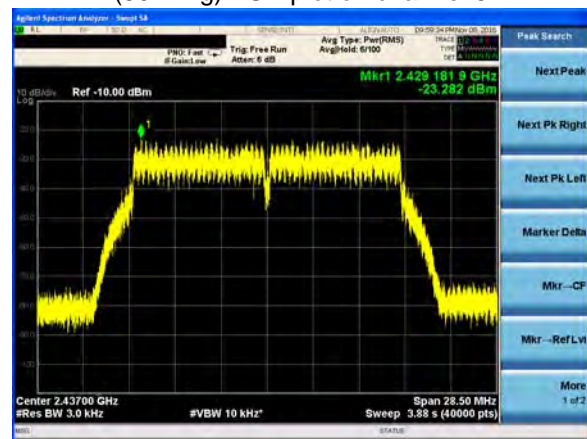

(802.11b) PSD plot on channel 11

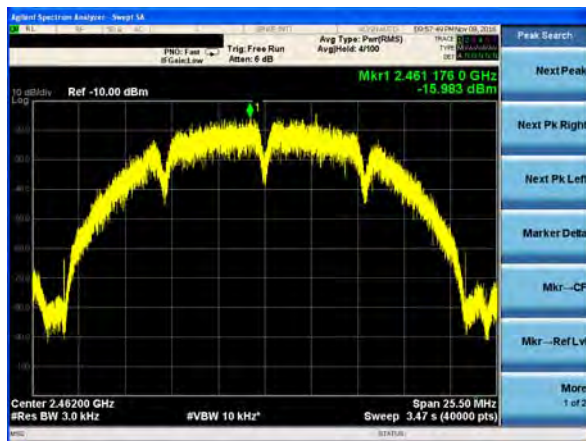


(802.11g) PSD plot on channel 11

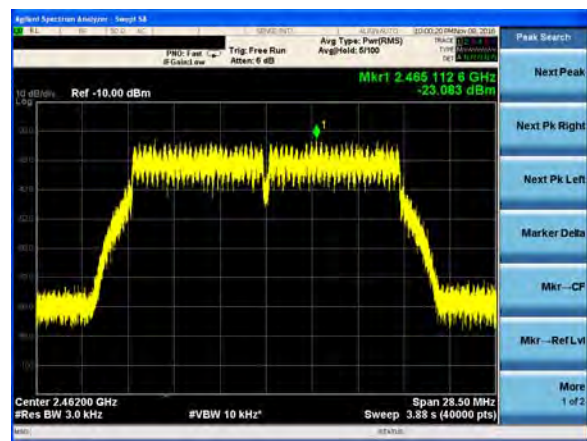


### Test plot


(802.11n20) PSD plot on channel 1

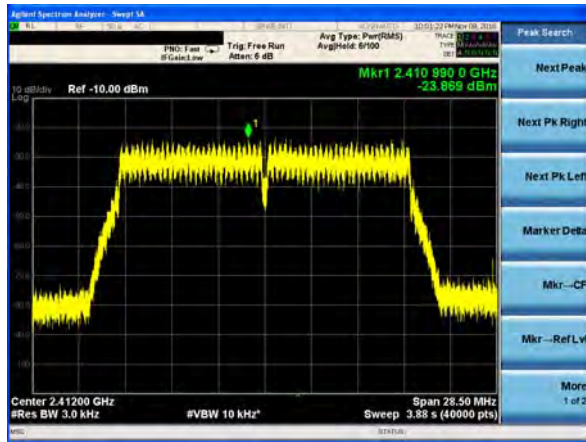


(802.11n40) PSD plot on channel 3

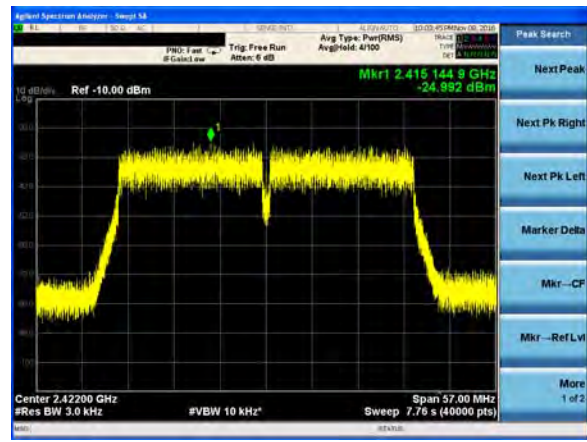


(802.11n20) PSD plot on channel 6

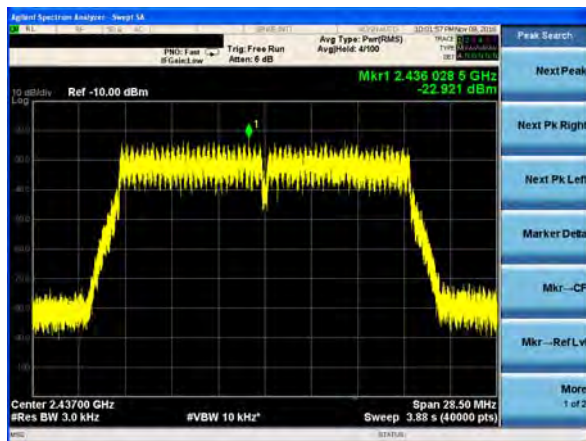


(802.11n40) PSD plot on channel 6

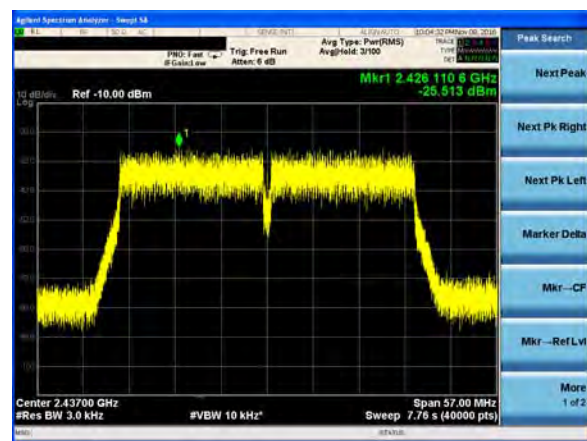

(802.11n20) PSD plot on channel 11

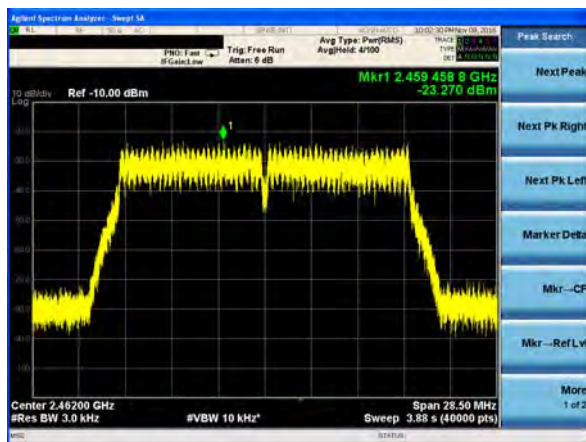

(802.11n40) PSD plot on channel 9

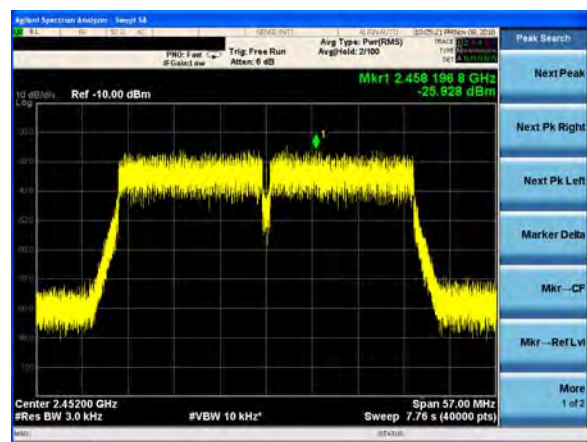

## **7.8 CONDUCTED BAND EDGE MEASUREMENT**

### **7.8.1 Applicable Standard**

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v03r05

### **7.8.2 Conformance Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### **7.8.3 Measuring Instruments**

The Measuring equipment is listed in the section 6.3 of this test report.

### **7.8.4 Test Setup**

Please refer to Section 6.1 of this test report.

### **7.8.5 Test Procedure**

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.


Repeat above procedures until all measured frequencies were complete.



**7.8.6 Test Results**

EUT:	Smart phone	Model No.:	One Ultra
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4/Mode5	Test By:	Lake Xie


### 802.11b: Band Edge-Low Channel

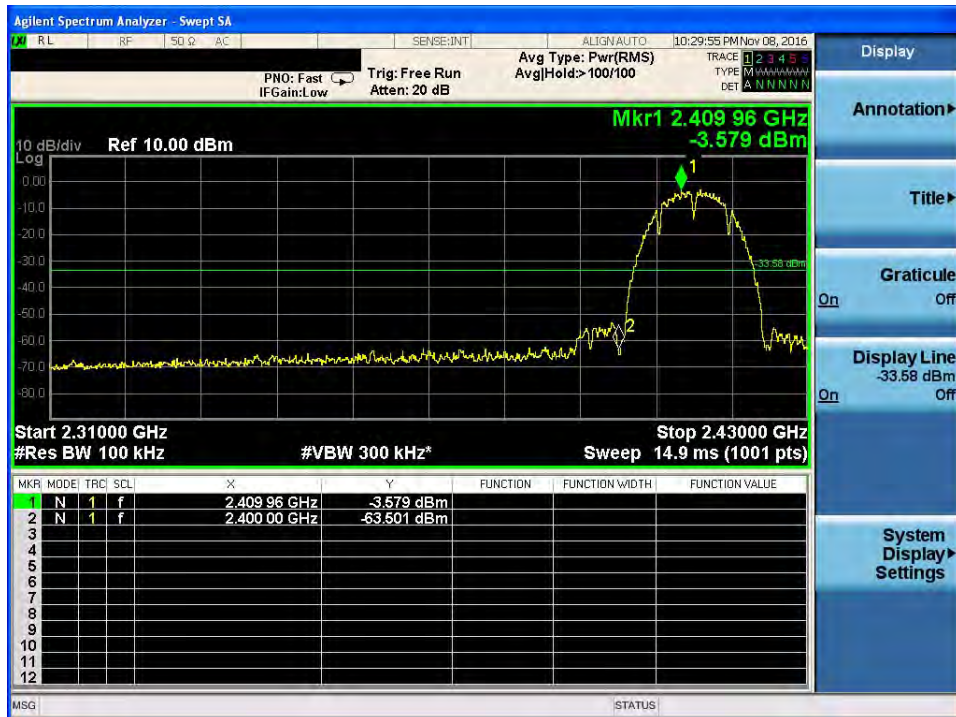

### 802.11b: Band Edge-High Channel



## 802.11g: Band Edge-Low Channel

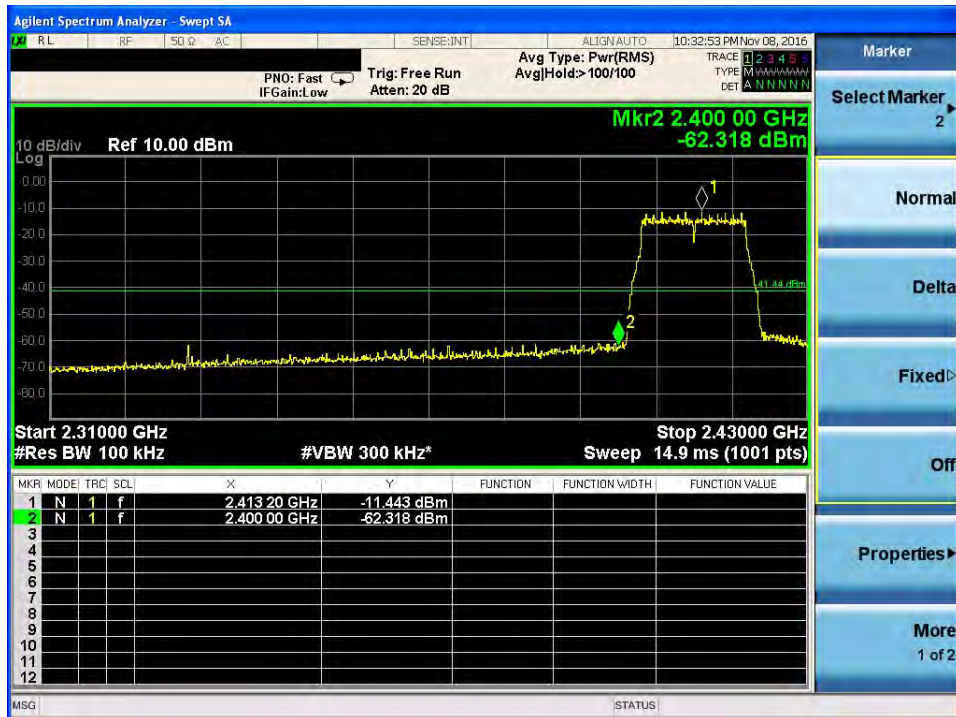

## 802.11g: Band Edge-High Channel



## 802.11n HT20: Band Edge-Low Channel



## 802.11n HT20: Band Edge-High Channel






## 802.11n HT40: Band Edge-Low Channel



## 802.11n HT40: Band Edge-High Channel

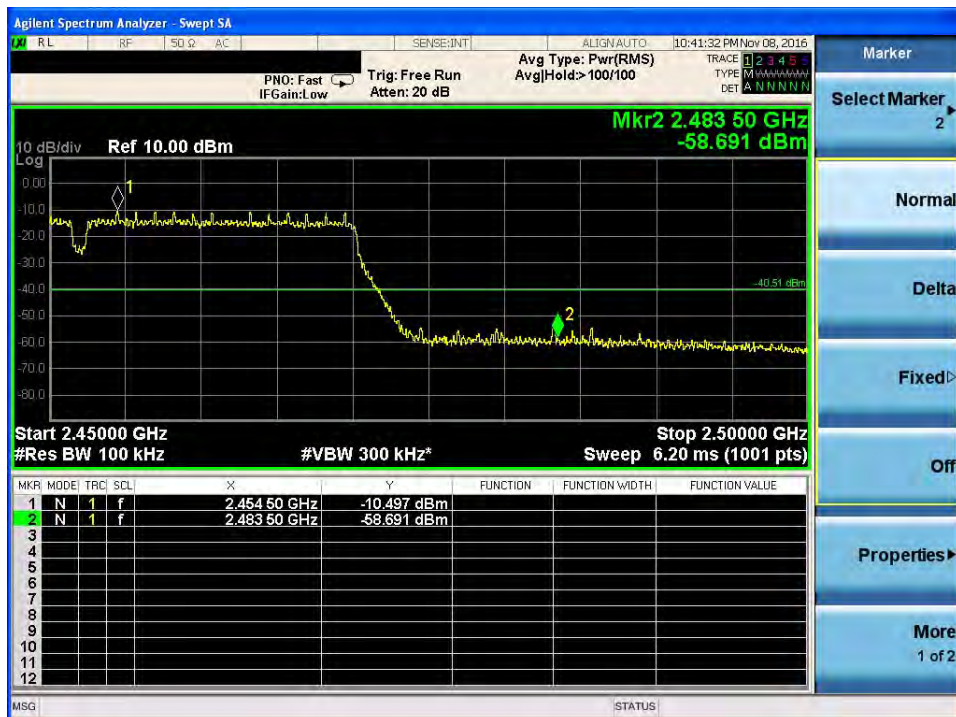

## **7.9 SPURIOUS RF CONDUCTED EMISSIONS**

### **7.9.1 Conformance Limit**

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### **7.9.2 Measuring Instruments**

The Measuring equipment is listed in the section 6.3 of this test report.

### **7.9.3 Test Setup**

Please refer to Section 6.1 of this test report.

### **7.9.4 Test Procedure**

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 9KHz to 26.5GHz.

### **7.9.5 Test Results**


Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

### Test Plot

802.11b on channel 01



802.11b on channel 01

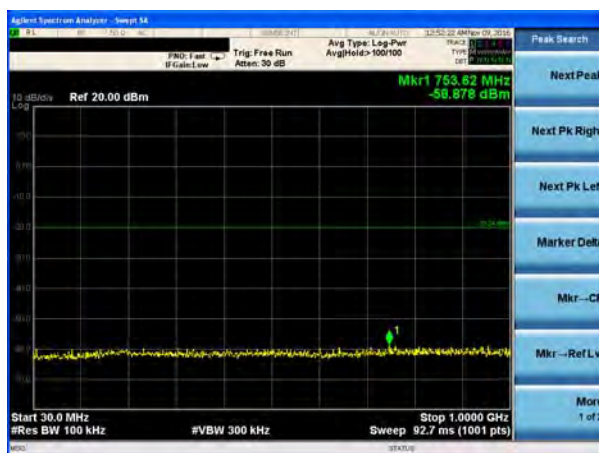

802.11b on channel 01



802.11b on channel 01



### Test Plot

802.11b on channel 06



802.11b on channel 06



802.11b on channel 06



802.11b on channel 06





### Test Plot

802.11b on channel 11



802.11b on channel 11



802.11b on channel 11




802.11b on channel 11



### Test Plot

802.11g on channel 01

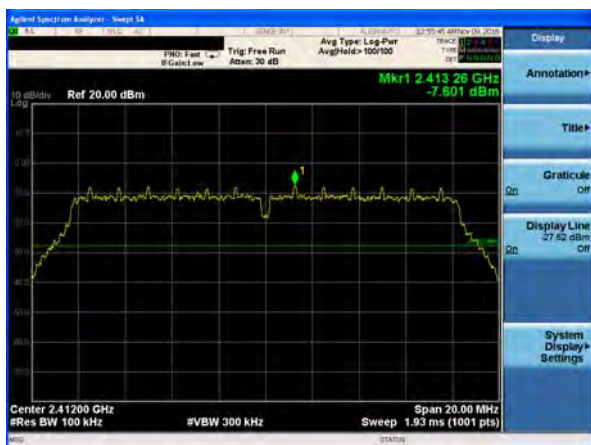

802.11g on channel 01



802.11g on channel 01



802.11g on channel 01



### Test Plot

802.11g on channel 06



802.11g on channel 06



802.11g on channel 06




802.11g on channel 06






# Test Plot


802.11g on channel 11

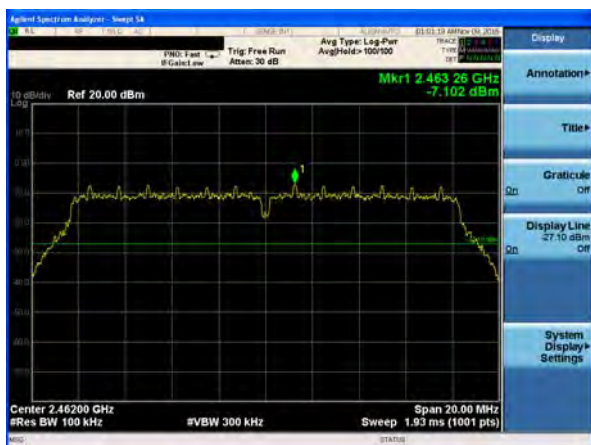

802.11g on channel 11

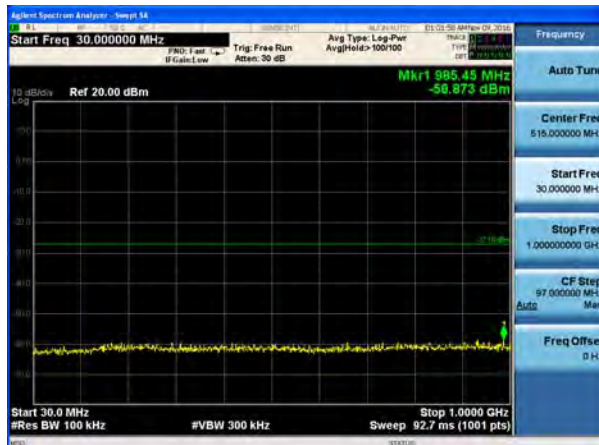

802.11g on channel 11

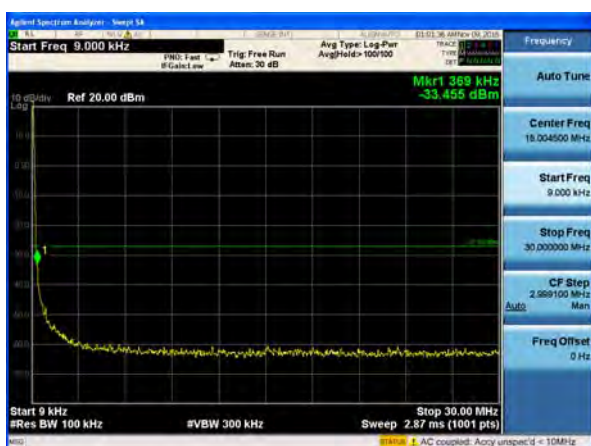


802.11g on channel 11





### Test Plot

802.11n20 on channel 01

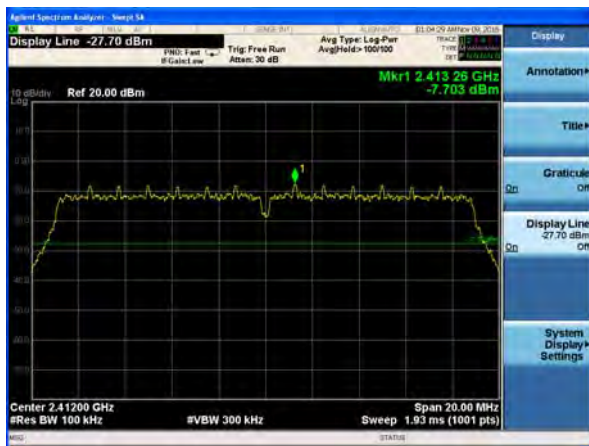

802.11n20 on channel 01



802.11 n20 on channel 01




802.11 n20 on channel 01



### Test Plot


802.11 n20 on channel 06

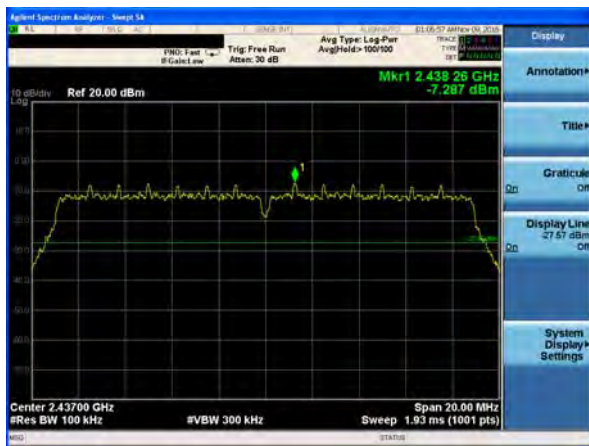

802.11 n20 on channel 06



802.11 n20 on channel 06

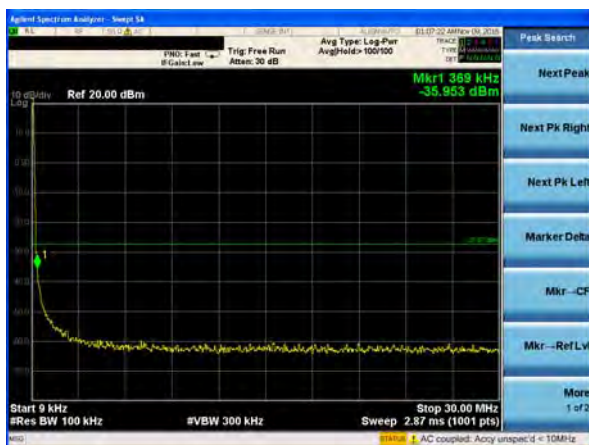


802.11 n20 on channel 06



### Test Plot


802.11 n20 on channel 11

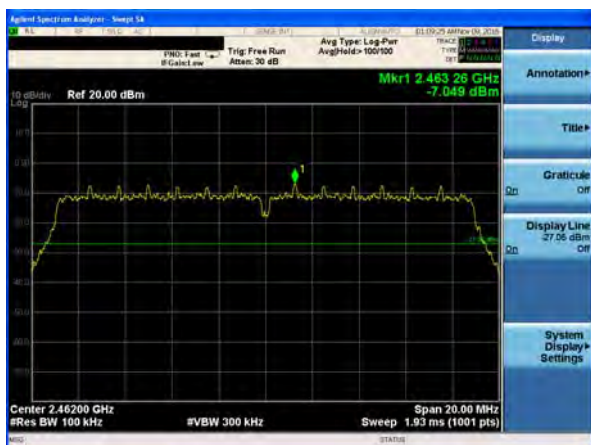

802.11 n20 on channel 11



802.11 n20 on channel 11

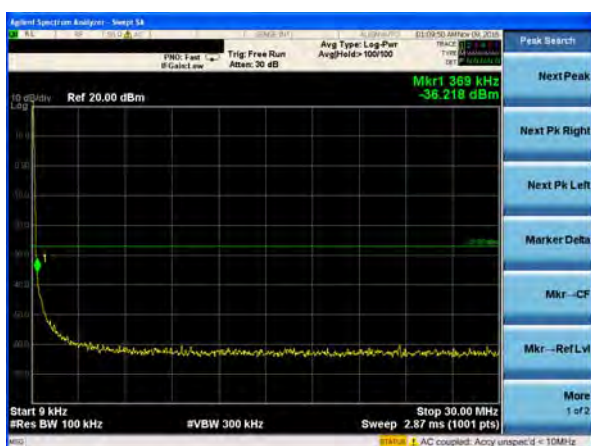


802.11 n20 on channel 11





### Test Plot

802.11n40 on channel 03

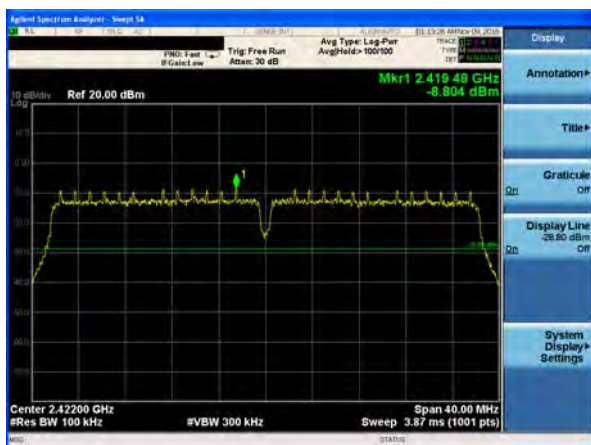

802.11n40 on channel 03



802.11n40 on channel 03




802.11n40 on channel 03



# Test Plot

802.11n40 on channel 06

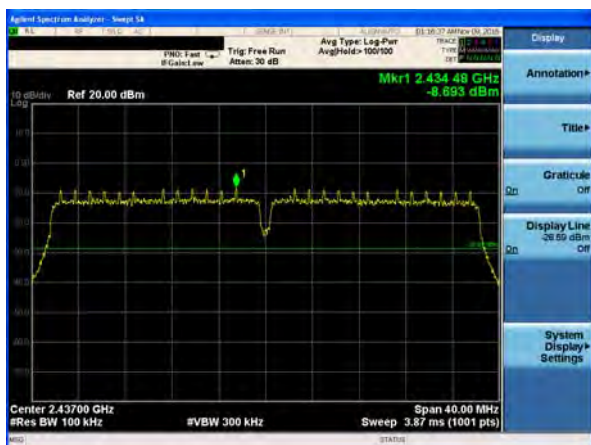

802.11 n40 on channel 06



802.11 n40 on channel 06




802.11 n40 on channel 06



### Test Plot

802.11 n40 on channel 9

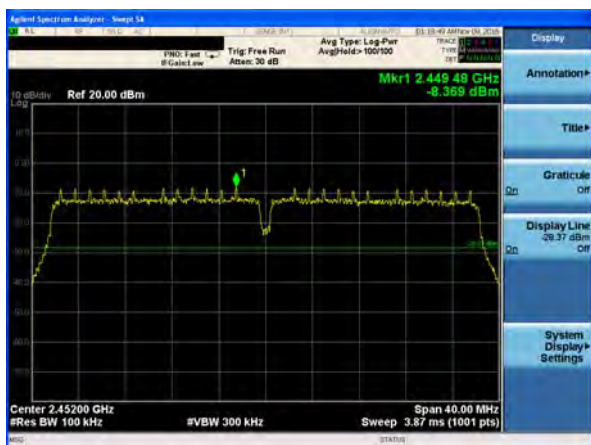

802.11 n40 on channel 9



802.11 n40 on channel 9



802.11 n40 on channel 9



**7.10 ANTENNA APPLICATION****7.10.1 Antenna Requirement**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**7.10.2 Result**

The EUT antenna is permanent attached (pcb)antenna. It comply with the standard requirement.

END OF REPORT