

# **FCC Test Report**

Report No.: AGC02931241101FE01

FCC ID : 2BLTR-RPT1V

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: DMR Repeater

**BRAND NAME** : TYTECH

MODEL NAME : MD-7500

**APPLICANT**: Quanzhou RadioBoss Technology Co., Ltd

**DATE OF ISSUE** : Nov. 20, 2024

**STANDARD(S)** : FCC Part 15 Subpart B

**REPORT VERSION**: V1.0


Attestation of Global Chicago (Shenzhen) Co., Ltd



Page 2 of 25

# **Report Revise Record**

| Report Version | Revise Time | Issued Date   | Valid Version | Notes           |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0           | /           | Nov. 20, 2024 | Valid         | Initial Release |





# **Table of Contents**

| 1. General Information                  |    |
|---|----|
| 2. Product Information                  | 5  |
| 2.1 Product Technical Description       | 5  |
| 2.2 Auxiliary Surrounding Description   | 5  |
| 2.2 Test Methodology                    | 6  |
| 2.3 Definition of Device Classification | 6  |
| 2.3 Description of Test Modes           | 6  |
| 3. Test Environment                     |    |
| 3.1 Address of The Test Laboratory      |    |
| 3.2 Test Facility                       |    |
| 3.3 Environmental Conditions            | 8  |
| 3.4 Measurement Uncertainty             | 8  |
| 3.5 List of Equipment Used              | 9  |
| 4. Summary of Test Results              | 9  |
| 5. Radiated Emission Measurements       |    |
| 5.1 Provisions Applicable               | 11 |
| 5.2 Measurement Setup                   |    |
| 5.3 Measurement Procedure               | 12 |
| 5.4 Measurement Resul                   | 13 |
| 6. Conducted Emission Measurements      | 21 |
| 6.1 Provisions Applicable               | 21 |
| 6.2 Measurement Setup                   | 21 |
| 6.3 Measurement Procedure               | 22 |
| 6.4 Measurement Result                  | 23 |
| Appendix I: Photographs of Test Setup   | 25 |
| Appendix II: Photographs of Test EUT    | 25 |



Report No.: AGC02931241101FE01 Page 4 of 25

# 1. General Information

| Applicant                    | Quanzhou RadioBoss Technology Co., Ltd                                   |  |
|------------------------------|--|--|
| Address                      | No.8, Chuangzao Road, Optoelectronics-information industry base, Nan'an, |  |
| , iddi ooc                   | Quanzhou, Fujian   |  |
| Manufacturer                 | Quanzhou RadioBoss Technology Co., Ltd                                   |  |
| Address                      | No.8, Chuangzao Road, Optoelectronics-information industry base, Nan'an, |  |
| , tadiooo                    | Quanzhou, Fujian   |  |
| Factory                      | Quanzhou RadioBoss Technology Co., Ltd                                   |  |
| Address                      | No.8, Chuangzao Road, Optoelectronics-information industry base, Nan'an, |  |
| radioso                      | Quanzhou, Fujian   |  |
| Product Designation          | DMR Repeater   |  |
| Brand Name                   | ТҮТЕСН   |  |
| Test Model                   | MD-7500  |  |
| Series Model(s)              | N/A  |  |
| Difference Description       | N/A  |  |
| Date of receipt of test item | Oct. 11, 2024  |  |
| Date of Test                 | Oct. 11, 2024~Nov. 20, 2024  |  |
| Deviation from Standard      | No any deviation from the test method                                    |  |
| Condition of Test Sample     | Normal   |  |
| Test Result                  | Pass   |  |
| Test Report Form No          | AGCTR-ER-FCC-SDOC V1.0   |  |

Note: The test results of this report relate only to the tested sample identified in this report.

| Prepared By | Bibo zhang                        |               |
|-------------|-----------------------------------|---------------|
|             | Bibo Zhang<br>(Project Engineer)  | Nov. 20, 2024 |
| Reviewed By | Colvin Liu                        |               |
|             | Calvin Liu<br>(Reviewer)          | Nov. 20, 2024 |
| Approved By | Angole li                         |               |
|             | Angela Li<br>(Authorized Officer) | Nov. 20, 2024 |



Page 5 of 25

# 2. Product Information

# 2.1 Product Technical Description

| Housing Type                | Plastic and metal                      |
|-----------------------------|--|
| Highest Operating Frequency | ☑Greater than 108MHz ☐Less than 108MHz |
| Equipment Type              | Table-Top/ Floor-standing              |
| Receiving Frequency         | 136MHz to 174MHz                       |
| Hardware Version            | V2.0                                   |
| Software Version            | V1.0.0.56                              |
| Power Supply                | AC 120V 60Hz&DC 13.8V, 12A             |

| I/O Port of EUT      |      |               |             |
|----------------------|------|---------------|-------------|
| I/O Port Type        | Q'TY | Cable         | Tested with |
| Antenna Port         | 1    |               | 1           |
| Hand microphone Port | 1    | 0.8m Shielded | 1           |

# 2.2 Auxiliary Surrounding Description

The Following Peripheral Devices and Interface Cables Were Connected During the Measurement:

□ Test Accessories Come From The Laboratory

| No. | Equipment  | Model No. | Manufacturer | Specification Information | Cable |
|-----|------------|-----------|--------------|---------------------------|-------|
| 1   | 50ohm Load | N/A       | Amphenol     | DC-3G, Max.50W            | N/A   |

#### ☐ Test Accessories Come From The Manufacturer

| No. | Equipment            | Model No. | Manufacturer | Specification Information | Cable              |
|-----|----------------------|-----------|--------------|---------------------------|--------------------|
| 1   | AC Power Cable       | N/A       | TYT          | N/A                       | 0.6m<br>Unshielded |
| 2   | Write frequency line | N/A       | TYT          | N/A                       | 0.6m<br>Shielded   |
| 3   | Hand microphone      | N/A       | N/A          | N/A                       | 0.8m<br>Shielded   |



Page 6 of 25

## 2.2 Test Methodology

The tests were performed according to following standards:

| No. | Identity           | Document Title  |
|-----|--------------------|---|
| 1   | FCC 47 CFR Part 15 | Radio Frequency Devices   |
| 2   | ANSI C63.4-2014    | American National Standard for Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |

#### 2.3 Definition of Device Classification

Unintentional radiator:

A device which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment.

Class B Digital Device:

A digital device which is marketed for use by the general public or in a residential environment.

#### Note:

A manufacturer may also qualify a device intended to be marketed in a commercial, business or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

#### 2.3 Description of Test Modes

| No. | Test Mode   | Remark |
|-----|---|--------|
| 1   | Receiving at low channel of 136 MHz to 174 MHz    | Worst  |
| 2   | Receiving at middle channel of 136 MHz to 174 MHz |        |
| 3   | Receiving at high channel of 136 MHz to 174 MHz   |        |

Note: Only the result of the worst case was recorded in the report.



Page 7 of 25

# 3. Test Environment

# 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## **CNAS-Lab Code: L5488**

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

## FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

# IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 8 of 25

#### 3.3 Environmental Conditions

|                         | Normal Conditions |
|-------------------------|-------------------|
| Temperature range (°C)  | 15 - 35           |
| Relative humidity range | 20 % - 75 %       |
| Pressure range (kPa)    | 86 - 106          |

## 3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

| Item  | Measurement Uncertainty    |
|---|----------------------------|
| Uncertainty of Conducted Emission           | $U_c = \pm 2.9 \text{ dB}$ |
| Uncertainty of Radiated Emission below 1GHz | $U_c = \pm 3.9 \text{ dB}$ |
| Uncertainty of Radiated Emission above 1GHz | $U_c = \pm 4.9 \text{ dB}$ |



Report No.: AGC02931241101FE01 Page 9 of 25

3.5 List of Equipment Used

| •           | Radiated Emission |                                  |              |           |              |                              |                              |  |  |  |  |  |  |
|-------------|-------------------|----------------------------------|--------------|-----------|--------------|------------------------------|------------------------------|--|--|--|--|--|--|
| Used        | Equipment No.     | Test Equipment                   | Manufacturer | Model No. | Serial No.   | Last Cal. Date<br>(YY-MM-DD) | Next Cal. Date<br>(YY-MM-DD) |  |  |  |  |  |  |
|             | AGC-EM-E046       | EMI Test Receiver                | R&S          | ESCI      | 10096        | 2024-02-01                   | 2025-01-31                   |  |  |  |  |  |  |
| $\boxtimes$ | AGC-EM-E116       | EMI Test Receiver                | R&S          | ESCI      | 100034       | 2024-05-24                   | 2025-05-23                   |  |  |  |  |  |  |
| $\boxtimes$ | AGC-EM-E061       | Spectrum Analyzer                | Agilent      | N9010A    | MY53470504   | 2024-05-28                   | 2025-05-27                   |  |  |  |  |  |  |
|             | AGC-EM-E001       | Wideband Antenna                 | SCHWARZBECK  | VULB9168  | D69250       | 2023-05-11                   | 2025-05-10                   |  |  |  |  |  |  |
| $\boxtimes$ | AGC-EM-E005       | Wideband Antenna                 | SCHWARZBECK  | VULB9168  | VULB9168-494 | 2023-01-05                   | 2025-01-04                   |  |  |  |  |  |  |
| $\boxtimes$ | AGC-EM-E029       | Broadband Ridged<br>Horn Antenna | ETS          | 3117      | 00034609     | 2023-03-23                   | 2025-03-22                   |  |  |  |  |  |  |
| $\boxtimes$ | AGC-EM-E146       | Pre-amplifier                    | ETS          | 3117-PA   | 00246148     | 2024-07-24                   | 2026-07-23                   |  |  |  |  |  |  |

| •           | AC Power Line Conducted Emission |                   |              |            |            |                              |                              |  |  |  |  |  |
|-------------|----------------------------------|-------------------|--------------|------------|------------|------------------------------|------------------------------|--|--|--|--|--|
| Used        | Equipment No.                    | Test Equipment    | Manufacturer | Model No.  | Serial No. | Last Cal. Date<br>(YY-MM-DD) | Next Cal. Date<br>(YY-MM-DD) |  |  |  |  |  |
| $\boxtimes$ | AGC-EM-E045                      | EMI Test Receiver | R&S          | ESPI       | 101206     | 2024-05-28                   | 2025-05-27                   |  |  |  |  |  |
| $\boxtimes$ | AGC-EM-A130                      | 6dB Attenuator    | Eeatsheep    | LM-XX-6-5W | DC-6GZ     | 2023-06-09                   | 2025-06-08                   |  |  |  |  |  |
| $\boxtimes$ | AGC-EM-E023                      | AMN               | R&S          | 100086     | ESH2-Z5    | 2024-05-28                   | 2025-05-27                   |  |  |  |  |  |

| Test Software |               |                |              |                                 |                     |  |  |  |  |  |  |
|---------------|---------------|----------------|--------------|---------------------------------|---------------------|--|--|--|--|--|--|
| Used          | Equipment No. | Test Equipment | Manufacturer | Model No.                       | Version Information |  |  |  |  |  |  |
| $\boxtimes$   | AGC-EM-S004   | RE Test System | Tonscend     | TS <sup>+</sup> Ver2.1(JS32-RE) | 4.0.0.0             |  |  |  |  |  |  |
|               | AGC-EM-S003   | RE Test System | FARA         | EZ-EMC                          | V.RA-03A            |  |  |  |  |  |  |
| $\boxtimes$   | AGC-EM-S001   | CE Test System | R&S          | ES-K1                           | V1.71               |  |  |  |  |  |  |



Page 10 of 25

# 4. Summary of Test Results

| Item | FCC Rules      | Description Of Test | Class/Severity | Result |
|------|----------------|---------------------|----------------|--------|
| 1    | Section 15.107 | Radiated Emission   | Class B        | Pass   |
| 2    | Section 15.109 | Conducted Emission  | Class B        | Pass   |




#### 5. Radiated Emission Measurements

# 5.1 Provisions Applicable


FCC CFR Title 47 Part 15 Subpart B Section 15.109:

| Frequency Range | Class B Limit<br>(dBuV/m @3m) | Class A Limit<br>(dBuV/m @3m) | Value      |  |
|-----------------|-------------------------------|-------------------------------|------------|--|
| 30MHz-88MHz     | 40.00                         | 50.00                         | Quasi-peak |  |
| 88MHz-216MHz    | 43.50                         | 53.50                         | Quasi-peak |  |
| 216MHz-960MHz   | 46.00                         | 56.00                         | Quasi-peak |  |
| 960MHz-1GHz     | 54.00                         | 64.00                         | Quasi-peak |  |
| Above 1GHz      | 54.00                         | 60.00                         | Average    |  |
| Above IGHZ      | 74.00                         | 80.00                         | Peak       |  |

# 5.2 Measurement Setup

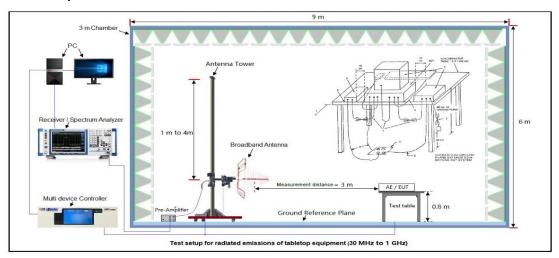

# Radiated Emission Measurements Test Setup for 30MHz to 1GHz

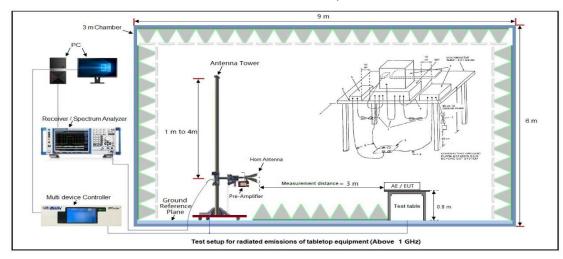

#### Radiated Emission Measurements Test Setup for above 1GHz



Page 12 of 25

#### **5.3 Measurement Procedure**

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. The EUT received power by AC 120V/60Hz.
- 5. The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- 6. The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7. The test mode(s) were scanned during the test:
- 8. Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented. For emissions below 1GHz, use 120KHz RBW and VBW>=3RBW for QP reading.
- 9. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 10. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 11. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the guasi-peak method for below 1GHz.
- 12. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 13. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 14. The test data of the worst case condition (mode 1) was reported on the following Data page.

#### **EMI Test Receiver Setup:**

During the radiated emission test, the EMI test receiver was set with the following configurations:


| Frequency Range   | RBW     | Video B/W | IF B/W  | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz   | 120 kHz | QP          |
| Above 1 GHz       | 1MHz    | 3 MHz     | /       | PK          |
| Above 1 GHz       | 1MHz    | 10 Hz     | /       | Ave.        |



Page 13 of 25


#### 5.4 Measurement Result

Measurement Power Supply: DC 13.8V

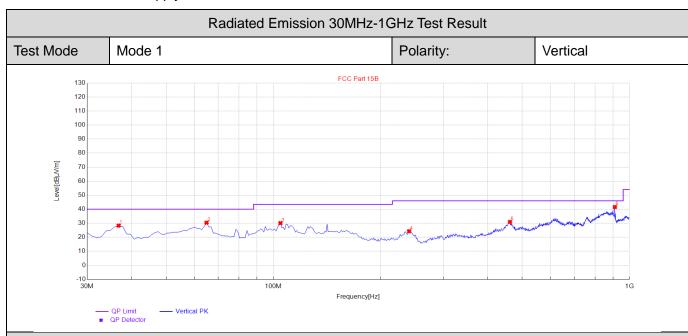


| Final | Final Data List |                   |                |                   |                |             |              |          |  |  |  |  |
|-------|-----------------|-------------------|----------------|-------------------|----------------|-------------|--------------|----------|--|--|--|--|
| NO.   | Freq.<br>[MHz]  | Level<br>[dBµV/m] | Factor<br>[dB] | Limit<br>[dBµV/m] | Margin<br>[dB] | Height [cm] | Angle<br>[°] | Polarity |  |  |  |  |
| 1     | 36.79           | 28.30             | 11.23          | 40.00             | 11.70          | 100         | 21           | Vertical |  |  |  |  |
| 2     | 64.92           | 30.38             | 16.29          | 40.00             | 9.62           | 100         | 2            | Vertical |  |  |  |  |
| 3     | 104.69          | 30.07             | 16.83          | 43.50             | 13.43          | 100         | 142          | Vertical |  |  |  |  |
| 4     | 240.49          | 24.29             | 15.92          | 46.00             | 21.71          | 100         | 312          | Vertical |  |  |  |  |
| 5     | 461.65          | 30.94             | 24.36          | 46.00             | 15.06          | 100         | 287          | Vertical |  |  |  |  |
| 6     | 909.79          | 41.57             | 27.50          | 46.00             | 4.43           | 100         | 246          | Vertical |  |  |  |  |


# **RESULT: PASS**






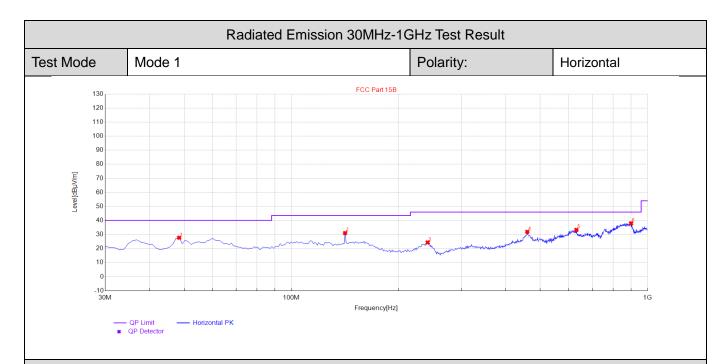


| Final | Final Data List |                   |                |                   |                |                |              |            |  |  |  |  |
|-------|-----------------|-------------------|----------------|-------------------|----------------|----------------|--------------|------------|--|--|--|--|
| NO.   | Freq.<br>[MHz]  | Level<br>[dBµV/m] | Factor<br>[dB] | Limit<br>[dBµV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Polarity   |  |  |  |  |
| 1     | 48.43           | 27.72             | 14.44          | 40.00             | 12.28          | 100            | 155          | Horizontal |  |  |  |  |
| 2     | 141.55          | 31.05             | 16.13          | 43.50             | 12.45          | 100            | 255          | Horizontal |  |  |  |  |
| 3     | 241.46          | 24.34             | 15.58          | 46.00             | 21.66          | 100            | 122          | Horizontal |  |  |  |  |
| 4     | 459.71          | 31.94             | 24.69          | 46.00             | 14.06          | 100            | 239          | Horizontal |  |  |  |  |
| 5     | 631.4           | 33.30             | 24.28          | 46.00             | 12.70          | 100            | 47           | Horizontal |  |  |  |  |
| 6     | 899.12          | 38.01             | 30.25          | 46.00             | 7.99           | 100            | 1            | Horizontal |  |  |  |  |






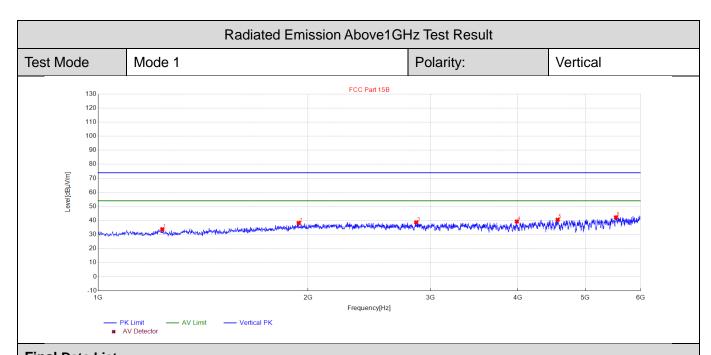

| Final | Final Data List |                   |                |                   |                |                |              |          |  |  |  |  |
|-------|-----------------|-------------------|----------------|-------------------|----------------|----------------|--------------|----------|--|--|--|--|
| NO.   | Freq.<br>[MHz]  | Level<br>[dBµV/m] | Factor<br>[dB] | Limit<br>[dBµV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Polarity |  |  |  |  |
| 1     | 1236.047209     | 33.75             | -17.97         | 74.00             | 40.25          | 100            | 230          | Vertical |  |  |  |  |
| 2     | 1940.188038     | 38.21             | -13.90         | 74.00             | 35.79          | 100            | 340          | Vertical |  |  |  |  |
| 3     | 2860.372074     | 38.61             | -12.04         | 74.00             | 35.39          | 100            | 300          | Vertical |  |  |  |  |
| 4     | 3988.59772      | 39.29             | -9.98          | 74.00             | 34.71          | 100            | 170          | Vertical |  |  |  |  |
| 5     | 4563.712743     | 40.54             | -7.87          | 74.00             | 33.46          | 100            | 60           | Vertical |  |  |  |  |
| 6     | 5532.906581     | 42.25             | -6.78          | 74.00             | 31.75          | 100            | 260          | Vertical |  |  |  |  |





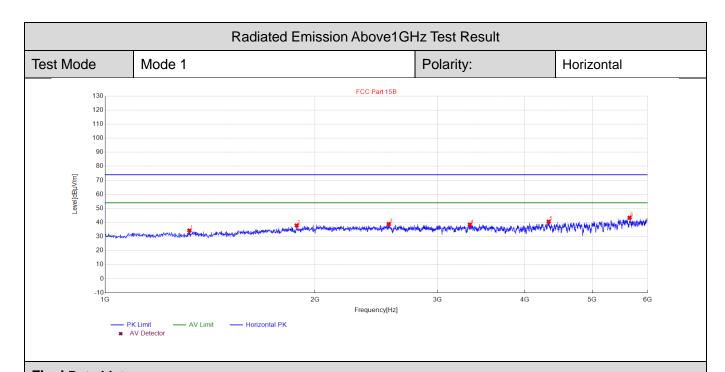


| Final | Final Data List |                   |                |                   |                |                |              |            |  |  |  |  |
|-------|-----------------|-------------------|----------------|-------------------|----------------|----------------|--------------|------------|--|--|--|--|
| NO.   | Freq.<br>[MHz]  | Level<br>[dBµV/m] | Factor<br>[dB] | Limit<br>[dBµV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Polarity   |  |  |  |  |
| 1     | 1321.064213     | 34.26             | -17.83         | 74.00             | 39.74          | 100            | 210          | Horizontal |  |  |  |  |
| 2     | 1883.176635     | 37.88             | -14.37         | 74.00             | 36.12          | 100            | 20           | Horizontal |  |  |  |  |
| 3     | 2552.310462     | 38.90             | -12.18         | 74.00             | 35.10          | 100            | 270          | Horizontal |  |  |  |  |
| 4     | 3336.467294     | 38.49             | -11.08         | 74.00             | 35.51          | 100            | 360          | Horizontal |  |  |  |  |
| 5     | 4328.665733     | 40.57             | -8.59          | 74.00             | 33.43          | 100            | 110          | Horizontal |  |  |  |  |
| 6     | 5655.931186     | 43.40             | -6.42          | 74.00             | 30.60          | 100            | 240          | Horizontal |  |  |  |  |




Report No.: AGC02931241101FE01 Page 17 of 25

Measurement Power Supply: AC 120V

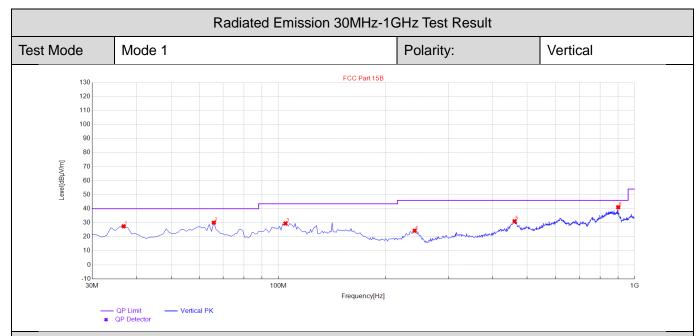


| Final | Final Data List |                   |                |                   |                |                |              |          |  |  |  |  |
|-------|-----------------|-------------------|----------------|-------------------|----------------|----------------|--------------|----------|--|--|--|--|
| NO.   | Freq.<br>[MHz]  | Level<br>[dBµV/m] | Factor<br>[dB] | Limit<br>[dBµV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Polarity |  |  |  |  |
| 1     | 36.79           | 27.43             | 11.23          | 40.00             | 12.57          | 100            | 359          | Vertical |  |  |  |  |
| 2     | 65.89           | 30.02             | 15.98          | 40.00             | 9.98           | 100            | 155          | Vertical |  |  |  |  |
| 3     | 104.69          | 29.48             | 16.83          | 43.50             | 14.02          | 100            | 72           | Vertical |  |  |  |  |
| 4     | 241.46          | 24.30             | 15.58          | 46.00             | 21.70          | 100            | 360          | Vertical |  |  |  |  |
| 5     | 460.68          | 31.07             | 24.60          | 46.00             | 14.93          | 100            | 280          | Vertical |  |  |  |  |
| 6     | 900.09          | 41.06             | 30.27          | 46.00             | 4.94           | 100            | 18           | Vertical |  |  |  |  |


# **RESULT: PASS**






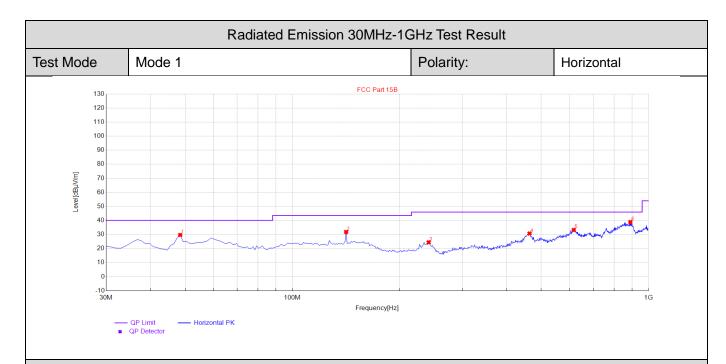


| Final | Final Data List |                   |                |                   |                |                |              |            |  |  |  |  |  |
|-------|-----------------|-------------------|----------------|-------------------|----------------|----------------|--------------|------------|--|--|--|--|--|
| NO.   | Freq.<br>[MHz]  | Level<br>[dBµV/m] | Factor<br>[dB] | Limit<br>[dBµV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Polarity   |  |  |  |  |  |
| 1     | 48.43           | 29.69             | 14.44          | 40.00             | 10.31          | 100            | 8            | Horizontal |  |  |  |  |  |
| 2     | 141.55          | 31.84             | 16.13          | 43.50             | 11.66          | 100            | 358          | Horizontal |  |  |  |  |  |
| 3     | 241.46          | 24.46             | 15.58          | 46.00             | 21.54          | 100            | 155          | Horizontal |  |  |  |  |  |
| 4     | 463.59          | 30.75             | 23.86          | 46.00             | 15.25          | 100            | 234          | Horizontal |  |  |  |  |  |
| 5     | 616.85          | 33.29             | 25.58          | 46.00             | 12.71          | 100            | 322          | Horizontal |  |  |  |  |  |
| 6     | 889.42          | 38.90             | 29.79          | 46.00             | 7.10           | 100            | 26           | Horizontal |  |  |  |  |  |






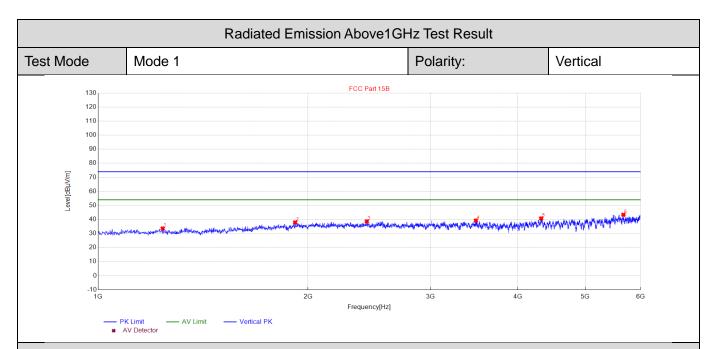

| Final Data List |                |                   |                |                   |                |             |              |          |
|-----------------|----------------|-------------------|----------------|-------------------|----------------|-------------|--------------|----------|
| NO.             | Freq.<br>[MHz] | Level<br>[dBµV/m] | Factor<br>[dB] | Limit<br>[dBµV/m] | Margin<br>[dB] | Height [cm] | Angle<br>[°] | Polarity |
| 1               | 1238.04761     | 33.63             | -17.96         | 74.00             | 40.37          | 100         | 210          | Vertical |
| 2               | 1917.183437    | 37.89             | -14.09         | 74.00             | 36.11          | 100         | 260          | Vertical |
| 3               | 2429.285857    | 38.65             | -12.37         | 74.00             | 35.35          | 100         | 330          | Vertical |
| 4               | 3483.496699    | 39.26             | -10.68         | 74.00             | 34.74          | 100         | 150          | Vertical |
| 5               | 4321.664333    | 40.77             | -8.63          | 74.00             | 33.23          | 100         | 180          | Vertical |
| 6               | 5670.934187    | 43.38             | -6.37          | 74.00             | 30.62          | 100         | 160          | Vertical |





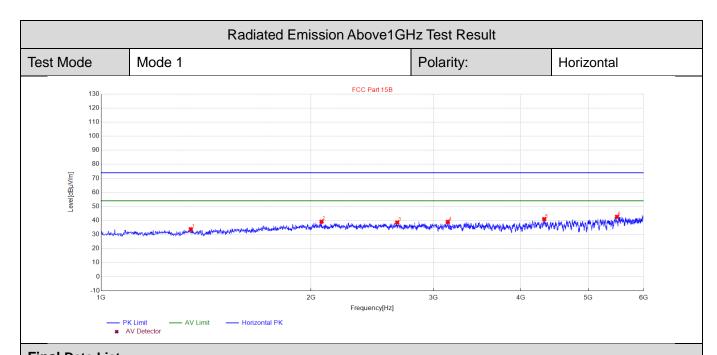

| Final Data List |                |                   |                |                   |                |                |              |            |
|-----------------|----------------|-------------------|----------------|-------------------|----------------|----------------|--------------|------------|
| NO.             | Freq.<br>[MHz] | Level<br>[dBµV/m] | Factor<br>[dB] | Limit<br>[dBµV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Polarity   |
| 1               | 1345.069014    | 33.79             | -17.79         | 74.00             | 40.21          | 100            | 350          | Horizontal |
| 2               | 2071.214243    | 39.14             | -13.24         | 74.00             | 34.86          | 100            | 230          | Horizontal |
| 3               | 2659.331866    | 38.56             | -12.13         | 74.00             | 35.44          | 100            | 310          | Horizontal |
| 4               | 3143.428686    | 39.06             | -11.59         | 74.00             | 34.94          | 100            | 210          | Horizontal |
| 5               | 4322.664533    | 40.96             | -8.62          | 74.00             | 33.04          | 100            | 230          | Horizontal |
| 6               | 5496.89938     | 42.62             | -6.88          | 74.00             | 31.38          | 100            | 300          | Horizontal |

#### Note:

- 1. Factor=Antenna Factor + Cable loss Amplifier gain, Margin= Limit-Measurement.
- 2. The "Factor" value can be calculated automatically by software of measurement system.



Page 21 of 25

# 6. Conducted Emission Measurements

# **6.1 Provisions Applicable**

FCC CFR Title 47 Part 15 Subpart B Section 15.107:


For Class B Limits:

| F             | Maximum RF Line Voltage |                |  |  |  |
|---------------|-------------------------|----------------|--|--|--|
| Frequency     | Q.P. (dBµV)             | Average (dBµV) |  |  |  |
| 150kHz~500kHz | 66-56                   | 56-46          |  |  |  |
| 500kHz~5MHz   | 56                      | 46             |  |  |  |
| 5MHz~30MHz    | 60                      | 50             |  |  |  |

#### For Class A Limits:

| Fraguenay     | Maximum RF Line Voltage |                |  |  |  |
|---------------|-------------------------|----------------|--|--|--|
| Frequency     | Q.P. (dBµV)             | Average (dBµV) |  |  |  |
| 150kHz~500kHz | 79                      | 66             |  |  |  |
| 500kHz~30MHz  | 73                      | 60             |  |  |  |

## 6.2 Measurement Setup

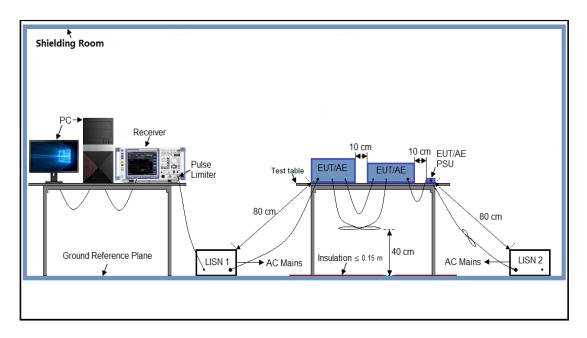



Page 22 of 25

#### **6.3 Measurement Procedure**


- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. The EUT received AC 120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5. All support equipment received AC power from a second LISN, if any.
- 6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test data of the worst case condition (Mode 1) was reported on the following Data page.



Report No.: AGC02931241101FE01 Page 23 of 25


#### 6.4 Measurement Result

Measurement Power Supply: DC 13.8V

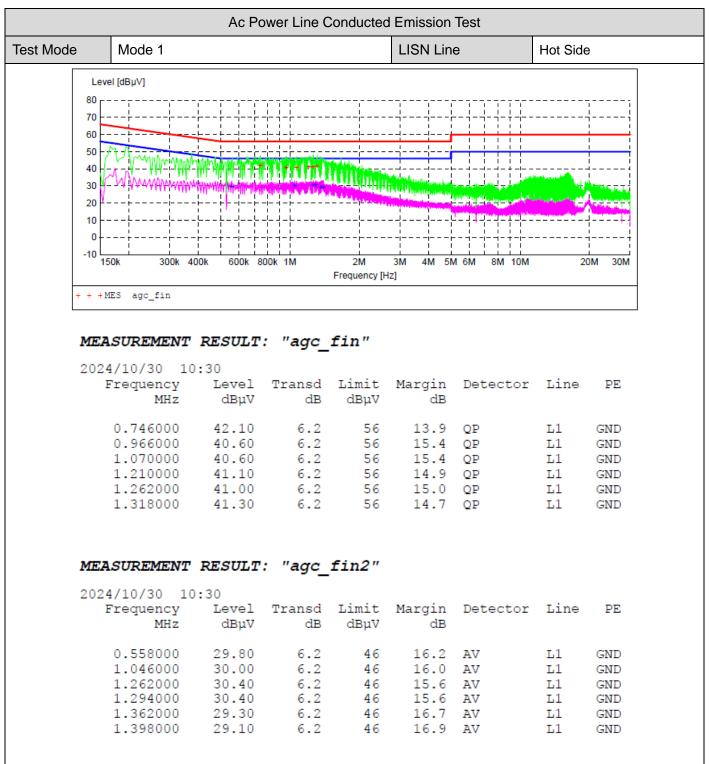

# **RESULT: PASS**



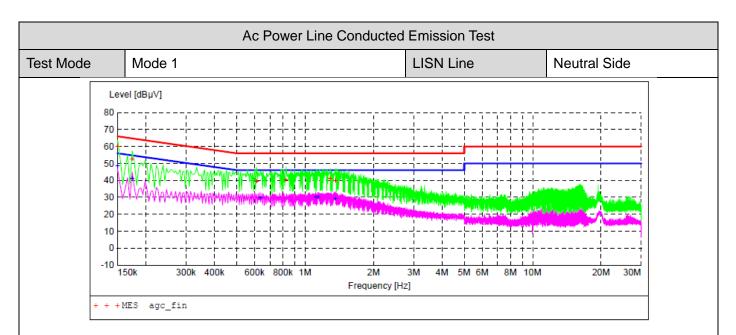

# MEASUREMENT RESULT: "agc fin"

| 2024/10/30 10:34 |               |              |               |              |          |      |  |  |  |
|------------------|---------------|--------------|---------------|--------------|----------|------|--|--|--|
| Frequency<br>MHz | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Detector | Line |  |  |  |
| 0.150000         | 60.10         | 6.1          | 66            | 5.9          | QP       | N    |  |  |  |
| 0.174000         | 52.40         | 6.1          | 65            | 12.4         | QP       | N    |  |  |  |
| 0.614000         | 39.40         | 6.2          | 56            | 16.6         | QP       | N    |  |  |  |
| 0.826000         | 40.00         | 6.2          | 56            | 16.0         | QP       | N    |  |  |  |
| 1.290000         | 41.10         | 6.2          | 56            | 14.9         | QP       | N    |  |  |  |
| 1.366000         | 39.90         | 6.2          | 56            | 16.1         | QP       | N    |  |  |  |

# MEASUREMENT RESULT: "agc fin2"

| 2024/10/30     | 10:34   |       |    |              |          |      |
|----------------|---------|-------|----|--------------|----------|------|
| Frequenc<br>Mi | cy Leve |       |    | Margin<br>dB | Detector | Line |
| 0.15000        | 00 48.5 | 0 6.1 | 56 | 7.5          | AV       | N    |
| 0.17400        | 00 40.9 | 0 6.1 | 55 | 13.9         | AV       | N    |
| 0.63400        | 00 29.7 | 0 6.2 | 46 | 16.3         | AV       | N    |
| 1.11400        | 00 30.1 | 0 6.2 | 46 | 15.9         | AV       | N    |
| 1.13800        | 00 30.1 | 0 6.2 | 46 | 15.9         | AV       | N    |
| 1.35800        | 00 29.3 | 0 6.2 | 46 | 16.7         | AV       | N    |

# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report.  $Further\ enquiry\ of\ validity\ or\ verification\ of\ the\ test\ report\ should\ be\ addressed\ to\ AGC\ by\ agc 01@agccert.com.$ 

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 25 of 25

**Appendix I: Photographs of Test Setup** 

Refer to the Report No.: AGC02931241101AP03

**Appendix II: Photographs of Test EUT** 

Refer to the Report No.: AGC02931241101AP02

----End of Report-----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.