

# TEST REPORT



Your Ref:

Date: 25 Jul 2005

Our Ref: 56S050580/03

Page: 1 of 56

DID: +65-6885 1459

Fax: +65-6777 6409

**NOTE:** This report is issued subject to PSB Corporation's "Terms and Conditions Governing Technical Services". The terms and conditions governing the issue of this report are set out as attached within this report.

FORMAL REPORT ON TESTING IN ACCORDANCE WITH  
FCC Parts 15B & C : 2004  
OF A  
**WIRELESS SPEAKER SYSTEM**  
[ MODELS : NTJD-800 and NTI-2724 ]  
[ FCC IDs : LLP-NTJD800 and LLP-NTI2724 ]

**TEST FACILITY**

Telecoms & EMC, Testing Group, PSB Corporation Pte Ltd  
1 Science Park Drive, Singapore 118221

**FCC REG. NO.**

90937 (3m & 10m OATS)  
99142 (10m Anechoic Chamber)  
871638 (5m Anechoic Chamber)  
325572 (10m Anechoic Chamber)  
IC 4257 (10m Anechoic Chamber)

**IND. CANADA REG. NO.**

**PREPARED FOR**

Nasaco Electronics Pte Ltd  
49 Changi South Avenue 2  
Level 4, Nasaco Tech Centre  
Singapore 486056

Tel : +65 6214 0676 Fax : +65 6214 1146

**JOB NUMBER**

56S050580

**TEST PERIOD**

7 July 2005 - 12 July 2005

**PREPARED BY**

Lucas Beh Poh Tee  
Associate Engineer

**APPROVED BY**

Lim Cher Hwee  
Product Engineer



LA-2001-0212-A  
LA-2001-0213-F  
LA-2001-0214-E  
LA-2001-0215-B  
LA-2001-0216-G  
LA-2001-0217-G

The results reported herein have been performed in accordance with the laboratory's terms of accreditation under the Singapore Accreditation Council - Singapore Laboratory Accreditation Scheme. Tests marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our laboratory.

TEST SUMMARY

PRODUCT DESCRIPTION

SUPPORTING  
EQUIPMENT LIST

EUT OPERATING  
CONDITION

TEST RESULTS

|         |  |
|---------|--|
| ANNEX A | - TEST INSTRUMENTATION & GENERAL PROCEDURES                    |
| ANNEX B | - EUT PHOTOGRAPHS / DIAGRAMS                                   |
| ANNEX C | - USER MANUAL, TECHNICAL DESCRIPTION, BLOCK & CIRCUIT DIAGRAMS |
| ANNEX D | - FCC LABEL & POSITION   |

## TEST SUMMARY

The product was tested in accordance with the customer's specifications.

### Test Results Summary

| Test Standard       | Description  | Pass / Fail                          |
|---------------------|--|--------------------------------------|
| FCC Part 15: 2004   |  |                                      |
| 15.107, 15.207      | Conducted Emissions  | Pass                                 |
| 15.109, 205, 15.209 | Radiated Emissions   | Pass                                 |
| 15.247 (a)(1)       | Carrier Frequency Separation   | Pass                                 |
|                     | Spectrum Bandwidth (20dB Bandwidth Measurement)  | Pass                                 |
| 15.247 (a)(1)(iii)  | Number of Hopping Frequencies  | Pass                                 |
|                     | Average Frequency Dwell Time   | Pass                                 |
| 15.247 (b)(1)       | Maximum Peak Power   | Pass                                 |
| 15.247 (d)          | RF Conducted Spurious Emissions & Band Edge Compliance at the Transmitter Antenna Terminal | Pass                                 |
| 15.247 (e)          | Peak Power Spectral Density  | Pass                                 |
| 1.1310              | Maximum Permissible Exposure   | Pass                                 |
| 15.35(c)            | Duty Cycle Correction Factor   | Refer to pages 54 and 55 for details |

### Notes

- Three channels as listed below, which respectively represent the lower, middle and upper channels of the equipment under test (EUT) were chosen and tested. For each channel, the EUT was configured to operate in the test mode.  

|                         |                        |
|-------------------------|------------------------|
| <u>Transmit Channel</u> | <u>Frequency (GHz)</u> |
| Channel 0               | 2.40333                |
| Channel 7               | 2.44224                |
| Channel 14              | 2.47910                |

The EUT contains total 15 channels.
- All the measurements in section 15.247 were done based on conducted measurements.
- The EUT is a Class B device when in non-transmitting state and meets the FCC Part15B Class B requirements.

### Modifications

No modifications were done.

## PRODUCT DESCRIPTION

|                                    |  |
|------------------------------------|--|
| Description                        | <p>: The Equipment Under Test (EUT) is a <b>Wireless Speaker System</b>.<br/>The EUT consists of following:</p> <ul style="list-style-type: none"> <li>- one wireless transmitter, NTJD-800 (a RF transceiver)</li> <li>- one flat speaker, NTI-2724 (RF transceiver)</li> </ul> <p>The wireless transmitter will transmit the inputted audio source wirelessly to the flat speaker. Upon receipt the audio signal from the wireless transmitter, the speakers will send an acknowledged signal back to the transmitter.</p> |
| Factory Address                    | : Nasaco Electronics (Shenzhen) Ltd.<br>7/F, Phase 1, Hing Yick Industrial Estate,<br>Fu Yong, Shenzhen City,<br>Guangdong, China.   |
| Manufacturer                       | : Nasaco Electronics (HK) Ltd<br>RM 1106, Eastern Centre<br>1065 King's Road<br>Tel – 852 2563 0592 Fax – 852 2565 9613  |
| Model Number                       | : NTJD-800 (Wireless transmitter)<br>NTI-2724 (Flat speaker)   |
| FCC IDs                            | : LLP-NTJD800 (Wireless transmitter)<br>LLP-NTI2724 (Flat speaker)   |
| Serial Number                      | : Nil  |
| Microprocessor                     | : TYJ-1101 Baseband module (Wireless transmitter)<br>TYM-1101 Baseband module (Flat speaker)   |
| Operating / Transmitting Frequency | : 2.40333GHz to 2.47910GHz   |
| Modulation                         | : Gaussian Frequency Shift Keying (GFSK)   |
| Port / Connectors                  | : 1 x DC In jack<br>2 x Audio In (L & R)<br>1 x Line In<br>1 x Charger jack  |
| Rated Input Power                  | : 6V DC via 110VAC 60Hz AC/DC adapter (Wireless transmitter)<br>15V DC via 110VAC 60Hz AC/DC adapter (Flat speaker)  |
| Accessories                        | <p>: Power Adapter For Wireless Transmitter – Model 35-6-500<br/>Input 120V 60Hz, 19W<br/>Output 6V DC 500mA</p> <p>Power Adapter for Flat Speaker – 48-15-800<br/>Input 120V 60Hz, 120mA<br/>Output 15V DC 800mA 12W</p> <p>DC Battery for Flat Speaker - NiMH or NiCD Rechargeable C-Cell</p>  |

## **SUPPORTING EQUIPMENT DESCRIPTION**

The Equipment Under Test (EUT), a Wireless Speaker System was tested as a stand-alone device without any supporting equipment.

## EUT OPERATING CONDITIONS

The Wireless Speaker System was powered from 110V, 60Hz mains supply.

| Tests  | Description Of Operation  |
|--|---|
| <ol style="list-style-type: none"> <li>1. Conducted Emissions</li> <li>2. Radiated Emissions</li> <li>3. Carrier Frequency Separation</li> <li>4. Spectrum Bandwidth (20dB Bandwidth Measurement)</li> <li>5. Number Of Hopping Frequencies</li> <li>6. Average Frequency Dwell Time</li> <li>7. Maximum Peak Power</li> <li>8. RF Conducted Spurious Emissions at the Transmitter Antenna Terminal</li> <li>9. Band Edge Compliance at the Transmitter Antenna Terminal</li> <li>10. Peak Power Spectral Density</li> <li>11. Maximum Permissible Exposure</li> <li>12. Duty Cycle Correction Factor</li> </ol> | <p>The EUT was exercised by operating in the test mode with maximum transmitting power and following configuration during the tests:</p> <p><u>Carrier Frequency Separation, Number of Hopping Frequency, Average Frequency Dwell Time, Band Edge at the Transmitting Antenna and Maximum Permissible Exposure:</u></p> <p>Frequency hopping and modulation are on.</p> <p><u>Conducted Emissions, Radiated Emissions, Spectrum Bandwidth (20dB Bandwidth Measurement), Maximum Peak Power, RF Conducted Spurious Emissions at the Transmitter Antenna Terminal, Peak Power Spectral Density, Maximum Permissible Exposure and Duty Cycle Correction Factor</u></p> <p>Frequency hopping is off and the modulation is on.</p> |

**FCC Part 15B (15.107 & 15.207) Class B Conducted Emission Results**
**Unit Under Test: Wireless Transmitter**

| Frequency (MHz) | Q-P Value (dB $\mu$ V) | Q-P Margin (dB) | AV Value (dB $\mu$ V) | AV Margin (dB) | Line    | Channel |
|-----------------|------------------------|-----------------|-----------------------|----------------|---------|---------|
| 0.5450          | 12.2                   | -43.8           | 7.7                   | -38.3          | Neutral | 0       |
| 0.6790          | 11.9                   | -44.1           | 7.4                   | -38.6          | Neutral | 0       |
| 1.2722          | 11.6                   | -44.4           | 7.3                   | -38.7          | Live    | 0       |
| 2.1358          | 11.8                   | -44.2           | 7.4                   | -38.6          | Neutral | 0       |
| 4.1297          | 12.0                   | -44.0           | 7.4                   | -38.6          | Neutral | 0       |
| 4.9858          | 11.6                   | -44.4           | 7.4                   | -38.6          | Live    | 0       |

**Unit Under Test: Flat Speaker**

| Frequency (MHz) | Q-P Value (dB $\mu$ V) | Q-P Margin (dB) | AV Value (dB $\mu$ V) | AV Margin (dB) | Line    | Channel |
|-----------------|------------------------|-----------------|-----------------------|----------------|---------|---------|
| 0.2157          | 32.8                   | -30.2           | 28.2                  | -24.8          | Neutral | 0       |
| 4.2963          | 19.1                   | -36.9           | 12.5                  | -33.5          | Neutral | 0       |
| 5.5330          | 34.2                   | -25.8           | 27.8                  | -22.2          | Live    | 0       |
| 5.8046          | 34.6                   | -25.4           | 27.6                  | -22.4          | Live    | 0       |
| 6.0818          | 33.3                   | -26.7           | 26.9                  | -23.1          | Live    | 0       |
| 6.3484          | 31.7                   | -28.3           | 24.2                  | -25.8          | Live    | 0       |

Tested by: Chang Wai Kit

**Notes:**

- Environmental Conditions**  
 Temperature 22°C  
 Relative Humidity 58%  
 Atmospheric Pressure 1030mbar
- All possible modes of operation were investigated from 150kHz to 30MHz. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
- A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
- EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
 9kHz - 30MHz  
 RBW: 10kHz VBW: 30kHz
- Conducted Emissions Measurement Uncertainty**  
 All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is  $\pm 2.4$ dB.



**Conducted Emissions Setup (Front View)**



**Conducted Emissions Setup (Rear View)**



## TEST RESULTS

### FCC Part 15 (15.109, 15.205 & 15.209) Class B Radiated Emission (Spurious Emissions) Results

Test Distance : 3m

#### Unit Under Test: Wireless Transmitter

Spurious Emissions ranging from 30MHz – 1GHz

| Frequency (MHz) | Q-P Value (dB $\mu$ V/m) | Q-P Margin (dB) | Channel | Azimuth (Degrees) | Height (cm) | Polarisation (H/V) |
|-----------------|--------------------------|-----------------|---------|-------------------|-------------|--------------------|
| 114.4115        | 33.3                     | -10.2           | 14      | 241               | 100         | V                  |
| 294.9008        | 37.1                     | -9.0            | 14      | 276               | 100         | H                  |
| 344.0430        | 38.4                     | -7.6            | 14      | 36                | 100         | H                  |
| 393.2100        | 41.6                     | -4.4            | 14      | 118               | 100         | H                  |
| 442.3480        | 45.8                     | -0.2            | 14      | 65                | 100         | H                  |
| 466.9291        | 41.8                     | -4.3            | 14      | 100               | 101         | H                  |

Spurious Emissions above 1GHz

| Frequency (GHz) | Peak Value (dB $\mu$ V/m) | Average Value (dB $\mu$ V/m) | Average Margin (dB) | Channel | Azimuth (Degrees) | Height (cm) | Pol (H/V) |
|-----------------|---------------------------|------------------------------|---------------------|---------|-------------------|-------------|-----------|
| 4.8088          | 73.9                      | 52.9                         | -1.1                | 0       | 165               | 100         | H         |
| 4.8877          | 73.6                      | 52.6                         | -1.4                | 7       | 145               | 100         | H         |
| 4.9633          | 73.0                      | 52.0                         | -2.0                | 14      | 178               | 100         | H         |
| 7.2111          | 61.3                      | 40.3                         | -13.7               | 0       | 167               | 100         | H         |
| 7.3288          | 65.3                      | 44.3                         | -9.7                | 7       | 141               | 100         | H         |
| 7.4366          | 62.0                      | 41.0                         | -13.0               | 14      | 177               | 100         | H         |

Tested by: Thor Wen Lei / Anthony Toh

#### Notes:

- Environmental Conditions**  
 Temperature 24°C  
 Relative Humidity 58%  
 Atmospheric Pressure 1030mbar
- All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
- Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
- A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
- EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
 30MHz - 1GHz  
 RBW: 120kHz VBW: 1MHz  
 >1GHz  
 RBW: 1MHz VBW: 1MHz

6. The peak emissions above 1GHz show compliance to the requirement stated in Section 15.35 (b).
7. The upper frequency of radiated emission investigations were according to requirements stated in Section 15.33 (a) for intentional radiators & Section 15.33 (b) for unintentional radiators.
8. The channel in the table refers to the transmit channel of the EUT.
9. Radiated Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz (QP only @ 3m & 10m) is  $\pm 4.3\text{dB}$  (for EUTs < 0.5m X 0.5m X 0.5m).

**FCC Part 15 (15.109, 15.205 & 15.209) Class B Radiated Emission (Spurious Emissions) Results**

Test Distance : 3m

**Unit Under Test: Flat Speaker**

Spurious Emissions ranging from 30MHz – 1GHz

| Frequency (MHz) | Q-P Value (dB $\mu$ V/m) | Q-P Margin (dB) | Channel | Azimuth (Degrees) | Height (cm) | Polarisation (H/V) |
|-----------------|--------------------------|-----------------|---------|-------------------|-------------|--------------------|
| 393.2072        | 44.3                     | -1.7            | 14      | 287               | 100         | V                  |
| 651.2497        | 37.9                     | -8.1            | 14      | 184               | 101         | H                  |
| 675.8398        | 38.1                     | -7.9            | 14      | 180               | 100         | H                  |
| 688.0997        | 39.6                     | -6.4            | 14      | 182               | 101         | H                  |
| 700.4094        | 38.6                     | -7.4            | 14      | 198               | 100         | H                  |
| 786.4198        | 37.5                     | -8.5            | 14      | 237               | 100         | H                  |

Spurious Emissions above 1GHz

| Frequency (GHz) | Peak Value (dB $\mu$ V/m) | Average Value (dB $\mu$ V/m) | Average Margin (dB) | Channel | Azimuth (Degrees) | Height (cm) | Pol (H/V) |
|-----------------|---------------------------|------------------------------|---------------------|---------|-------------------|-------------|-----------|
| --              | --                        | --                           | --                  | --      | --                | --          | --        |
| --              | --                        | --                           | --                  | --      | --                | --          | --        |
| --              | --                        | --                           | --                  | --      | --                | --          | --        |
| --              | --                        | --                           | --                  | --      | --                | --          | --        |
| --              | --                        | --                           | --                  | --      | --                | --          | --        |
| --              | --                        | --                           | --                  | --      | --                | --          | --        |

Tested by: Kenneth Ler

Notes:

- Environmental Conditions**

Temperature 24°C  
 Relative Humidity 58%  
 Atmospheric Pressure 1030mbar
- All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
- "--" indicates no emissions were found and shows compliance to the limits.
- Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.

5. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
6. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
30MHz - 1GHz  
 RBW: 120kHz VBW: 1MHz  
>1GHz  
 RBW: 1MHz VBW: 1MHz
7. The peak emissions above 1GHz show compliance to the requirement stated in Section 15.35 (b).
8. The upper frequency of radiated emission investigations were according to requirements stated in Section 15.33 (a) for intentional radiators & Section 15.33 (b) for unintentional radiators.
9. The channel in the table refers to the transmit channel of the EUT.
10. Radiated Emissions Measurement Uncertainty  
 All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz (QP only @ 3m & 10m) is  $\pm 4.3\text{dB}$  (for EUTs < 0.5m X 0.5m X 0.5m).



**Radiated Emissions Setup (Front View)**



**Radiated Emissions Setup (Rear View)**

**FCC Part 15C (15.247(a)(1)) Carrier Frequency Separation Results**

The EUT shows compliance to the requirements of this section, which states the adjacent carrier frequencies must be separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

| Unit Under Test      | Channel Separation (MHz) |
|----------------------|--------------------------|
| Wireless Transmitter | 2.060                    |
| Flat Speaker         | 2.050                    |


Please refer to the attached Plots 1 - 2 for details.

Tested by: Johnsen Tia

Notes:


- Environmental Conditions

|                      |          |
|----------------------|----------|
| Temperature          | 23°C     |
| Relative Humidity    | 55%      |
| Atmospheric Pressure | 1030mbar |

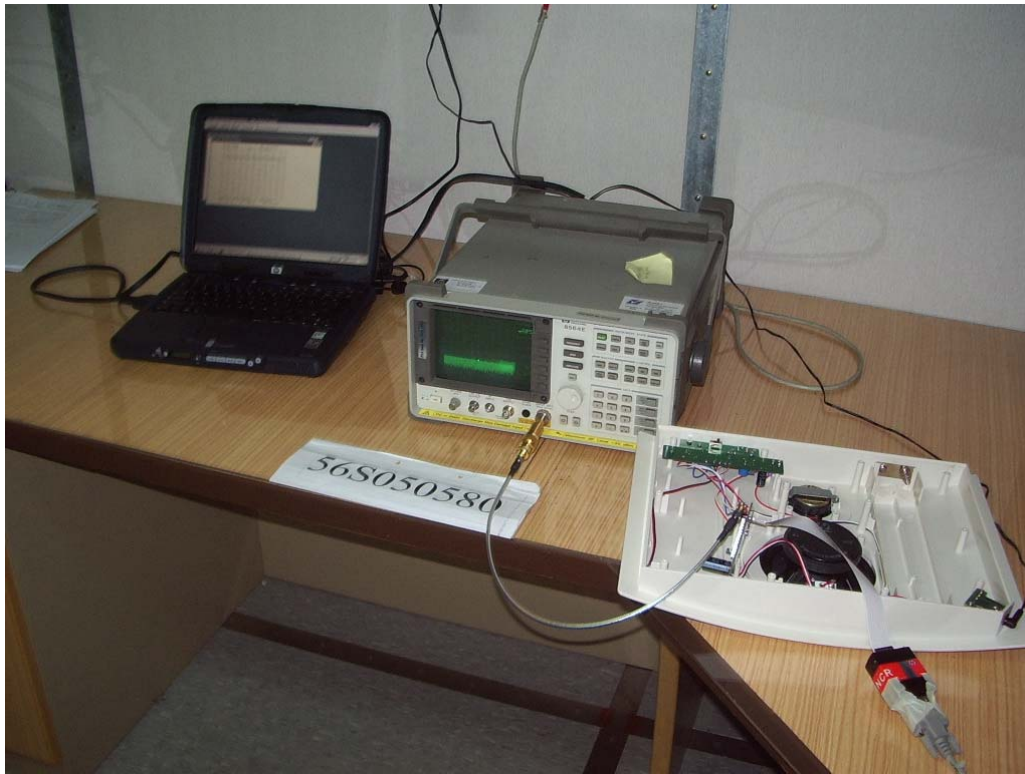


**Carrier Frequency Separation Measurement Test Setup**

CARRIER FREQUENCY SEPARATION PLOTS

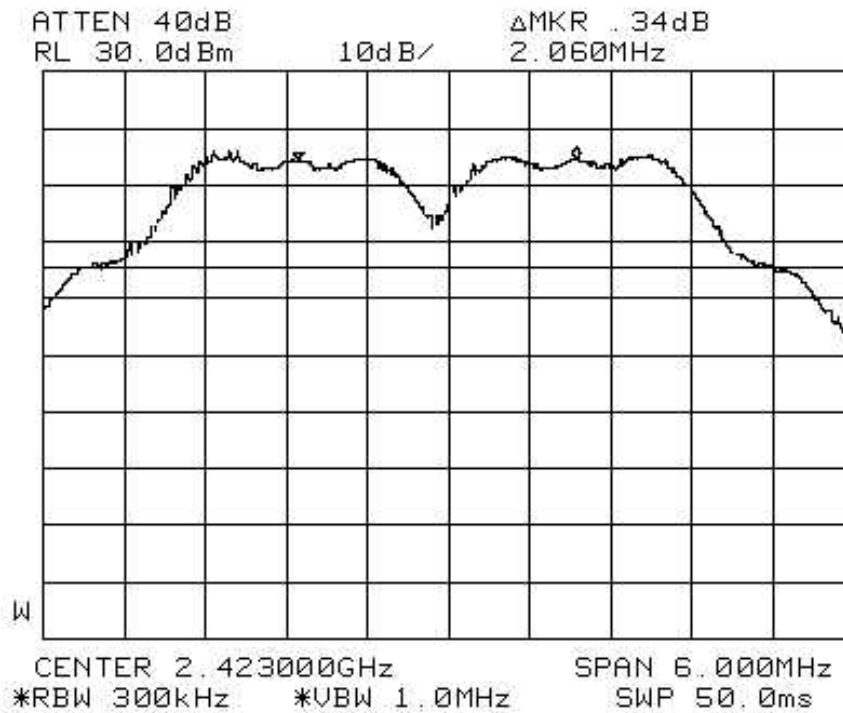

Plot 1- Carrier Frequency Separation - Wireless Transmitter

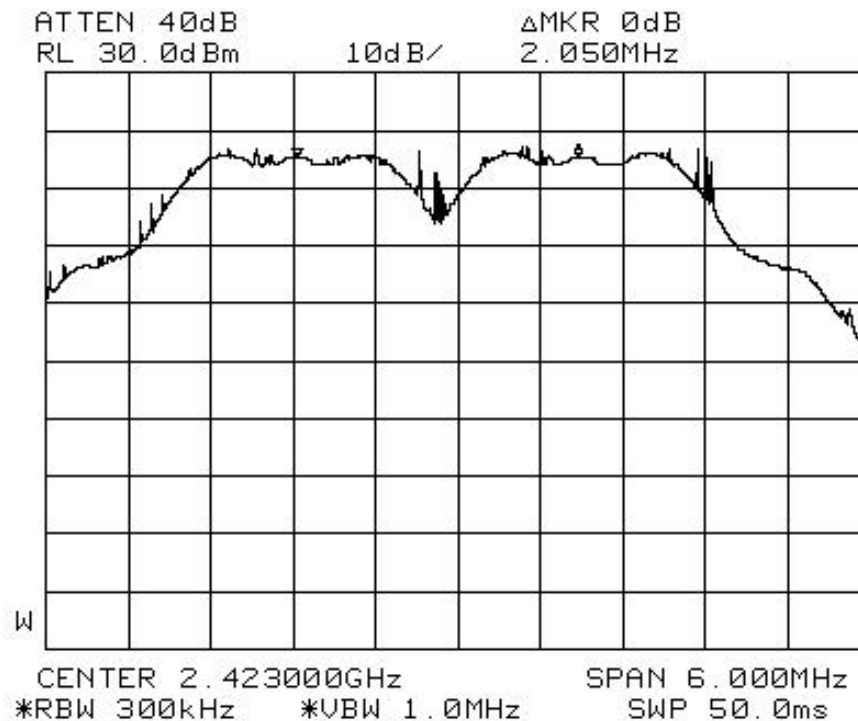

Plot 2 – Carrier Frequency Separation – Flat Speaker



## TEST RESULTS

### **FCC Part 15C (15.247(a)(1)) Spectrum Bandwidth (20dB Bandwidth Measurement) Results**

The EUT shows compliance to the requirements of this section, which states that the 20dB bandwidth of the hopping channel shall be the channel frequency separation by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

#### **Unit Under Test: Wireless Transmitter**

| Channel | Channel Frequency (GHz) | 20dB Bandwidth (MHz) |
|---------|-------------------------|----------------------|
| 0       | 2.40333                 | 1.970                |
| 7       | 2.44224                 | 1.940                |
| 14      | 2.47910                 | 1.920                |

Please refer to attached Plots 3 - 5 for details.

#### **Unit Under Test: Flat Speaker**

| Channel | Channel Frequency (GHz) | 20dB Bandwidth (MHz) |
|---------|-------------------------|----------------------|
| 0       | 2.40333                 | 1.960                |
| 7       | 2.44224                 | 1.940                |
| 14      | 2.47910                 | 1.940                |


Please refer to attached Plots 6 - 8 for details.

Tested by: Johnsen Tia

Notes:


- Environmental Conditions

|                      |          |
|----------------------|----------|
| Temperature          | 23°C     |
| Relative Humidity    | 55%      |
| Atmospheric Pressure | 1030mbar |

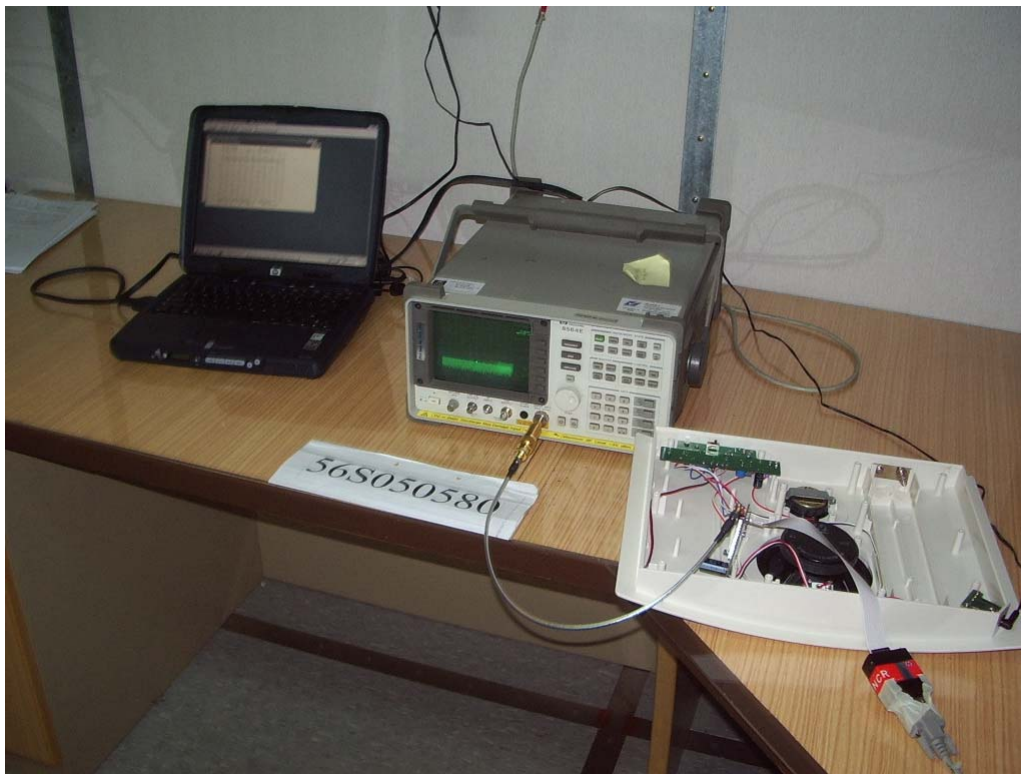


**Spectrum Bandwidth Measurement Test Setup**

**SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) PLOTS - WIRELESS TRANSMITTER**

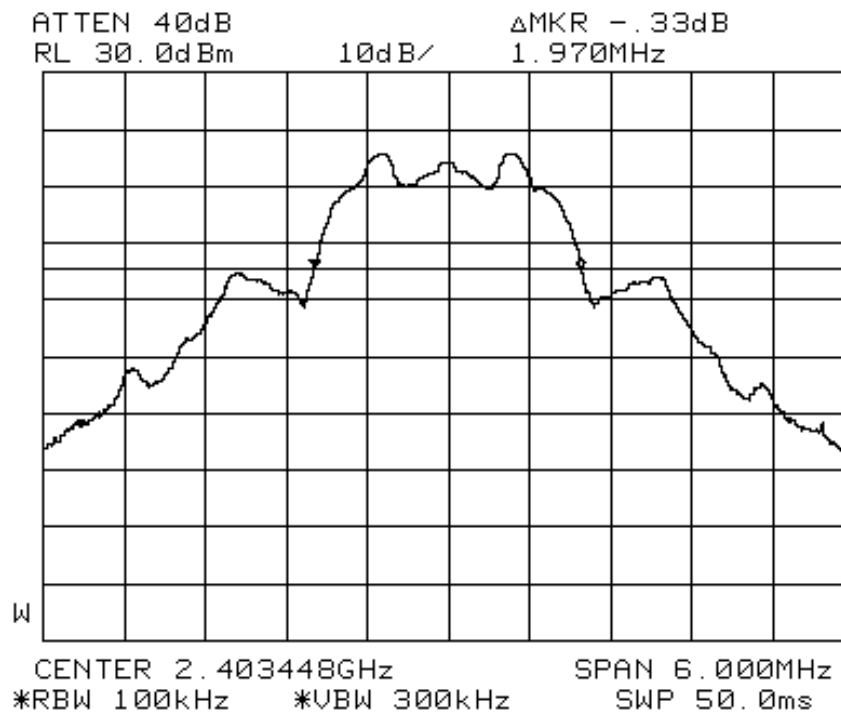


Plot 3 – Channel 0

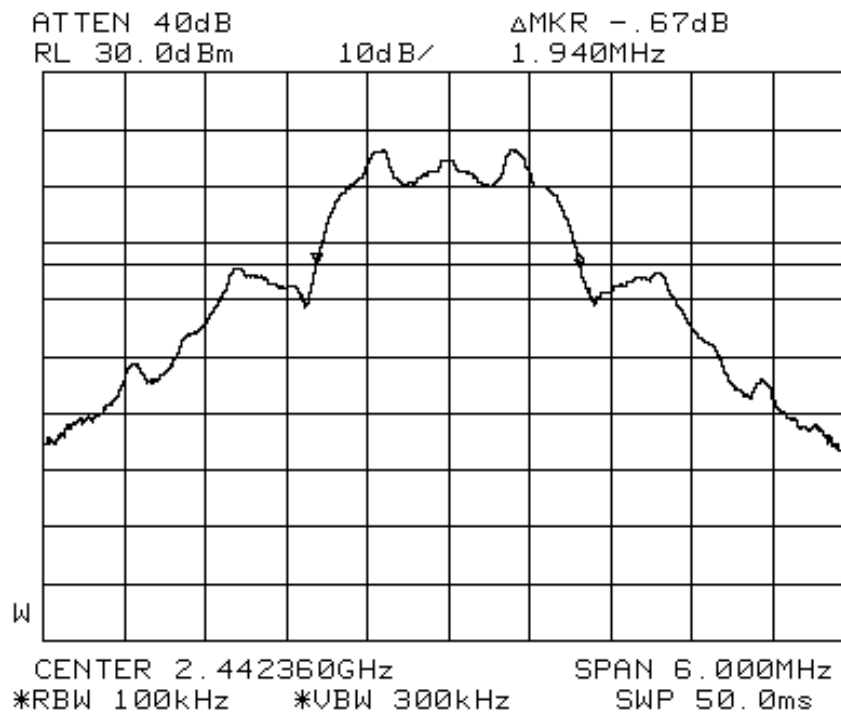

Plot 4 – Channel 7


TEST RESULTS

SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) PLOTS - WIRELESS TRANSMITTER

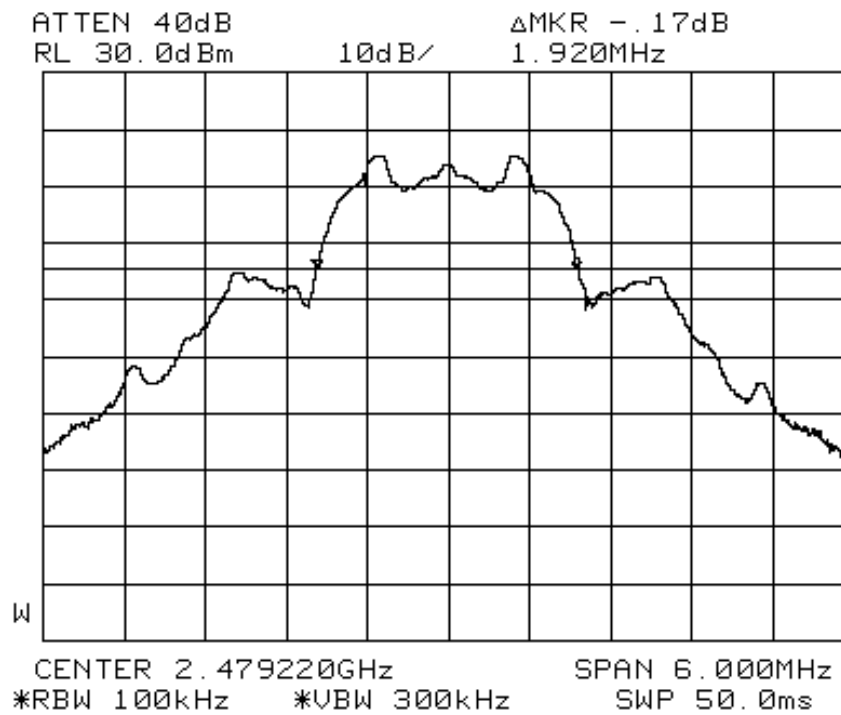


Plot 5 – Channel 14

SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) PLOTS – FLAT SPEAKER

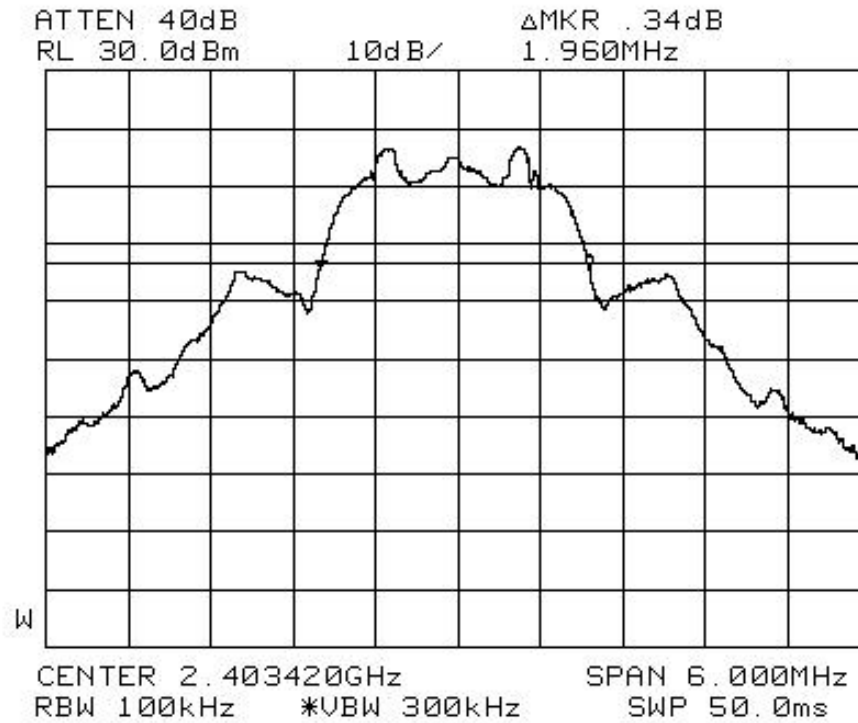


Plot 6 – Channel 0

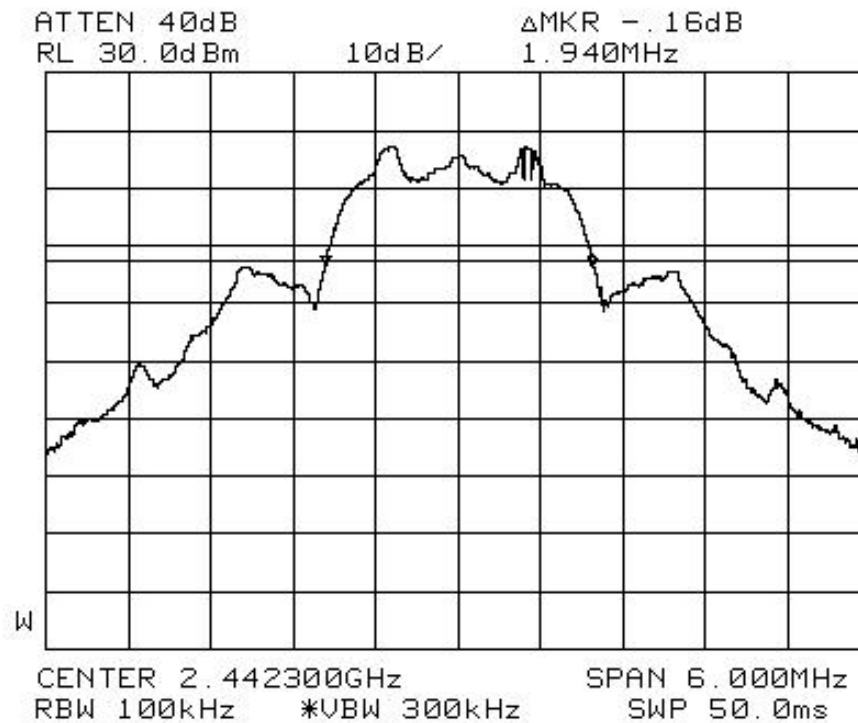

Plot 7 – Channel 7

SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) PLOTS – FLAT SPEAKER

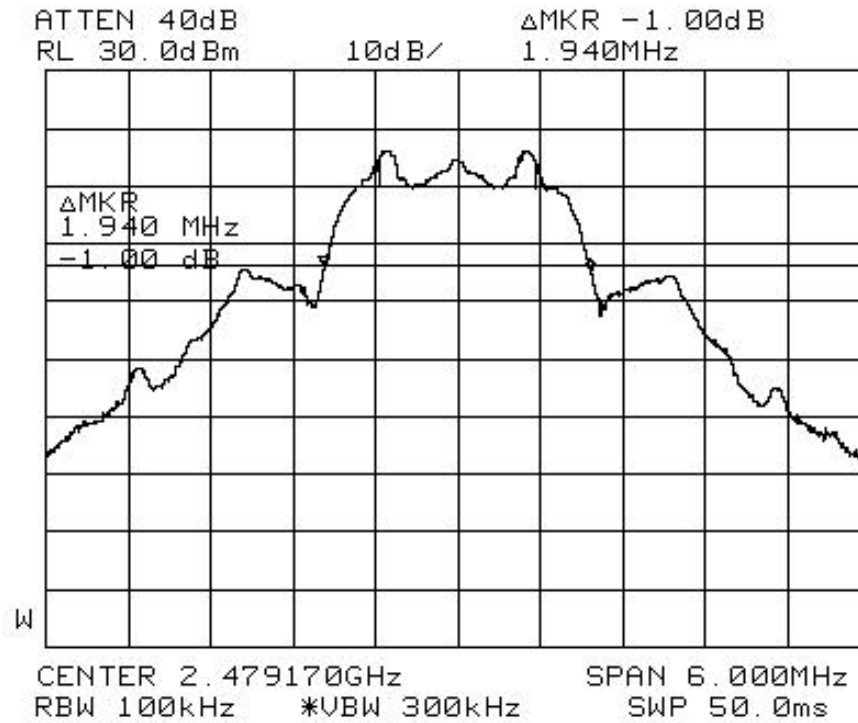

Plot 8 – Channel 14

**FCC Part 15C (15.247(a)(1)(iii)) Number of Hopping Frequencies Results**

The EUT shows compliance to the requirements of this section, which states the number of hopping frequencies shall be at least 15.

The EUT was found to have 15 hopping frequencies.


Please refer to the attached Plots 9 - 12 for wireless transmitter details.

Please refer to the attached Plots 13 - 16 for flat speaker details.

Tested by: Johnsen Tia


Notes:

|    |                                 |                      |          |
|----|---------------------------------|----------------------|----------|
| 1. | <u>Environmental Conditions</u> | Temperature          | 23°C     |
|    |                                 | Relative Humidity    | 55%      |
|    |                                 | Atmospheric Pressure | 1030mbar |

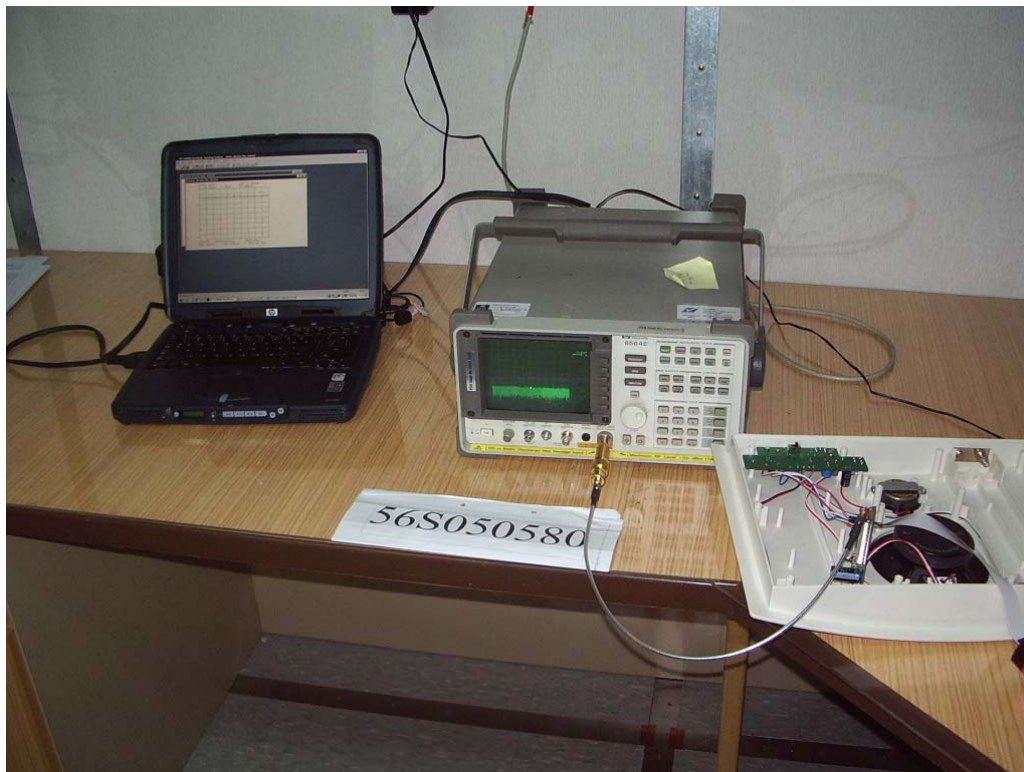


**Number of Hopping Frequencies Measurement Test Setup**

NUMBER OF HOPPING FREQUENCIES PLOTS - WIRELESS TRANSMITTER

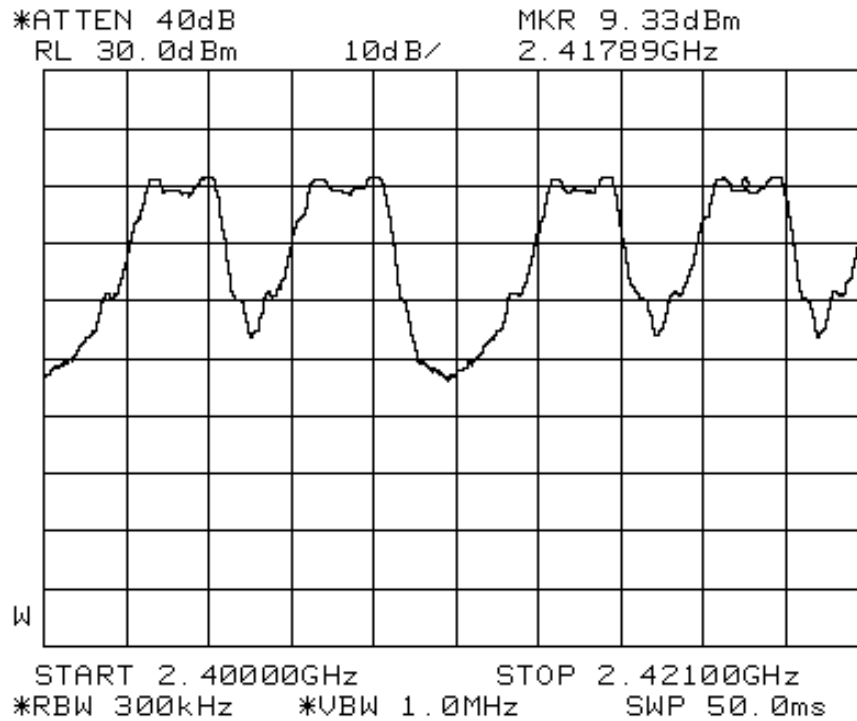


Plot 9 - Channels 0 to 3

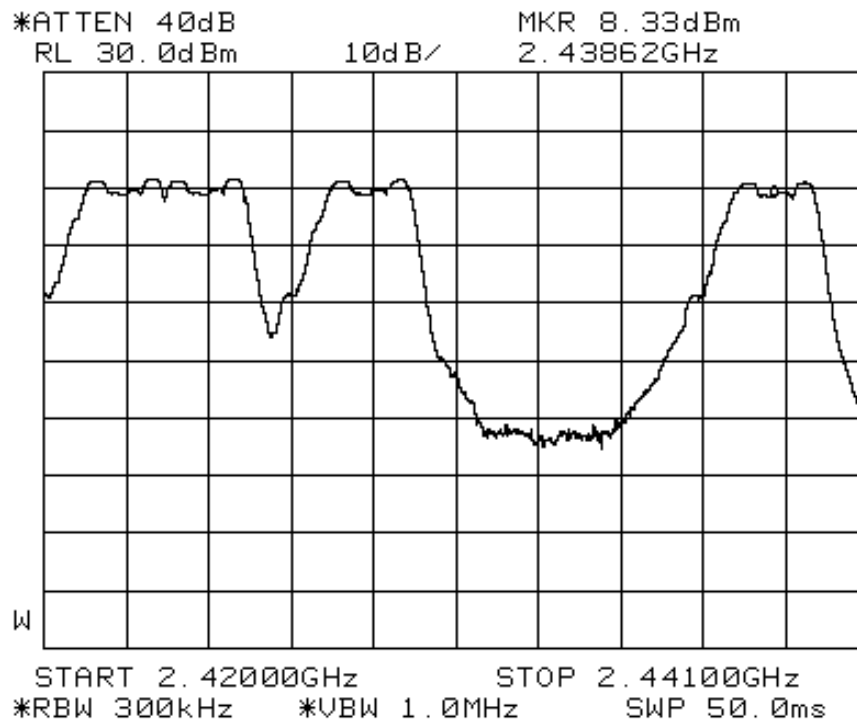


Plot 10 - Channels 4 to 7



NUMBER OF HOPPING FREQUENCIES PLOTS - WIRELESS TRANSMITTER

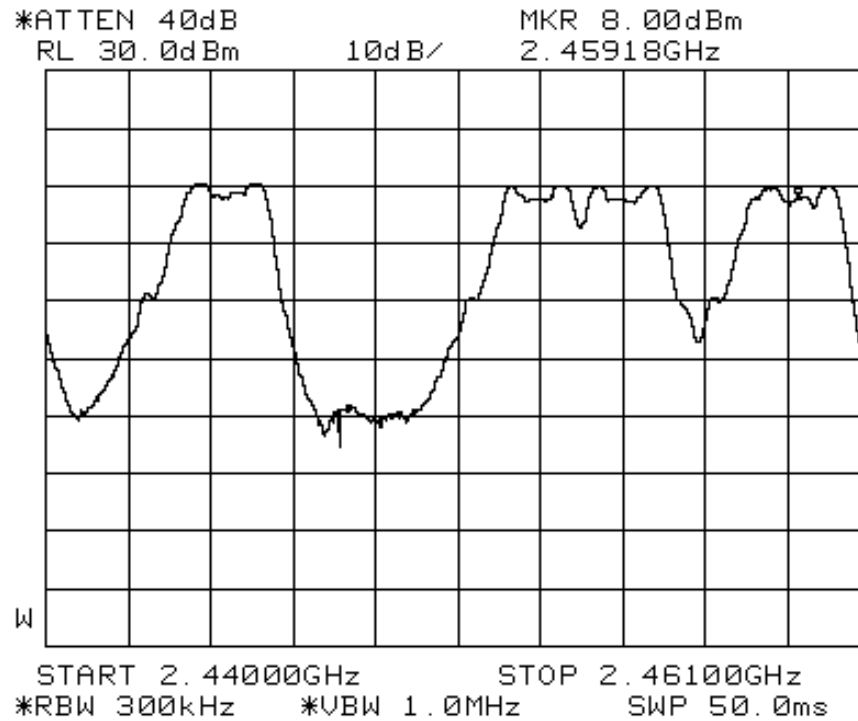


Plot 11 - Channels 8 to 11

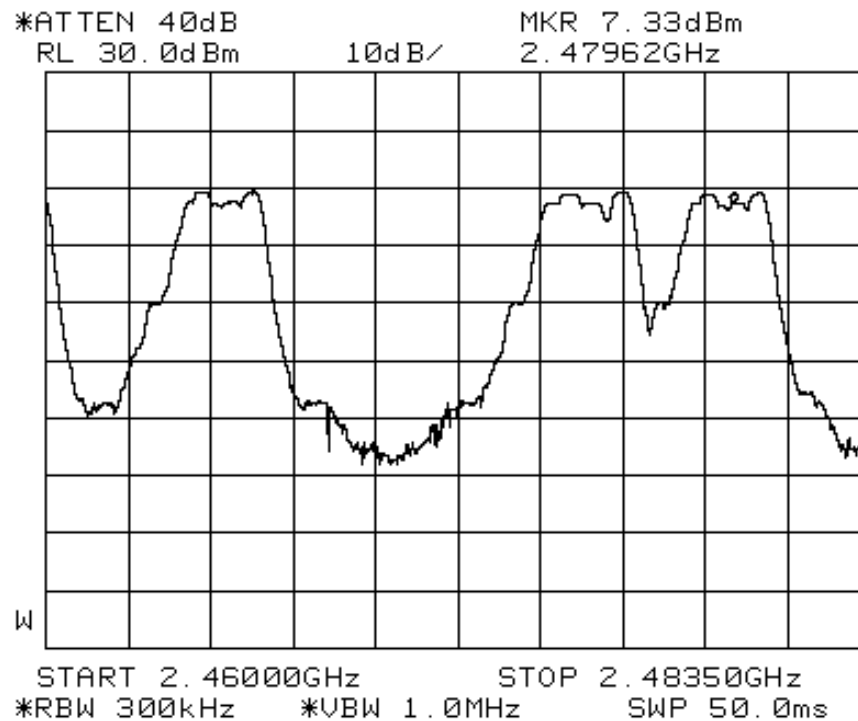


Plot 12 - Channels 12 to 14

NUMBER OF HOPPING FREQUENCIES PLOTS - FLAT SPEAKER

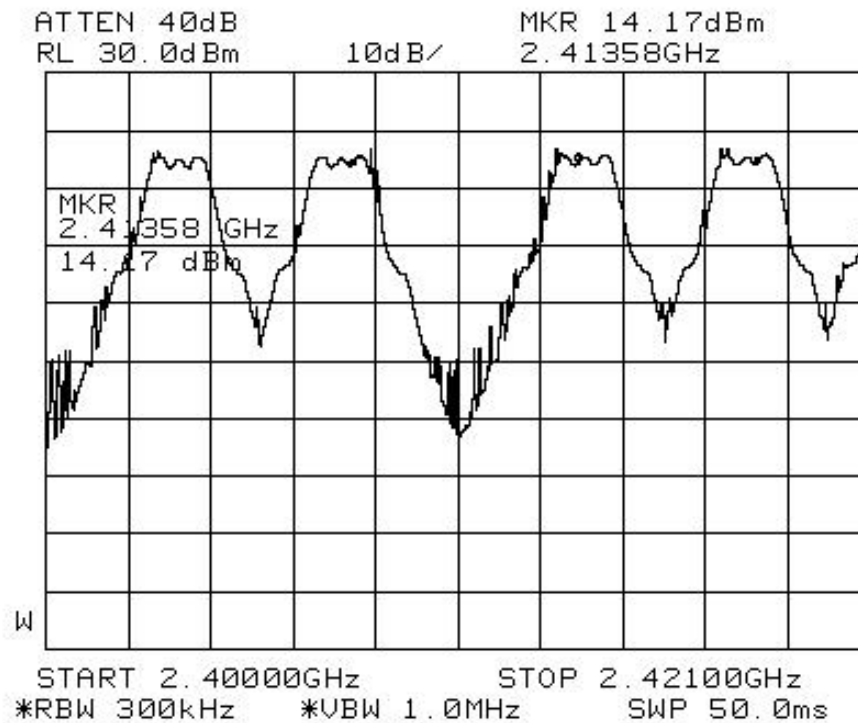


Plot 13 - Channels 0 to 3

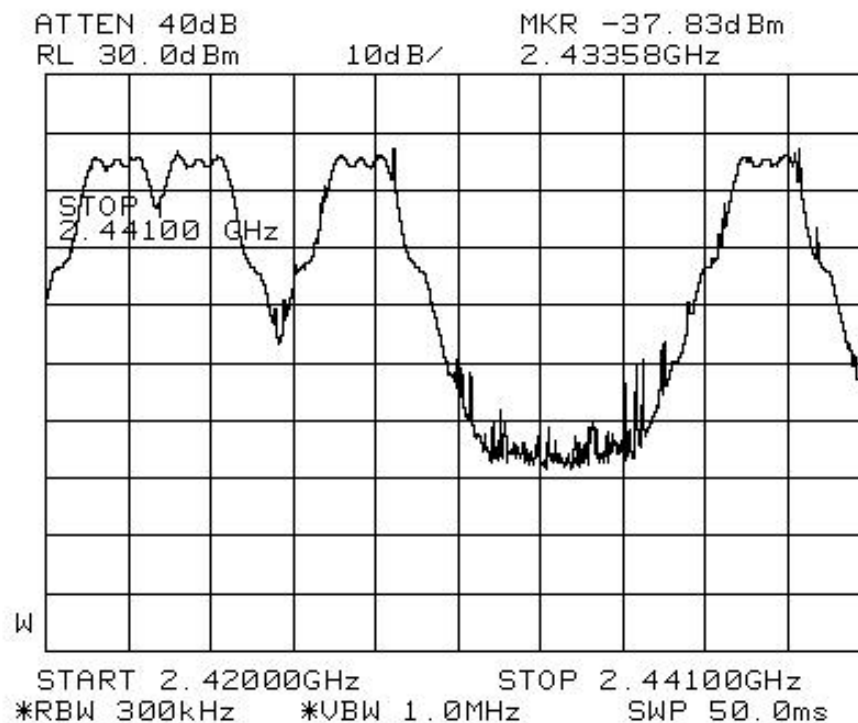


Plot 14 - Channels 4 to 7

NUMBER OF HOPPING FREQUENCIES PLOTS - FLAT SPEAKER

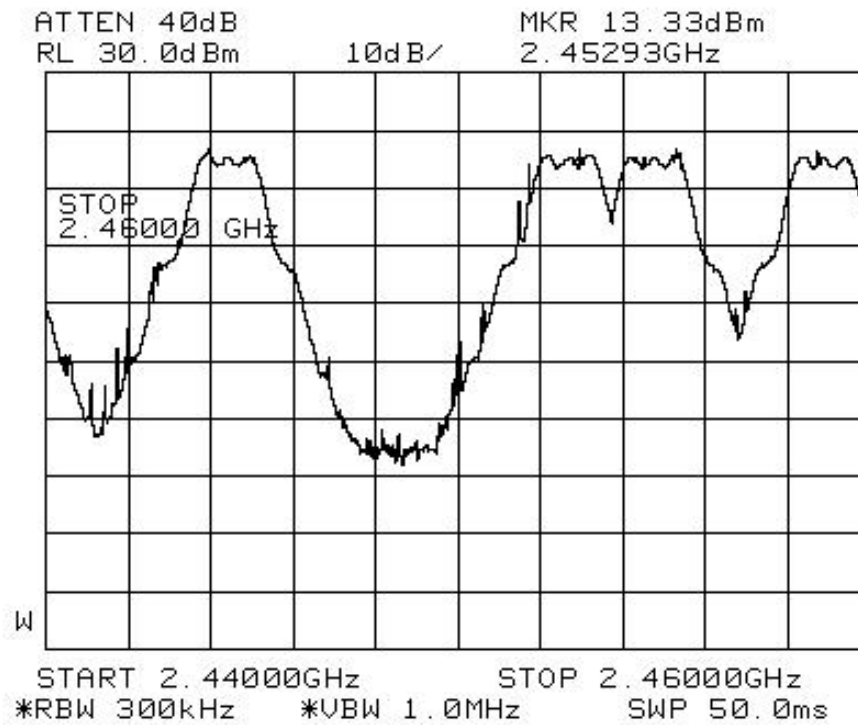

Plot 15 - Channels 8 to 11

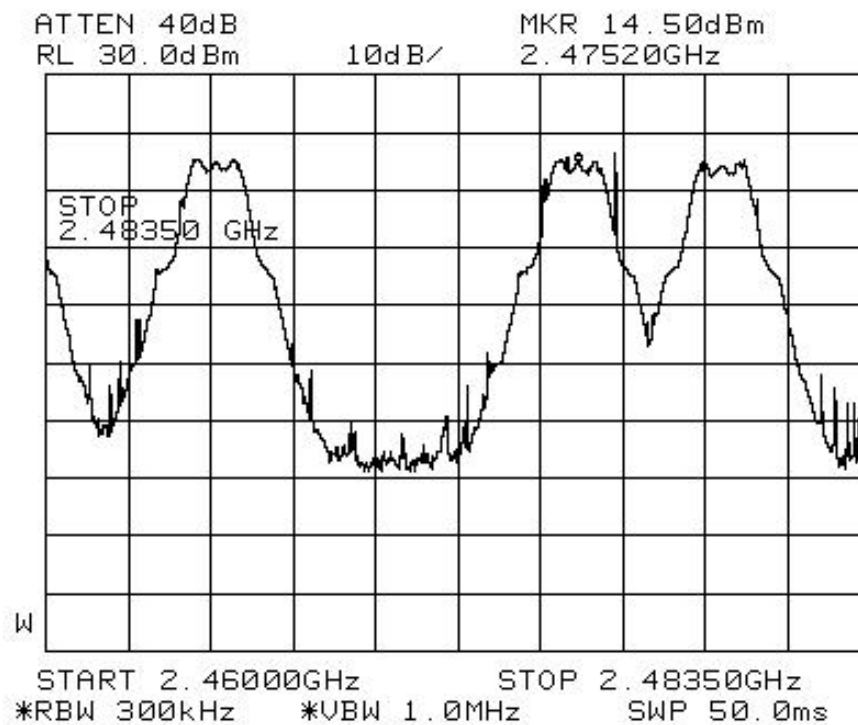

Plot 16 - Channels 12 to 14

**FCC Part 15C (15.247(a)(1)(iii)) Average Frequency Dwell Time Results**

The EUT shows compliance to the requirements of this section, which states the average time of occupancy on any frequency shall not be greater than 0.4 second within a period of 0.4 second multiplied by the number of hopping channels employed.

**Unit Under Test: Wireless Transmitter**

EUT hopping rate = 187.5 hops/s

Number of EUT hopping frequencies = 15 hops

Average Frequency Dwell Time = measured time slot length (l) x hopping rate (h) / number of hopping frequencies

| Channel | Channel Frequency (GHz) | Measured Time Slot Length for DH1 Packet(ms) | Average Frequency Dwell Time (s) | Average Occupancy Limit (s) |
|---------|-------------------------|--|----------------------------------|-----------------------------|
| 0       | 2.40333                 | 4.6700                                       | 0.0584                           | 0.4                         |
| 7       | 2.44224                 | 4.6700                                       | 0.0584                           | 0.4                         |
| 14      | 2.47910                 | 4.6700                                       | 0.0584                           | 0.4                         |

Please refer to the attached Plots 17 – 19 for details.

**Unit Under Test: Flat Speaker**

EUT hopping rate = 187.5 hops/s

Number of EUT hopping frequencies = 15 hops

Average Frequency Dwell Time = measured time slot length (l) x hopping rate (h) / number of hopping frequencies

| Channel | Channel Frequency (GHz) | Measured Time Slot Length for DH1 Packet(ms) | Average Frequency Dwell Time (s) | Average Occupancy Limit (s) |
|---------|-------------------------|--|----------------------------------|-----------------------------|
| 0       | 2.40333                 | 4.6700                                       | 0.0584                           | 0.4                         |
| 7       | 2.44224                 | 4.6700                                       | 0.0584                           | 0.4                         |
| 14      | 2.47910                 | 4.6700                                       | 0.0584                           | 0.4                         |


Please refer to the attached Plots 20 – 22 for details.

Tested by: Johnson Tia

Notes:


- Environmental Conditions

|                      |          |
|----------------------|----------|
| Temperature          | 23°C     |
| Relative Humidity    | 55%      |
| Atmospheric Pressure | 1030mbar |

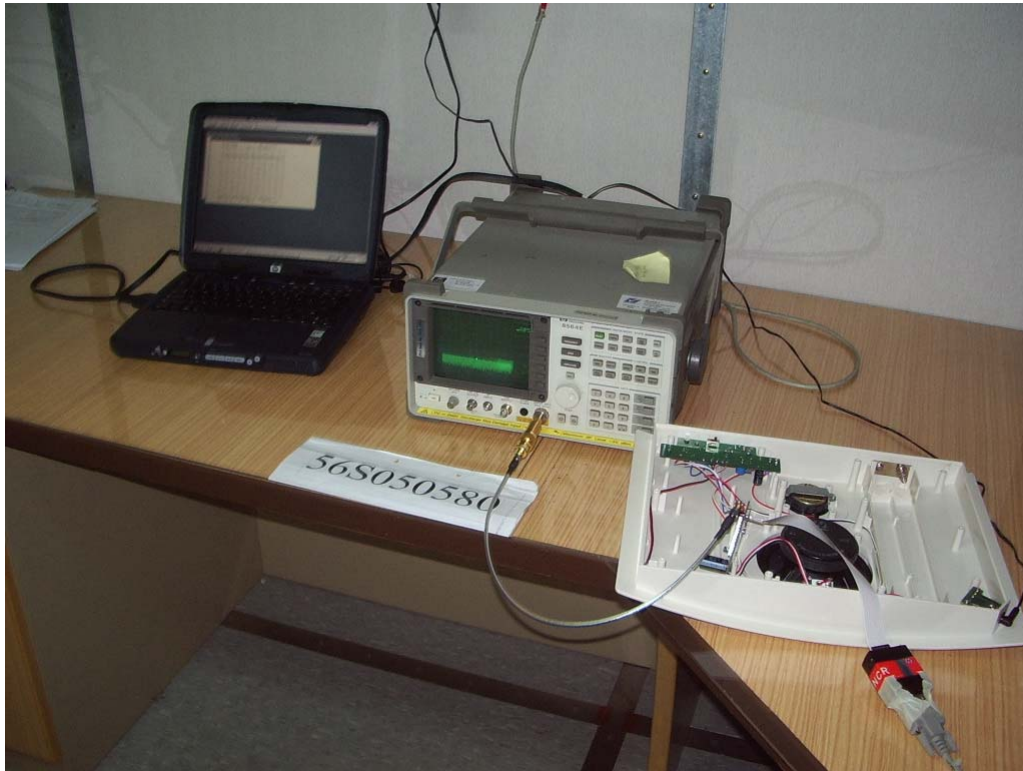


**Average Frequency Dwell Time Measurement Test Setup**

AVERAGE FREQUENCY DWELL TIME PLOTS - WIRELESS TRANSMITTER

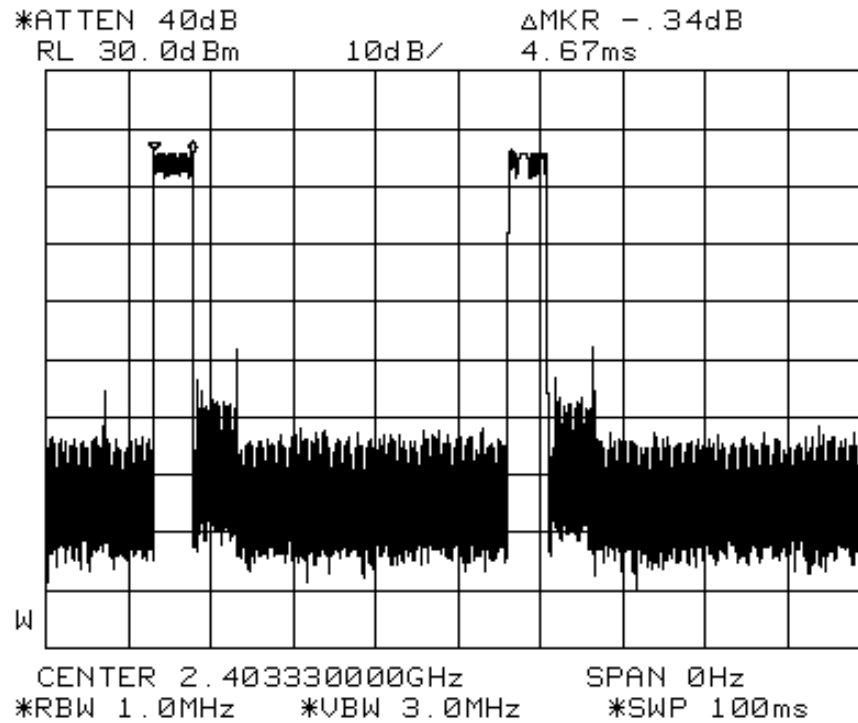


Plot 17 – Channel 0

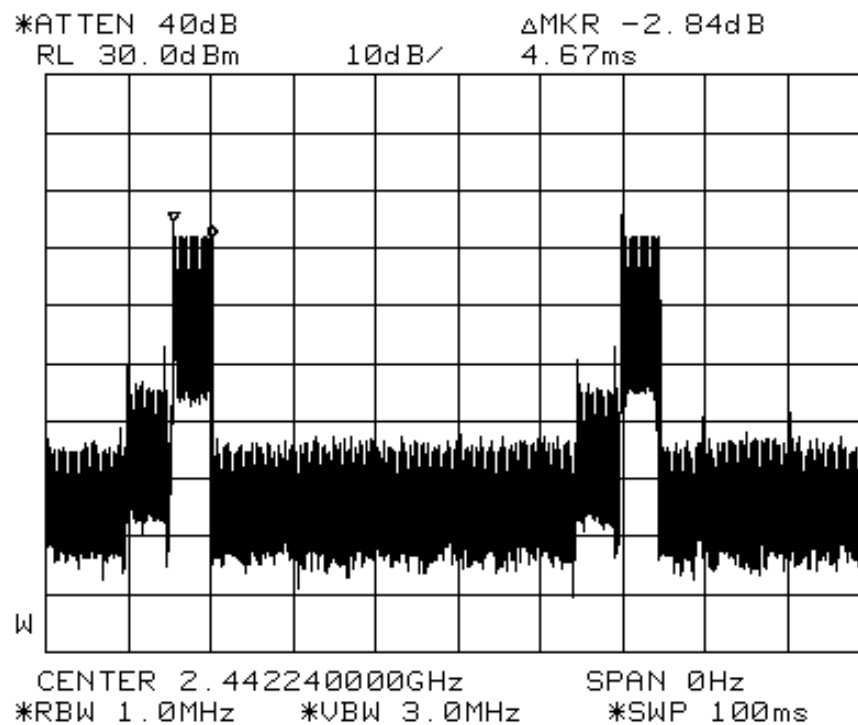


Plot 18 – Channel 7

AVERAGE FREQUENCY DWELL TIME PLOTS - WIRELESS TRANSMITTER

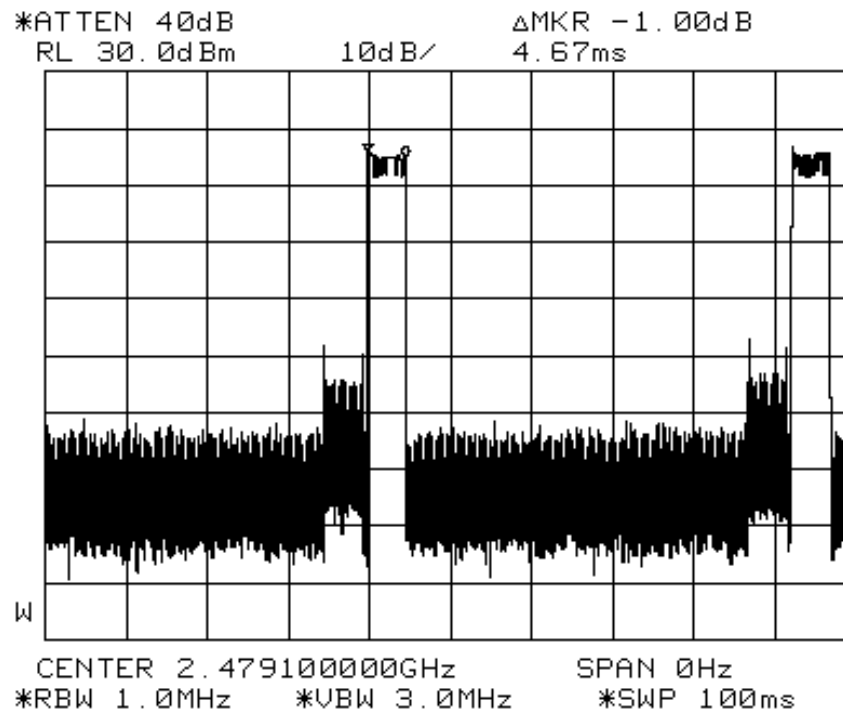


Plot 19 – Channel 14

AVERAGE FREQUENCY DWELL TIME PLOTS - FLAT SPEAKER

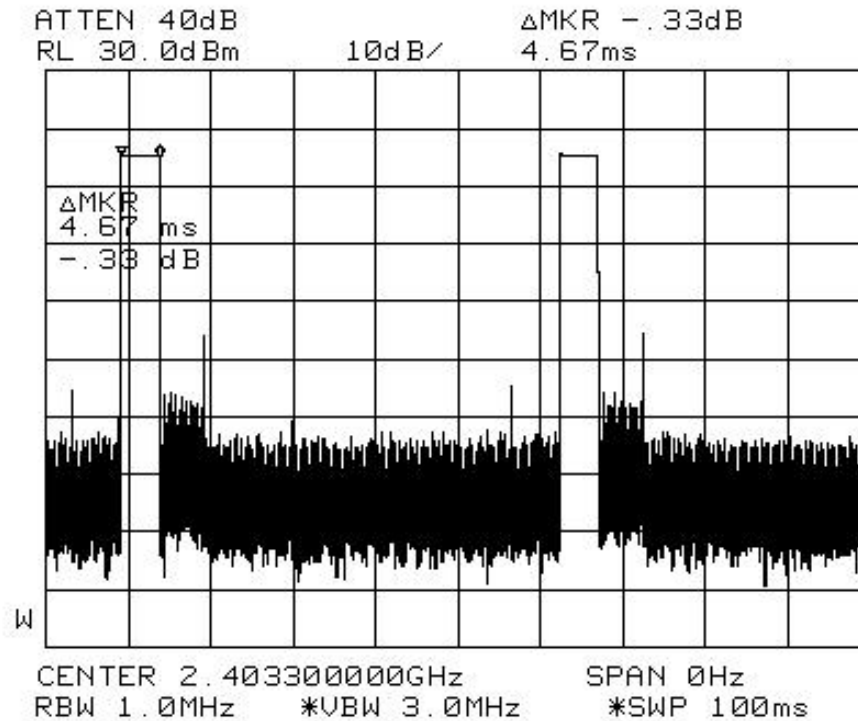


Plot 20 – Channel 0

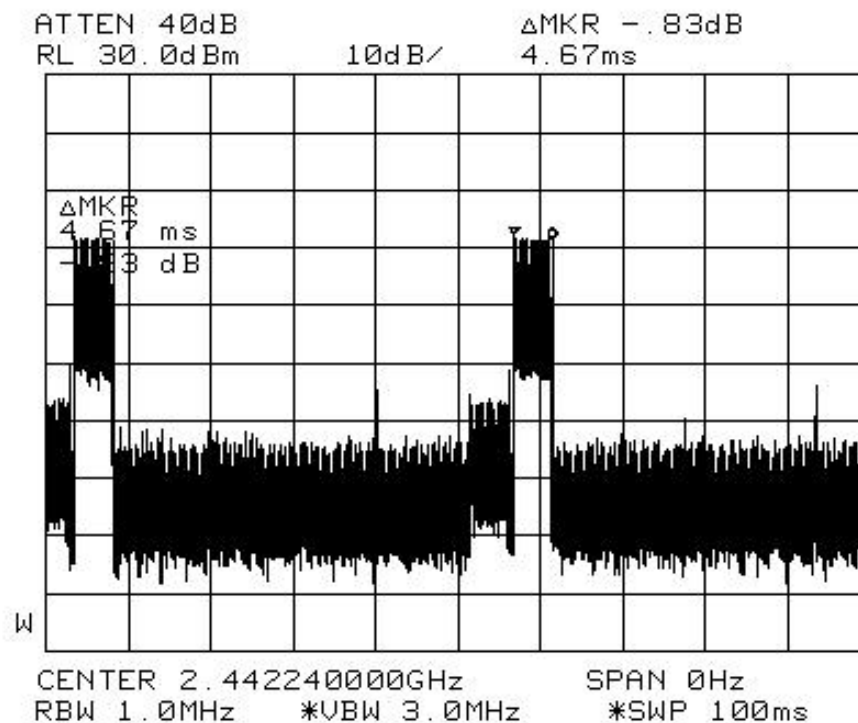

Plot 21 – Channel 7



AVERAGE FREQUENCY DWELL TIME PLOTS - FLAT SPEAKER

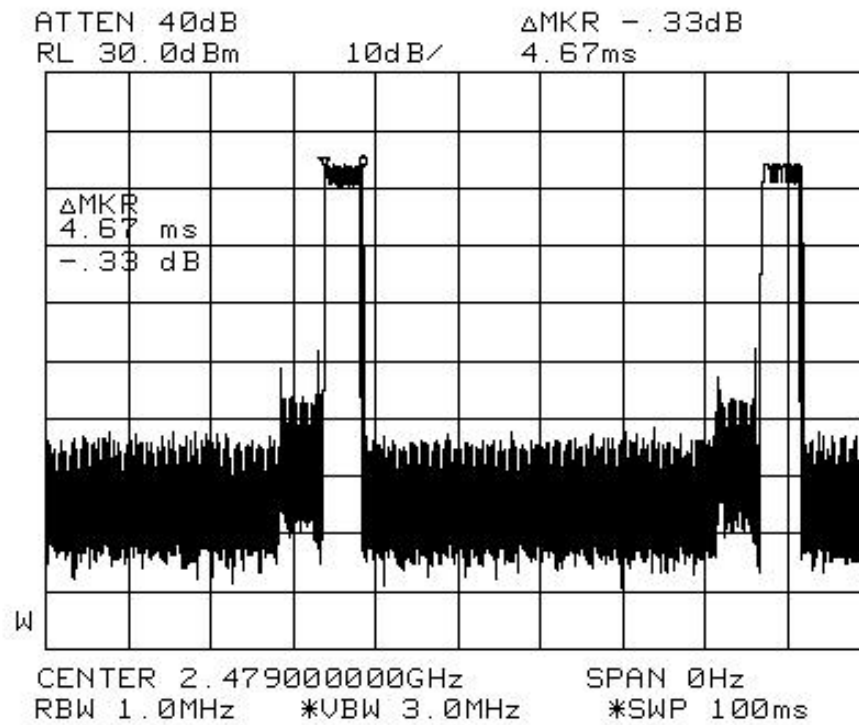

Plot 22 – Channel 14

**FCC Part 15C (15.247(b)(1)) Maximum Peak Power Results**

The EUT shows compliance to the requirements of this section, which states the peak power of an intentional radiator (EUT) for frequency hopping systems (other than frequency hopping systems employing at 75 non-overlapping channels) shall not exceed 21dBm (125mW).

The maximum peak power for Channels 0, 7 and 14 at 2.40333GHz, 2.44224GHz and 2.47910GHz of both wireless transmitter and flat speaker were investigated and found below 21dBm (125mW).

**Unit Under Test: Wireless Transmitter**

| Channel | Channel Frequency (GHz) | Maximum Peak Power (W) | Limit (W) |
|---------|-------------------------|------------------------|-----------|
| 0       | 2.40333                 | 0.062                  | 0.125     |
| 7       | 2.44224                 | 0.059                  | 0.125     |
| 14      | 2.47910                 | 0.058                  | 0.125     |

**Unit Under Test: Flat Speaker**


| Channel | Channel Frequency (GHz) | Maximum Peak Power (W) | Limit (W) |
|---------|-------------------------|------------------------|-----------|
| 0       | 2.40333                 | 0.067                  | 0.125     |
| 7       | 2.44224                 | 0.060                  | 0.125     |
| 14      | 2.47910                 | 0.062                  | 0.125     |

Tested by: Johnsen Tia

**Notes:**

- Environmental Conditions**

|                      |          |
|----------------------|----------|
| Temperature          | 23°C     |
| Relative Humidity    | 55%      |
| Atmospheric Pressure | 1030mbar |
- Power analyser of Universal Radio Communication Tester was used for power measurement with peak detection as mode of measurement. The power analyser mode supports a wideband power measurement ranging from 100kHz to 2700MHz.

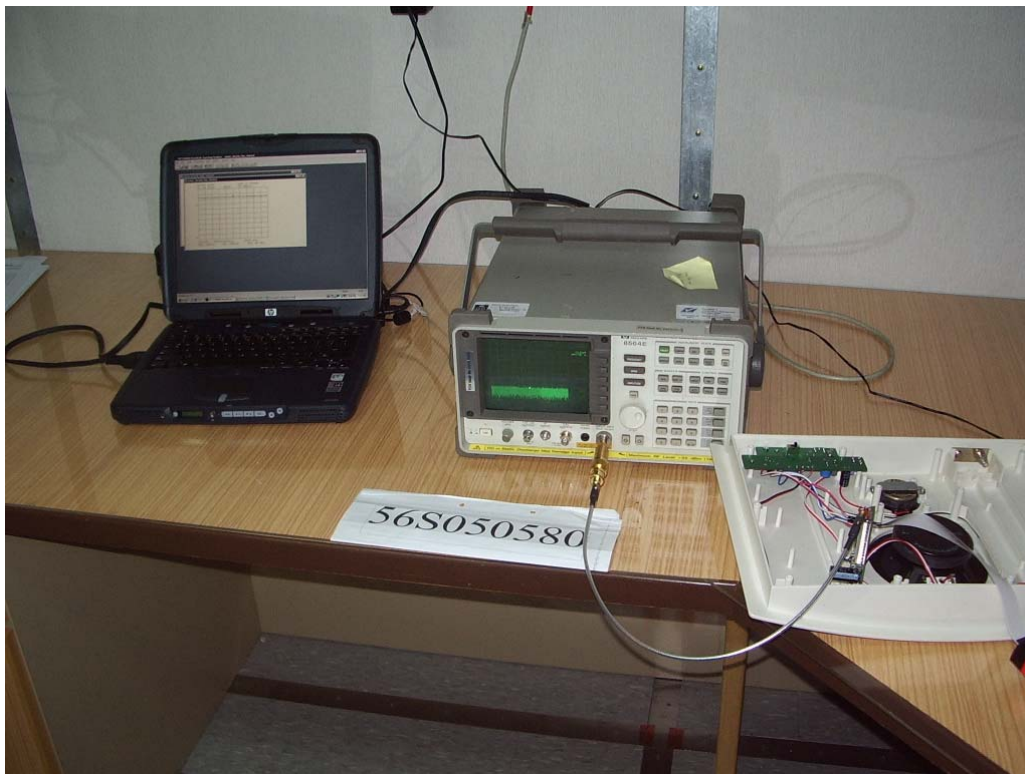

**Maximum Peak Power Measurement Test Setup**

**FCC Part 15C (15.247(d)) RF Conducted Spurious Emissions & Band Edge Compliance at the Transmitter Antenna Results**

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the RF power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The RF conducted spurious emissions were scanned from 30MHz to 25GHz for Channels 0, 7, and 14 with channel frequency at 2.40333GHz, 2.44224GHz and 2.47910GHz respectively. No significant signal was found and they were below the specified limit. Please refer to the following attached plot for details:

- Plots 23 - 28 (wireless transmitter)
- Plots 29 - 34 (flat speaker)


The conducted spurious at lower and upper band-edges (2.4000GHz and 2.4835GHz) were scanned. The spurious emissions at band-edges were found below the specified limit. Please refer to the following plots for details:

- Plots 35 - 36 (wireless transmitter)
- Plots 37 - 38 (flat speaker)

Tested by: Johnsen Tia


Notes:

|    |                                 |                      |          |
|----|---------------------------------|----------------------|----------|
| 1. | <u>Environmental Conditions</u> | Temperature          | 23°C     |
|    |                                 | Relative Humidity    | 55%      |
|    |                                 | Atmospheric Pressure | 1030mbar |

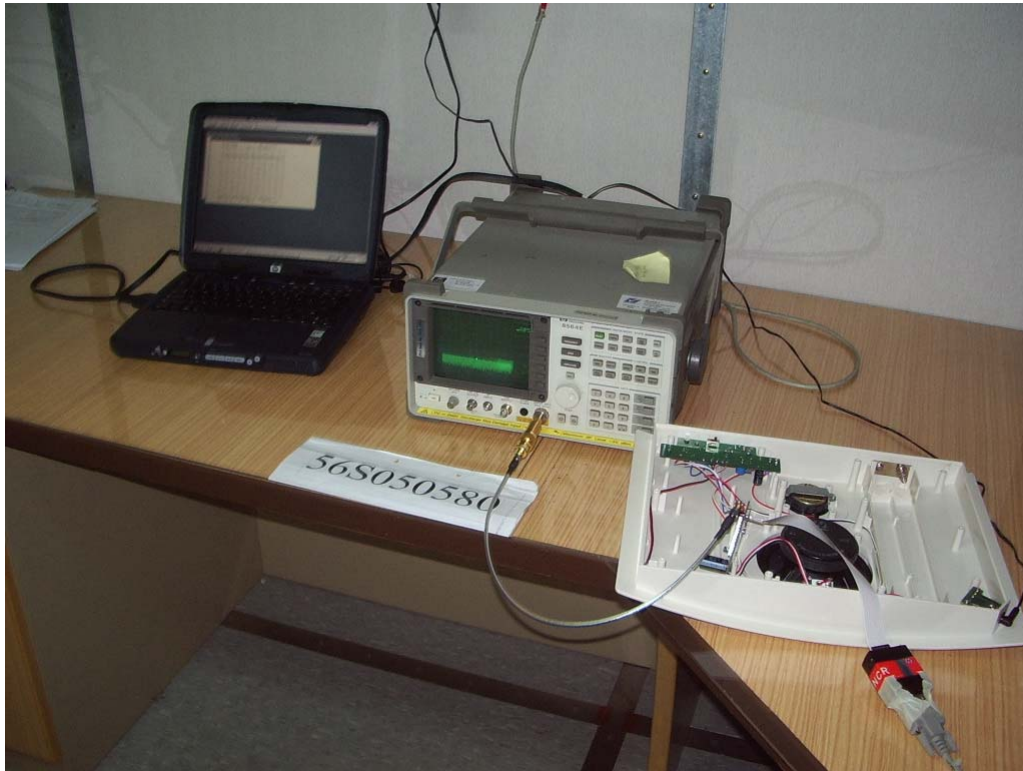


**RF Conducted Spurious & Band Edge Measurement Test Setup**

RF CONDUCTED SPURIOUS EMISSIONS PLOTS - WIRELESS TRANSMITTER

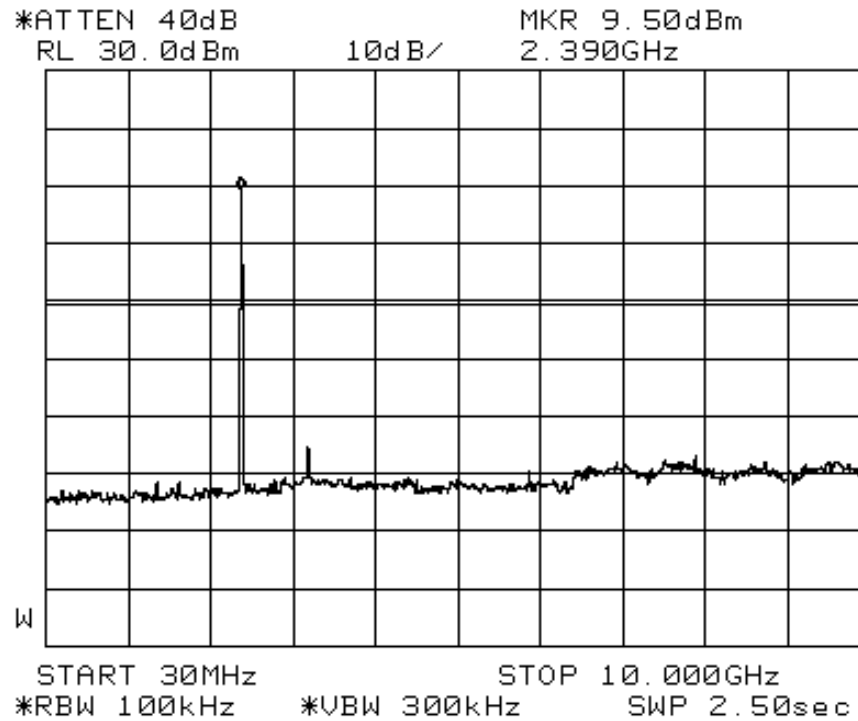


Plot 23 – Channel 0

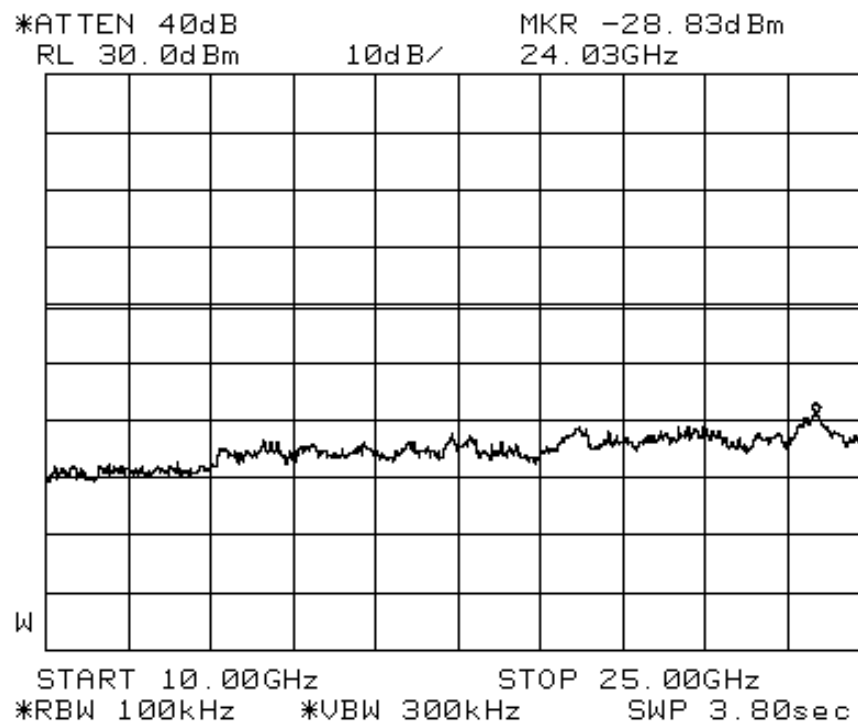


Plot 24 – Channel 0

RF CONDUCTED SPURIOUS EMISSIONS PLOTS - WIRELESS TRANSMITTER

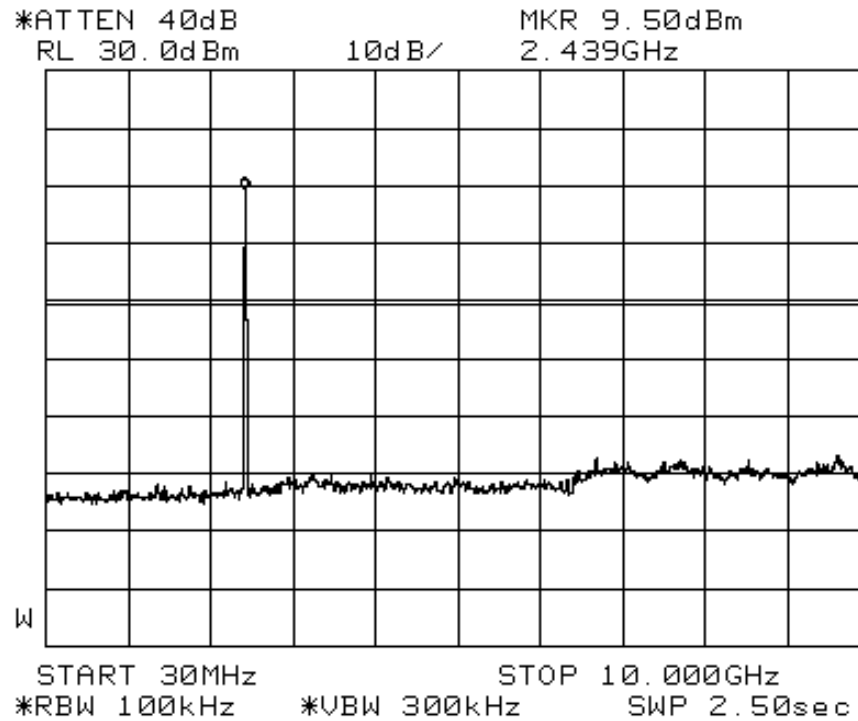


Plot 25 - Channel 7

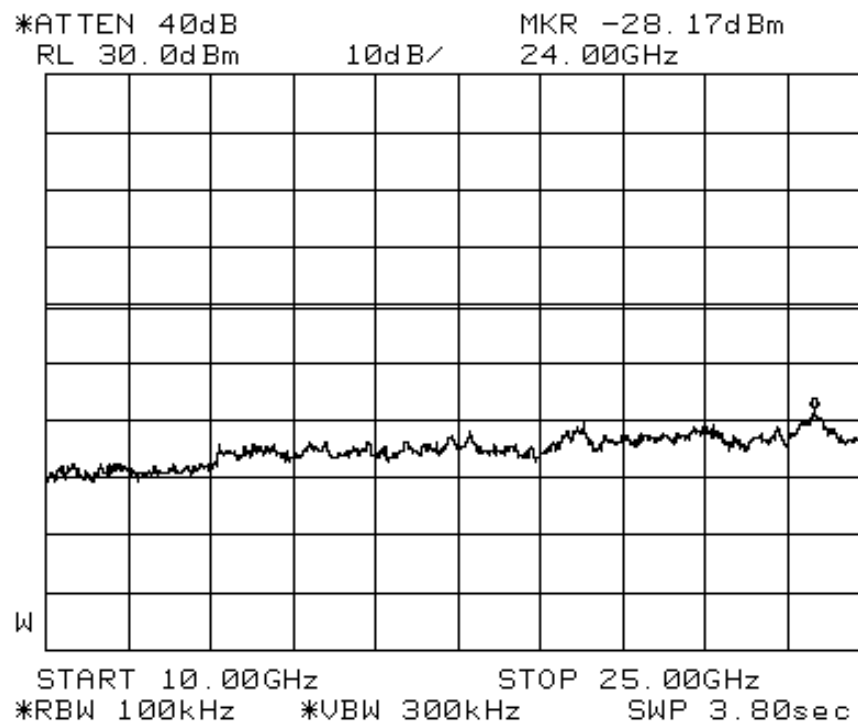


Plot 26 - Channel 7

RF CONDUCTED SPURIOUS EMISSIONS PLOTS - WIRELESS TRANSMITTER

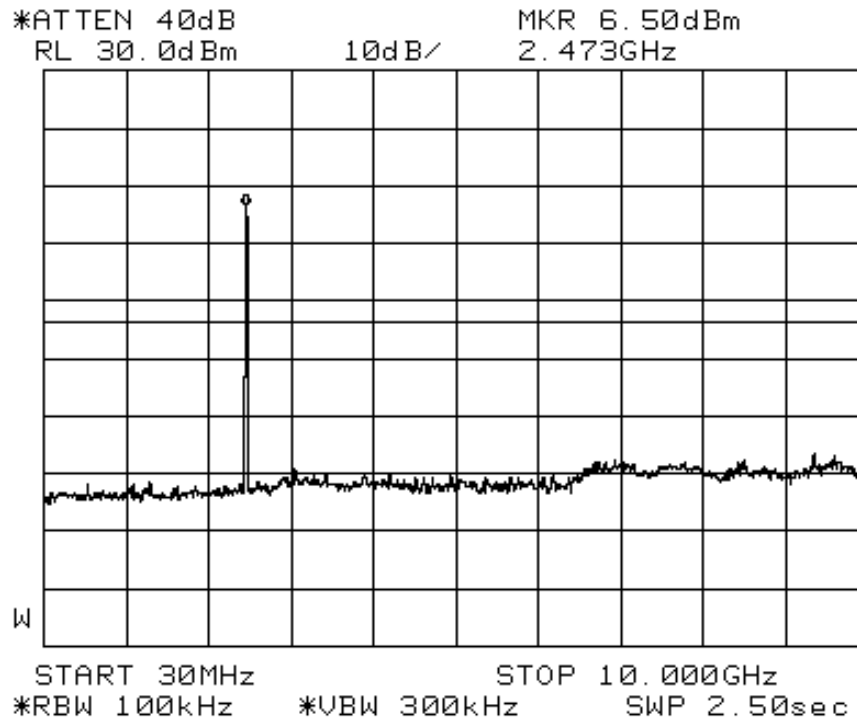


Plot 27 – Channel 14

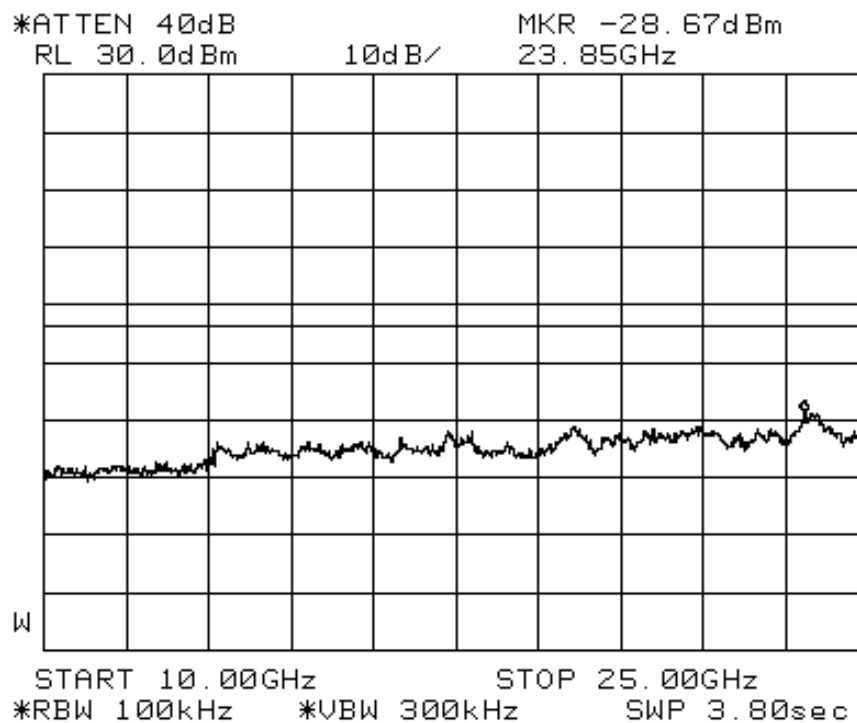


Plot 28 – Channel 14



RF CONDUCTED SPURIOUS EMISSIONS PLOTS - FLAT SPEAKER

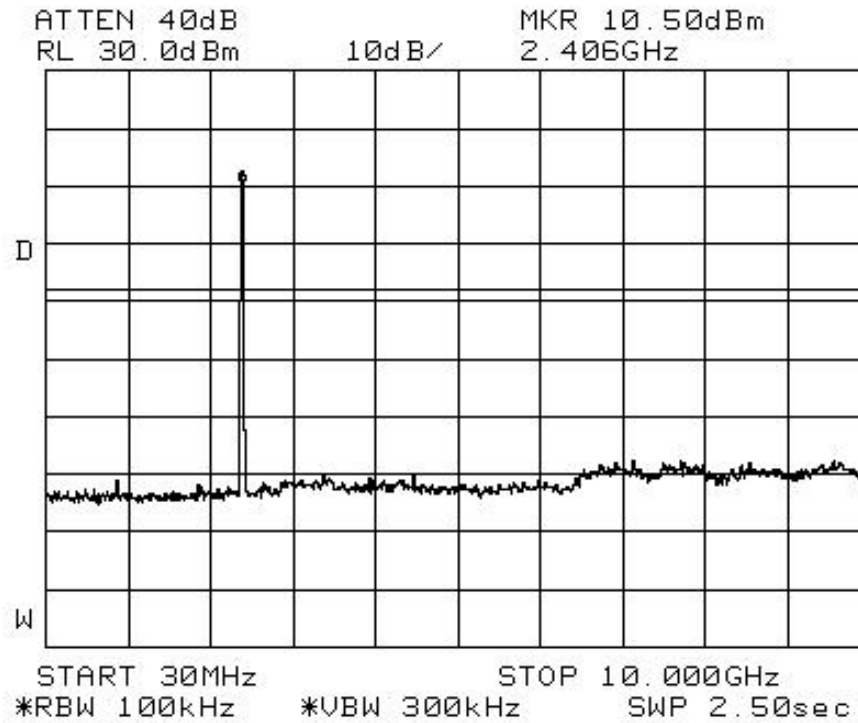


Plot 29 – Channel 0

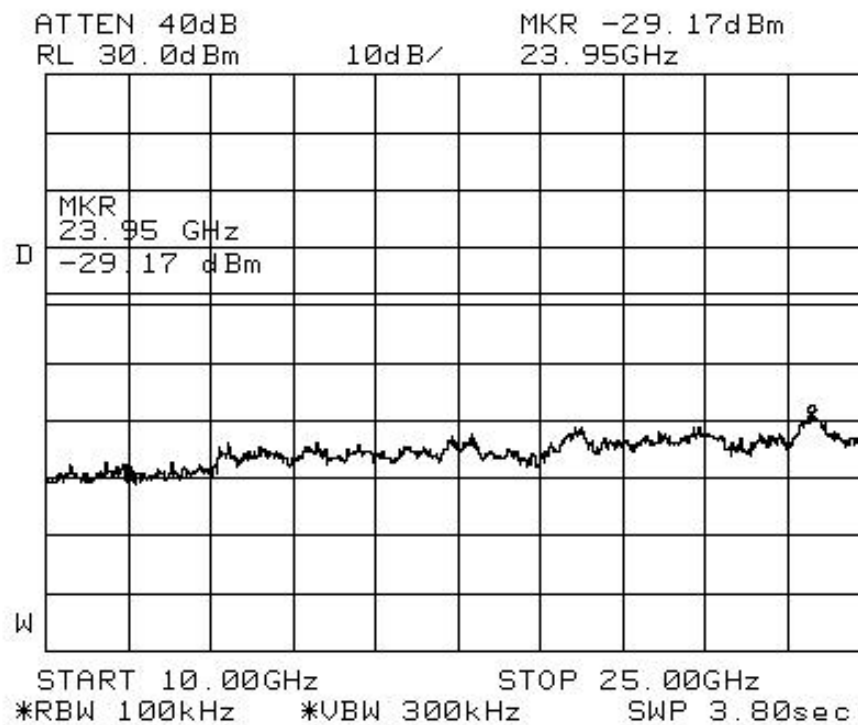


Plot 30 – Channel 0

RF CONDUCTED SPURIOUS EMISSIONS PLOTS - FLAT SPEAKER


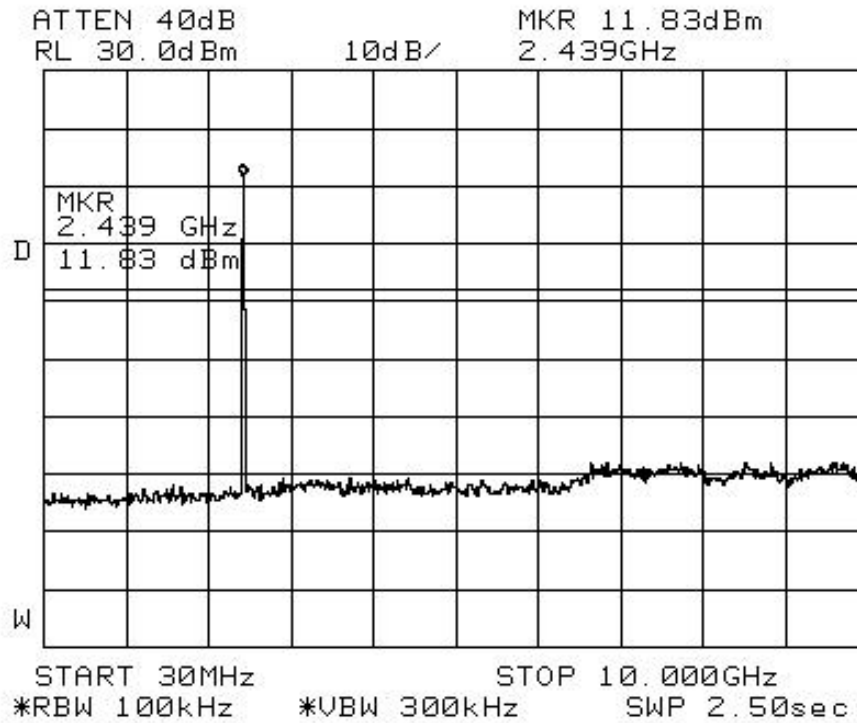


Plot 31 – Channel 7

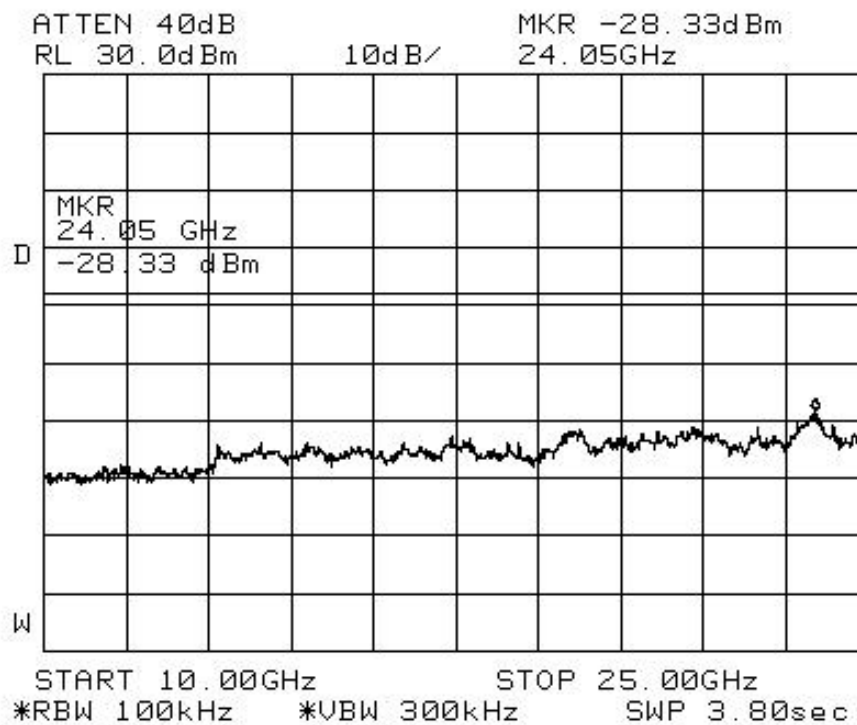


Plot 32 – Channel 7


RF CONDUCTED SPURIOUS EMISSIONS PLOTS - FLAT SPEAKER

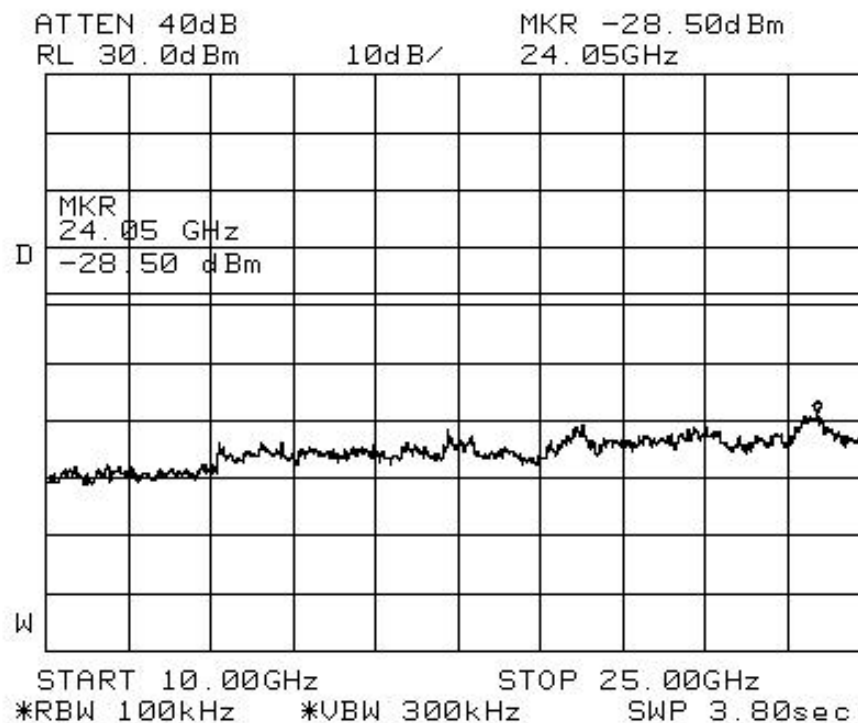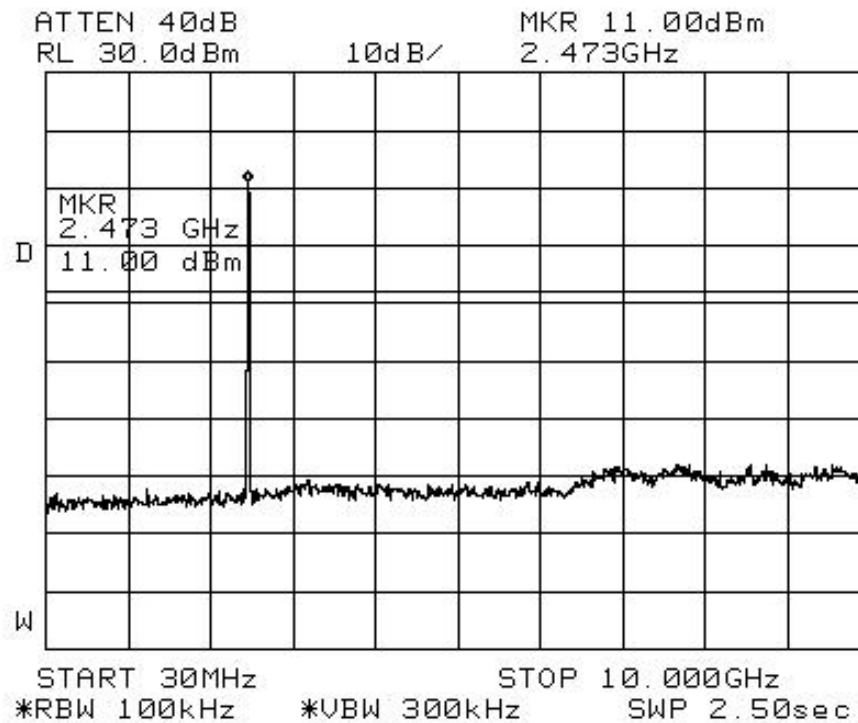

BAND EDGE COMPLIANCE PLOTS - WIRELESS TRANSMITTER

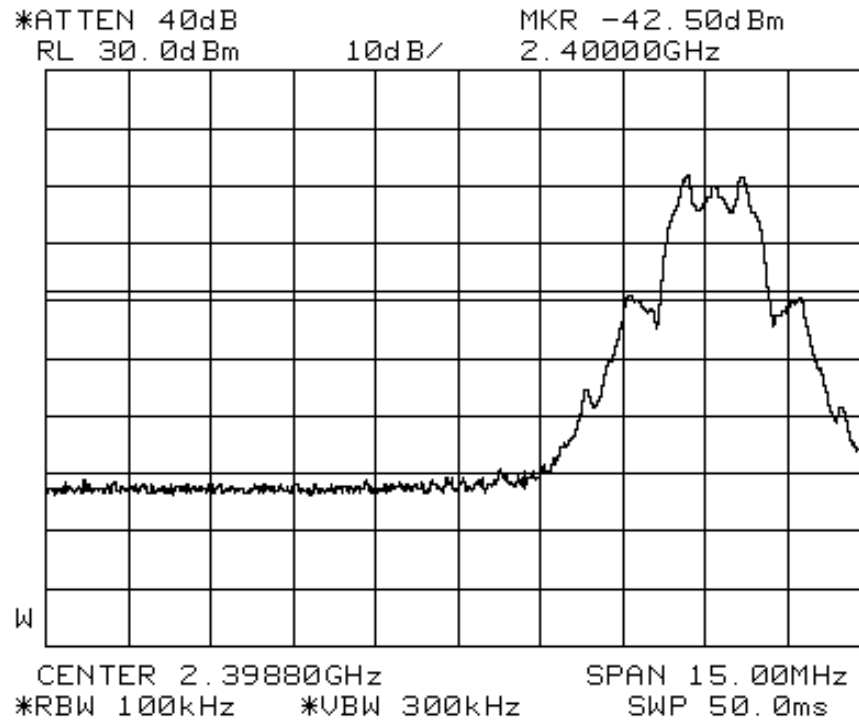


Plot 35 – Lower Band Edge at 2.40GHz

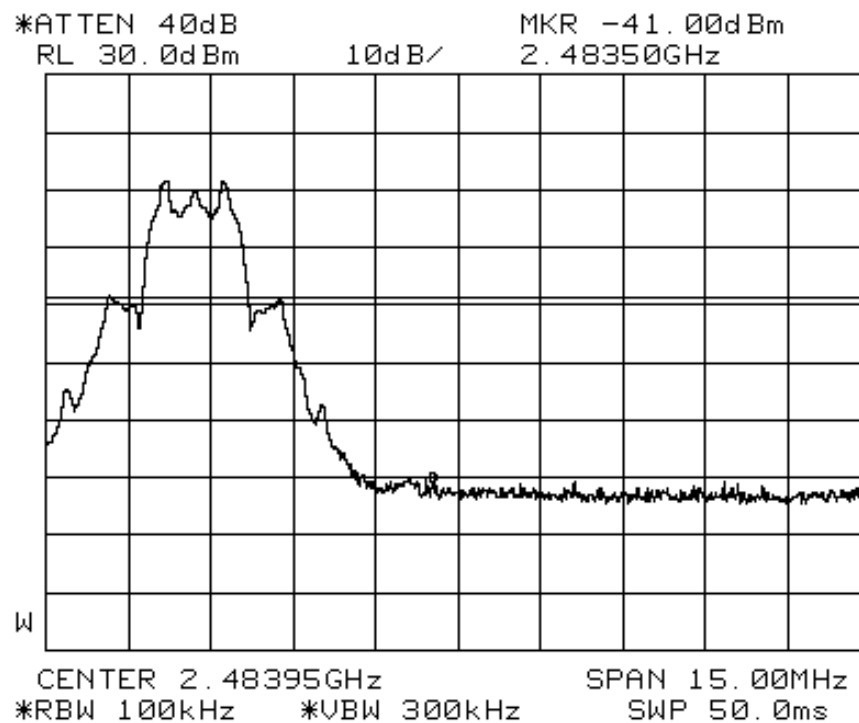


Plot 36 – Upper Band Edge at 2.4835GHz

BAND EDGE COMPLIANCE PLOTS - FLAT SPEAKER

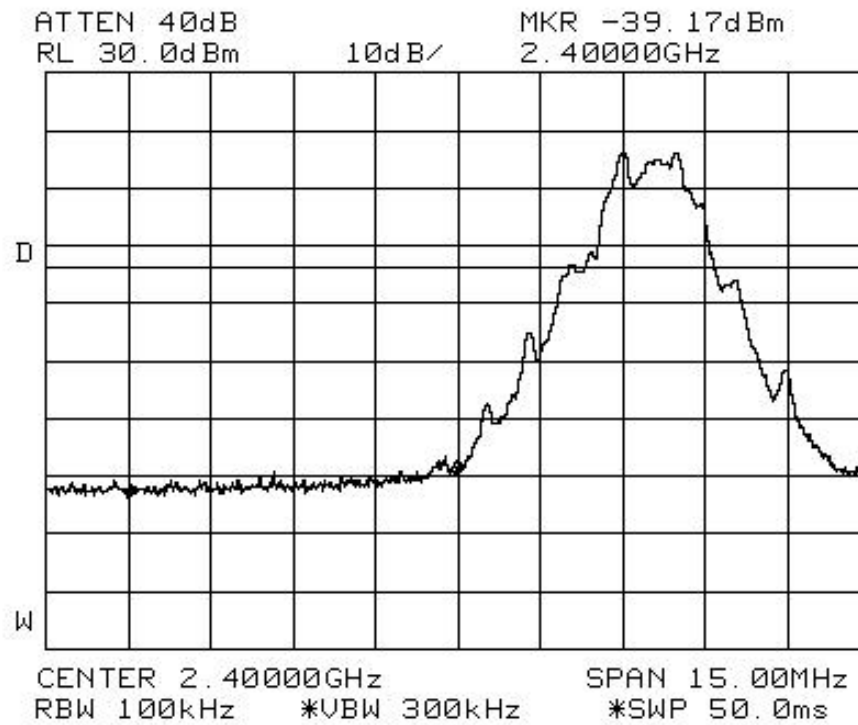

Plot 37 – Lower Band Edge at 2.40GHz

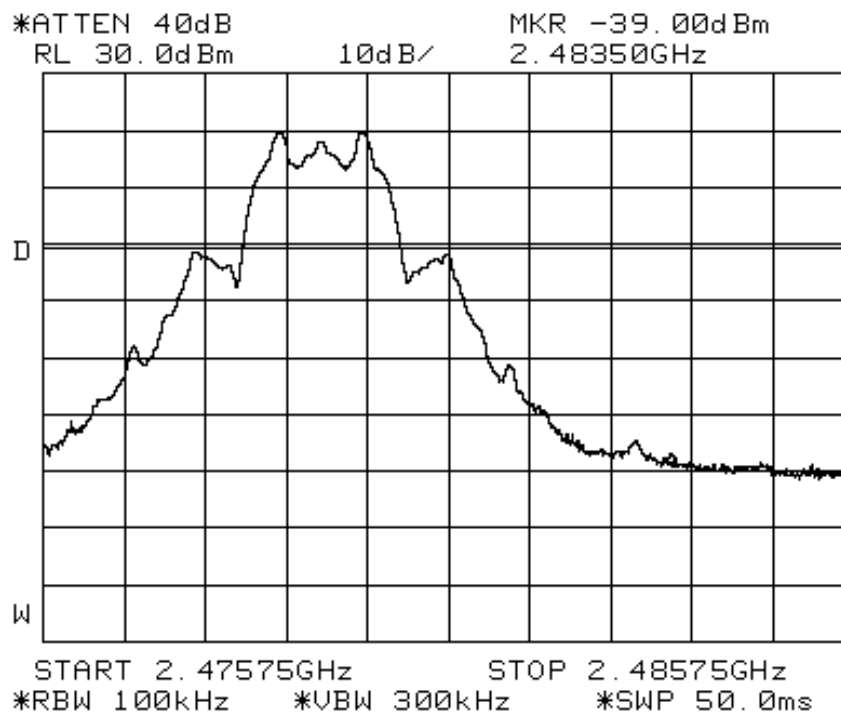

Plot 38 – Upper Band Edge at 2.4835GHz

## TEST RESULTS

### **FCC Part 15C (15.247(d)) Peak Power Spectral Density Results**

The EUT shows compliance to the requirements of this section, which states the peak power spectral density of an intentional radiator (EUT) to the antenna shall not be greater than 8dBm (6.3mW) in any 3kHz band during any time interval of continuous transmission.

#### **Unit Under Test: Wireless Transmitter**

| Channel | Channel Frequency (GHz) | Peak Power Spectral Density (mW) | Limit (mW) |
|---------|-------------------------|----------------------------------|------------|
| 0       | 2.40333                 | 1.0400                           | 6.3        |
| 7       | 2.44224                 | 0.8913                           | 6.3        |
| 14      | 2.47910                 | 0.9617                           | 6.3        |

Please refer to the attached Plots 39 – 41 for details.

#### **Unit Under Test: Flat Speaker**

| Channel | Channel Frequency (GHz) | Peak Power Spectral Density (mW) | Limit (mW) |
|---------|-------------------------|----------------------------------|------------|
| 0       | 2.40333                 | 1.0399                           | 6.3        |
| 7       | 2.44224                 | 0.8912                           | 6.3        |
| 14      | 2.47910                 | 0.9616                           | 6.3        |


Please refer to the attached Plots 42 – 44 for details.

Tested by: Johnsen Tia

Notes:


- Environmental Conditions

|                      |          |
|----------------------|----------|
| Temperature          | 23°C     |
| Relative Humidity    | 55%      |
| Atmospheric Pressure | 1030mbar |

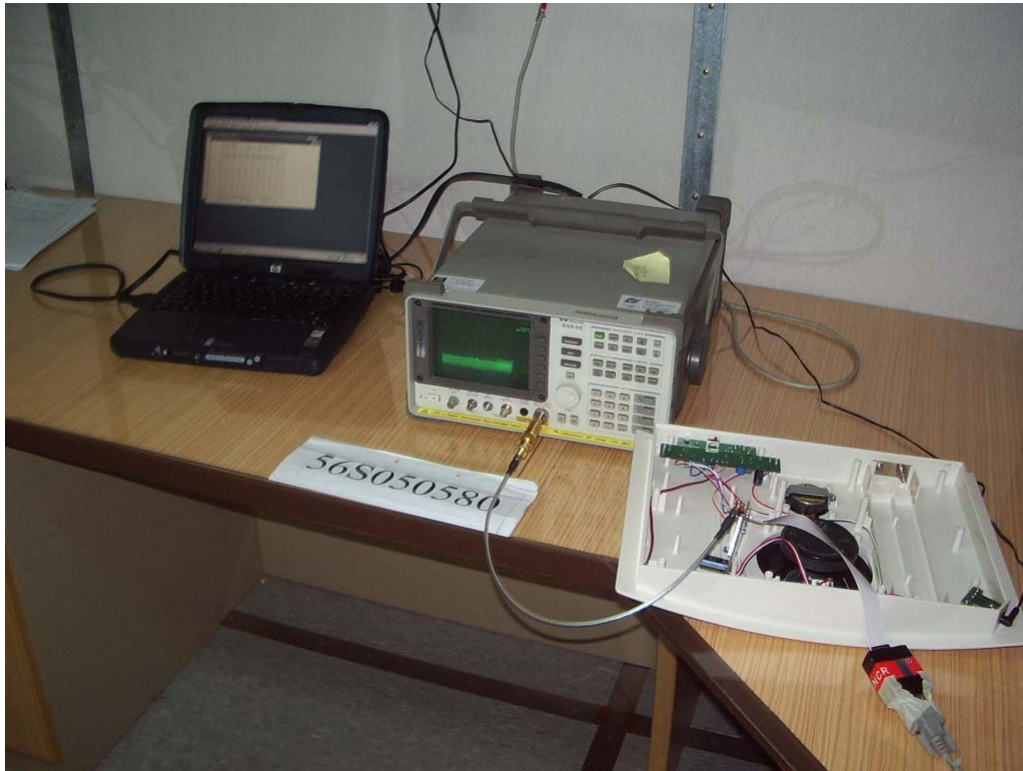


**Peak Power Spectral Density Measurement Test Setup**

PEAK POWER SPECTRAL DENSITY PLOTS - WIRELESS TRANSMITTER

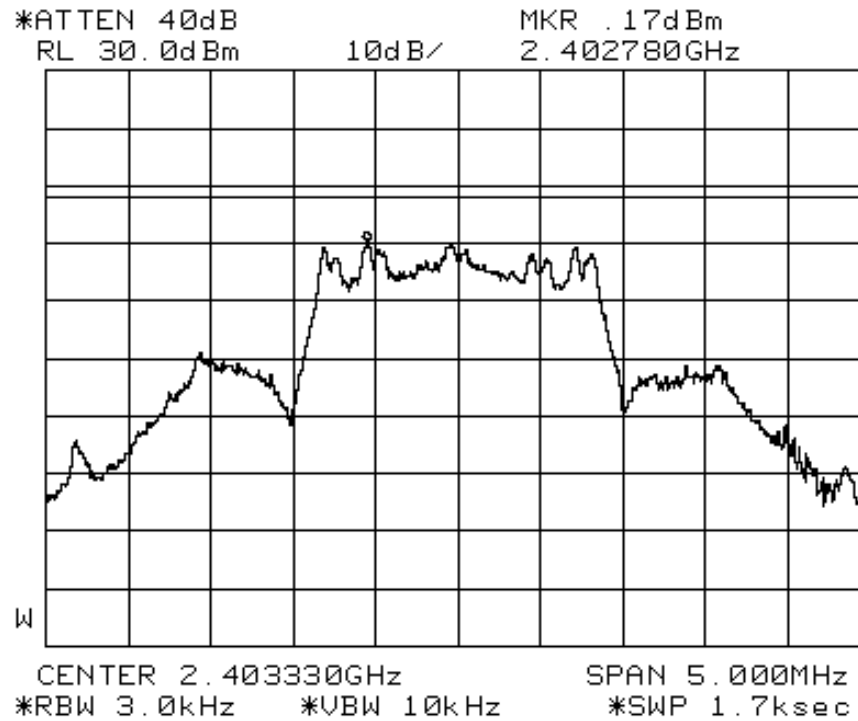


Plot 39 - Channel 0

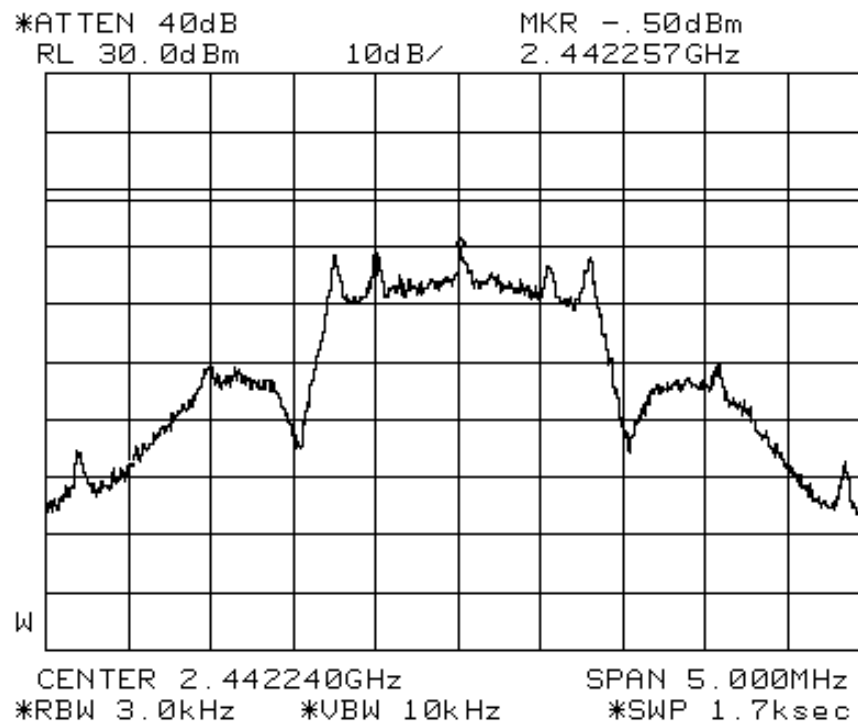

Plot 40 - Channel 7




PEAK POWER SPECTRAL DENSITY PLOTS - WIRELESS TRANSMITTER

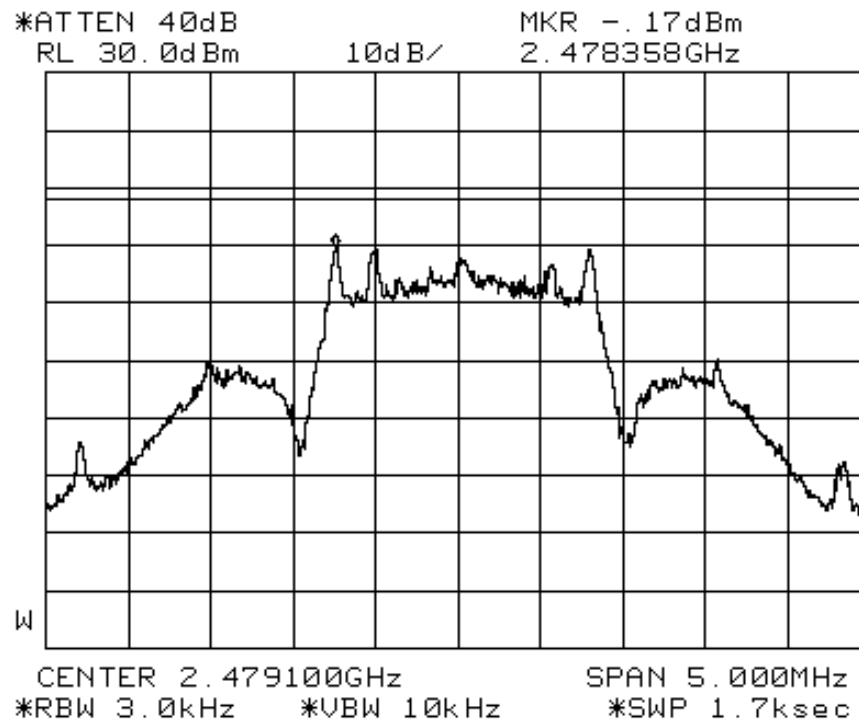


Plot 41 - Channel 14

PEAK POWER SPECTRAL DENSITY PLOTS – FLAT SPEAKER

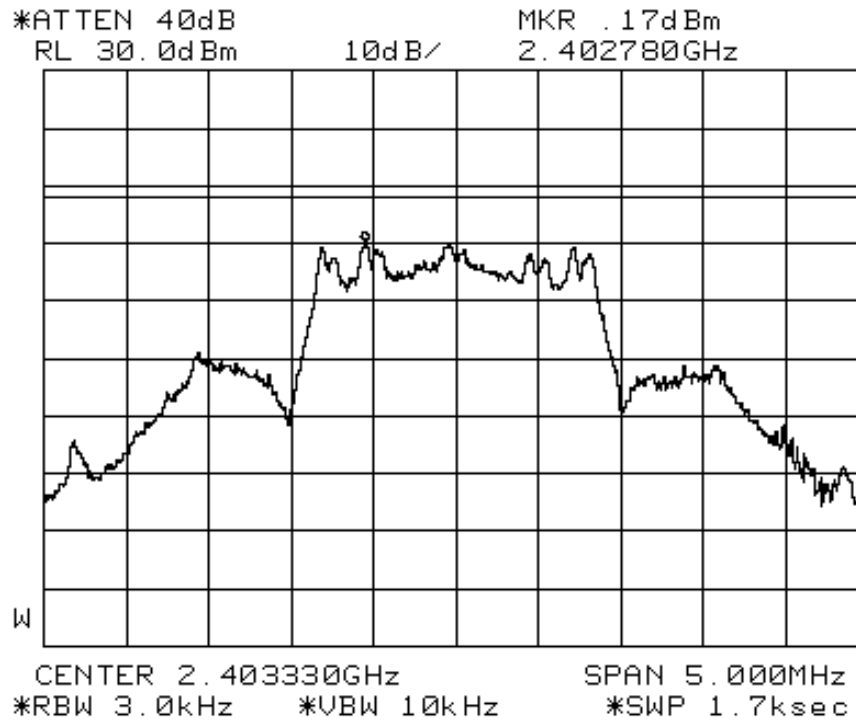


Plot 42 - Channel 0

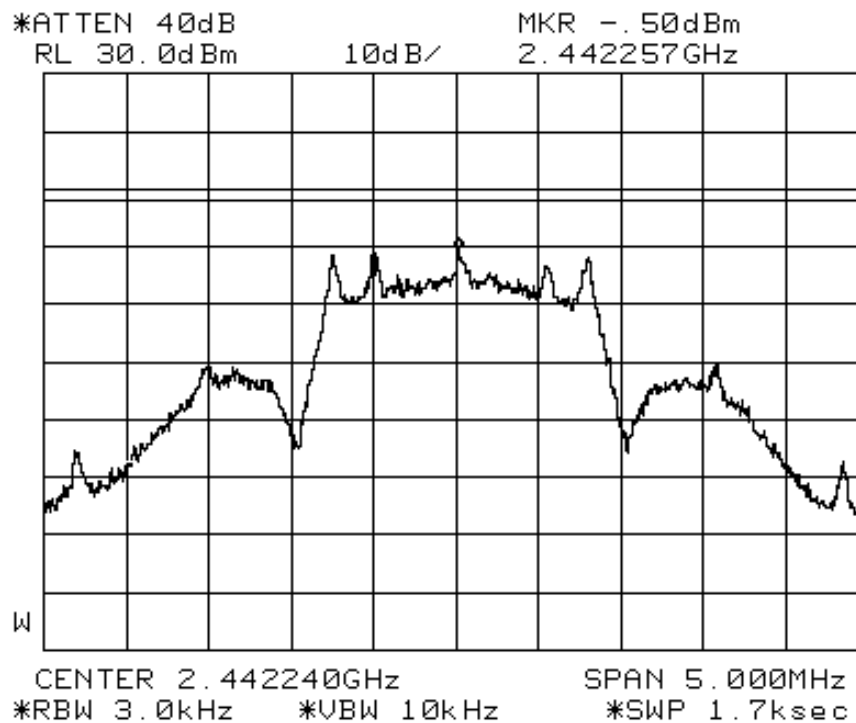

Plot 43 - Channel 7

PEAK POWER SPECTRAL DENSITY PLOTS - FLAT SPEAKER

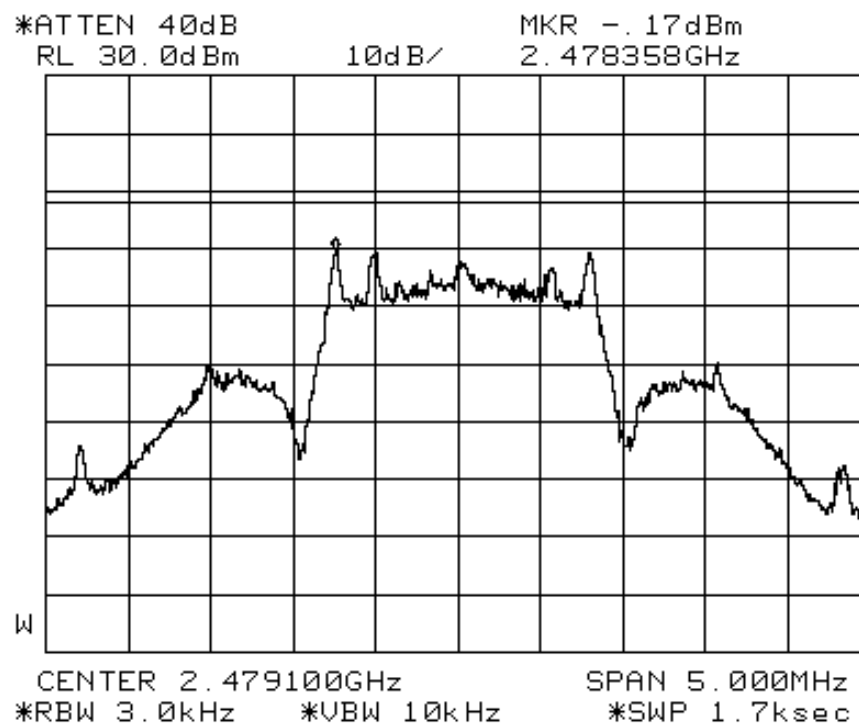

Plot 44 - Channel 14

**FCC Part 1.1310 Maximum Permissible Exposure (MPE) Results****Unit Under Test: Wireless Transmitter**

| Frequency (GHz) | Power Density Value (mW/cm <sup>2</sup> ) | Averaging Time (min) | Limit (mW/cm <sup>2</sup> ) | Margin (mW/cm <sup>2</sup> ) | Channel |
|-----------------|---|----------------------|-----------------------------|------------------------------|---------|
| 2.40333         | 0.237                                     | 30                   | 1.0                         | -0.763                       | 0       |
| 2.44224         | 0.327                                     | 30                   | 1.0                         | -0.673                       | 7       |
| 2.47910         | 0.138                                     | 30                   | 1.0                         | -0.862                       | 14      |

**Unit Under Test: Flat Speaker**

| Frequency (GHz) | Power Density Value (mW/cm <sup>2</sup> ) | Averaging Time (min) | Limit (mW/cm <sup>2</sup> ) | Margin (mW/cm <sup>2</sup> ) | Channel |
|-----------------|---|----------------------|-----------------------------|------------------------------|---------|
| 2.40333         | 0.0001                                    | 30                   | 1.0                         | -0.9999                      | 0       |
| 2.44224         | 0.0001                                    | 30                   | 1.0                         | -0.9999                      | 7       |
| 2.47910         | 0.0001                                    | 30                   | 1.0                         | -0.9999                      | 14      |

Tested by: Kenneth Ler

## Notes:

- Environmental Conditions


|                      |          |
|----------------------|----------|
| Temperature          | 21°C     |
| Relative Humidity    | 59%      |
| Atmospheric Pressure | 1030mbar |
- All possible modes of operation were investigated. Only the worst case, highest radiation levels were measured. Measurements were taken at the required averaging time. All other radiation levels were relatively insignificant.
- A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
- Measurement Uncertainty  
 All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 0.1MHz – 3GHz is ±15% .




**Maximum Permissible Exposure Measurement Test Setup**

**FCC Part 15 (15.35(c)) Duty Cycle Correction Factor**

**Unit Under Test: Wireless Transmitter**

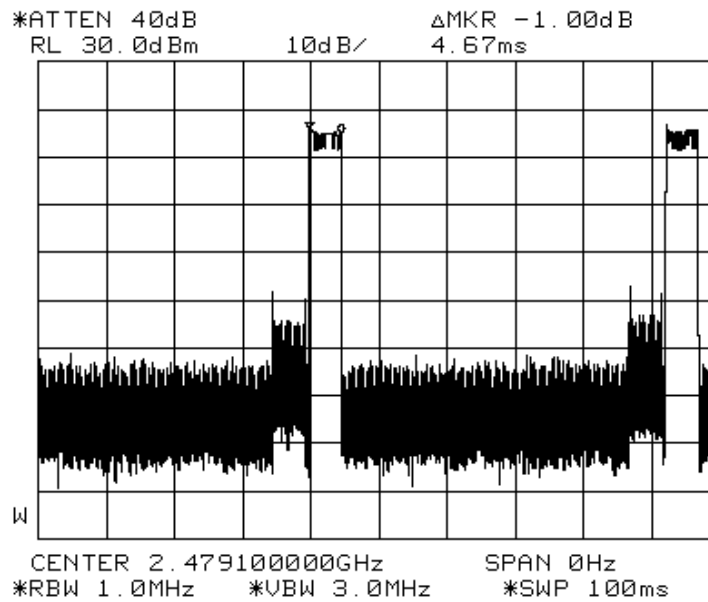

On Time

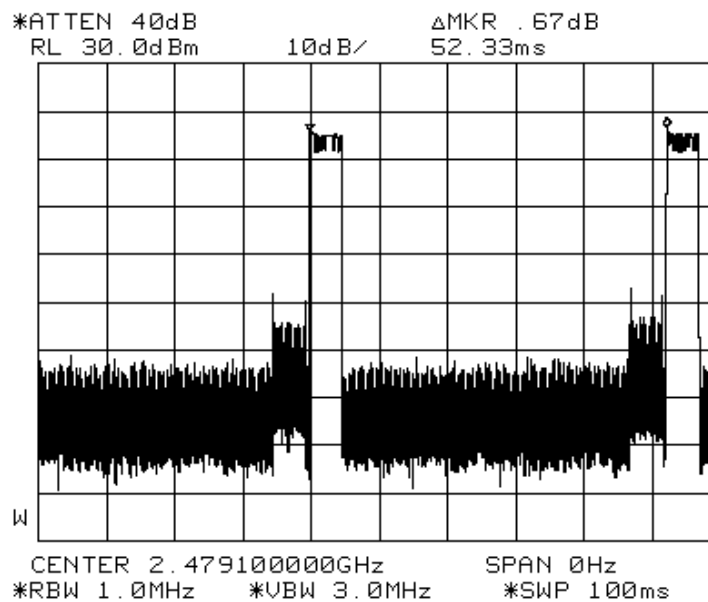


Period


$$\begin{aligned}
 \text{Duty Cycle Factor (worst- case)} &= 20 \log [\text{Total On time} / \text{Period}] \\
 &= 20 \log [(4.67 / 52.33)] \\
 &= \underline{\underline{-21.0dB}}
 \end{aligned}$$

**FCC Part 15 (15.35(c)) Duty Cycle Correction Factor**

**Unit Under Test: Flat Speaker**

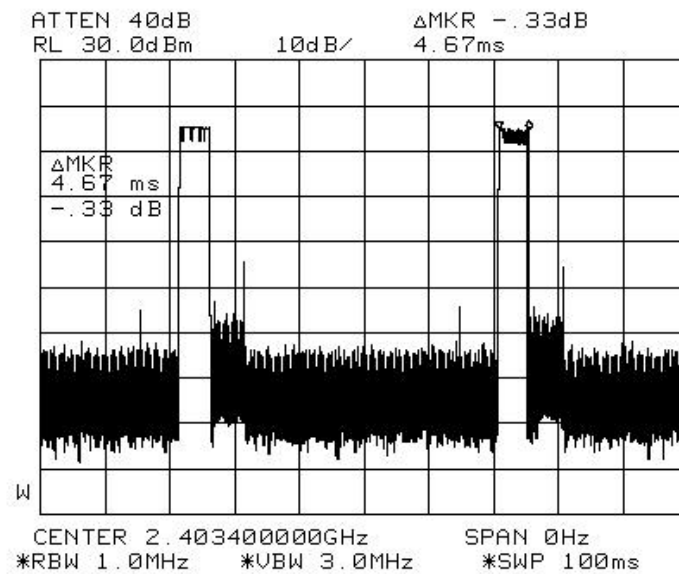

**On Time**

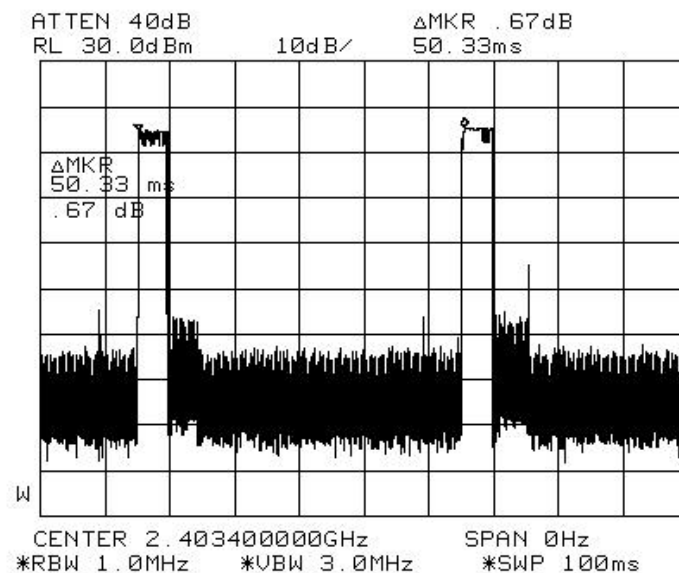

**Period**

$$\begin{aligned} \text{Duty Cycle Factor (worst- case)} &= 20 \log [\text{Total On time} / \text{Period}] \\ &= 20 \log [(4.67/50.33)] \\ &= \underline{\underline{-20.7\text{dB}}} \end{aligned}$$

**This Report is issued under the following conditions:**

1. Results of the testing/calibration in the form of a report will be issued immediately after the service has been completed or terminated.
2. Unless otherwise requested, a report shall contain only technical results. Analysis and interpretation of the results and professional opinion and recommendations expressed thereupon, if required, shall be clearly indicated and additional fee paid for, by the Client.
3. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that PSB Corporation approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that PSB Corporation in any way "guarantees" the later performance of the product/equipment.
4. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. PSB Corporation therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
5. Additional copies of the report are available to the Client at an additional fee. No third party can obtain a copy of this report through PSB Corporation, unless the Client has authorised PSB Corporation in writing to do so.
6. PSB Corporation may at its sole discretion add to or amend the conditions of the report at the time of issue of the report and such report and such additions or amendments shall be binding on the Client.
7. All copyright in the report shall remain with PSB Corporation and the Client shall, upon payment of PSB Corporation's fees for the carrying out of the tests/calibrations, be granted a license to use or publish the report to the third parties subject to the terms and conditions herein, provided always that PSB Corporation may at its absolute discretion be entitled to impose such conditions on the license as it sees fit.
8. Nothing in this report shall be interpreted to mean that PSB Corporation has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
9. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to PSB Corporation or to the report or results furnished by PSB Corporation in any advertisements or sales promotion.
10. Unless otherwise stated, the tests are carried out in PSB Corporation Pte Ltd, No.1 Science Park Drive Singapore 118221.

May 2005



**ANNEX A**

**TEST INSTRUMENTATION & GENERAL PROCEDURES**

## TEST INSTRUMENTATION & GENERAL PROCEDURES

## ANNEX A

### Lab 6 Test Instrumentation (Conducted Emissions)

| <u>Instrument</u>              | <u>Model</u> | <u>S/No</u> | <u>Cal Due Date</u> |   |
|--------------------------------|--------------|-------------|---------------------|---|
| R&S Test Receiver (9kHz-30MHz) | ESH3         | 862301/005  | 24 Jun 2006         | x |
| EMCO LISN (for EUT) – LISN3    | 3850/2       | 9903-1075   | 24 Feb 2006         | x |
| EMCO LISN – LISN9              | 3825/2       | 9309-2128   | 24 Jan 2006         | x |

### Lab 8 – 3m Anechoic Chamber Test Instrumentation (Radiated Emissions)

| <u>Instrument</u>                            | <u>Model</u> | <u>S/No</u>              | <u>Cal Due Date</u> |   |
|--|--------------|--------------------------|---------------------|---|
| R&S Test Receiver (20Hz–26.5GHz) – ESMI2     | ESMI         | 829214/006<br>829550/001 | 22 Apr 2006         | x |
| HP Preamplifier (0.01-3GHz) – PA5            | 87405A       | 3950M00352               | 01 Apr 2006         | x |
| HP Preamplifier (for ESMI3, 0.01-3GHz) – PA6 | 87405A       | 3950M00353               | 01 Apr 2006         | x |
| MITEQ Preamplifier (0.1-26.5GHz) – PA11      | NSP2650-N    | 728231                   | 01 Apr 2006         | x |
| MITEQ Preamplifier (0.1-26.5GHz) – PA4       | NSP2650-N    | 604879                   | 01 Apr 2006         | x |
| Schaffner Bilog Antenna – BL5                | CBL6143      | 5041                     | 13 May 2006         | x |
| EMCO Horn Antenna – H14                      | 3115         | 0003-6087                | 19 May 2006         | x |
| EMCO Horn Antenna – H2                       | 3115         | 9403-4250                | 19 May 2006         | x |
| Micro-tronics Band-Stop Filter               | BRM50701     | 017                      | 1 Apr 2006          | x |

### Lab 7 Test Instrumentation

(Carrier Frequency Separation, Number Of Hopping Frequencies, Spectrum Bandwidth (20dB Bandwidth Measurement), Average Frequency Dwell Time, Maximum Peak Power, RF Conducted Spurious Emissions at the Transmitter Antenna Terminal, Band Edge Compliance at the Transmitter Antenna Terminal, Duty Cycle Correction Factor, Peak Power Density)

| <u>Instrument</u>                        | <u>Model</u> | <u>S/No</u> | <u>Cal Due Date</u> |   |
|--|--------------|-------------|---------------------|---|
| HP Spectrum Analyzer                     | 8564E        | 3846A09953  | 16 Dec 2006         | x |
| R&S Universal Radio Communication Tester | CMU 200      | 837587/068  | 22 Apr 2006         | x |

### Lab 1 Anechoic Chamber Test Instrumentation (Maximum Permissible Exposure)

| <u>Instrument</u>                        | <u>Model</u> | <u>S/No</u> | <u>Cal Due Date</u> |   |
|--|--------------|-------------|---------------------|---|
| PMM 8053 Portable Field Meter            | 8053         | 0220J10308  | 3 Feb 2006          | x |
| PMM Electric and Magnetic Field Analyzer | EHP-50A      | 1311L10515  | 11 Jan 2006         | x |

**CONDUCTED EMISSIONS TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.
2. The power supply for the EUT was fed through a  $50\Omega/50\mu\text{H}$  EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another LISN.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10kHz. Both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line.

**Sample Calculation Example**

|   |   |
|---|---|
| At 20 MHz   | limit = $250\ \mu\text{V}$ = 47.96 dB $\mu\text{V}$ |
| Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.2 dB                               |   |
| Q-P reading obtained directly from EMI Receiver = 40 dB $\mu\text{V}$<br>(Calibrated for system losses) |   |
| Therefore, Q-P margin = $40 - 47.96 = -7.96$  | i.e. <b>7.96 dB below limit</b>                     |

**TEST INSTRUMENTATION & GENERAL PROCEDURES****ANNEX A****RADIATED EMISSIONS TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A prescan was carried out to pick the worst frequencies.
3. The test was carried out at the selected frequency points obtained from the prescan. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
  - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
  - b. The EUT was then rotated to the direction that gave the maximum emission.
  - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
4. A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point that above 1GHz, both Peak and Average measurements were carried out.
5. Steps 3 and 4 were repeated for the next frequency point, until all selected frequency points were measured.
6. The frequency range covered was from 30MHz to 25GHz, using the Bi-log antenna for frequencies from 30MHz up to 3GHz, and the Horn antenna above 3GHz.

**Sample Calculation Example**

|  |   |
|--|---|
| At 300 MHz   | limit = $200 \mu\text{V/m}$ = 46 dB $\mu\text{V/m}$ |
| Log-periodic antenna factor & cable loss at 300 MHz = 18.511 dB  |   |
| Q-P reading obtained directly from EMI Receiver = 40 dB $\mu\text{V/m}$<br>(Calibrated level including antenna factors & cable losses) |   |
| Therefore, Q-P margin = 40 - 46 = -6   | i.e. <b>6 dB below limit</b>                        |

**CARRIER FREQUENCY SEPARATION TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 300kHz and 1MHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with hopping sequence on.
2. The spectrum analyser was set to max hold to capture the two adjacent transmitting frequencies within the span. The signal capturing was continuous until no further signals were detected.
3. The carrier frequency separation of the two adjacent transmitting / operating frequency was measured by finding the carrier frequency difference between the two adjacent channels.

**TEST INSTRUMENTATION & GENERAL PROCEDURES****ANNEX A****SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.40333GHz).
2. The center frequency of the spectrum analyser was set to the transmitting frequency with the frequency span wide enough to capture the 20dB bandwidth of the transmitting frequency.
3. The spectrum analyser was set to max hold to capture the transmitting frequency. The signal capturing was continuous until no further changes were observed.
4. The peak of the transmitting frequency was detected with the marker peak function of the spectrum analyser. The frequencies below the 20dB peak frequency at lower ( $f_L$ ) and upper ( $f_H$ ) sides of the transmitting frequency were marked and measured by using the marker-delta function of the spectrum analyser.
6. The 20dB bandwidth of the transmitting frequency is the frequency difference between the marked lower and upper frequencies,  $|f_H - f_L|$ .
7. The steps 2 to 5 were repeated with the transmitting frequency was set to Channel 7 (2.44224GHz) and Channel 14 (2.47910GHz) respectively.

**TEST INSTRUMENTATION & GENERAL PROCEDURES****ANNEX A****NUMBER OF HOPPING FREQUENCIES TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
4. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 300kHz and 1MHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.40GHz and 2.421GHz with frequency sweeping set to 50ms.
3. The spectrum analyser was set to max hold to capture all the transmitting frequencies within the span. The signal capturing was continuous until all the transmitting frequencies were captured and no further signals were detected.
4. The numbers of transmitting frequencies were counted and recorded.
5. The steps 2 to 5 were repeated with the following start and stop frequencies settings:
  - a. 2.420GHz to 2.441GHz
  - b. 2.440GHz to 2.461GHz
  - c. 2.460GHz to 2.4835GHz
6. The total number of hopping frequencies is the sum of the number of the hopping frequencies found for each span.

**TEST INSTRUMENTATION & GENERAL PROCEDURES****ANNEX A****AVERAGE FREQUENCY DWELL TIME TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 1MHz and 3MHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, hopping sequence on.
2. The center frequency of the spectrum analyser was set to 2.40333GHz with zero frequency span (spectrum analyser acts as an oscilloscope).
3. The sweep time of the spectrum analyser was adjusted until a stable signal can be seen on the spectrum analyser.
4. The duration (dwell time) of a packet was measured using the marker-delta function of the spectrum analyser. The average dwell time of the transmitting frequency was computed as below:

$$\text{Average Frequency Dwell Time} = \frac{\text{measured time slot length (l)} \times \text{hopping rate (h)}}{\text{number of hopping frequencies}}$$

$$\begin{aligned} \text{where EUT hopping rate} &= 187.5 \text{ hops/s} \\ \text{Number of EUT hopping frequencies} &= 15 \text{ hops} \end{aligned}$$

5. The steps 2 to 4 were repeated with the center frequency of the spectrum analyser were set to 2.44224GHz and 2.47910GHz respectively.



**MAXIMUM PEAK POWER TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the Universal Radio Communication Tester, which set into power analyser mode via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.40333GHz).
2. The maximum peak power of the transmitting frequency was detected and recorded.
3. The step 2 was repeated with the transmitting frequency was set to Channel 7 (2.44224GHz) and Channel 14 (2.47910GHz) respectively.

**TEST INSTRUMENTATION & GENERAL PROCEDURES****ANNEX A****RF CONDUCTED SPURIOUS EMISSIONS AT THE TRANSMITTER ANTENNA TERMINAL TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.40333GHz).
2. The start and stop frequencies of the spectrum analyser were set to 30MHz and 10GHz.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with frequency span was set from 10GHz to 25GHz.
5. The steps 2 to 4 were repeated with the transmitting frequency was set to Channel 7 (2.44224GHz) and Channel 14 (2.47910GHz) respectively.

**TEST INSTRUMENTATION & GENERAL PROCEDURES****ANNEX A****BAND EDGE COMPLIANCE AT THE TRANSMITTER ANTENNA TERMINAL TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, hopping sequence on.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the band, 2.40GHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the band, 2.4835GHz and the any spurious emissions at the band-edge.

**PEAK POWER SPECTRAL DENSITY TEST DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 3kHz and 10kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.40333GHz).
2. The sweep time of the spectrum analyser was set to the value of the ratio of the frequency span divided by the RBW.
3. The peak power density of the transmitting frequency was detected and recorded.
4. The step 3 was repeated with the transmitting frequency was set to Channel 7 (2.44224GHz) and Channel 14 (2.47910GHz) respectively.

**DUTY CYCLE CORRECTION FACTOR DESCRIPTION****Test Set-up**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 1MHz and 3MHz.
5. All other supporting equipment were powered separately from another filtered mains.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.40333GHz).
2. The on time and period of the transmission pulse were measured.
3. The steps 2 and 3 were repeated with the transmitting frequency was set to Channel 7 (2.44224GHz) and Channel 14 (2.47910GHz) respectively.
4. Compute the worst-case (longest on time) duty cycle correction factor as shown below.

$$\text{Duty Cycle Factor} = 20 \log [\text{Total On time} / \text{Period}]$$

**TEST INSTRUMENTATION & GENERAL PROCEDURES****ANNEX A****MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST DESCRIPTION****EUT Characterisation**

EUT characterisation, over the required frequency range as given in table 1 of FCC Part 1.1310 was carried out to determine the EUT mode of operation that produces the highest possible level of radio frequency radiation.

The EUT was placed in a anechoic chamber, at a height of about 1m on a table. Its radio frequency radiation profile was observed, using a field meter with the appropriate field probe antenna attached and 20cm away from the EUT. E-field (V/m) readings are recorded, since the field meter is most sensitive at this setting. Positions where maximum E-field readings are detected are noted for the final, actual measurement.

**Test Set-up**

1. The EUT and supporting equipment were set up on top of a non-metallic table.
2. The relevant field probe was positioned at least 20cm away from the EUT and supporting equipment boundary.

**Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected positions obtained from the EUT characterisation.
3. Power density measurement ( $\text{mW}/\text{cm}^2$ ) was made using the field meter set to the required averaging time.
4. Steps 2 and 3 were repeated for the next position and its associate EUT operating mode, until all selected positions and modes were measured.

**Sample Calculation Example**

At 2400 MHz, limit =  $1.0 \text{ mW}/\text{cm}^2$

Power density reading obtained directly from field meter =  $0.3 \text{ mW}/\text{cm}^2$  averaged over the required 30 minutes.

Therefore, margin =  $0.3 - 1.0 = -0.7 \text{ mW}/\text{cm}^2$  i.e.  **$0.7 \text{ mW}/\text{cm}^2$  below limit**

**ANNEX B**

**TEST PHOTOGRAPHS / DIAGRAMS**

EUT PHOTOGRAPHS - WIRELESS TRANSMITTER



Top View



EUT PHOTOGRAPHS - WIRELESS TRANSMITTER



Bottom View

EUT PHOTOGRAPHS - WIRELESS TRANSMITTER



Front View



Rear View

EUT PHOTOGRAPHS - WIRELESS TRANSMITTER POWER ADAPTER



56S050580

06.27.2005

Top View



56S050580

06.27.2005

Bottom View


EUT PHOTOGRAPHS - WIRELESS TRANSMITTER



Internal View




EUT PHOTOGRAPHS - WIRELESS TRANSMITTER

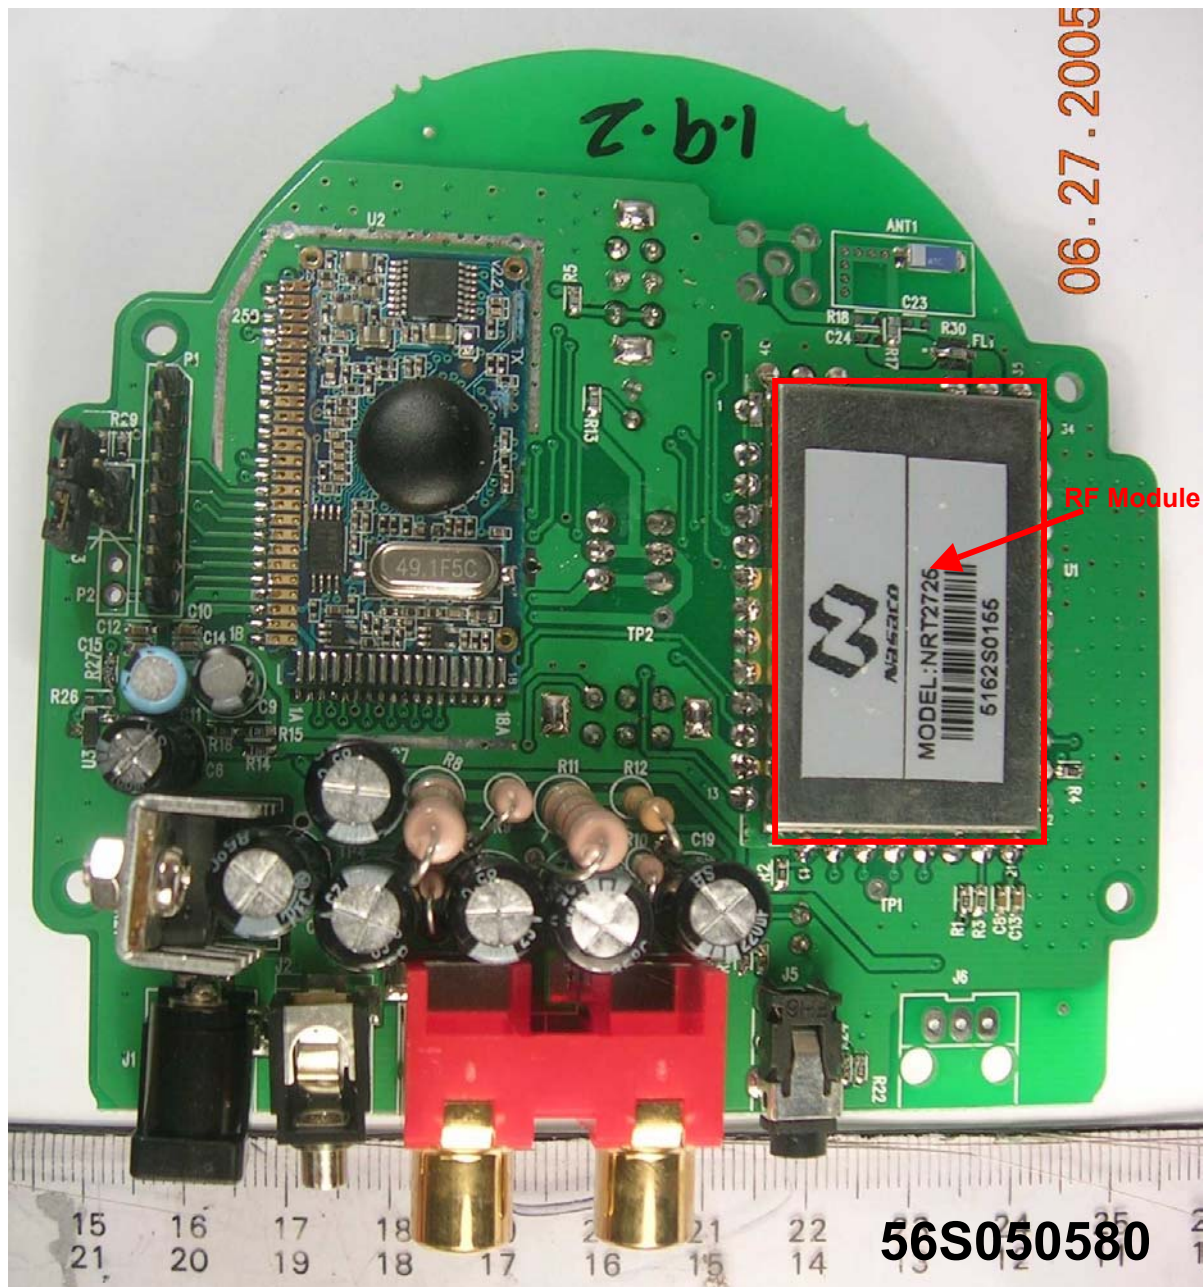

EUT PCB Component Side


EUT PHOTOGRAPHS - WIRELESS TRANSMITTER

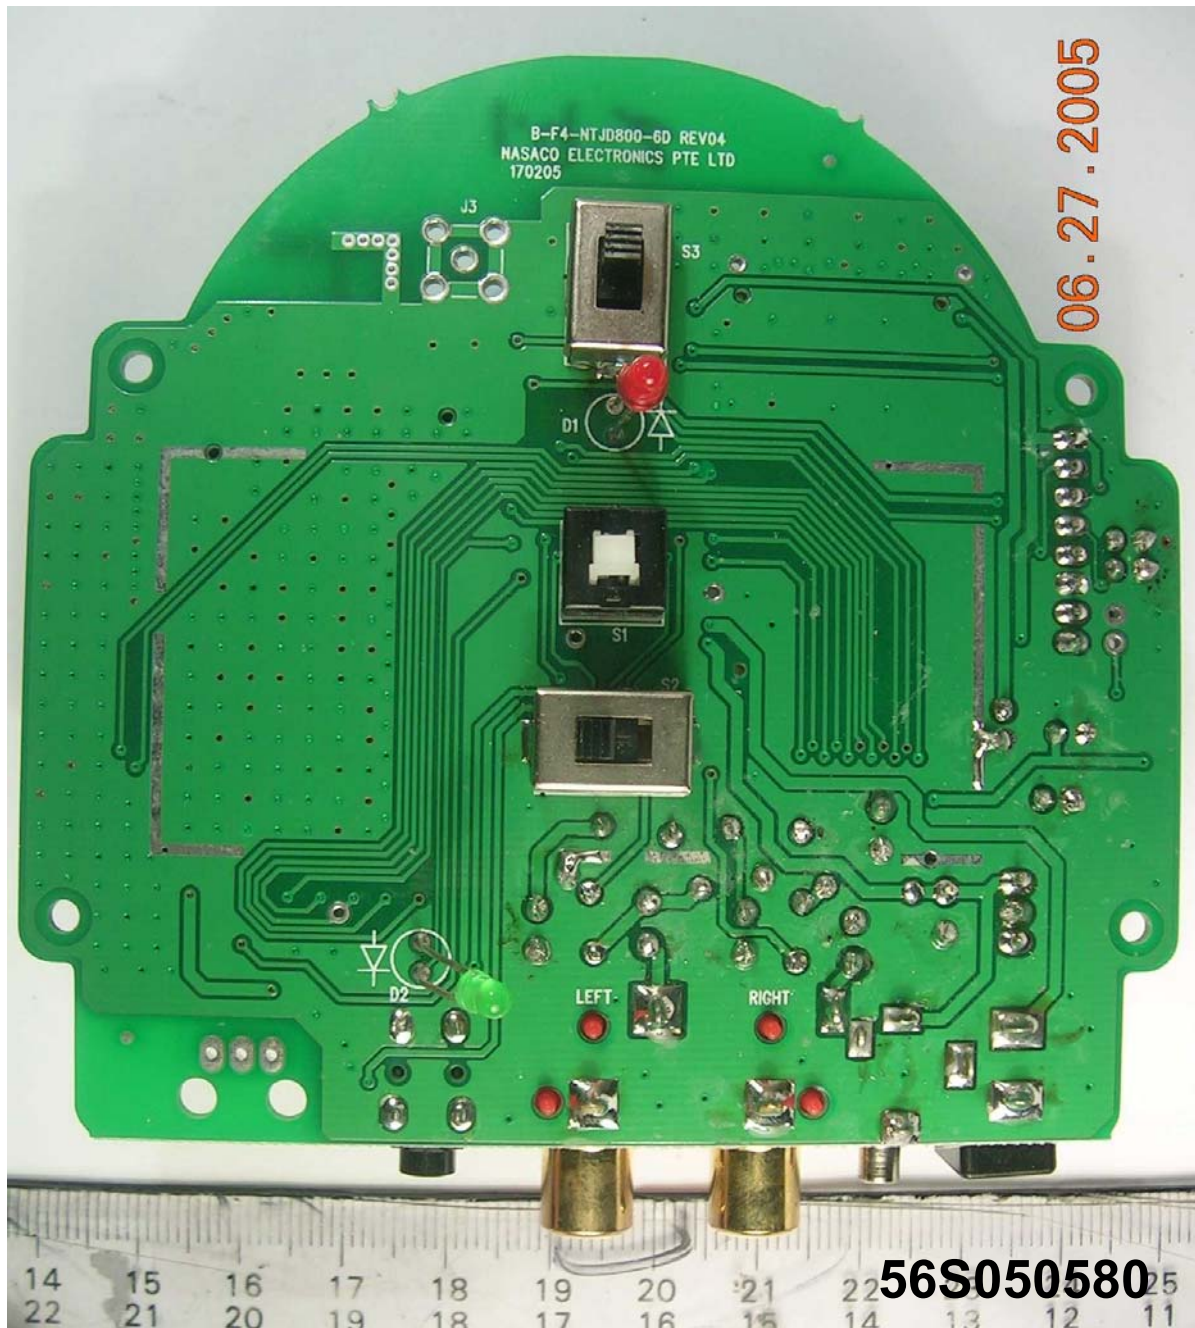

EUT PCB Trace Side



EUT PHOTOGRAPHS - WIRELESS TRANSMITTER

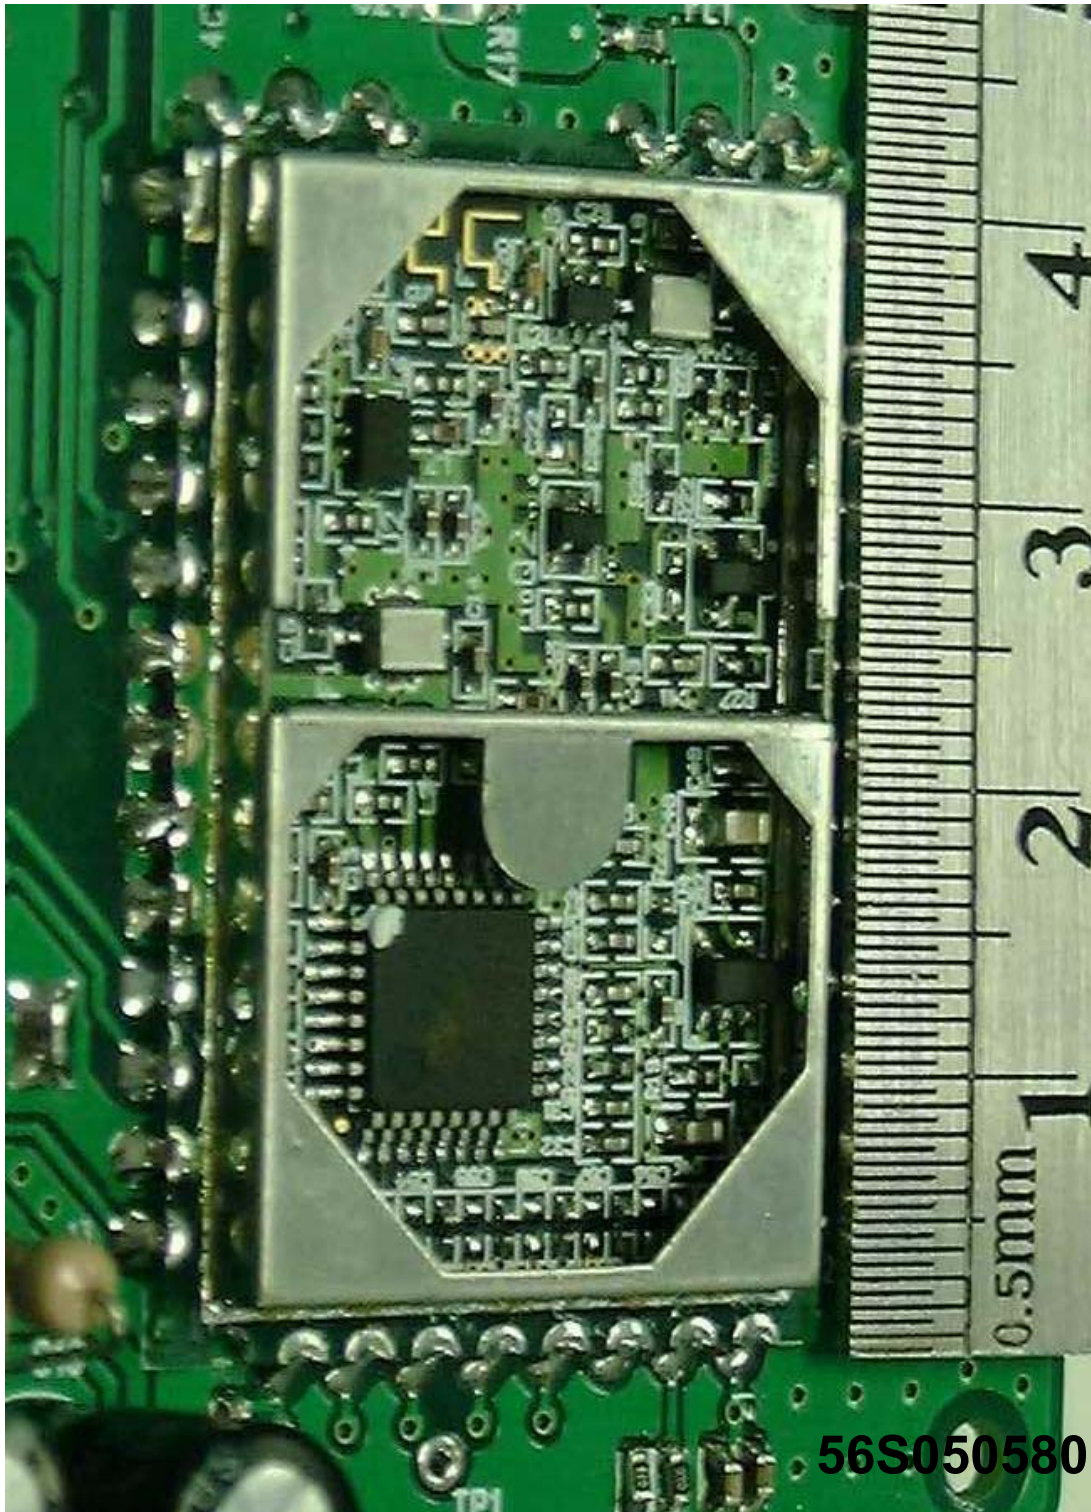

RF Module Circuit with RF Shield Removed

TEST PHOTOGRAPHS / DIAGRAMS

ANNEX B

**EUT PHOTOGRAPH - FLAT SPEAKER**



Front View



Rear View




EUT PHOTOGRAPHS - FLAT SPEAKER



**56S050580**


EUT Internal View

EUT PHOTOGRAPHS - FLAT SPEAKER

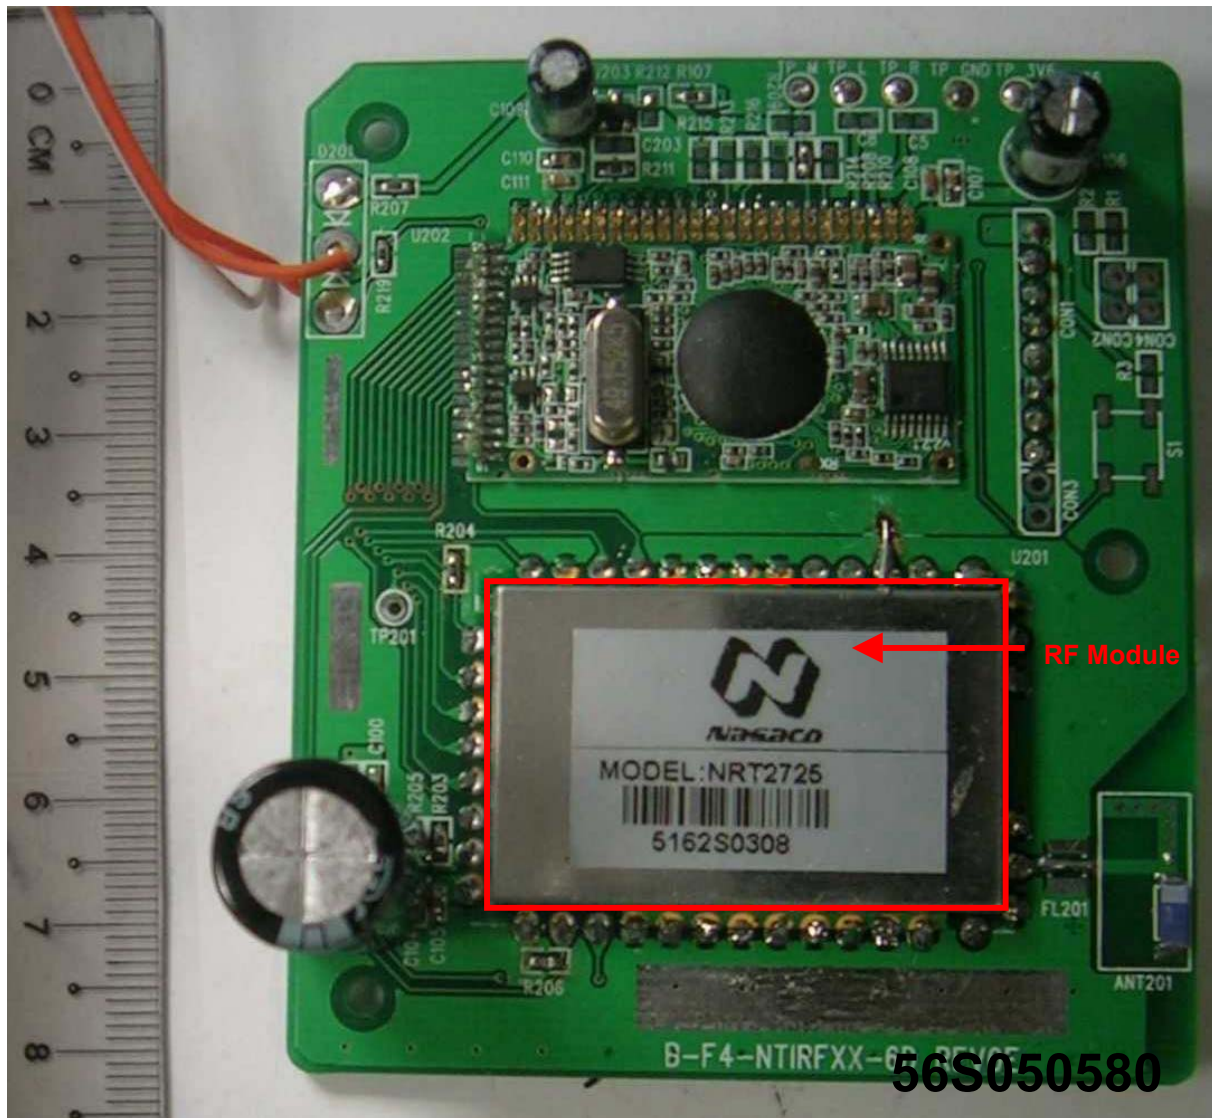

EUT PCB Main Board Component Side


EUT PHOTOGRAPHS - FLAT SPEAKER

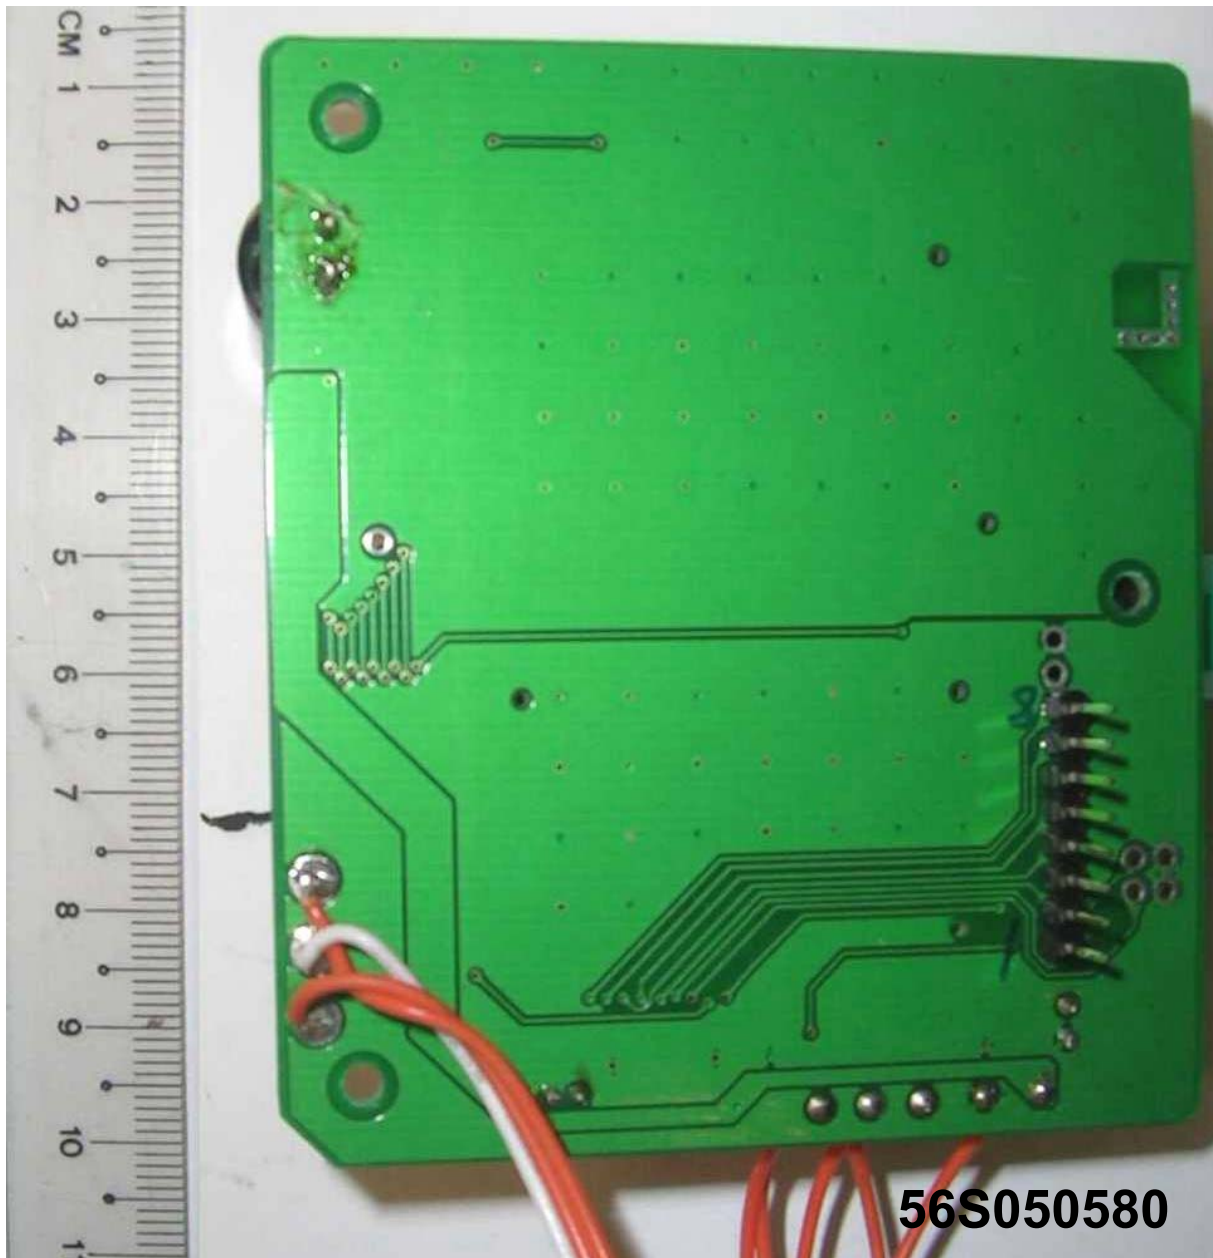

EUT PCB Main Board Trace Side



EUT PHOTOGRAPHS - FLAT SPEAKER

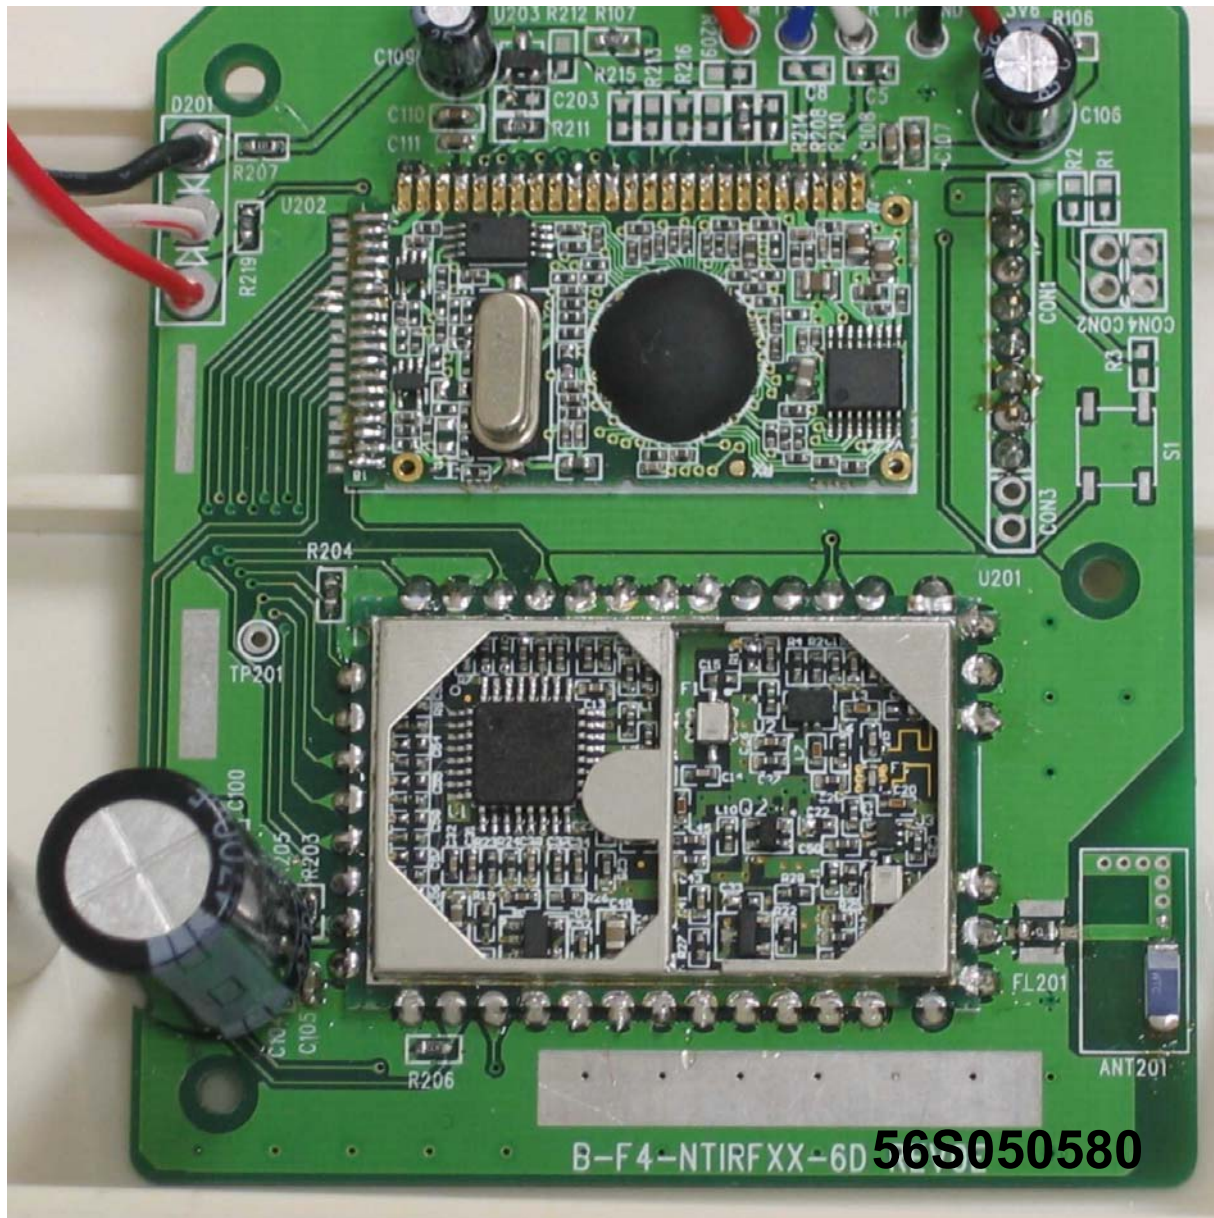


RF Module Circuit with RF Shield Removed





## EUT PHOTOGRAPHS - FLAT SPEAKER

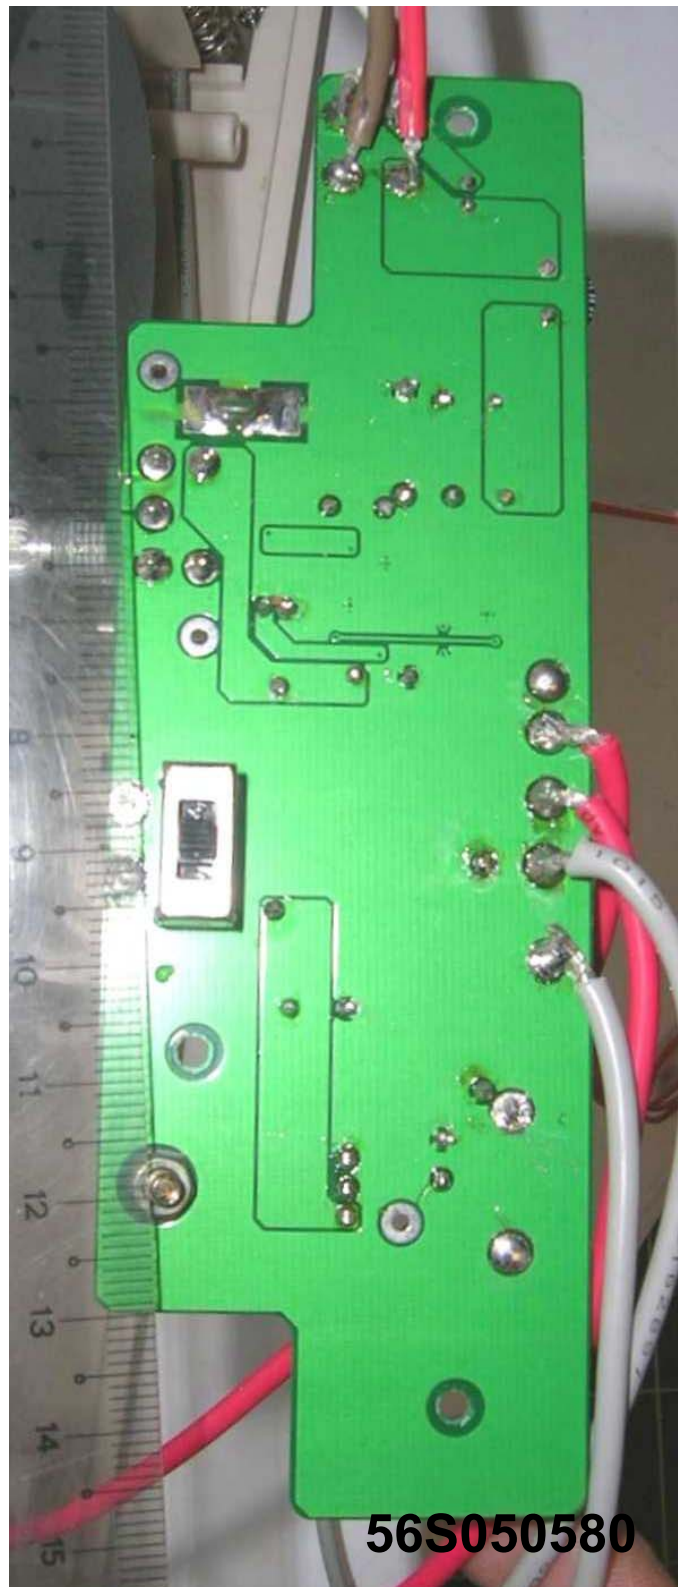EUT PCB Sub-Board Trace Side

EUT PHOTOGRAPHS - FLAT SPEAKER POWER ADAPTER



Front View



Rear View

**ANNEX C**

**USER MANUAL  
TECHNICAL DESCRIPTION  
BLOCK & CIRCUIT DIAGRAMS**

(Please refer to attached copy)




**ANNEX D**

**FCC LABEL & POSITION**

**FCC LABEL & POSITION****ANNEX D**

Labelling requirements per Section 2.925 & 15.19

The label shown will be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

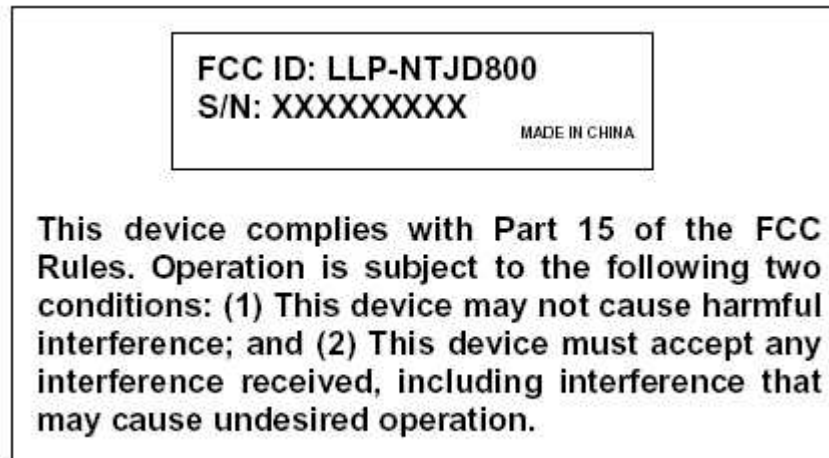


Sample Label




Physical Location of FCC Label on EUT

**FCC LABEL & POSITION****ANNEX D**Labelling requirements per Section 2.925 & 15.19

The label shown will be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

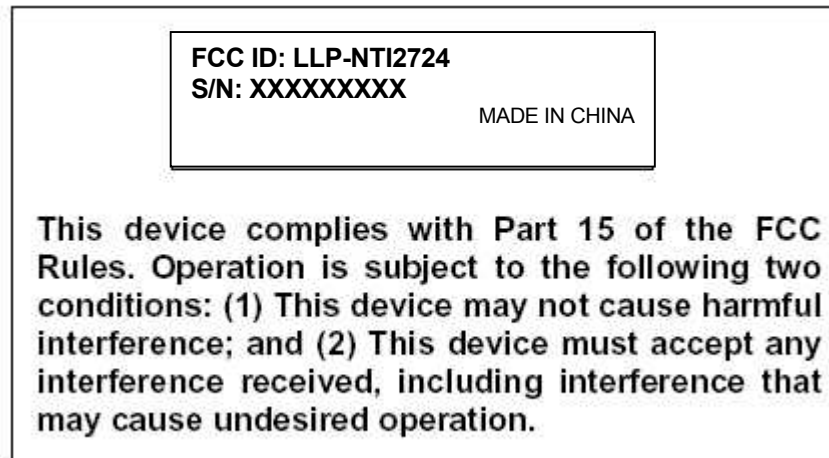

Sample Label

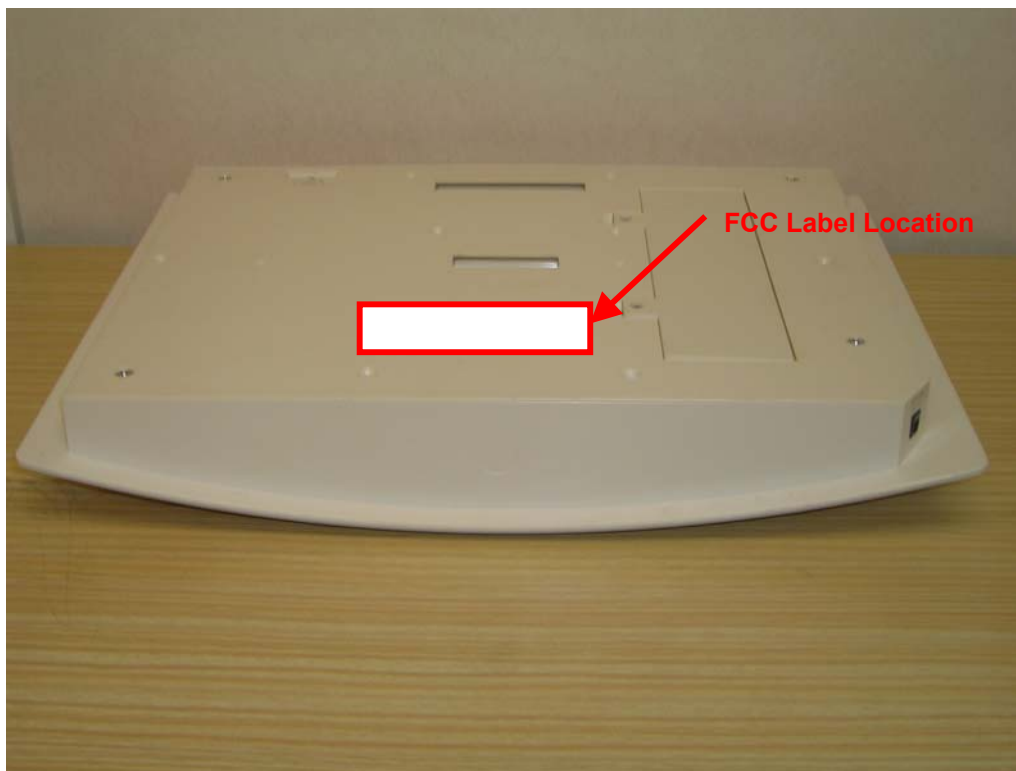

Physical Location of FCC Label on EUT