

RF Mode	TX 802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	107.3 PK			1.05 H	273	110.0	-2.7
2	*2452.00	95.1 AV			1.05 H	273	97.8	-2.7
3	2483.50	60.3 PK	74.0	-13.7	1.05 H	273	63.1	-2.8
4	2483.50	48.7 AV	54.0	-5.3	1.05 H	273	51.5	-2.8
5	4904.00	47.3 PK	74.0	-26.7	1.63 H	280	45.6	1.7
6	4904.00	45.2 AV	54.0	-8.8	1.63 H	280	43.5	1.7
7	7356.00	51.8 PK	74.0	-22.2	2.62 H	101	44.5	7.3
8	7356.00	48.0 AV	54.0	-6.0	2.62 H	101	40.7	7.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	103.1 PK			1.93 V	164	105.8	-2.7
2	*2452.00	91.2 AV			1.93 V	164	93.9	-2.7
3	2483.50	58.9 PK	74.0	-15.1	1.93 V	164	61.7	-2.8
4	2483.50	46.1 AV	54.0	-7.9	1.93 V	164	48.9	-2.8
5	4904.00	43.4 PK	74.0	-30.6	2.52 V	340	41.7	1.7
6	4904.00	39.6 AV	54.0	-14.4	2.52 V	340	37.9	1.7
7	7356.00	46.2 PK	74.0	-27.8	1.19 V	126	38.9	7.3
8	7356.00	37.7 AV	54.0	-16.3	1.19 V	126	30.4	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	104.3 PK			1.09 H	280	107.0	-2.7
2	*2457.00	92.3 AV			1.09 H	280	95.0	-2.7
3	2483.50	58.9 PK	74.0	-15.1	1.09 H	280	61.7	-2.8
4	2483.50	45.9 AV	54.0	-8.1	1.09 H	280	48.7	-2.8
5	4914.00	46.6 PK	74.0	-27.4	1.56 H	281	44.9	1.7
6	4914.00	44.7 AV	54.0	-9.3	1.56 H	281	43.0	1.7
7	7371.00	51.8 PK	74.0	-22.2	2.70 H	82	44.5	7.3
8	7371.00	48.0 AV	54.0	-6.0	2.70 H	82	40.7	7.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	100.4 PK			1.95 V	137	103.1	-2.7
2	*2457.00	88.6 AV			1.95 V	137	91.3	-2.7
3	2483.50	56.6 PK	74.0	-17.4	1.95 V	137	59.4	-2.8
4	2483.50	44.4 AV	54.0	-9.6	1.95 V	137	47.2	-2.8
5	4914.00	43.4 PK	74.0	-30.6	2.54 V	341	41.7	1.7
6	4914.00	39.7 AV	54.0	-14.3	2.54 V	341	38.0	1.7
7	7371.00	46.7 PK	74.0	-27.3	1.18 V	129	39.4	7.3
8	7371.00	38.3 AV	54.0	-15.7	1.18 V	129	31.0	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.8 PK			1.14 H	270	106.6	-2.8
2	*2462.00	91.6 AV			1.14 H	270	94.4	-2.8
3	2483.50	57.7 PK	74.0	-16.3	1.14 H	270	60.5	-2.8
4	2483.50	46.0 AV	54.0	-8.0	1.14 H	270	48.8	-2.8
5	4924.00	46.7 PK	74.0	-27.3	1.60 H	300	44.9	1.8
6	4924.00	44.6 AV	54.0	-9.4	1.60 H	300	42.8	1.8
7	7386.00	51.2 PK	74.0	-22.8	2.64 H	83	43.8	7.4
8	7386.00	47.9 AV	54.0	-6.1	2.64 H	83	40.5	7.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.5 PK			1.88 V	150	102.3	-2.8
2	*2462.00	87.9 AV			1.88 V	150	90.7	-2.8
3	2483.50	55.8 PK	74.0	-18.2	1.88 V	150	58.6	-2.8
4	2483.50	43.9 AV	54.0	-10.1	1.88 V	150	46.7	-2.8
5	4924.00	43.6 PK	74.0	-30.4	2.58 V	347	41.8	1.8
6	4924.00	40.0 AV	54.0	-14.0	2.58 V	347	38.2	1.8
7	7386.00	46.4 PK	74.0	-27.6	1.24 V	143	39.0	7.4
8	7386.00	37.9 AV	54.0	-16.1	1.24 V	143	30.5	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.15	63.7 PK	74.0	-10.3	2.95 H	116	66.4	-2.7
2	2387.15	47.3 AV	54.0	-6.7	2.95 H	116	50.0	-2.7
3	2388.78	72.5 PK	74.0	-1.5	2.95 H	116	75.2	-2.7
4	2388.78	46.8 AV	54.0	-7.2	2.95 H	116	49.5	-2.7
5	*2412.00	124.1 PK			2.95 H	116	126.8	-2.7
6	*2412.00	112.8 AV			2.95 H	116	115.5	-2.7
7	4824.00	49.9 PK	74.0	-24.1	1.35 H	297	48.1	1.8
8	4824.00	37.7 AV	54.0	-16.3	1.35 H	297	35.9	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.32	65.5 PK	74.0	-8.5	2.10 V	142	68.2	-2.7
2	2388.32	43.9 AV	54.0	-10.1	2.10 V	142	46.6	-2.7
3	*2412.00	116.5 PK			2.10 V	142	119.2	-2.7
4	*2412.00	104.9 AV			2.10 V	142	107.6	-2.7
5	4824.00	45.4 PK	74.0	-28.6	1.43 V	50	43.6	1.8
6	4824.00	33.8 AV	54.0	-20.2	1.43 V	50	32.0	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.0 PK	74.0	-18.0	2.93 H	128	58.7	-2.7
2	2390.00	43.6 AV	54.0	-10.4	2.93 H	128	46.3	-2.7
3	*2437.00	128.3 PK			2.93 H	128	131.0	-2.7
4	*2437.00	115.4 AV			2.93 H	128	118.1	-2.7
5	2483.50	59.9 PK	74.0	-14.1	2.93 H	128	62.7	-2.8
6	2483.50	45.6 AV	54.0	-8.4	2.93 H	128	48.4	-2.8
7	4874.00	50.2 PK	74.0	-23.8	1.43 H	284	48.5	1.7
8	4874.00	37.7 AV	54.0	-16.3	1.43 H	284	36.0	1.7
9	7311.00	66.6 PK	74.0	-7.4	2.60 H	88	59.4	7.2
10	7311.00	50.7 AV	54.0	-3.3	2.60 H	88	43.5	7.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.6 PK	74.0	-18.4	2.06 V	139	58.3	-2.7
2	2390.00	43.0 AV	54.0	-11.0	2.06 V	139	45.7	-2.7
3	*2437.00	119.2 PK			2.06 V	139	121.9	-2.7
4	*2437.00	107.5 AV			2.06 V	139	110.2	-2.7
5	2483.50	57.0 PK	74.0	-17.0	2.06 V	139	59.8	-2.8
6	2483.50	43.0 AV	54.0	-11.0	2.06 V	139	45.8	-2.8
7	4874.00	45.2 PK	74.0	-28.8	1.46 V	50	43.5	1.7
8	4874.00	33.7 AV	54.0	-20.3	1.46 V	50	32.0	1.7
9	7311.00	63.6 PK	74.0	-10.4	1.84 V	58	56.4	7.2
10	7311.00	47.9 AV	54.0	-6.1	1.84 V	58	40.7	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	126.1 PK			2.50 H	107	128.9	-2.8
2	*2462.00	112.9 AV			2.50 H	107	115.7	-2.8
3	2485.94	72.4 PK	74.0	-1.6	2.50 H	107	75.2	-2.8
4	2485.94	47.0 AV	54.0	-7.0	2.50 H	107	49.8	-2.8
5	4924.00	50.0 PK	74.0	-24.0	1.34 H	293	48.2	1.8
6	4924.00	37.5 AV	54.0	-16.5	1.34 H	293	35.7	1.8
7	7386.00	66.1 PK	74.0	-7.9	2.67 H	86	58.7	7.4
8	7386.00	47.8 AV	54.0	-6.2	2.67 H	86	40.4	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.1 PK			1.99 V	143	118.9	-2.8
2	*2462.00	104.2 AV			1.99 V	143	107.0	-2.8
3	2486.10	63.3 PK	74.0	-10.7	1.99 V	143	66.1	-2.8
4	2486.10	43.4 AV	54.0	-10.6	1.99 V	143	46.2	-2.8
5	4924.00	44.9 PK	74.0	-29.1	1.44 V	61	43.1	1.8
6	4924.00	33.2 AV	54.0	-20.8	1.44 V	61	31.4	1.8
7	7386.00	58.5 PK	74.0	-15.5	1.85 V	51	51.1	7.4
8	7386.00	43.7 AV	54.0	-10.3	1.85 V	51	36.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	123.1 PK			2.49 H	111	125.9	-2.8
2	*2467.00	110.4 AV			2.49 H	111	113.2	-2.8
3	2483.68	72.1 PK	74.0	-1.9	2.49 H	111	74.9	-2.8
4	2483.68	47.4 AV	54.0	-6.6	2.49 H	111	50.2	-2.8
5	4934.00	50.0 PK	74.0	-24.0	1.31 H	292	48.2	1.8
6	4934.00	37.4 AV	54.0	-16.6	1.31 H	292	35.6	1.8
7	7401.00	66.2 PK	74.0	-7.8	2.66 H	95	58.7	7.5
8	7401.00	48.1 AV	54.0	-5.9	2.66 H	95	40.6	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.6 PK			2.01 V	138	117.4	-2.8
2	*2467.00	102.1 AV			2.01 V	138	104.9	-2.8
3	2484.00	64.0 PK	74.0	-10.0	2.01 V	138	66.8	-2.8
4	2484.00	43.7 AV	54.0	-10.3	2.01 V	138	46.5	-2.8
5	4934.00	44.3 PK	74.0	-29.7	1.47 V	75	42.5	1.8
6	4934.00	32.7 AV	54.0	-21.3	1.47 V	75	30.9	1.8
7	7401.00	58.7 PK	74.0	-15.3	1.88 V	53	51.2	7.5
8	7401.00	43.8 AV	54.0	-10.2	1.88 V	53	36.3	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.2 PK			1.25 H	330	116.0	-2.8
2	*2472.00	102.4 AV			1.25 H	330	105.2	-2.8
3	2483.50	72.3 PK	74.0	-1.7	1.25 H	330	75.1	-2.8
4	2483.50	48.3 AV	54.0	-5.7	1.25 H	330	51.1	-2.8
5	4944.00	49.6 PK	74.0	-24.4	1.31 H	298	47.8	1.8
6	4944.00	37.1 AV	54.0	-16.9	1.31 H	298	35.3	1.8
7	7416.00	65.9 PK	74.0	-8.1	2.71 H	82	58.4	7.5
8	7416.00	47.9 AV	54.0	-6.1	2.71 H	82	40.4	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.0 PK			2.86 V	79	115.8	-2.8
2	*2472.00	100.7 AV			2.86 V	79	103.5	-2.8
3	2483.50	71.8 PK	74.0	-2.2	2.86 V	79	74.6	-2.8
4	2483.50	47.2 AV	54.0	-6.8	2.86 V	79	50.0	-2.8
5	4944.00	45.3 PK	74.0	-28.7	1.45 V	57	43.5	1.8
6	4944.00	33.7 AV	54.0	-20.3	1.45 V	57	31.9	1.8
7	7416.00	58.3 PK	74.0	-15.7	1.84 V	46	50.8	7.5
8	7416.00	43.6 AV	54.0	-10.4	1.84 V	46	36.1	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.88	72.4 PK	74.0	-1.6	2.74 H	108	75.1	-2.7
2	2386.88	48.5 AV	54.0	-5.5	2.74 H	108	51.2	-2.7
3	2390.00	63.6 PK	74.0	-10.4	2.74 H	108	66.3	-2.7
4	2390.00	49.2 AV	54.0	-4.8	2.74 H	108	51.9	-2.7
5	*2412.00	121.9 PK			2.74 H	108	124.6	-2.7
6	*2412.00	111.0 AV			2.74 H	108	113.7	-2.7
7	4824.00	50.1 PK	74.0	-23.9	1.36 H	290	48.3	1.8
8	4824.00	37.7 AV	54.0	-16.3	1.36 H	290	35.9	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.90	63.7 PK	74.0	-10.3	2.08 V	149	66.4	-2.7
2	2386.90	44.9 AV	54.0	-9.1	2.08 V	149	47.6	-2.7
3	*2412.00	116.8 PK			2.08 V	149	119.5	-2.7
4	*2412.00	104.4 AV			2.08 V	149	107.1	-2.7
5	4824.00	45.7 PK	74.0	-28.3	1.50 V	53	43.9	1.8
6	4824.00	34.1 AV	54.0	-19.9	1.50 V	53	32.3	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.6 PK	74.0	-18.4	2.76 H	121	58.3	-2.7
2	2390.00	43.2 AV	54.0	-10.8	2.76 H	121	45.9	-2.7
3	*2437.00	123.8 PK			2.76 H	121	126.5	-2.7
4	*2437.00	112.6 AV			2.76 H	121	115.3	-2.7
5	2483.50	59.4 PK	74.0	-14.6	2.76 H	121	62.2	-2.8
6	2483.50	44.9 AV	54.0	-9.1	2.76 H	121	47.7	-2.8
7	4874.00	50.6 PK	74.0	-23.4	1.41 H	300	48.9	1.7
8	4874.00	38.1 AV	54.0	-15.9	1.41 H	300	36.4	1.7
9	7311.00	63.9 PK	74.0	-10.1	2.61 H	89	56.7	7.2
10	7311.00	50.8 AV	54.0	-3.2	2.61 H	89	43.6	7.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.9 PK	74.0	-18.1	2.03 V	163	58.6	-2.7
2	2390.00	43.5 AV	54.0	-10.5	2.03 V	163	46.2	-2.7
3	*2437.00	118.3 PK			2.03 V	163	121.0	-2.7
4	*2437.00	106.4 AV			2.03 V	163	109.1	-2.7
5	2483.50	57.0 PK	74.0	-17.0	2.03 V	163	59.8	-2.8
6	2483.50	43.3 AV	54.0	-10.7	2.03 V	163	46.1	-2.8
7	4874.00	44.7 PK	74.0	-29.3	1.45 V	50	43.0	1.7
8	4874.00	32.9 AV	54.0	-21.1	1.45 V	50	31.2	1.7
9	7311.00	58.2 PK	74.0	-15.8	1.91 V	48	51.0	7.2
10	7311.00	43.4 AV	54.0	-10.6	1.91 V	48	36.2	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	123.4 PK			2.70 H	116	126.2	-2.8
2	*2462.00	112.2 AV			2.70 H	116	115.0	-2.8
3	2483.50	72.2 PK	74.0	-1.8	2.70 H	116	75.0	-2.8
4	2483.50	49.6 AV	54.0	-4.4	2.70 H	116	52.4	-2.8
5	4924.00	49.7 PK	74.0	-24.3	1.30 H	304	47.9	1.8
6	4924.00	37.1 AV	54.0	-16.9	1.30 H	304	35.3	1.8
7	7386.00	66.7 PK	74.0	-7.3	2.65 H	100	59.3	7.4
8	7386.00	48.2 AV	54.0	-5.8	2.65 H	100	40.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.5 PK			2.02 V	146	119.3	-2.8
2	*2462.00	104.1 AV			2.02 V	146	106.9	-2.8
3	2483.50	64.5 PK	74.0	-9.5	2.02 V	146	67.3	-2.8
4	2483.50	44.3 AV	54.0	-9.7	2.02 V	146	47.1	-2.8
5	4924.00	45.1 PK	74.0	-28.9	1.47 V	63	43.3	1.8
6	4924.00	33.4 AV	54.0	-20.6	1.47 V	63	31.6	1.8
7	7386.00	58.7 PK	74.0	-15.3	1.78 V	61	51.3	7.4
8	7386.00	44.0 AV	54.0	-10.0	1.78 V	61	36.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	118.1 PK			2.75 H	112	120.9	-2.8
2	*2467.00	106.7 AV			2.75 H	112	109.5	-2.8
3	2483.50	72.1 PK	74.0	-1.9	2.75 H	112	74.9	-2.8
4	2483.50	47.1 AV	54.0	-6.9	2.75 H	112	49.9	-2.8
5	4934.00	50.2 PK	74.0	-23.8	1.29 H	286	48.4	1.8
6	4934.00	38.0 AV	54.0	-16.0	1.29 H	286	36.2	1.8
7	7401.00	65.6 PK	74.0	-8.4	2.71 H	74	58.1	7.5
8	7401.00	47.3 AV	54.0	-6.7	2.71 H	74	39.8	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.1 PK			1.97 V	139	113.9	-2.8
2	*2467.00	98.9 AV			1.97 V	139	101.7	-2.8
3	2483.50	62.7 PK	74.0	-11.3	1.97 V	139	65.5	-2.8
4	2483.50	43.9 AV	54.0	-10.1	1.97 V	139	46.7	-2.8
5	4934.00	45.1 PK	74.0	-28.9	1.41 V	41	43.3	1.8
6	4934.00	33.3 AV	54.0	-20.7	1.41 V	41	31.5	1.8
7	7401.00	57.9 PK	74.0	-16.1	1.80 V	56	50.4	7.5
8	7401.00	43.3 AV	54.0	-10.7	1.80 V	56	35.8	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.2 PK			1.18 H	331	116.0	-2.8
2	*2472.00	102.0 AV			1.18 H	331	104.8	-2.8
3	2483.50	62.2 PK	74.0	-11.8	1.18 H	331	65.0	-2.8
4	2483.50	49.1 AV	54.0	-4.9	1.18 H	331	51.9	-2.8
5	2483.90	72.5 PK	74.0	-1.5	1.18 H	331	75.3	-2.8
6	2483.90	47.2 AV	54.0	-6.8	1.18 H	331	50.0	-2.8
7	4944.00	50.0 PK	74.0	-24.0	1.33 H	289	48.2	1.8
8	4944.00	37.3 AV	54.0	-16.7	1.33 H	289	35.5	1.8
9	7416.00	66.3 PK	74.0	-7.7	2.73 H	80	58.8	7.5
10	7416.00	48.3 AV	54.0	-5.7	2.73 H	80	40.8	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.2 PK			2.98 V	71	114.0	-2.8
2	*2472.00	99.8 AV			2.98 V	71	102.6	-2.8
3	2484.15	71.7 PK	74.0	-2.3	2.98 V	71	74.5	-2.8
4	2484.15	46.0 AV	54.0	-8.0	2.98 V	71	48.8	-2.8
5	4944.00	45.5 PK	74.0	-28.5	1.50 V	41	43.7	1.8
6	4944.00	33.8 AV	54.0	-20.2	1.50 V	41	32.0	1.8
7	7416.00	58.4 PK	74.0	-15.6	1.88 V	55	50.9	7.5
8	7416.00	43.7 AV	54.0	-10.3	1.88 V	55	36.2	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.62	72.5 PK	74.0	-1.5	2.88 H	119	75.2	-2.7
2	2389.62	48.9 AV	54.0	-5.1	2.88 H	119	51.6	-2.7
3	*2412.00	121.6 PK			2.88 H	119	124.3	-2.7
4	*2412.00	109.7 AV			2.88 H	119	112.4	-2.7
5	4824.00	50.2 PK	74.0	-23.8	1.36 H	280	48.4	1.8
6	4824.00	37.7 AV	54.0	-16.3	1.36 H	280	35.9	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.0 PK	74.0	-14.0	1.99 V	137	62.7	-2.7
2	2390.00	44.9 AV	54.0	-9.1	1.99 V	137	47.6	-2.7
3	*2412.00	113.4 PK			1.99 V	137	116.1	-2.7
4	*2412.00	102.5 AV			1.99 V	137	105.2	-2.7
5	4824.00	45.2 PK	74.0	-28.8	1.41 V	52	43.4	1.8
6	4824.00	33.5 AV	54.0	-20.5	1.41 V	52	31.7	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.9 PK	74.0	-18.1	1.34 H	324	58.6	-2.7
2	2390.00	43.7 AV	54.0	-10.3	1.34 H	324	46.4	-2.7
3	*2437.00	121.4 PK			1.34 H	324	124.1	-2.7
4	*2437.00	111.3 AV			1.34 H	324	114.0	-2.7
5	2483.50	59.4 PK	74.0	-14.6	1.34 H	324	62.2	-2.8
6	2483.50	45.1 AV	54.0	-8.9	1.34 H	324	47.9	-2.8
7	4874.00	50.2 PK	74.0	-23.8	1.36 H	269	48.5	1.7
8	4874.00	37.6 AV	54.0	-16.4	1.36 H	269	35.9	1.7
9	7311.00	62.5 PK	74.0	-11.5	2.58 H	88	55.3	7.2
10	7311.00	50.7 AV	54.0	-3.3	2.58 H	88	43.5	7.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.6 PK	74.0	-18.4	2.02 V	136	58.3	-2.7
2	2390.00	43.1 AV	54.0	-10.9	2.02 V	136	45.8	-2.7
3	*2437.00	115.6 PK			2.02 V	136	118.3	-2.7
4	*2437.00	104.3 AV			2.02 V	136	107.0	-2.7
5	2483.50	57.4 PK	74.0	-16.6	2.02 V	136	60.2	-2.8
6	2483.50	43.5 AV	54.0	-10.5	2.02 V	136	46.3	-2.8
7	4874.00	44.9 PK	74.0	-29.1	1.39 V	76	43.2	1.7
8	4874.00	32.9 AV	54.0	-21.1	1.39 V	76	31.2	1.7
9	7311.00	58.0 PK	74.0	-16.0	1.80 V	63	50.8	7.2
10	7311.00	43.3 AV	54.0	-10.7	1.80 V	63	36.1	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	121.4 PK			2.50 H	112	124.2	-2.8
2	*2462.00	110.0 AV			2.50 H	112	112.8	-2.8
3	2483.83	72.0 PK	74.0	-2.0	2.50 H	112	74.8	-2.8
4	2483.83	50.5 AV	54.0	-3.5	2.50 H	112	53.3	-2.8
5	4924.00	50.5 PK	74.0	-23.5	1.37 H	299	48.7	1.8
6	4924.00	38.0 AV	54.0	-16.0	1.37 H	299	36.2	1.8
7	7386.00	65.8 PK	74.0	-8.2	2.68 H	73	58.4	7.4
8	7386.00	47.7 AV	54.0	-6.3	2.68 H	73	40.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.1 PK			2.00 V	144	115.9	-2.8
2	*2462.00	102.3 AV			2.00 V	144	105.1	-2.8
3	2484.70	64.3 PK	74.0	-9.7	2.00 V	144	67.1	-2.8
4	2484.70	45.1 AV	54.0	-8.9	2.00 V	144	47.9	-2.8
5	4924.00	44.9 PK	74.0	-29.1	1.50 V	59	43.1	1.8
6	4924.00	33.4 AV	54.0	-20.6	1.50 V	59	31.6	1.8
7	7386.00	58.5 PK	74.0	-15.5	1.80 V	57	51.1	7.4
8	7386.00	43.9 AV	54.0	-10.1	1.80 V	57	36.5	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	119.2 PK			2.52 H	109	122.0	-2.8
2	*2467.00	107.9 AV			2.52 H	109	110.7	-2.8
3	2483.76	72.4 PK	74.0	-1.6	2.52 H	109	75.2	-2.8
4	2483.76	51.6 AV	54.0	-2.4	2.52 H	109	54.4	-2.8
5	4934.00	50.5 PK	74.0	-23.5	1.28 H	308	48.7	1.8
6	4934.00	37.8 AV	54.0	-16.2	1.28 H	308	36.0	1.8
7	7401.00	66.5 PK	74.0	-7.5	2.64 H	88	59.0	7.5
8	7401.00	48.2 AV	54.0	-5.8	2.64 H	88	40.7	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.7 PK			2.03 V	147	113.5	-2.8
2	*2467.00	99.8 AV			2.03 V	147	102.6	-2.8
3	2484.00	64.1 PK	74.0	-9.9	2.03 V	147	66.9	-2.8
4	2484.00	45.2 AV	54.0	-8.8	2.03 V	147	48.0	-2.8
5	4934.00	45.2 PK	74.0	-28.8	1.41 V	48	43.4	1.8
6	4934.00	33.8 AV	54.0	-20.2	1.41 V	48	32.0	1.8
7	7401.00	59.0 PK	74.0	-15.0	1.81 V	54	51.5	7.5
8	7401.00	44.0 AV	54.0	-10.0	1.81 V	54	36.5	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.7 PK			2.51 H	111	114.5	-2.8
2	*2472.00	100.8 AV			2.51 H	111	103.6	-2.8
3	2483.89	72.4 PK	74.0	-1.6	2.51 H	111	75.2	-2.8
4	2483.89	51.7 AV	54.0	-2.3	2.51 H	111	54.5	-2.8
5	4944.00	49.9 PK	74.0	-24.1	1.38 H	309	48.1	1.8
6	4944.00	37.1 AV	54.0	-16.9	1.38 H	309	35.3	1.8
7	7416.00	66.1 PK	74.0	-7.9	2.69 H	74	58.6	7.5
8	7416.00	48.0 AV	54.0	-6.0	2.69 H	74	40.5	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	105.8 PK			2.07 V	146	108.6	-2.8
2	*2472.00	94.9 AV			2.07 V	146	97.7	-2.8
3	2483.50	65.0 PK	74.0	-9.0	2.07 V	146	67.8	-2.8
4	2483.50	45.7 AV	54.0	-8.3	2.07 V	146	48.5	-2.8
5	4944.00	45.3 PK	74.0	-28.7	1.51 V	43	43.5	1.8
6	4944.00	33.9 AV	54.0	-20.1	1.51 V	43	32.1	1.8
7	7416.00	58.0 PK	74.0	-16.0	1.87 V	32	50.5	7.5
8	7416.00	43.2 AV	54.0	-10.8	1.87 V	32	35.7	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.


Below 1GHz Data:

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.79	38.4 QP	43.5	-5.1	3.00 H	340	53.5	-15.1
2	167.31	35.5 QP	43.5	-8.0	2.00 H	133	48.6	-13.1
3	227.06	33.8 QP	46.0	-12.2	2.00 H	127	49.7	-15.9
4	299.38	35.3 QP	46.0	-10.7	1.50 H	89	47.6	-12.3
5	336.79	34.1 QP	46.0	-11.9	1.50 H	325	45.4	-11.3
6	574.55	26.4 QP	46.0	-19.6	1.50 H	120	32.6	-6.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

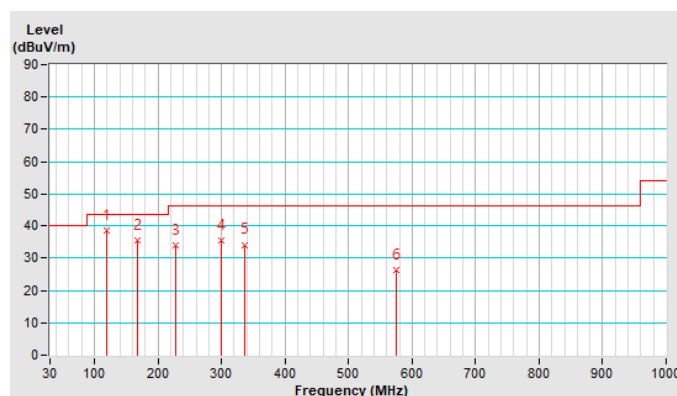


RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.39	28.6 QP	43.5	-14.9	1.00 V	26	43.1	-14.5
2	166.68	31.8 QP	43.5	-11.7	1.50 V	239	44.8	-13.0
3	224.18	31.6 QP	46.0	-14.4	1.00 V	123	47.6	-16.0
4	340.61	26.0 QP	46.0	-20.0	1.50 V	189	37.3	-11.3
5	498.65	24.4 QP	46.0	-21.6	1.50 V	37	32.1	-7.7
6	950.47	32.8 QP	46.0	-13.2	1.00 V	125	33.4	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

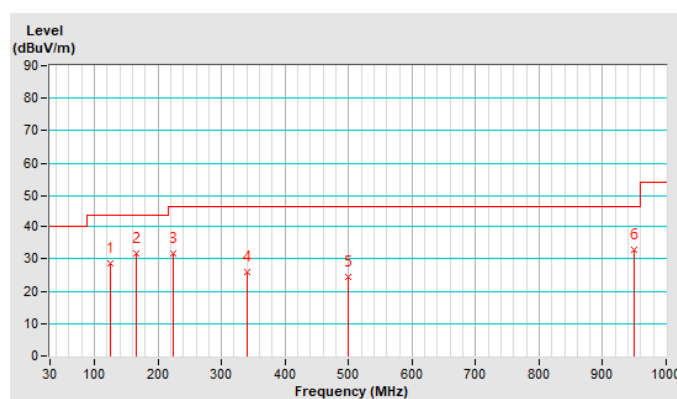

4.1.8 Test Results (Mode 2)

Dipole Antenna

Above 1GHz Data :

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.25	56.3 PK	74.0	-17.7	1.48 H	112	59.0	-2.7
2	2387.25	45.0 AV	54.0	-9.0	1.48 H	112	47.7	-2.7
3	*2412.00	99.3 PK			1.48 H	112	102.0	-2.7
4	*2412.00	96.9 AV			1.48 H	112	99.6	-2.7
5	4824.00	39.0 PK	74.0	-35.0	1.60 H	187	37.2	1.8
6	4824.00	34.2 AV	54.0	-19.8	1.60 H	187	32.4	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.25	59.1 PK	74.0	-14.9	1.00 V	286	61.8	-2.7
2	2387.25	51.3 AV	54.0	-2.7	1.00 V	286	54.0	-2.7
3	*2412.00	111.7 PK			1.00 V	286	114.4	-2.7
4	*2412.00	109.5 AV			1.00 V	286	112.2	-2.7
5	4824.00	44.3 PK	74.0	-29.7	1.25 V	268	42.5	1.8
6	4824.00	40.5 AV	54.0	-13.5	1.25 V	268	38.7	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.4 PK	74.0	-21.6	1.51 H	114	55.1	-2.7
2	2390.00	38.6 AV	54.0	-15.4	1.51 H	114	41.3	-2.7
3	*2437.00	98.5 PK			1.51 H	114	101.2	-2.7
4	*2437.00	95.9 AV			1.51 H	114	98.6	-2.7
5	2483.50	55.1 PK	74.0	-18.9	1.51 H	114	57.9	-2.8
6	2483.50	40.1 AV	54.0	-13.9	1.51 H	114	42.9	-2.8
7	4874.00	39.3 PK	74.0	-34.7	1.65 H	176	37.6	1.7
8	4874.00	34.5 AV	54.0	-19.5	1.65 H	176	32.8	1.7
9	7311.00	45.4 PK	74.0	-28.6	1.97 H	195	38.2	7.2
10	7311.00	39.7 AV	54.0	-14.3	1.97 H	195	32.5	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.8 PK	74.0	-15.2	1.72 V	326	61.5	-2.7
2	2390.00	44.9 AV	54.0	-9.1	1.72 V	326	47.6	-2.7
3	*2437.00	110.6 PK			1.72 V	326	113.3	-2.7
4	*2437.00	109.1 AV			1.72 V	326	111.8	-2.7
5	2483.50	60.2 PK	74.0	-13.8	1.72 V	326	63.0	-2.8
6	2483.50	46.0 AV	54.0	-8.0	1.72 V	326	48.8	-2.8
7	4874.00	42.8 PK	74.0	-31.2	1.30 V	277	41.1	1.7
8	4874.00	38.4 AV	54.0	-15.6	1.30 V	277	36.7	1.7
9	7311.00	49.7 PK	74.0	-24.3	1.66 V	266	42.5	7.2
10	7311.00	44.3 AV	54.0	-9.7	1.66 V	266	37.1	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.5 PK			1.24 H	219	101.3	-2.8
2	*2462.00	96.2 AV			1.24 H	219	99.0	-2.8
3	2488.00	55.5 PK	74.0	-18.5	1.24 H	219	58.3	-2.8
4	2488.00	43.6 AV	54.0	-10.4	1.24 H	219	46.4	-2.8
5	4924.00	39.4 PK	74.0	-34.6	1.68 H	180	37.6	1.8
6	4924.00	34.7 AV	54.0	-19.3	1.68 H	180	32.9	1.8
7	7386.00	45.0 PK	74.0	-29.0	1.95 H	191	37.6	7.4
8	7386.00	39.3 AV	54.0	-14.7	1.95 H	191	31.9	7.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.6 PK			1.69 V	307	114.4	-2.8
2	*2462.00	109.3 AV			1.69 V	307	112.1	-2.8
3	2488.00	60.2 PK	74.0	-13.8	1.69 V	307	63.0	-2.8
4	2488.00	52.5 AV	54.0	-1.5	1.69 V	307	55.3	-2.8
5	4924.00	44.0 PK	74.0	-30.0	1.16 V	288	42.2	1.8
6	4924.00	40.0 AV	54.0	-14.0	1.16 V	288	38.2	1.8
7	7386.00	50.4 PK	74.0	-23.6	1.50 V	278	43.0	7.4
8	7386.00	43.9 AV	54.0	-10.1	1.50 V	278	36.5	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	95.2 PK			1.22 H	215	98.0	-2.8
2	*2467.00	93.0 AV			1.22 H	215	95.8	-2.8
3	2483.50	56.6 PK	74.0	-17.4	1.22 H	215	59.4	-2.8
4	2483.50	44.8 AV	54.0	-9.2	1.22 H	215	47.6	-2.8
5	4934.00	39.1 PK	74.0	-34.9	1.70 H	164	37.3	1.8
6	4934.00	34.6 AV	54.0	-19.4	1.70 H	164	32.8	1.8
7	7401.00	46.1 PK	74.0	-27.9	2.01 H	210	38.6	7.5
8	7401.00	40.2 AV	54.0	-13.8	2.01 H	210	32.7	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.4 PK			1.64 V	306	111.2	-2.8
2	*2467.00	106.1 AV			1.64 V	306	108.9	-2.8
3	2485.21	59.9 PK	74.0	-14.1	1.64 V	306	62.7	-2.8
4	2485.21	52.1 AV	54.0	-1.9	1.64 V	306	54.9	-2.8
5	4934.00	42.7 PK	74.0	-31.3	1.34 V	269	40.9	1.8
6	4934.00	38.3 AV	54.0	-15.7	1.34 V	269	36.5	1.8
7	7401.00	50.1 PK	74.0	-23.9	1.66 V	267	42.6	7.5
8	7401.00	44.4 AV	54.0	-9.6	1.66 V	267	36.9	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	91.1 PK			1.26 H	221	93.9	-2.8
2	*2472.00	89.4 AV			1.26 H	221	92.2	-2.8
3	2487.35	55.3 PK	74.0	-18.7	1.26 H	221	58.1	-2.8
4	2487.35	43.9 AV	54.0	-10.1	1.26 H	221	46.7	-2.8
5	4944.00	39.9 PK	74.0	-34.1	1.61 H	168	38.1	1.8
6	4944.00	34.9 AV	54.0	-19.1	1.61 H	168	33.1	1.8
7	7416.00	45.7 PK	74.0	-28.3	2.01 H	209	38.2	7.5
8	7416.00	40.2 AV	54.0	-13.8	2.01 H	209	32.7	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.6 PK			1.63 V	303	107.4	-2.8
2	*2472.00	102.4 AV			1.63 V	303	105.2	-2.8
3	2486.72	58.7 PK	74.0	-15.3	1.63 V	303	61.5	-2.8
4	2486.72	51.8 AV	54.0	-2.2	1.63 V	303	54.6	-2.8
5	4944.00	43.3 PK	74.0	-30.7	1.26 V	285	41.5	1.8
6	4944.00	38.7 AV	54.0	-15.3	1.26 V	285	36.9	1.8
7	7416.00	49.5 PK	74.0	-24.5	1.71 V	261	42.0	7.5
8	7416.00	43.8 AV	54.0	-10.2	1.71 V	261	36.3	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.4 PK	74.0	-9.6	1.00 H	149	67.1	-2.7
2	2390.00	47.6 AV	54.0	-6.4	1.00 H	149	50.3	-2.7
3	*2412.00	103.1 PK			1.00 H	149	105.8	-2.7
4	*2412.00	92.9 AV			1.00 H	149	95.6	-2.7
5	4824.00	39.5 PK	74.0	-34.5	1.64 H	164	37.7	1.8
6	4824.00	34.5 AV	54.0	-19.5	1.64 H	164	32.7	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.8 PK	74.0	-3.2	1.28 V	238	73.5	-2.7
2	2390.00	52.4 AV	54.0	-1.6	1.28 V	238	55.1	-2.7
3	*2412.00	112.8 PK			1.28 V	238	115.5	-2.7
4	*2412.00	103.8 AV			1.28 V	238	106.5	-2.7
5	4824.00	43.5 PK	74.0	-30.5	1.19 V	285	41.7	1.8
6	4824.00	38.8 AV	54.0	-15.2	1.19 V	285	37.0	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.7 PK	74.0	-21.3	1.05 H	153	55.4	-2.7
2	2390.00	39.1 AV	54.0	-14.9	1.05 H	153	41.8	-2.7
3	*2437.00	104.8 PK			1.05 H	153	107.5	-2.7
4	*2437.00	94.4 AV			1.05 H	153	97.1	-2.7
5	2483.50	55.3 PK	74.0	-18.7	1.05 H	153	58.1	-2.8
6	2483.50	40.1 AV	54.0	-13.9	1.05 H	153	42.9	-2.8
7	4874.00	39.4 PK	74.0	-34.6	1.65 H	160	37.7	1.7
8	4874.00	34.8 AV	54.0	-19.2	1.65 H	160	33.1	1.7
9	7311.00	45.6 PK	74.0	-28.4	1.98 H	207	38.4	7.2
10	7311.00	39.7 AV	54.0	-14.3	1.98 H	207	32.5	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.1 PK	74.0	-14.9	1.31 V	126	61.8	-2.7
2	2390.00	45.2 AV	54.0	-8.8	1.31 V	126	47.9	-2.7
3	*2437.00	115.6 PK			1.31 V	126	118.3	-2.7
4	*2437.00	105.1 AV			1.31 V	126	107.8	-2.7
5	2483.50	60.1 PK	74.0	-13.9	1.31 V	126	62.9	-2.8
6	2483.50	45.8 AV	54.0	-8.2	1.31 V	126	48.6	-2.8
7	4874.00	42.8 PK	74.0	-31.2	1.24 V	294	41.1	1.7
8	4874.00	38.3 AV	54.0	-15.7	1.24 V	294	36.6	1.7
9	7311.00	55.0 PK	74.0	-19.0	1.67 V	264	47.8	7.2
10	7311.00	41.1 AV	54.0	-12.9	1.67 V	264	33.9	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.1 PK			1.24 H	221	101.9	-2.8
2	*2462.00	89.0 AV			1.24 H	221	91.8	-2.8
3	2483.50	60.1 PK	74.0	-13.9	1.24 H	221	62.9	-2.8
4	2483.50	44.8 AV	54.0	-9.2	1.24 H	221	47.6	-2.8
5	4924.00	39.7 PK	74.0	-34.3	1.65 H	165	37.9	1.8
6	4924.00	34.6 AV	54.0	-19.4	1.65 H	165	32.8	1.8
7	7386.00	45.5 PK	74.0	-28.5	1.93 H	194	38.1	7.4
8	7386.00	39.6 AV	54.0	-14.4	1.93 H	194	32.2	7.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.9 PK			1.69 V	304	115.7	-2.8
2	*2462.00	103.8 AV			1.69 V	304	106.6	-2.8
3	2483.50	68.6 PK	74.0	-5.4	1.69 V	304	71.4	-2.8
4	2483.50	52.1 AV	54.0	-1.9	1.69 V	304	54.9	-2.8
5	4924.00	43.4 PK	74.0	-30.6	1.20 V	305	41.6	1.8
6	4924.00	38.7 AV	54.0	-15.3	1.20 V	305	36.9	1.8
7	7386.00	55.3 PK	74.0	-18.7	1.66 V	279	47.9	7.4
8	7386.00	41.1 AV	54.0	-12.9	1.66 V	279	33.7	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	101.5 PK			1.44 H	112	104.3	-2.8
2	*2467.00	93.1 AV			1.44 H	112	95.9	-2.8
3	2483.50	55.8 PK	74.0	-18.2	1.44 H	112	58.6	-2.8
4	2483.50	44.2 AV	54.0	-9.8	1.44 H	112	47.0	-2.8
5	4934.00	38.9 PK	74.0	-35.1	1.59 H	176	37.1	1.8
6	4934.00	34.2 AV	54.0	-19.8	1.59 H	176	32.4	1.8
7	7401.00	45.6 PK	74.0	-28.4	1.96 H	203	38.1	7.5
8	7401.00	39.8 AV	54.0	-14.2	1.96 H	203	32.3	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.2 PK			1.19 V	81	109.0	-2.8
2	*2467.00	96.1 AV			1.19 V	81	98.9	-2.8
3	2483.50	60.3 PK	74.0	-13.7	1.19 V	81	63.1	-2.8
4	2483.50	46.5 AV	54.0	-7.5	1.19 V	81	49.3	-2.8
5	4934.00	42.2 PK	74.0	-31.8	1.23 V	281	40.4	1.8
6	4934.00	37.9 AV	54.0	-16.1	1.23 V	281	36.1	1.8
7	7401.00	54.4 PK	74.0	-19.6	1.65 V	280	46.9	7.5
8	7401.00	40.6 AV	54.0	-13.4	1.65 V	280	33.1	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	101.1 PK			1.50 H	123	103.9	-2.8
2	*2472.00	92.1 AV			1.50 H	123	94.9	-2.8
3	2483.50	57.2 PK	74.0	-16.8	1.50 H	123	60.0	-2.8
4	2483.50	44.4 AV	54.0	-9.6	1.50 H	123	47.2	-2.8
5	4944.00	39.8 PK	74.0	-34.2	1.65 H	173	38.0	1.8
6	4944.00	34.7 AV	54.0	-19.3	1.65 H	173	32.9	1.8
7	7416.00	45.5 PK	74.0	-28.5	2.02 H	185	38.0	7.5
8	7416.00	39.6 AV	54.0	-14.4	2.02 H	185	32.1	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.8 PK			1.05 V	84	107.6	-2.8
2	*2472.00	94.8 AV			1.05 V	84	97.6	-2.8
3	2488.25	62.3 PK	74.0	-11.7	1.05 V	84	65.1	-2.8
4	2488.25	46.5 AV	54.0	-7.5	1.05 V	84	49.3	-2.8
5	4944.00	42.3 PK	74.0	-31.7	1.25 V	294	40.5	1.8
6	4944.00	38.0 AV	54.0	-16.0	1.25 V	294	36.2	1.8
7	7416.00	55.2 PK	74.0	-18.8	1.68 V	264	47.7	7.5
8	7416.00	41.0 AV	54.0	-13.0	1.68 V	264	33.5	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.1 PK	74.0	-8.9	1.05 H	153	67.8	-2.7
2	2390.00	49.5 AV	54.0	-4.5	1.05 H	153	52.2	-2.7
3	*2412.00	105.1 PK			1.05 H	153	107.8	-2.7
4	*2412.00	92.6 AV			1.05 H	153	95.3	-2.7
5	4824.00	39.2 PK	74.0	-34.8	1.65 H	171	37.4	1.8
6	4824.00	34.3 AV	54.0	-19.7	1.65 H	171	32.5	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	1.26 V	235	71.8	-2.7
2	2390.00	52.2 AV	54.0	-1.8	1.26 V	235	54.9	-2.7
3	*2412.00	114.8 PK			1.26 V	235	117.5	-2.7
4	*2412.00	103.7 AV			1.26 V	235	106.4	-2.7
5	4824.00	42.8 PK	74.0	-31.2	1.19 V	285	41.0	1.8
6	4824.00	38.3 AV	54.0	-15.7	1.19 V	285	36.5	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.3 PK	74.0	-21.7	1.10 H	166	55.0	-2.7
2	2390.00	38.6 AV	54.0	-15.4	1.10 H	166	41.3	-2.7
3	*2437.00	107.4 PK			1.10 H	166	110.1	-2.7
4	*2437.00	94.8 AV			1.10 H	166	97.5	-2.7
5	2483.50	54.9 PK	74.0	-19.1	1.10 H	166	57.7	-2.8
6	2483.50	40.2 AV	54.0	-13.8	1.10 H	166	43.0	-2.8
7	4874.00	39.9 PK	74.0	-34.1	1.66 H	182	38.2	1.7
8	4874.00	34.8 AV	54.0	-19.2	1.66 H	182	33.1	1.7
9	7311.00	45.9 PK	74.0	-28.1	1.99 H	181	38.7	7.2
10	7311.00	40.1 AV	54.0	-13.9	1.99 H	181	32.9	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	1.21 V	301	61.3	-2.7
2	2390.00	45.5 AV	54.0	-8.5	1.21 V	301	48.2	-2.7
3	*2437.00	116.2 PK			1.21 V	301	118.9	-2.7
4	*2437.00	105.2 AV			1.21 V	301	107.9	-2.7
5	2483.50	61.4 PK	74.0	-12.6	1.21 V	301	64.2	-2.8
6	2483.50	46.0 AV	54.0	-8.0	1.21 V	301	48.8	-2.8
7	4874.00	42.1 PK	74.0	-31.9	1.26 V	287	40.4	1.7
8	4874.00	37.8 AV	54.0	-16.2	1.26 V	287	36.1	1.7
9	7311.00	55.2 PK	74.0	-18.8	1.70 V	255	48.0	7.2
10	7311.00	41.3 AV	54.0	-12.7	1.70 V	255	34.1	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.3 PK			1.25 H	219	103.1	-2.8
2	*2462.00	88.9 AV			1.25 H	219	91.7	-2.8
3	2483.50	58.3 PK	74.0	-15.7	1.25 H	219	61.1	-2.8
4	2483.50	45.2 AV	54.0	-8.8	1.25 H	219	48.0	-2.8
5	4924.00	39.2 PK	74.0	-34.8	1.63 H	173	37.4	1.8
6	4924.00	34.4 AV	54.0	-19.6	1.63 H	173	32.6	1.8
7	7386.00	45.6 PK	74.0	-28.4	2.01 H	194	38.2	7.4
8	7386.00	40.0 AV	54.0	-14.0	2.01 H	194	32.6	7.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.2 PK			1.68 V	306	117.0	-2.8
2	*2462.00	102.9 AV			1.68 V	306	105.7	-2.8
3	2483.50	67.0 PK	74.0	-7.0	1.68 V	306	69.8	-2.8
4	2483.50	52.2 AV	54.0	-1.8	1.68 V	306	55.0	-2.8
5	4924.00	43.0 PK	74.0	-31.0	1.20 V	303	41.2	1.8
6	4924.00	38.5 AV	54.0	-15.5	1.20 V	303	36.7	1.8
7	7386.00	55.1 PK	74.0	-18.9	1.63 V	253	47.7	7.4
8	7386.00	41.0 AV	54.0	-13.0	1.63 V	253	33.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	103.5 PK			1.50 H	116	106.3	-2.8
2	*2467.00	92.6 AV			1.50 H	116	95.4	-2.8
3	2483.50	56.3 PK	74.0	-17.7	1.50 H	116	59.1	-2.8
4	2483.50	44.1 AV	54.0	-9.9	1.50 H	116	46.9	-2.8
5	4934.00	39.4 PK	74.0	-34.6	1.66 H	191	37.6	1.8
6	4934.00	34.5 AV	54.0	-19.5	1.66 H	191	32.7	1.8
7	7401.00	45.9 PK	74.0	-28.1	2.03 H	193	38.4	7.5
8	7401.00	39.9 AV	54.0	-14.1	2.03 H	193	32.4	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.7 PK			1.01 V	76	110.5	-2.8
2	*2467.00	95.6 AV			1.01 V	76	98.4	-2.8
3	2483.50	62.6 PK	74.0	-11.4	1.01 V	76	65.4	-2.8
4	2483.50	47.3 AV	54.0	-6.7	1.01 V	76	50.1	-2.8
5	4934.00	42.8 PK	74.0	-31.2	1.29 V	292	41.0	1.8
6	4934.00	38.2 AV	54.0	-15.8	1.29 V	292	36.4	1.8
7	7401.00	54.5 PK	74.0	-19.5	1.70 V	252	47.0	7.5
8	7401.00	40.6 AV	54.0	-13.4	1.70 V	252	33.1	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	102.6 PK			1.59 H	122	105.4	-2.8
2	*2472.00	91.4 AV			1.59 H	122	94.2	-2.8
3	2483.50	61.8 PK	74.0	-12.2	1.59 H	122	64.6	-2.8
4	2483.50	44.0 AV	54.0	-10.0	1.59 H	122	46.8	-2.8
5	4944.00	39.5 PK	74.0	-34.5	1.70 H	173	37.7	1.8
6	4944.00	34.9 AV	54.0	-19.1	1.70 H	173	33.1	1.8
7	7416.00	45.5 PK	74.0	-28.5	2.01 H	193	38.0	7.5
8	7416.00	39.6 AV	54.0	-14.4	2.01 H	193	32.1	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.1 PK			1.06 V	85	108.9	-2.8
2	*2472.00	94.5 AV			1.06 V	85	97.3	-2.8
3	2483.50	68.4 PK	74.0	-5.6	1.06 V	85	71.2	-2.8
4	2483.50	45.3 AV	54.0	-8.7	1.06 V	85	48.1	-2.8
5	4944.00	42.5 PK	74.0	-31.5	1.24 V	305	40.7	1.8
6	4944.00	38.0 AV	54.0	-16.0	1.24 V	305	36.2	1.8
7	7416.00	55.4 PK	74.0	-18.6	1.68 V	264	47.9	7.5
8	7416.00	41.3 AV	54.0	-12.7	1.68 V	264	33.8	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.00	65.2 PK	74.0	-8.8	1.03 H	148	67.9	-2.7
2	2388.00	46.8 AV	54.0	-7.2	1.03 H	148	49.5	-2.7
3	*2422.00	101.1 PK			1.03 H	148	103.8	-2.7
4	*2422.00	88.8 AV			1.03 H	148	91.5	-2.7
5	4844.00	38.9 PK	74.0	-35.1	1.60 H	173	37.1	1.8
6	4844.00	34.4 AV	54.0	-19.6	1.60 H	173	32.6	1.8
7	7266.00	44.9 PK	74.0	-29.1	1.95 H	192	37.6	7.3
8	7266.00	39.2 AV	54.0	-14.8	1.95 H	192	31.9	7.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.82	72.2 PK	74.0	-1.8	1.58 V	160	74.9	-2.7
2	2387.82	51.7 AV	54.0	-2.3	1.58 V	160	54.4	-2.7
3	*2422.00	111.1 PK			1.58 V	160	113.8	-2.7
4	*2422.00	99.5 AV			1.58 V	160	102.2	-2.7
5	4844.00	43.0 PK	74.0	-31.0	1.21 V	299	41.2	1.8
6	4844.00	38.2 AV	54.0	-15.8	1.21 V	299	36.4	1.8
7	7266.00	54.4 PK	74.0	-19.6	1.73 V	280	47.1	7.3
8	7266.00	40.7 AV	54.0	-13.3	1.73 V	280	33.4	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.0 PK	74.0	-12.0	1.01 H	159	64.7	-2.7
2	2390.00	44.5 AV	54.0	-9.5	1.01 H	159	47.2	-2.7
3	*2437.00	101.3 PK			1.01 H	159	104.0	-2.7
4	*2437.00	89.1 AV			1.01 H	159	91.8	-2.7
5	2483.50	62.3 PK	74.0	-11.7	1.01 H	159	65.1	-2.8
6	2483.50	45.5 AV	54.0	-8.5	1.01 H	159	48.3	-2.8
7	4874.00	39.3 PK	74.0	-34.7	1.70 H	175	37.6	1.7
8	4874.00	34.2 AV	54.0	-19.8	1.70 H	175	32.5	1.7
9	7311.00	45.7 PK	74.0	-28.3	1.95 H	185	38.5	7.2
10	7311.00	40.0 AV	54.0	-14.0	1.95 H	185	32.8	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.60 V	293	70.9	-2.7
2	2390.00	50.9 AV	54.0	-3.1	1.60 V	293	53.6	-2.7
3	*2437.00	110.9 PK			1.60 V	293	113.6	-2.7
4	*2437.00	98.9 AV			1.60 V	293	101.6	-2.7
5	2483.50	70.8 PK	74.0	-3.2	1.60 V	293	73.6	-2.8
6	2483.50	52.3 AV	54.0	-1.7	1.60 V	293	55.1	-2.8
7	4874.00	43.1 PK	74.0	-30.9	1.24 V	285	41.4	1.7
8	4874.00	38.4 AV	54.0	-15.6	1.24 V	285	36.7	1.7
9	7311.00	54.8 PK	74.0	-19.2	1.67 V	279	47.6	7.2
10	7311.00	40.8 AV	54.0	-13.2	1.67 V	279	33.6	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	98.2 PK			1.05 H	220	100.9	-2.7
2	*2452.00	85.6 AV			1.05 H	220	88.3	-2.7
3	2488.64	56.8 PK	74.0	-17.2	1.05 H	220	59.6	-2.8
4	2488.64	43.7 AV	54.0	-10.3	1.05 H	220	46.5	-2.8
5	4904.00	38.9 PK	74.0	-35.1	1.69 H	161	37.2	1.7
6	4904.00	34.1 AV	54.0	-19.9	1.69 H	161	32.4	1.7
7	7356.00	46.0 PK	74.0	-28.0	1.91 H	206	38.7	7.3
8	7356.00	40.0 AV	54.0	-14.0	1.91 H	206	32.7	7.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	110.7 PK			1.13 V	295	113.4	-2.7
2	*2452.00	98.6 AV			1.13 V	295	101.3	-2.7
3	2486.73	70.3 PK	74.0	-3.7	1.13 V	295	73.1	-2.8
4	2486.73	52.2 AV	54.0	-1.8	1.13 V	295	55.0	-2.8
5	2489.91	71.3 PK	74.0	-2.7	1.13 V	295	74.1	-2.8
6	2489.91	52.1 AV	54.0	-1.9	1.13 V	295	54.9	-2.8
7	4904.00	42.7 PK	74.0	-31.3	1.29 V	299	41.0	1.7
8	4904.00	38.4 AV	54.0	-15.6	1.29 V	299	36.7	1.7
9	7356.00	54.7 PK	74.0	-19.3	1.62 V	269	47.4	7.3
10	7356.00	40.6 AV	54.0	-13.4	1.62 V	269	33.3	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	97.9 PK			1.06 H	215	100.6	-2.7
2	*2457.00	85.4 AV			1.06 H	215	88.1	-2.7
3	2493.27	59.0 PK	74.0	-15.0	1.06 H	215	61.8	-2.8
4	2493.27	43.9 AV	54.0	-10.1	1.06 H	215	46.7	-2.8
5	4914.00	39.0 PK	74.0	-35.0	1.67 H	184	37.3	1.7
6	4914.00	34.1 AV	54.0	-19.9	1.67 H	184	32.4	1.7
7	7371.00	45.6 PK	74.0	-28.4	2.01 H	180	38.3	7.3
8	7371.00	40.1 AV	54.0	-13.9	2.01 H	180	32.8	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	110.6 PK			1.09 V	291	113.3	-2.7
2	*2457.00	98.2 AV			1.09 V	291	100.9	-2.7
3	2484.73	68.0 PK	74.0	-6.0	1.09 V	291	70.8	-2.8
4	2484.73	52.4 AV	54.0	-1.6	1.09 V	291	55.2	-2.8
5	2493.28	69.8 PK	74.0	-4.2	1.09 V	291	72.6	-2.8
6	2493.28	51.7 AV	54.0	-2.3	1.09 V	291	54.5	-2.8
7	4914.00	42.3 PK	74.0	-31.7	1.18 V	302	40.6	1.7
8	4914.00	37.8 AV	54.0	-16.2	1.18 V	302	36.1	1.7
9	7371.00	54.8 PK	74.0	-19.2	1.62 V	253	47.5	7.3
10	7371.00	41.1 AV	54.0	-12.9	1.62 V	253	33.8	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.