

KTL Test Report:

0R03098.1
Issue 2.0

Applicant:

Nortel Networks
2351 Blvd. Alfred Nobel
St. Laurent, Quebec
H4S 2A9

**Equipment Under Test:
(E.U.T.)**

Small Antenna

In Accordance With:

FCC Part 15, Subpart C

For Low Power Transmitters Operating Periodically
In The Band 40.66 - 40.77 MHz And Above 70 MHz

Tested By:

KTL Ottawa Inc.
3325 River Road, R.R. 5
Ottawa, Ontario K1V 1H2

Authorized By:



G. Westwell, Technologist

Date:

March 23, 2001

Total Number of Pages:

18

Authorized Copy:

Soft Copy

EQUIPMENT: Small Antenna
ISSUE: 2.0

Table of Contents

Section 1.	Summary of Test Results.....	3
Section 2.	Equipment Under Test (E.U.T.).....	5
Section 3.	Transmission Requirements	9
Section 4.	Occupied Bandwidth	11
Section 5.	Periodic Alternate Field Strength Requirements.....	13
Section 6.	Block Diagrams	16
Section 7.	Test Equipment List	18

EQUIPMENT: *Small Antenna*
ISSUE: 2.0

Section 1. Summary of Test Results

General

All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.231. All tests were conducted using measurement procedure ANSI C63.4-1992. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.



New Submission




Production Unit



Class II Permissive Change



Pre-Production Unit



Equipment Code

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST
SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



NVLAP LAB CODE: 100351-0

TESTED BY:

A handwritten signature in blue ink, reading "Russell Grant", is written over the printed name.

Russell Grant, Wireless Group Manager

DATE: March 23, 2001

KTL Ottawa Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. KTL Ottawa Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

EQUIPMENT: Small Antenna
ISSUE: 2.0

Summary Of Test Data

Name of Test	Para. Number	Results
Transmission Requirements	15.231(a)	Complies
Radiated Emissions	15.231(b)	Not Applicable*
Occupied Bandwidth	15.231(c)	Complies
Frequency Tolerance	15.231(d)	Not Applicable
Periodic Alternate Field Strength Requirements	15.231(e)	Complies
Powerline Conducted Emissions	15.207	Not Applicable

Footnotes For N/A's:


DC Powered


- * Application is being made under the provision of 15.231(e) for periodic alternate field strengths.


Section 2. Equipment Under Test (E.U.T.)

General Equipment Information

Manufacturer:	Nortel Networks
Date Received In Laboratory:	October 2, 2000
KTL Identification No.:	Item #1
Frequency Range:	418 MHz
Operating Frequency(ies) of Sample:	418 MHz
Emission Designator:	80K0K1D
Supply Power Requirement:	Batteries
Duty Cycle Calculation:	$20 \log \left(\frac{7 \times 1.167}{100} \right) = -21.8 \text{ dB}$

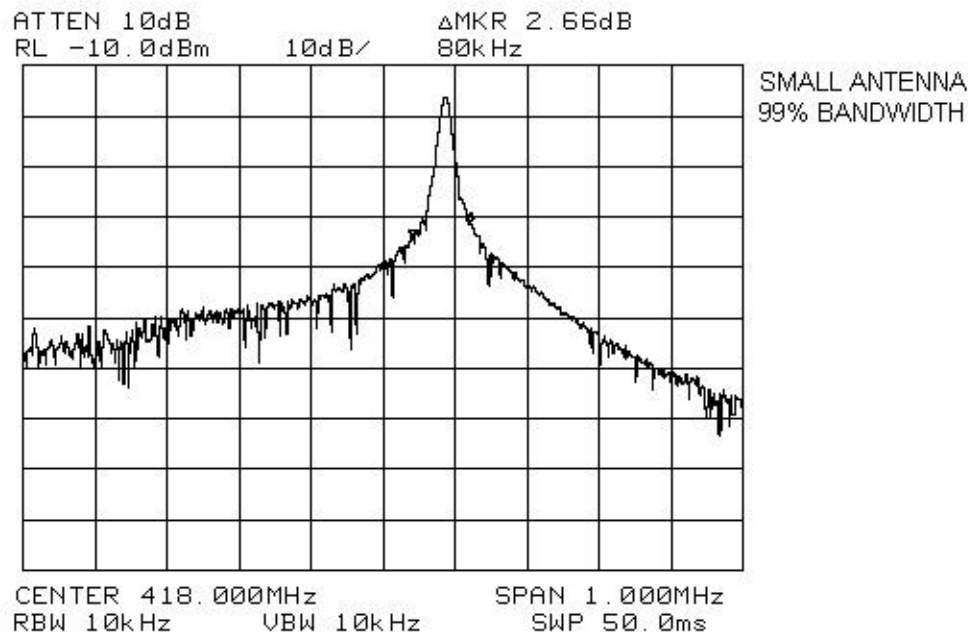

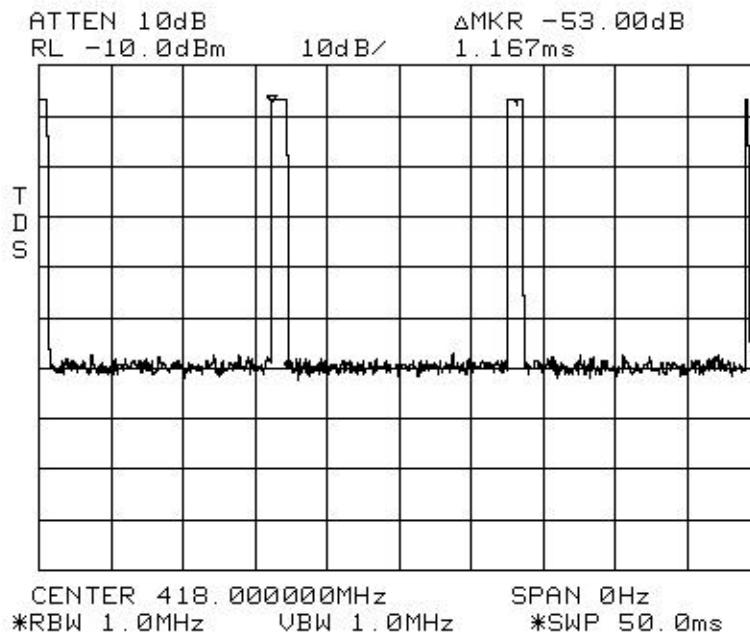

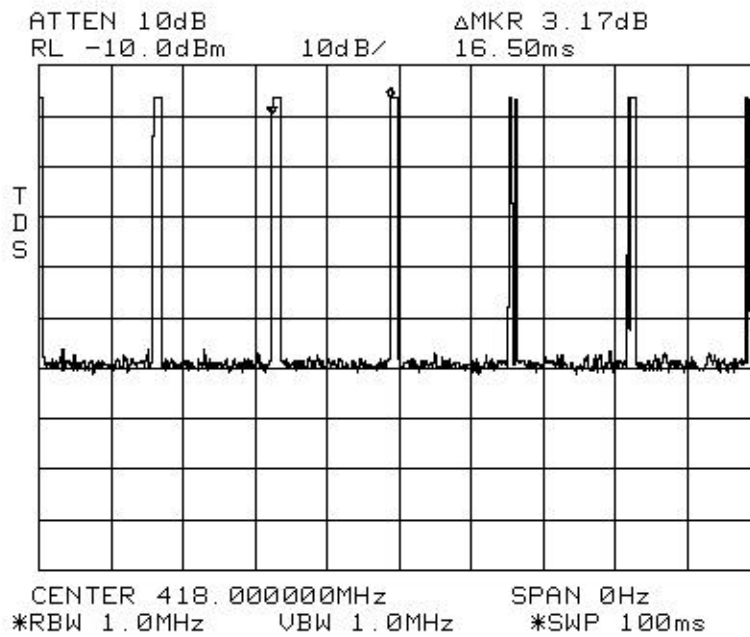

Section 3. Transmission Requirements

Para. No.: 15.231(a)

Test Performed By: Russell Grant	Date of Test: October 27, 2000
---	---------------------------------------

Minimum Standard: 15.231(a) Continuous transmissions such as voice, video or data transmissions are not permitted.

15.231(a)(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds after being released.

15.231(a)(2) A transmitter activated automatically shall cease transmission within 5 seconds of activation.

15.231(a)(3) Periodic transmissions at regular pre-determined intervals are not permitted. However polling or supervisory transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

15.231(a)(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm.

Test Results: Complies.

Test Data: Compliance was determined by verification of technical specifications and a functional test on the equipment.

Rationale for Compliance with Transmission Requirements

- 15.231(a)(1) :** The transmitter is automatically deactivated 368ms after turn on.
This is the maximum transmit time.
- 15.231(a)(2) :** No automatic activation.
- 15.231(a)(3) :** No periodic transmission.
- 15.231(a)(4) :** Not applicable.

Section 4. Occupied Bandwidth

Para. No.: 15.231(c)


Test Performed By: Russell Grant	Date of Test: October 27, 2000
---	---------------------------------------

Minimum Standard: 15.231(c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Results: Complies. See attached graph.

The 20 dB bandwidth is 52 kHz. This is 0.0120% of the centre frequency.

Test Data: See attached graph.

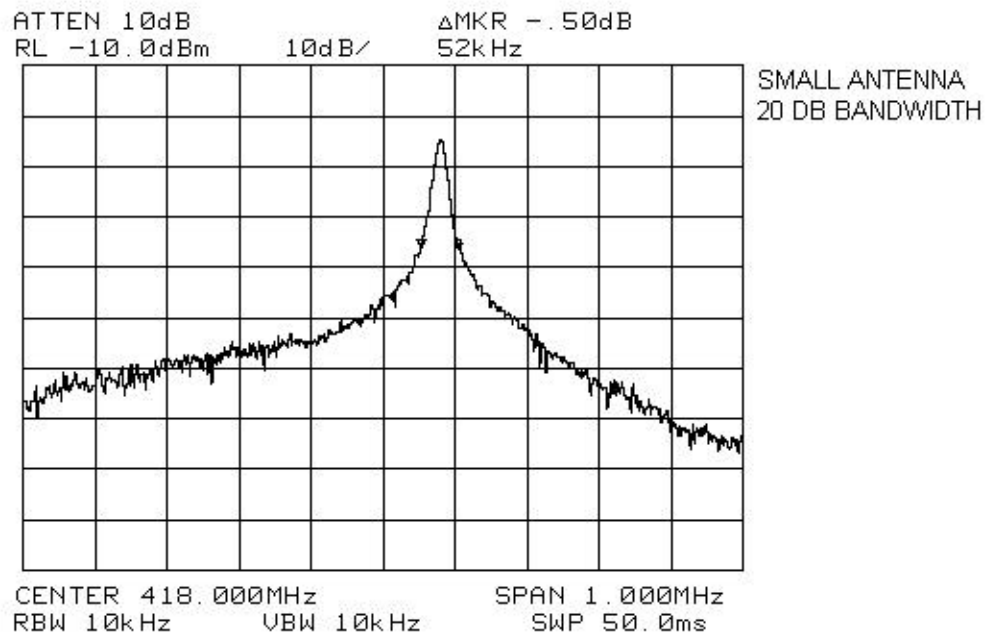

Section 5. Periodic Alternate Field Strength Requirements

Para. No.: 15.231(e)

Test Performed By: Russell Grant	Date of Test: October 27, 2001
---	---------------------------------------

Minimum Standard:

15.231(e) Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation, including operation prohibited in paragraph (a) of this section, provided the intentional radiator complies with the provisions of paragraphs (b) through (d) of this section, except the field strength table in paragraph (b) of this section is replaced by the following.

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	1,000	100
70 - 130	500	50
130 - 174	500 to 1,500	50 to 150
174 - 260	1,500	150
260-470	1,500 to 5,000	150 to 500
Above 470	5,000	500

In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

Test Results:

Complies.

The worst case emission is 57.9 dB μ V/m @ 3m at 418.03MHz.
This is 14.4dB below the specification limit.

Test Data:


See attached table.

Test Data - Radiated Emissions

Test Distance (meters) : 3		Range: A Tower		Receiver: ESVP		RBW(kHz): 100		Detector: Peak	
Freq. (MHz)	Ant. *	Pol. (V/H)	RCVD Signal (dBµV/m)	Ant. Factor (dB)**	Amp. Gain (dB)***	Duty Cycle (dB)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
418.03	E/D4	V	53.3	24.6		-20.0	57.9	72.3	14.4
418.03	E/D4	H	44.0	24.6		-20.0	48.6	72.3	23.7
<p>No transmitter spurious emissions were detected within 20 dB of the specification limit. The spectrum was searched up to the 10th harmonic of the fundamental frequency of operation.</p>									
<p>Notes: B/C = Biconical, B/L = Biconilog, L/P = Log-Periodic, H = Horn, D/P = Dipole * Re-measured using dipole antenna. ** Includes cable loss when amplifier is not used. *** Includes cable loss. () Denotes failing emission level. N.D. = Not Detected</p>									


Radiated Photographs (Worst Case Configuration)

Side View

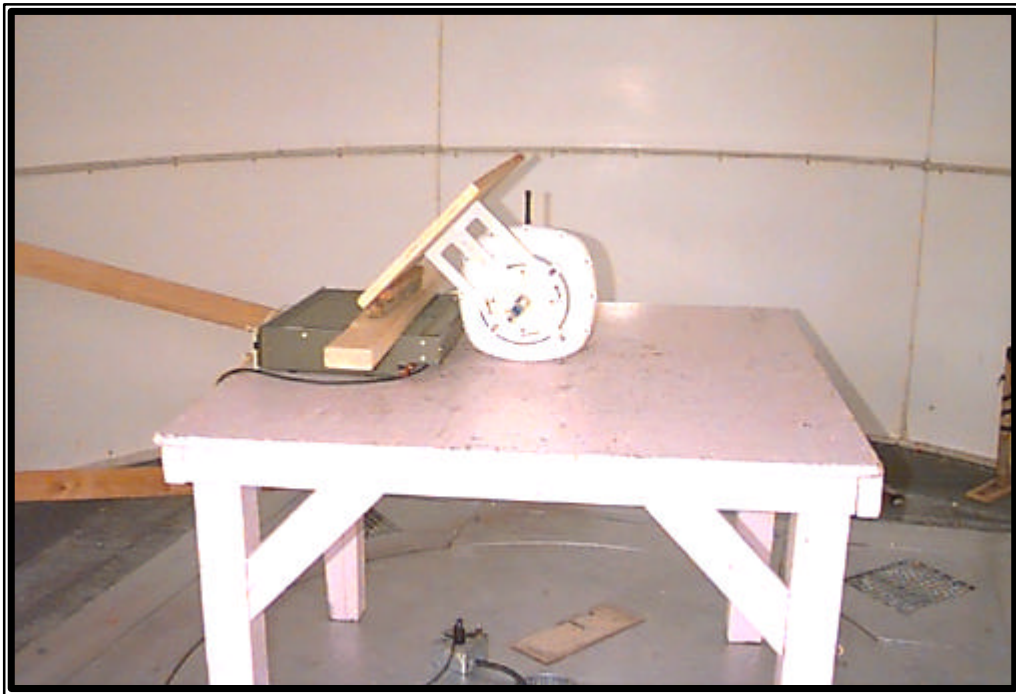


Section 6. Block Diagrams

Radiated Prescan

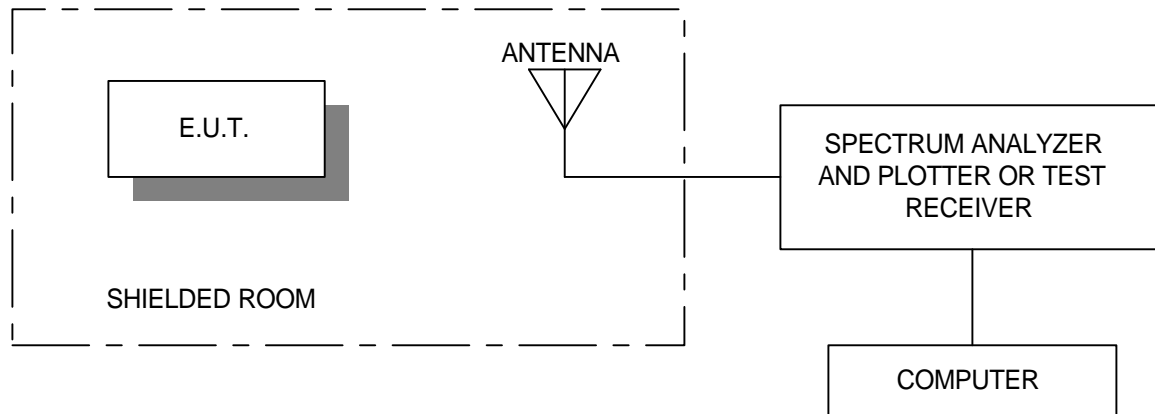


Outdoor Test Site For Radiated Emissions

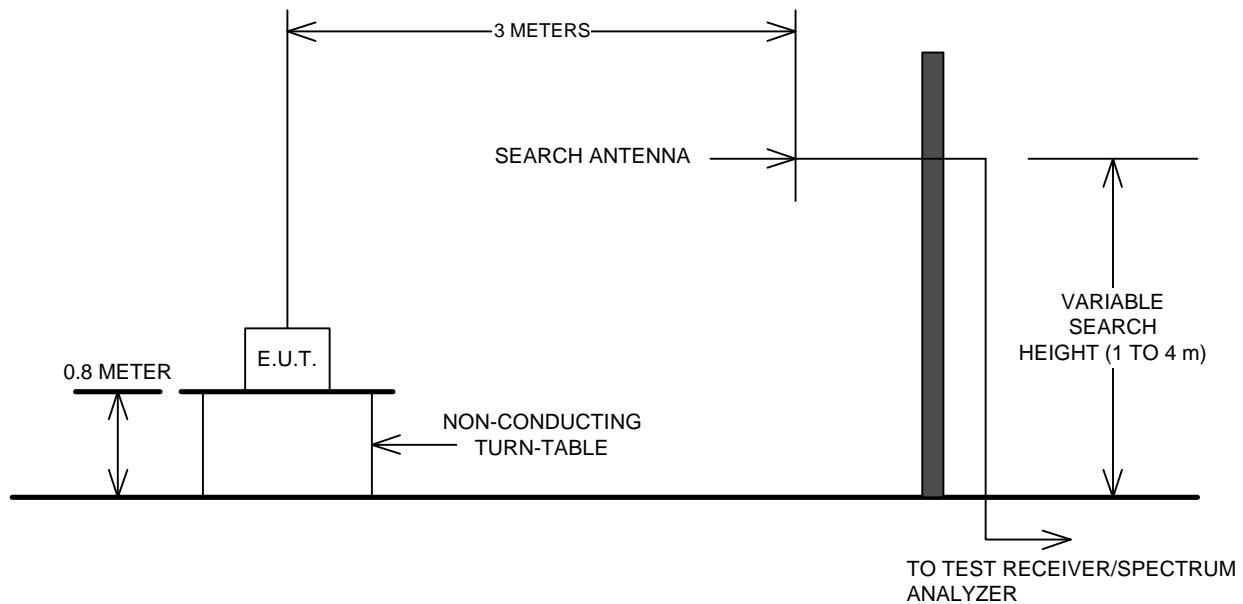

The spectrum was searched up to the 10th harmonic of the fundamental frequency of operation.

Occupied Bandwidth

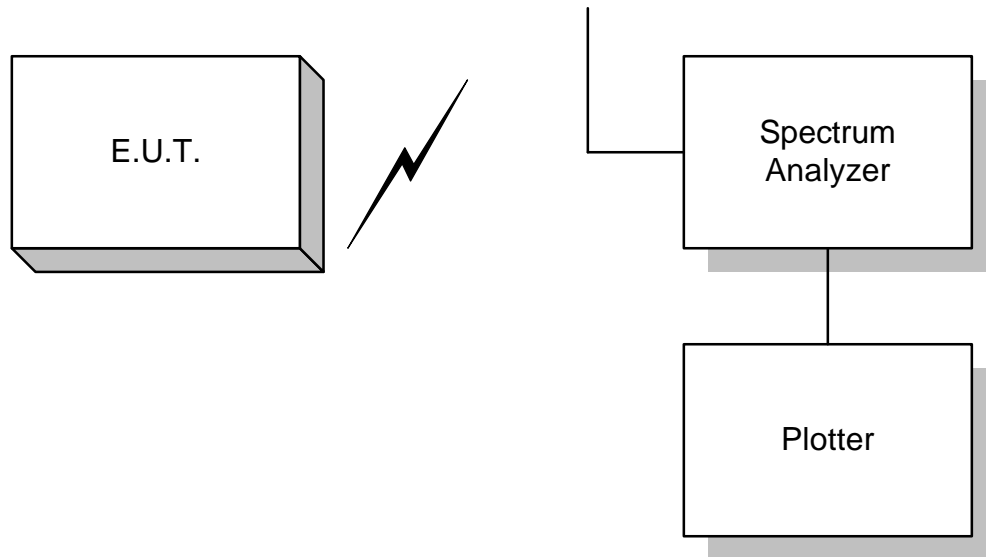

Section 7. Test Equipment List

CAL CYCLE	EQUIPMENT	MANUFACTURER	MODEL	SERIAL	LAST CAL.	NEXT CAL.
1 Year	Spectrum Analyzer	Hewlett Packard	8565E	FA000981	June 16/00	June 16/01
1 Year	Spectrum Analyzer-1	Hewlett Packard	8566B	2311A02238	Nov. 6/99	Nov. 6/00
1 Year	Spectrum Analyzer Display-1	Hewlett Packard	8566B	2314A04759	Nov. 6/99	Nov. 6/00
1 Year	Climate Chamber	Thermotron	SM-16C	15649-S	COU	COU
1 Year	Receiver	Rohde & Schwarz	ESVP	892661/014	April 5/00	April 5/01
	Biconilog Antenna	EMCO	3143	1038	NCR	NCR
1 Year	Horn Antenna	EMCO #2	3115	4336	Nov. 11/99	Nov. 11/00
1 Year	Dipole Antenna Set	EMCO #2	3121C	FA001349	June 27/00	June 27/01
1 Year	RF AMP	JCA	2-4 GHz	FA001496	May 31/00	May 31/01
1 Year	RF AMP	JCA	1-2 GHz	FA001498	May 31/00	May 31/01
1 Year	RF AMP	JCA	4-8 GHz	FA001497	May 31/00	May 31/01

NA: Not Applicable
NCR: No Cal Required
COU: CAL On Use