



Product Service

**Choose certainty.
Add value.**

Report On

FCC Testing of the Sharp SHV31 Dual-band UMTS (FDDI, FDDV) & Quad-band GSM (GSM850/GSM900/DCS1800/PCS1900) & Quad-band LTE (B1,B3, B17, B26) & AXGP (TDD41) multi mode cellular phone with Bluetooth, ANT+, WLAN, SRD (NFC, FeliCa) and GPS
In accordance with FCC CFR 47 Part 15B

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00214

Document 75928148 Report 12 Issue 1

December 2014



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC Testing of the
Sharp SHV31 Dual-band UMTS (FDDI, FDDV) & Quad-band GSM
(GSM850/GSM900/DCS1800/PCS1900) & Quad-band LTE (B1,B3,
B17, B26) & AXGP (TDD41) multi mode cellular phone with
Bluetooth, ANT+, WLAN, SRD (NFC, FeliCa) and GPS
In accordance with FCC CFR 47 Part 15B

Document 75928148 Report 12 Issue 1

December 2014

PREPARED FOR

Sharp Communication Compliance Limited
Inspired
Easthampstead Road
Bracknell
Berkshire
RG12 1NS

PREPARED BY

Natalie Bennett
Senior Administrator, Project Support

APPROVED BY

Ryan Henley
Authorised Signatory

DATED

23 December 2014

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 15B. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

J Tuckwell

Document 75928148 Report 12 Issue 1



Page 1 of 20

COMMERCIAL-IN-CONFIDENCE



CONTENTS

Section	Page No
1	REPORT SUMMARY 3
1.1	Introduction 4
1.2	Brief Summary of Results 5
1.3	Product Technical Description 6
1.4	Product Information 6
1.5	Test Conditions 6
1.6	Deviations from the Standard 6
1.7	Modification Record 6
2	TEST DETAILS 7
2.1	AC Line Conducted Emissions 8
2.2	Radiated Emissions 11
3	TEST EQUIPMENT USED 16
3.1	Test Equipment Used 17
3.2	Measurement Uncertainty 18
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 19
4.1	Accreditation, Disclaimers and Copyright 20



Product Service

SECTION 1

REPORT SUMMARY

FCC Testing of the
Sharp SHV31 Dual-band UMTS (FDDI, FDDV) & Quad-band GSM
(GSM850/GSM900/DCS1800/PCS1900) & Quad-band LTE (B1,B3, B17, B26) & AXGP
(TDD41) multi mode cellular phone with Bluetooth, ANT+, WLAN, SRD (NFC, FeliCa) and GPS
In accordance with FCC CFR 47 Part 15B



1.1 INTRODUCTION

The information contained in this report is intended to show the verification of FCC Testing of the Sharp SHV31 Dual-band UMTS (FDDI, FDDV) & Quad-band GSM (GSM850/GSM900/DCS1800/PCS1900) & Quad-band LTE (B1,B3, B17, B26) & AXGP (TDD41) multi mode cellular phone with Bluetooth, ANT+, WLAN, SRD (NFC, FeliCa) and GPS to the requirements of FCC CFR 47 Part 15B.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Model Number(s)	SHV31
Serial Number(s)	IMEI 004401115315521
Number of Samples Tested	1
Test Specification/Issue/Date	FCC CFR 47 Part 15B (2013)
Disposal	Held Pending Disposal
Reference Number	Not Applicable
Date	Not Applicable
Order Number	10329
Date	20 October 2014
Start of Test	18 December 2014
Finish of Test	19 December 2014
Name of Engineer(s)	J Tuckwell
Related Document(s)	ANSI C63.4 (2009)



Product Service

1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 15B is shown below.

Section	Spec Clause	Test Description	Result	Comments/Base Standard
AC Powered/USB with GPS Rx Operational				
2.1	15.107	AC Line Conducted Emissions	Pass	ANSI C63.4
2.2	15.109	Radiated Emissions	Pass	ANSI C63.4



1.3 PRODUCT TECHNICAL DESCRIPTION

Please refer to the SHV31 Model Description Form.

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Sharp SHV31 Dual-band UMTS (FDDI, FDDV) & Quad-band GSM (GSM850/GSM900/DCS1800/PCS1900) & Quad-band LTE (B1,B3, B17, B26) & AXGP (TDD41) multi mode cellular phone with Bluetooth, ANT+, WLAN, SRD (NFC, FeliCa) and GPS. A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply.

FCC Measurement Facility Registration Number
90987 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

FCC Testing of the
Sharp SHV31 Dual-band UMTS (FDDI, FDDV) & Quad-band GSM
(GSM850/GSM900/DCS1800/PCS1900) & Quad-band LTE (B1,B3, B17, B26) & AXGP
(TDD41) multi mode cellular phone with Bluetooth, ANT+, WLAN, SRD (NFC, FeliCa) and GPS
In accordance with FCC CFR 47 Part 15B



2.1 AC LINE CONDUCTED EMISSIONS

2.1.1 Specification Reference

FCC CFR 47 Part 15B, Clause 15.107

2.1.2 Equipment Under Test and Modification State

SHV31 S/N: IMEI 004401115315521 - Modification State 0

2.1.3 Date of Test

19 December 2014

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

A test environment and testing arrangement meeting the specification of ANSI C63.4 was used during all testing. The Equipment Under Test (EUT) was set upon a non-conducting platform at an elevation of 80 cm above a horizontal reference ground plane. A vertical reference ground plane was situated 40 cm from the EUT and bonded to the horizontal reference ground plane.

The EUT was powered by a Line Impedance Stabilization Network (LISN), whereby emissions measurements of the current-carrying conductors were made through this LISN. The LISN was bonded to the horizontal reference ground plane with a separation distance greater than 80 cm from the EUT. A mains supply cable of 1 m length was used to supply mains power to the EUT from the LISN.

A preliminary emissions scan was conducted for each current-carrying conductor of the EUT, using a peak detector over a frequency range of 150 kHz to 30 MHz. At least six of the greatest peak emissions, frequency positions were selected from each preliminary emissions scan for further evaluation as final measuring points.

Final measurement points were measured using quasi-peak and average detectors. All final measurements were assessed against the Class B emission limits in Clause 15.107 of FCC CFR 47 FCC Part 15.


2.1.6 Environmental Conditions

Ambient Temperature	21.0°C
Relative Humidity	39.0%



2.1.7 Test Results


Live Line

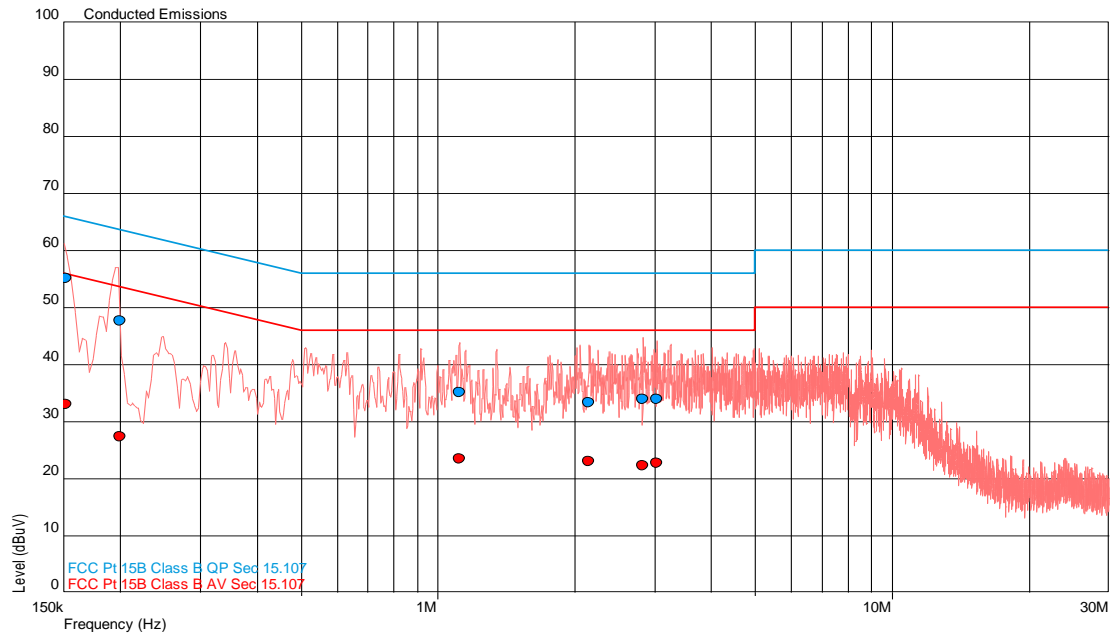

Frequency (MHz)	QP Level (dBμV)	QP Limit (dBμV)	QP Margin (dBμV)	AV Level (dBμV)	AV Limit (dBμV)	AV Margin (dBμV)
0.152	55.2	65.9	-10.7	33.1	55.9	-22.8
0.200	47.7	63.6	-15.9	27.4	53.6	-26.2
1.114	35.1	56.0	-20.9	23.5	46.0	-22.5
2.147	33.4	56.0	-22.6	23.1	46.0	-22.9
2.831	33.9	56.0	-22.1	22.3	46.0	-23.7
3.032	34.0	56.0	-22.0	22.7	46.0	-23.3



Product Service

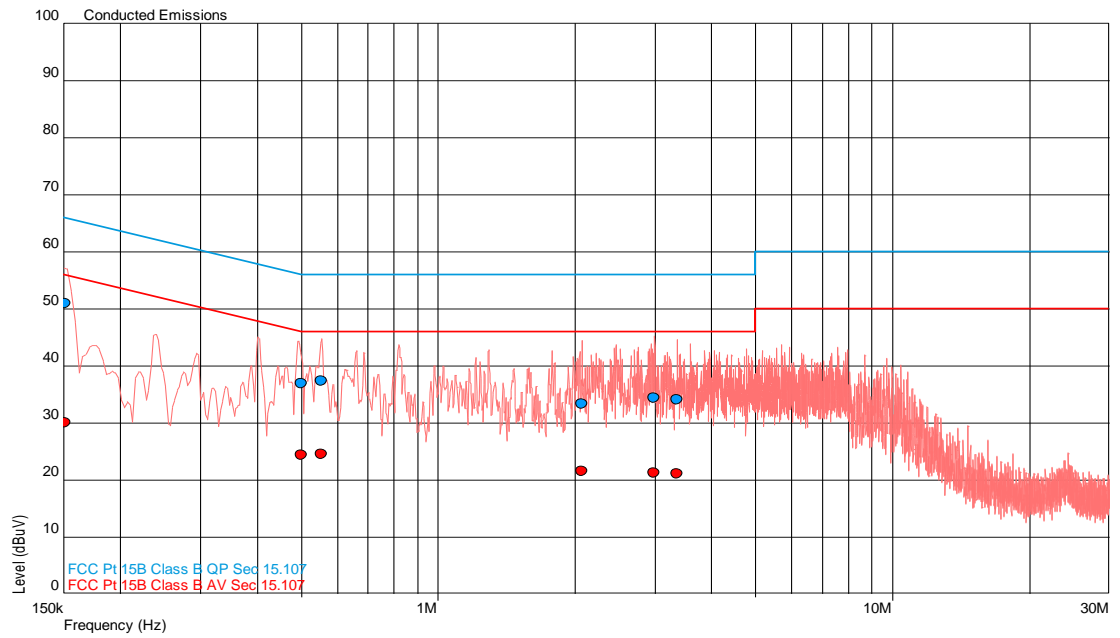Neutral Line

Frequency (MHz)	QP Level (dBμV)	QP Limit (dBμV)	QP Margin (dBμV)	AV Level (dBμV)	AV Limit (dBμV)	AV Margin (dBμV)
0.151	51.0	66.0	-14.9	30.1	56.0	-25.9
0.500	37.0	56.0	-19.0	24.3	46.0	-21.7
0.553	37.5	56.0	-18.5	24.5	46.0	-21.5
2.071	33.4	56.0	-22.6	21.6	46.0	-24.4
2.995	34.5	56.0	-21.5	21.3	46.0	-24.7
3.358	34.2	56.0	-21.8	21.1	46.0	-24.9



2.2 RADIATED EMISSIONS

2.2.1 Specification Reference

FCC CFR 47 Part 15B, Clause 15.109

2.2.2 Equipment Under Test and Modification State

SHV31 S/N: IMEI 004401115315521 - Modification State 0

2.2.3 Date of Test

18 December 2014

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

A test environment and testing arrangement meeting the specification of ANSI C63.4 was used during all testing. The Equipment Under Test (EUT) was set upon a non-conducting platform at an elevation of 80 cm above a horizontal reference ground plane. The EUT was set upon a non-conducting platform during testing. When frequencies less than 18 GHz were measured; the EUT elevation was 80 cm above the horizontal reference ground plane. When frequencies greater than 18 GHz were measured; the EUT elevation was 1 m above the horizontal reference ground plane to ensure adequate vertical beam width coverage of the measuring antenna with respect to the EUT.

The horizontal reference ground plane encompasses a turntable which is used to adjust the azimuth of the EUT. An antenna positioner is used to elevate the measuring antenna above the horizontal reference ground plane whereby the antenna elevation is adjustable between 1 m and 4 m.

Exploratory radiated emissions measurements were made by azimuth emissions searches over a range of 0° and 360°. These exploratory radiated emissions measurements were made using a peak detector over a frequency range of 30 MHz to 30 GHz, with the measuring antenna in both vertical and horizontal polarizations. The measurement distance was reduced to 1 metre for measurements above 18 GHz and therefore the limit was increased by 10 dB.

At least six of the greatest peak emissions, frequency positions were selected from the exploratory radiated emissions measurements for further evaluation as final measuring points.

To ascertain the azimuth and measuring antenna polarization that yields the highest peak emission level, each final measurement frequency was investigated by continuous azimuth emissions searching with the measuring antenna in both vertical and horizontal polarizations. For each final measurement frequency, the respective peak emission azimuth and measuring antenna polarization was used during a measuring antenna elevation search from 1 m to 4 m. Each final measurement frequency was then measured with the EUT azimuth, measuring antenna height and polarization that yielded the greatest peak emission level.



Product Service

Final measurement points over the frequency range of 30 MHz to 1 GHz were measured using a quasi-peak detector. Final measurement points over the frequency range of 1 GHz and 30 GHz were measured using peak and average methods. Peak measurements were made using a peak detector with 1 MHz resolution and video bandwidths. Average measurements were made using a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz or more.

All final measurements were assessed against the Class B emission limits in Clause 15.109 of FCC CFR 47 FCC Part 15.


2.2.6 Environmental Conditions

Ambient Temperature	20.5°C
Relative Humidity	44.0%



2.2.7 Test Results


30 MHz to 1 GHz

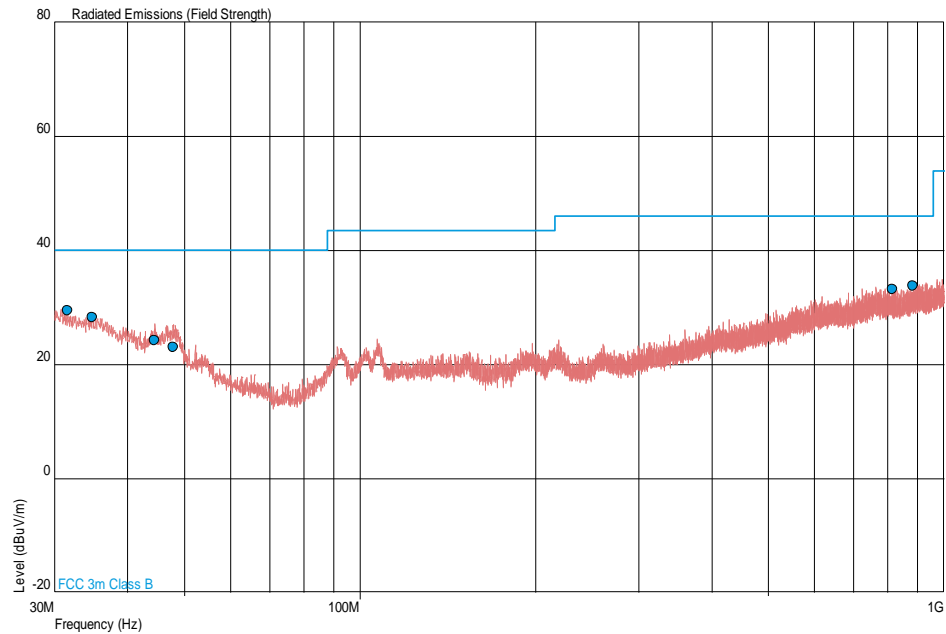


Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height (m)	Polarity
31.598	29.4	29.5	40.0	100	-10.6	-70.5	245	1.00	Vertical
34.851	28.3	26.0	40.0	100	-11.7	-74.0	257	1.00	Vertical
44.560	24.2	16.2	40.0	100	-15.8	-83.8	174	1.00	Vertical
47.906	23.0	14.1	40.0	100	-17.0	-85.9	270	1.00	Vertical
817.358	33.1	45.2	46.0	200	-12.9	-154.8	0	1.00	Horizontal
883.982	33.9	49.5	46.0	200	-12.1	-150.5	266	1.00	Horizontal



Product Service

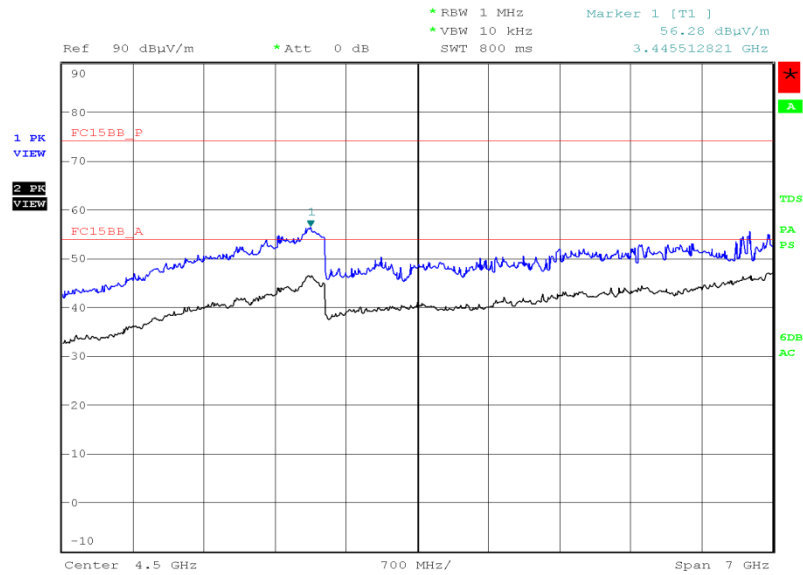1 GHz to 8 GHz

Date: 18.DEC.2014 15:19:29

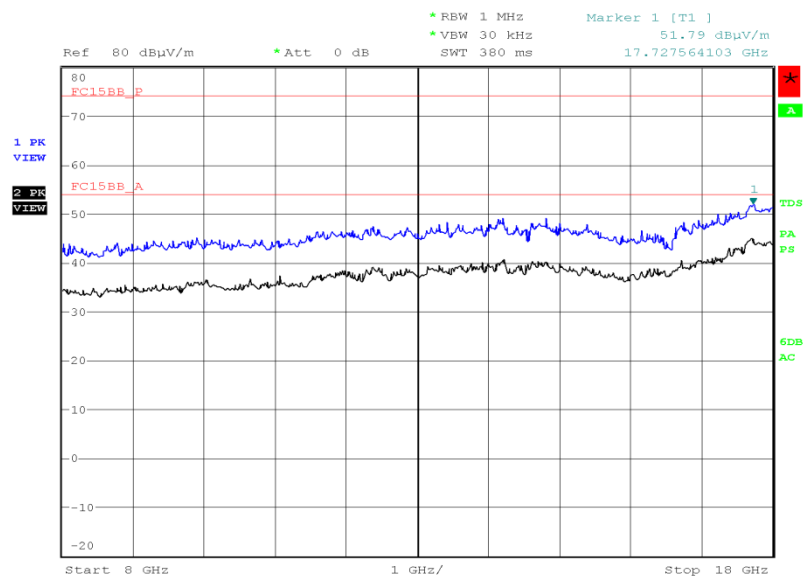
8 GHz to 18 GHz

Date: 18.DEC.2014 14:02:03



Product Service

18 GHz to 30 GHz

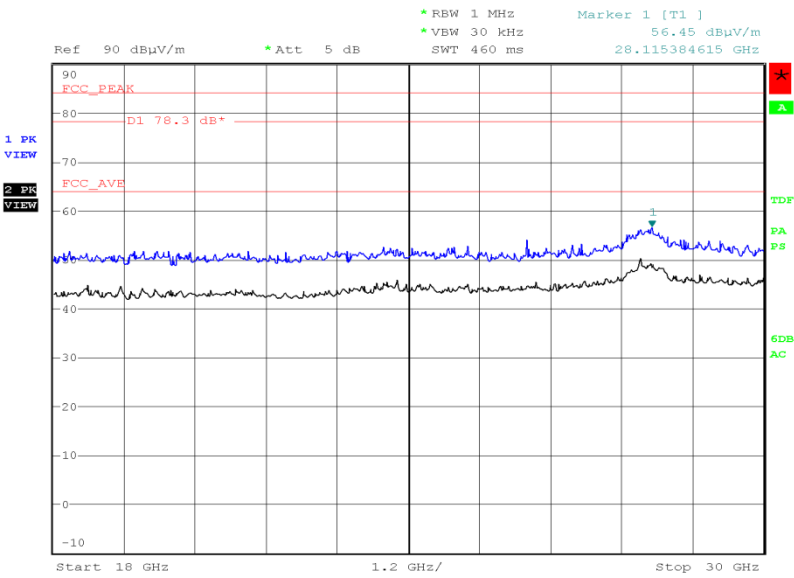

Date: 18.DEC.2014 10:03:12



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 – AC Line Conducted Emissions					
3 phase LISN	Rohde & Schwarz	ESH2-Z5	323	12	16-Jan-2015
Screened Room (5)	Rainford	Rainford	1545	24	10-Jan-2015
Transient Limiter	Hewlett Packard	11947A	2378	12	1-Jul-2015
Compliance 5 Emissions	Schaffner	C5e Software V.5.00.00	3275	-	N/A - Software
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	27-Oct-2015
Section 2.2 - Radiated Emissions					
Antenna (Double Ridge Guide)	Link Microtek Ltd	AM180HA-K-TU2	2340	24	26-Nov-2015
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	12	2-May-2015
Pre-Amplifier	Phase one	PSO4-0087	1534	12	18-Dec-2015
Screened Room (5)	Rainford	Rainford	1545	24	10-Jan-2015
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	10-Jun-2015
Amplifier (8 - 18GHz)	Phase One	PS06-0061	3176	12	11-Aug-2015
Compliance 5 Emissions	Schaffner	C5e Software V.5.00.00	3275	-	N/A - Software
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	27-Oct-2015
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	28-Feb-2015
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
1 Metre K Type Cable	Rhophase	KPS-1501A-1000-KPS	4105	12	7-Nov-2015
Cable 1503 2M 2.92(P)m 2.92(P)m	Rhophase	KPS-1503A-2000-KPS	4293	12	3-Jun-2015

TU – Traceability Unscheduled



Product Service

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Radiated Emissions	30MHz to 1GHz: ± 5.1 dB 1GHz to 40GHz: ± 6.3 dB
AC Line Conducted Emissions	± 3.2 dB



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service

© 2014 TÜV SÜD Product Service