

Conducted test results

No.1-7305/23-01-03_TR1-A201-R01

April 23, 2024

Test Standard(s)	FCC 15.247 - NI
	FCC 15.247, ISED RSS247 - NI

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.

Authorized

Michael Dorongovski
Lab Manager
Radio Labs

Table of Content

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	5
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	7
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	9
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	11
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	13
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	15
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	17
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	19
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	21
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	23
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	25
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	27
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	29
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	31
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	33
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	35
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	37
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	39
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	41
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	43
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	45
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	47
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	49
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	51
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	53
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	57
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	61
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	65
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	69
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	73
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	77
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	81
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	85
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	89
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	93
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	97
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	101
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	105
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	109
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	113
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	117

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	121
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	125
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	129
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	133
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	137
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	141
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	145
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode	149
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode	151
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode	153
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode	155
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode	157
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode	159
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode	161
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode	163
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode	165
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode	167
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode	169
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode	171
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode	173
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode	175
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode	177
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode	179
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode	181
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode	183
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode	185
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode	187
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode	189
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode	191
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode	193
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode	195
FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode	197
FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode	199
FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode	201
FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode	203
FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode	205
FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode	207
FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode	209
FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode	211
FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode	213
FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode	215
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode	217
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode	219
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode	221

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode	223
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode	225
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode	227
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode	229
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode	231
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode	233
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode	235
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode	237
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode	239
FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode	241
FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode	243
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	245
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	248
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	251
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	254
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	257
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	260
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	263
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	266
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	269
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	272
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	275
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	278
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	281
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	284
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	287
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	290
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	293
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	296
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	299
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	302
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	305
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	308
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	311
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	314

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	10.04.2024 15:58:29
Ambit temp [°C] humidity [rel%]	26.9 28
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.09	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.09 8.27 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

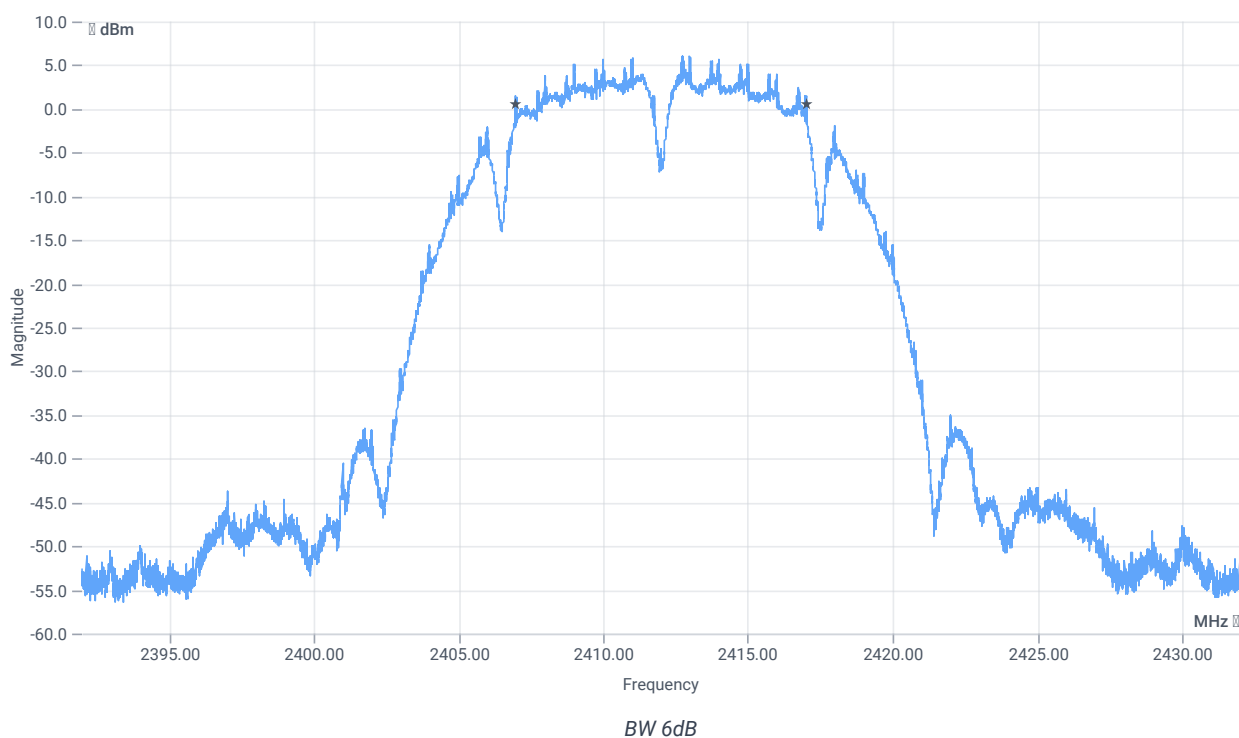

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	10064	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:14:24
Ambit temp [°C] humidity [rel%]	26.2 28
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.09	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.09 8.32 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

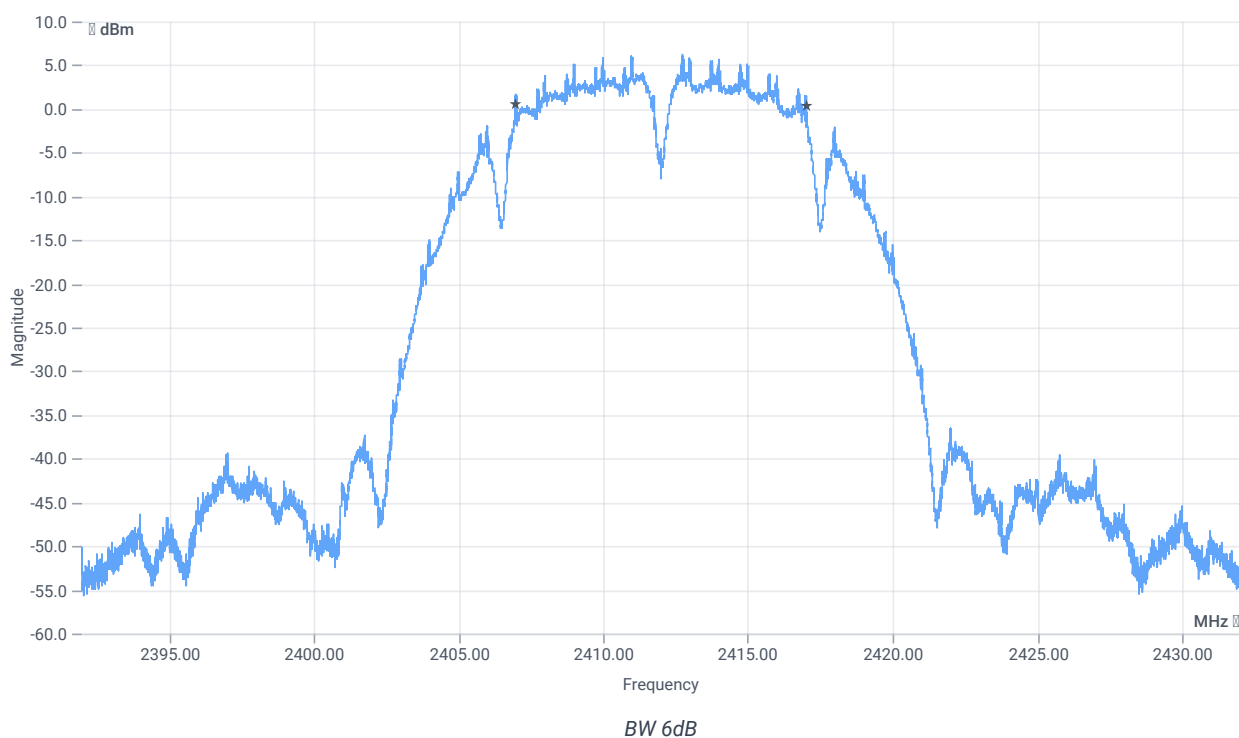

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	10060	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:30:31
Ambit temp [°C] humidity [rel%]	25.9 29
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.50	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.50 8.3 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

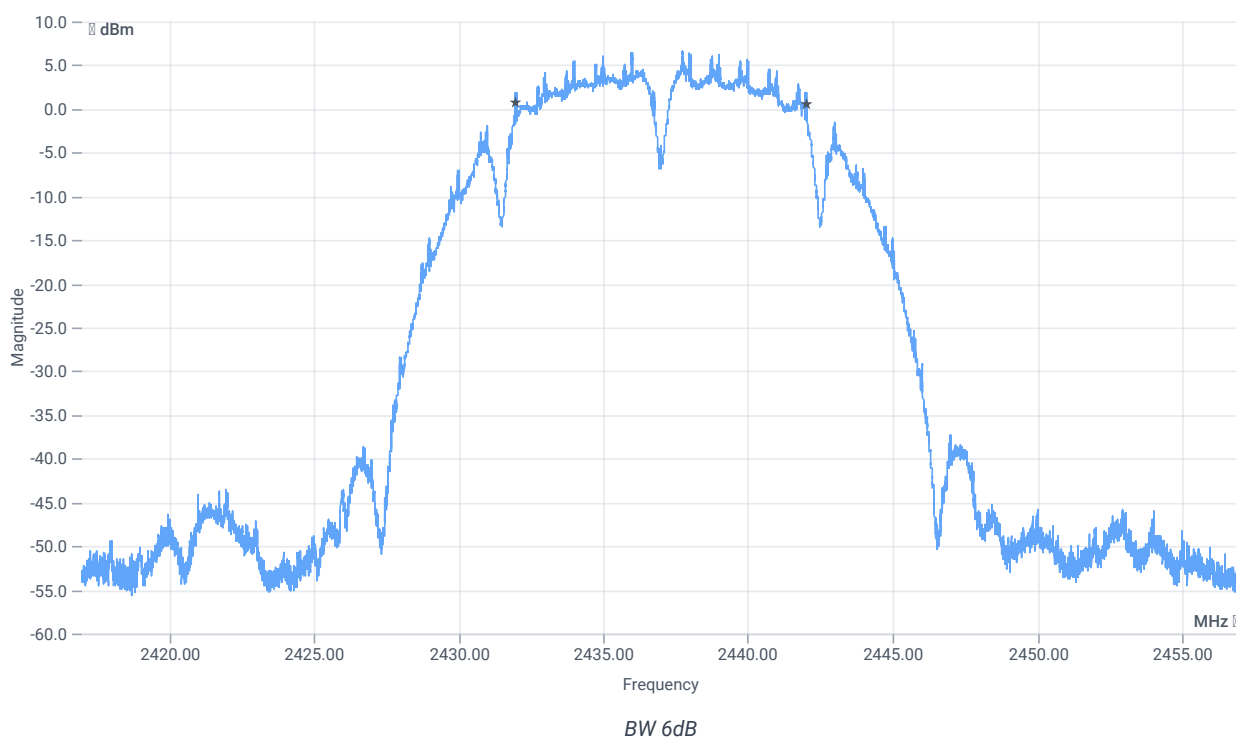

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	10052	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:46:31
Ambit temp [°C] humidity [rel%]	25.0 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.74	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.74 8.33 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

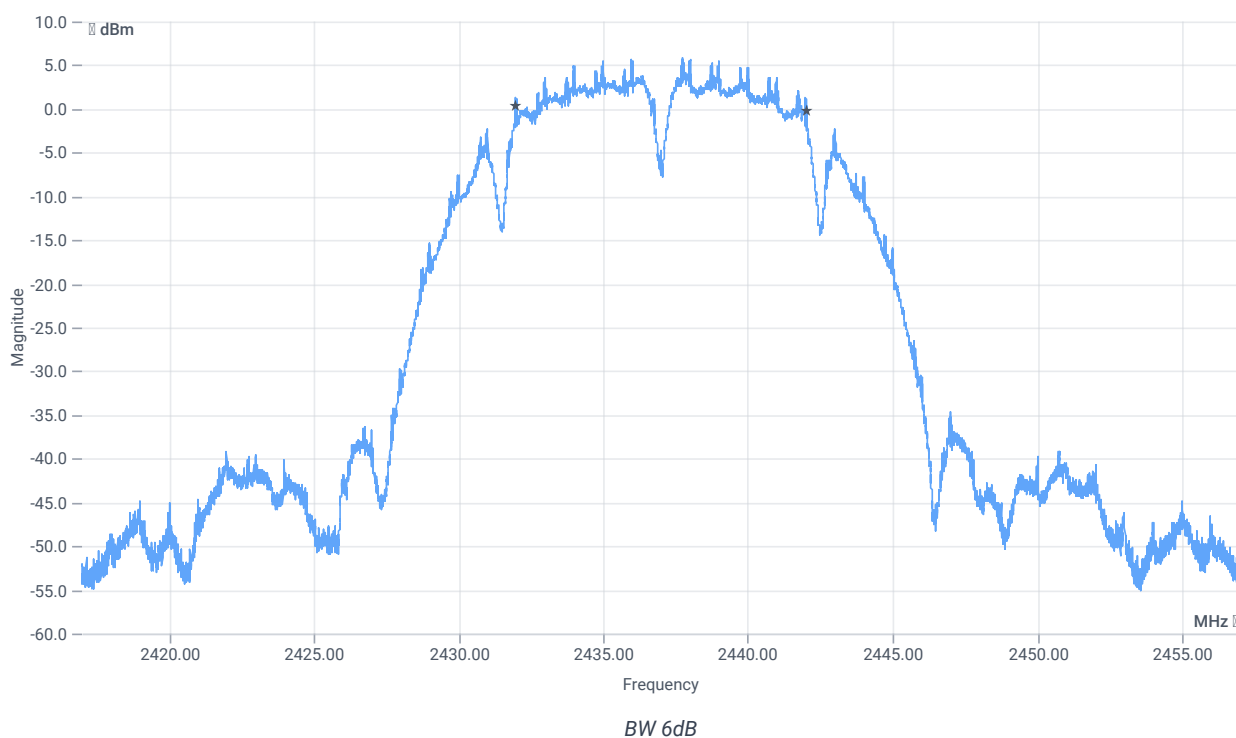

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	10068	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 17:34:47
Ambit temp [°C] humidity [rel%]	24.5 32
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.18	dBm	INFO
Ref. frequency	---	---	2414.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.18 8.27 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

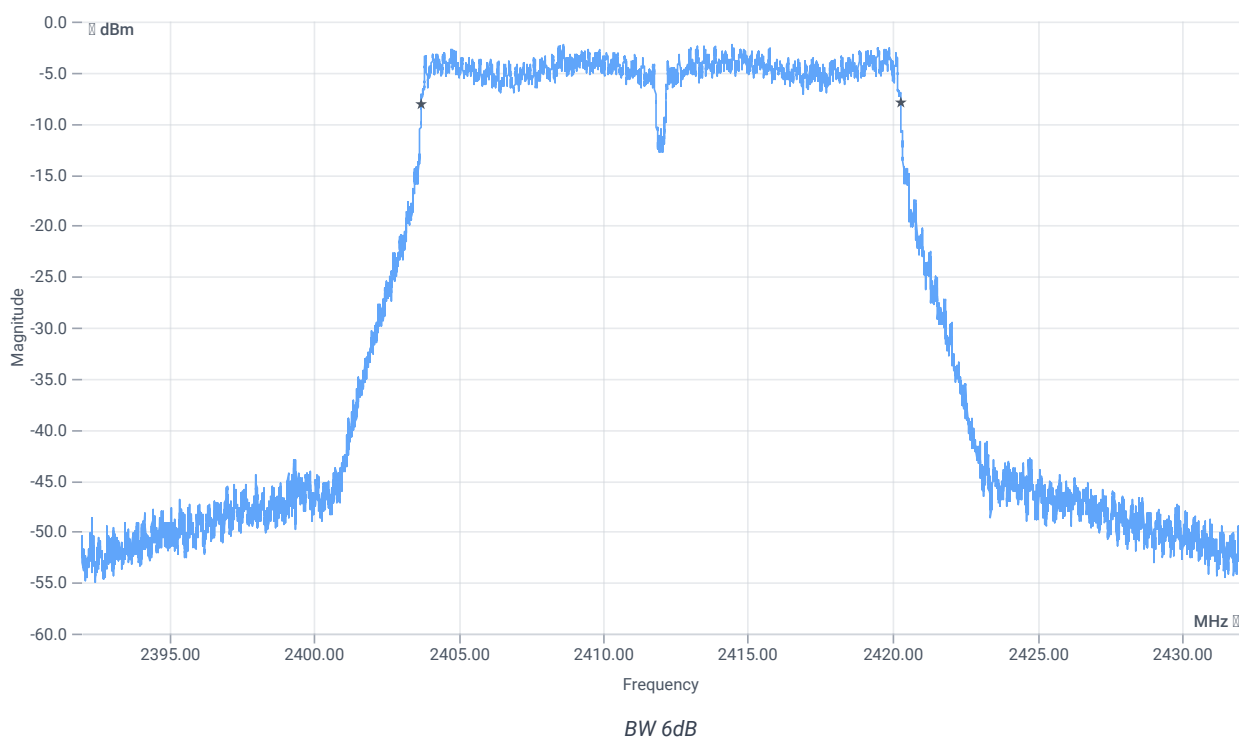

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	16568	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 17:50:50
Ambit temp [°C] humidity [rel%]	24.1 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.13	dBm	INFO
Ref. frequency	---	---	2409.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.13 8.32 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

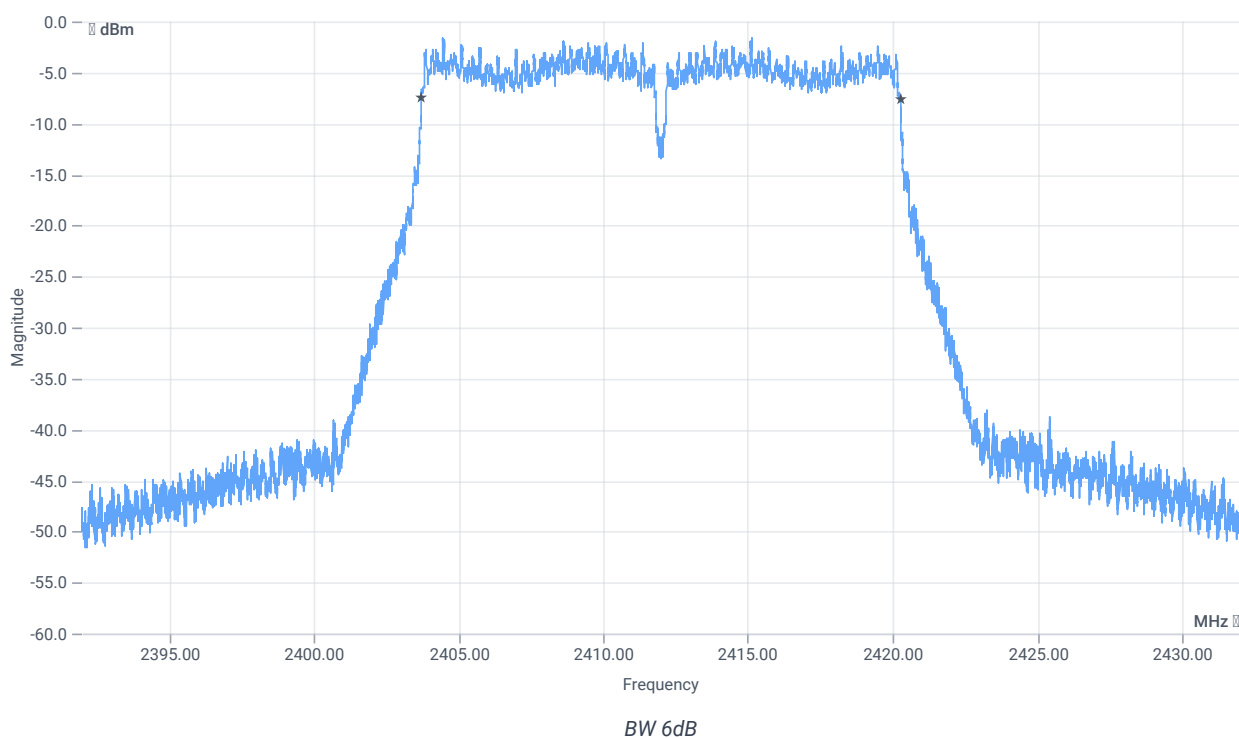

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	16544	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:06:58
Ambit temp [°C] humidity [rel%]	23.5 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.98	dBm	INFO
Ref. frequency	---	---	2435.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.98 8.3 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

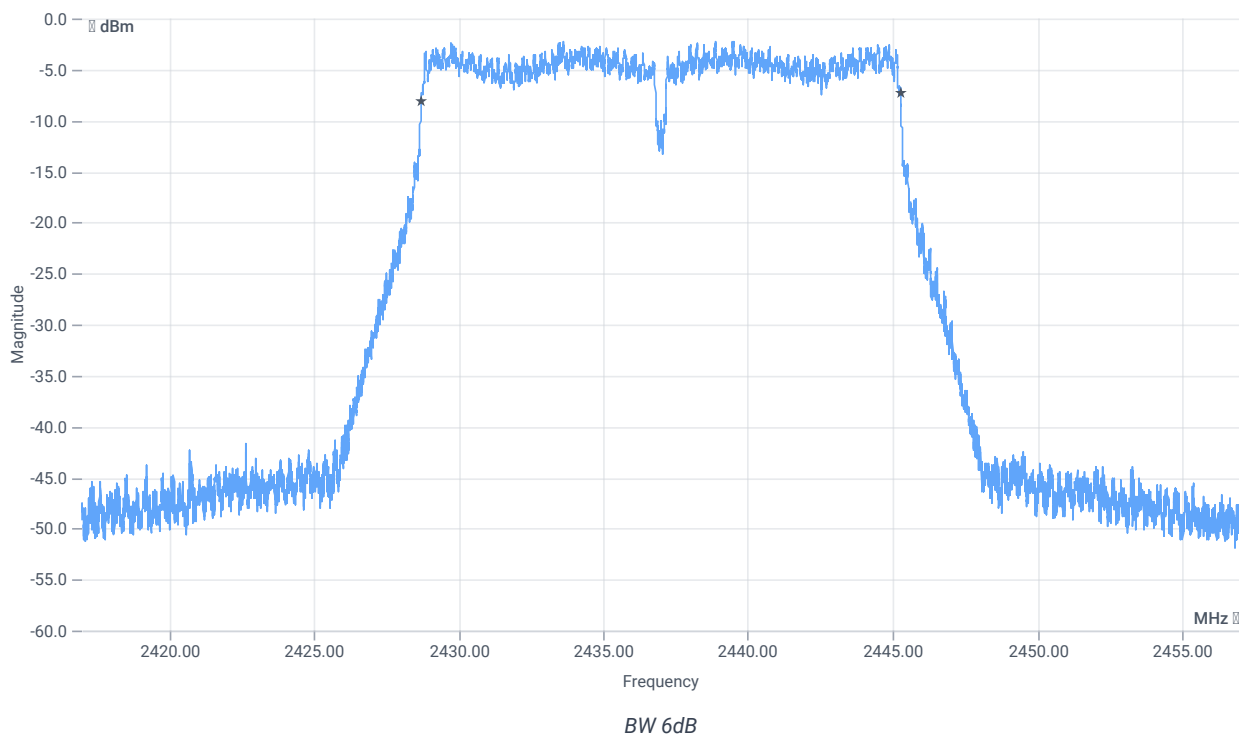

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	16556	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:22:59
Ambit temp [°C] humidity [rel%]	23.8 30
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.47	dBm	INFO
Ref. frequency	---	---	2434.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.47 8.33 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

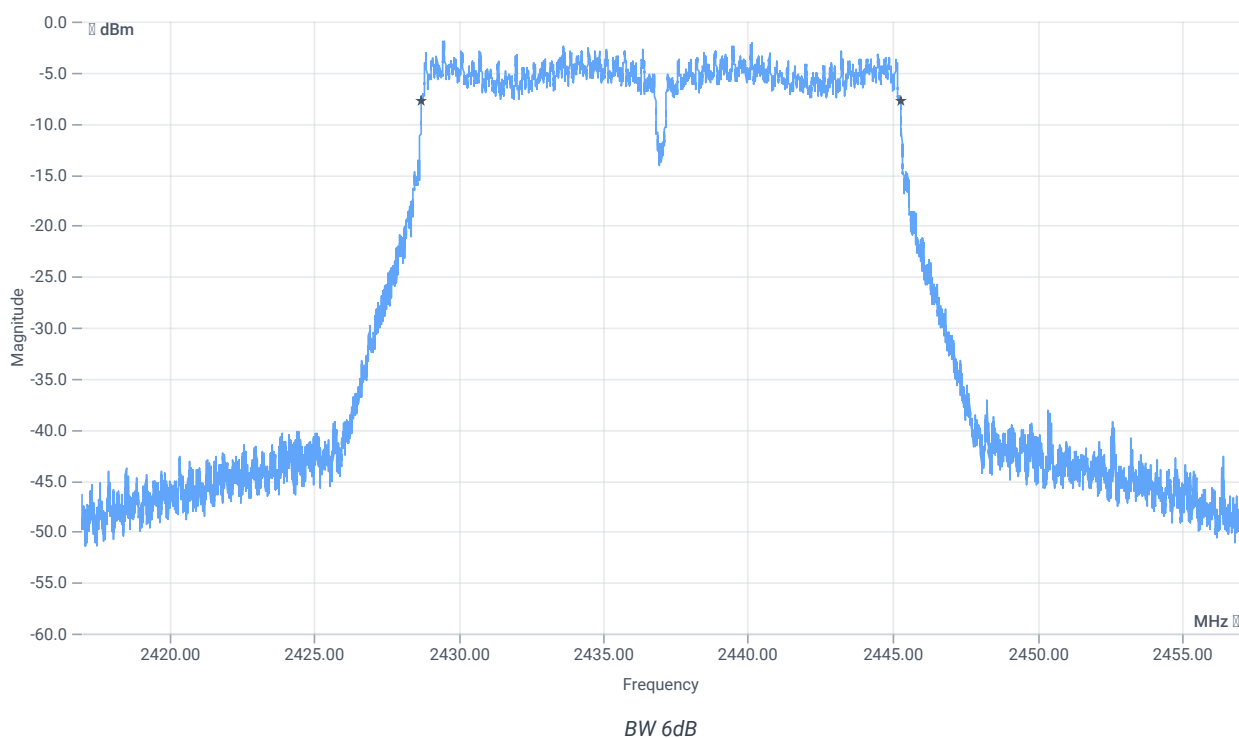

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	16544	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:39:07
Ambit temp [°C] humidity [rel%]	23.8 30
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.08	dBm	INFO
Ref. frequency	---	---	2464.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.08 8.34 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

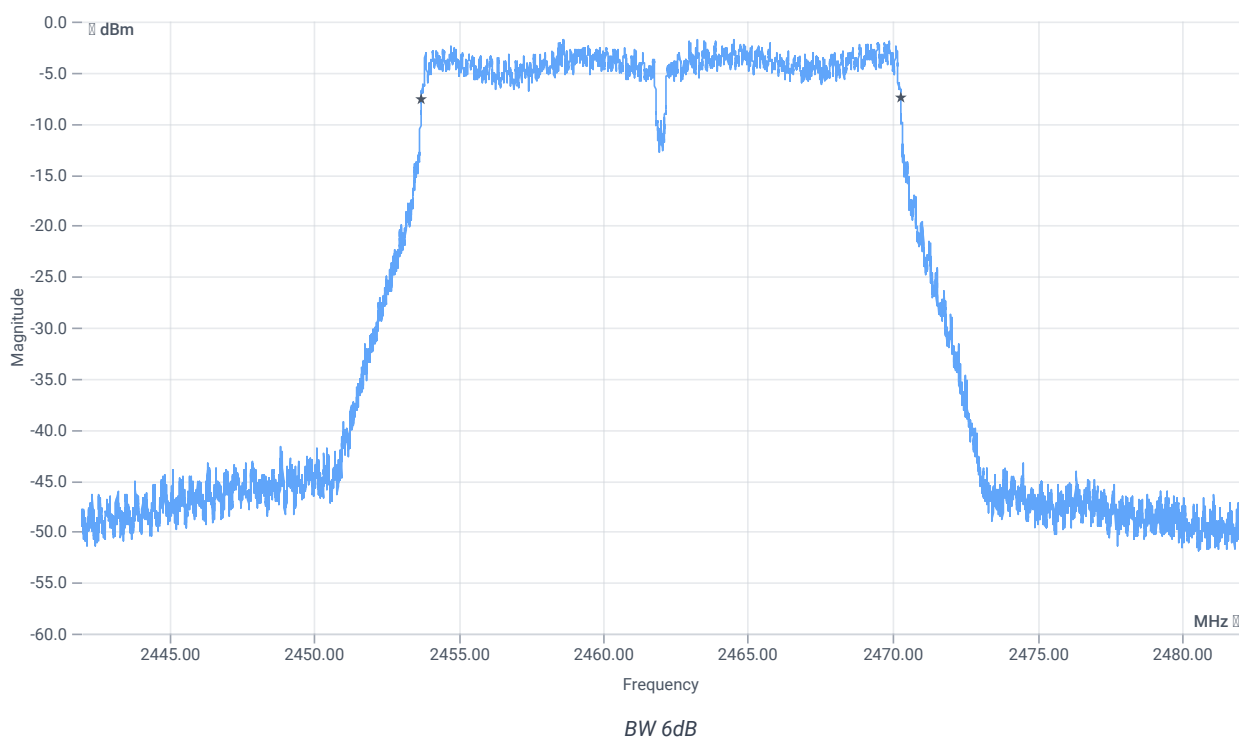

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	16560	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:55:07
Ambit temp [°C] humidity [rel%]	23.7 29
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.76	dBm	INFO
Ref. frequency	---	---	2454.910	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.76 8.37 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

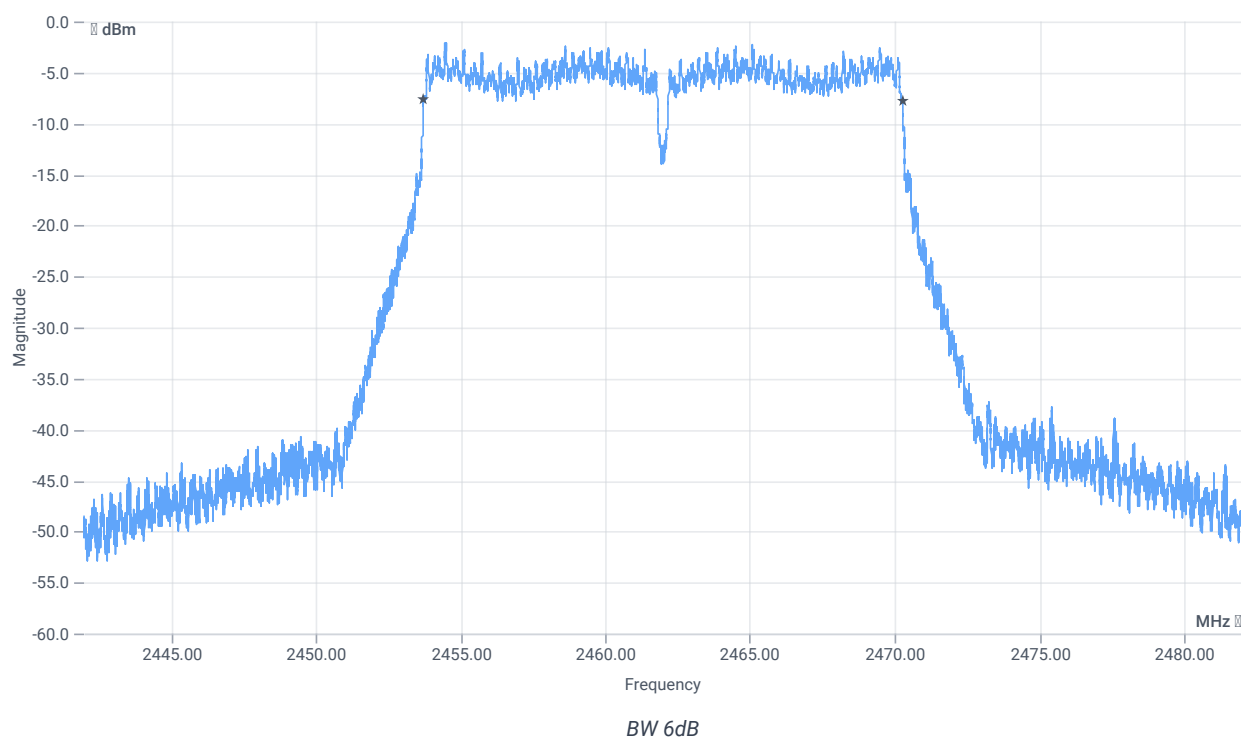

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	16548	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 19:11:15
Ambit temp [°C] humidity [rel%]	23.7 30
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.20	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.20 8.27 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

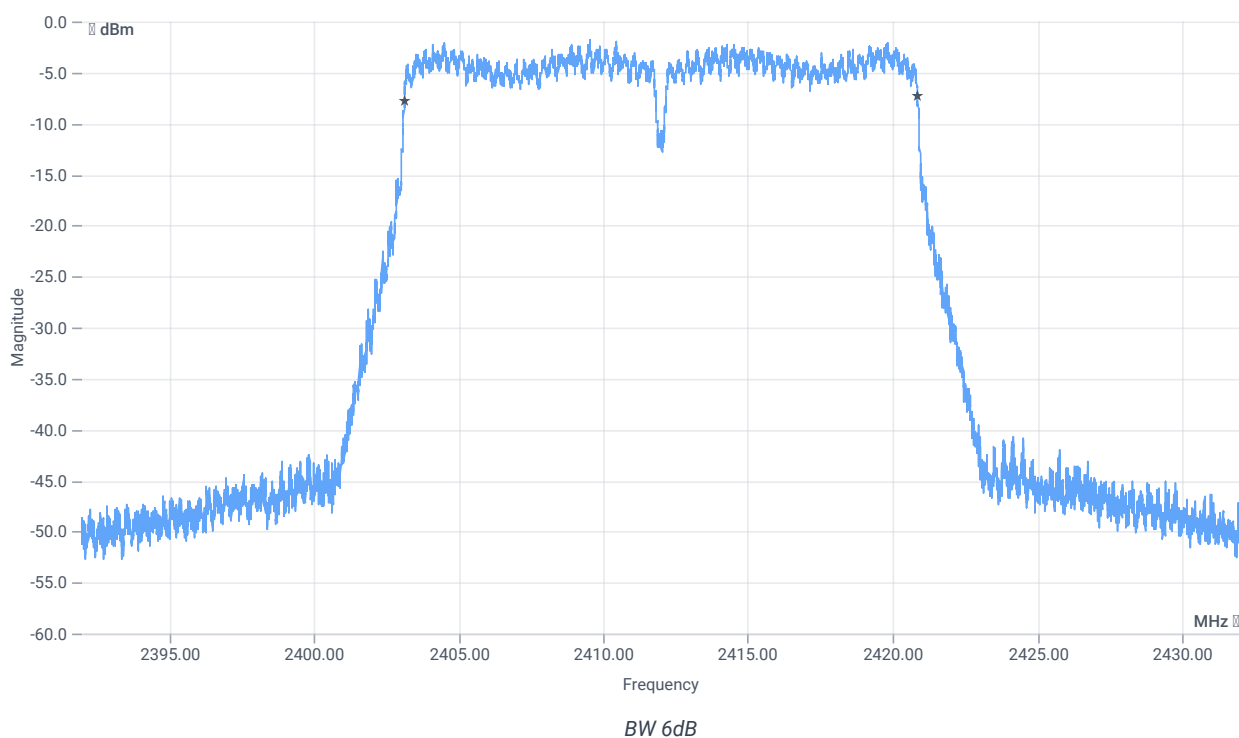

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	17732	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 19:27:18
Ambit temp [°C] humidity [rel%]	23.6 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.82	dBm	INFO
Ref. frequency	---	---	2409.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.82 8.32 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

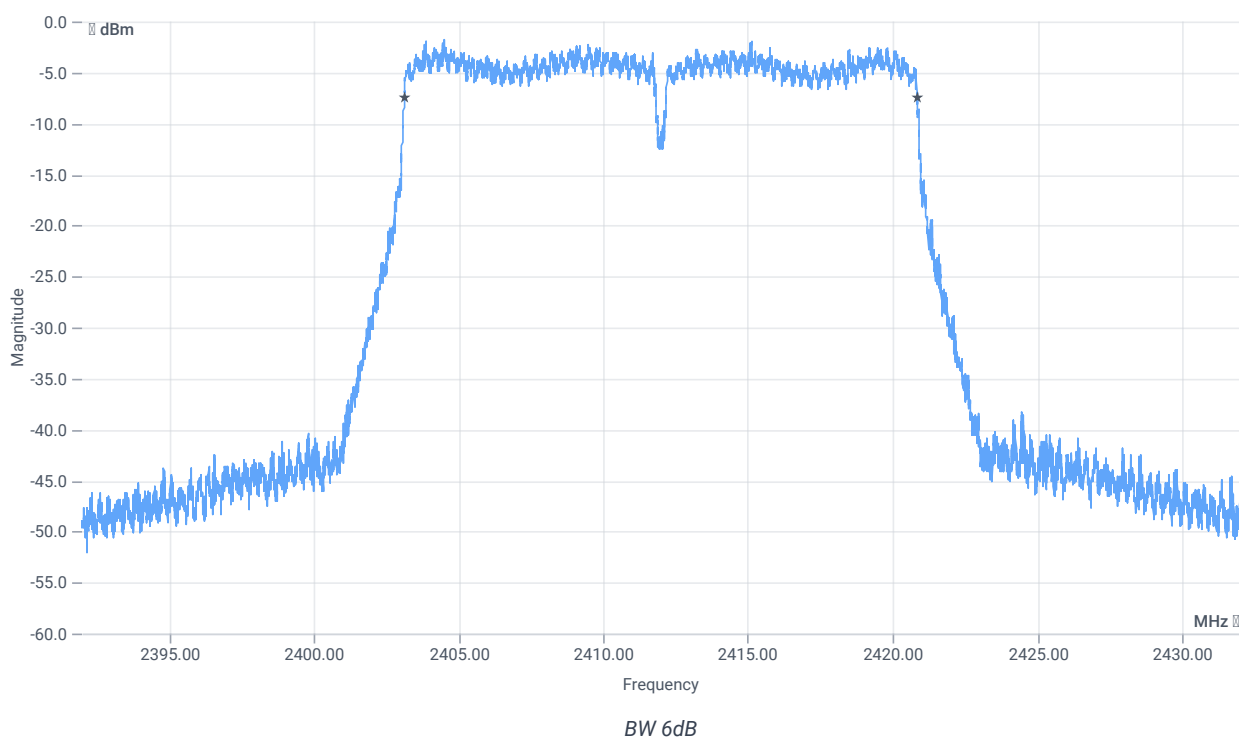

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	17744	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 19:43:26
Ambit temp [°C] humidity [rel%]	23.6 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.38	dBm	INFO
Ref. frequency	---	---	2440.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.38 8.3 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

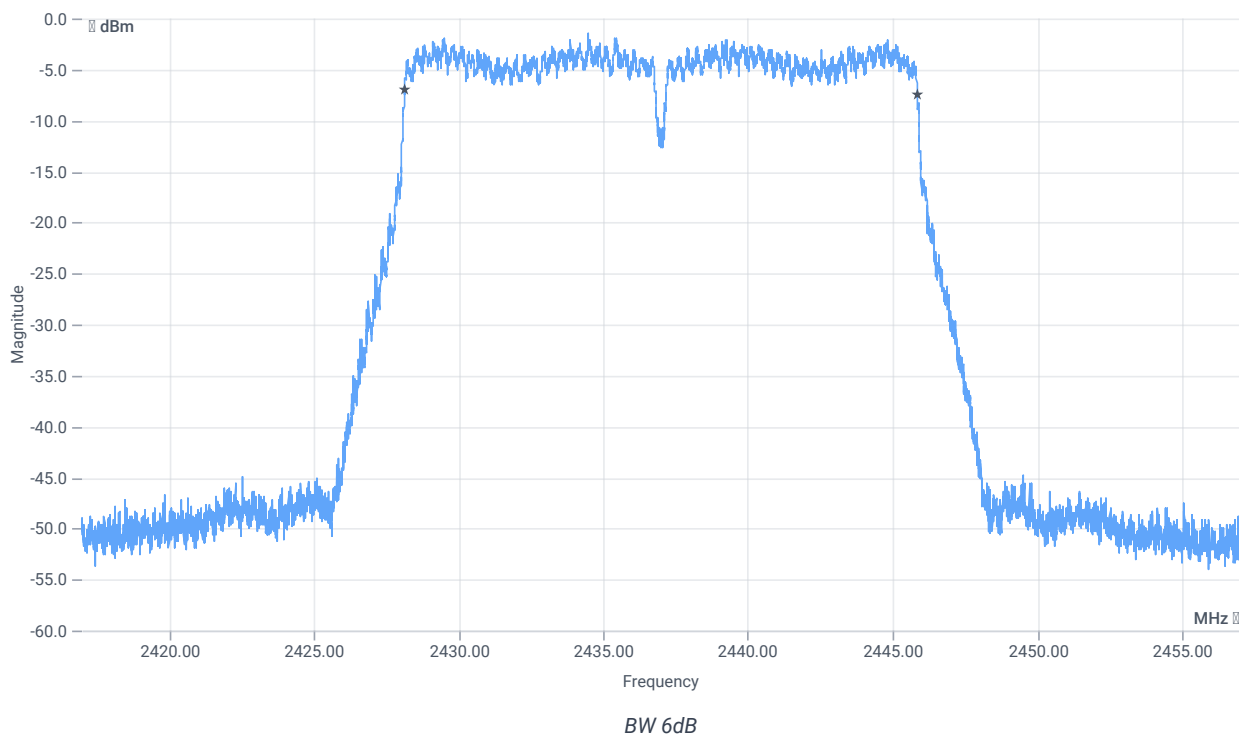

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	17732	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 19:59:26
Ambit temp [°C] humidity [rel%]	23.6 32
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.18	dBm	INFO
Ref. frequency	---	---	2429.910	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.18 8.33 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

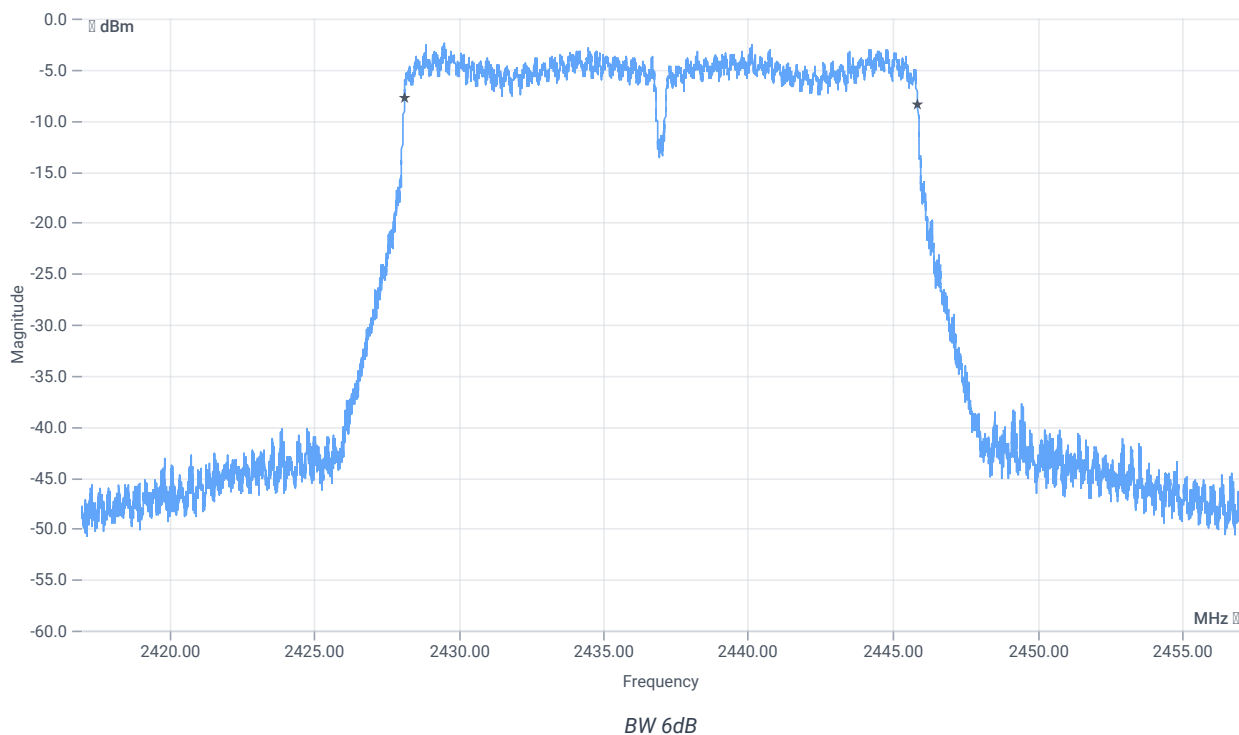

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	17744	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 20:15:34
Ambit temp [°C] humidity [rel%]	23.5 32
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.57	dBm	INFO
Ref. frequency	---	---	2454.310	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.57 8.34 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

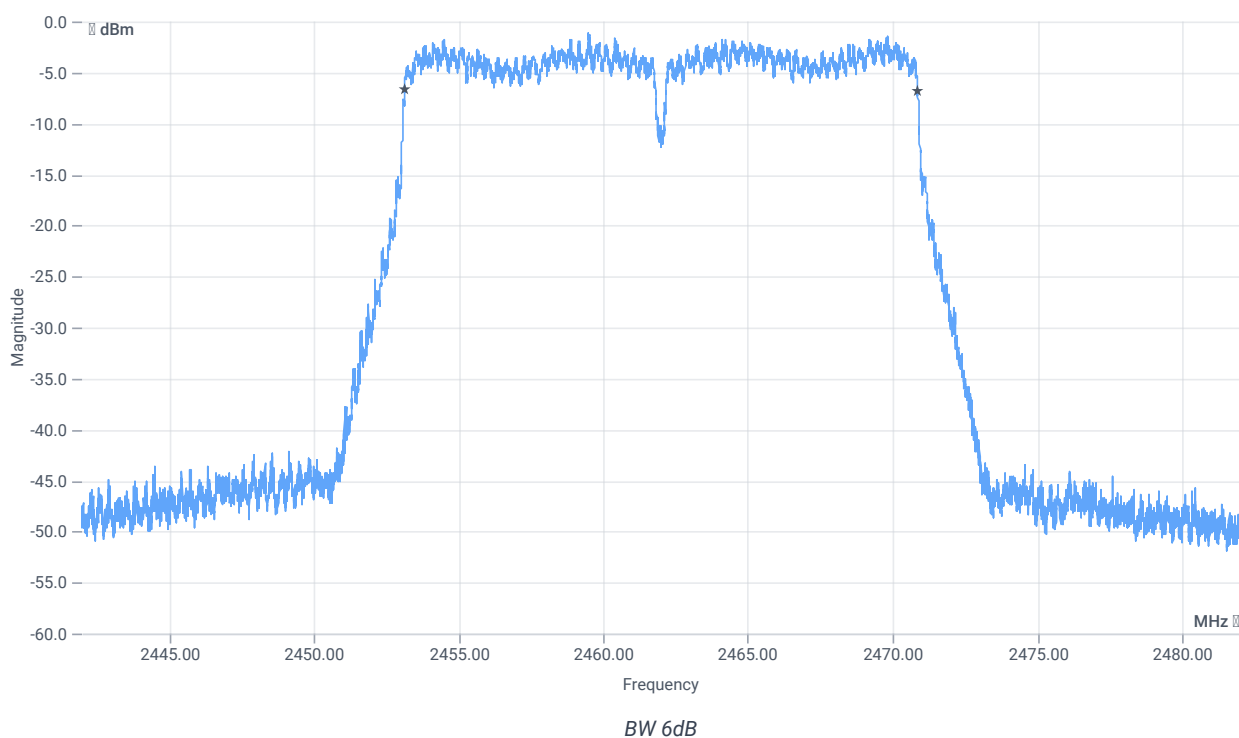

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	17744	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 20:31:35
Ambit temp [°C] humidity [rel%]	23.6 32
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.98	dBm	INFO
Ref. frequency	---	---	2465.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.98 8.37 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

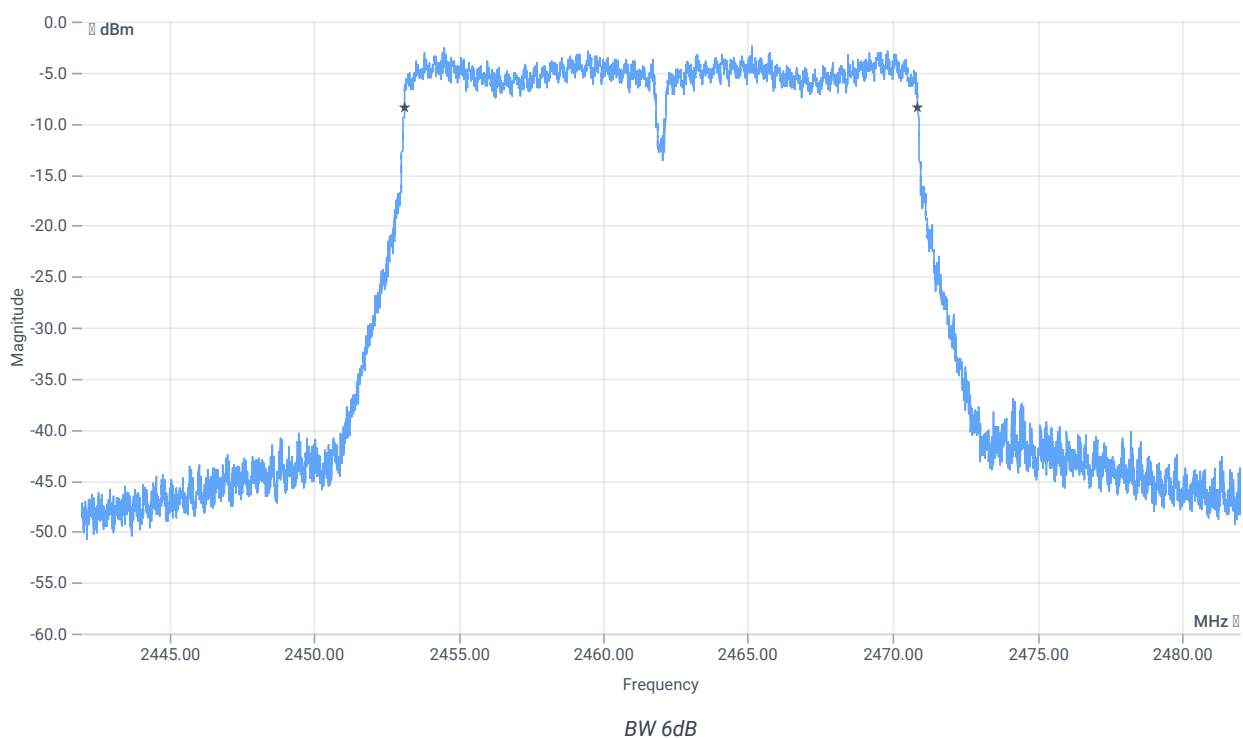

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	17752	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 20:47:43
Ambit temp [°C] humidity [rel%]	23.5 33
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2422 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.04	dBm	INFO
Ref. frequency	---	---	2418.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.04 8.28 15
Start [MHz] Stop [MHz]	2382.000 2462.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

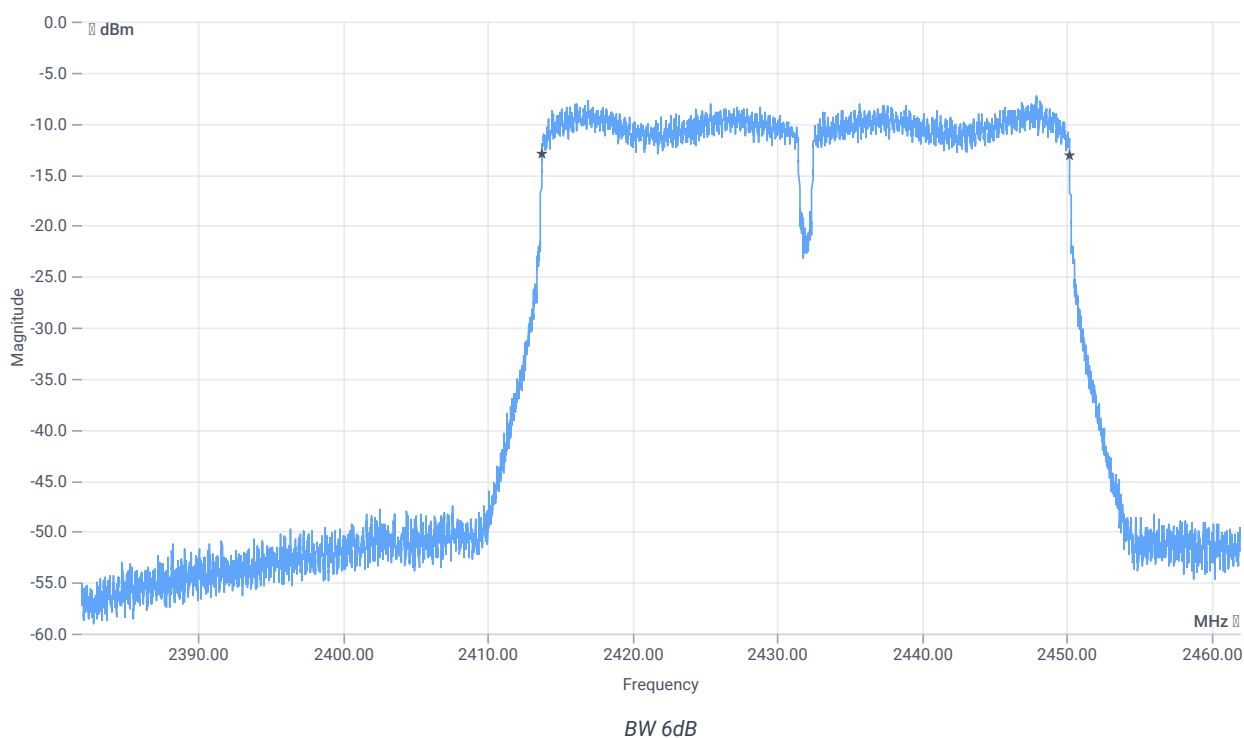

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	36448	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:03:43
Ambit temp [°C] humidity [rel%]	23.4 34
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2422 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.82	dBm	INFO
Ref. frequency	---	---	2426.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.82 8.32 20
Start [MHz] Stop [MHz]	2382.000 2462.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

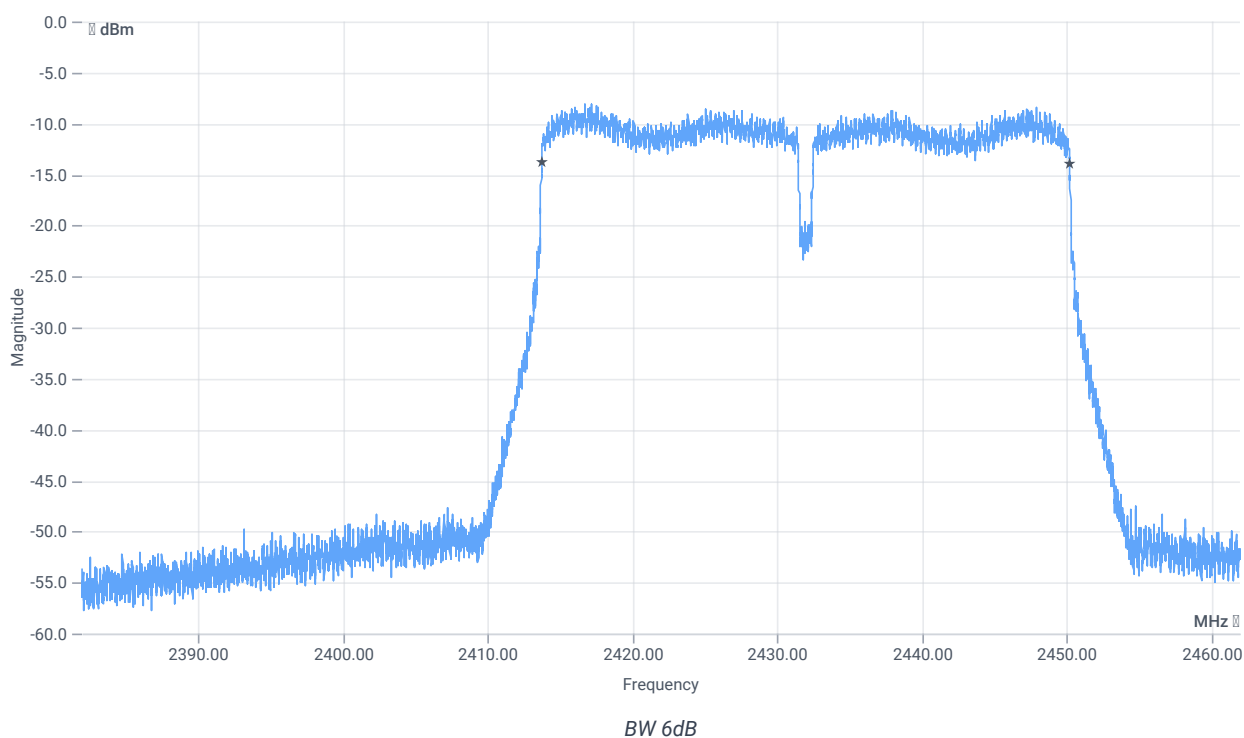

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	36456	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:19:49
Ambit temp [°C] humidity [rel%]	23.1 33
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.49	dBm	INFO
Ref. frequency	---	---	2462.570	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.49 8.3 20
Start [MHz] Stop [MHz]	2397.000 2477.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

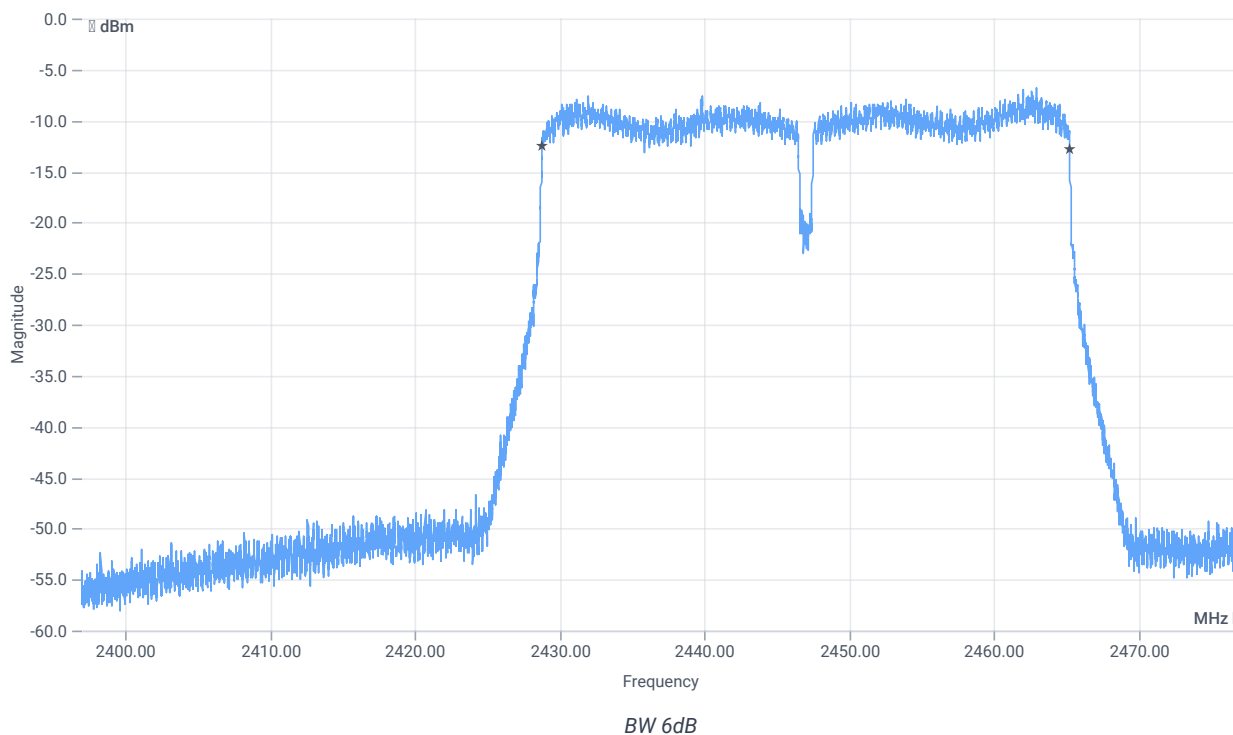

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	36440	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:35:50
Ambit temp [°C] humidity [rel%]	22.7 34
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.30	dBm	INFO
Ref. frequency	---	---	2453.180	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.30 8.33 15
Start [MHz] Stop [MHz]	2397.000 2477.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

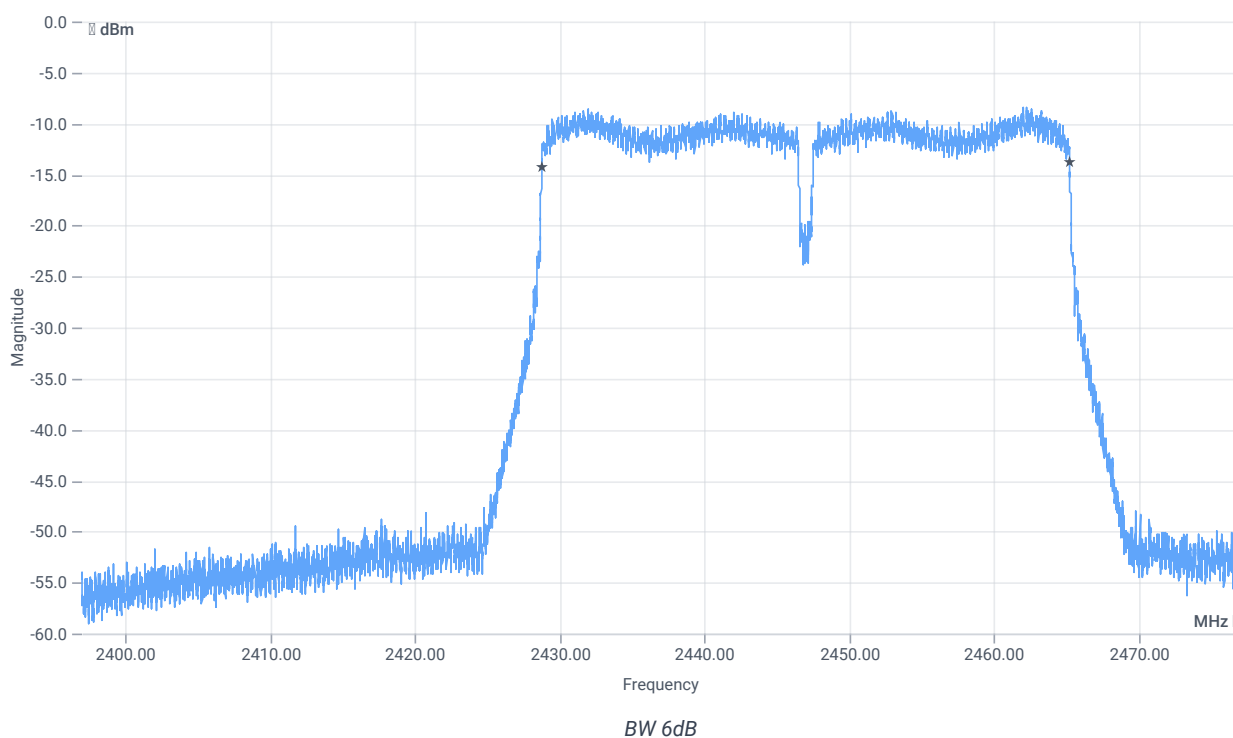

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	36456	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:51:56
Ambit temp [°C] humidity [rel%]	23.5 33
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2452 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.54	dBm	INFO
Ref. frequency	---	---	2477.870	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.54 8.31 15
Start [MHz] Stop [MHz]	2412.000 2492.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

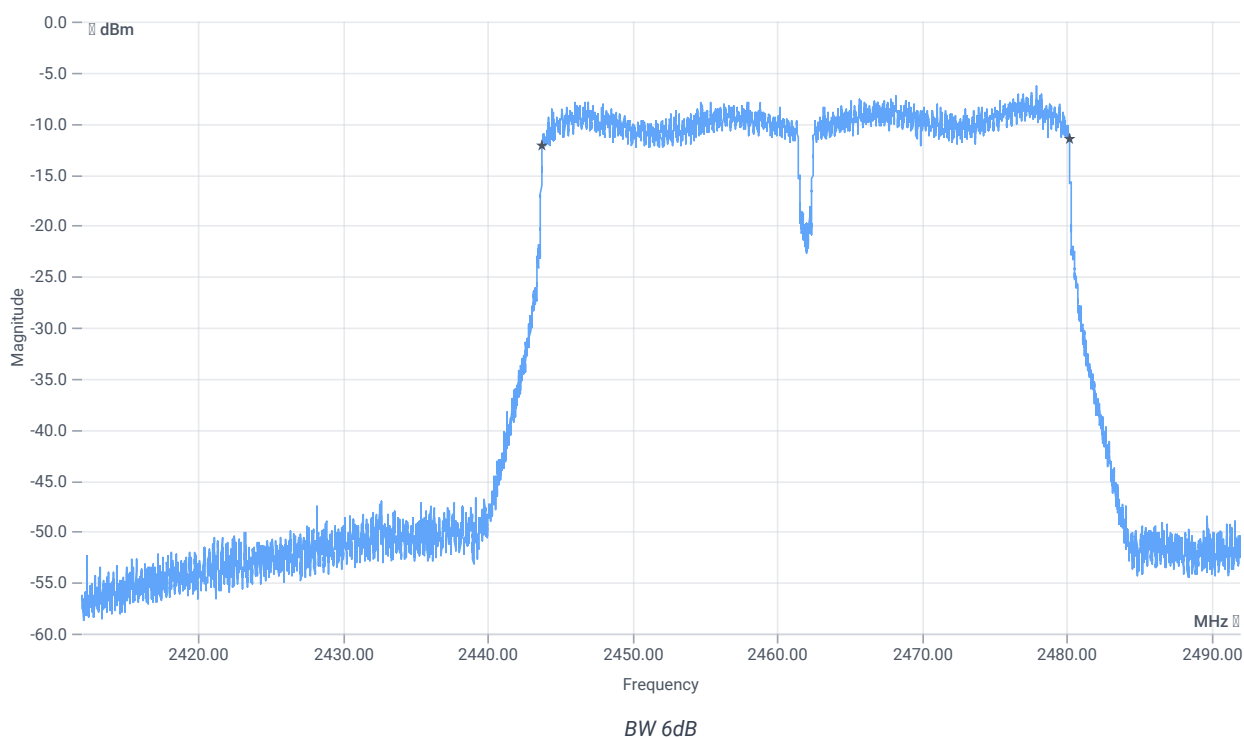

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	36416	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 22:07:56
Ambit temp [°C] humidity [rel%]	23.5 33
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2452 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.58	dBm	INFO
Ref. frequency	---	---	2456.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.58 8.34 20
Start [MHz] Stop [MHz]	2412.000 2492.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

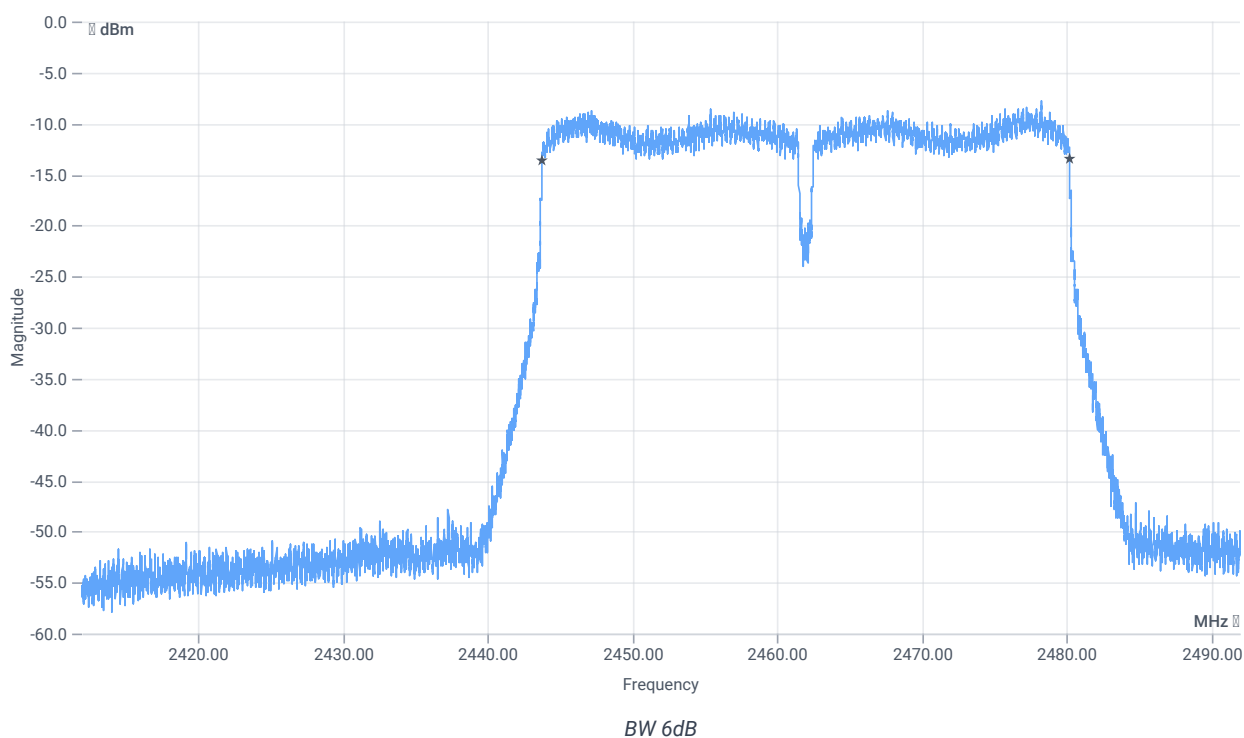

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	36432	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	11.04.2024 09:01:28
Ambit temp [°C] humidity [rel%]	23.2 34
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.31	dBm	INFO
Ref. frequency	---	---	2460.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.31 8.37 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

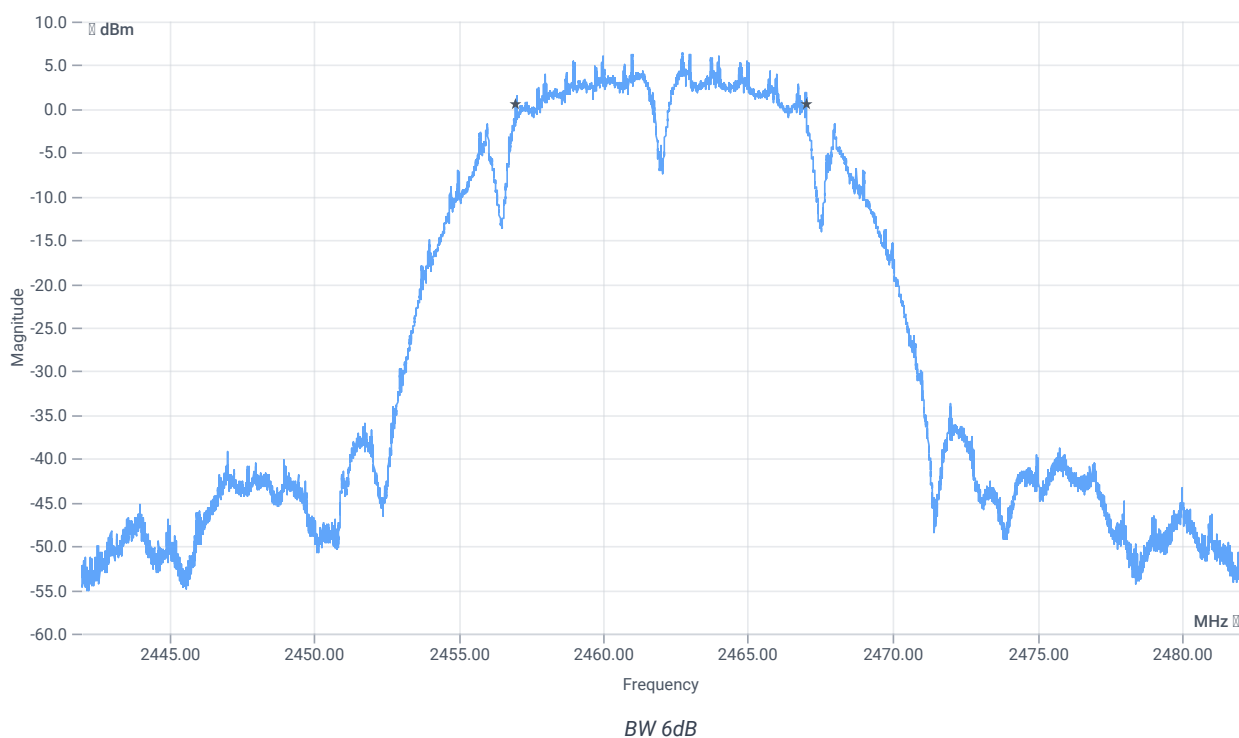

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	10072	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	11.04.2024 08:45:42
Ambit temp [°C] humidity [rel%]	24.4 32
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.06	dBm	INFO
Ref. frequency	---	---	2460.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.06 8.34 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

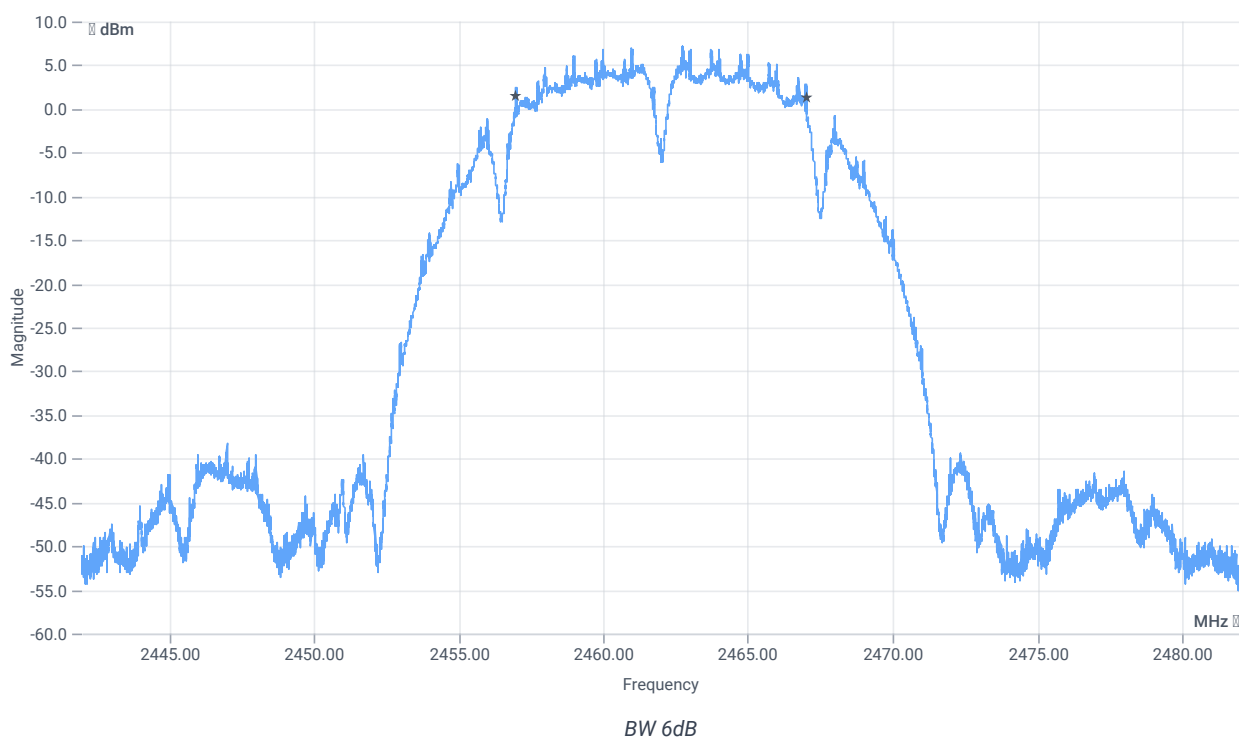

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	10068	kHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	10.04.2024 15:59:48
Ambit temp [°C] humidity [rel%]	26.9 28
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.07	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.07 8.27 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

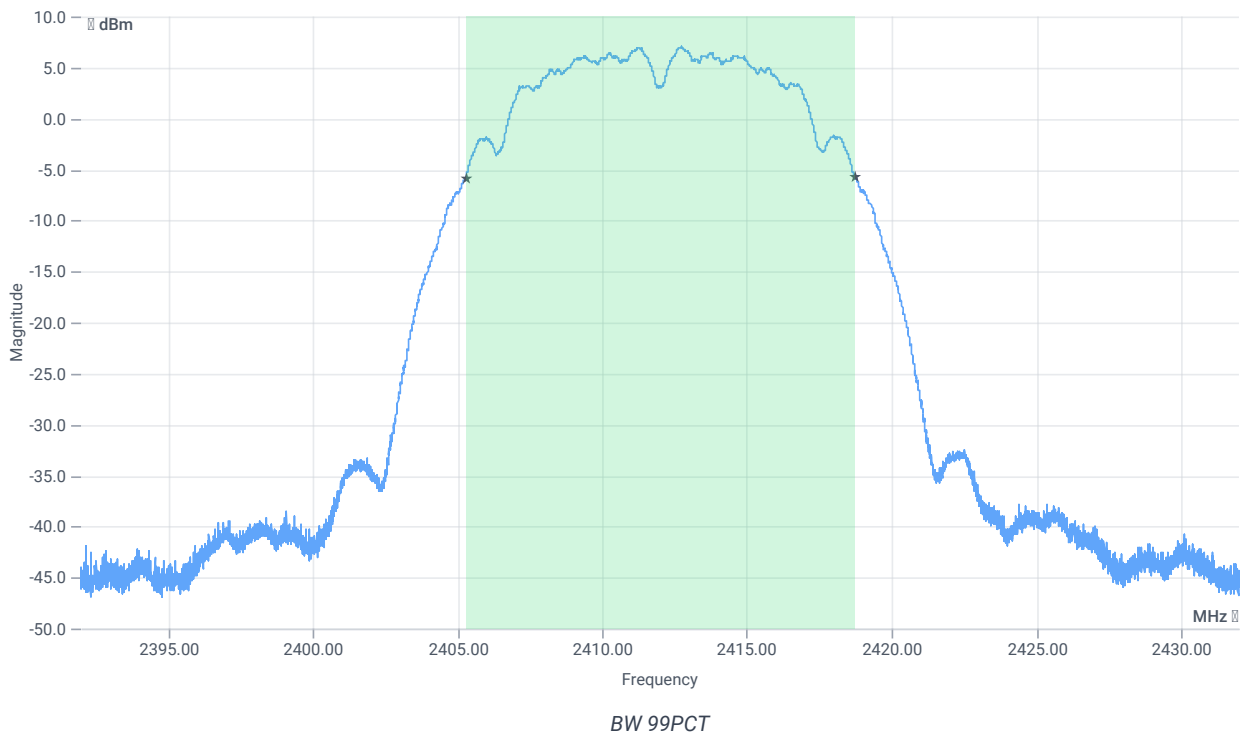


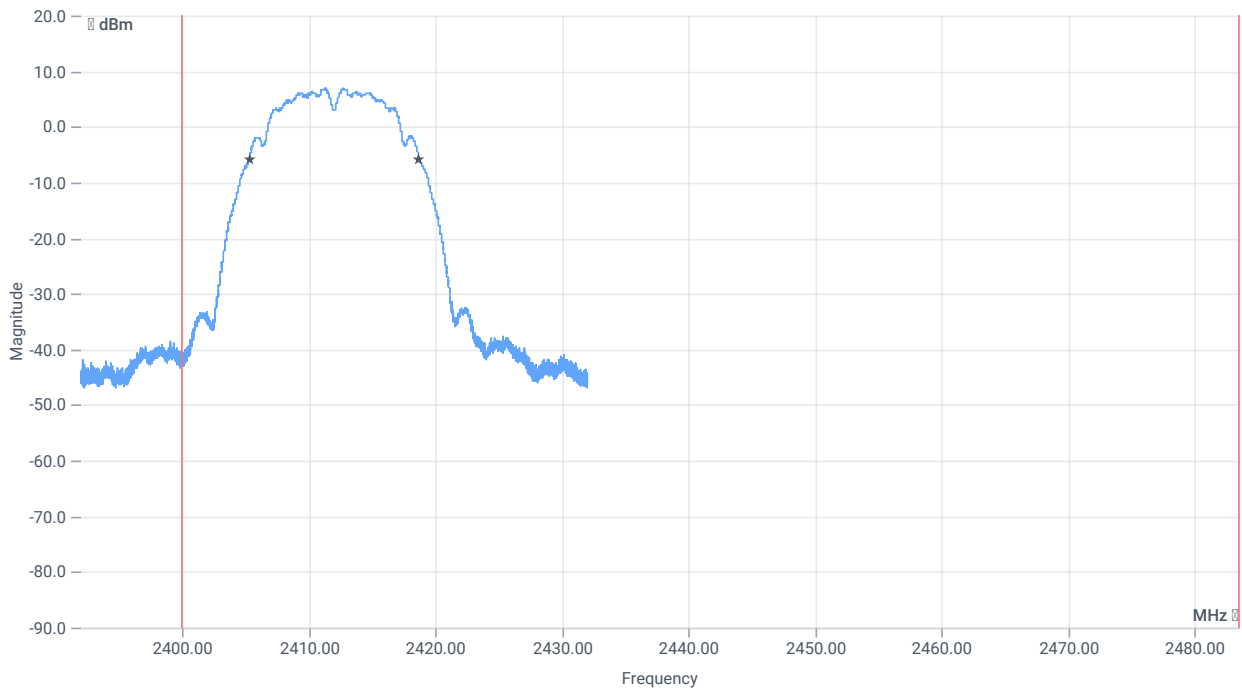


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13435.000	kHz	INFO
T1 99%	2400.000000	---	2405.2887	MHz	PASS
T2 99%	---	2483.500000	2418.7233	MHz	PASS

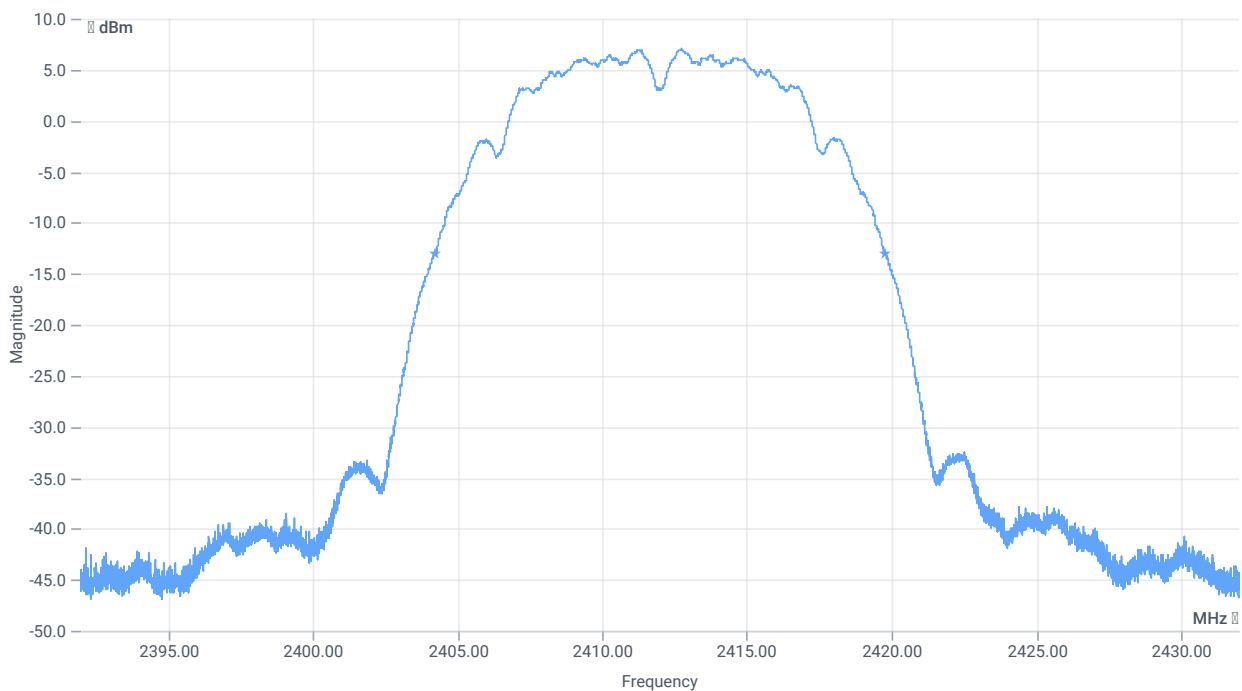

BW 20dB

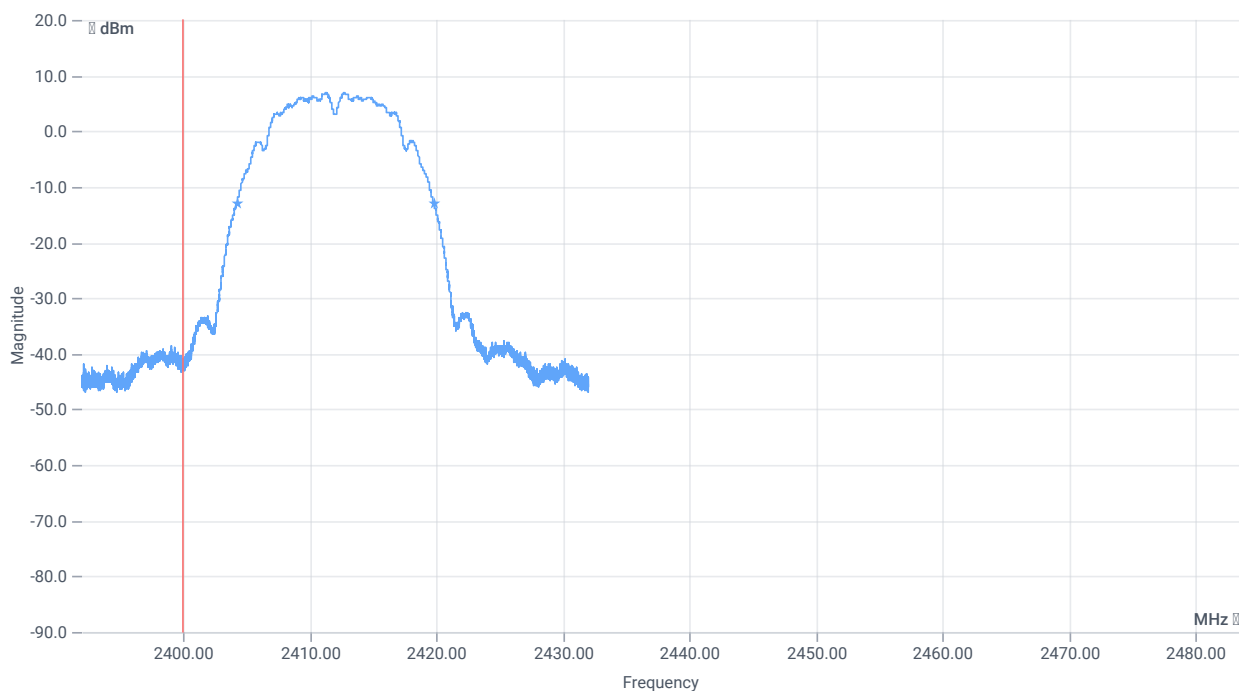

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15552	kHz	INFO
T1 20dB	2400.000000	---	2404.2320	MHz	PASS
T2 20dB	---	2483.500000	2419.7840	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:15:45
Ambit temp [°C] humidity [rel%]	26.2 28
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.12	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.12 8.32 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

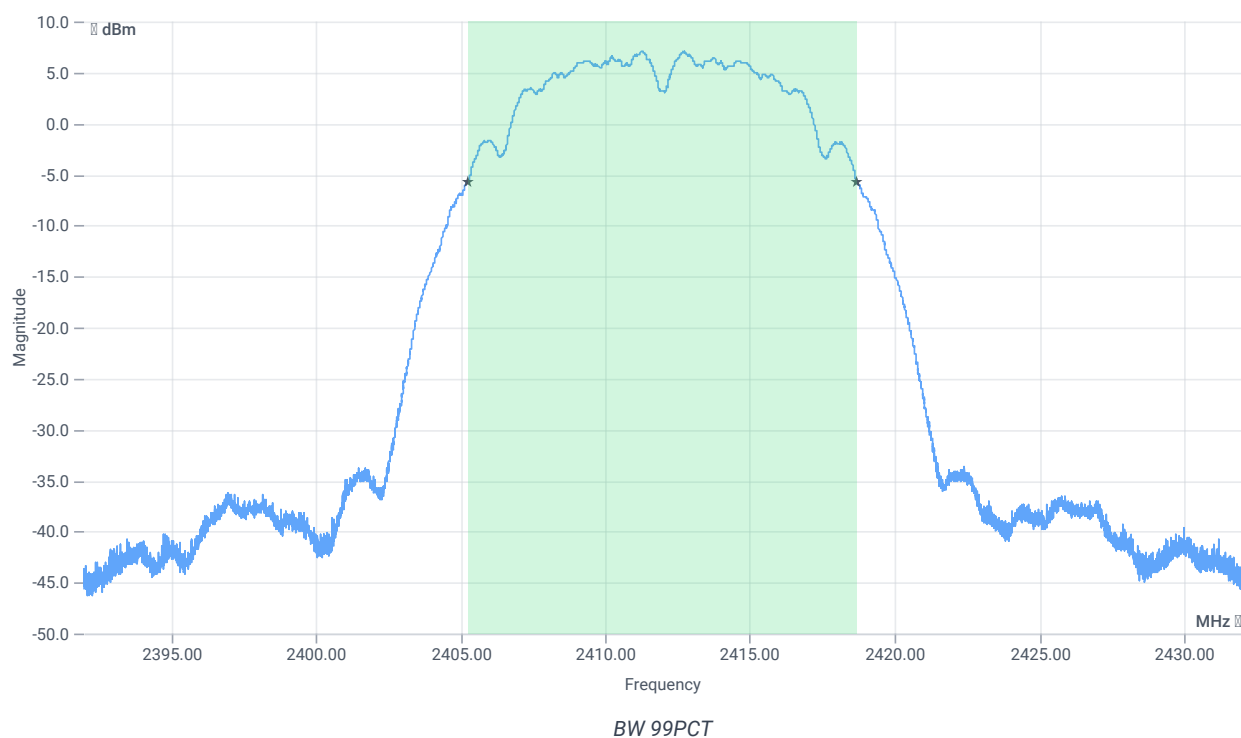


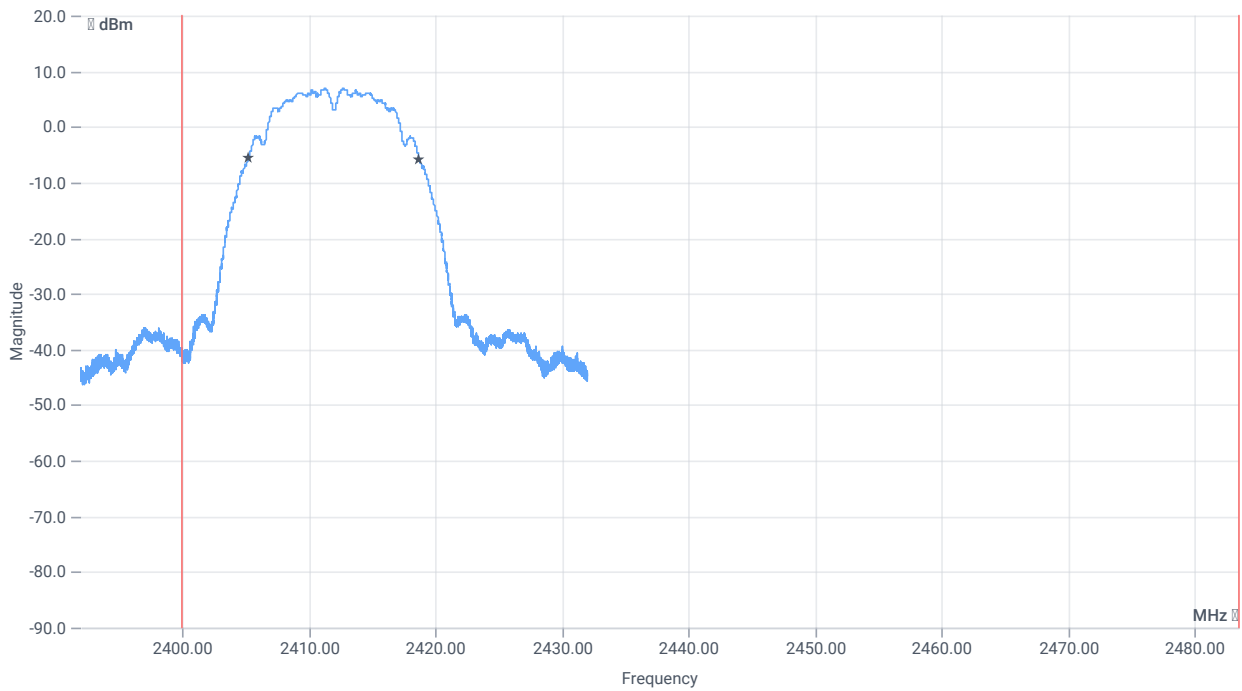


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13455.000	kHz	INFO
T1 99%	2400.000000	---	2405.2447	MHz	PASS
T2 99%	---	2483.500000	2418.6993	MHz	PASS

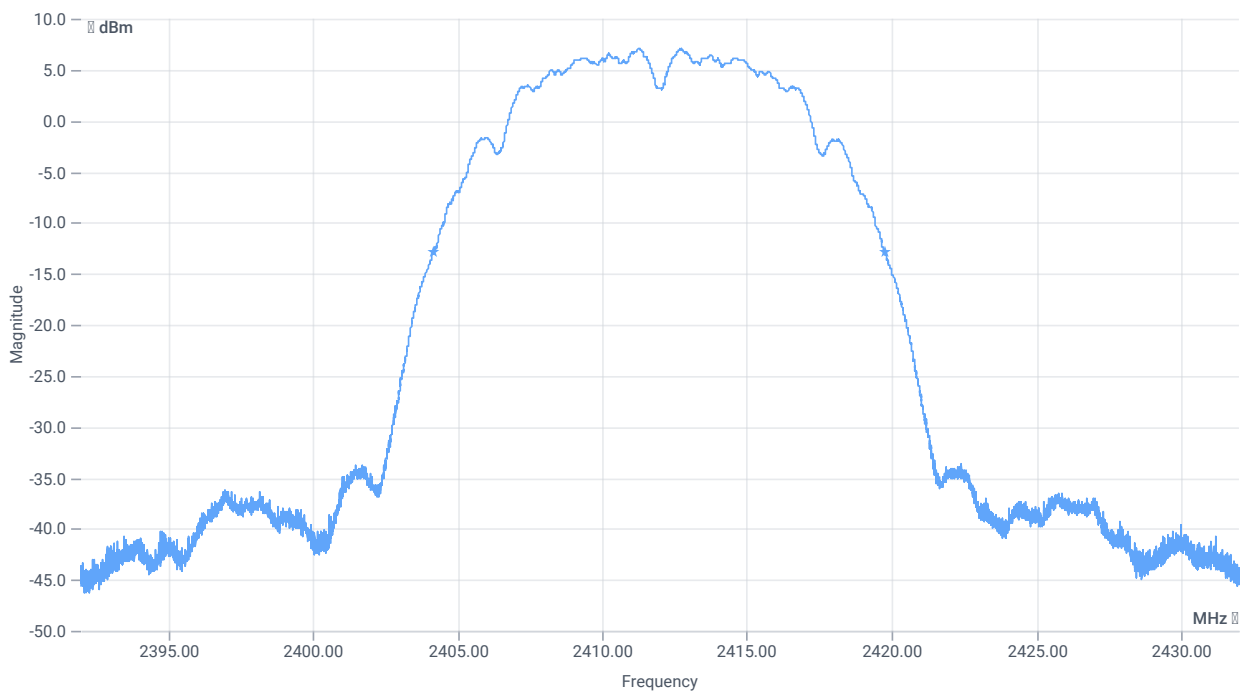

BW 20dB

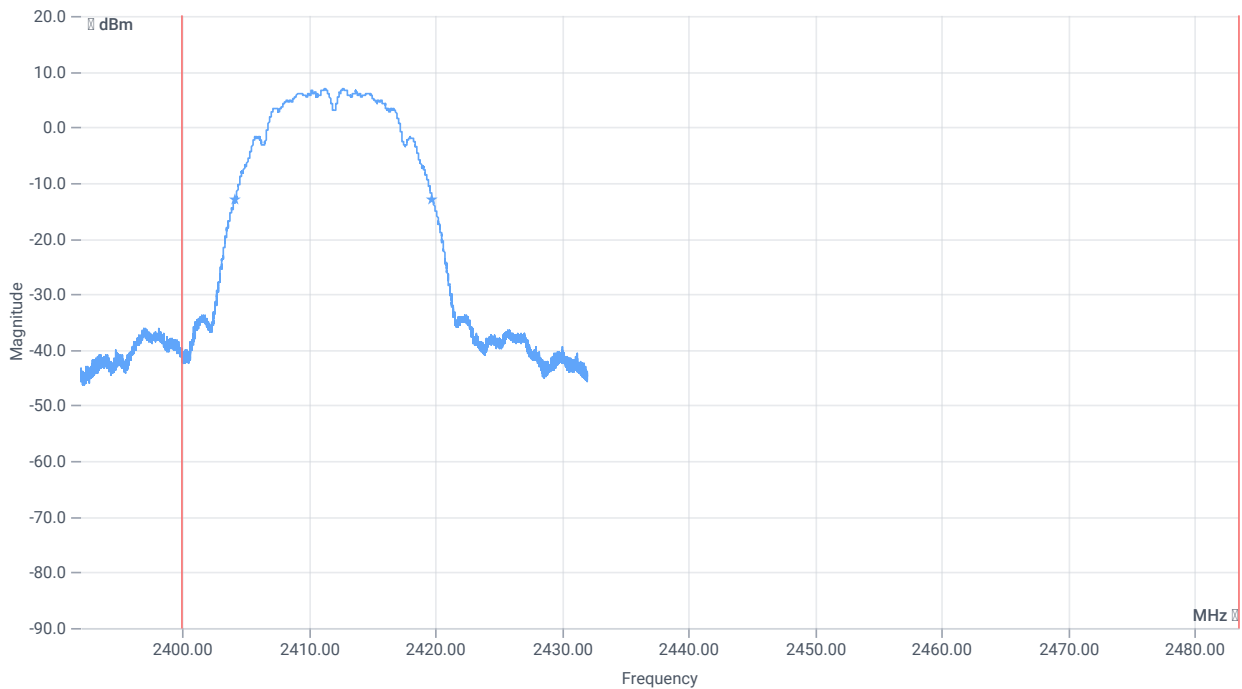

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15584	kHz	INFO
T1 20dB	2400.000000	---	2404.1600	MHz	PASS
T2 20dB	---	2483.500000	2419.7440	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:31:50
Ambit temp [°C] humidity [rel%]	25.8 29
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.53	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.53 8.3 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

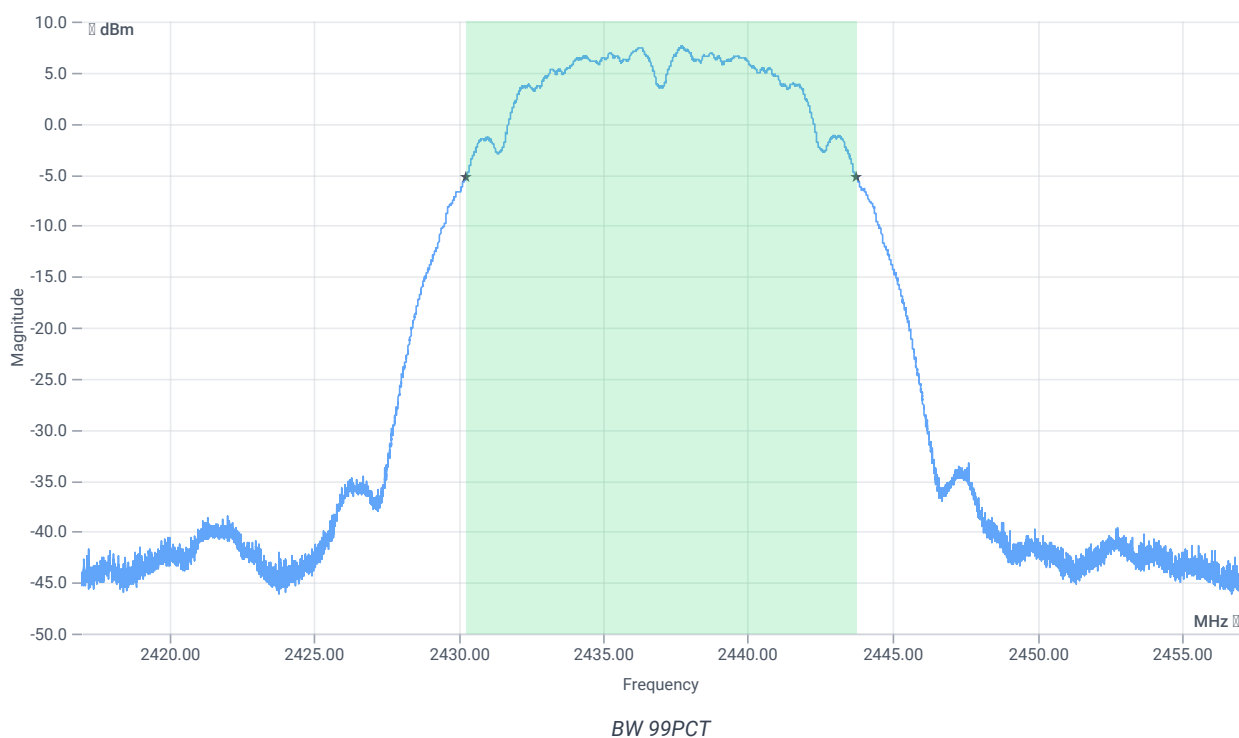


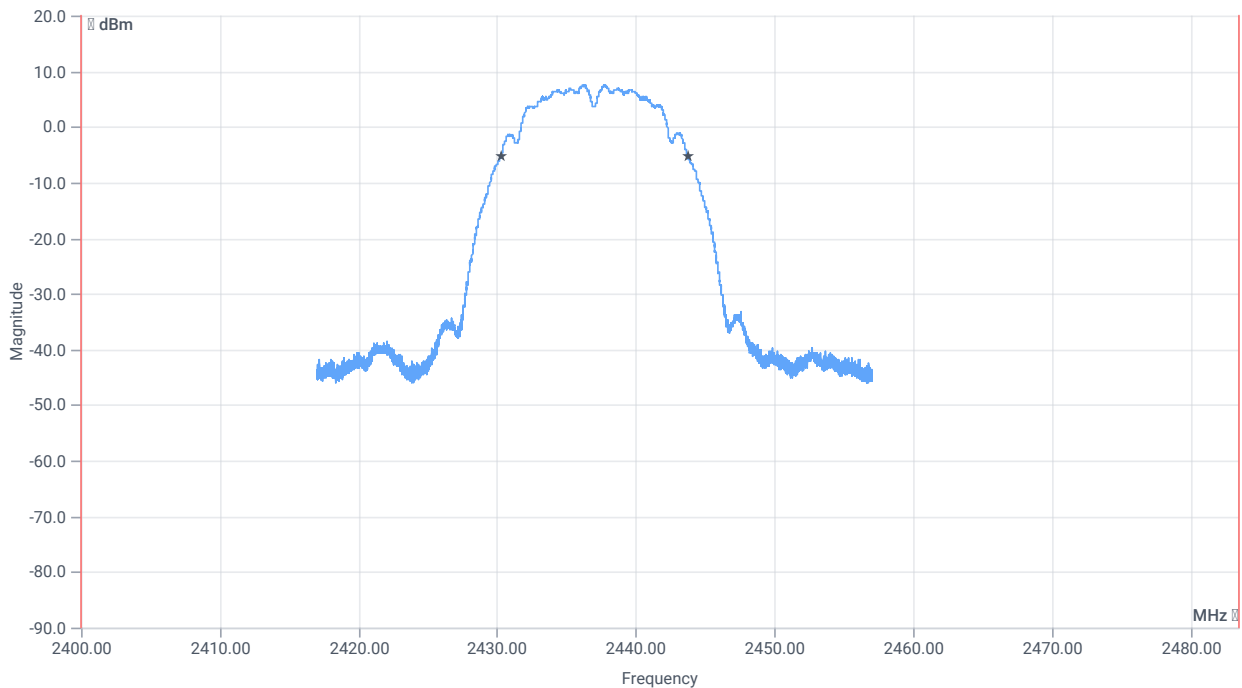


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13455.000	kHz	INFO
T1 99%	2400.000000	---	2430.2807	MHz	PASS
T2 99%	---	2483.500000	2443.7353	MHz	PASS

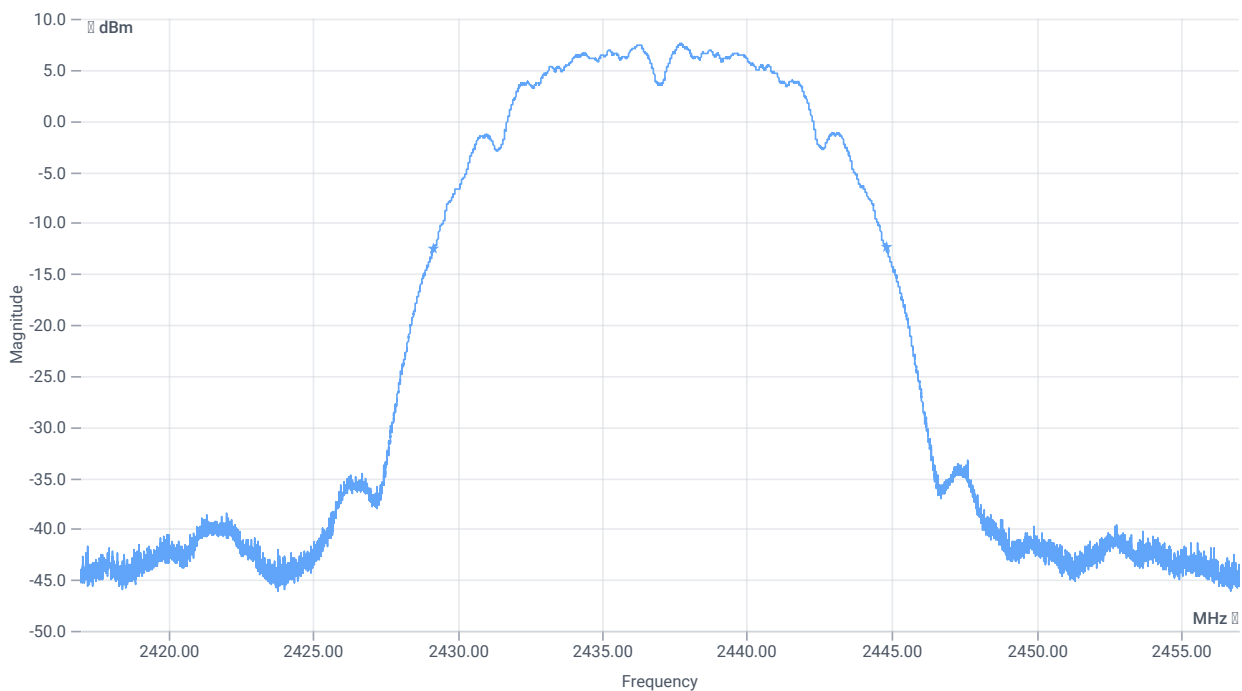

BW 20dB

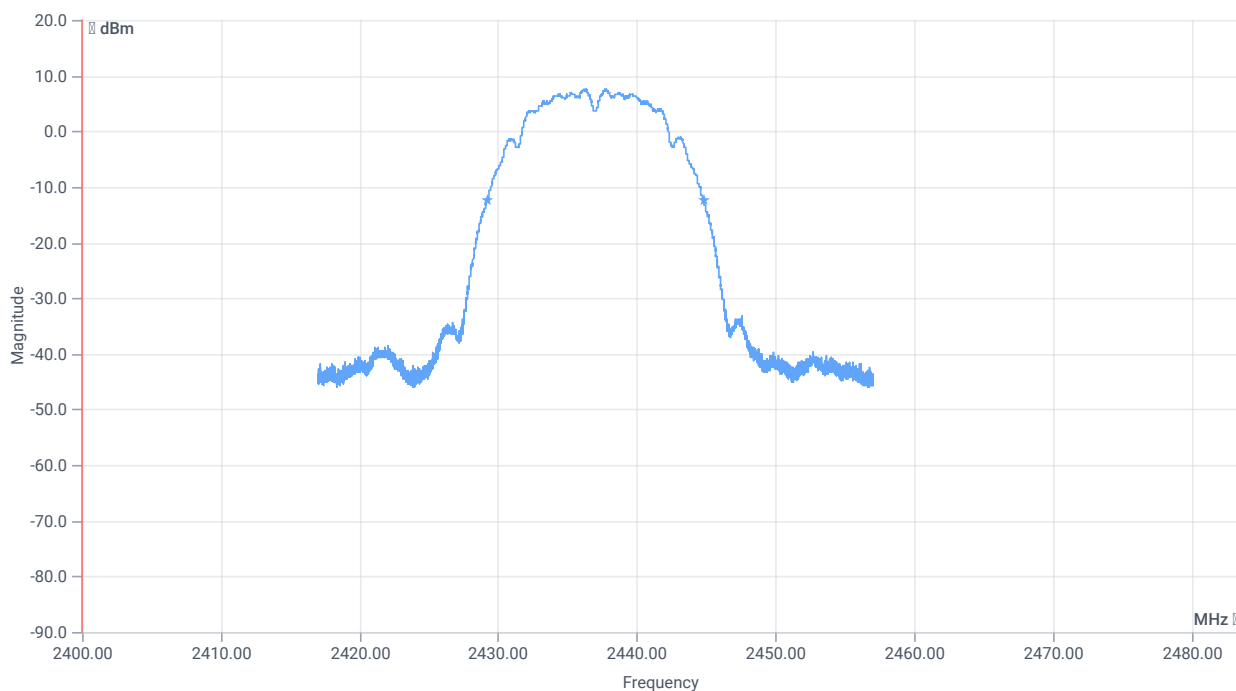

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15628	kHz	INFO
T1 20dB	2400.000000	---	2429.1880	MHz	PASS
T2 20dB	---	2483.500000	2444.8160	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:47:51
Ambit temp [°C] humidity [rel%]	25.0 31
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.74	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.74 8.33 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

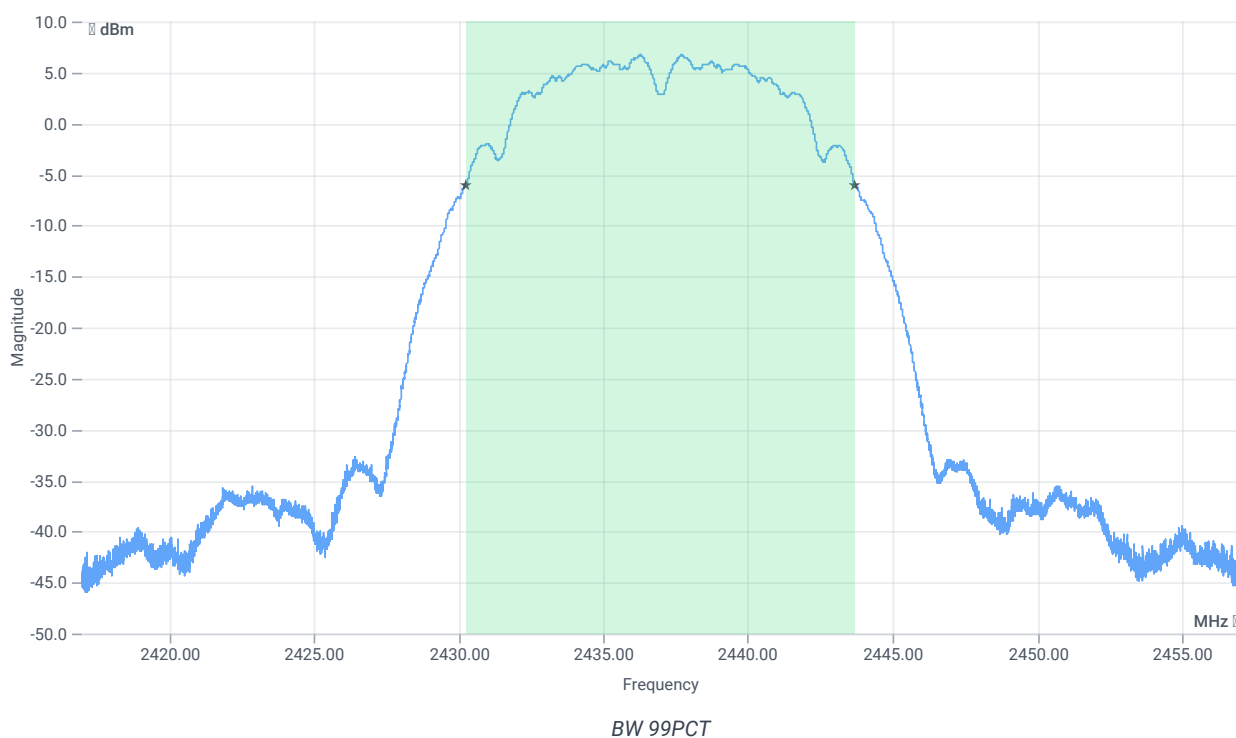


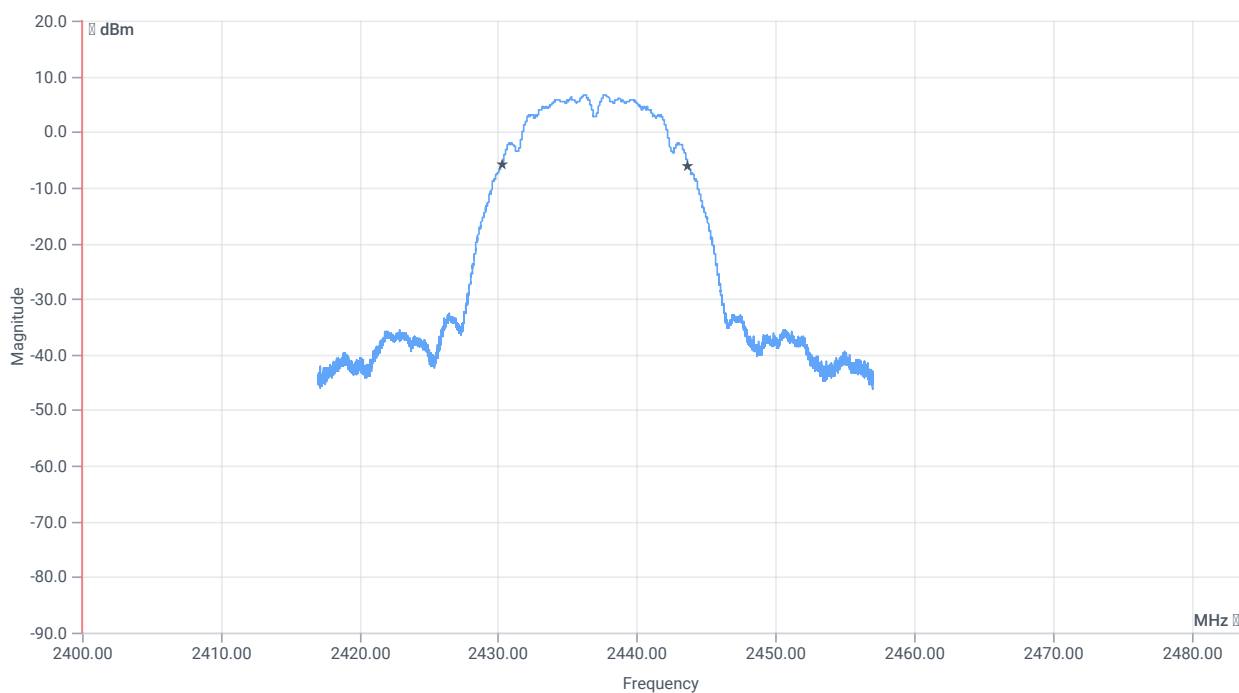


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13451.000	kHz	INFO
T1 99%	2400.000000	---	2430.2487	MHz	PASS
T2 99%	---	2483.500000	2443.6993	MHz	PASS

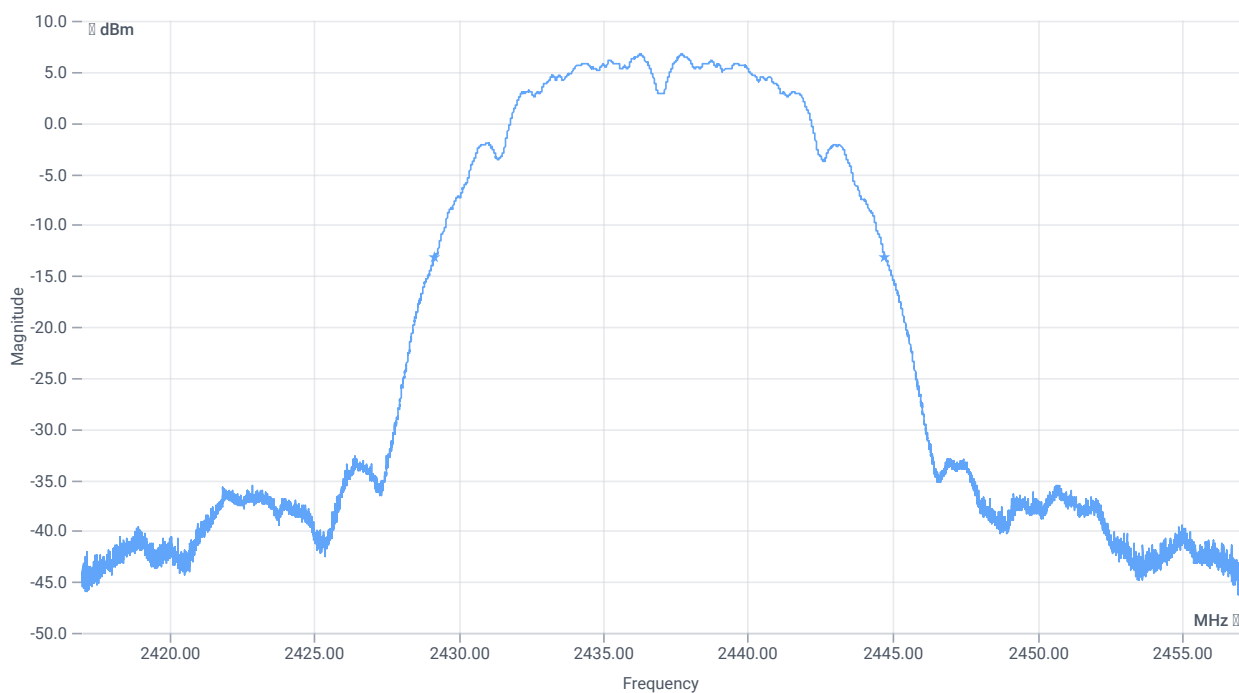

BW 20dB

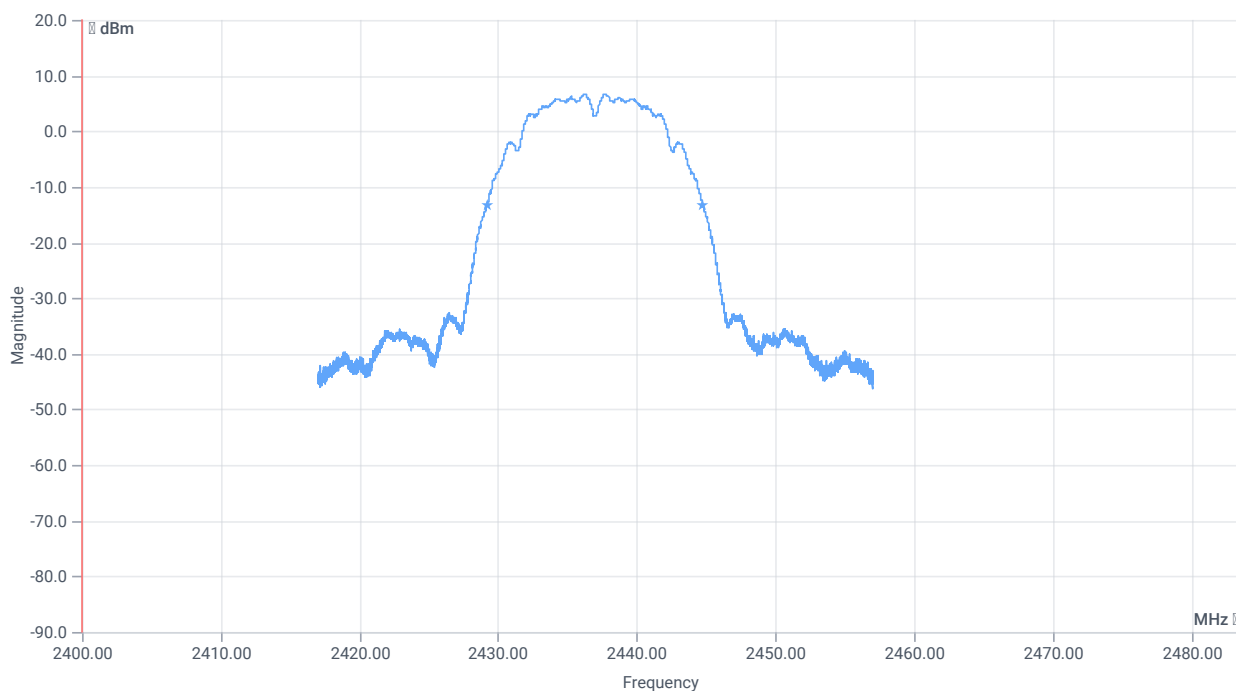

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15564	kHz	INFO
T1 20dB	2400.000000	---	2429.1760	MHz	PASS
T2 20dB	---	2483.500000	2444.7400	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	10.04.2024 17:36:08
Ambit temp [°C] humidity [rel%]	24.4 32
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.24	dBm	INFO
Ref. frequency	---	---	2410.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.24 8.27 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

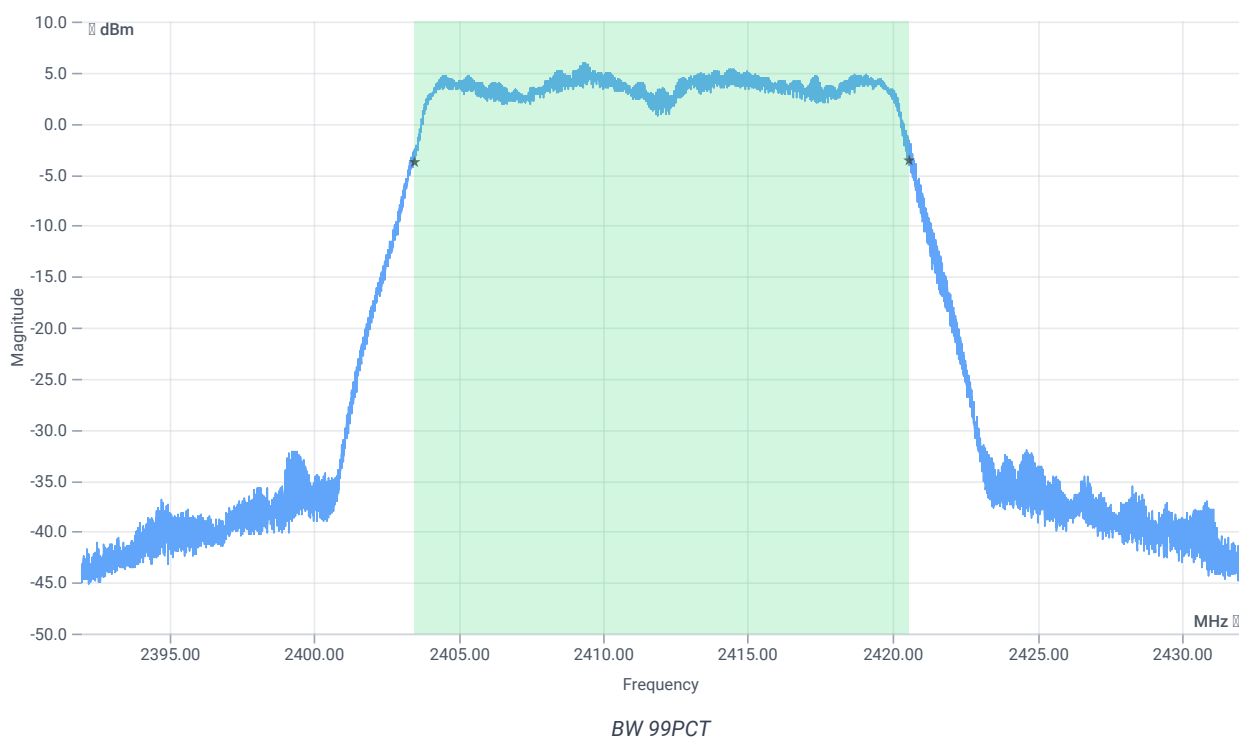


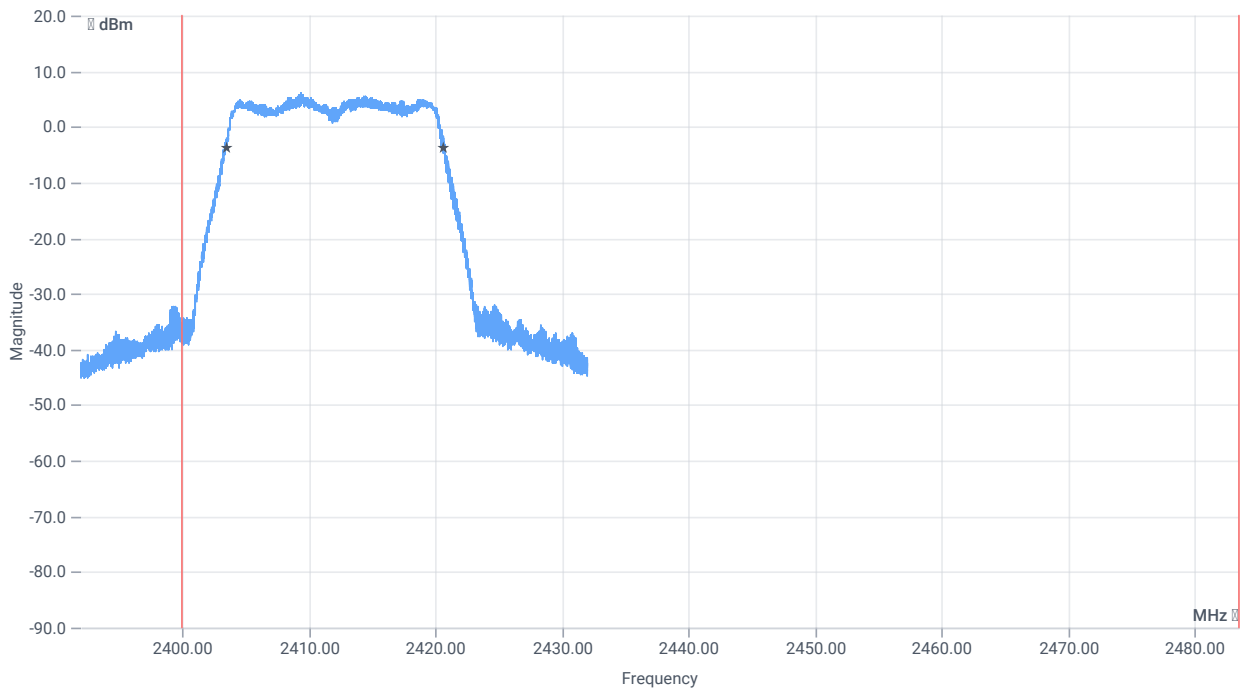


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17118.000	kHz	INFO
T1 99%	2400.000000	---	2403.4609	MHz	PASS
T2 99%	---	2483.500000	2420.5791	MHz	PASS

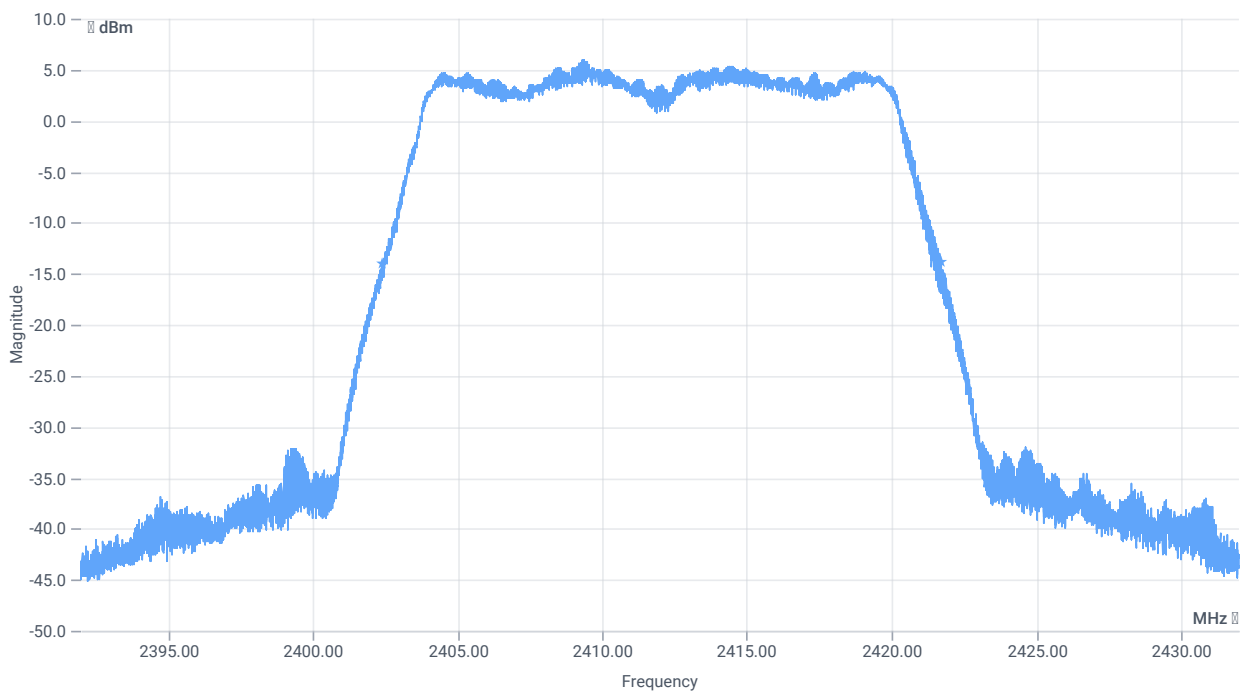

BW 20dB

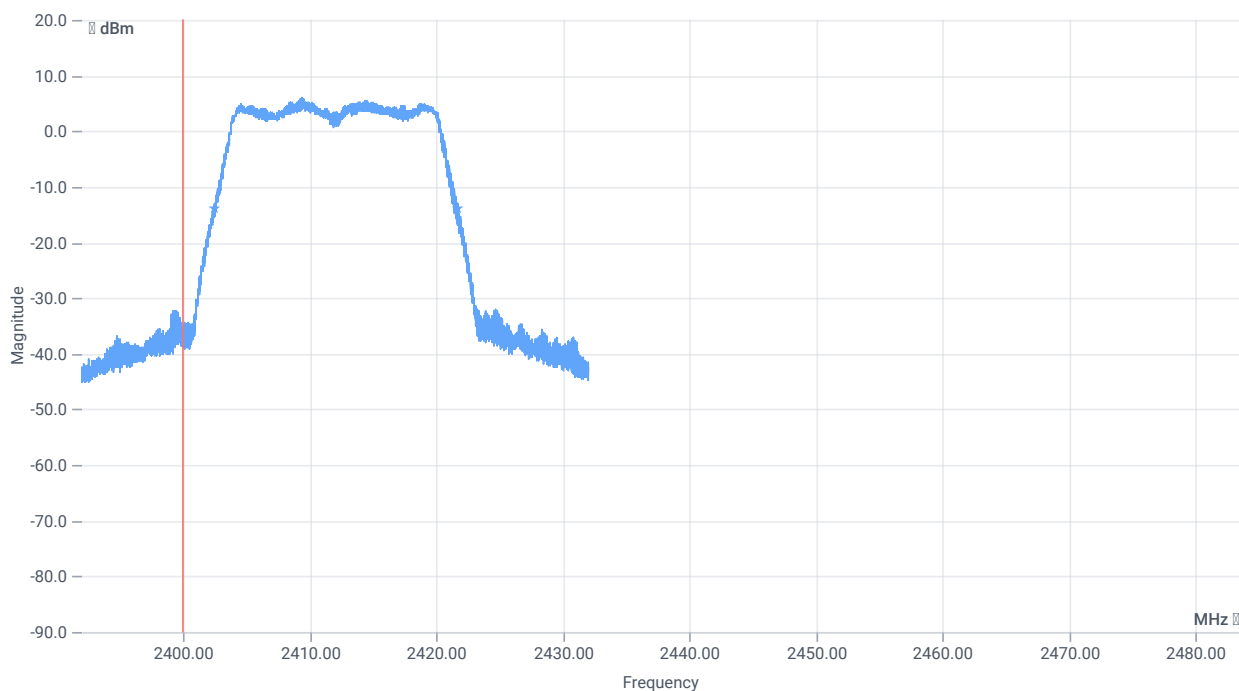

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19304	kHz	INFO
T1 20dB	2400.000000	---	2402.4080	MHz	PASS
T2 20dB	---	2483.500000	2421.7120	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	10.04.2024 17:52:11
Ambit temp [°C] humidity [rel%]	24.1 31
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.13	dBm	INFO
Ref. frequency	---	---	2413.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.13 8.32 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

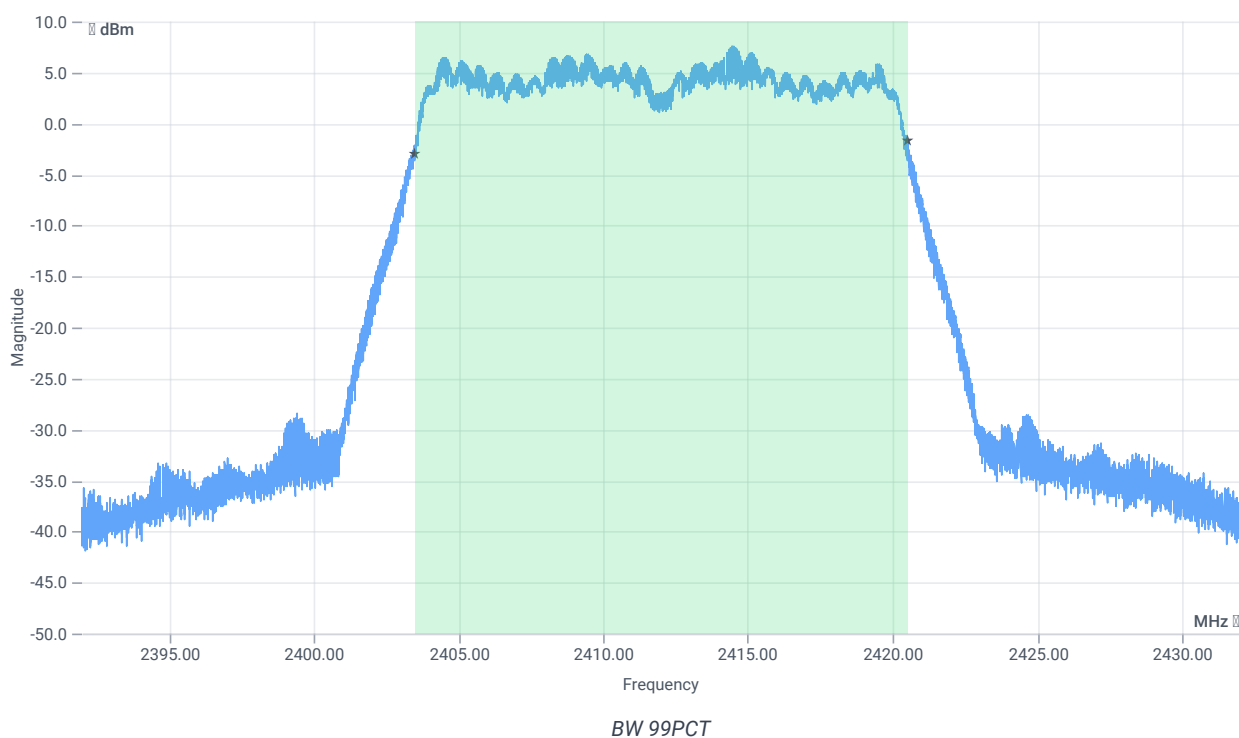


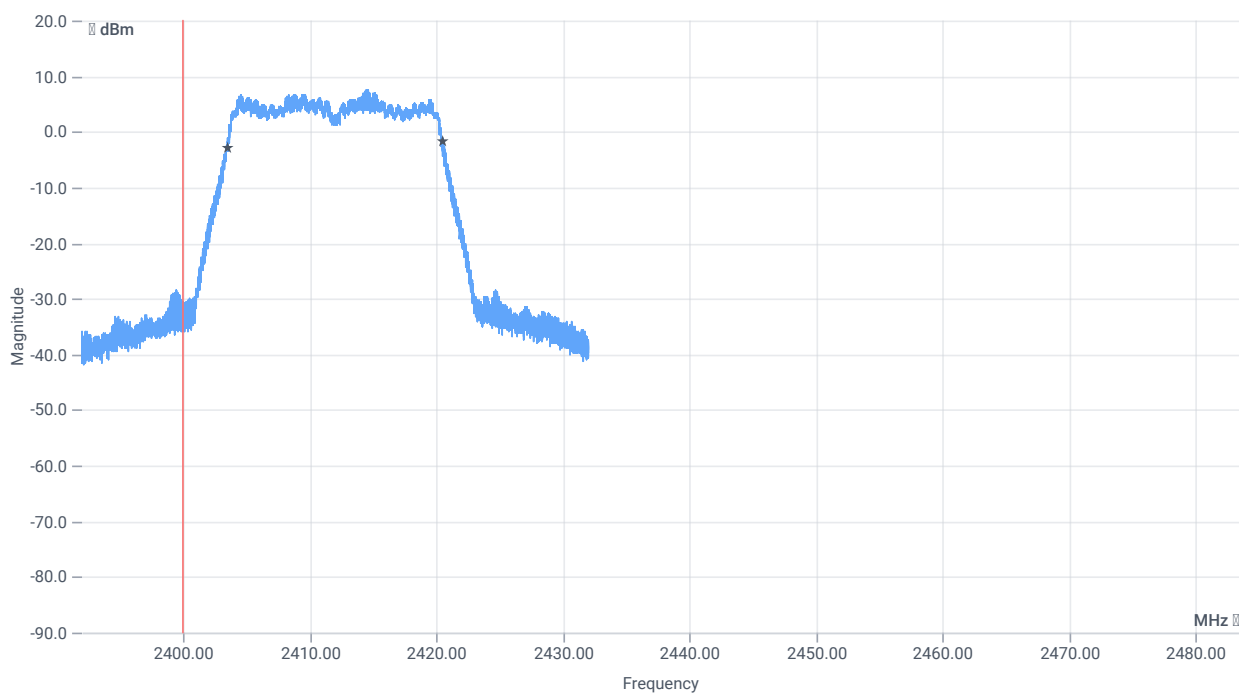


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17002.000	kHz	INFO
T1 99%	2400.000000	---	2403.4889	MHz	PASS
T2 99%	---	2483.500000	2420.4912	MHz	PASS

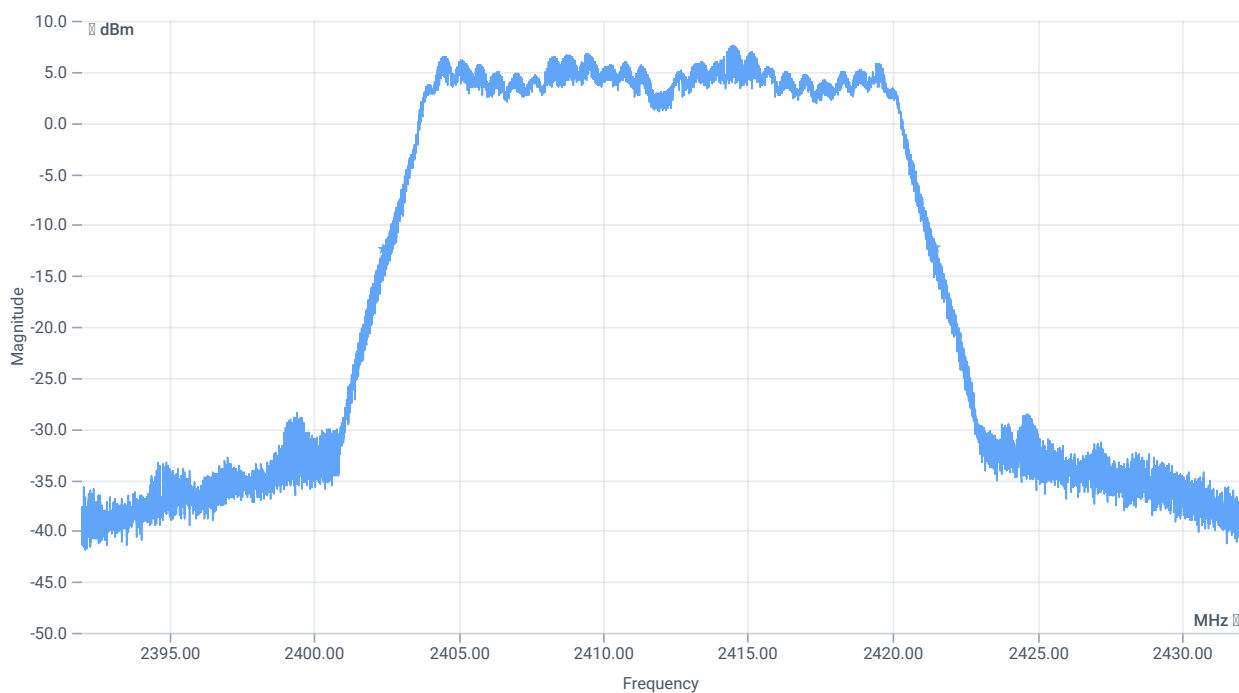

BW 20dB

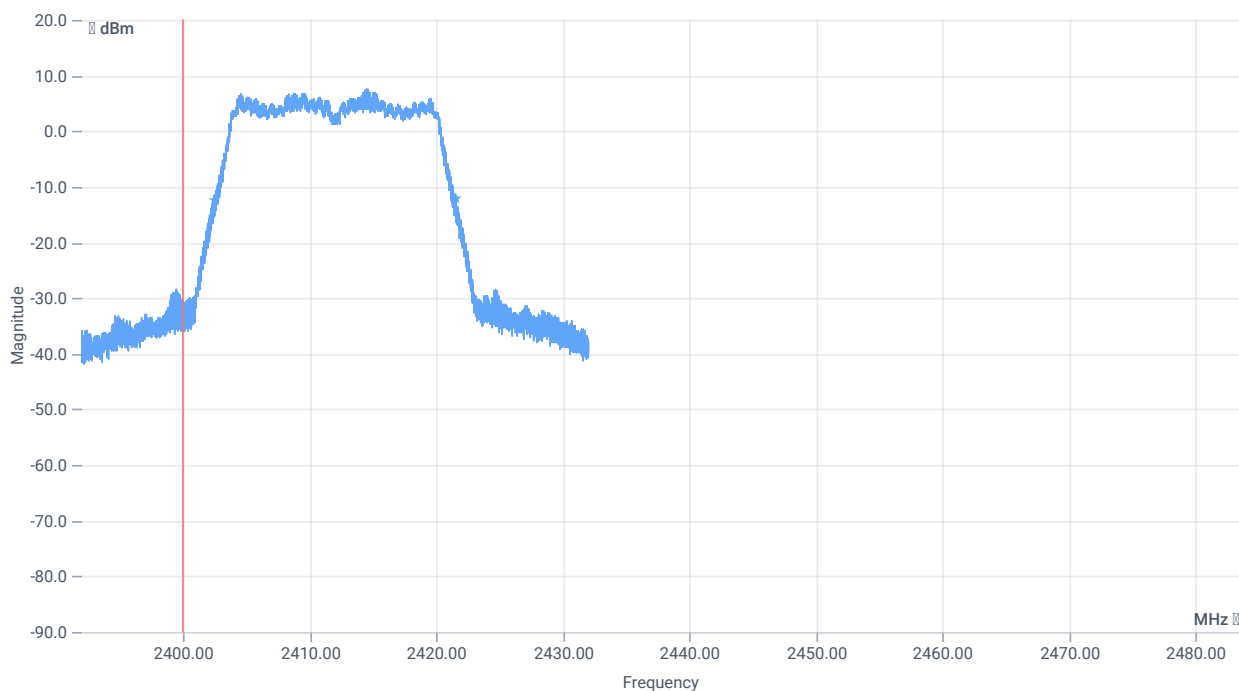

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19072	kHz	INFO
T1 20dB	2400.000000	---	2402.4160	MHz	PASS
T2 20dB	---	2483.500000	2421.4880	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:08:18
Ambit temp [°C] humidity [rel%]	23.5 31
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.55	dBm	INFO
Ref. frequency	---	---	2439.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.55 8.3 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

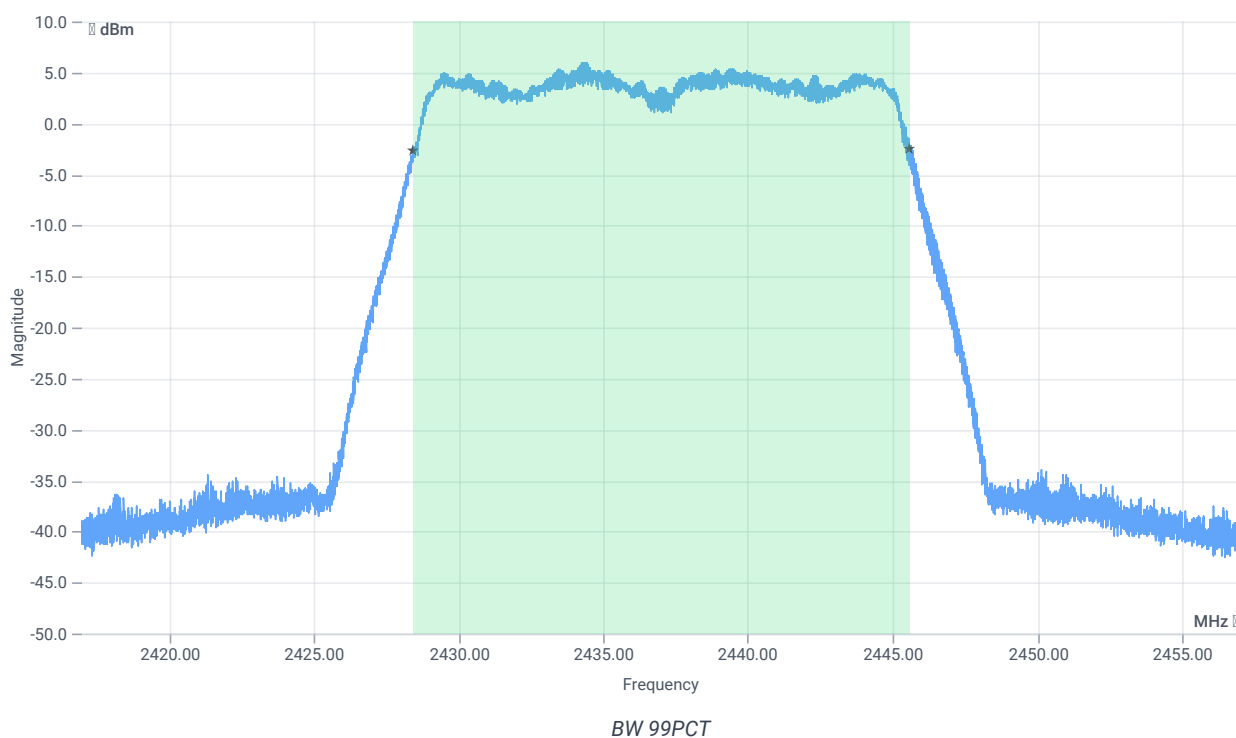


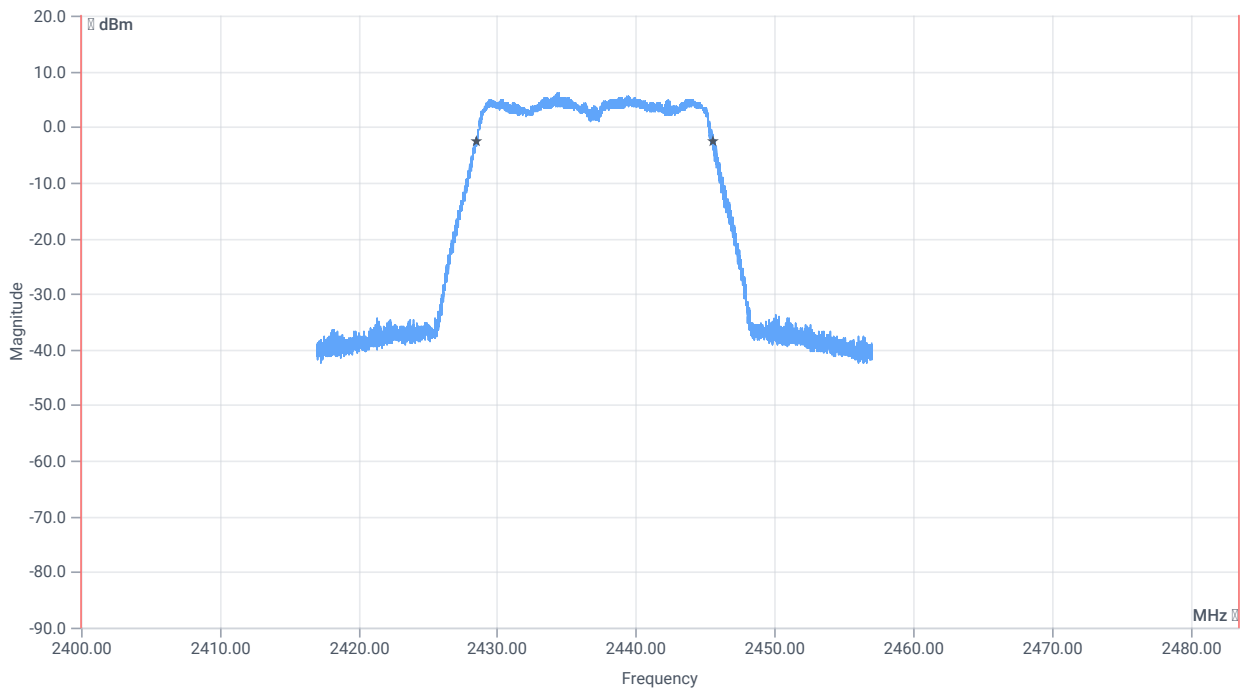


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17118.000	kHz	INFO
T1 99%	2400.000000	---	2428.4569	MHz	PASS
T2 99%	---	2483.500000	2445.5751	MHz	PASS

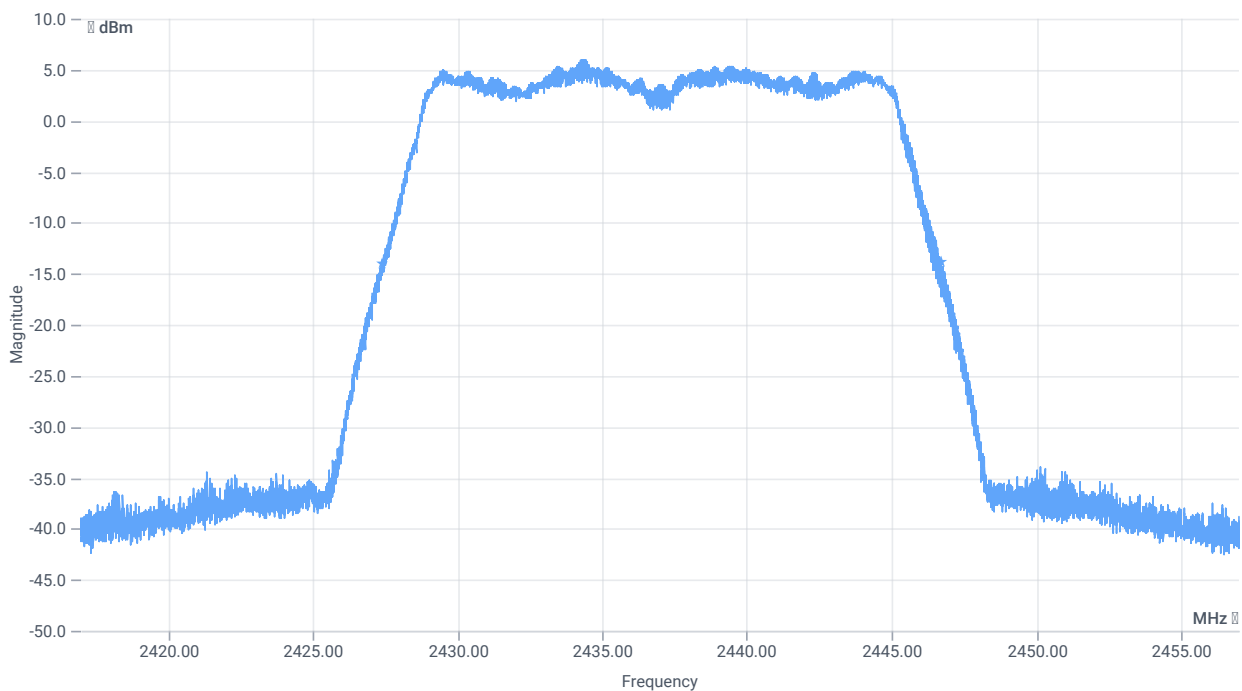

BW 20dB

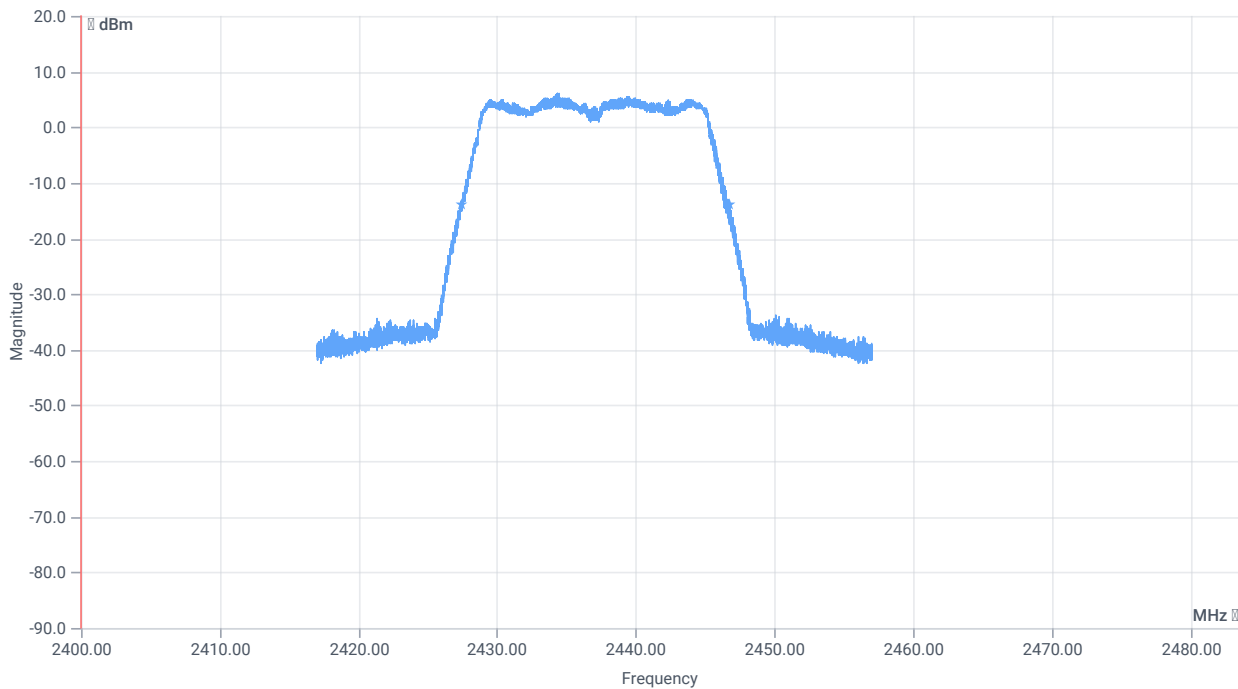

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19336	kHz	INFO
T1 20dB	2400.000000	---	2427.3880	MHz	PASS
T2 20dB	---	2483.500000	2446.7240	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:24:19
Ambit temp [°C] humidity [rel%]	23.8 30
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.07	dBm	INFO
Ref. frequency	---	---	2435.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.07 8.33 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

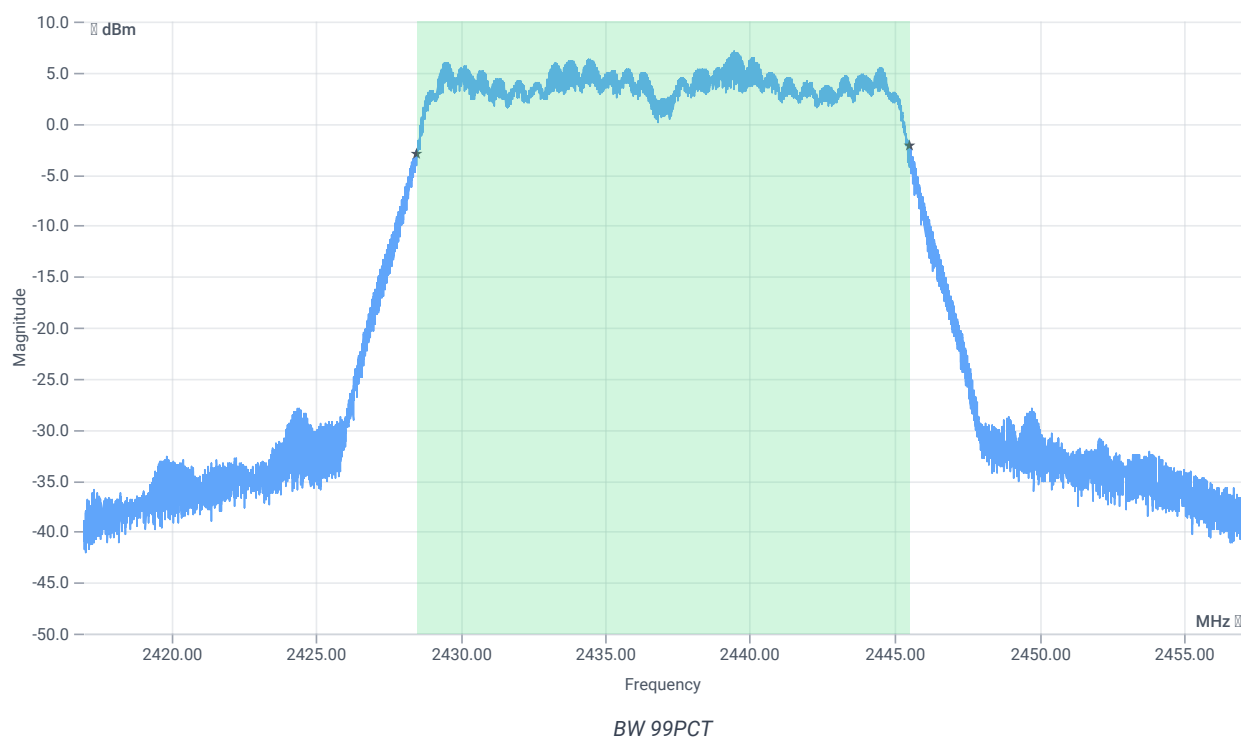


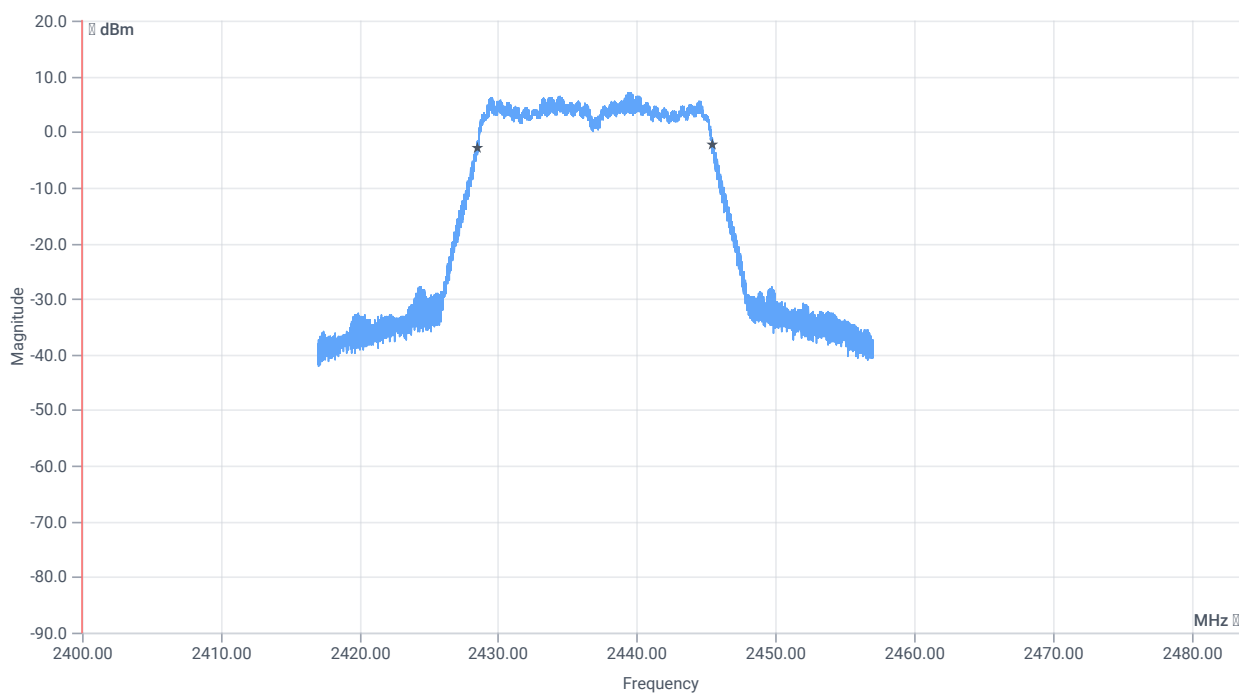


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17026.000	kHz	INFO
T1 99%	2400.000000	---	2428.4809	MHz	PASS
T2 99%	---	2483.500000	2445.5071	MHz	PASS

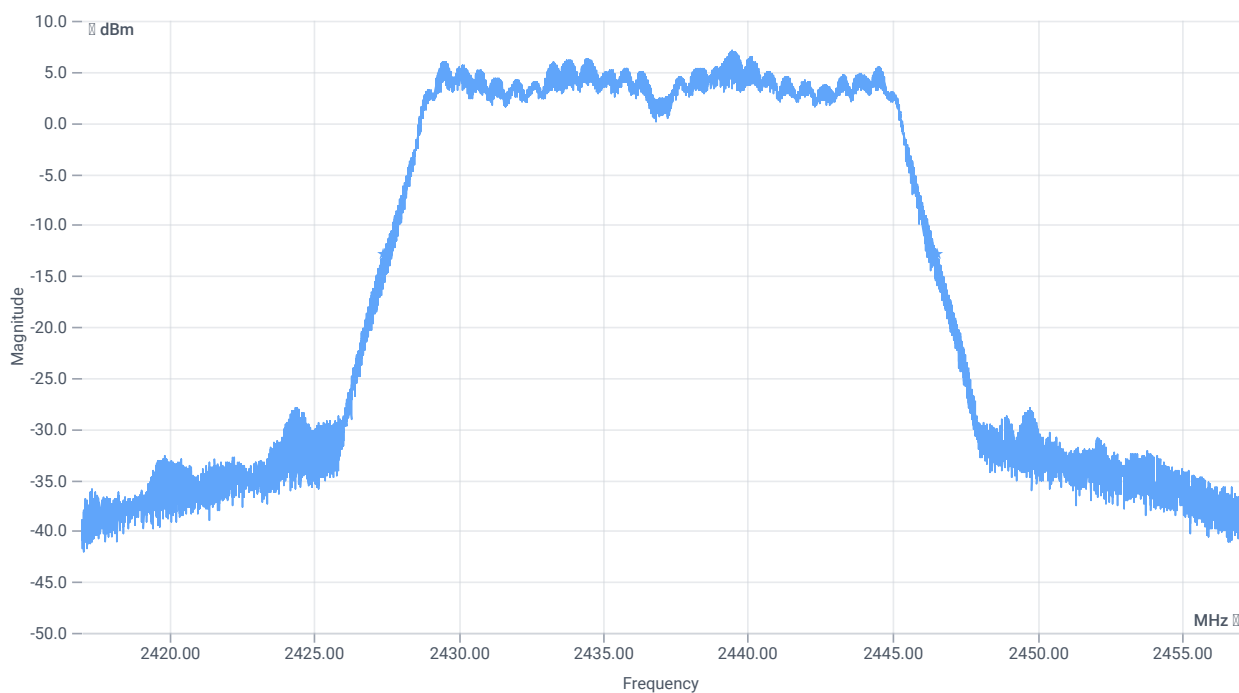

BW 20dB

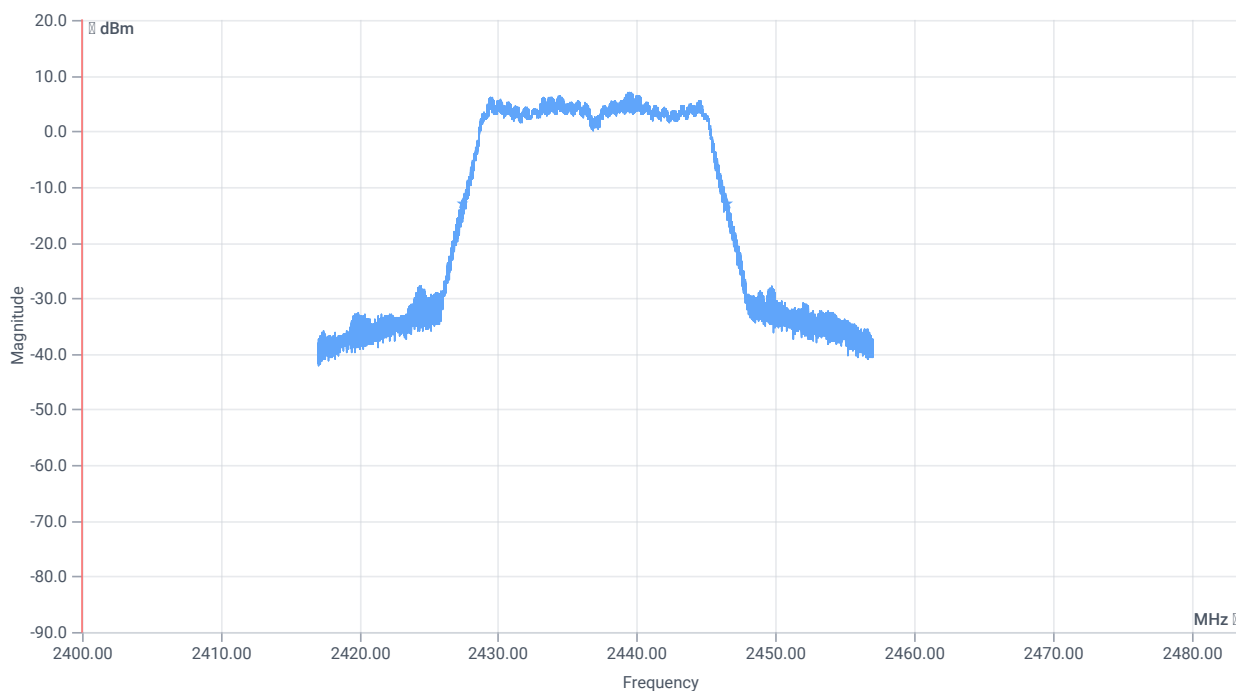

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19100	kHz	INFO
T1 20dB	2400.000000	---	2427.4160	MHz	PASS
T2 20dB	---	2483.500000	2446.5160	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:40:26
Ambit temp [°C] humidity [rel%]	23.8 30
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.95	dBm	INFO
Ref. frequency	---	---	2463.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.95 8.34 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

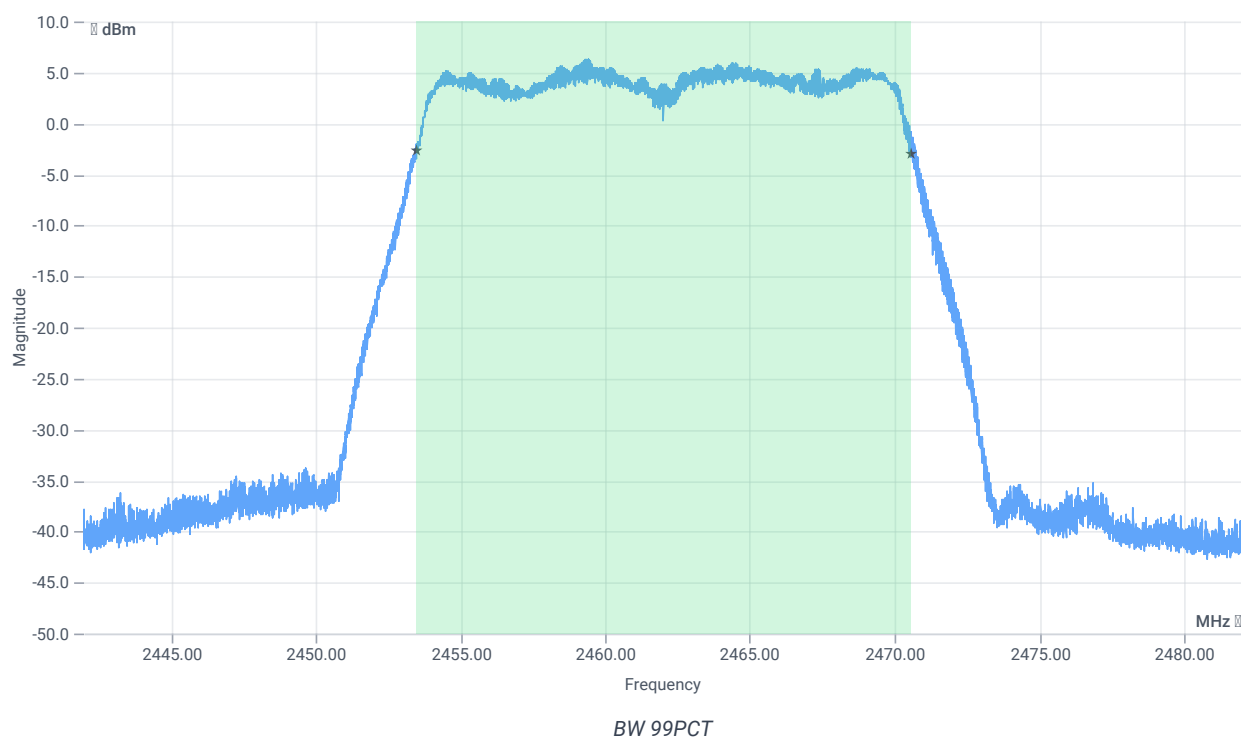


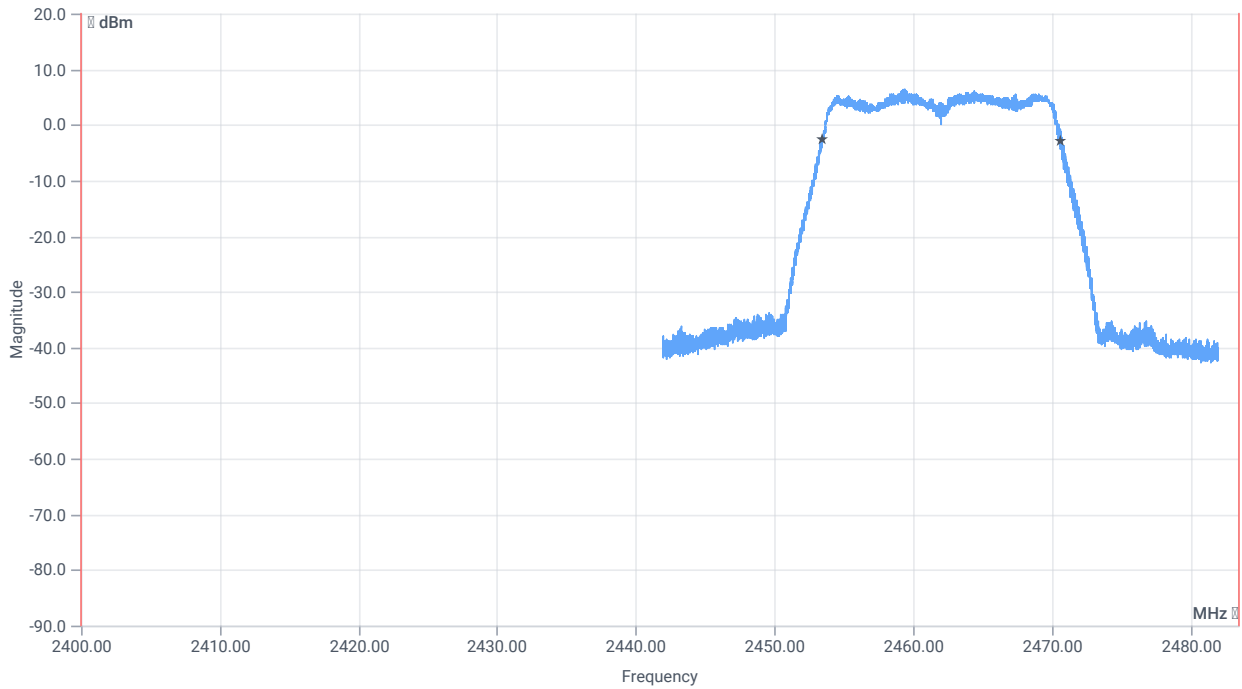


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17118.000	kHz	INFO
T1 99%	2400.000000	---	2453.4809	MHz	PASS
T2 99%	---	2483.500000	2470.5991	MHz	PASS

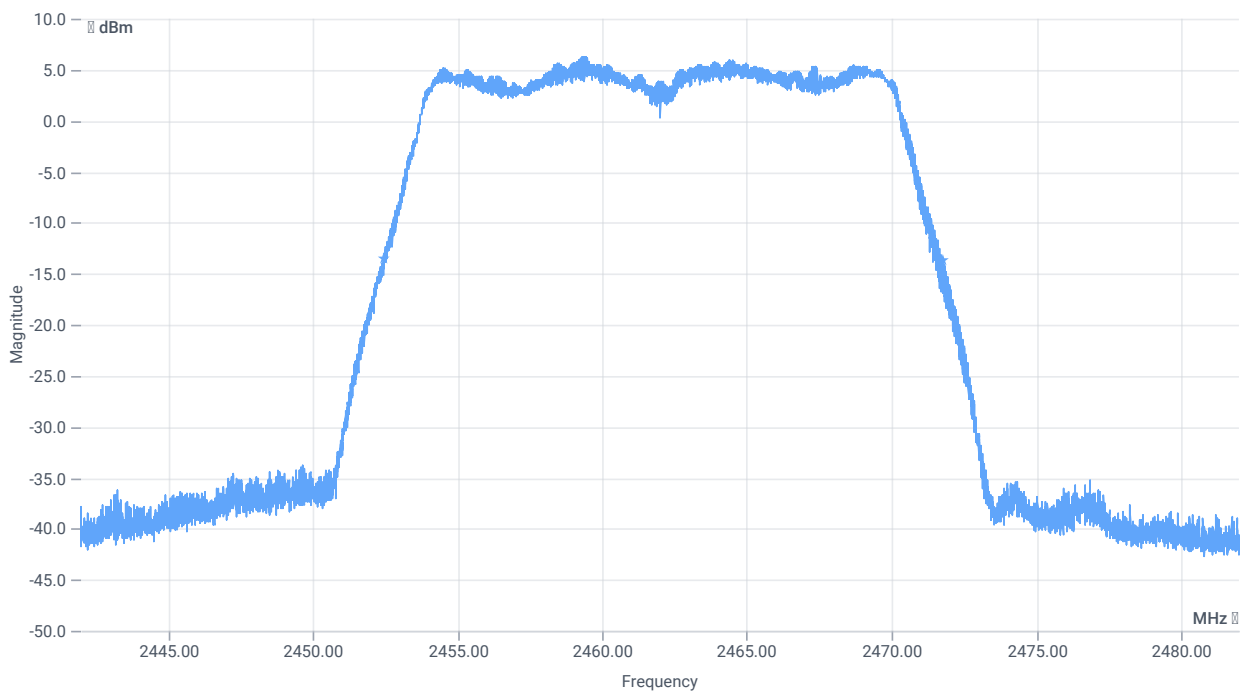

BW 20dB

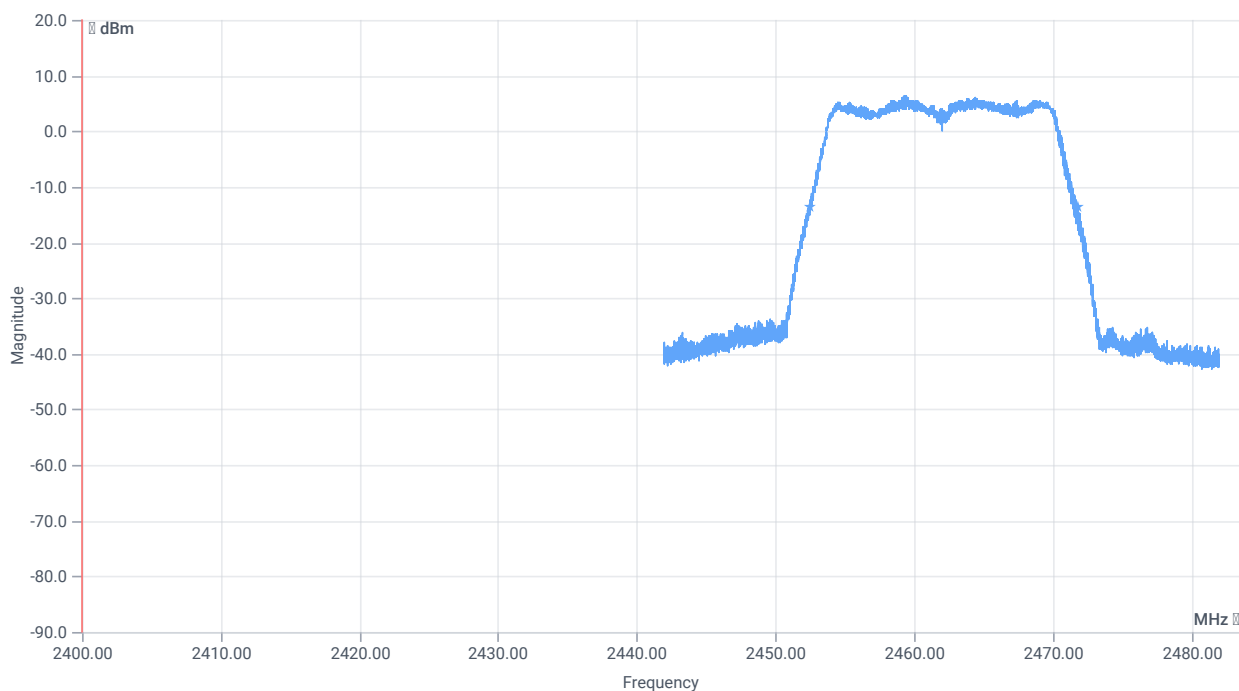

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19316	kHz	INFO
T1 20dB	2400.000000	---	2452.4440	MHz	PASS
T2 20dB	---	2483.500000	2471.7600	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:56:27
Ambit temp [°C] humidity [rel%]	23.8 29
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.01	dBm	INFO
Ref. frequency	---	---	2464.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.01 8.37 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

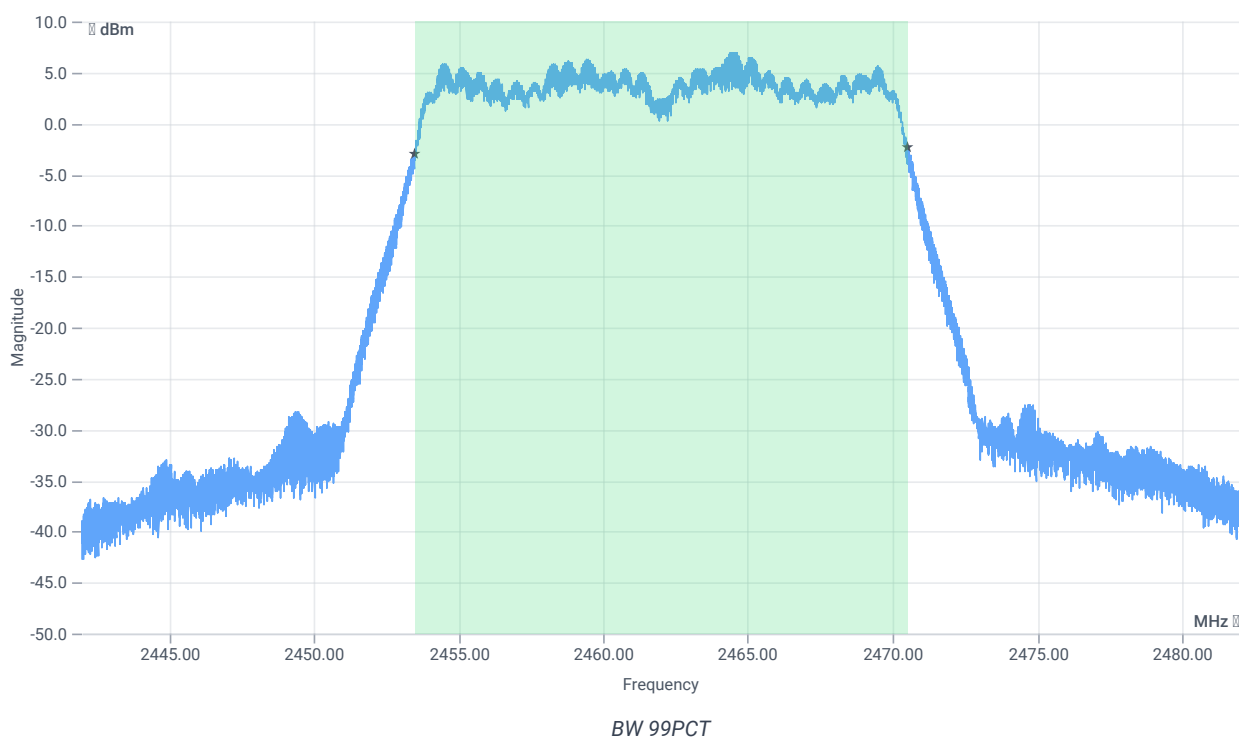


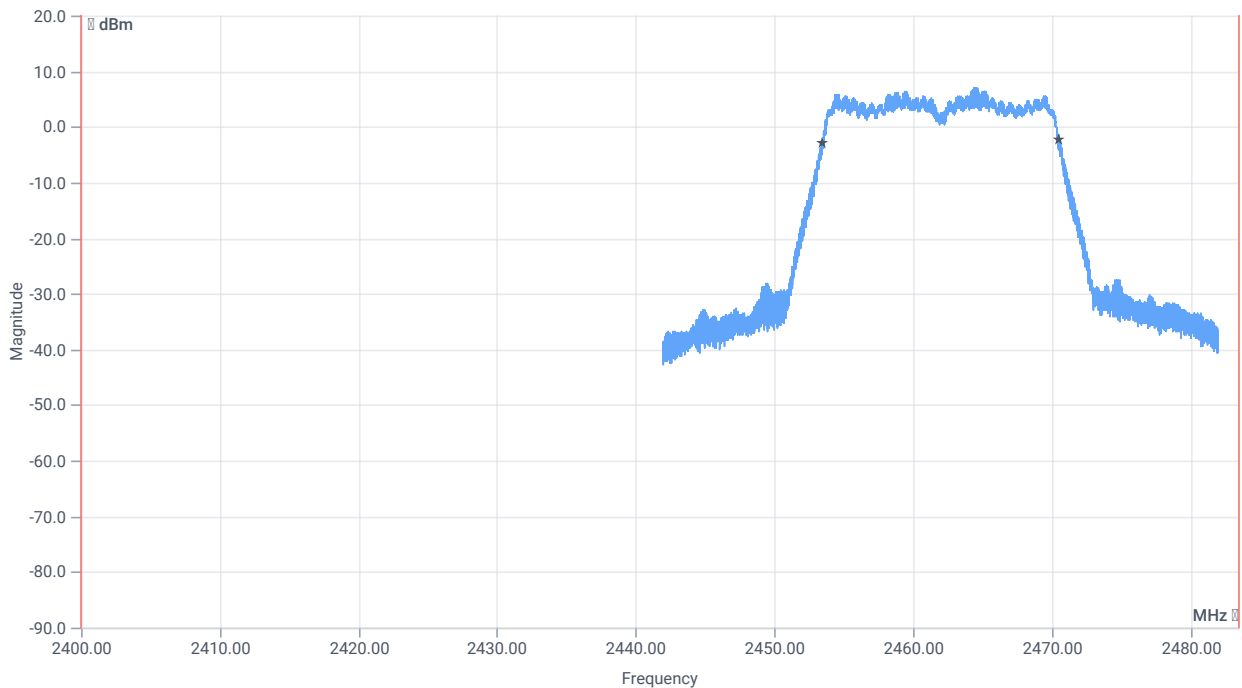


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17034.000	kHz	INFO
T1 99%	2400.000000	---	2453.4969	MHz	PASS
T2 99%	---	2483.500000	2470.5311	MHz	PASS

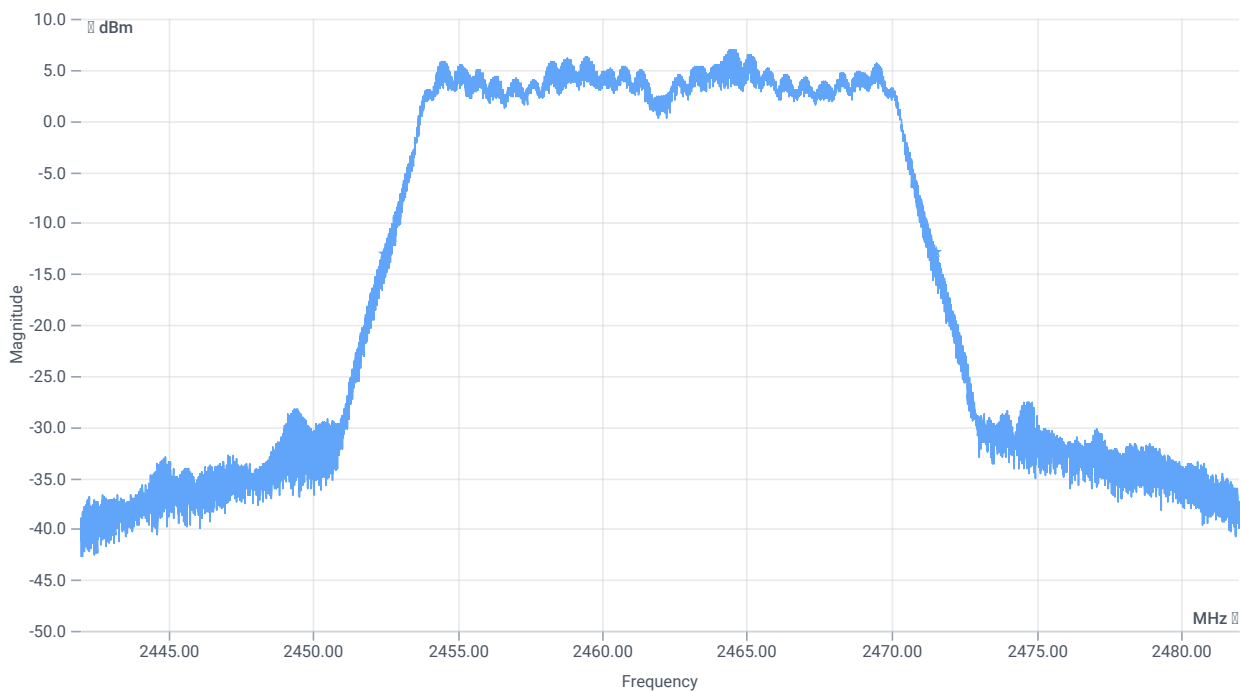

BW 20dB

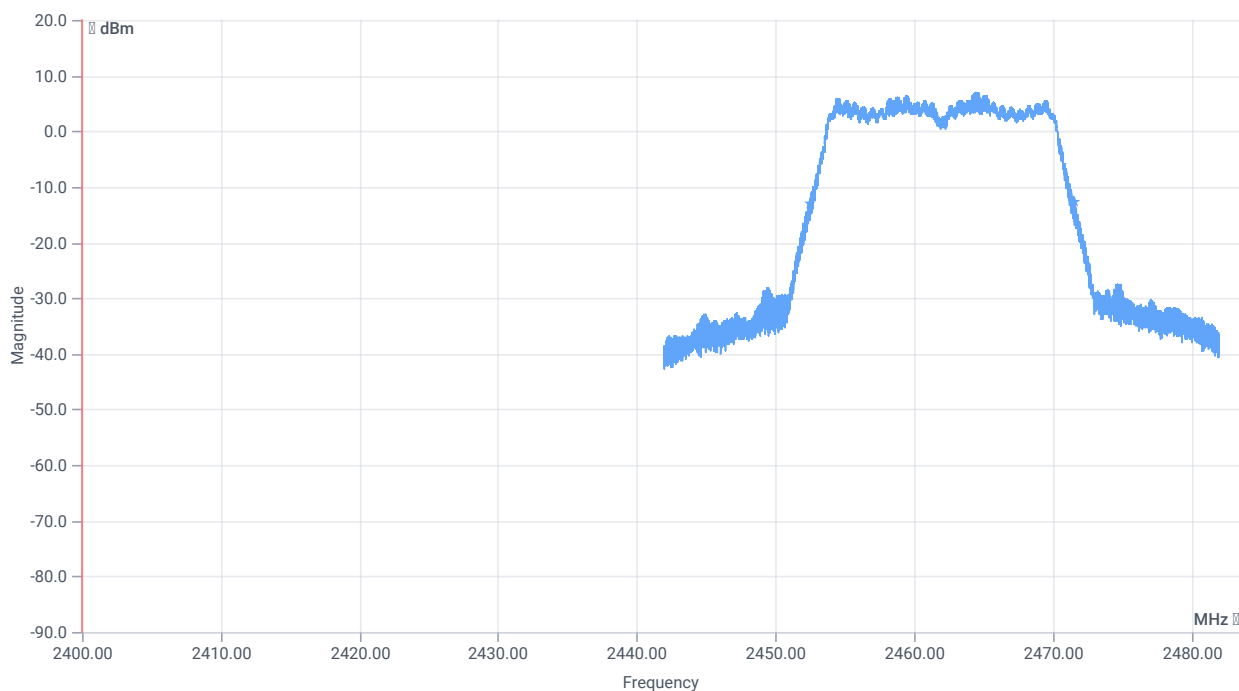

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19076	kHz	INFO
T1 20dB	2400.000000	---	2452.4440	MHz	PASS
T2 20dB	---	2483.500000	2471.5200	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 19:12:36
Ambit temp [°C] humidity [rel%]	23.6 30
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.19	dBm	INFO
Ref. frequency	---	---	2419.890	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.19 8.27 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

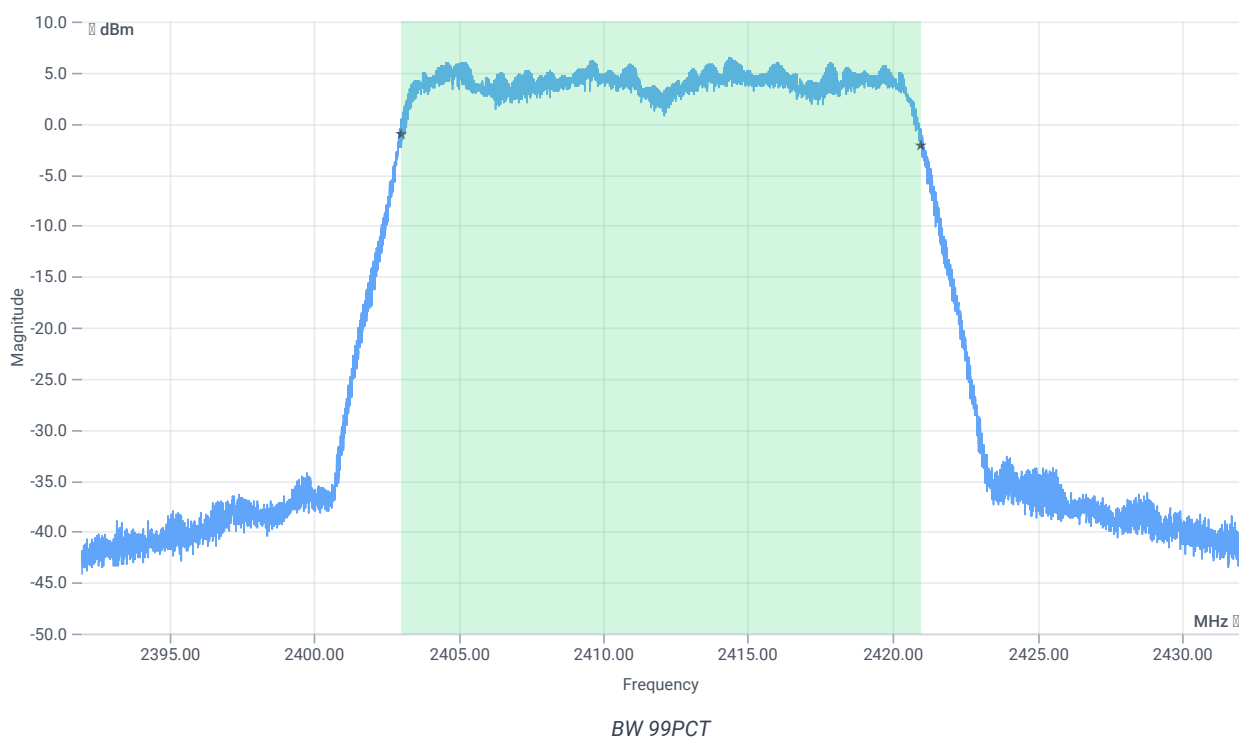


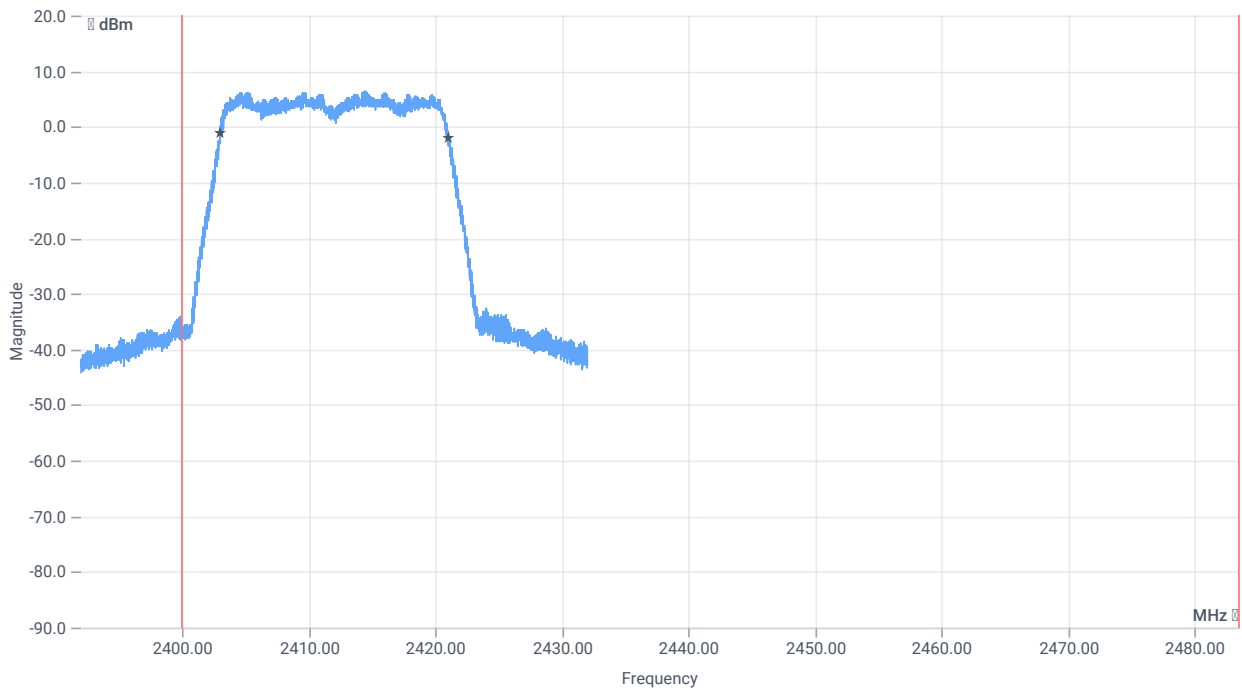


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17958.000	kHz	INFO
T1 99%	2400.000000	---	2403.0249	MHz	PASS
T2 99%	---	2483.500000	2420.9831	MHz	PASS

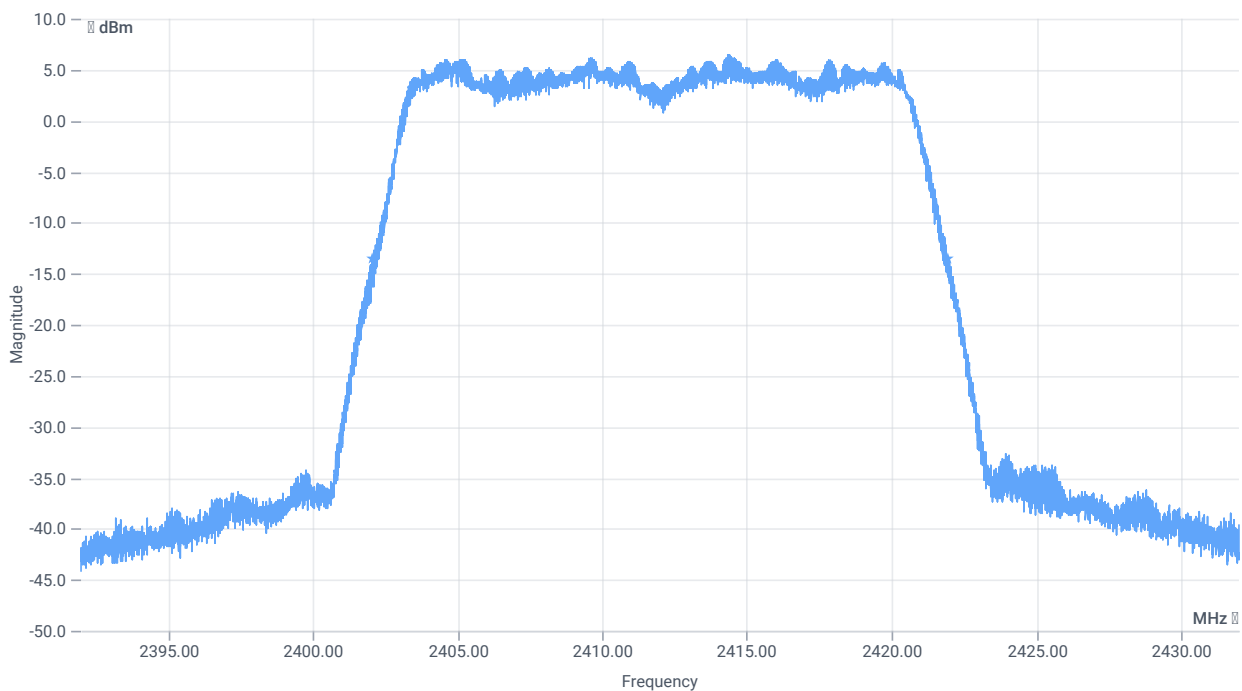

BW 20dB

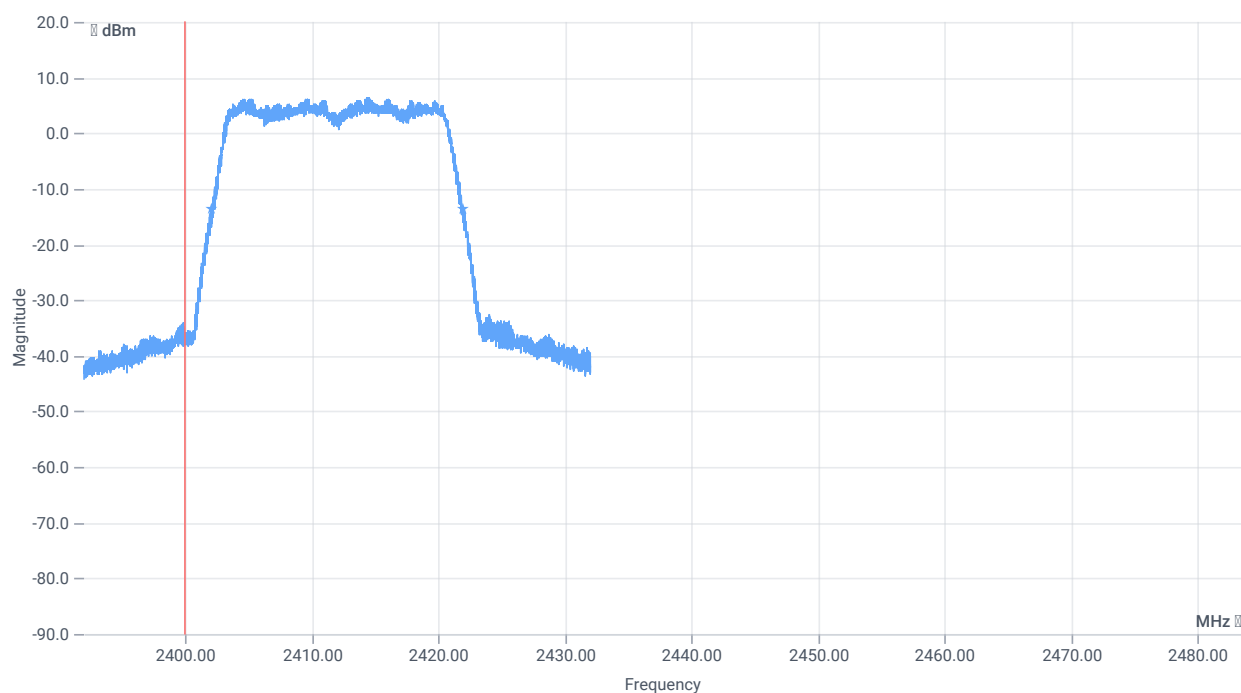

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19884	kHz	INFO
T1 20dB	2400.000000	---	2402.0840	MHz	PASS
T2 20dB	---	2483.500000	2421.9680	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 19:28:38
Ambit temp [°C] humidity [rel%]	23.7 31
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.08	dBm	INFO
Ref. frequency	---	---	2419.090	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.08 8.32 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

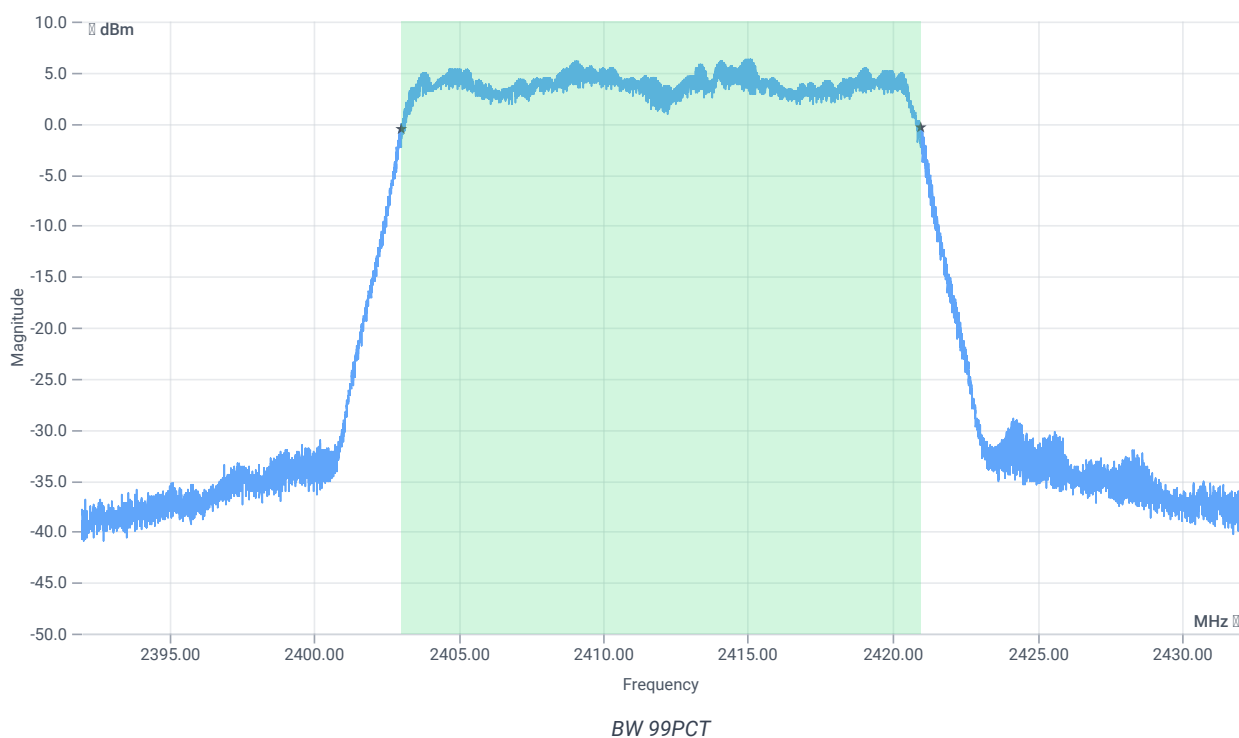


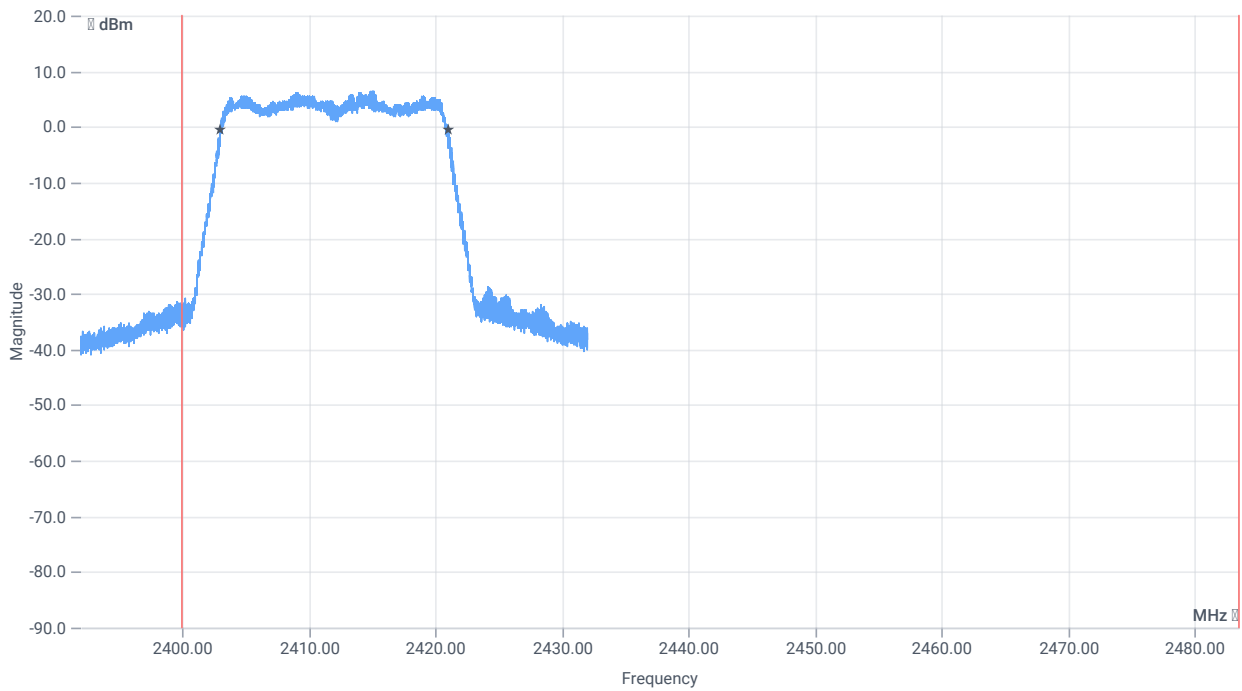


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17970.000	kHz	INFO
T1 99%	2400.000000	---	2403.0089	MHz	PASS
T2 99%	---	2483.500000	2420.9791	MHz	PASS

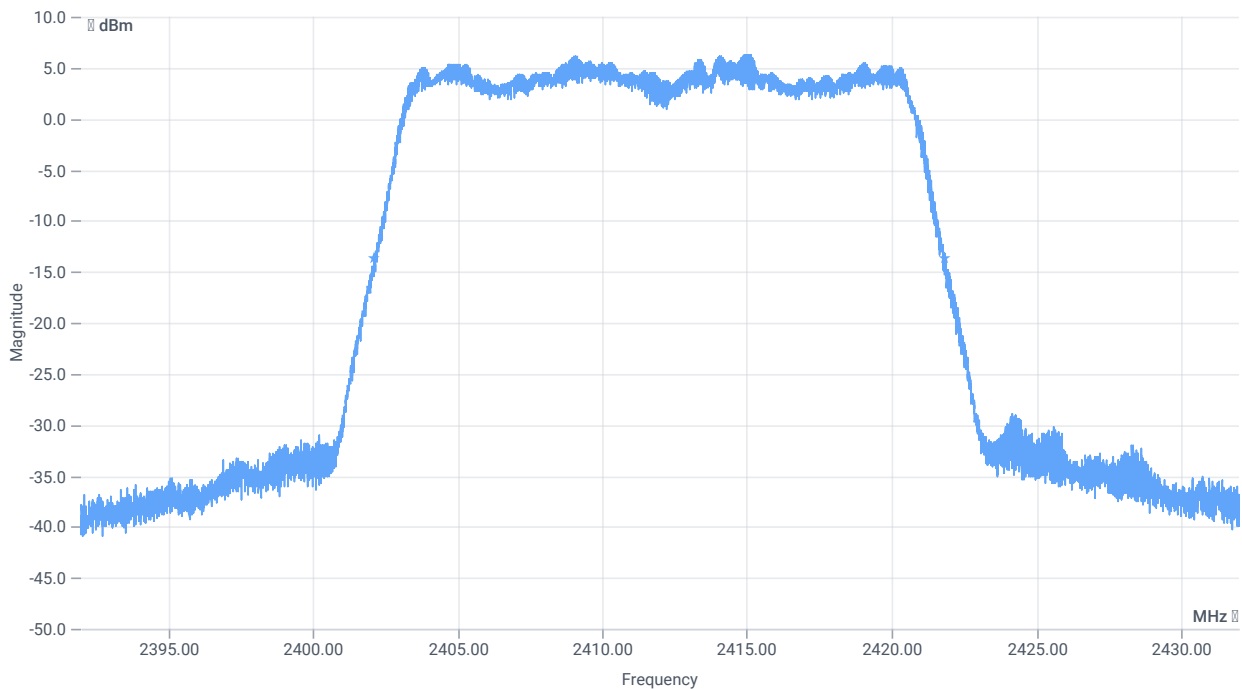

BW 20dB

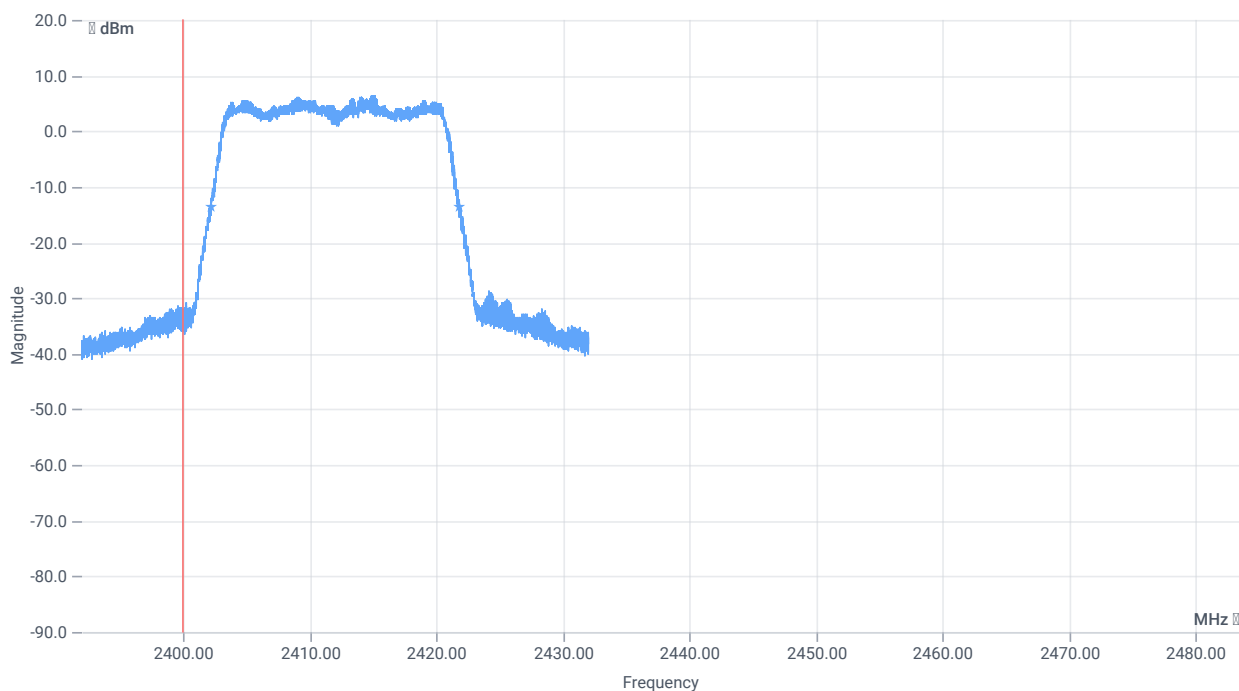

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19720	kHz	INFO
T1 20dB	2400.000000	---	2402.1320	MHz	PASS
T2 20dB	---	2483.500000	2421.8520	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 19:44:46
Ambit temp [°C] humidity [rel%]	23.7 31
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.94	dBm	INFO
Ref. frequency	---	---	2433.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.94 8.3 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

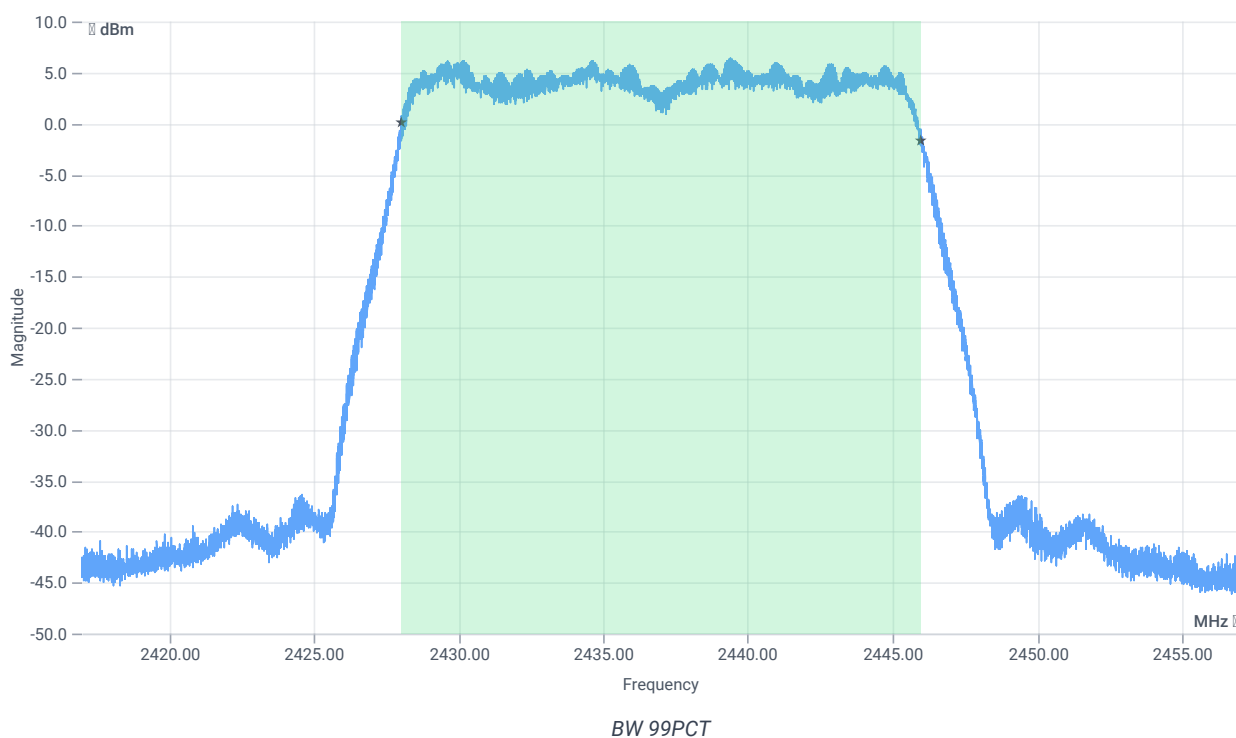


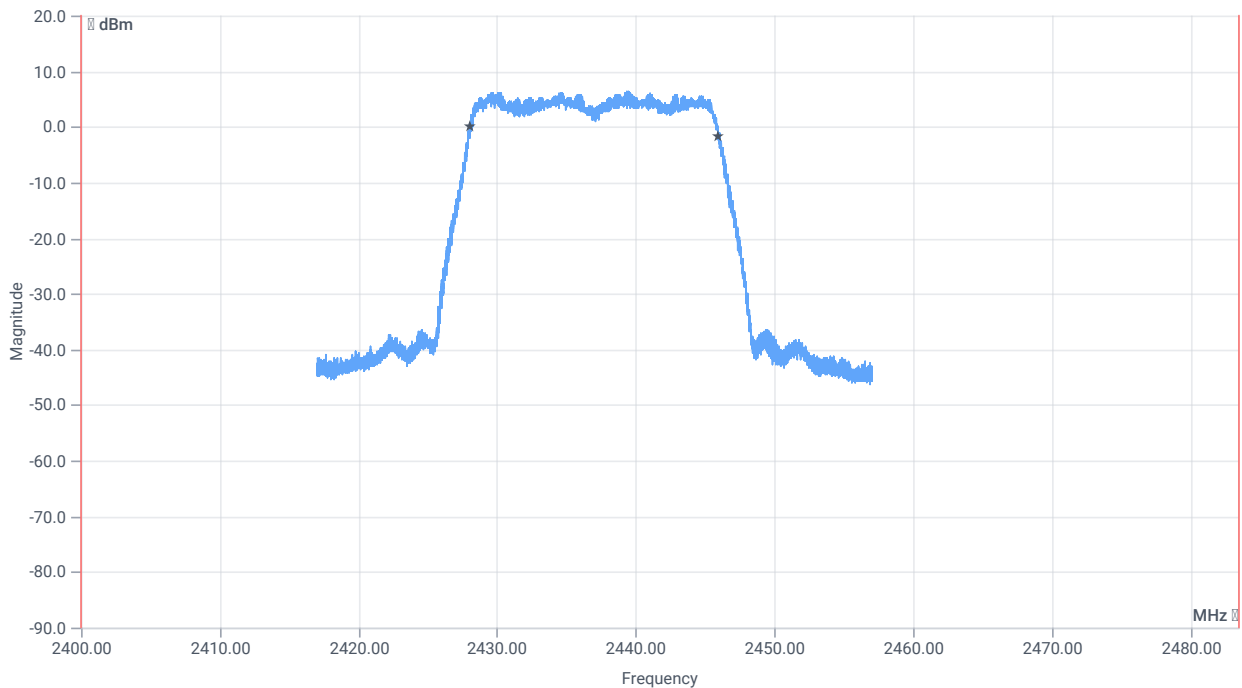


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17962.000	kHz	INFO
T1 99%	2400.000000	---	2428.0169	MHz	PASS
T2 99%	---	2483.500000	2445.9791	MHz	PASS

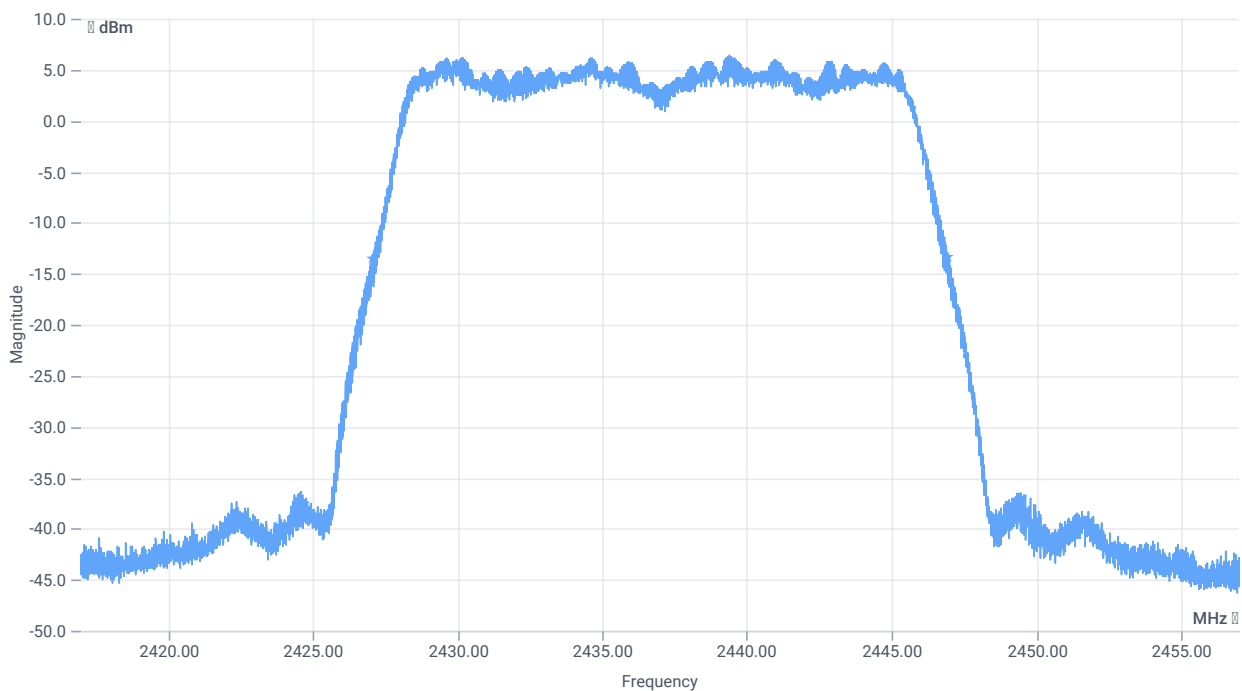

BW 20dB

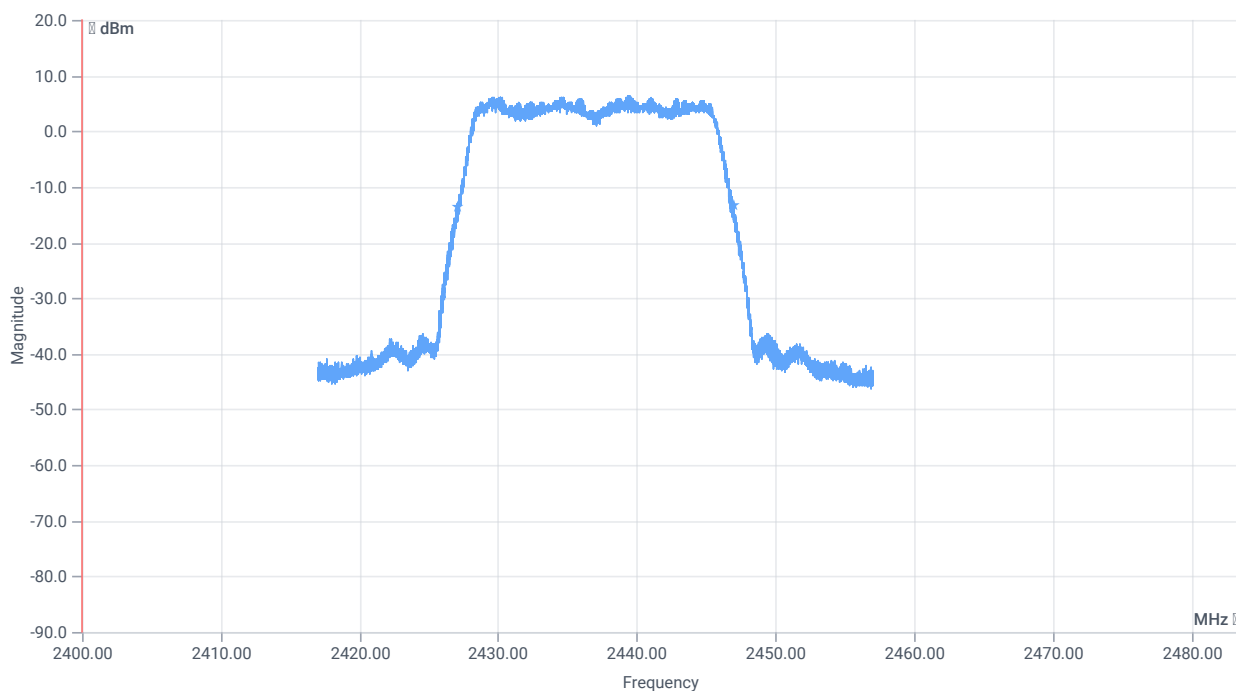

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19880	kHz	INFO
T1 20dB	2400.000000	---	2427.0640	MHz	PASS
T2 20dB	---	2483.500000	2446.9440	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 20:00:46
Ambit temp [°C] humidity [rel%]	23.6 32
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.86	dBm	INFO
Ref. frequency	---	---	2434.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.86 8.33 20
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

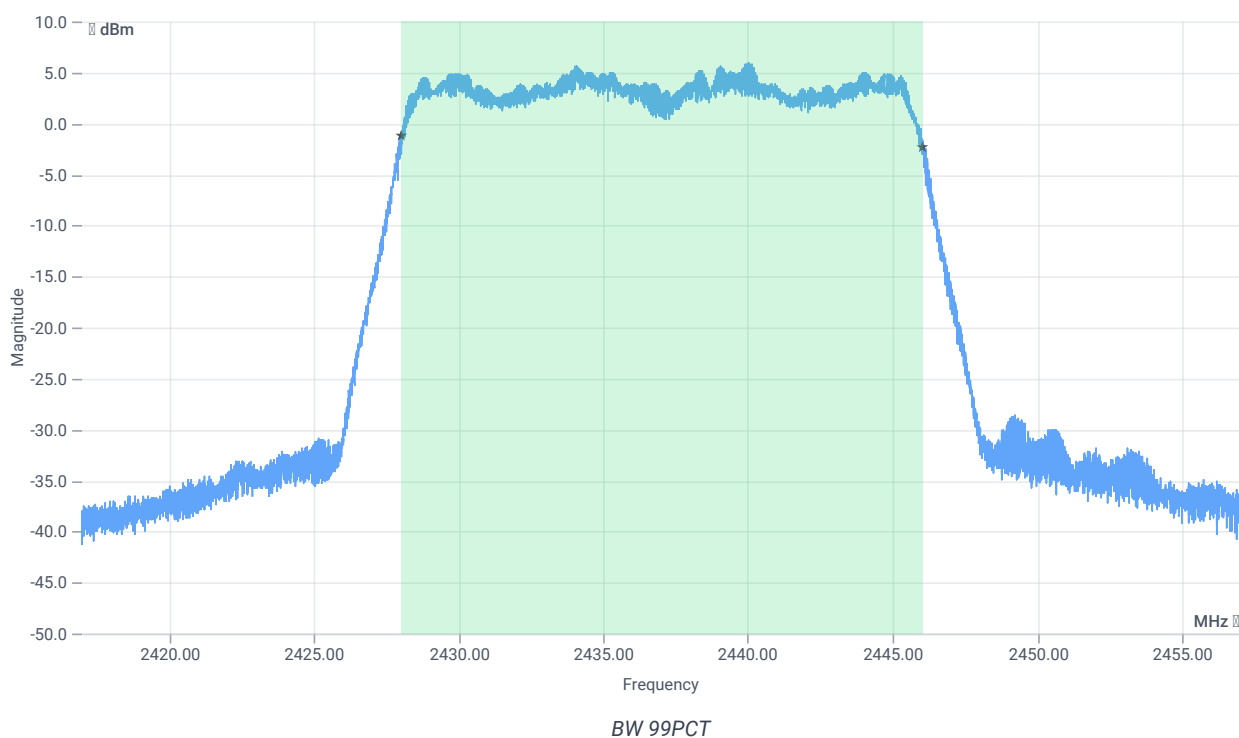


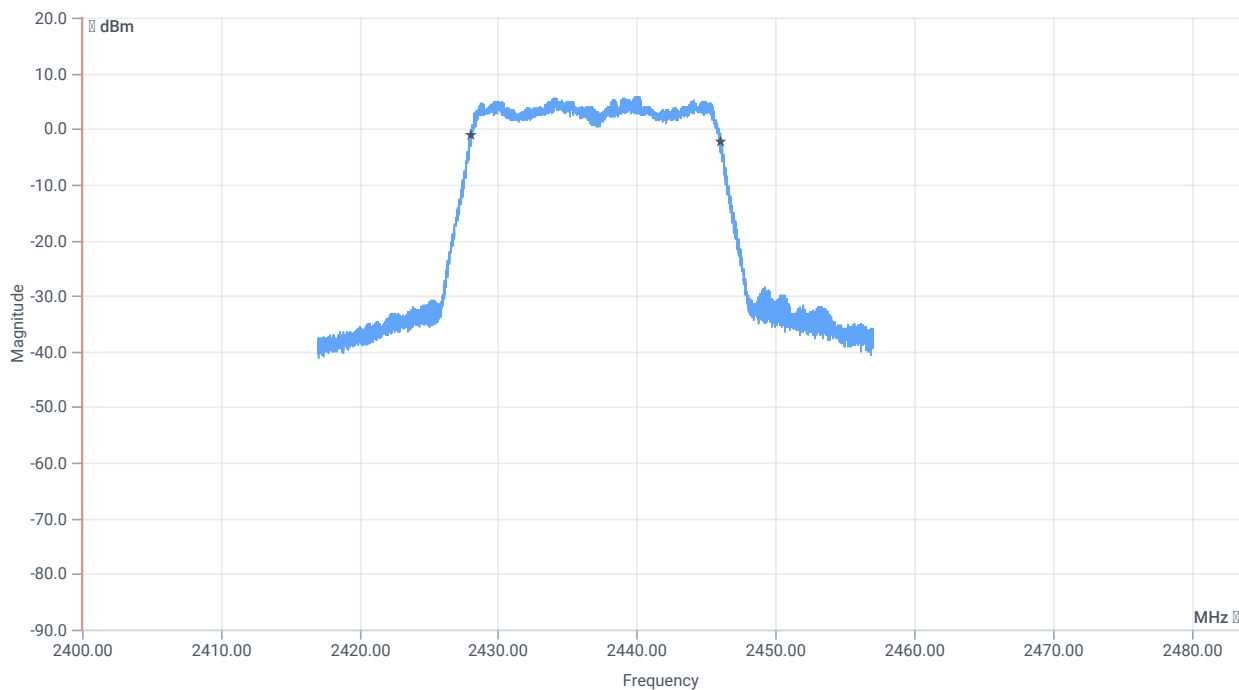


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17998.000	kHz	INFO
T1 99%	2400.000000	---	2428.0049	MHz	PASS
T2 99%	---	2483.500000	2446.0031	MHz	PASS

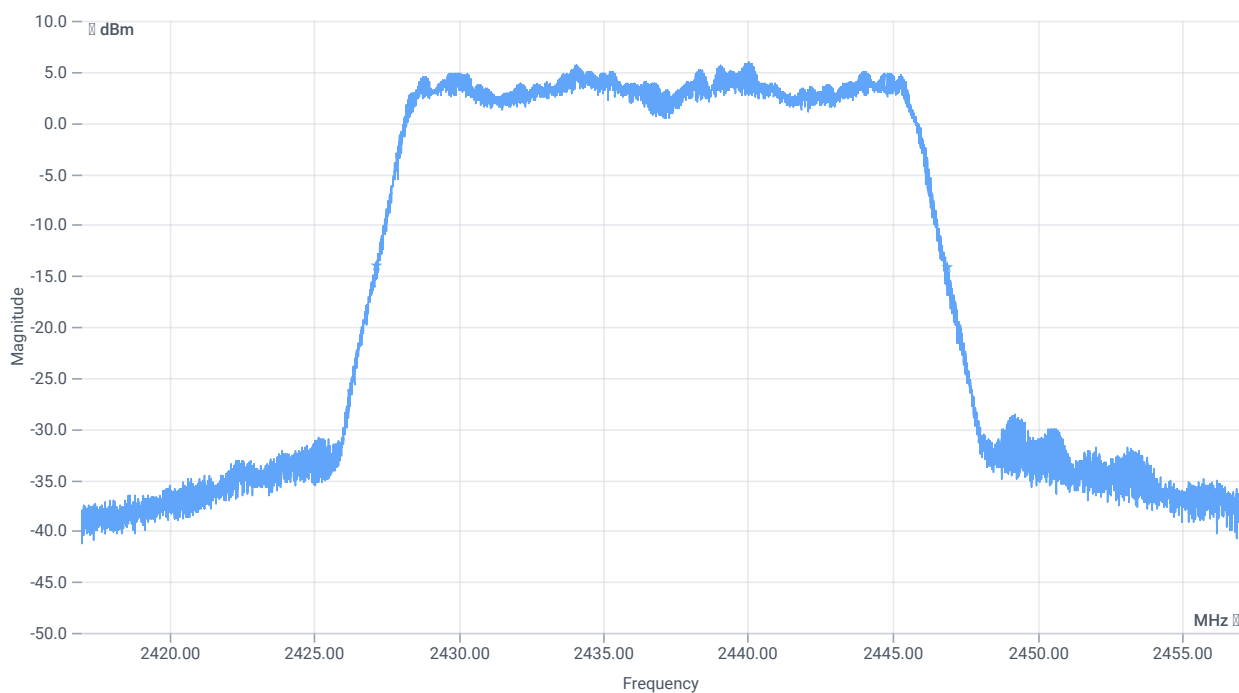

BW 20dB

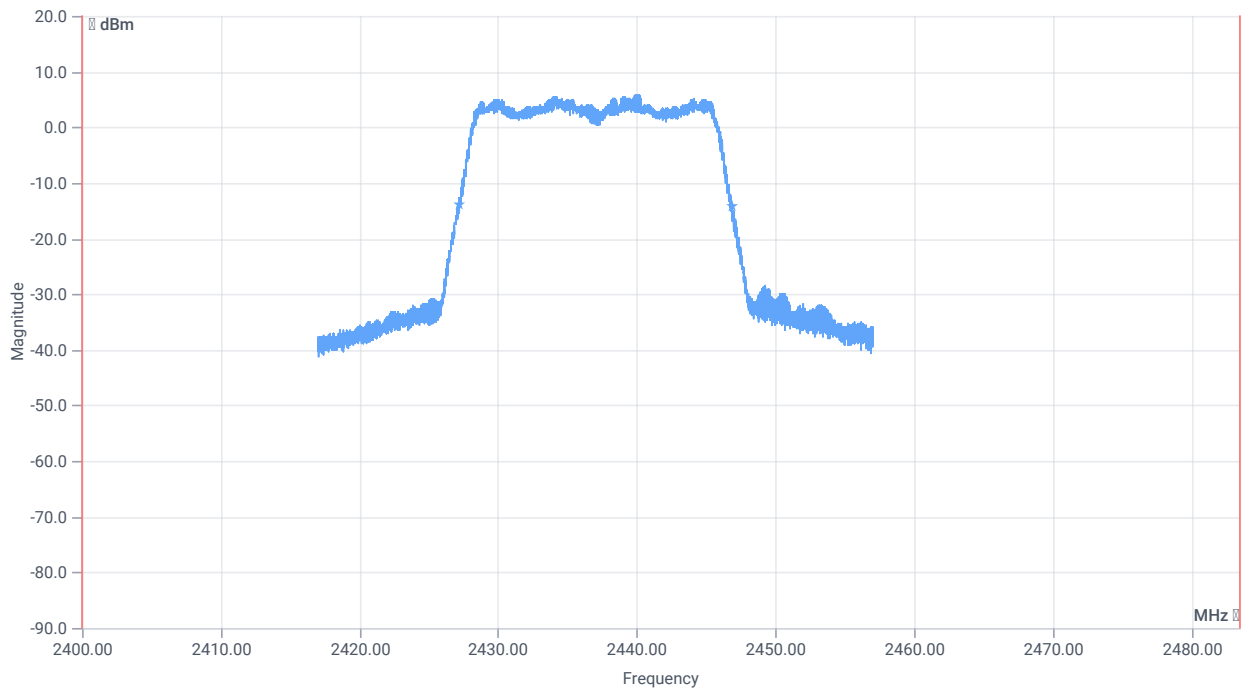

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19708	kHz	INFO
T1 20dB	2400.000000	---	2427.1560	MHz	PASS
T2 20dB	---	2483.500000	2446.8640	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 20:16:54
Ambit temp [°C] humidity [rel%]	23.5 32
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.92	dBm	INFO
Ref. frequency	---	---	2454.910	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.92 8.34 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

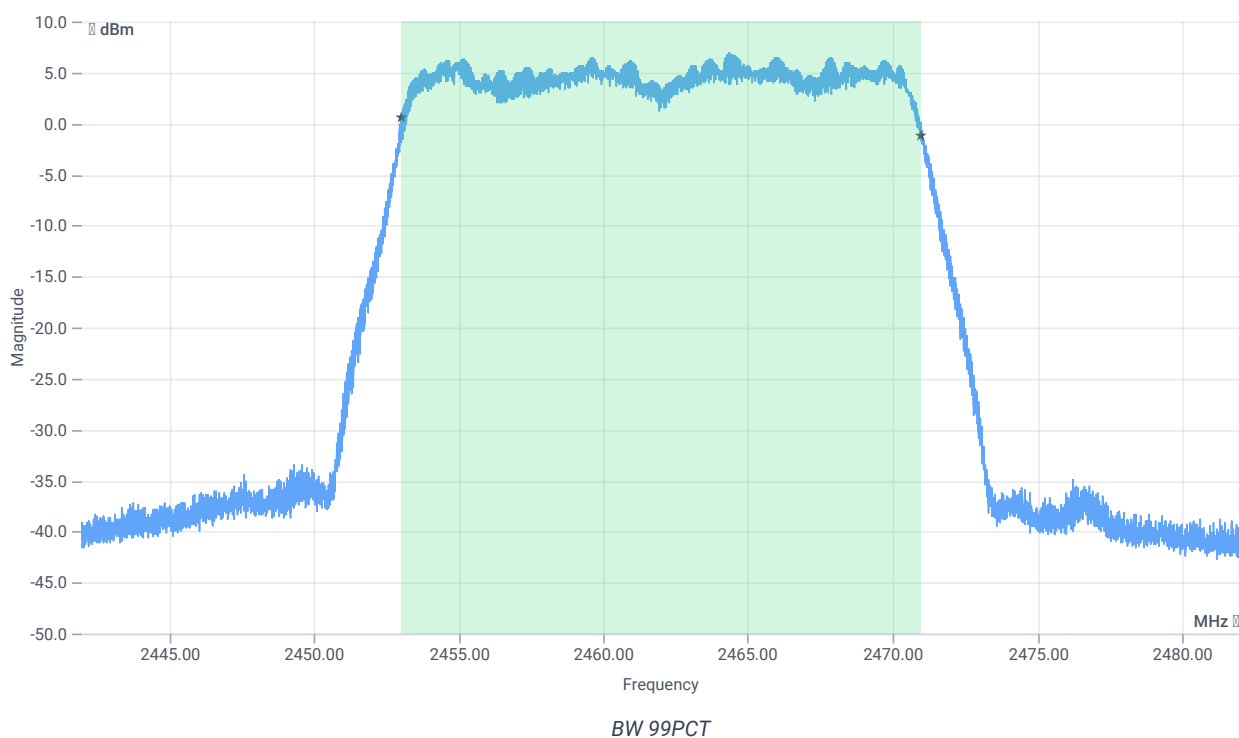


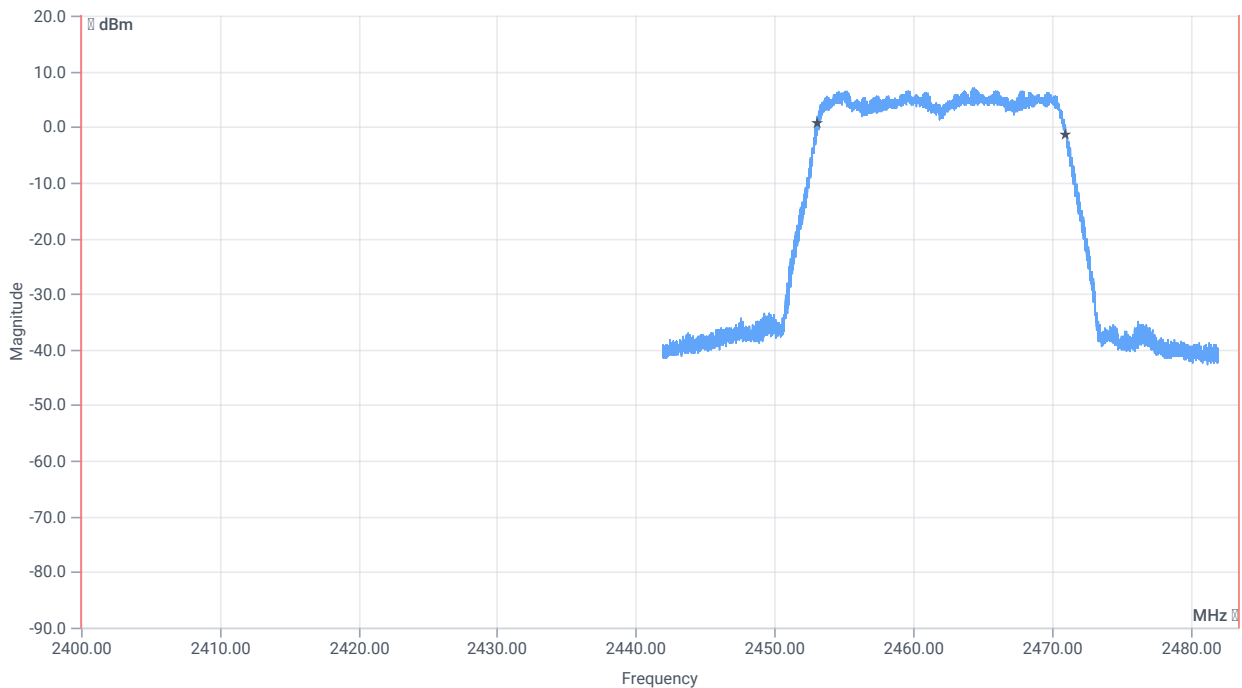


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17962.000	kHz	INFO
T1 99%	2400.000000	---	2453.0369	MHz	PASS
T2 99%	---	2483.500000	2470.9991	MHz	PASS

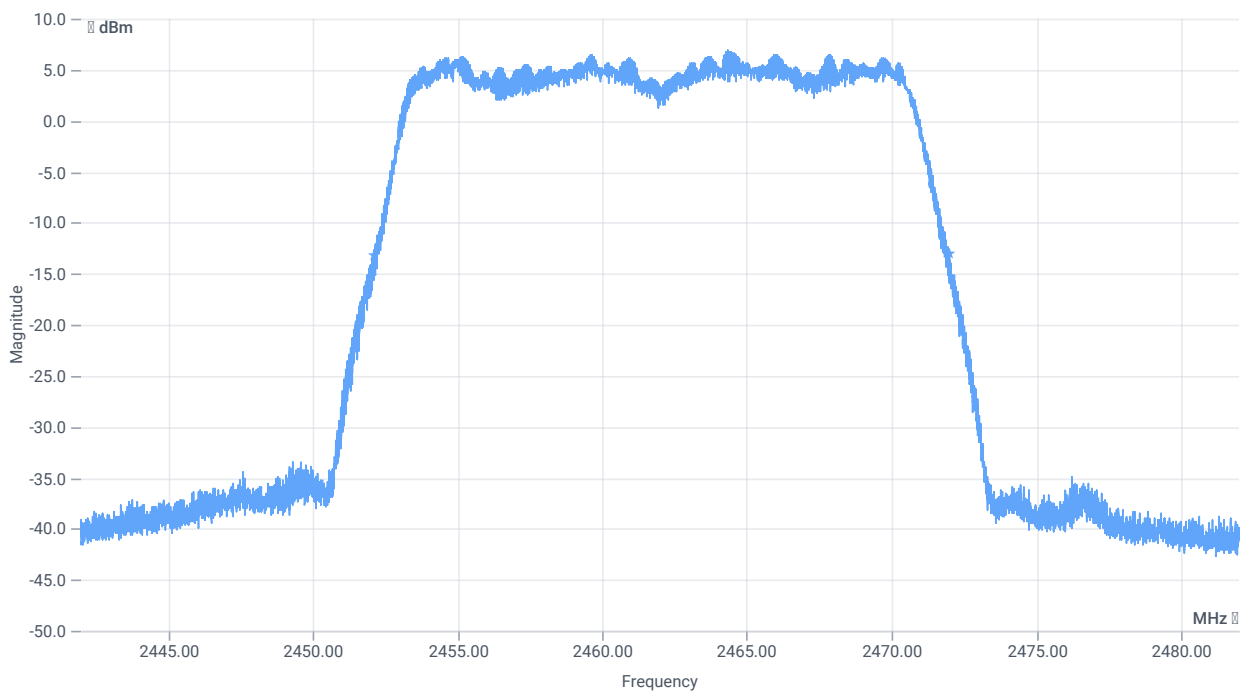

BW 20dB

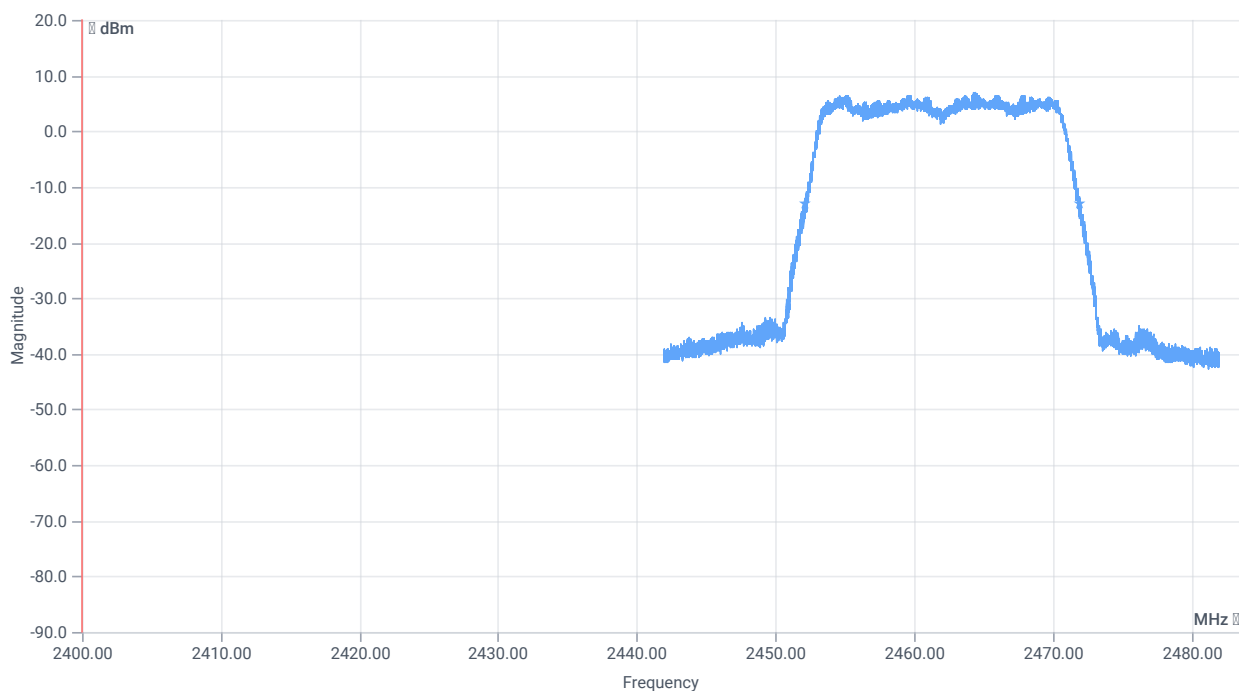

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19880	kHz	INFO
T1 20dB	2400.000000	---	2452.1000	MHz	PASS
T2 20dB	---	2483.500000	2471.9800	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 20:32:55
Ambit temp [°C] humidity [rel%]	23.6 32
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.51	dBm	INFO
Ref. frequency	---	---	2459.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.51 8.37 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

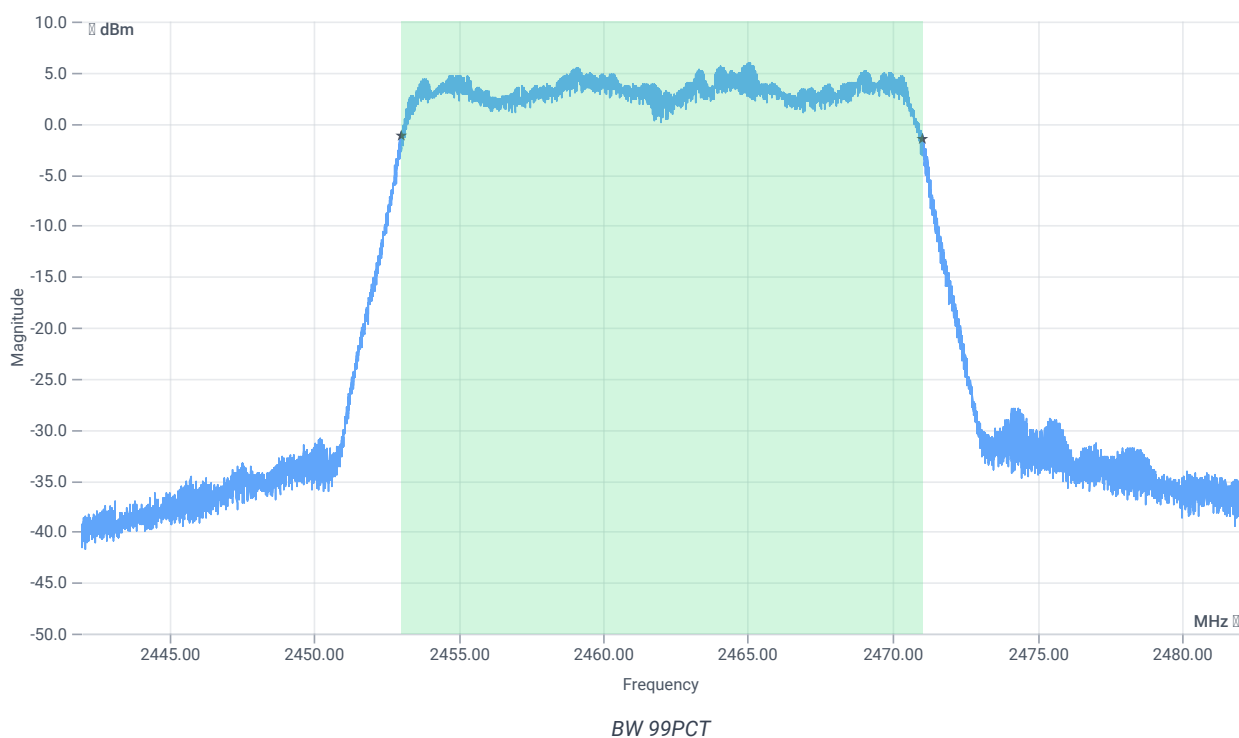


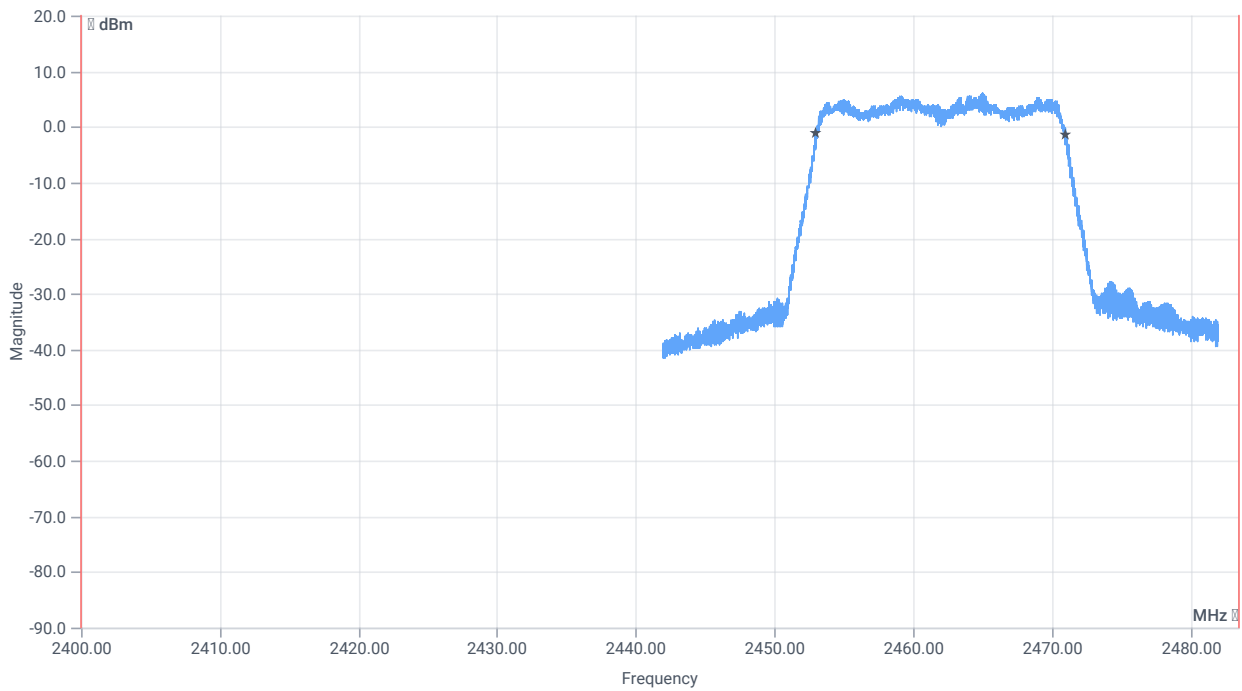


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17990.000	kHz	INFO
T1 99%	2400.000000	---	2453.0209	MHz	PASS
T2 99%	---	2483.500000	2471.0111	MHz	PASS

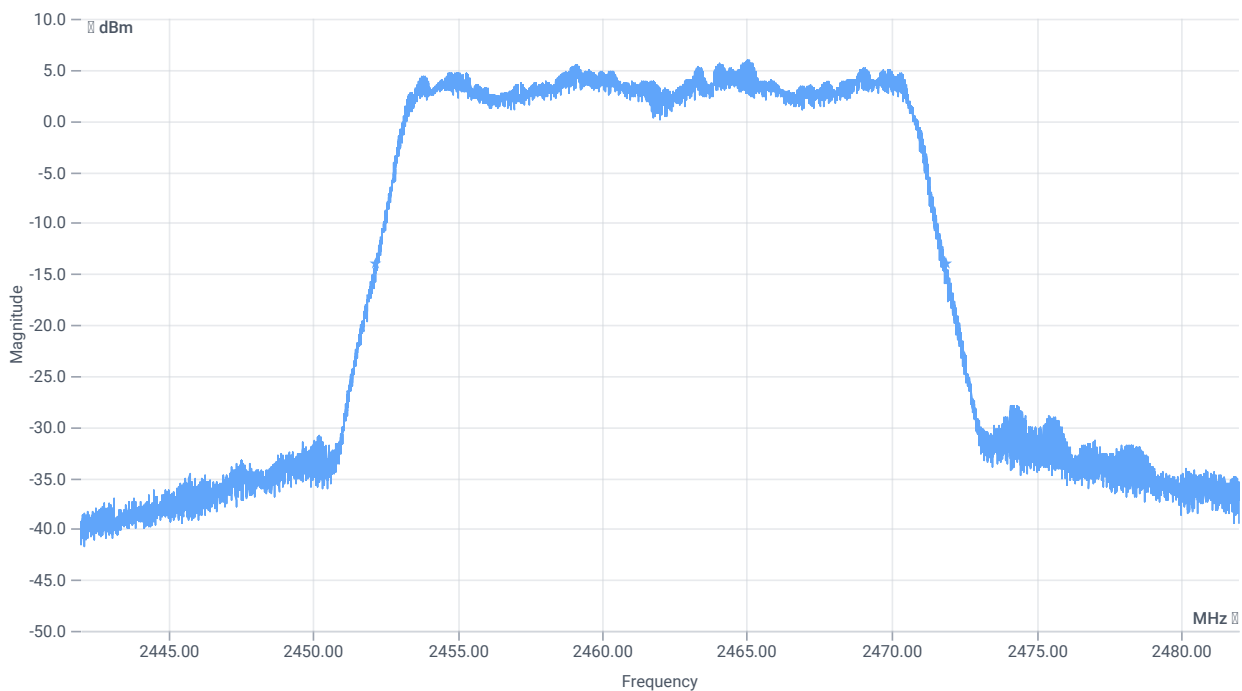

BW 20dB

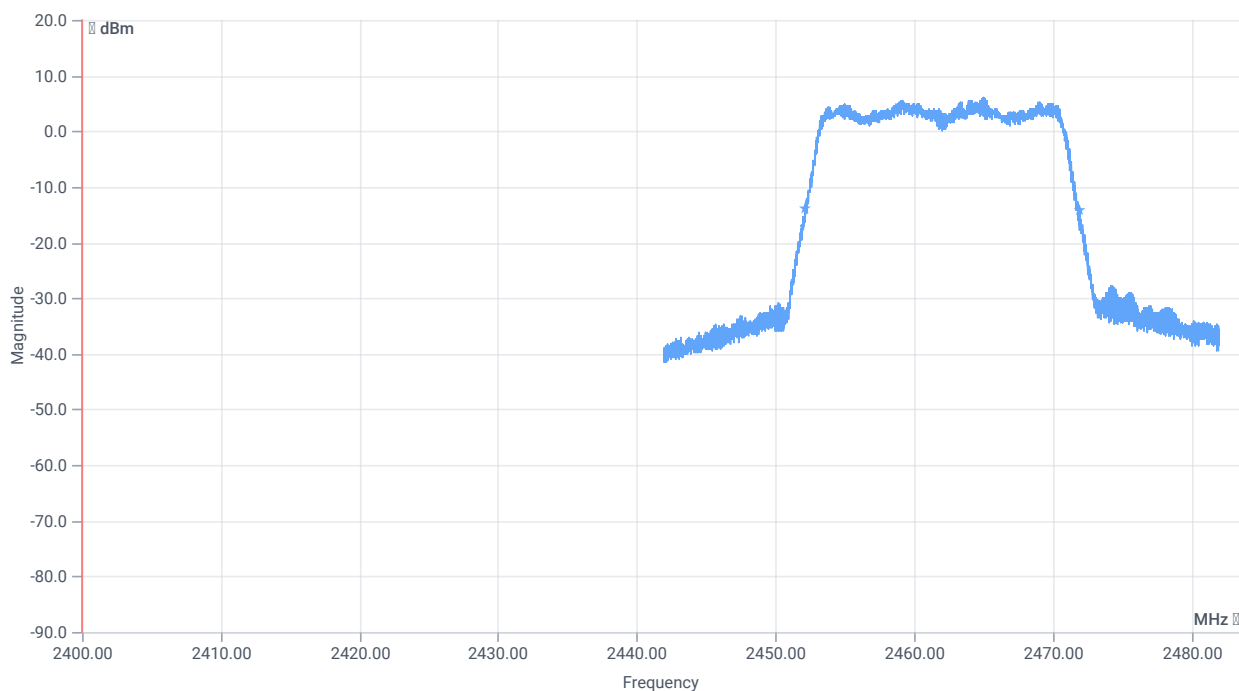

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19716	kHz	INFO
T1 20dB	2400.000000	---	2452.1640	MHz	PASS
T2 20dB	---	2483.500000	2471.8800	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 20:49:02
Ambit temp [°C] humidity [rel%]	23.5 33
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2422 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.51	dBm	INFO
Ref. frequency	---	---	2436.590	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.51 8.28 20
Start [MHz] Stop [MHz]	2382.000 2462.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

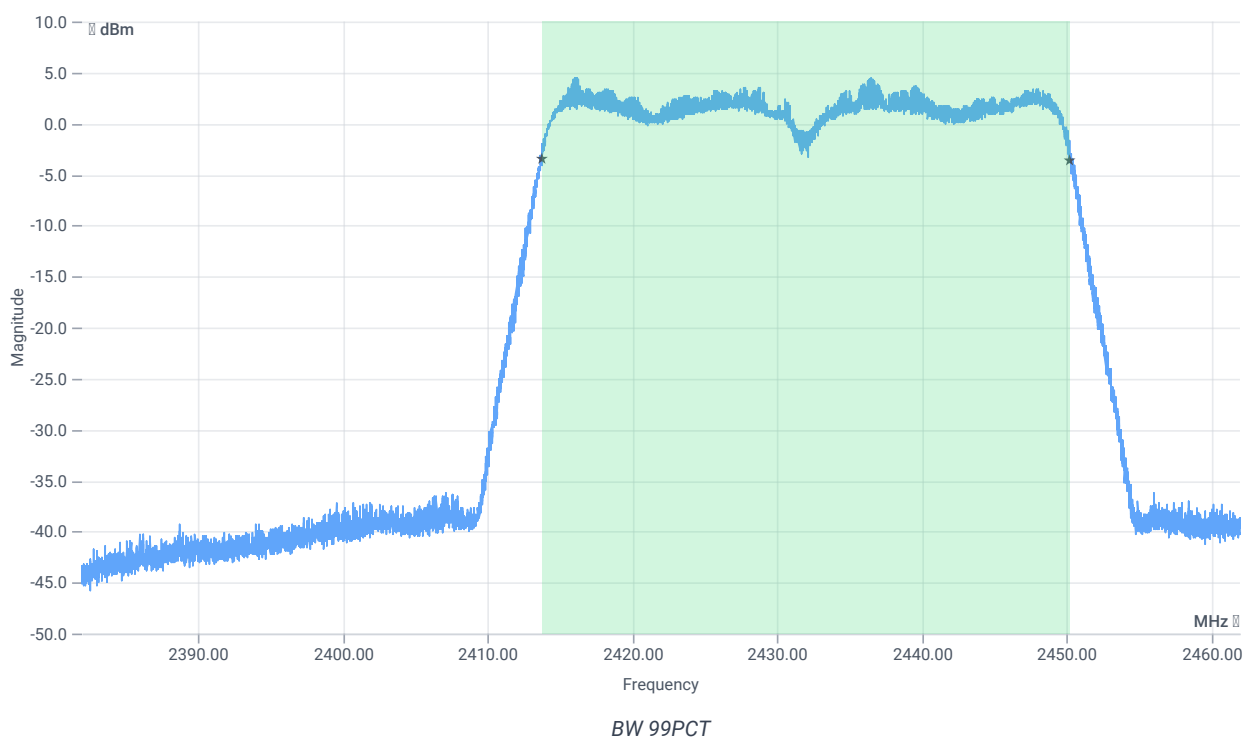


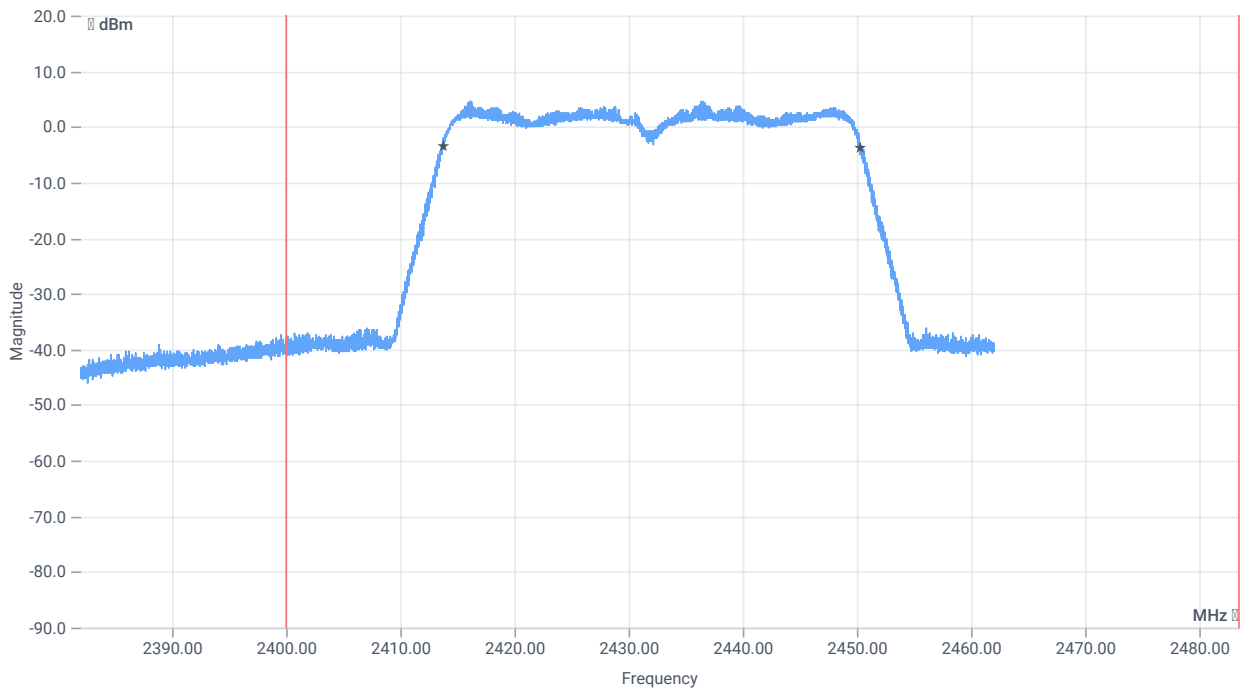


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36556.000	kHz	INFO
T1 99%	2400.000000	---	2413.7208	MHz	PASS
T2 99%	---	2483.500000	2450.2772	MHz	PASS

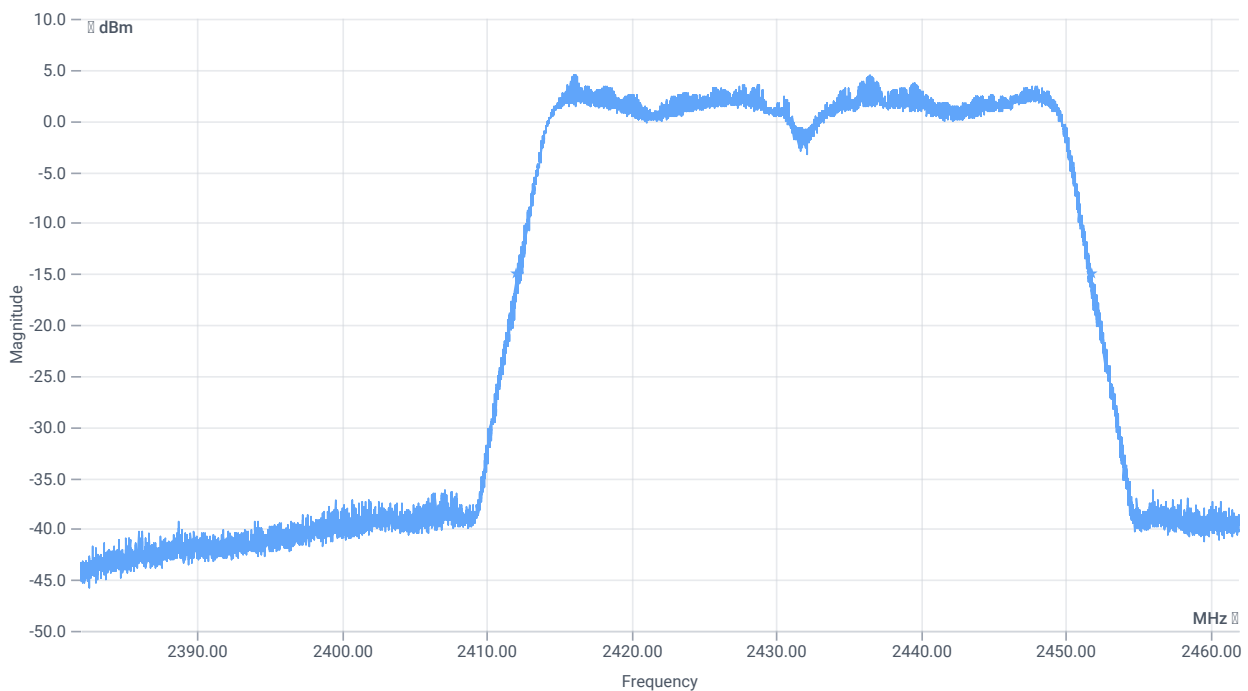

BW 20dB

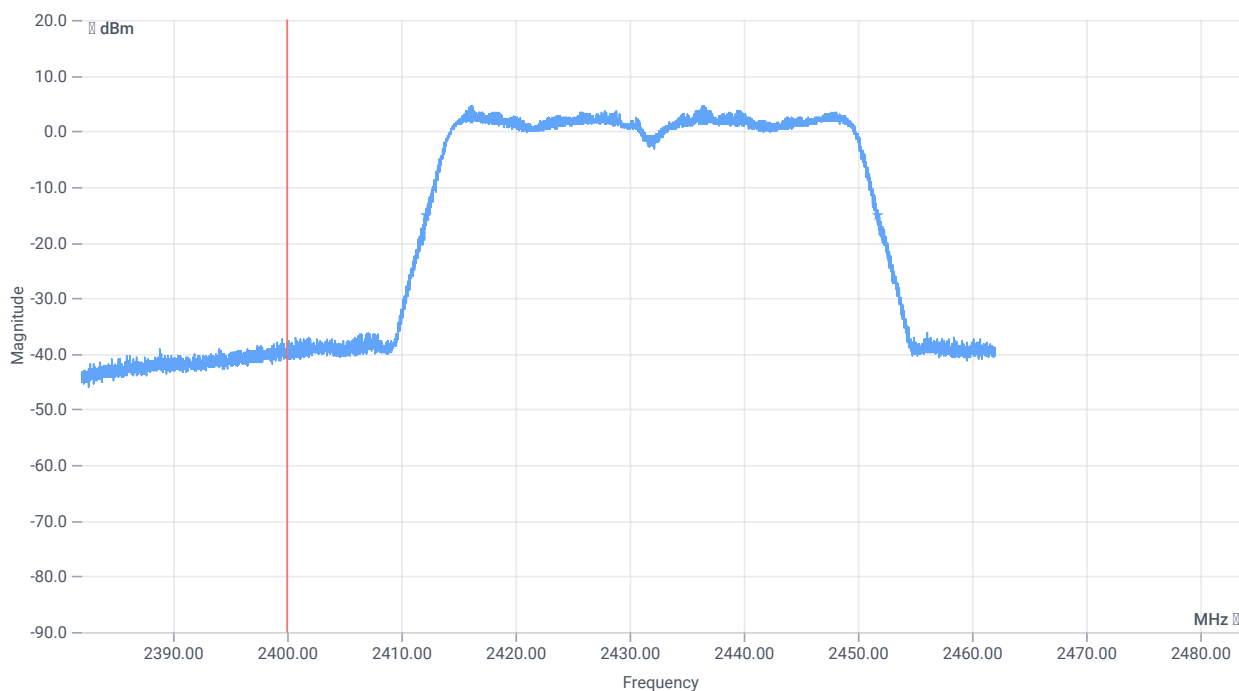

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	39704	kHz	INFO
T1 20dB	2400.000000	---	2412.0960	MHz	PASS
T2 20dB	---	2483.500000	2451.8000	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:05:01
Ambit temp [°C] humidity [rel%]	23.5 33
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2422 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.71	dBm	INFO
Ref. frequency	---	---	2418.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.71 8.32 15
Start [MHz] Stop [MHz]	2382.000 2462.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

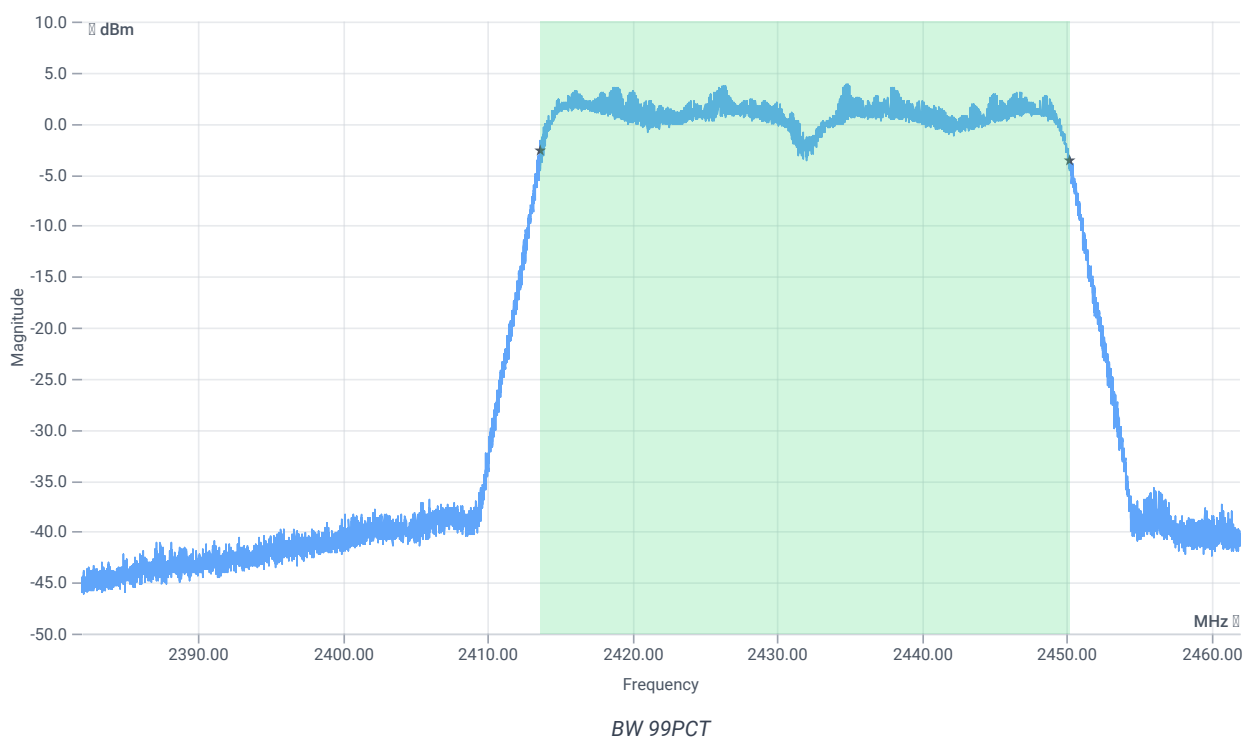


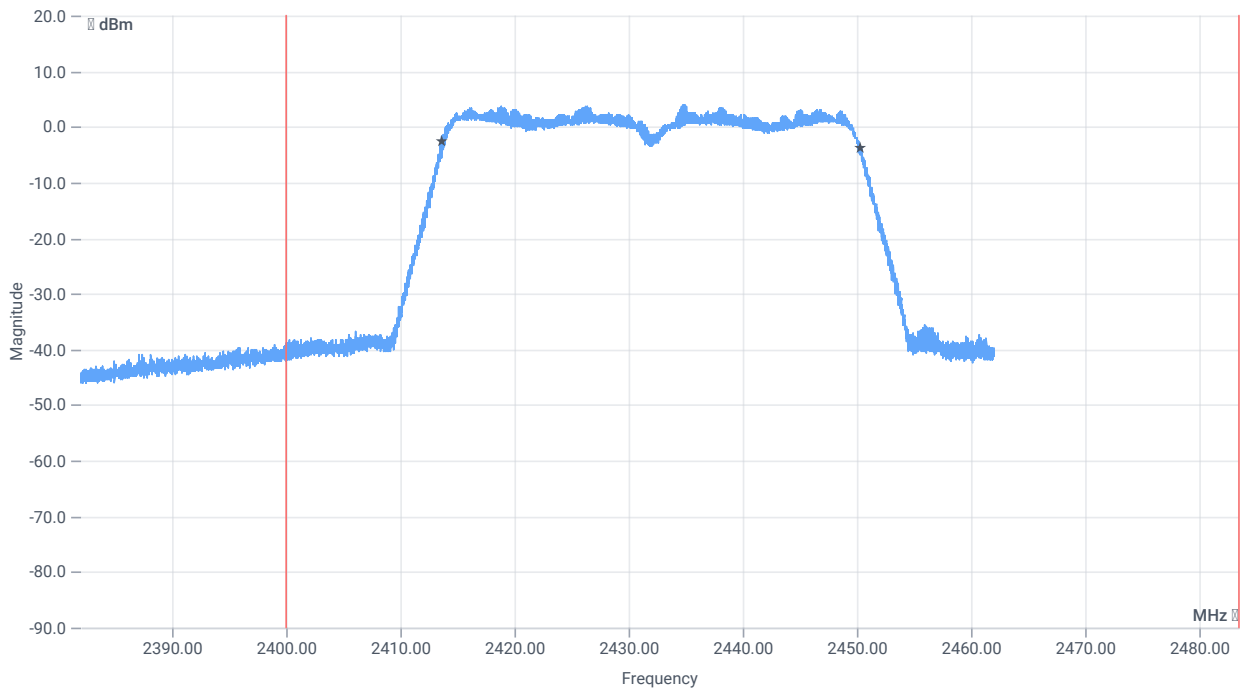


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36652.000	kHz	INFO
T1 99%	2400.000000	---	2413.6168	MHz	PASS
T2 99%	---	2483.500000	2450.2692	MHz	PASS

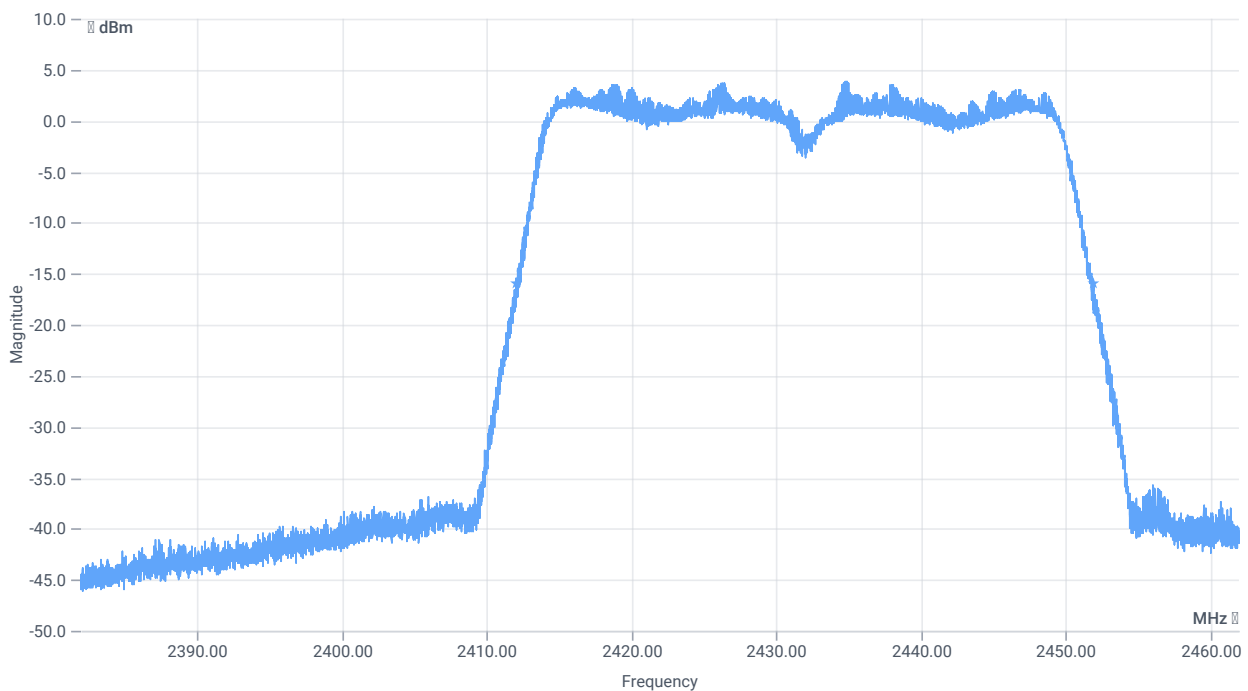

BW 20dB

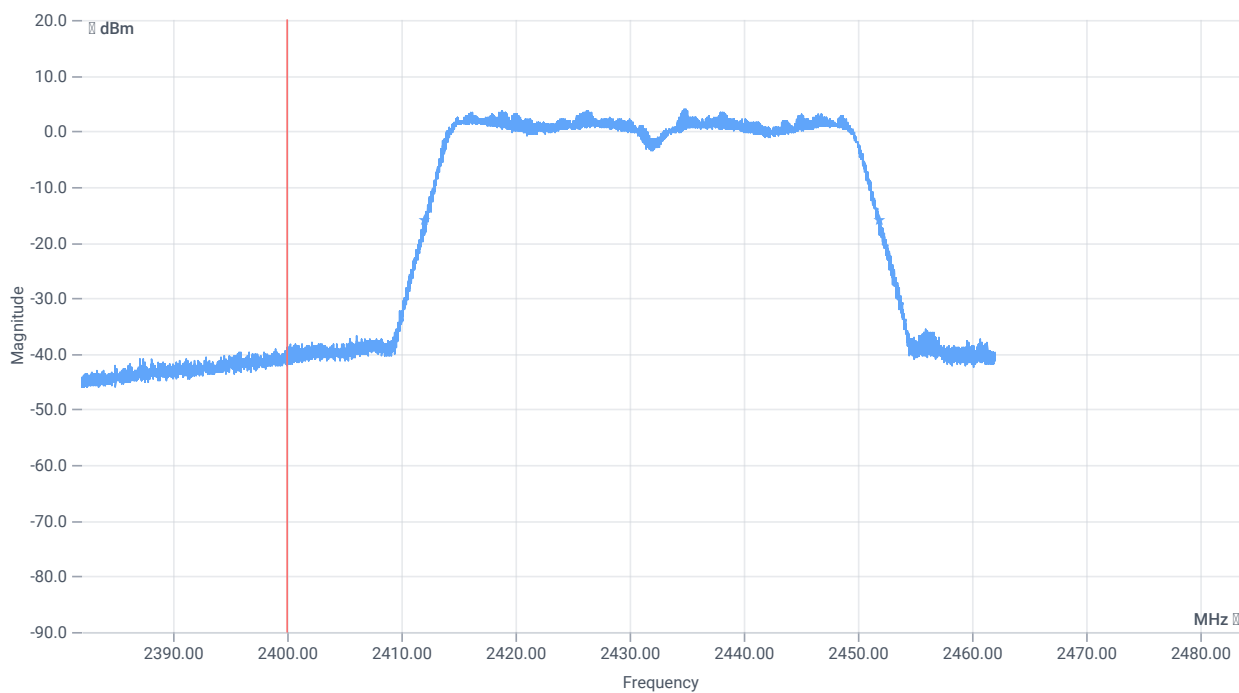

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	39880	kHz	INFO
T1 20dB	2400.000000	---	2412.0400	MHz	PASS
T2 20dB	---	2483.500000	2451.9200	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:21:08
Ambit temp [°C] humidity [rel%]	23.1 33
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.84	dBm	INFO
Ref. frequency	---	---	2463.070	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.84 8.3 20
Start [MHz] Stop [MHz]	2397.000 2477.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

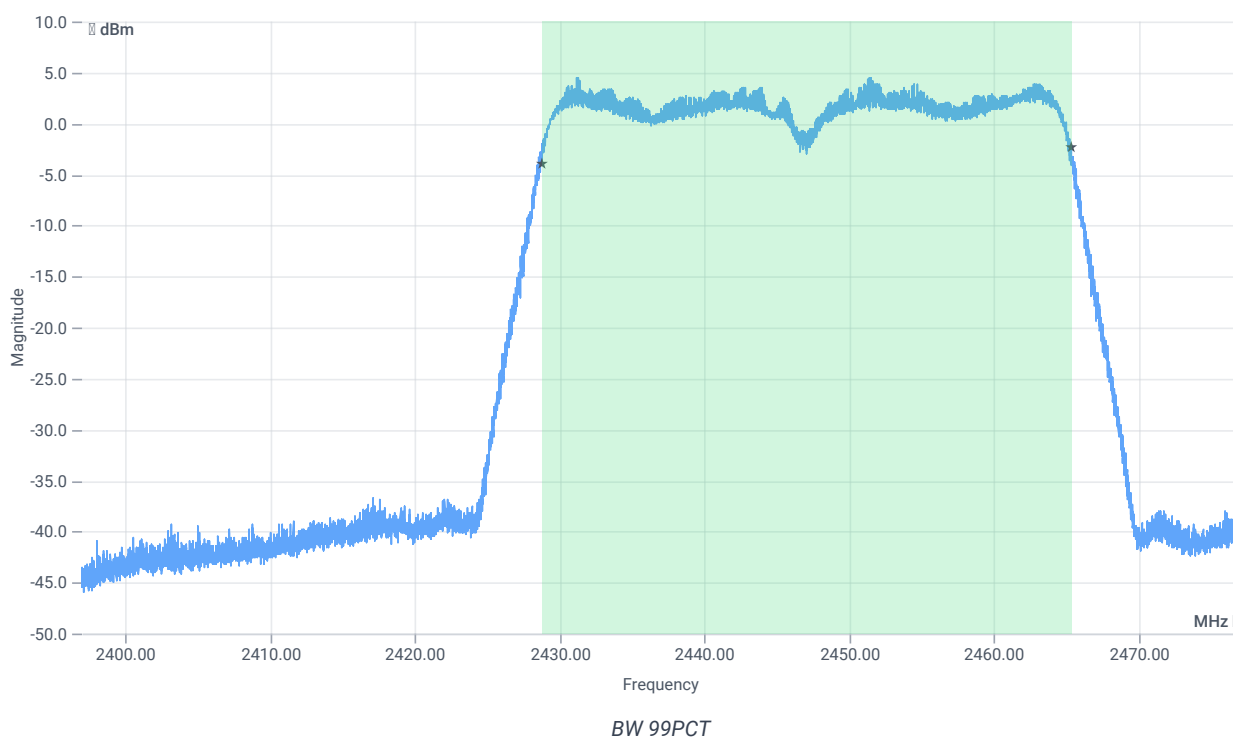


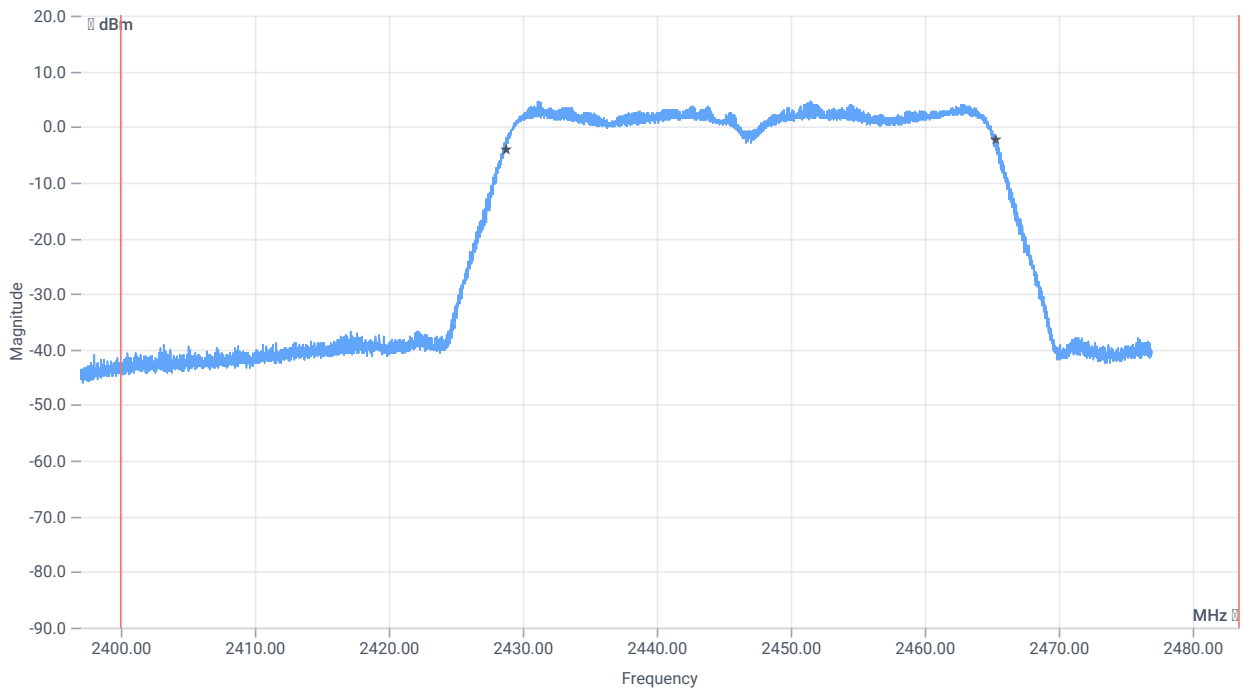


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36596.000	kHz	INFO
T1 99%	2400.000000	---	2428.7208	MHz	PASS
T2 99%	---	2483.500000	2465.3172	MHz	PASS

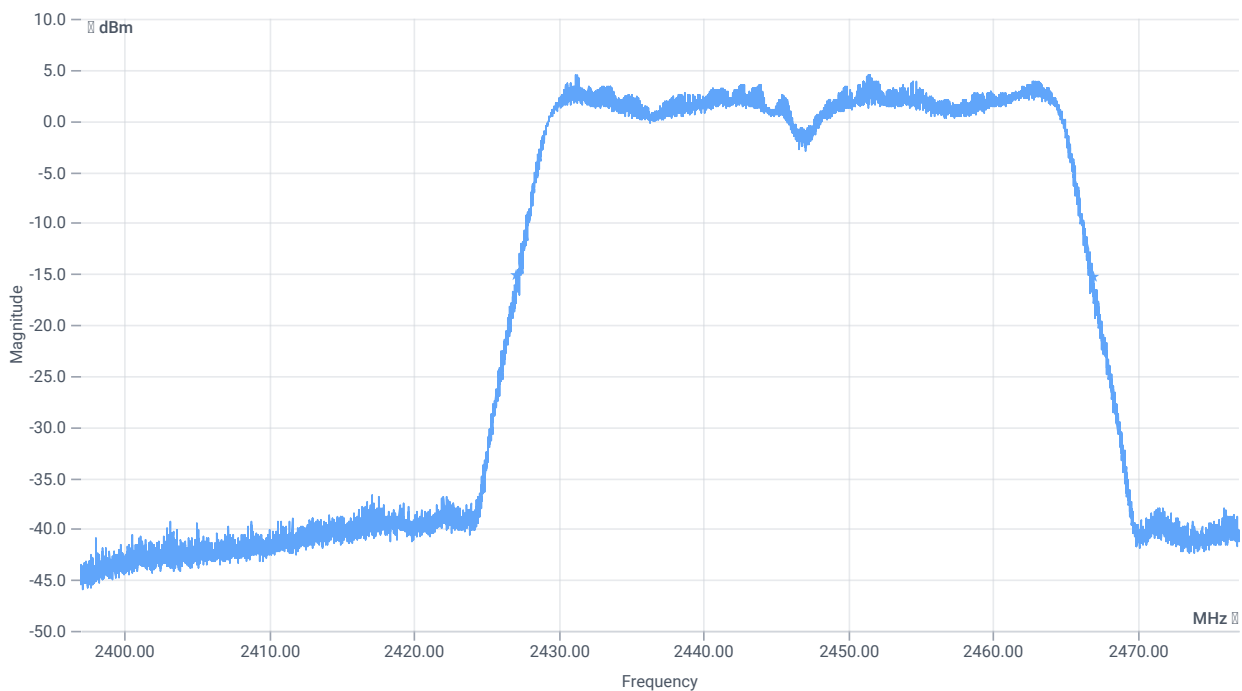

BW 20dB

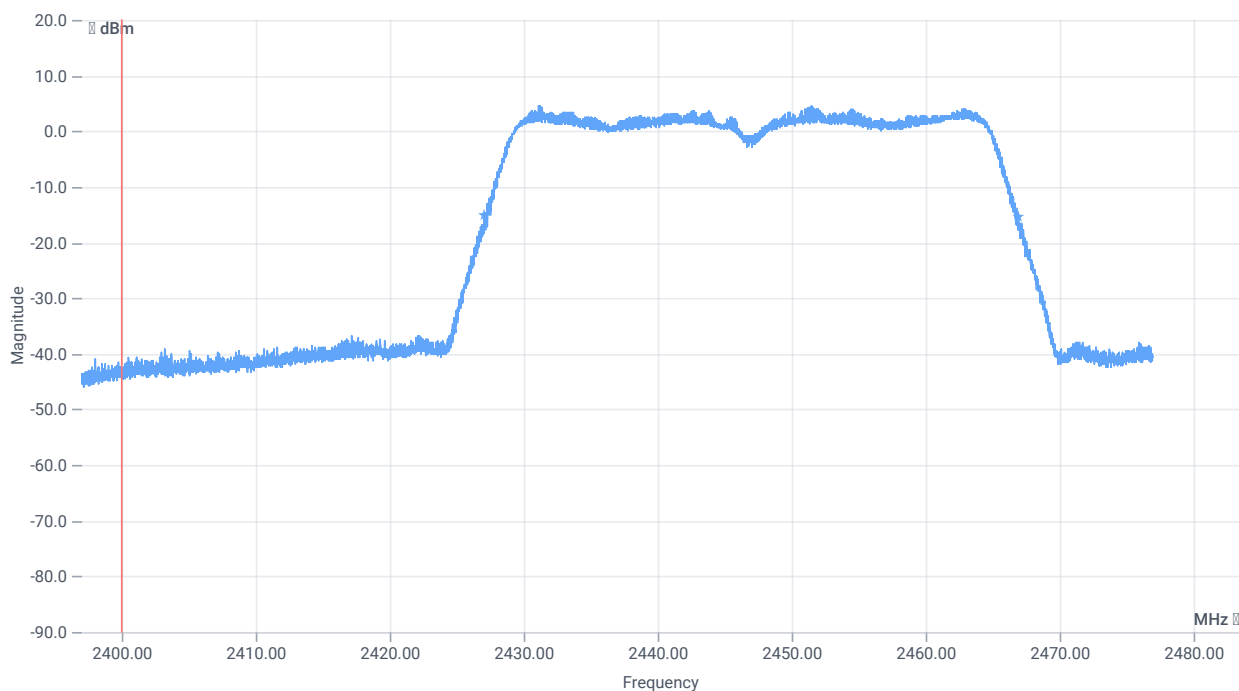

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	39896	kHz	INFO
T1 20dB	2400.000000	---	2427.0720	MHz	PASS
T2 20dB	---	2483.500000	2466.9680	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:37:08
Ambit temp [°C] humidity [rel%]	22.6 34
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.57	dBm	INFO
Ref. frequency	---	---	2453.280	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.57 8.33 15
Start [MHz] Stop [MHz]	2397.000 2477.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

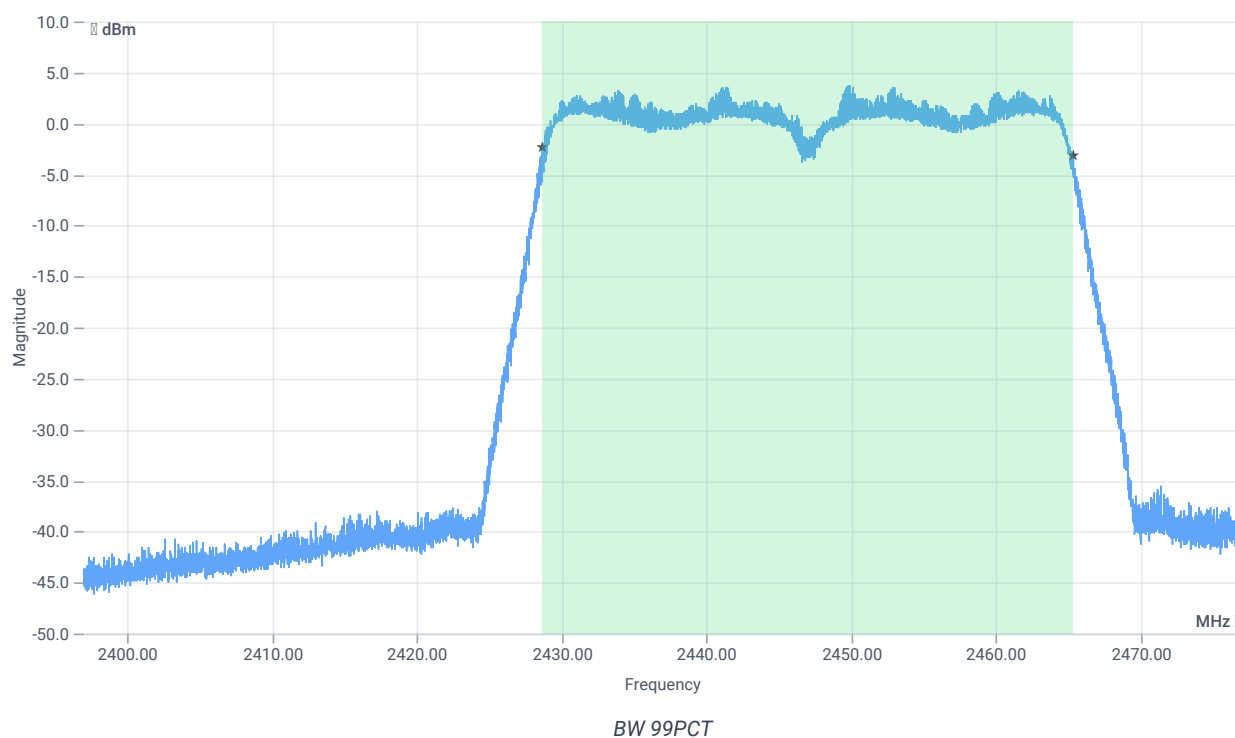


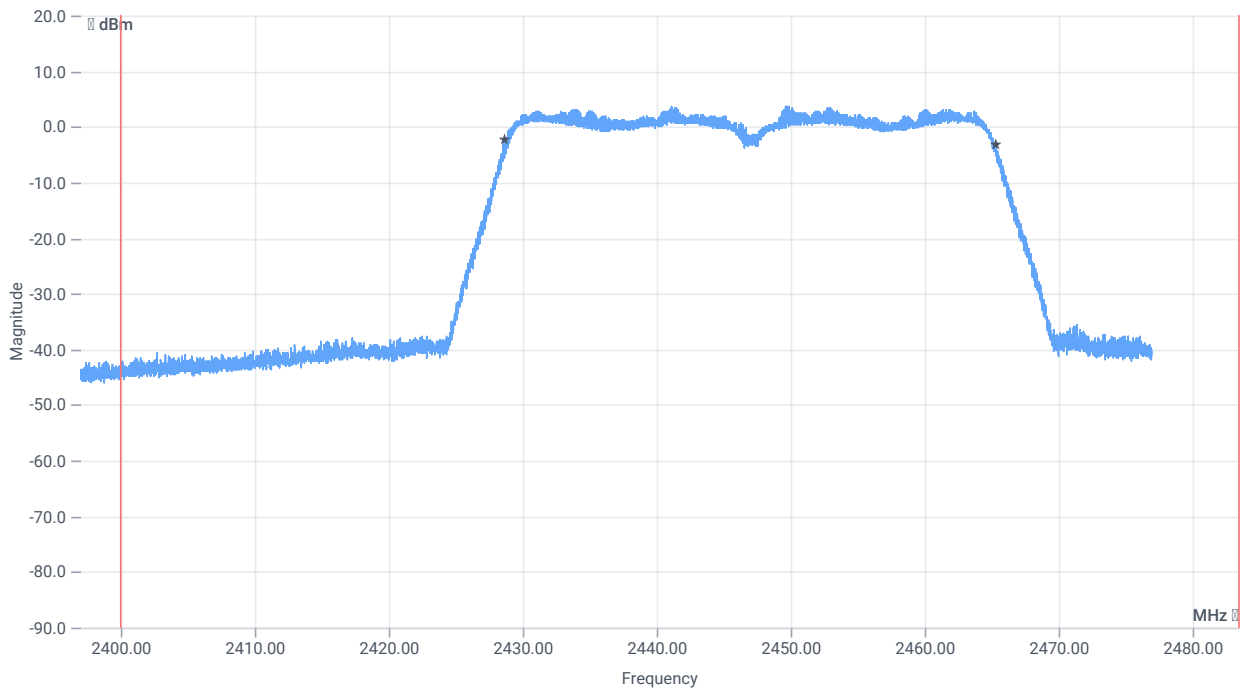


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36636.000	kHz	INFO
T1 99%	2400.000000	---	2428.6568	MHz	PASS
T2 99%	---	2483.500000	2465.2932	MHz	PASS

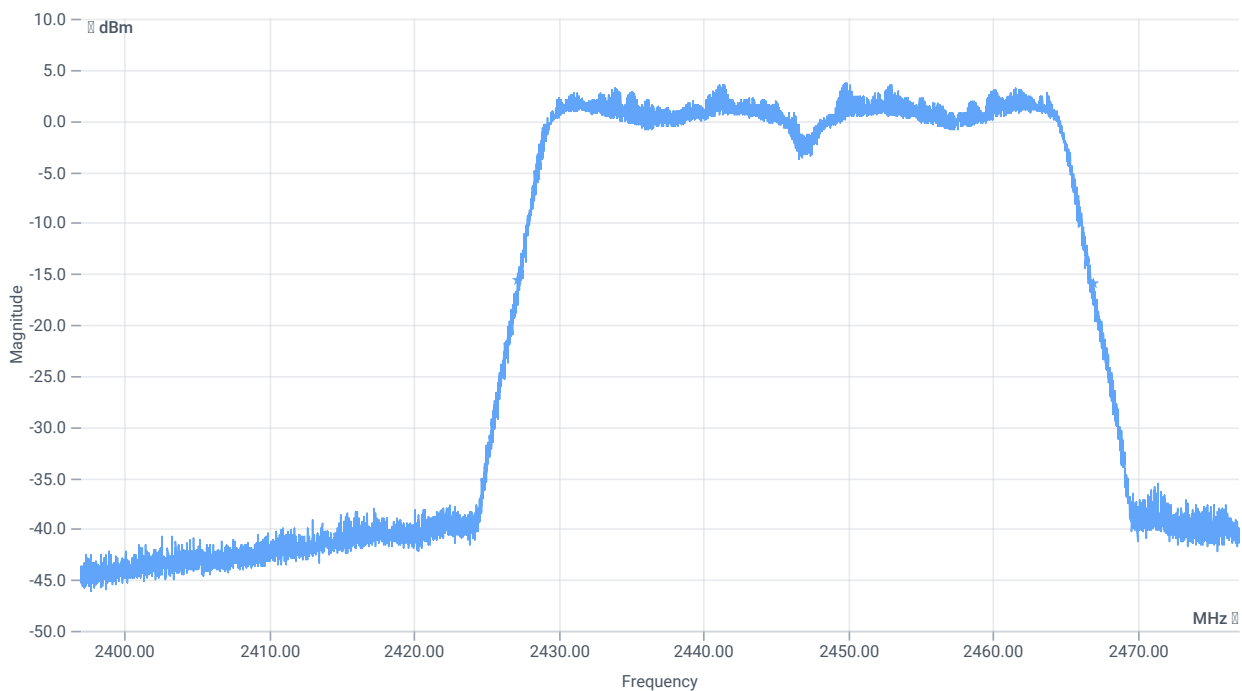

BW 20dB

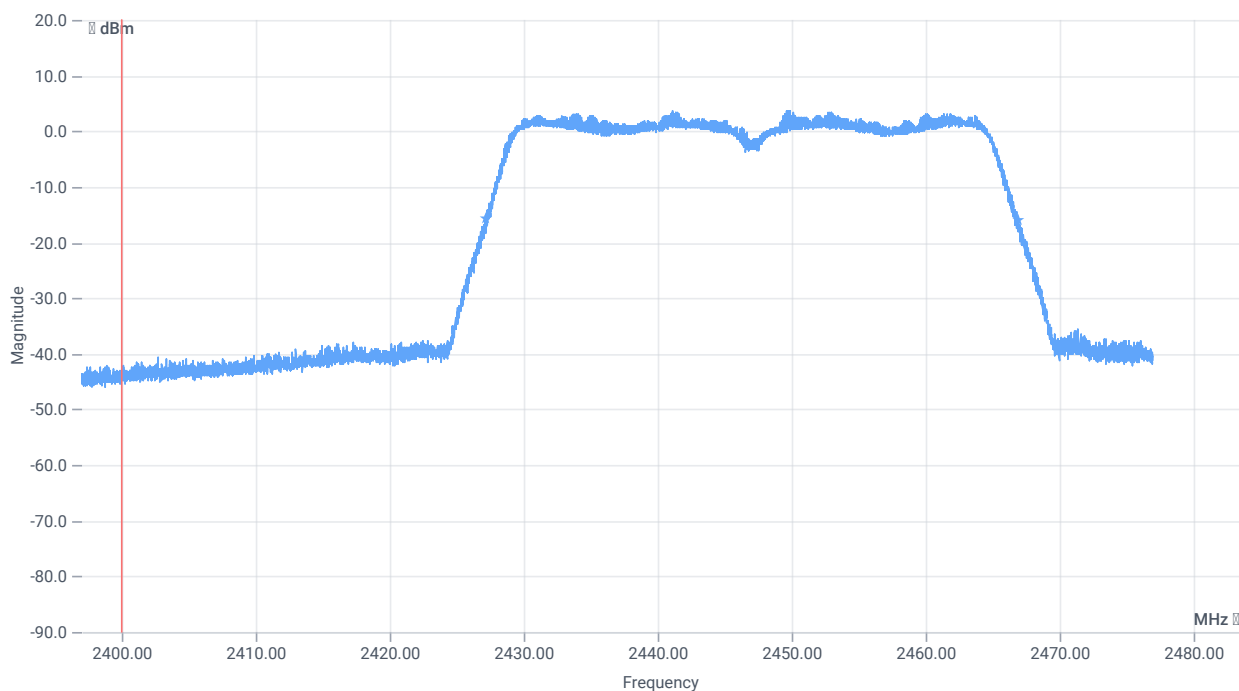

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	39760	kHz	INFO
T1 20dB	2400.000000	---	2427.1440	MHz	PASS
T2 20dB	---	2483.500000	2466.9040	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:53:15
Ambit temp [°C] humidity [rel%]	23.6 33
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2452 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.24	dBm	INFO
Ref. frequency	---	---	2466.490	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.24 8.31 20
Start [MHz] Stop [MHz]	2412.000 2492.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

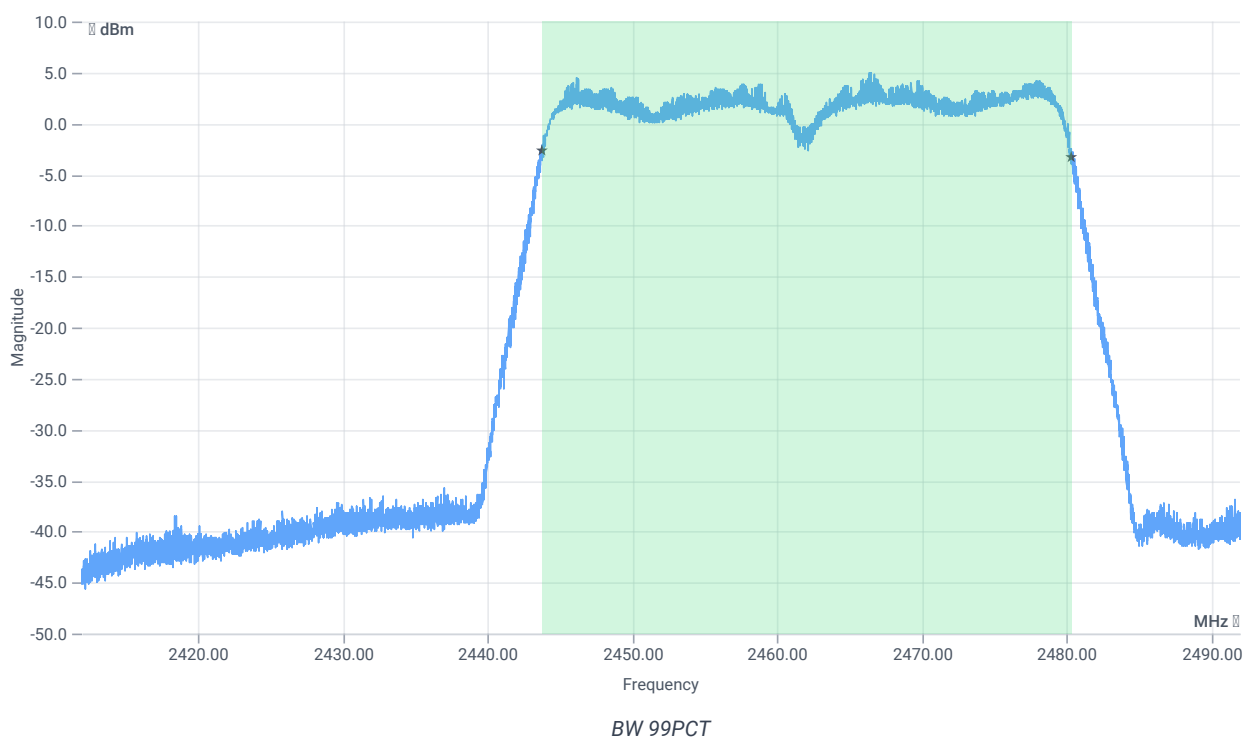


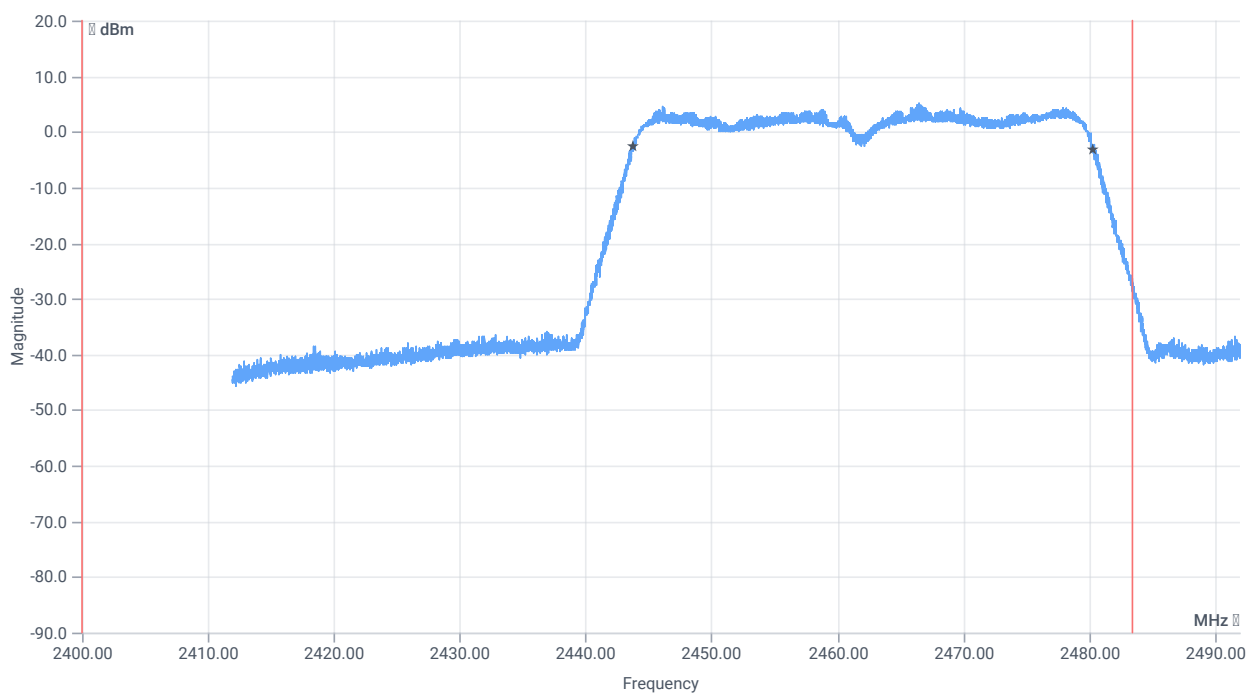


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36548.000	kHz	INFO
T1 99%	2400.000000	---	2443.7608	MHz	PASS
T2 99%	---	2483.500000	2480.3092	MHz	PASS

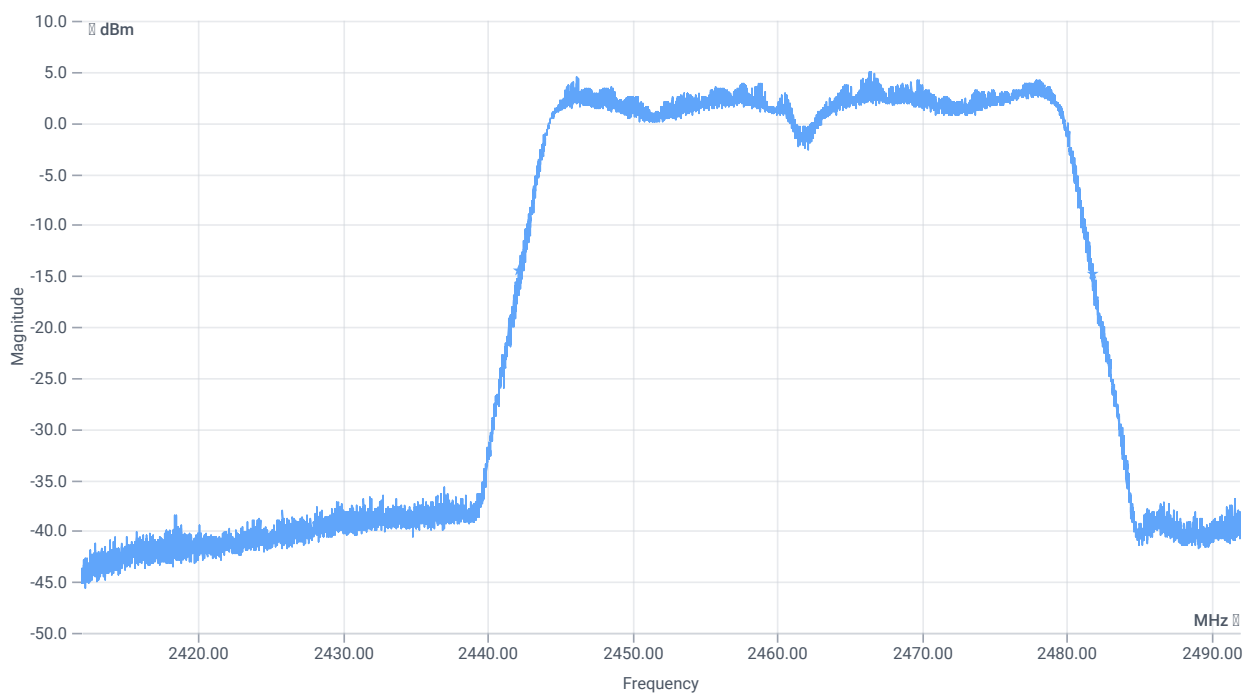

BW 20dB

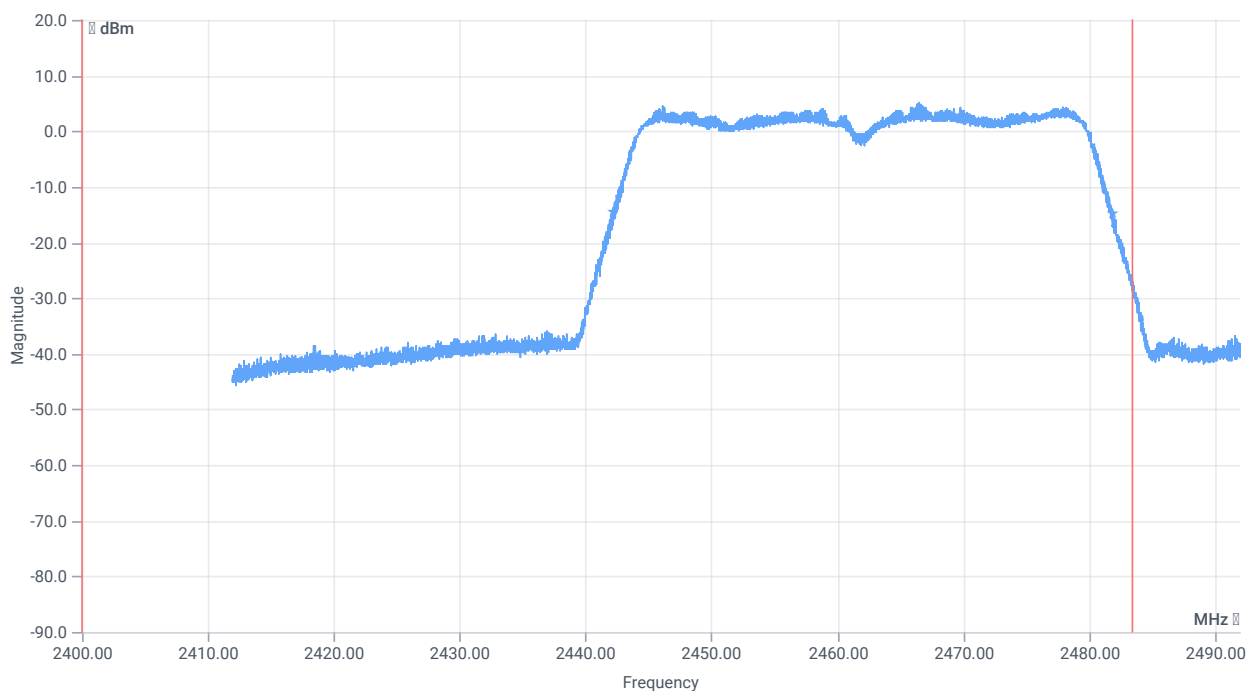

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	39696	kHz	INFO
T1 20dB	2400.000000	---	2442.1520	MHz	PASS
T2 20dB	---	2483.500000	2481.8480	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 22:09:14
Ambit temp [°C] humidity [rel%]	23.6 33
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2452 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	1.37	dBm	INFO
Ref. frequency	---	---	2457.390	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.37 8.34 15
Start [MHz] Stop [MHz]	2412.000 2492.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

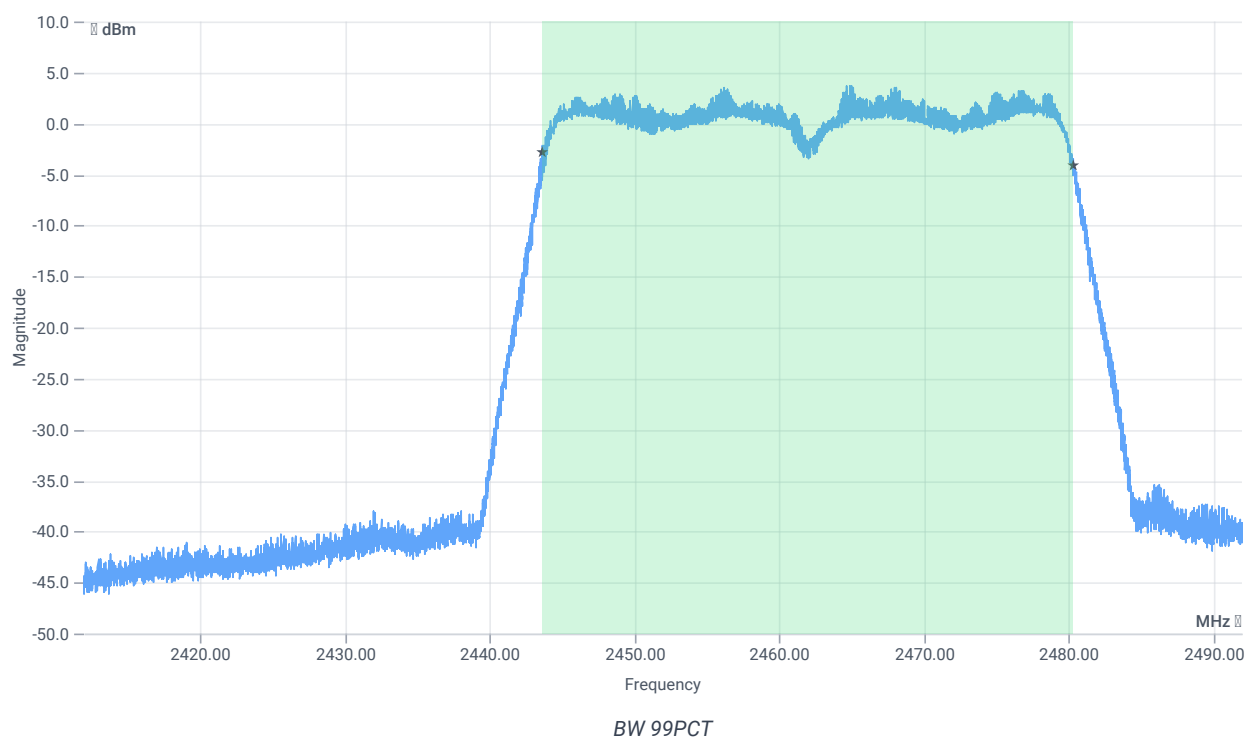


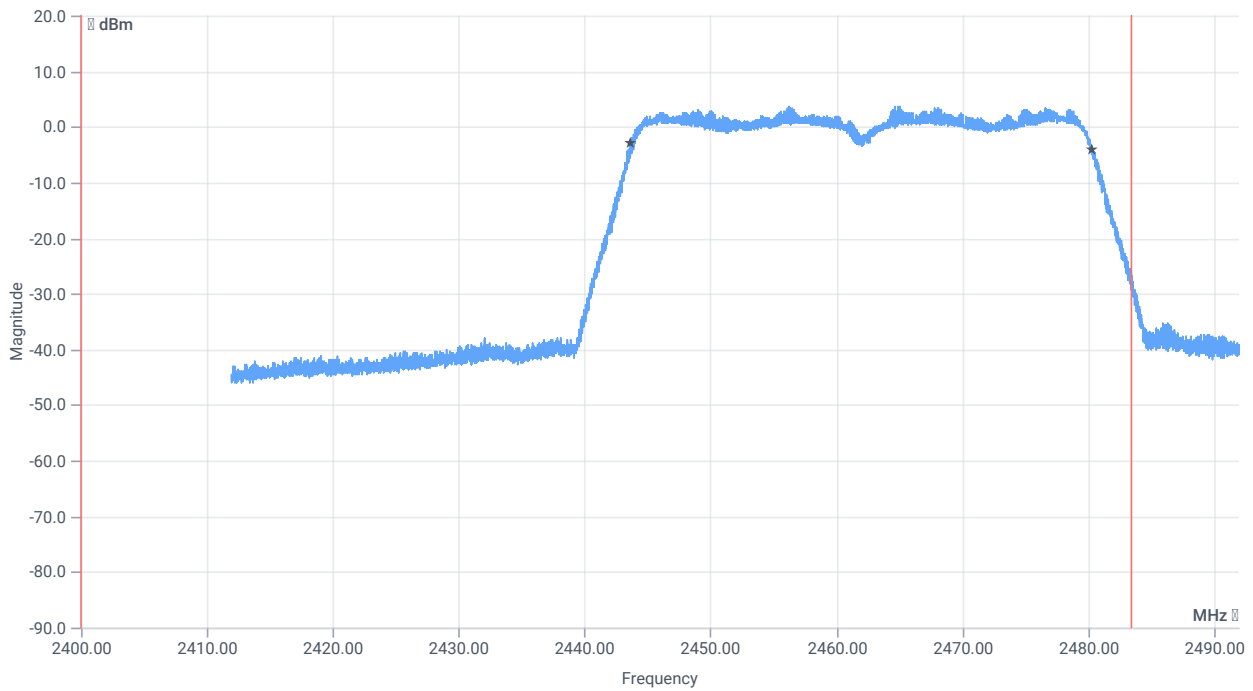


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36628.000	kHz	INFO
T1 99%	2400.000000	---	2443.6888	MHz	PASS
T2 99%	---	2483.500000	2480.3172	MHz	PASS

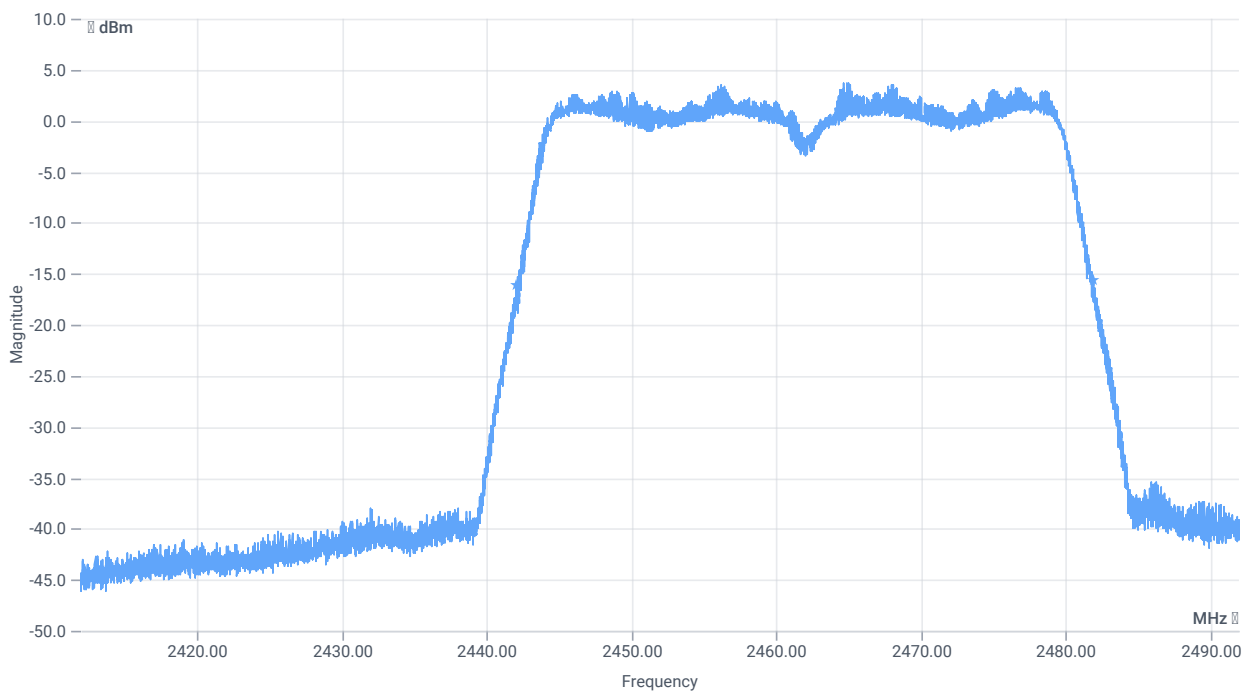

BW 20dB

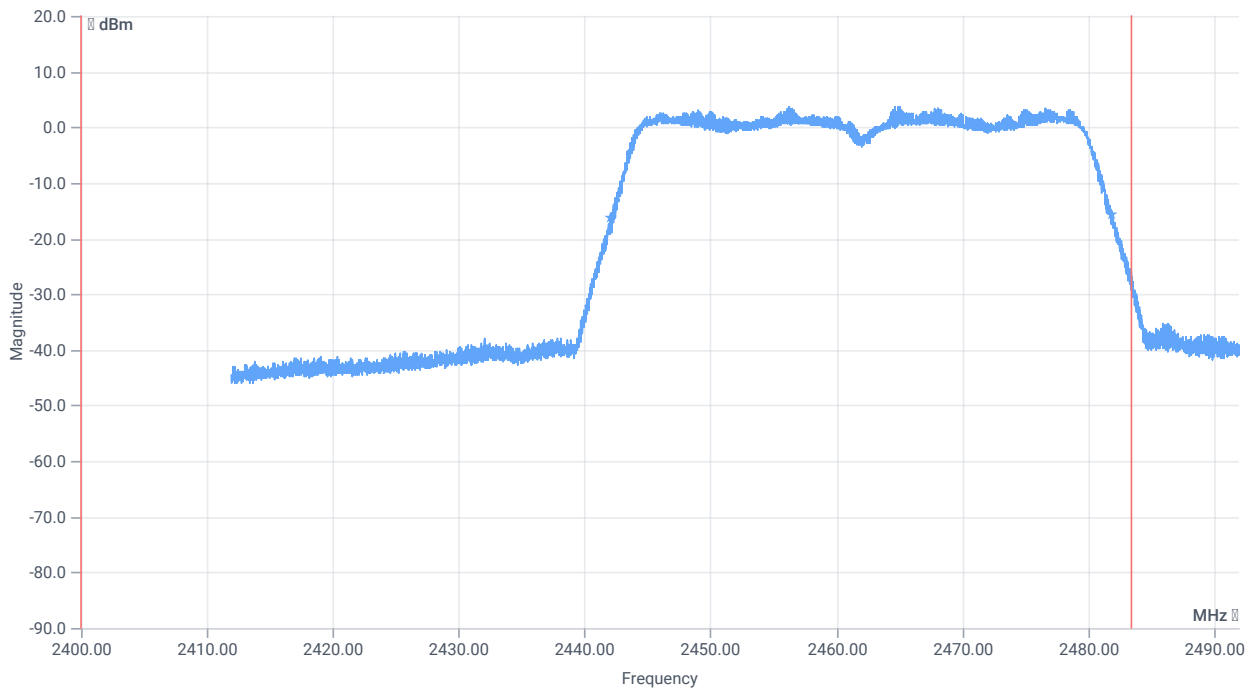

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	39832	kHz	INFO
T1 20dB	2400.000000	---	2442.0880	MHz	PASS
T2 20dB	---	2483.500000	2481.9200	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	11.04.2024 09:02:46
Ambit temp [°C] humidity [rel%]	23.2 34
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.30	dBm	INFO
Ref. frequency	---	---	2460.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.30 8.37 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

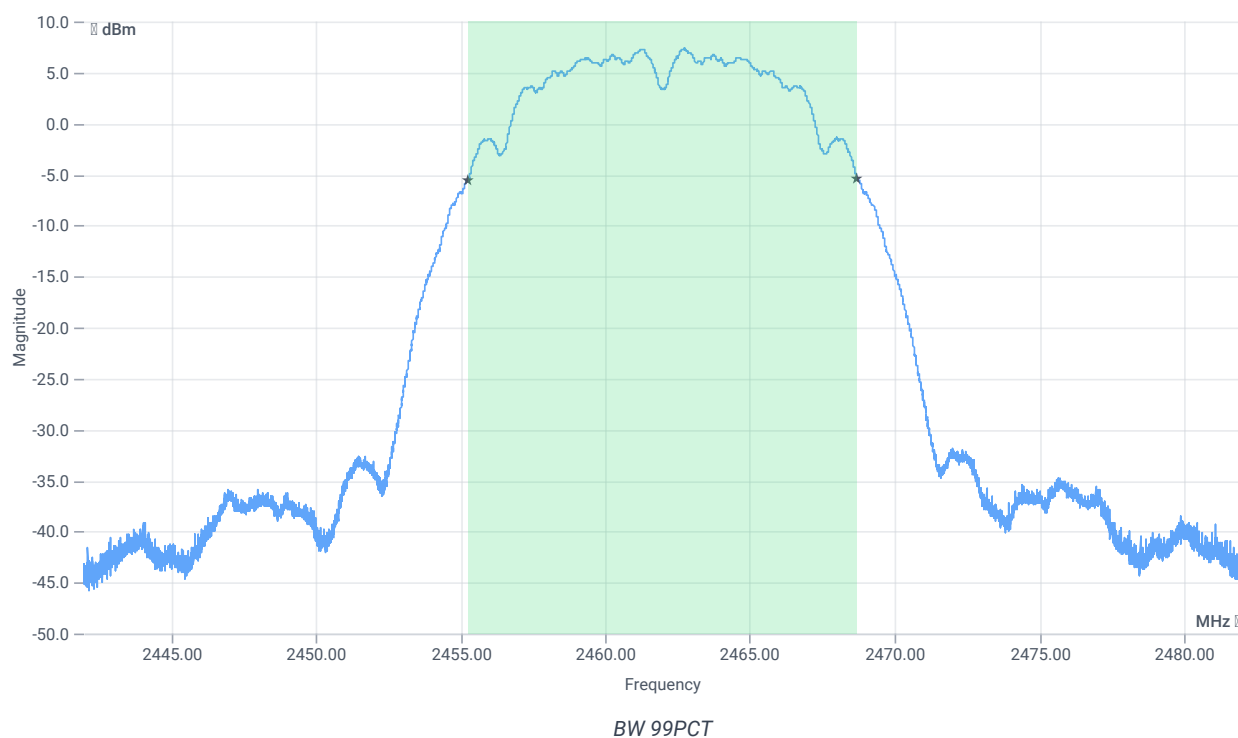


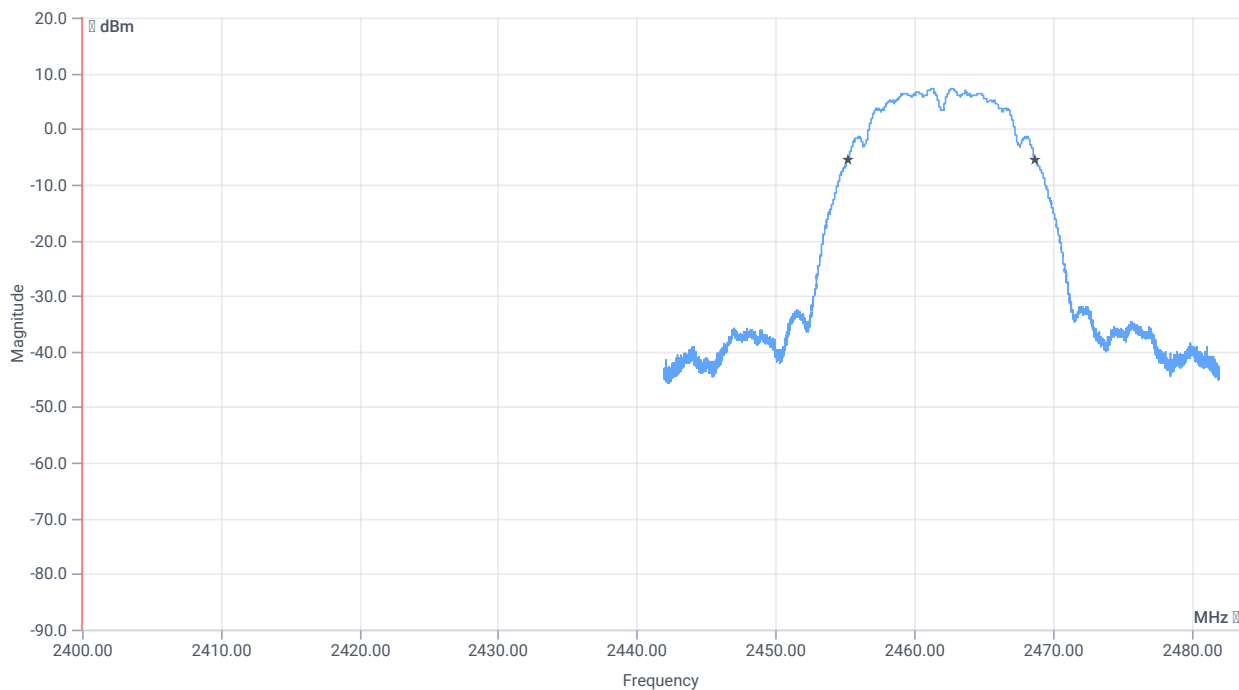


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13439.000	kHz	INFO
T1 99%	2400.000000	---	2455.2727	MHz	PASS
T2 99%	---	2483.500000	2468.7113	MHz	PASS

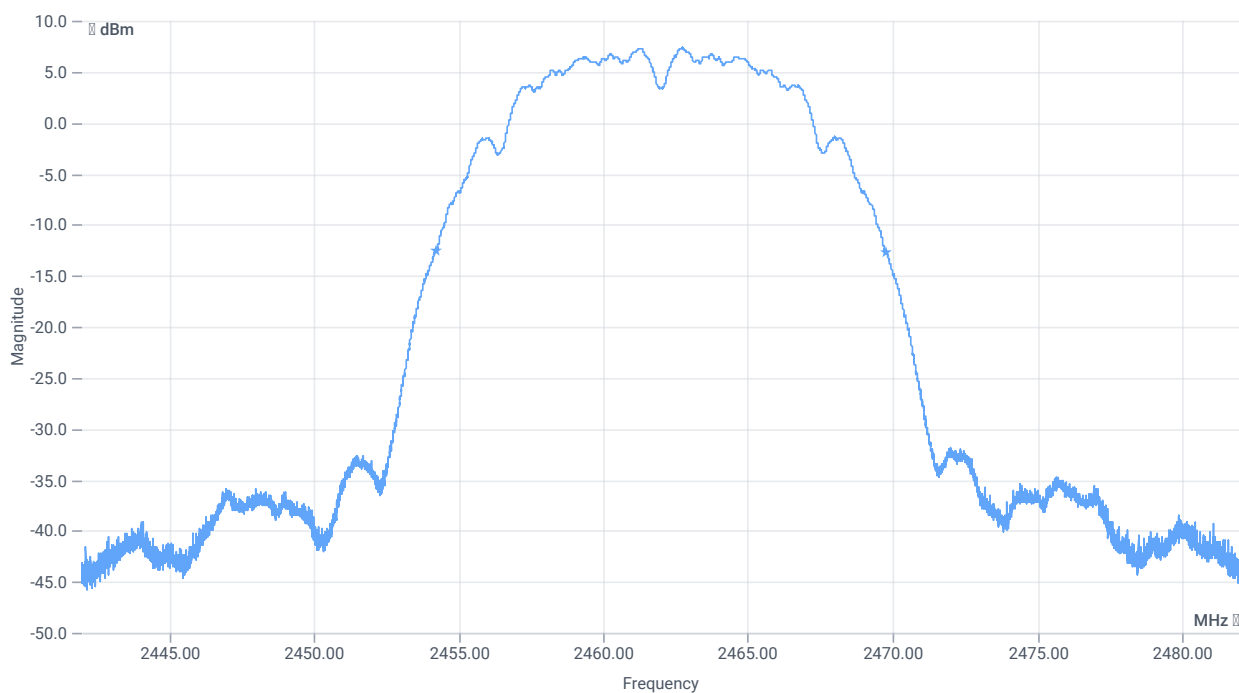

BW 20dB

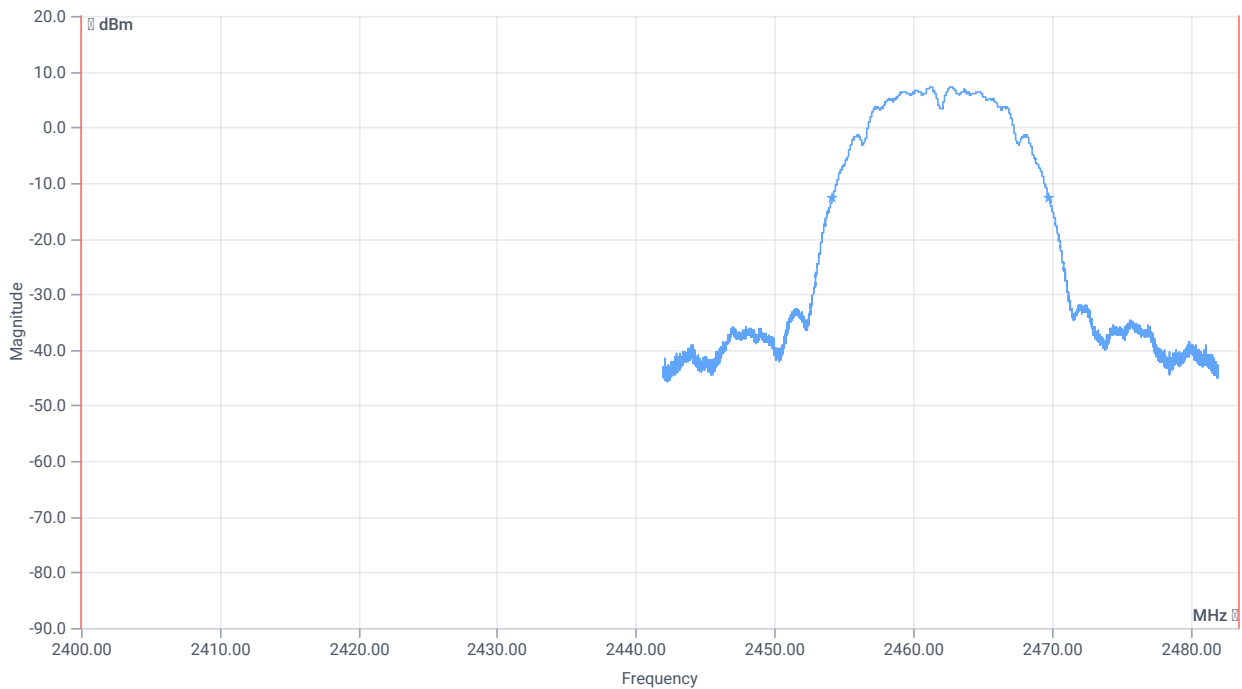

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15548	kHz	INFO
T1 20dB	2400.000000	---	2454.2120	MHz	PASS
T2 20dB	---	2483.500000	2469.7600	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	11.04.2024 08:46:58
Ambit temp [°C] humidity [rel%]	24.3 32
System version	5.0.3.8
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.07	dBm	INFO
Ref. frequency	---	---	2463.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.07 8.34 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

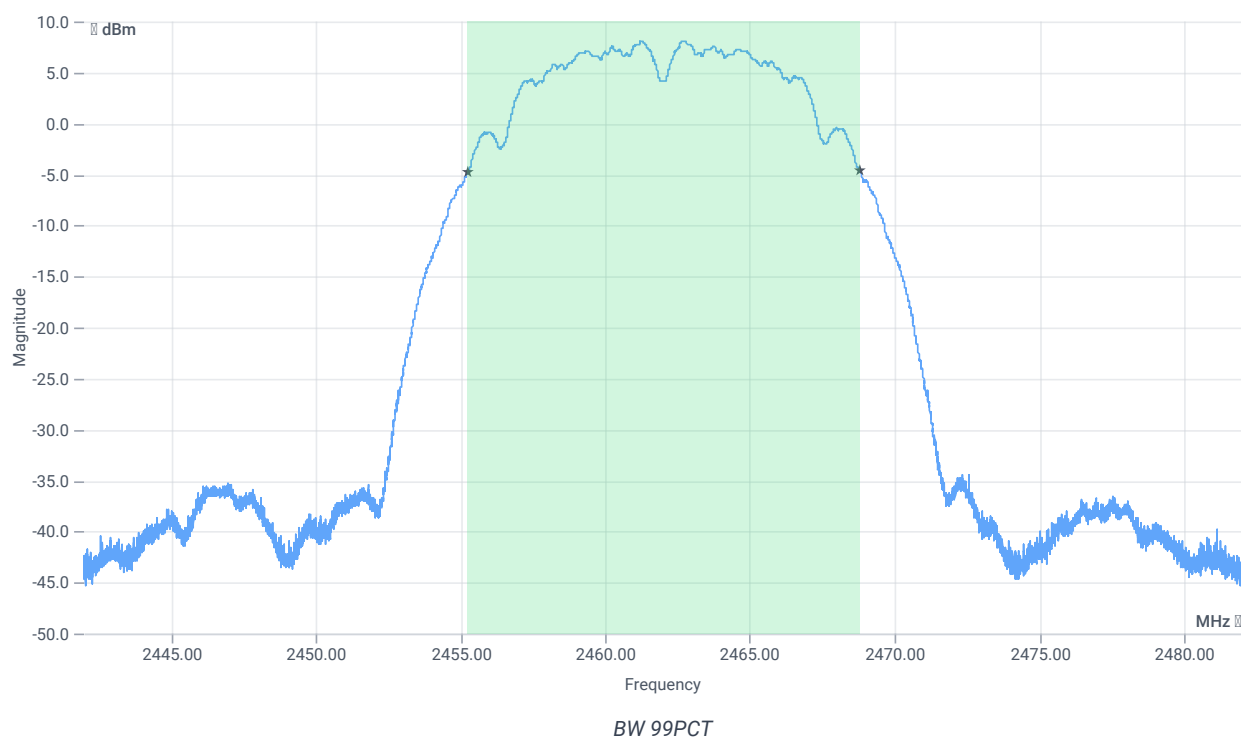


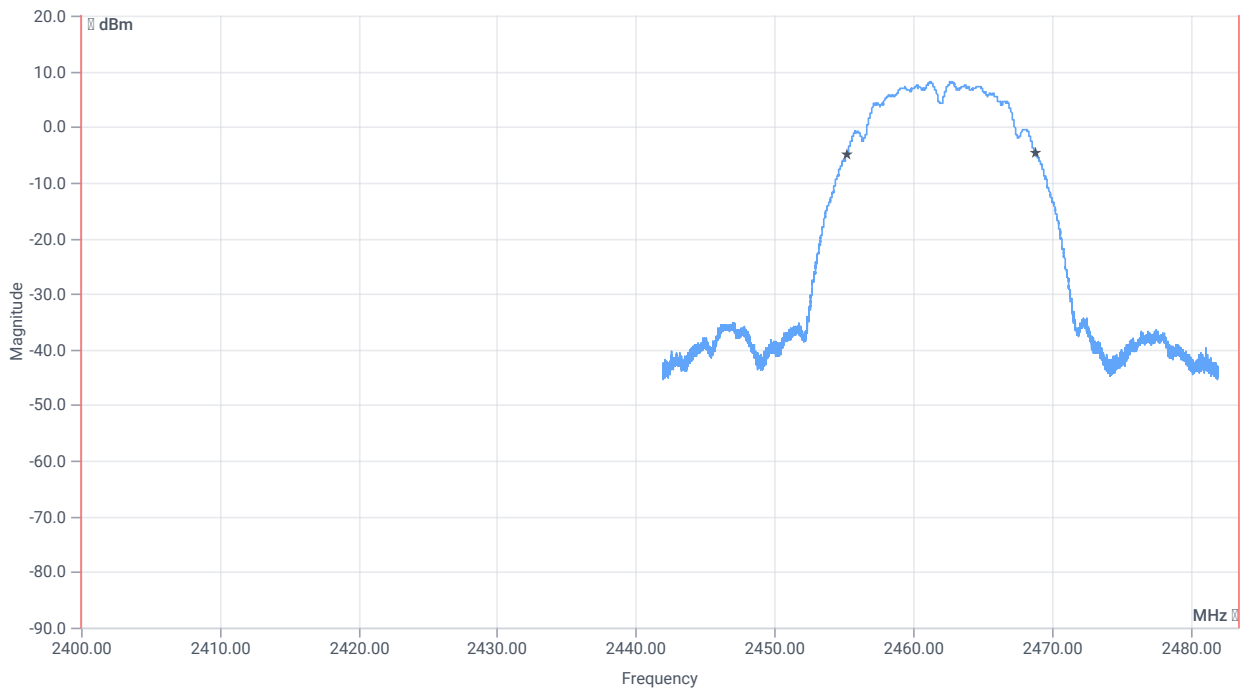


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13507.000	kHz	INFO
T1 99%	2400.000000	---	2455.2767	MHz	PASS
T2 99%	---	2483.500000	2468.7833	MHz	PASS

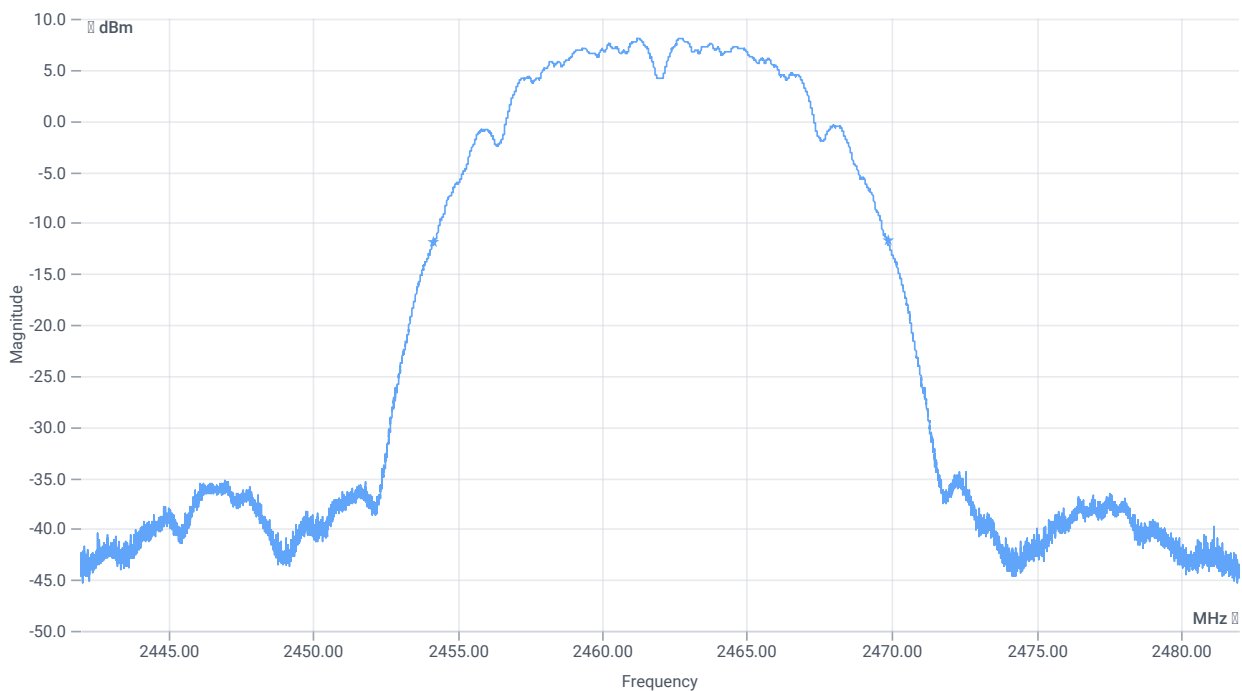

BW 20dB

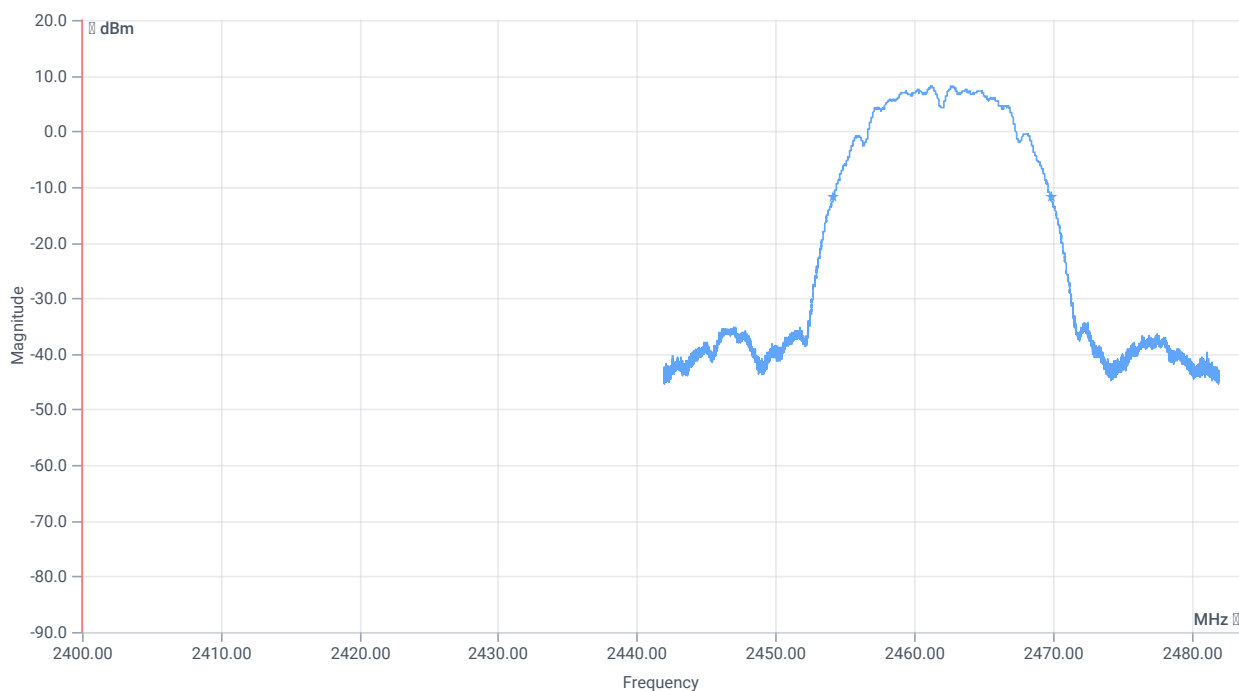

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15668	kHz	INFO
T1 20dB	2400.000000	---	2454.2000	MHz	PASS
T2 20dB	---	2483.500000	2469.8680	MHz	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:14:10
Ambit temp [°C] humidity [rel%]	26.2 28
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2412 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	18.3	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:30:10
Ambit temp [°C] humidity [rel%]	25.9 29
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2412 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	18.3	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:46:17
Ambit temp [°C] humidity [rel%]	25.0 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	18.6	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode

References

TC start	10.04.2024 17:02:18
Ambit temp [°C] humidity [rel%]	24.7 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	17.95	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 17:50:36
Ambit temp [°C] humidity [rel%]	24.1 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2412 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	21.14	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:06:37
Ambit temp [°C] humidity [rel%]	23.6 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2412 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	21.49	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:22:45
Ambit temp [°C] humidity [rel%]	23.8 30
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	20.88	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:38:46
Ambit temp [°C] humidity [rel%]	23.8 30
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	20.52	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:54:53
Ambit temp [°C] humidity [rel%]	23.8 29
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2462 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	21.64	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 19:10:54
Ambit temp [°C] humidity [rel%]	23.7 30
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2462 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	20.43	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 19:27:03
Ambit temp [°C] humidity [rel%]	23.7 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2412 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	21.1	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 19:43:05
Ambit temp [°C] humidity [rel%]	23.6 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2412 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	21.25	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 19:59:12
Ambit temp [°C] humidity [rel%]	23.6 32
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	20.76	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 20:15:14
Ambit temp [°C] humidity [rel%]	23.5 32
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	20.53	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 20:31:22
Ambit temp [°C] humidity [rel%]	23.6 32
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2462 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	20.82	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 20:47:22
Ambit temp [°C] humidity [rel%]	23.5 33
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2462 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	20.73	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:03:29
Ambit temp [°C] humidity [rel%]	23.4 34
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2422 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	16.87	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:19:28
Ambit temp [°C] humidity [rel%]	23.1 33
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2422 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	15.8	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:35:36
Ambit temp [°C] humidity [rel%]	22.7 34
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	16.92	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:51:35
Ambit temp [°C] humidity [rel%]	23.6 33
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	15.6	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 22:07:42
Ambit temp [°C] humidity [rel%]	23.5 33
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2452 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	17.13	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 22:23:41
Ambit temp [°C] humidity [rel%]	23.6 33
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2452 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	15.92	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode

References

TC start	11.04.2024 09:17:05
Ambit temp [°C] humidity [rel%]	23.4 34
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2462 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	17.91	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode

References

TC start	11.04.2024 09:01:15
Ambit temp [°C] humidity [rel%]	23.2 34
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2462 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	18.93	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode

References

TC start	10.04.2024 15:59:05
Ambit temp [°C] humidity [rel%]	26.9 28
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.08	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.08 8.27 25
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

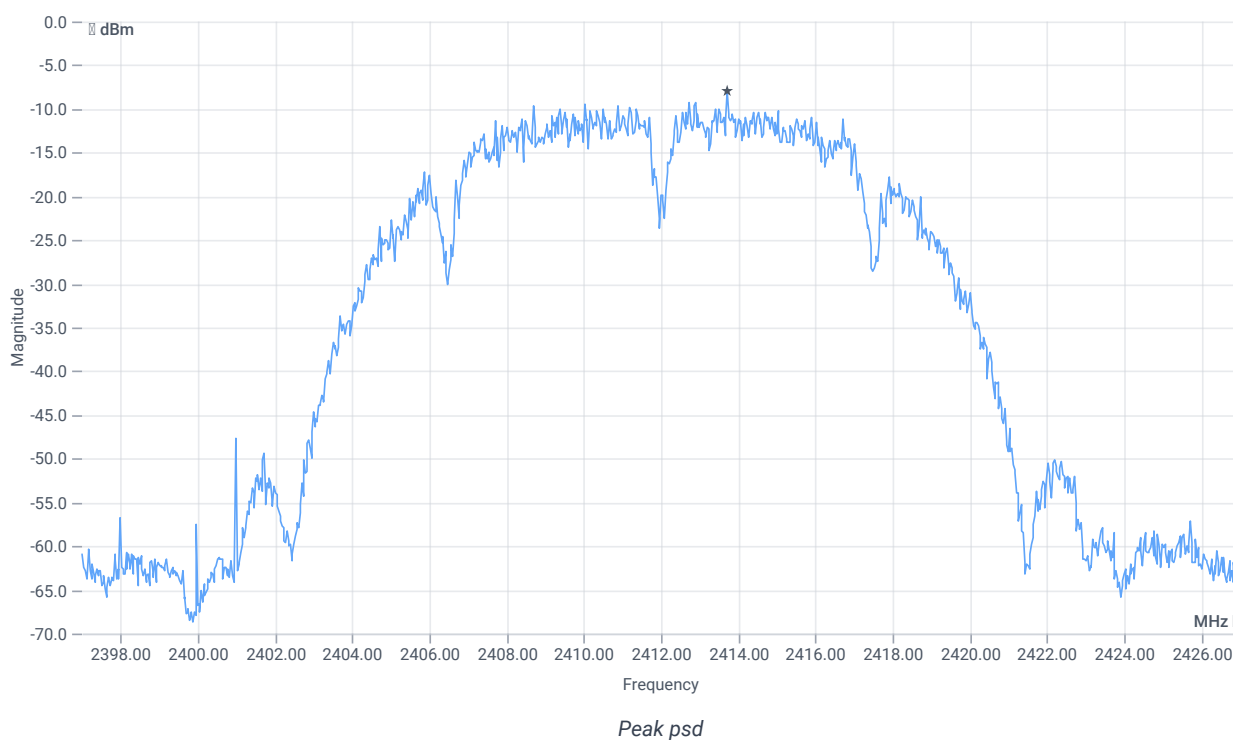

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-7.94	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:15:01
Ambit temp [°C] humidity [rel%]	26.2 28
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.12	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.12 8.32 25
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

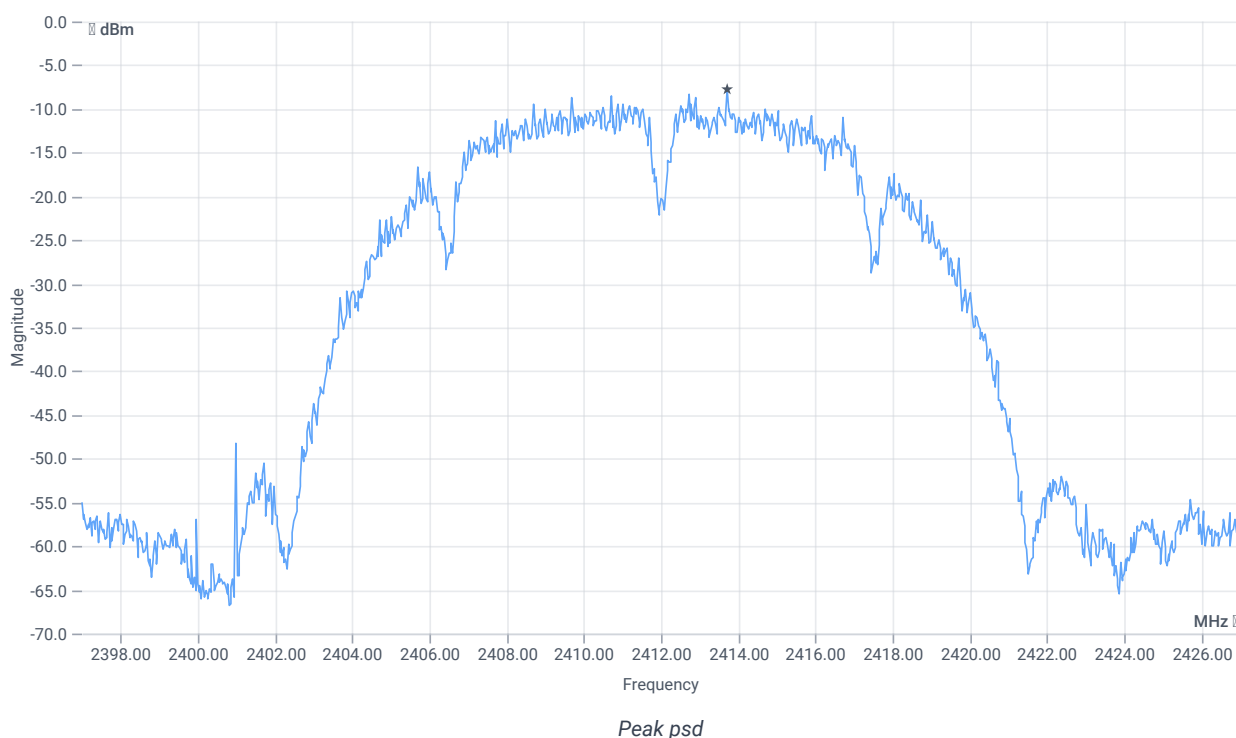

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-7.7	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:31:06
Ambit temp [°C] humidity [rel%]	25.9 29
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.52	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.52 8.3 25
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

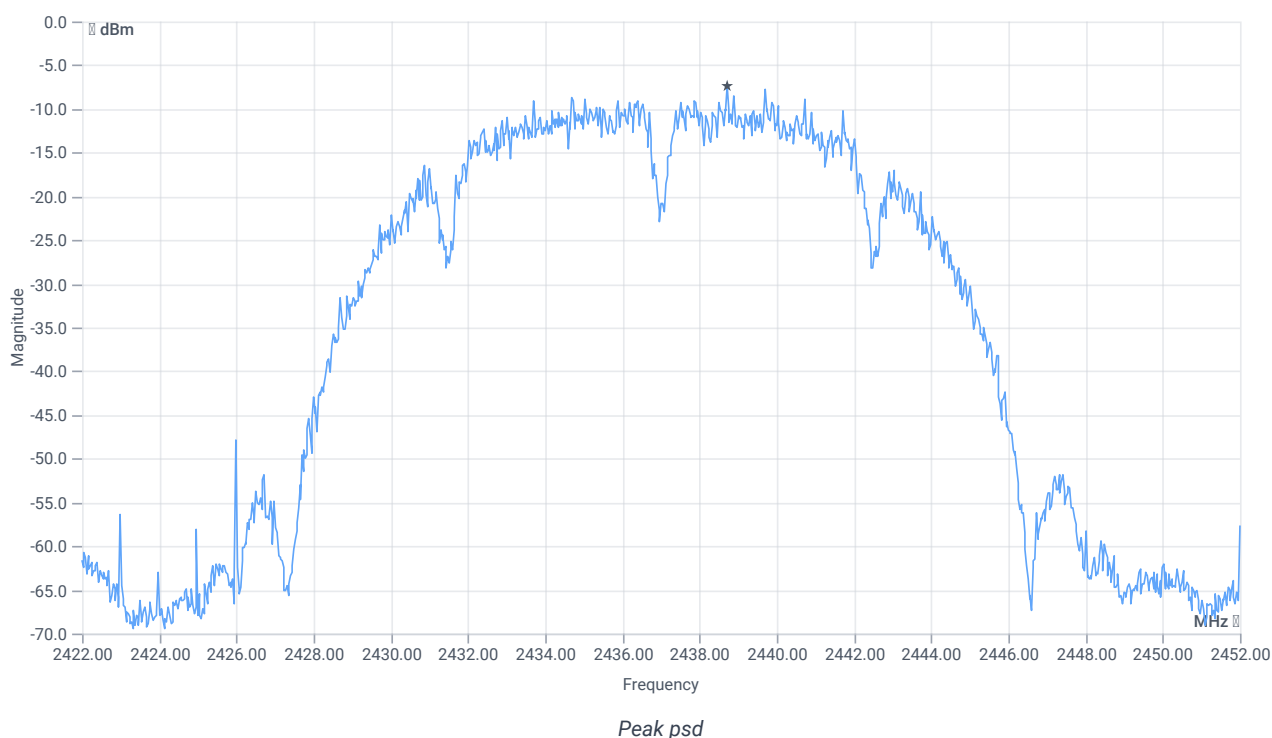

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-7.47	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:47:06
Ambit temp [°C] humidity [rel%]	25.1 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.74	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.74 8.33 25
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

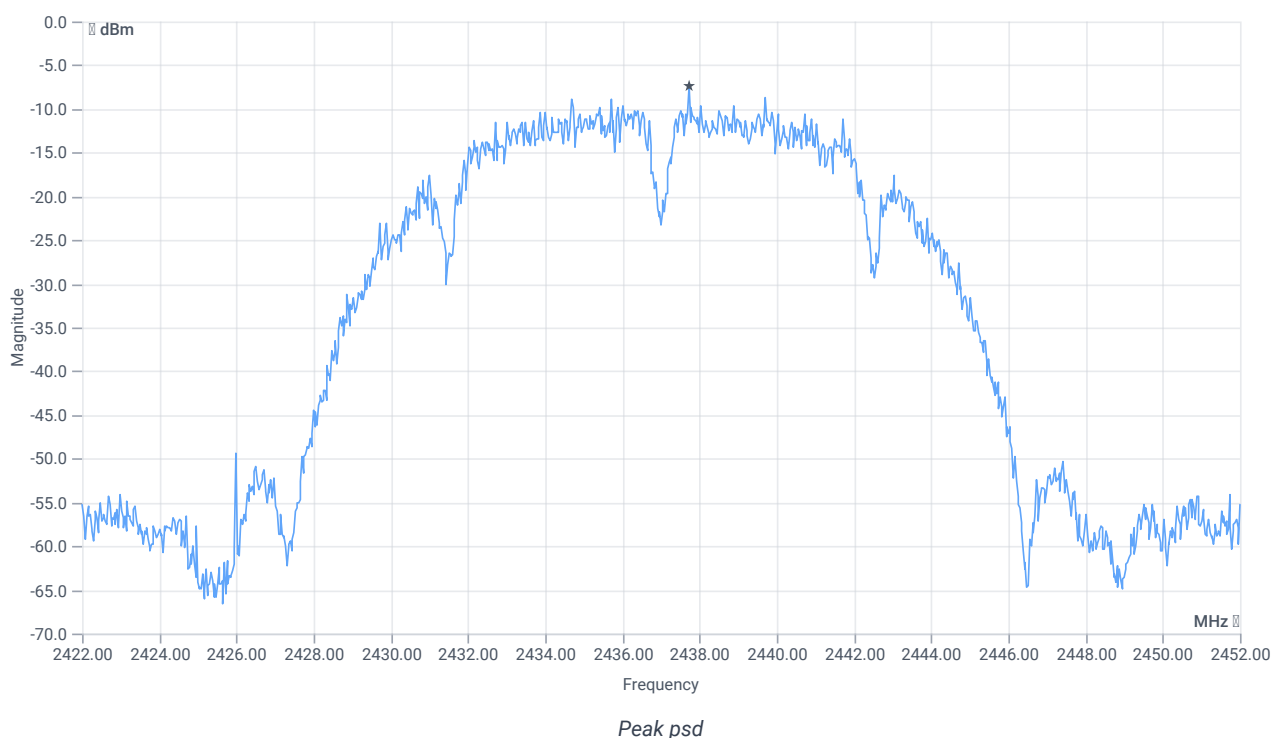

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-7.45	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 17:35:24
Ambit temp [°C] humidity [rel%]	24.5 32
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.61	dBm	INFO
Ref. frequency	---	---	2414.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.61 8.27 25
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

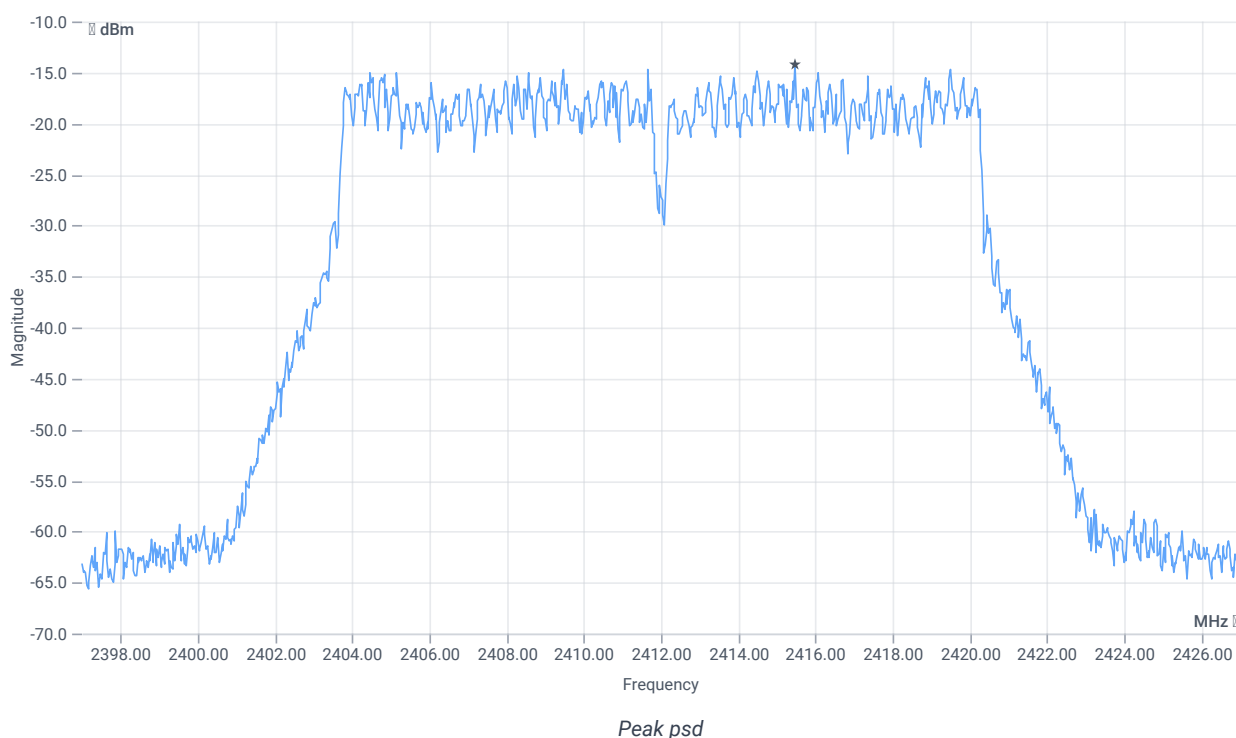

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-14.22	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 17:51:26
Ambit temp [°C] humidity [rel%]	24.1 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.59	dBm	INFO
Ref. frequency	---	---	2409.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.59 8.32 25
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

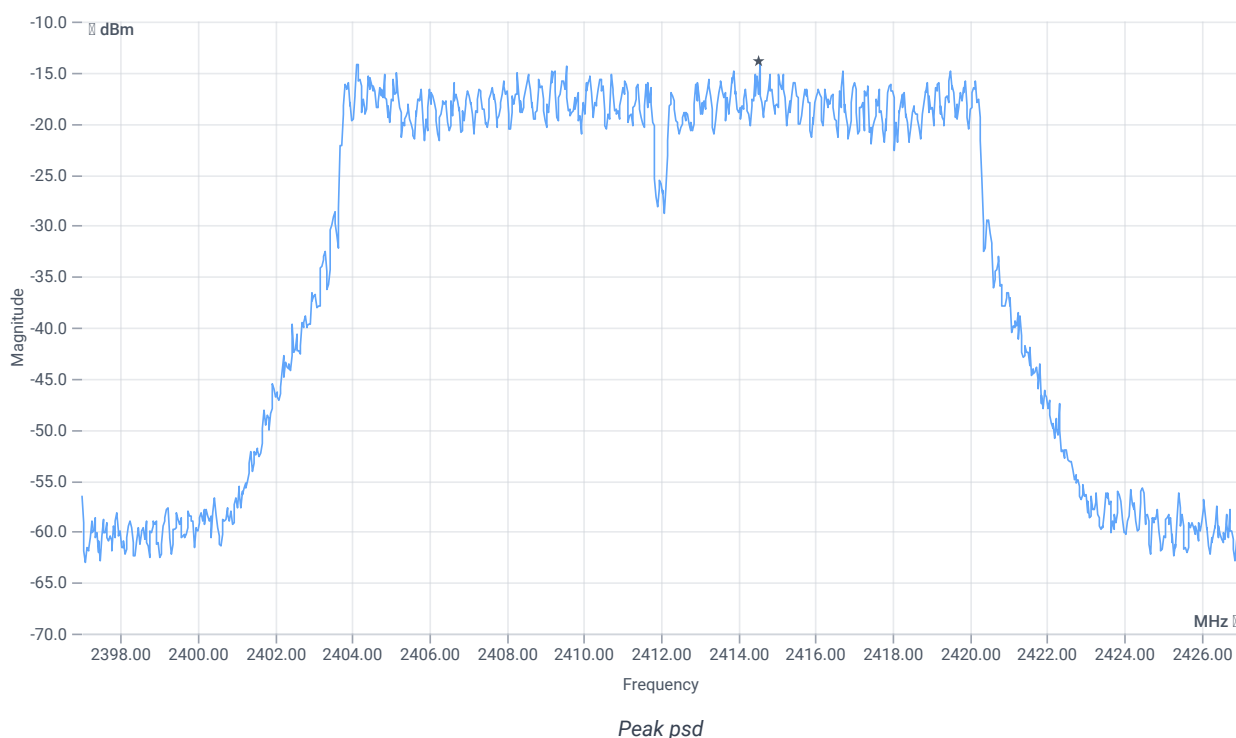

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-13.97	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:07:33
Ambit temp [°C] humidity [rel%]	23.5 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.49	dBm	INFO
Ref. frequency	---	---	2433.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.49 8.3 25
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

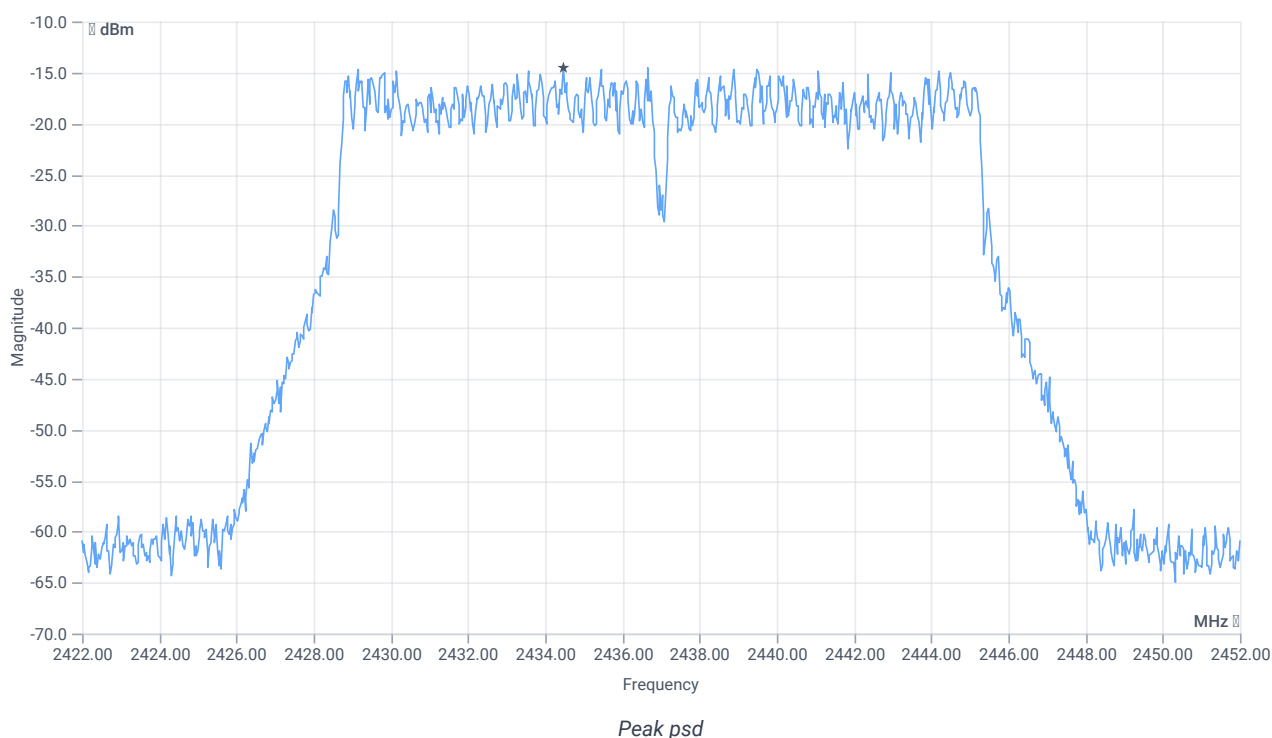

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-14.54	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:23:34
Ambit temp [°C] humidity [rel%]	23.8 30
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.02	dBm	INFO
Ref. frequency	---	---	2439.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.02 8.33 20
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

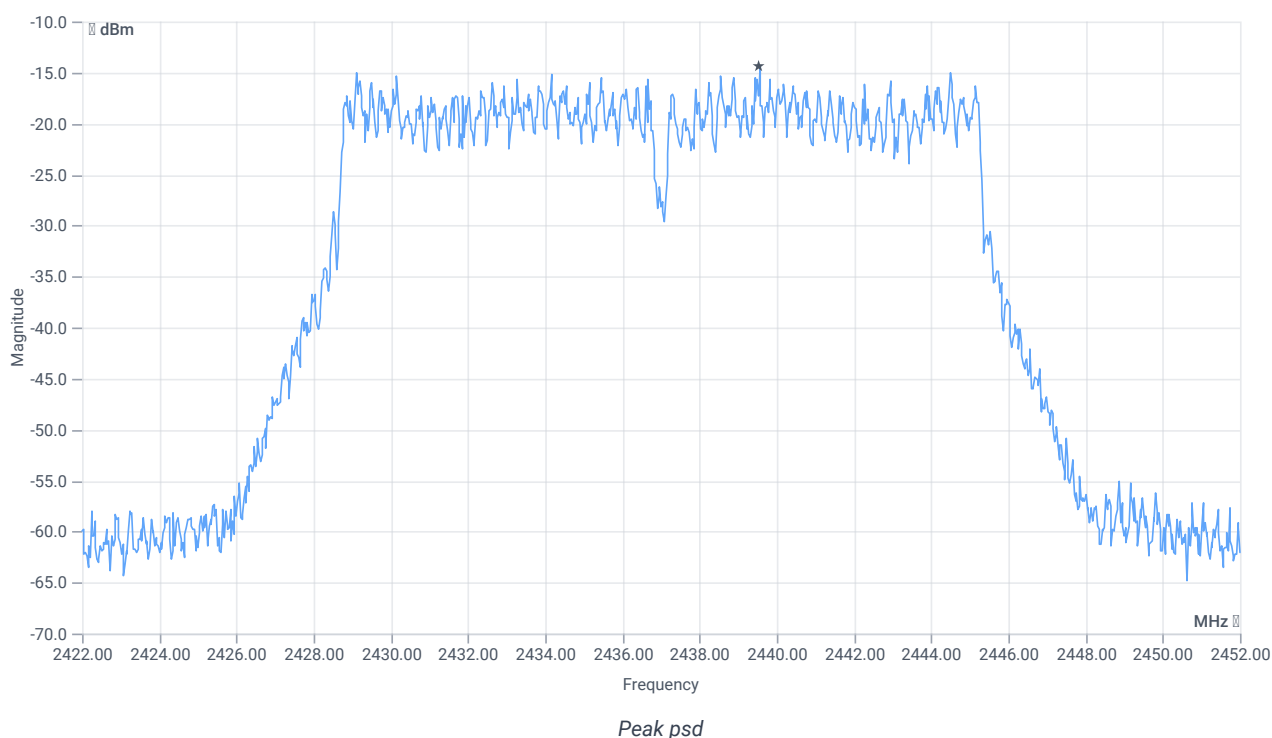

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-14.44	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:39:42
Ambit temp [°C] humidity [rel%]	23.8 30
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.98	dBm	INFO
Ref. frequency	---	---	2465.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.98 8.34 25
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

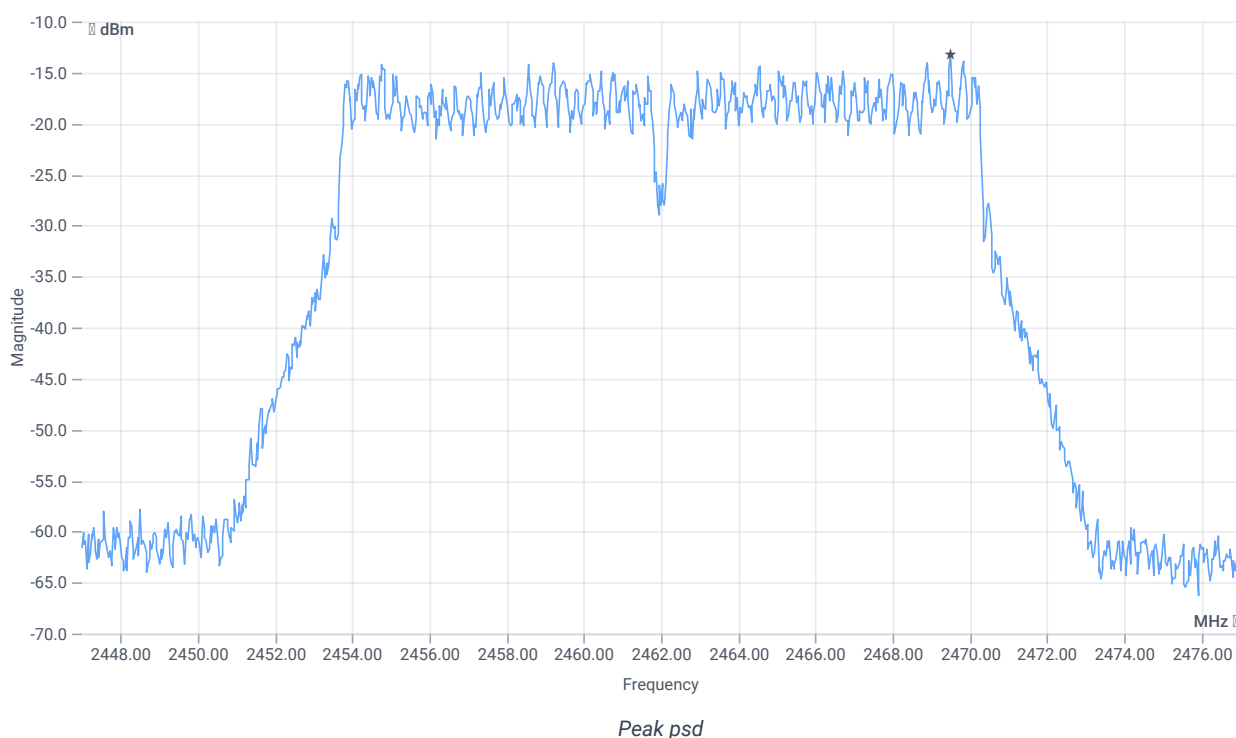

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-13.24	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:55:43
Ambit temp [°C] humidity [rel%]	23.7 29
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.04	dBm	INFO
Ref. frequency	---	---	2464.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.04 8.37 25
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

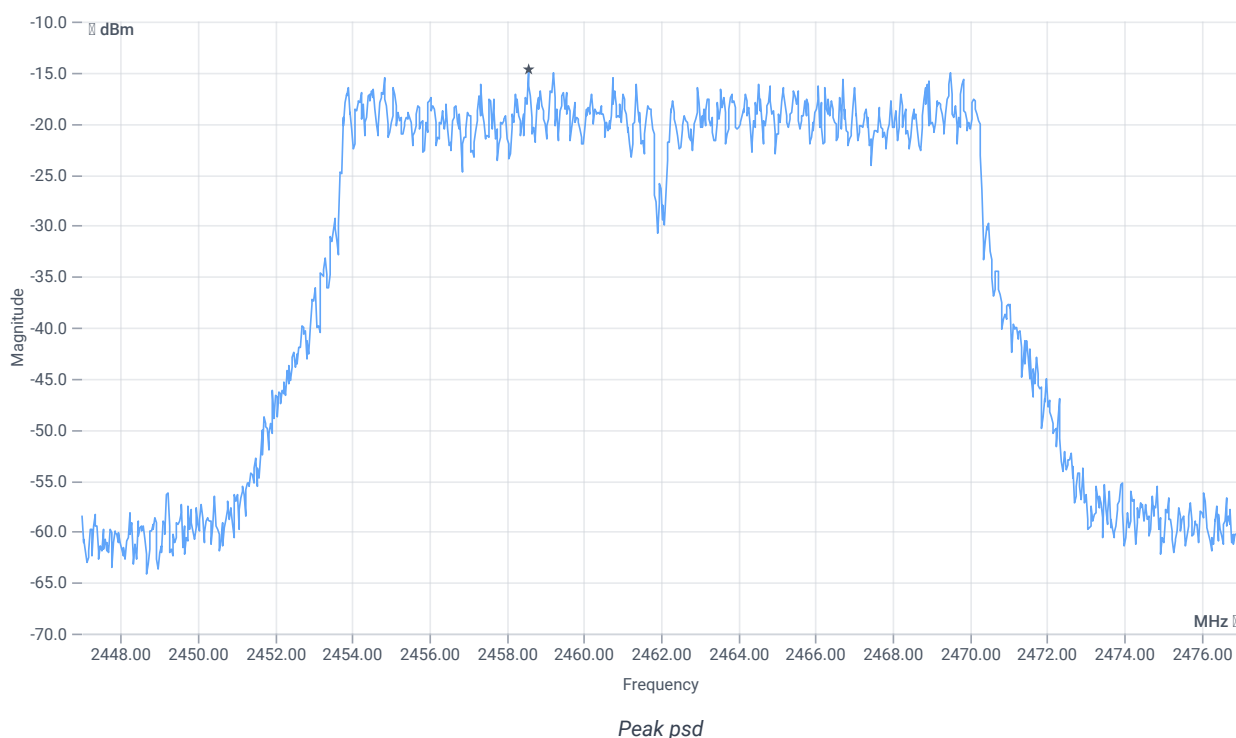

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-14.77	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 19:11:51
Ambit temp [°C] humidity [rel%]	23.6 30
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.15	dBm	INFO
Ref. frequency	---	---	2414.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.15 8.27 25
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

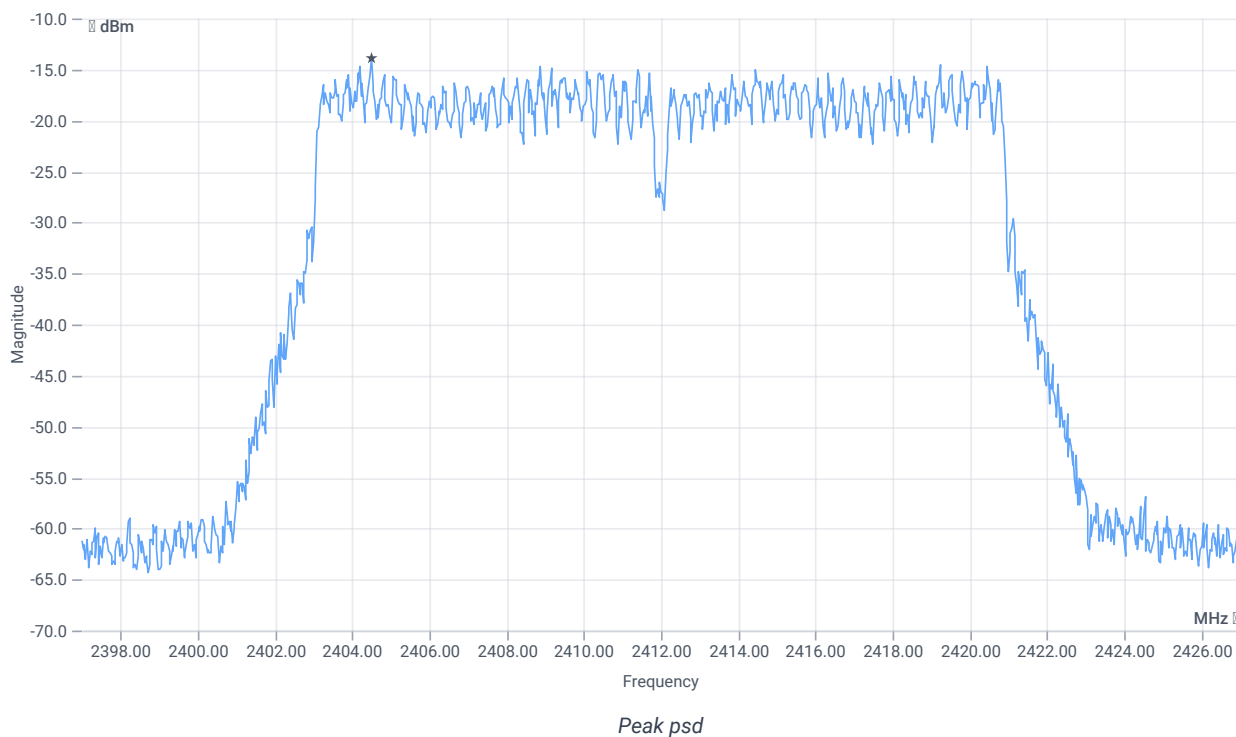

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-13.88	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 19:27:54
Ambit temp [°C] humidity [rel%]	23.6 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.88	dBm	INFO
Ref. frequency	---	---	2408.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.88 8.32 20
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

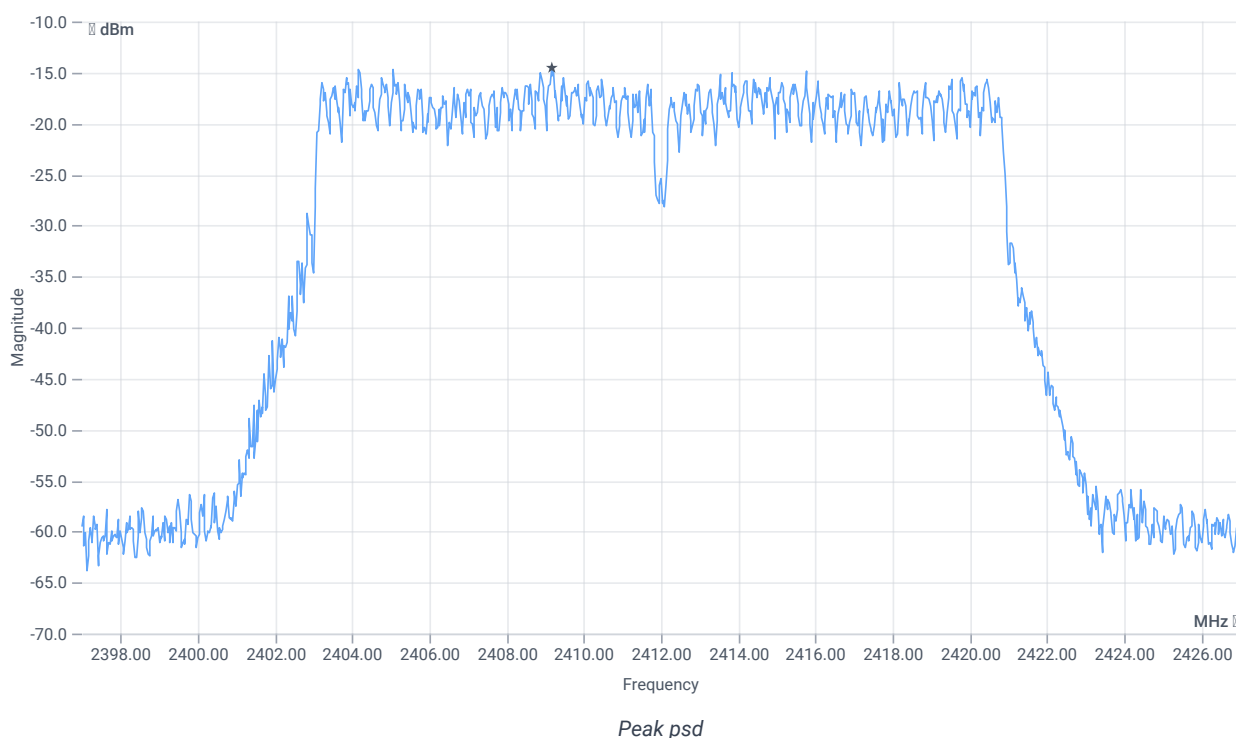

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-14.62	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 19:44:01
Ambit temp [°C] humidity [rel%]	23.6 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.38	dBm	INFO
Ref. frequency	---	---	2429.710	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.38 8.3 25
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

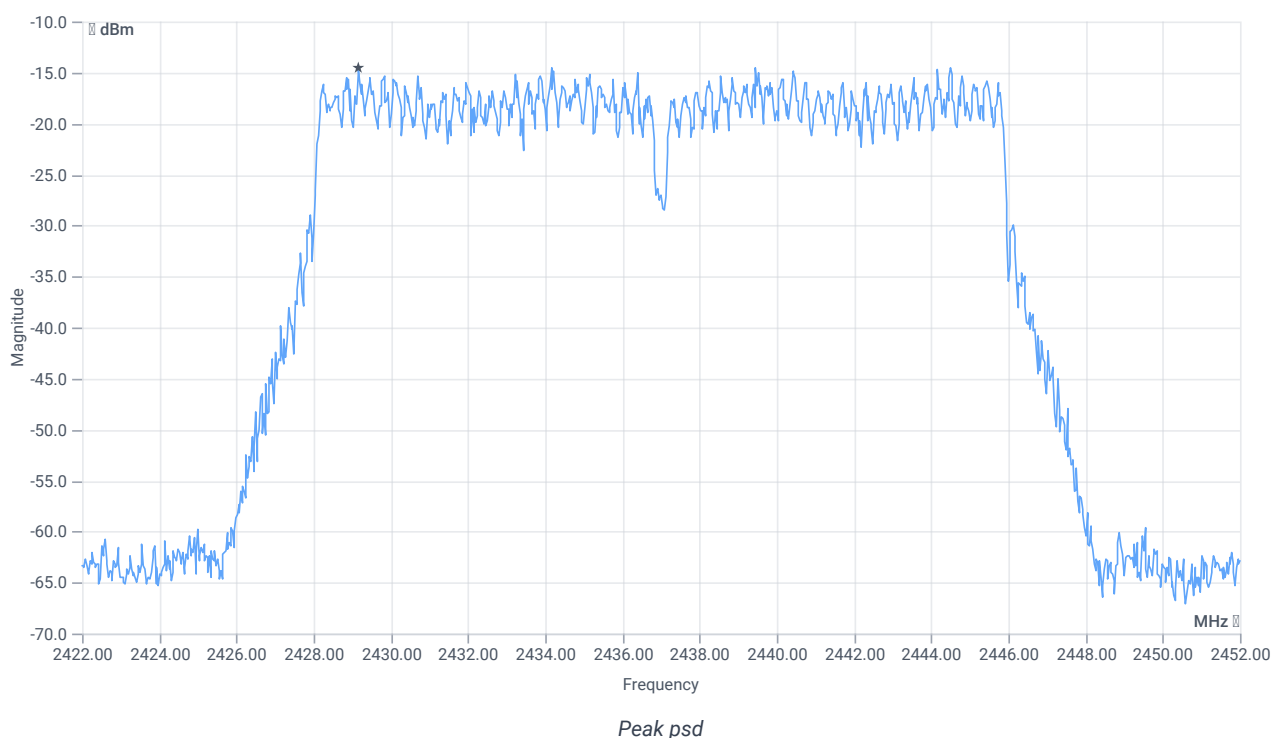

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-14.47	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 20:00:01
Ambit temp [°C] humidity [rel%]	23.6 32
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.74	dBm	INFO
Ref. frequency	---	---	2439.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.74 8.33 20
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

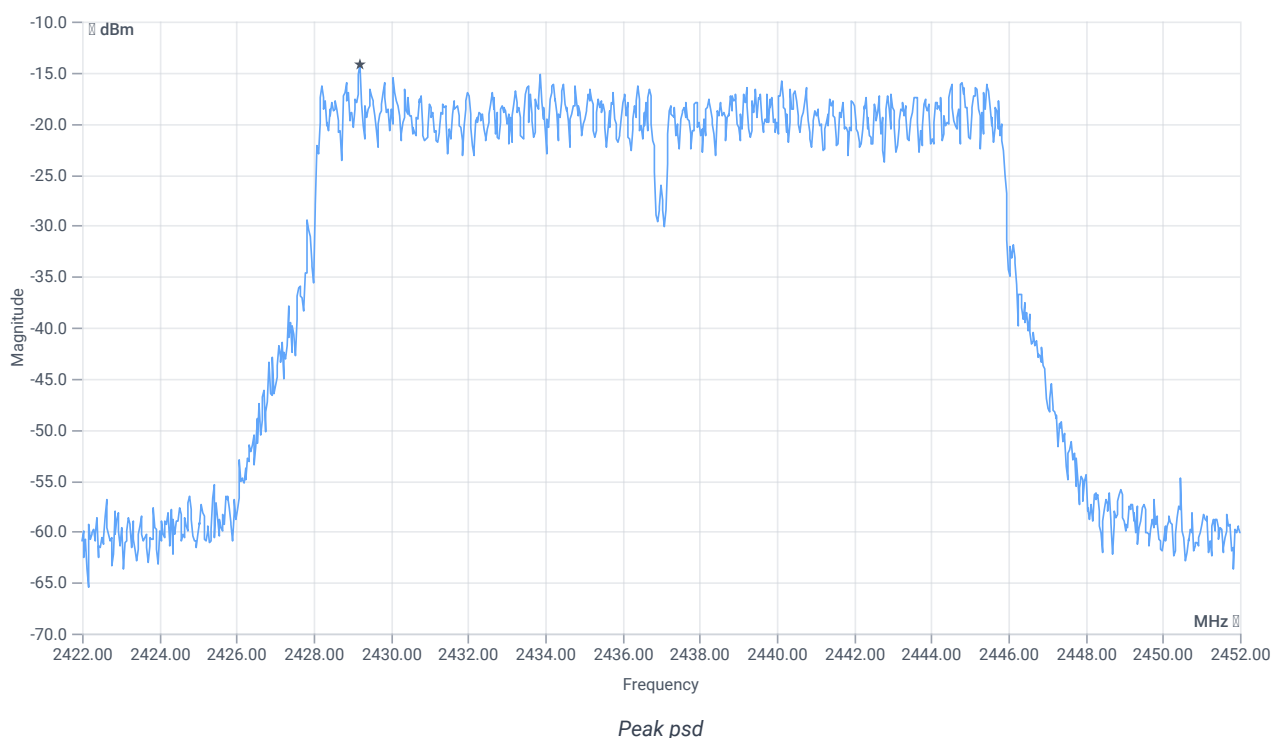

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-14.16	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 20:16:10
Ambit temp [°C] humidity [rel%]	23.5 32
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.45	dBm	INFO
Ref. frequency	---	---	2469.890	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.45 8.34 25
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

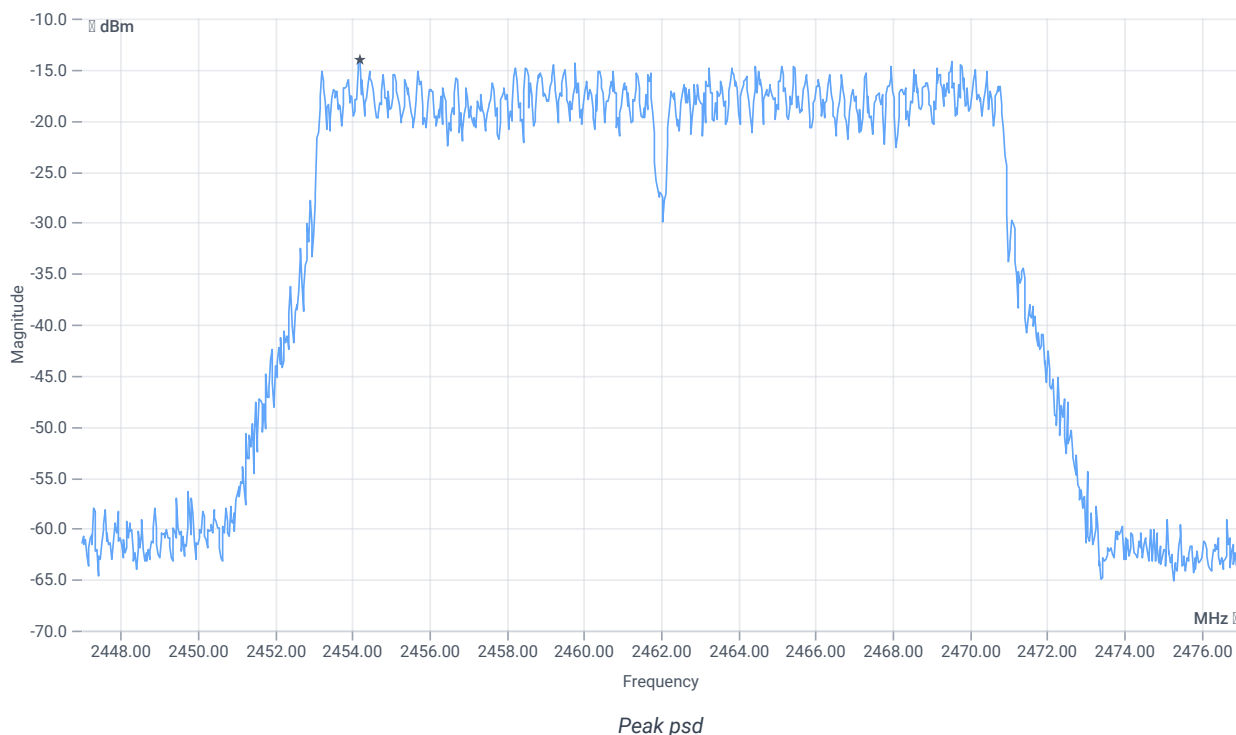

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-14.03	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	10.04.2024 20:32:11
Ambit temp [°C] humidity [rel%]	23.6 32
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.56	dBm	INFO
Ref. frequency	---	---	2460.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.56 8.37 25
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

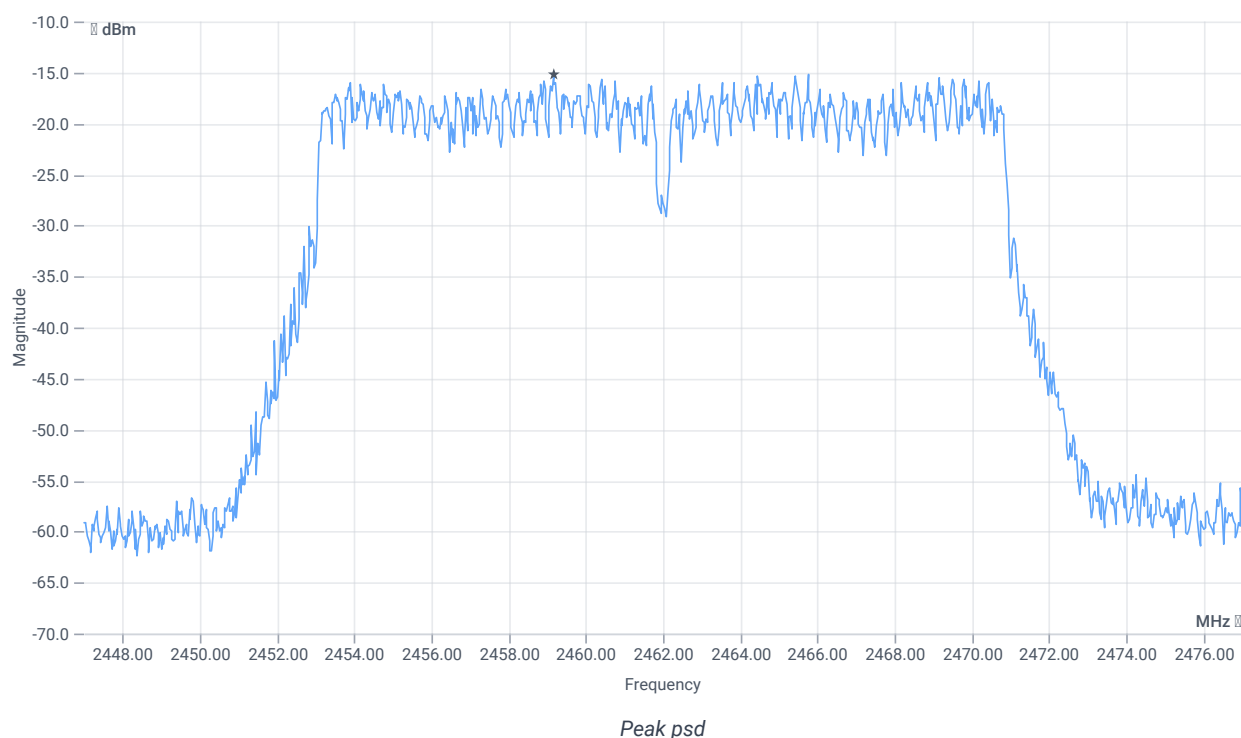

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-15.19	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 20:48:16
Ambit temp [°C] humidity [rel%]	23.5 33
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2422 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.74	dBm	INFO
Ref. frequency	---	---	2438.280	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.74 8.28 15
Start [MHz] Stop [MHz]	2392.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

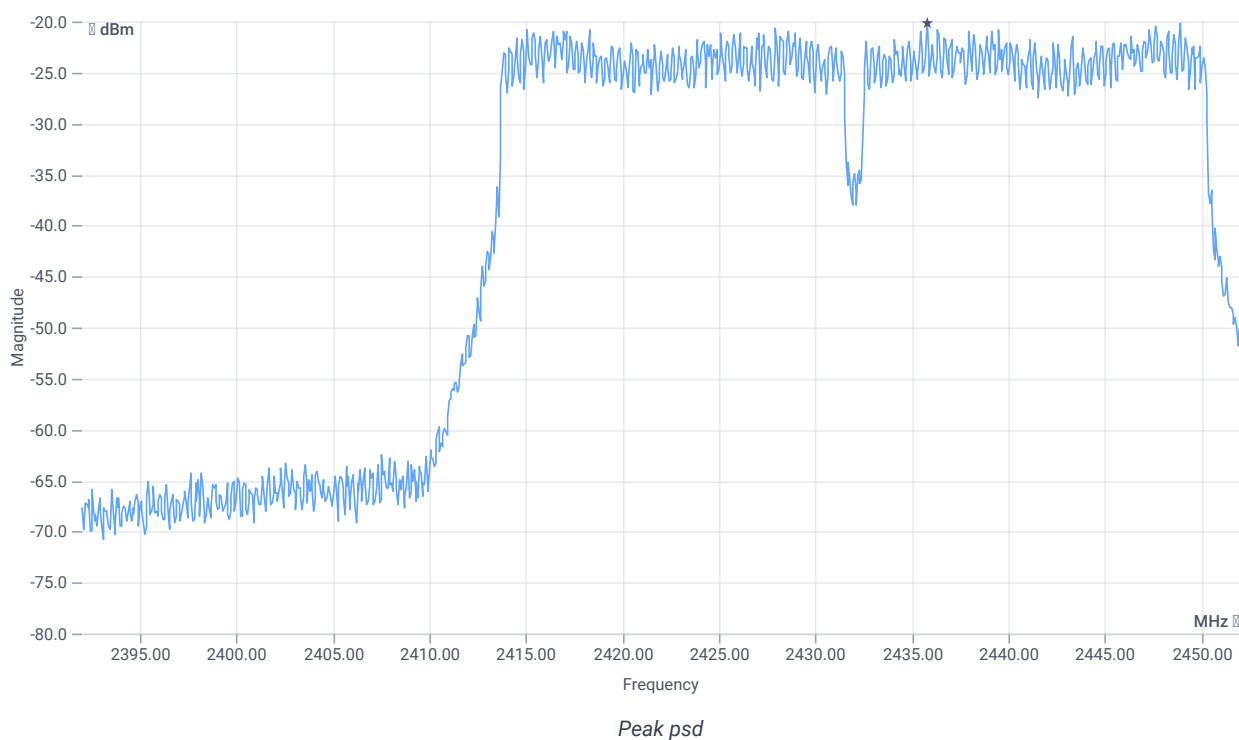

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-20.14	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:04:15
Ambit temp [°C] humidity [rel%]	23.4 33
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2422 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	1.90	dBm	INFO
Ref. frequency	---	---	2429.490	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.90 8.32 15
Start [MHz] Stop [MHz]	2392.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

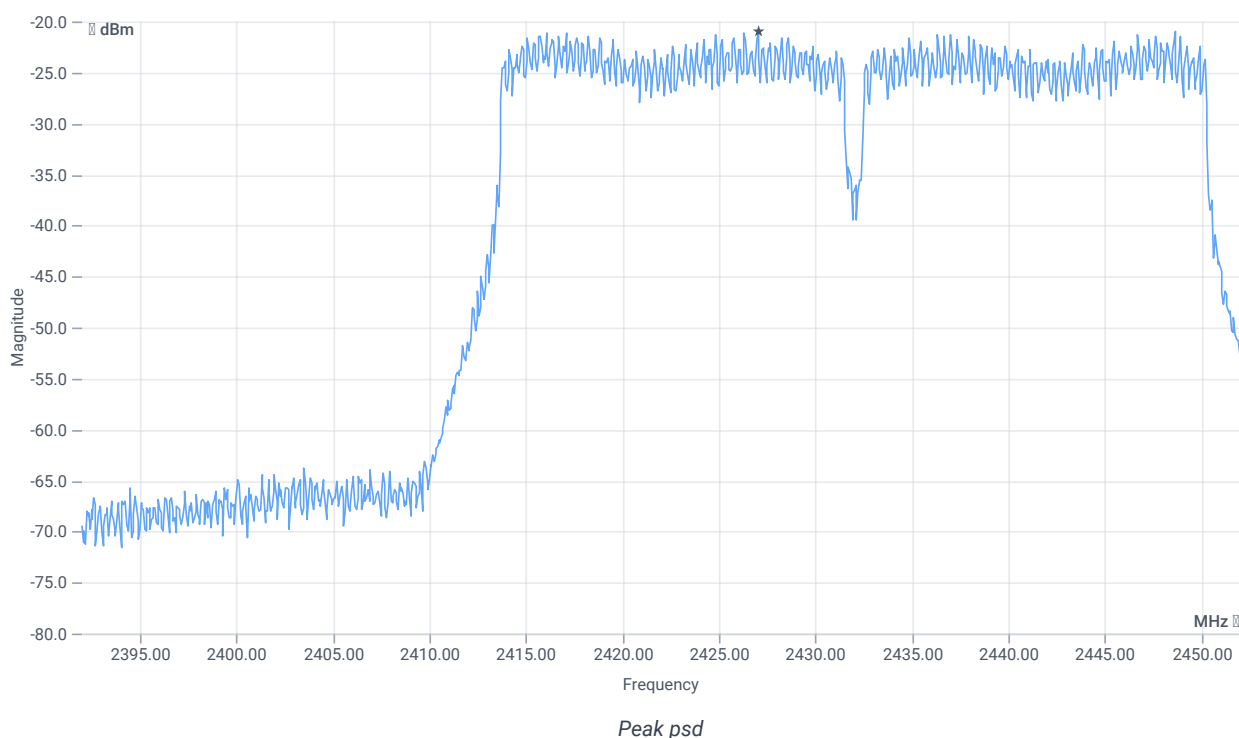

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-20.99	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:20:22
Ambit temp [°C] humidity [rel%]	23.1 33
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.95	dBm	INFO
Ref. frequency	---	---	2433.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.95 8.3 15
Start [MHz] Stop [MHz]	2407.000 2467.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

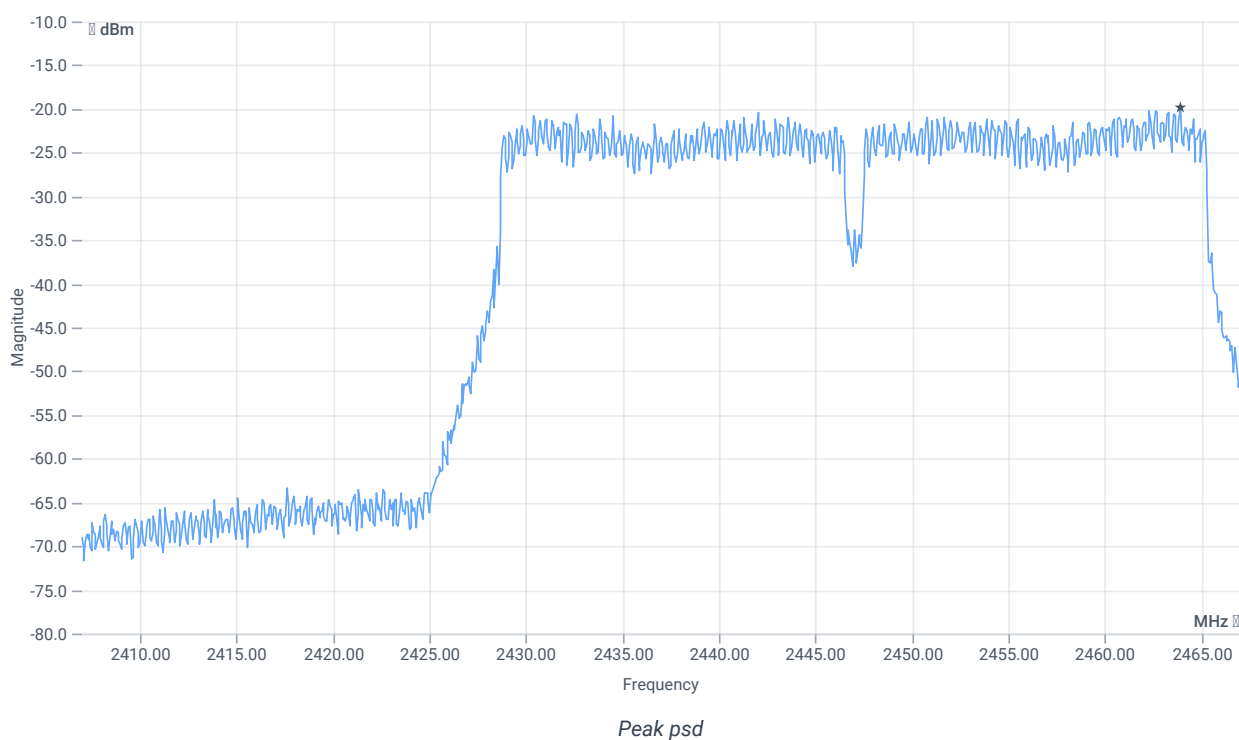

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-19.91	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:36:22
Ambit temp [°C] humidity [rel%]	22.7 34
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.47	dBm	INFO
Ref. frequency	---	---	2463.670	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.47 8.33 15
Start [MHz] Stop [MHz]	2407.000 2467.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

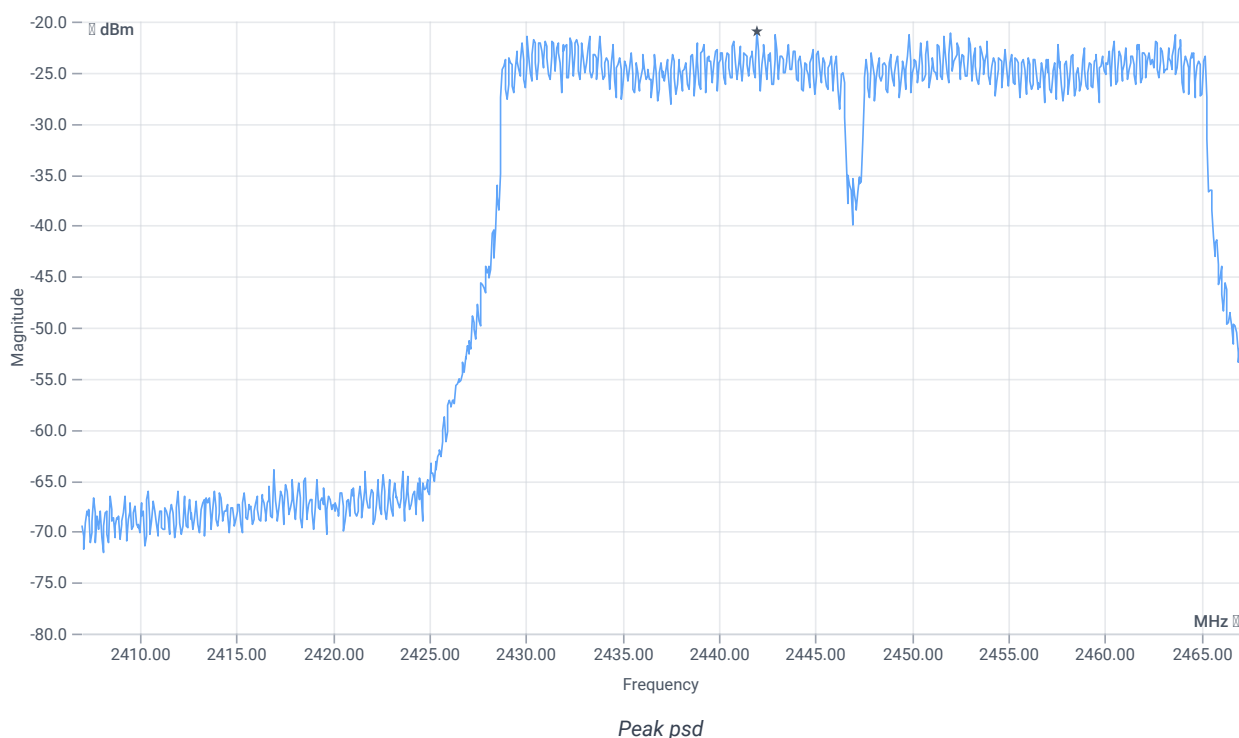

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-21.05	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 21:52:29
Ambit temp [°C] humidity [rel%]	23.6 33
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2452 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.36	dBm	INFO
Ref. frequency	---	---	2466.890	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.36 8.31 20
Start [MHz] Stop [MHz]	2422.000 2482.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

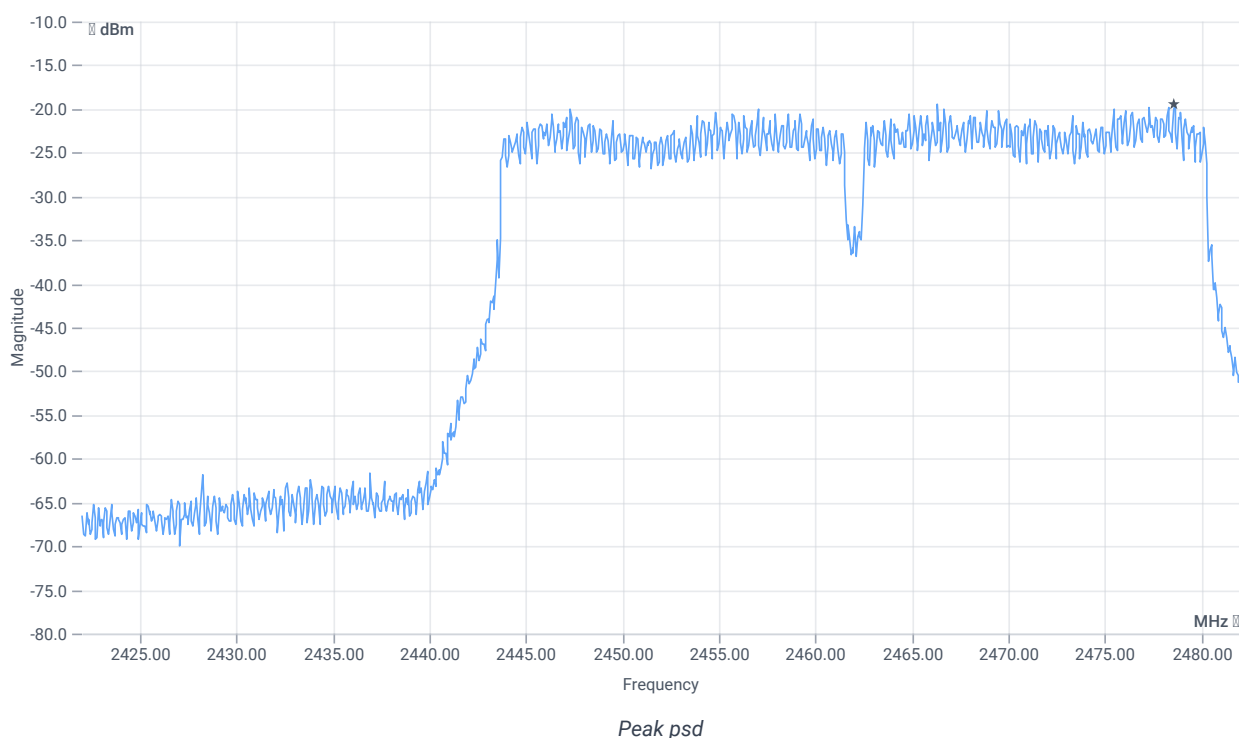

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-19.38	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode

References

TC start	10.04.2024 22:08:29
Ambit temp [°C] humidity [rel%]	23.6 33
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2452 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	1.63	dBm	INFO
Ref. frequency	---	---	2459.490	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.63 8.34 15
Start [MHz] Stop [MHz]	2422.000 2482.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

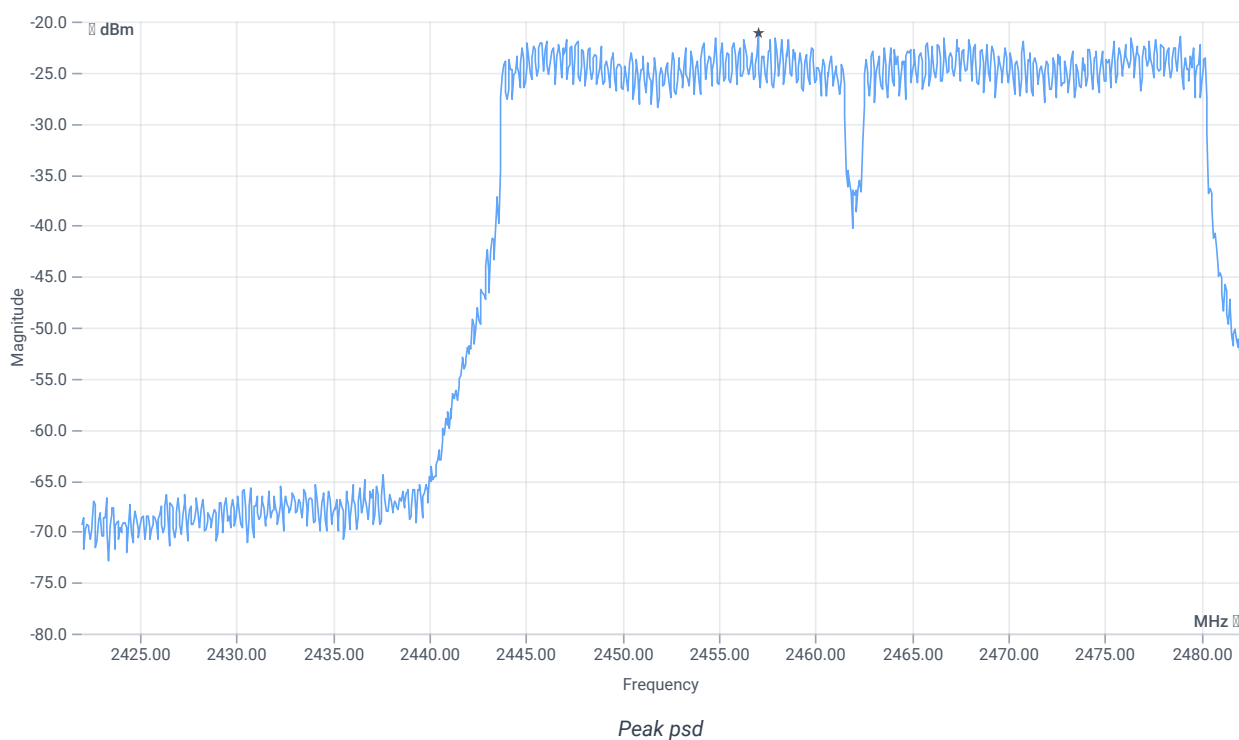

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-21.09	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode

References

TC start	11.04.2024 09:02:02
Ambit temp [°C] humidity [rel%]	23.2 34
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.30	dBm	INFO
Ref. frequency	---	---	2460.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.30 8.37 25
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

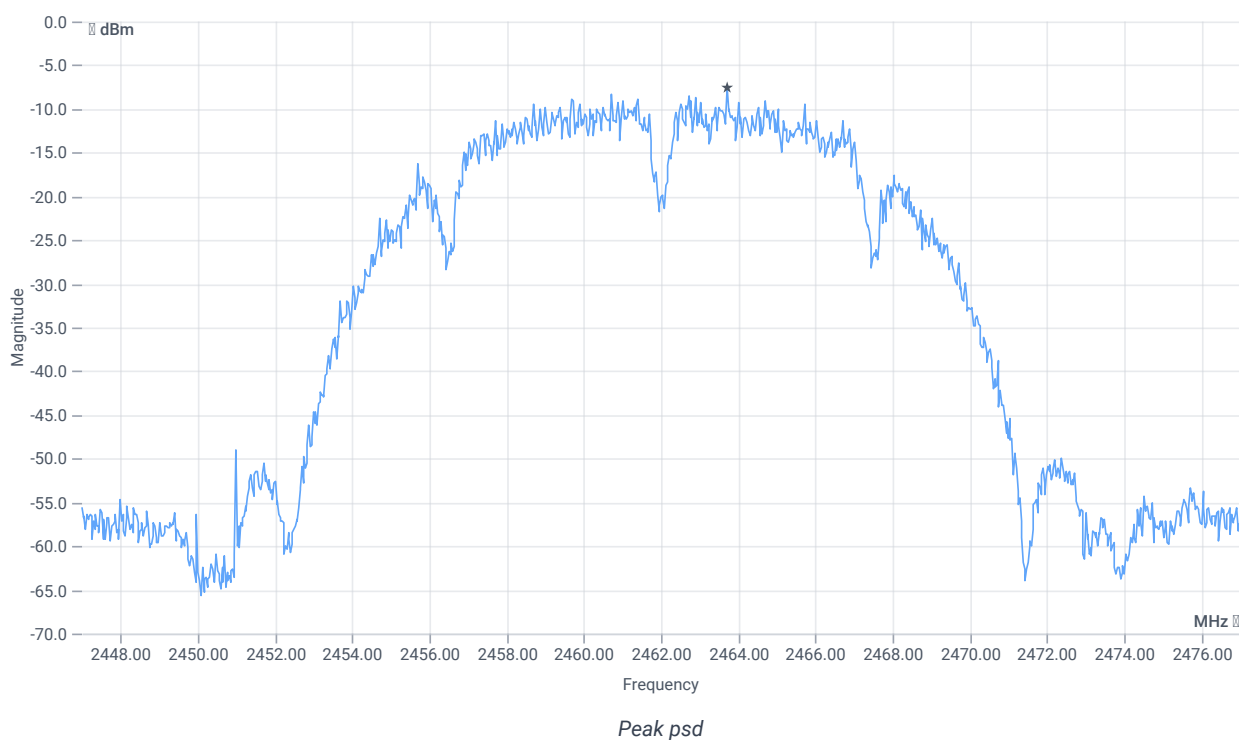

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-7.57	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode

References

TC start	11.04.2024 08:46:16
Ambit temp [°C] humidity [rel%]	24.3 32
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.08	dBm	INFO
Ref. frequency	---	---	2463.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.08 8.34 25
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

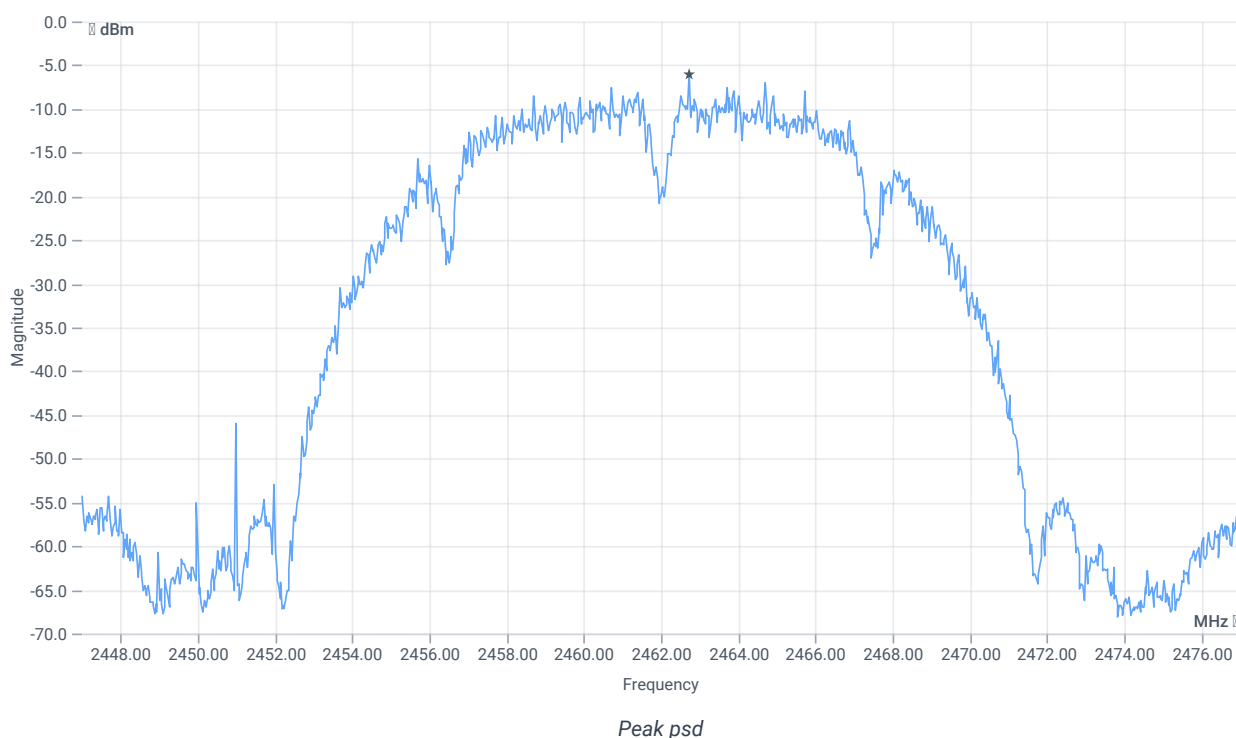

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-6.09	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:00:29
Ambit temp [°C] humidity [rel%]	27.0 28
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0


Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2412 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.07	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

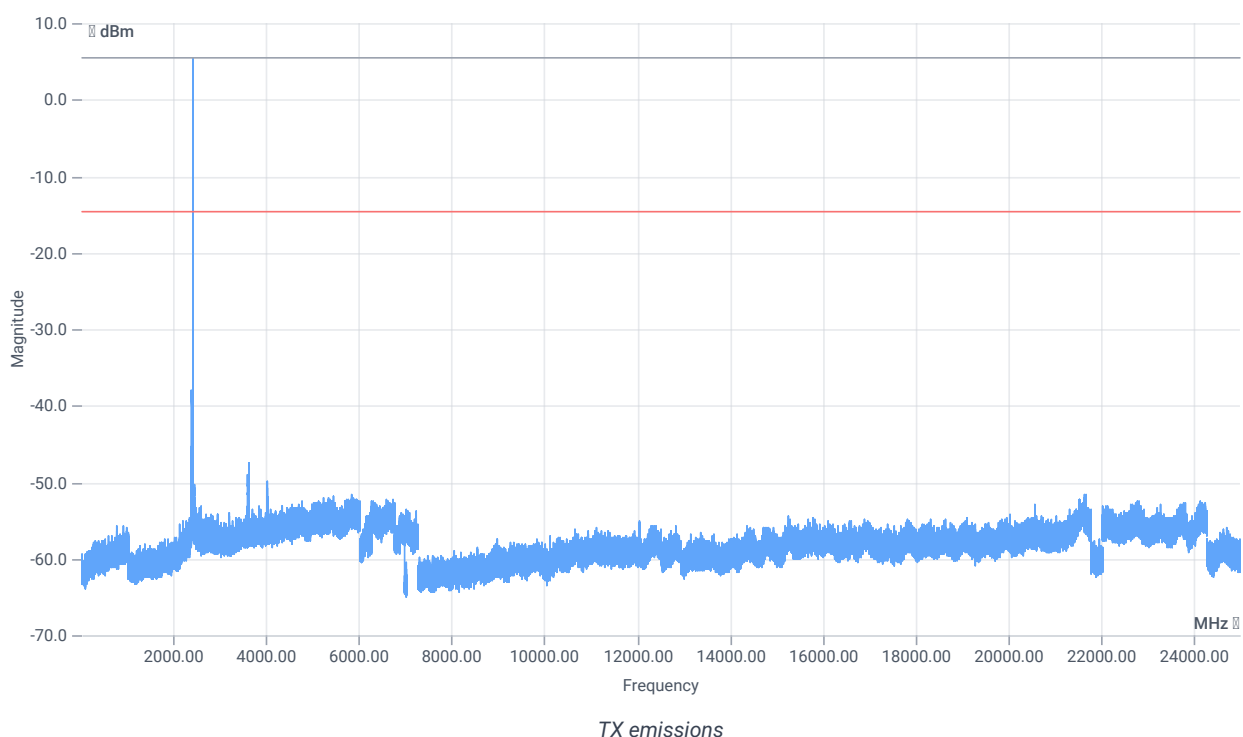

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.07 15.22 10
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

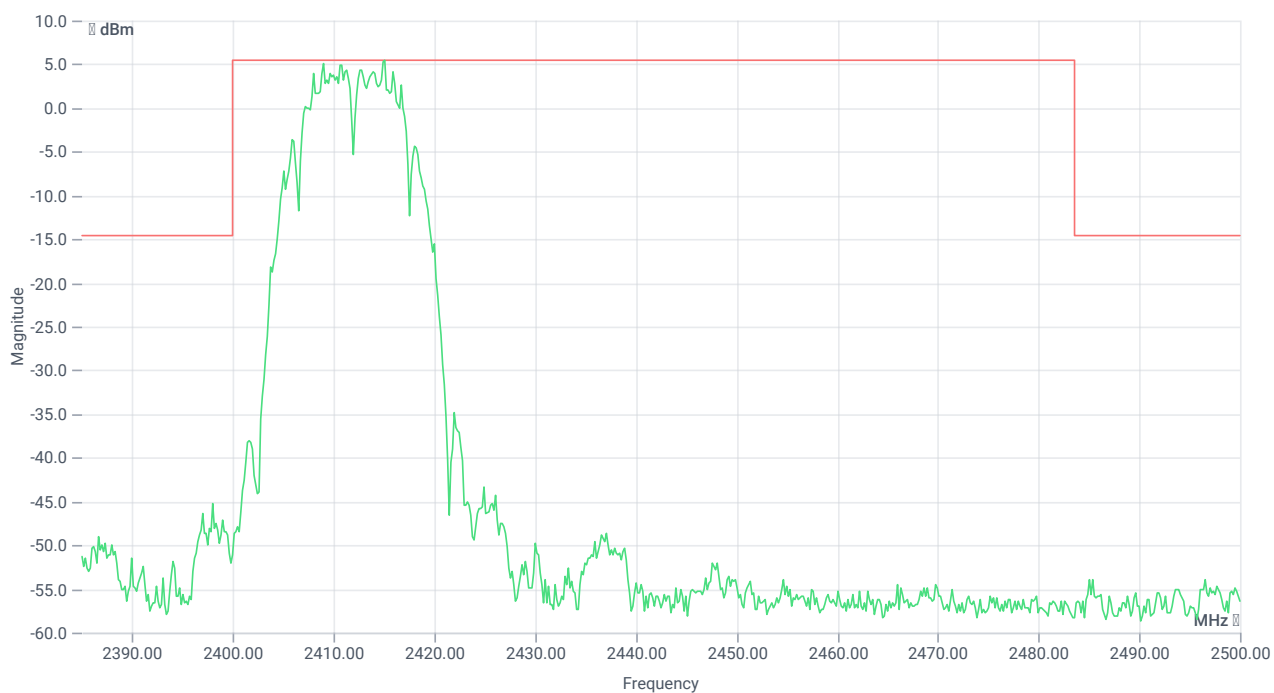

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2415.00 MHz	---	---	5.44	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2398 MHz	0	---	30.76	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:16:24
Ambit temp [°C] humidity [rel%]	26.2 28
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0


Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 2412 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.13	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

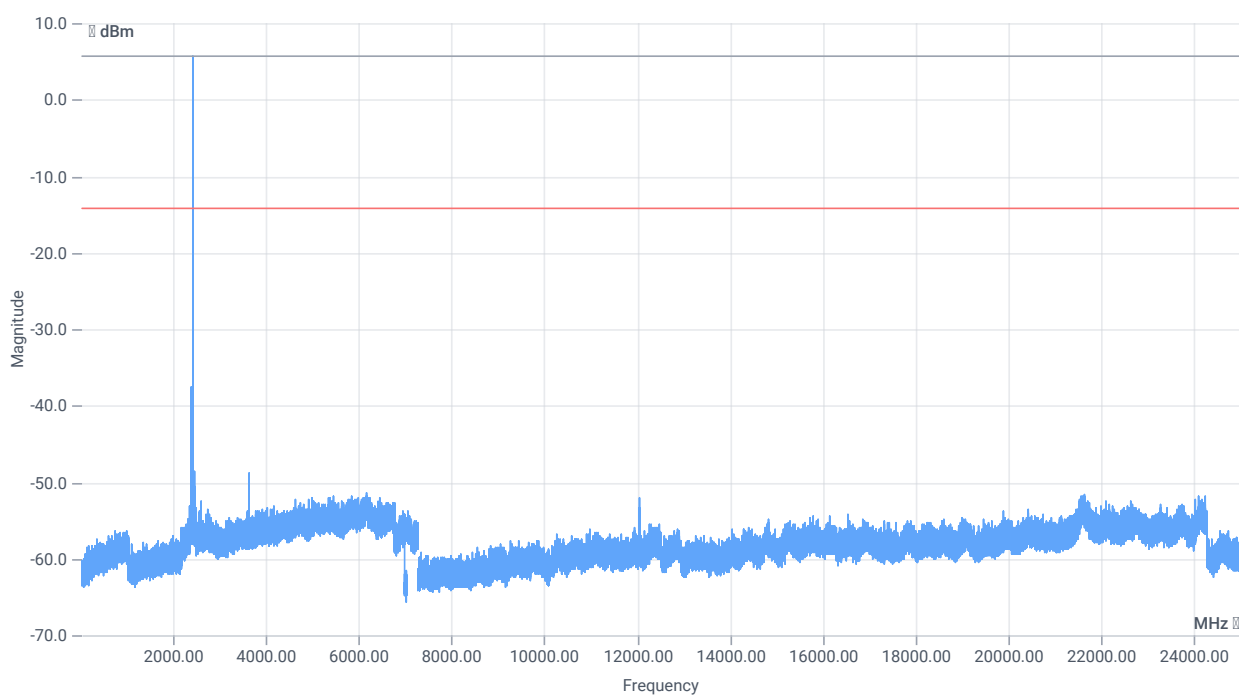

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.13 15.18 10
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

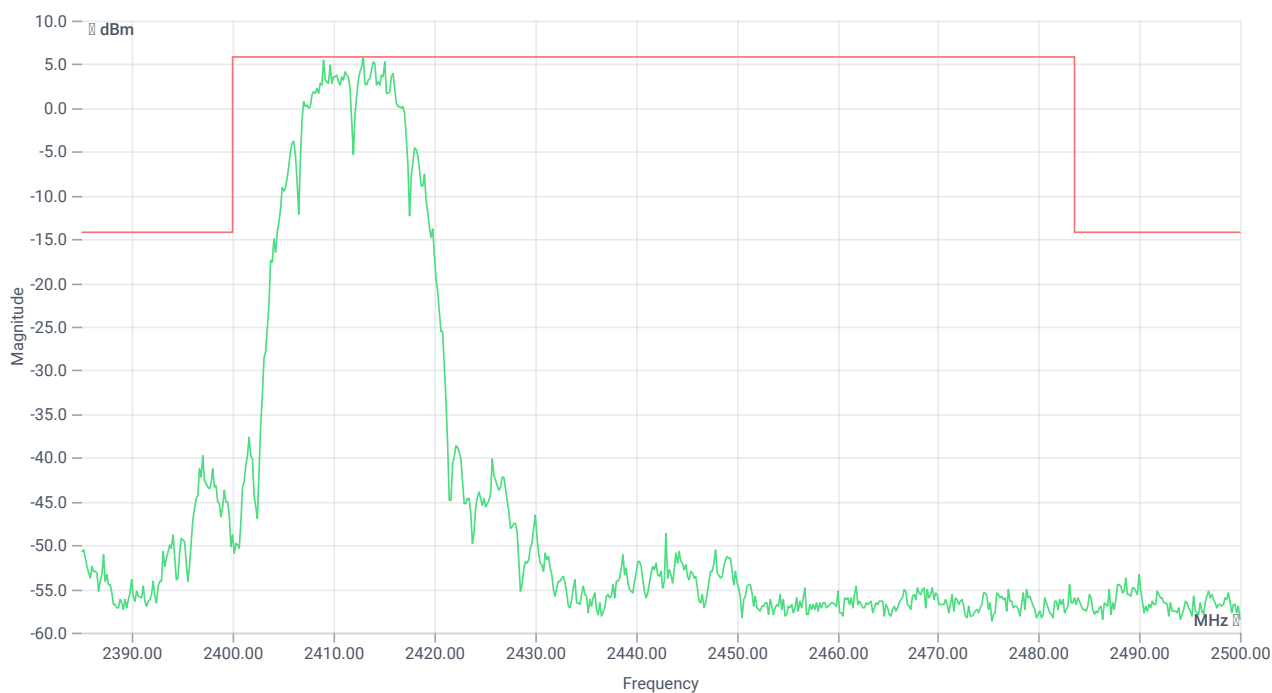

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2413.00 MHz	---	---	5.78	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-138.83	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:32:29
Ambit temp [°C] humidity [rel%]	25.8 29
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0


Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.50	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

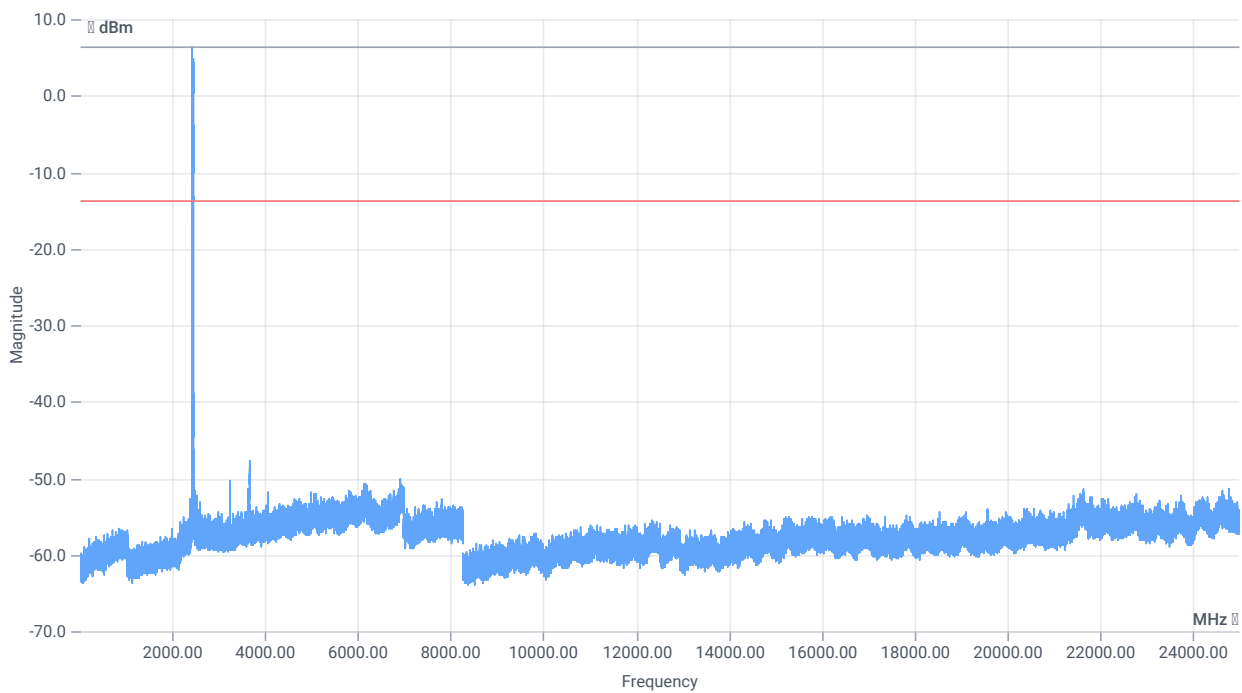

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.50 15.22 15
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE



RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2436.00 MHz	---	---	6.32	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 3656.167 MHz	0	---	34.09	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode

References

TC start	10.04.2024 16:48:29
Ambit temp [°C] humidity [rel%]	25.0 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0


Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 2437 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.76	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

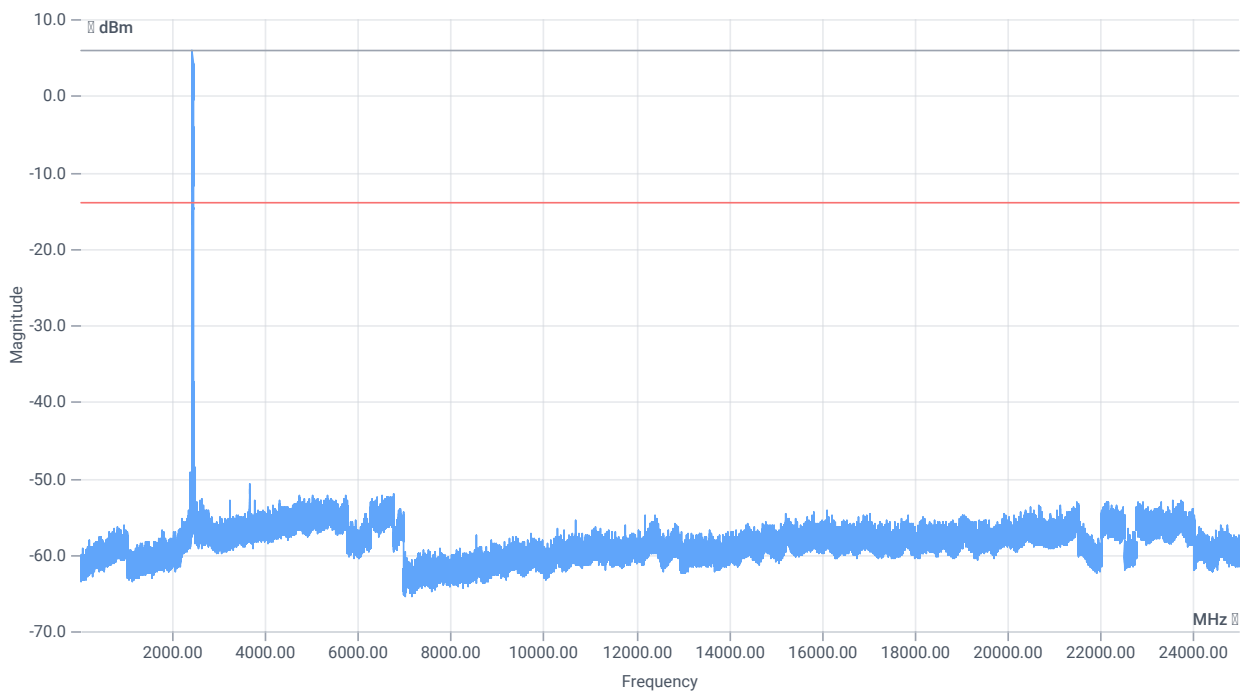

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.76 15.18 10
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

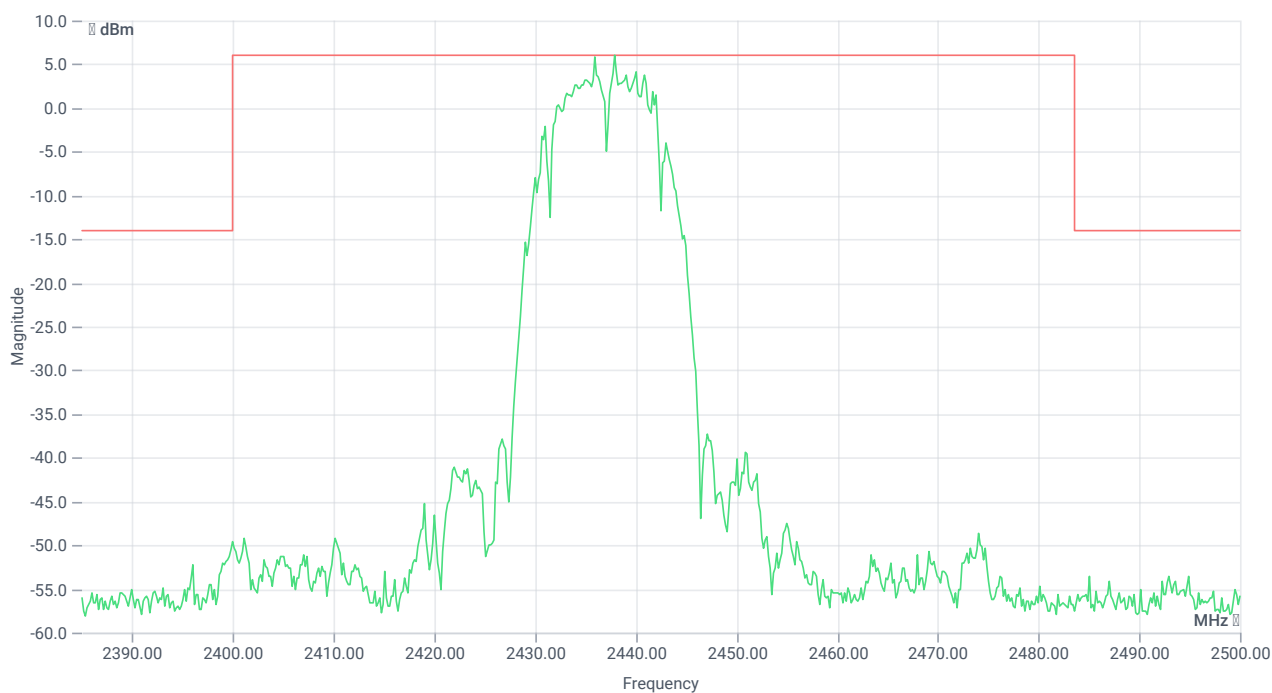

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2437.83 MHz	---	---	5.94	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-138.67	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode

References

TC start	10.04.2024 17:36:47
Ambit temp [°C] humidity [rel%]	24.4 32
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0


Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.37	dBm	INFO
Ref. frequency	---	---	2414.500	MHz	INFO

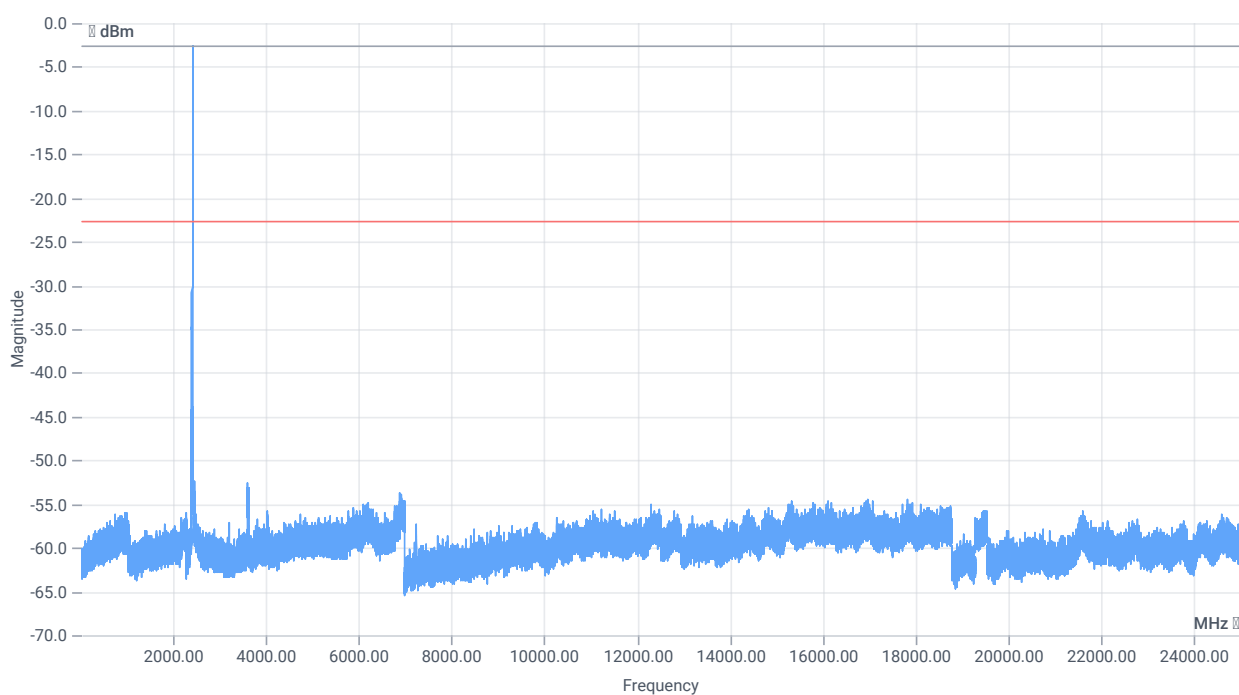

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.37 15.22 10
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE



RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2414.50 MHz	---	---	-2.62	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2399.333 MHz	0	---	21.57	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode

References

TC start	10.04.2024 17:52:49
Ambit temp [°C] humidity [rel%]	24.1 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0


Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.45	dBm	INFO
Ref. frequency	---	---	2414.400	MHz	INFO

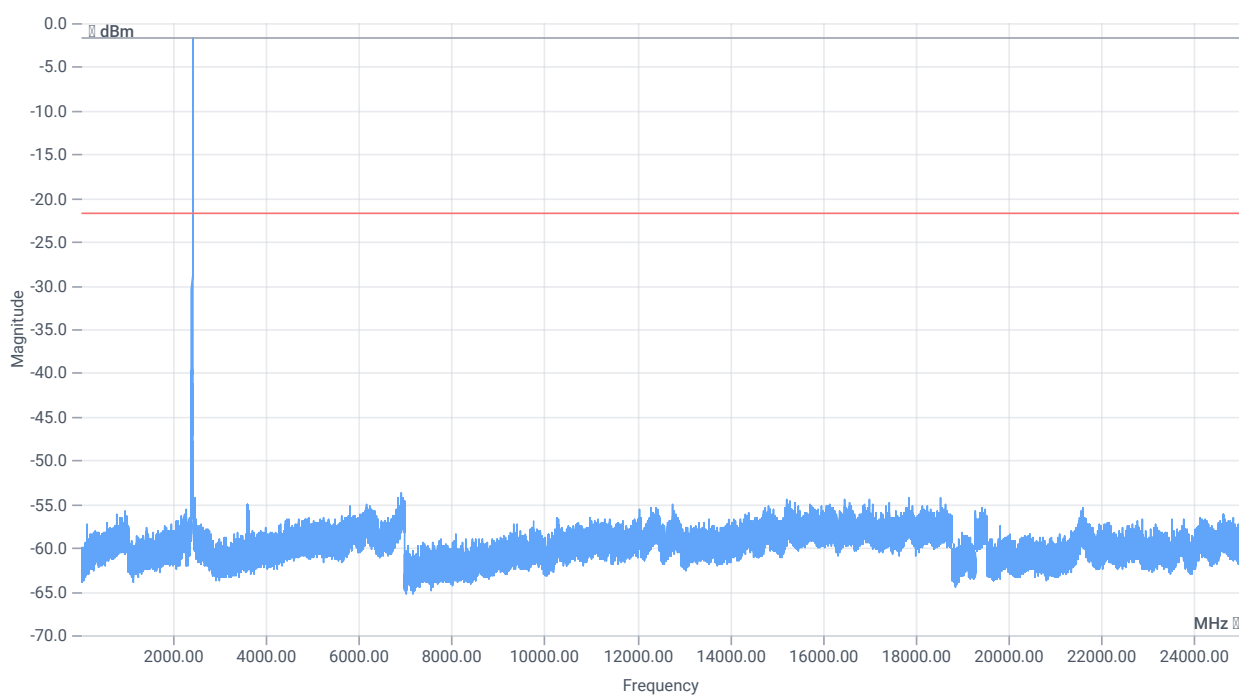

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.45 15.18 10
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE



RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2414.50 MHz	---	---	-1.71	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2398 MHz	0	---	20.4	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:08:57
Ambit temp [°C] humidity [rel%]	23.5 31
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0


Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.57	dBm	INFO
Ref. frequency	---	---	2434.600	MHz	INFO

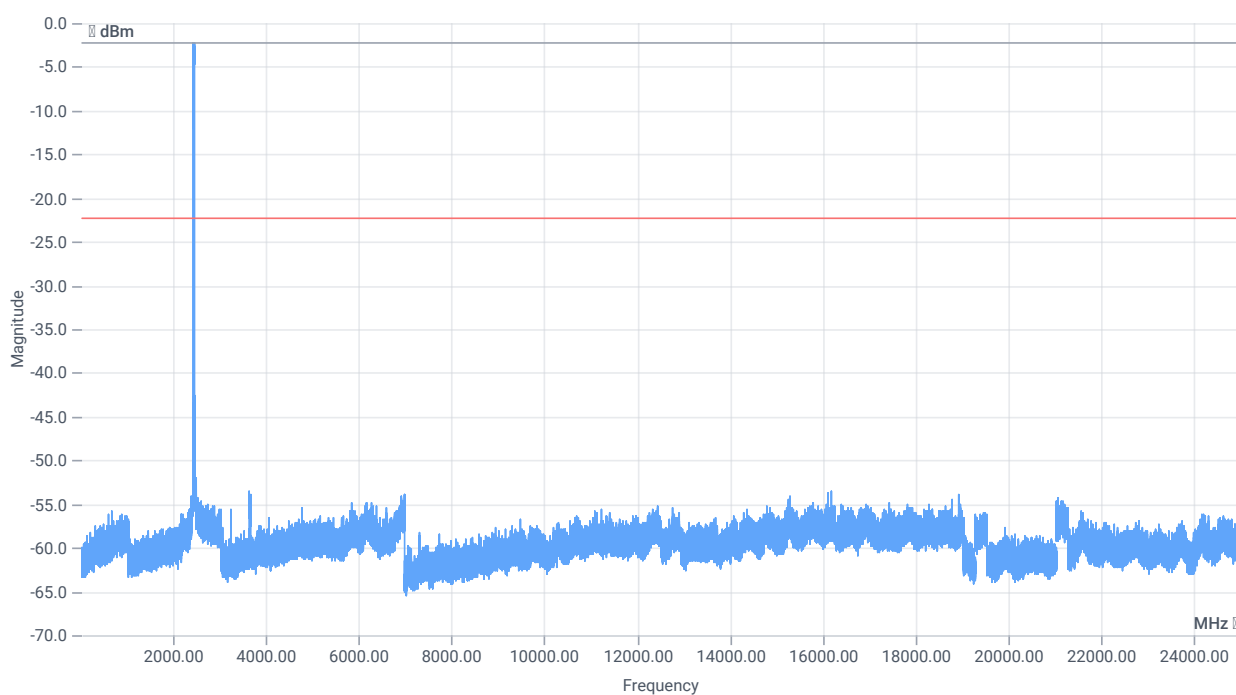

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.57 15.22 10
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE



RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2434.50 MHz	---	---	-2.30	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-138.81	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:24:58
Ambit temp [°C] humidity [rel%]	23.8 30
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0


Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 2437 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.95	dBm	INFO
Ref. frequency	---	---	2439.200	MHz	INFO

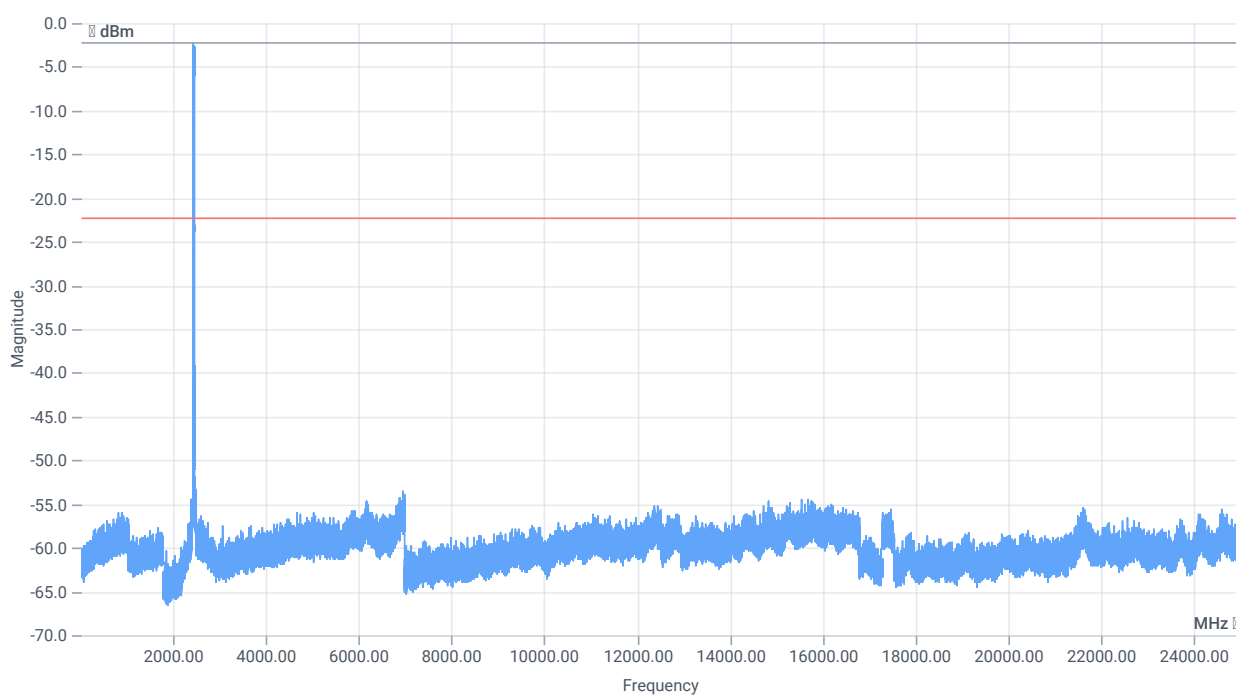

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.95 15.18 10
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

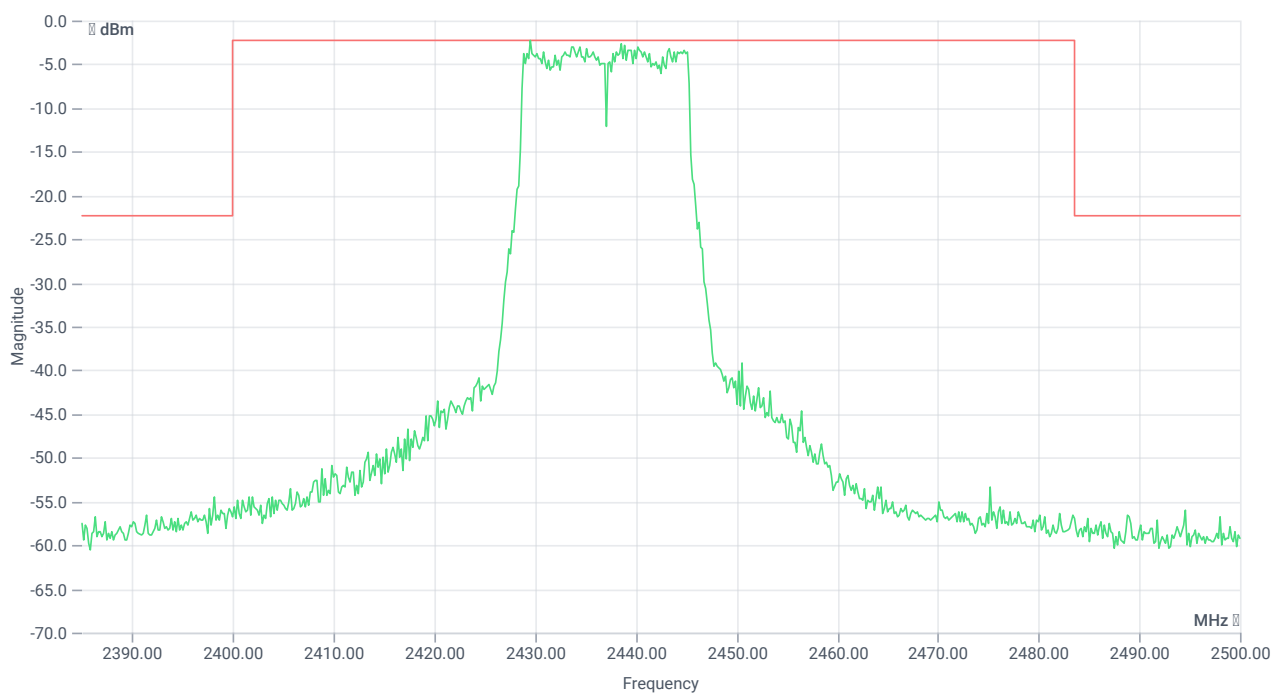

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2429.50 MHz	---	---	-2.33	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 6939 MHz	0	---	31.17	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode

References

TC start	10.04.2024 18:41:05
Ambit temp [°C] humidity [rel%]	23.8 30
System version	5.0.3.8
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001