



REPORT No.: SZ22090252W03

TEST REPORT

APPLICANT : Linkplay Technology Inc.

PRODUCT NAME : WiiM Pro Hi-Res Audio Streamer

MODEL NAME : ASR002

BRAND NAME : WiiM

FCC ID : 2ANOG-ASR002

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2022-10-18

TEST DATE : 2022-10-29 to 2022-11-02

ISSUE DATE : 2022-11-21

Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. Modulation Type and Data Rate of EUT	4
1.4. The Channel Number and Frequency	4
1.5. Test Standards and Results	5
1.6. Environmental Conditions	6
2. 47 CFR Part 15C Requirements	7
2.1. Conducted Emission	7
2.2. Restricted Frequency Bands	11
2.3. Radiated Emission	21
Annex A Test Uncertainty	34
Annex B Testing Laboratory Information	35

Change History		
Version	Date	Reason for change
1.0	2022-11-21	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Linkplay Technology Inc.
Applicant Address:	8F-8036, Qianren Building, No.7, Yingcui Road, Jiangning District, Nanjing, China
Manufacturer:	Linkplay Technology Inc.
Manufacturer Address:	8F-8036, Qianren Building, No.7, Yingcui Road, Jiangning District, Nanjing, China

1.2. Equipment Under Test (EUT) Description

Product Name:	WiiM Pro Hi-Res Audio Streamer	
Sample No.:	4#	
Hardware Version:	V03	
Software Version:	4.7.433055	
Modulation Technology:	DSSS, OFDM	
Modulation Mode:	802.11b, 802.11g, 802.11n (HT20)	
Operating Frequency Range:	802.11b/g/ n (HT20): 2412MHz–2462MHz	
Antenna Type:	PIFA Antenna	
Antenna Gain:	1.90dBi	
Accessory Information:	AC Adapter	
	Brand Name:	N/A
	Model No.:	MDY-08-EZ
	Serial No.:	N/A
	Rated Output:	5V=2A
	Rated Input:	100-240V~50/60Hz, 0.35A
	Manufacturer:	Jiangsu Chenyang Electron Co.,Ltd.

Note 1: The test results of all conducted test items please refer to the module FCC test report (Report No.: SZ20110203W03, FCC ID: 2ANOG-A98M), which issued on December 18, 2020 by Shenzhen Morlab Communications Technology Co., Ltd. We only recorded the radiated test result in this report.

1.3. Modulation Type and Data Rate of EUT

Modulation Technology	Modulation Type	Data Rate (Mbps) ^{Note1}
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/ 11
OFDM (802.11g)	BPSK	6 / 9
	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
OFDM (802.11n (HT20))	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65

Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

1.4. The Channel Number and Frequency

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11b/g/n (HT20)	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432		
	6	2437		
	7	2442		

Note 1: The black bold channels were selected for test.



1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A _{Note1}	N/A	N/A
2	N/A	Duty Cycle Of Test Signal	N/A	N/A _{Note1}	N/A	N/A
3	15.247(b)	Maximum Peak and Average Conducted Output Power	N/A	N/A _{Note1}	N/A	N/A
4	15.247(a)	Bandwidth	N/A	N/A _{Note1}	N/A	N/A
5	15.247(d)	Conducted Spurious Emission and Band Edge	N/A	N/A _{Note1}	N/A	N/A
6	15.247(e)	Power Spectral Density	N/A	N/A _{Note1}	N/A	N/A
7	15.207	Conducted Emission	Oct. 29, 2022	Fan Zehang	PASS	No deviation
8	15.247(d)	Restricted Frequency Bands	Oct. 29, 2022	Gao Jianrou	PASS	No deviation
9	15.209, 15.247(d)	Radiated Emission	Oct. 30, 2022	Gao Jianrou	PASS	No deviation

Note 1: The test results of all conducted test items please refer to the module FCC test report (Report No.: SZ20110203W03, FCC ID: 2ANOG-A98M), which issued on December 18, 2020 by Shenzhen Morlab Communications Technology Co., Ltd.

Note 2: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013, KDB558074 D01 v05r02.

Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C Requirements

2.1. Conducted Emission

2.1.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.1.2. Test Description

Test Setup:

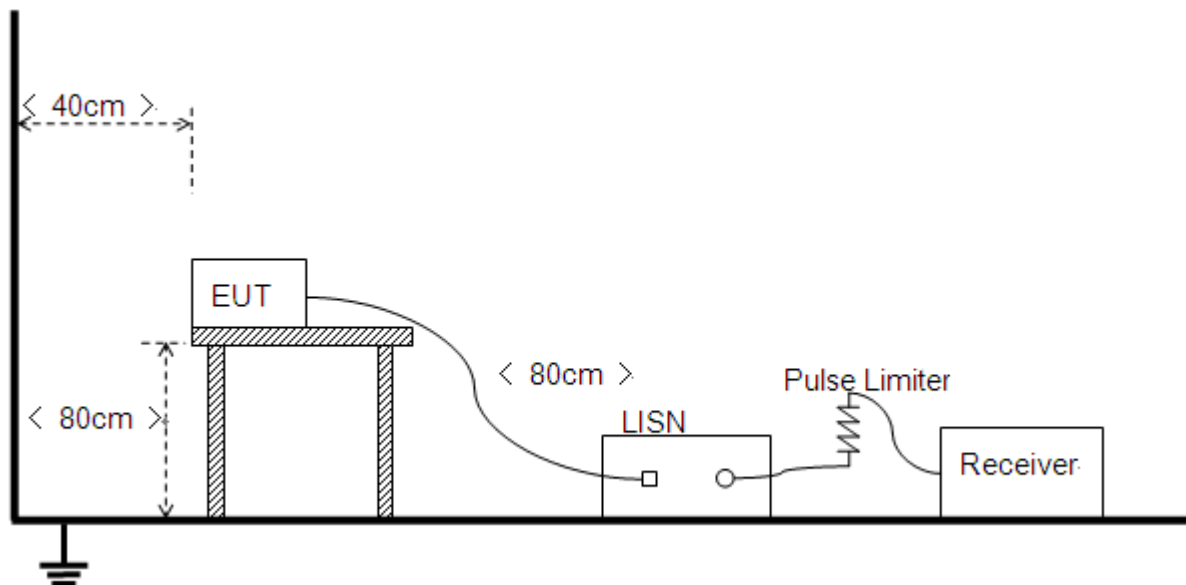

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference



Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.

2.1.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+Adapter+ WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

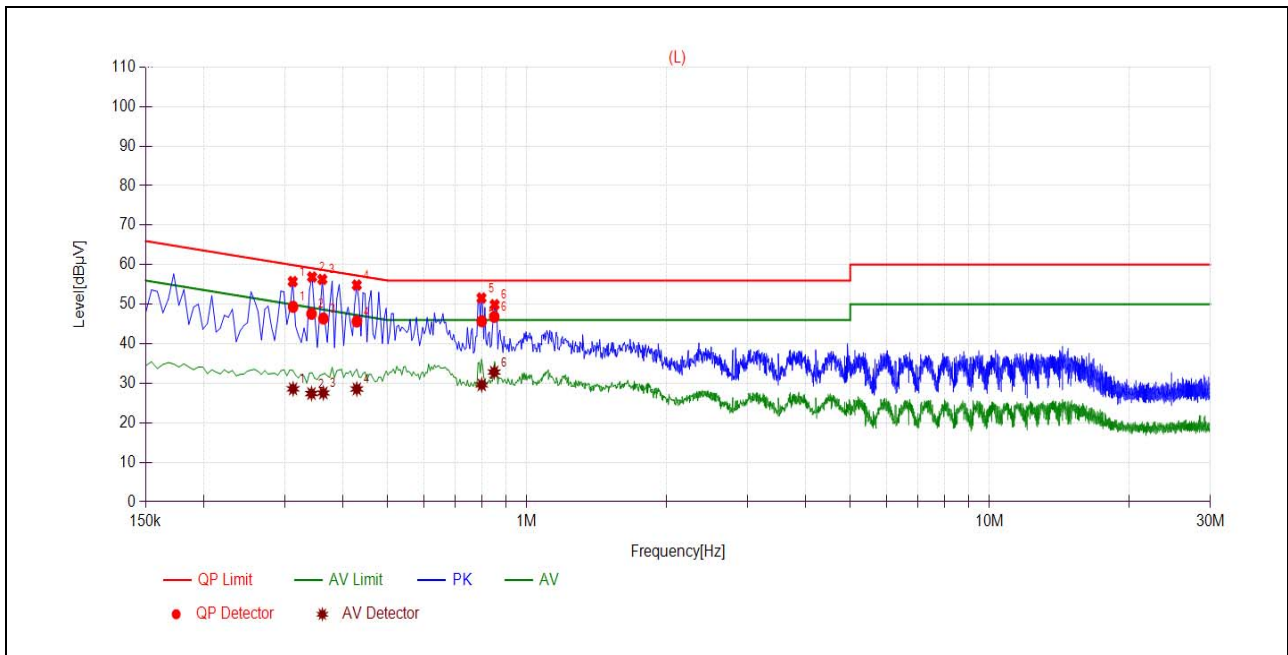

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.3125	49.35	28.59	59.90	49.90	Line	PASS
2	0.3425	47.58	27.40	59.14	49.14		PASS
3	0.3633	46.40	27.55	58.65	48.65		PASS
4	0.4291	45.65	28.56	57.27	47.27		PASS
5	0.7990	45.71	29.62	56.00	46.00		PASS
6	0.8501	46.81	32.83	56.00	46.00		PASS

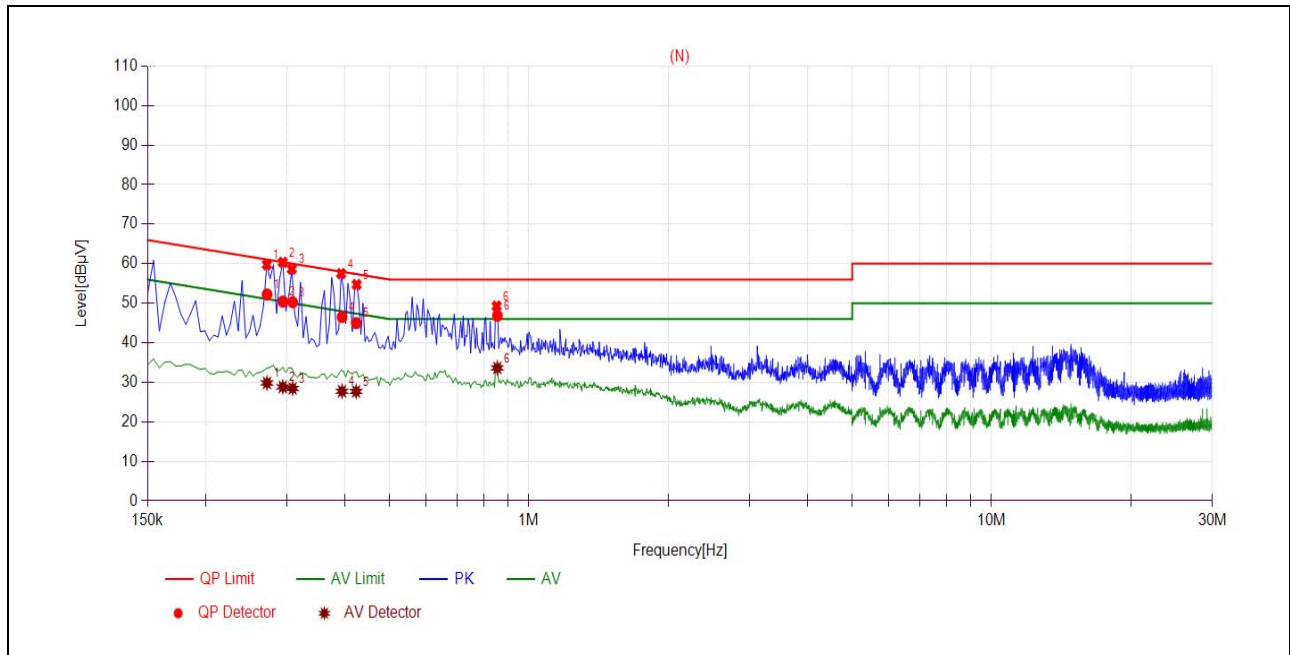

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.2717	52.24	29.83	61.07	51.07	Neutral	PASS
2	0.2939	50.44	28.82	60.41	50.41		PASS
3	0.3087	50.26	28.44	60.00	50.00		PASS
4	0.3947	46.54	27.73	57.96	47.96		PASS
5	0.4234	44.98	27.68	57.38	47.38		PASS
6	0.8549	46.83	33.64	56.00	46.00		PASS


2.2. Restricted Frequency Bands

2.2.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.2.2. Test Description

Test Setup

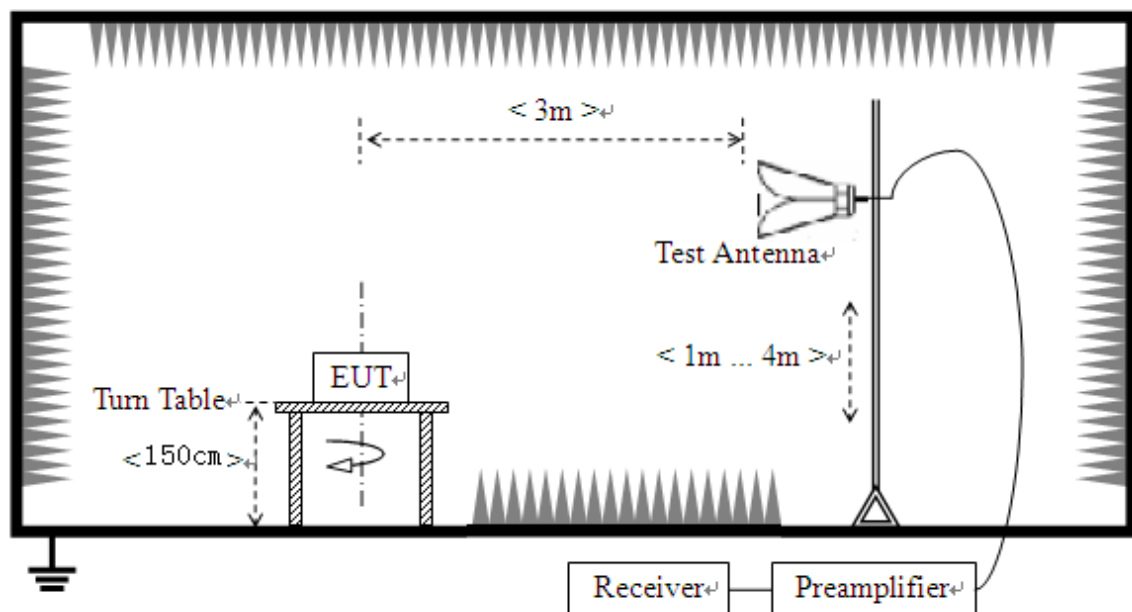

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



2.2.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

2.2.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


802.11b Mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2358.58	PK	22.49	6.74	27.20	56.43	74	PASS
1	2390.00	AV	9.82	6.74	27.20	43.76	54	PASS
11	2489.59	PK	22.64	6.74	27.20	56.58	74	PASS
11	2483.50	AV	9.44	6.74	27.20	43.38	54	PASS




B. Test Plot:

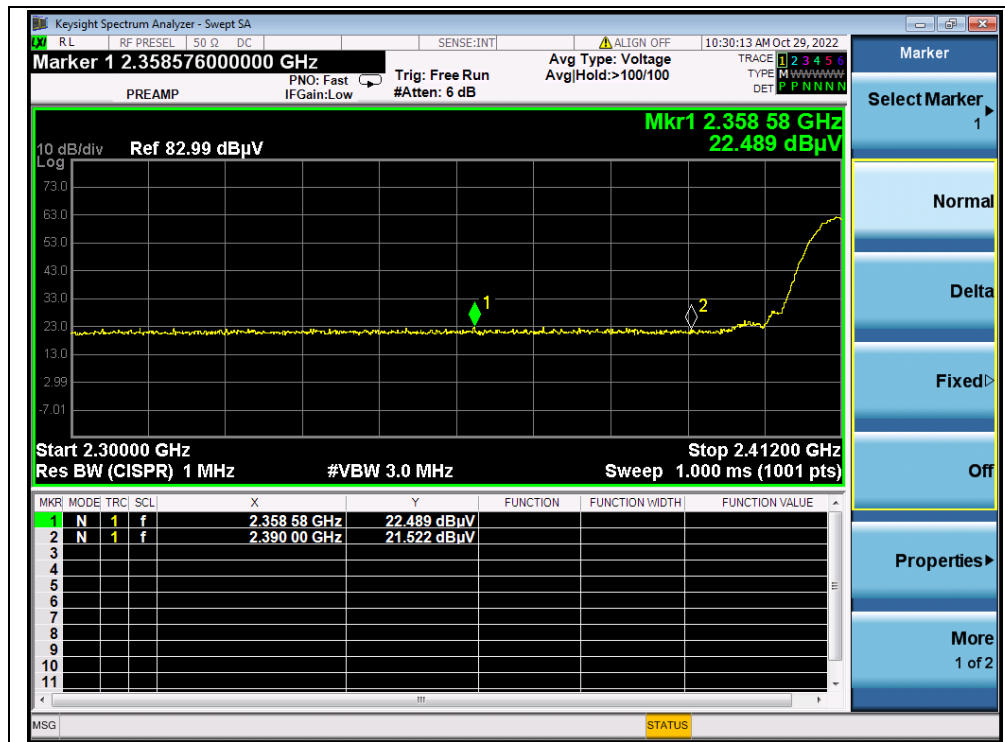


(PEAK, Channel 1, 802.11b)

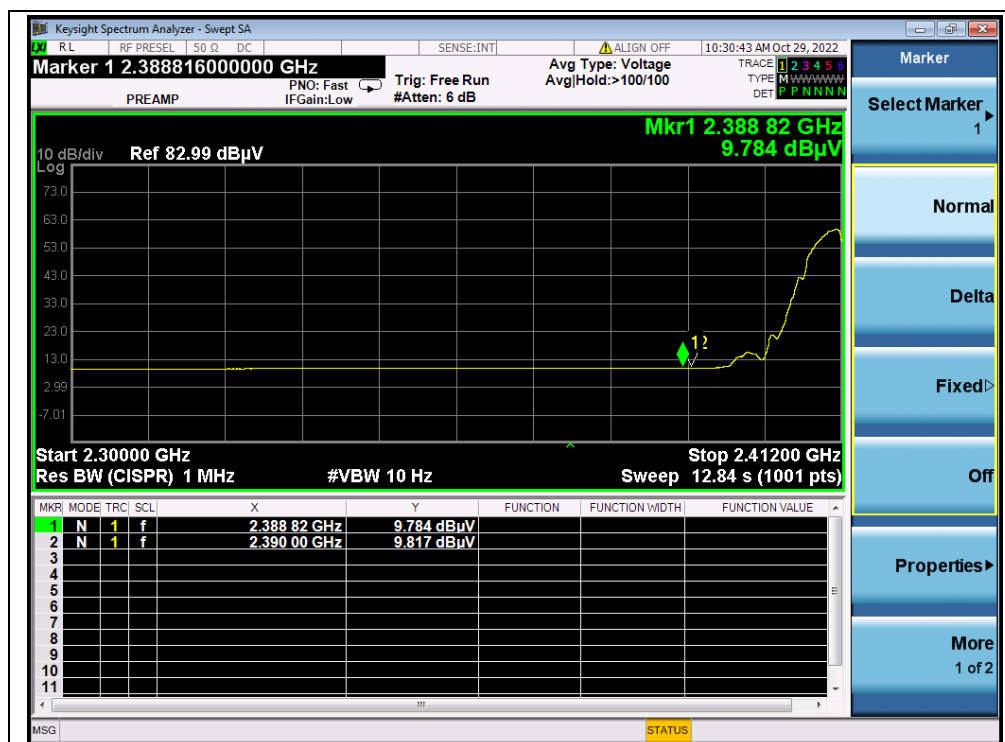

(AVERAGE, Channel 1, 802.11b)

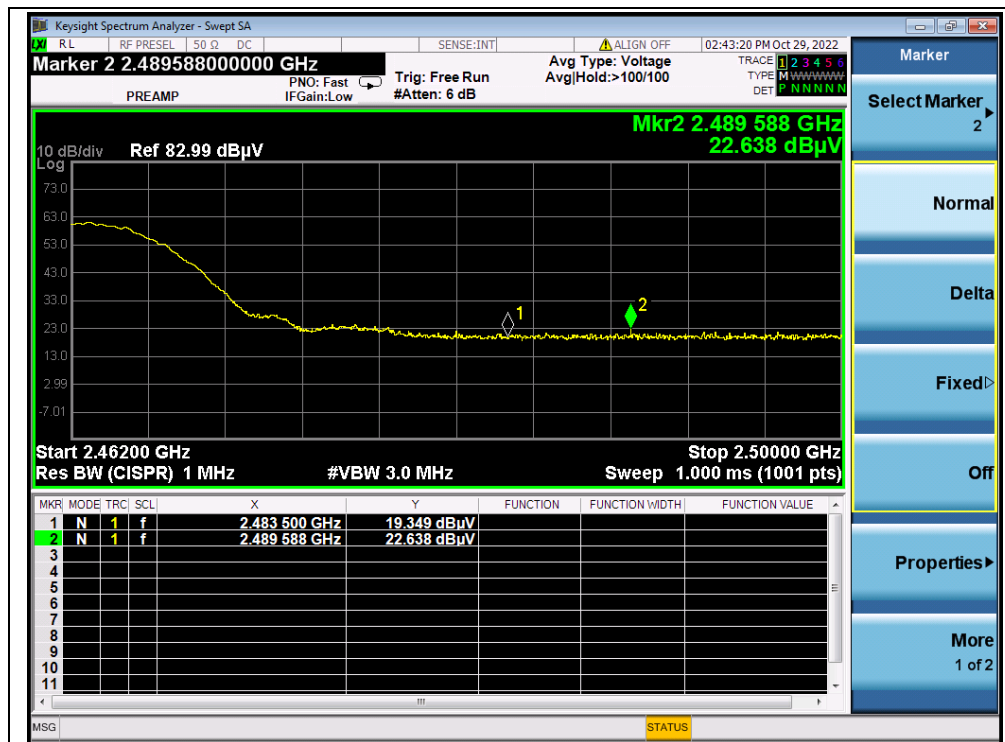

(PEAK, Channel 11, 802.11b)

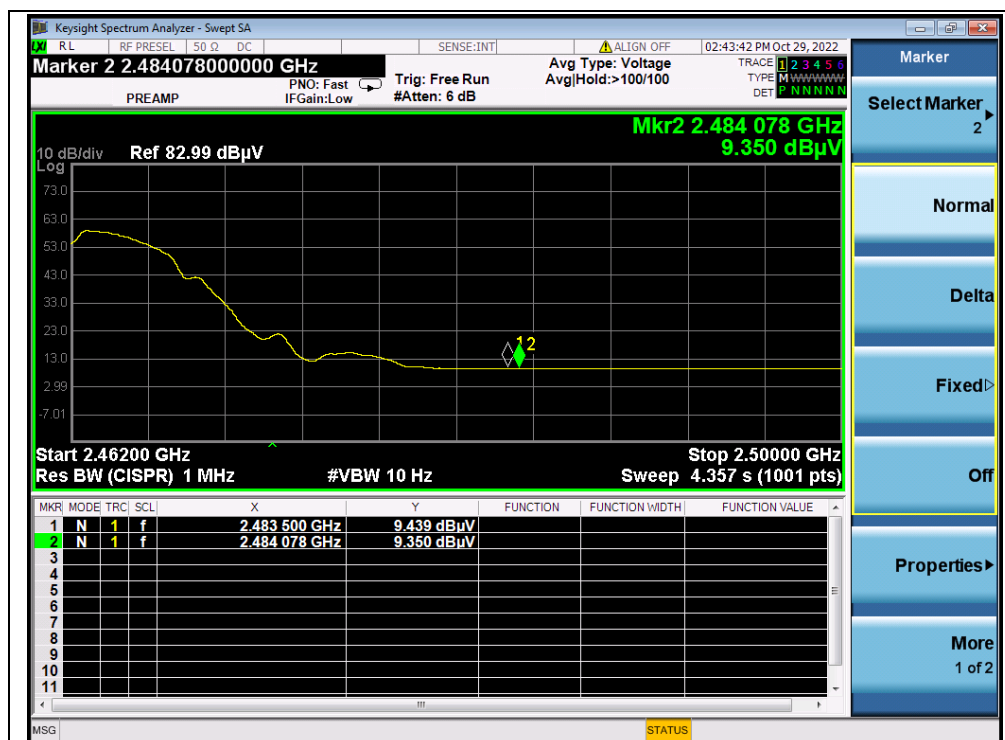

(AVERAGE, Channel 11, 802.11b)




802.11g Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2389.71	PK	25.76	6.74	27.20	59.70	74	PASS
1	2390.00	AV	12.25	6.74	27.20	46.19	54	PASS
11	2483.85	PK	29.95	6.74	27.20	63.89	74	PASS
11	2483.66	AV	15.74	6.74	27.20	49.68	54	PASS


B. Test Plot:

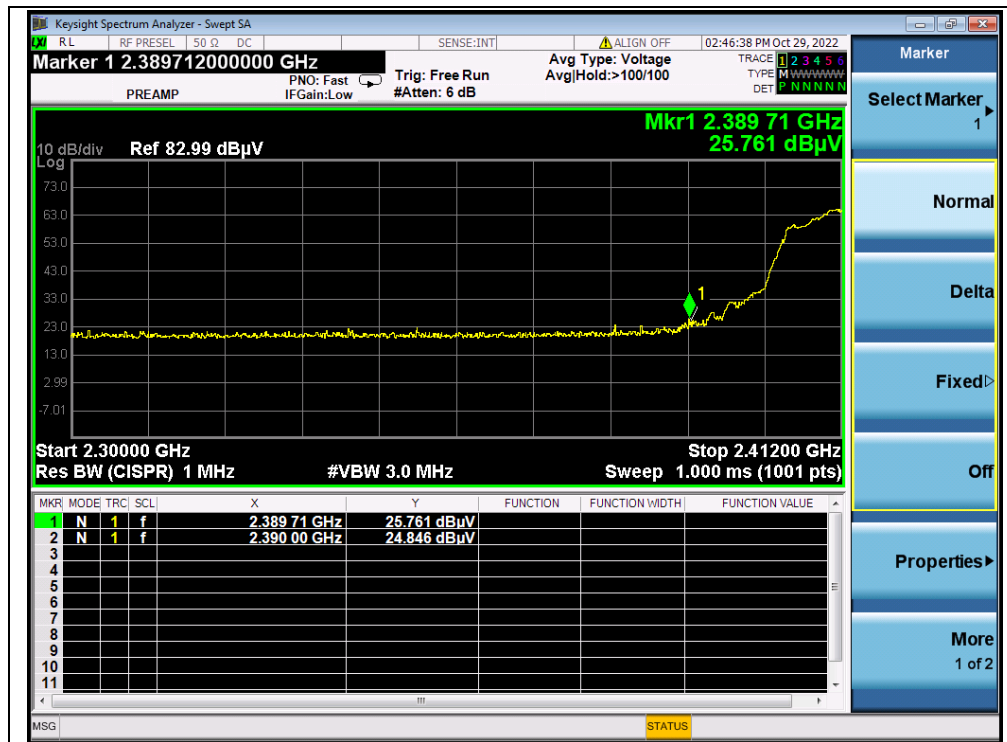


(PEAK, Channel 1, 802.11g)

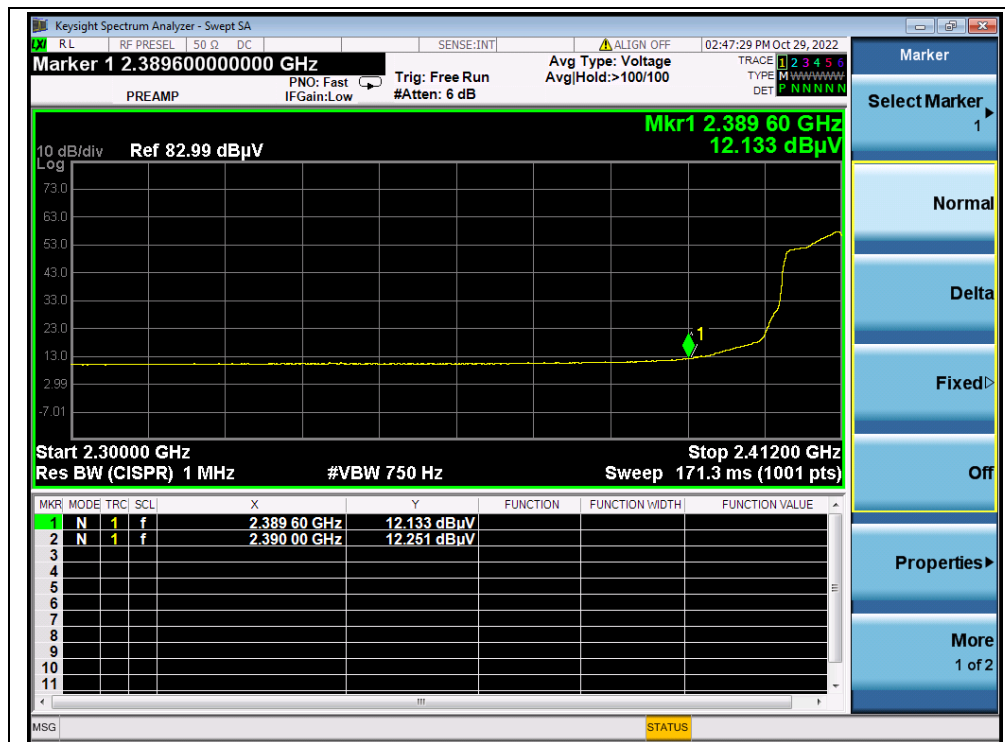

(AVERAGE, Channel 1, 802.11g)

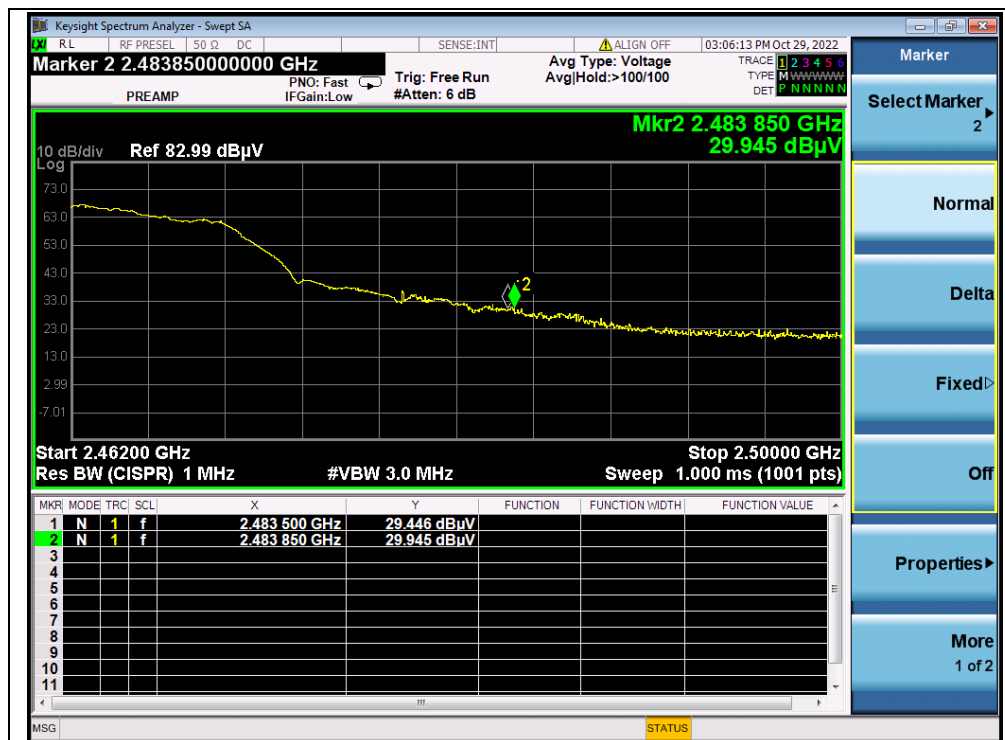

(PEAK, Channel 11, 802.11g)

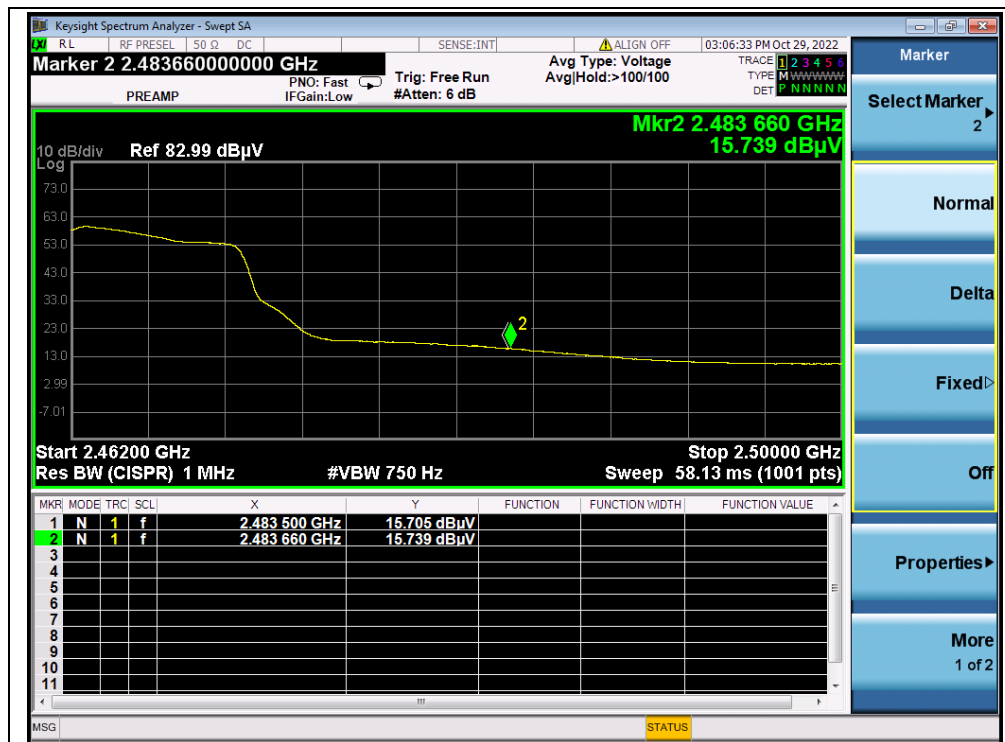

(AVERAGE, Channel 11, 802.11g)




802.11n (HT20) Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2388.93	PK	25.86	6.74	27.20	59.80	74	PASS
1	2390.00	AV	12.54	6.74	27.20	46.48	54	PASS
11	2484.08	PK	31.96	6.74	27.20	65.90	74	PASS
11	2483.96	AV	13.72	6.74	27.20	47.66	54	PASS

B. Test Plot:

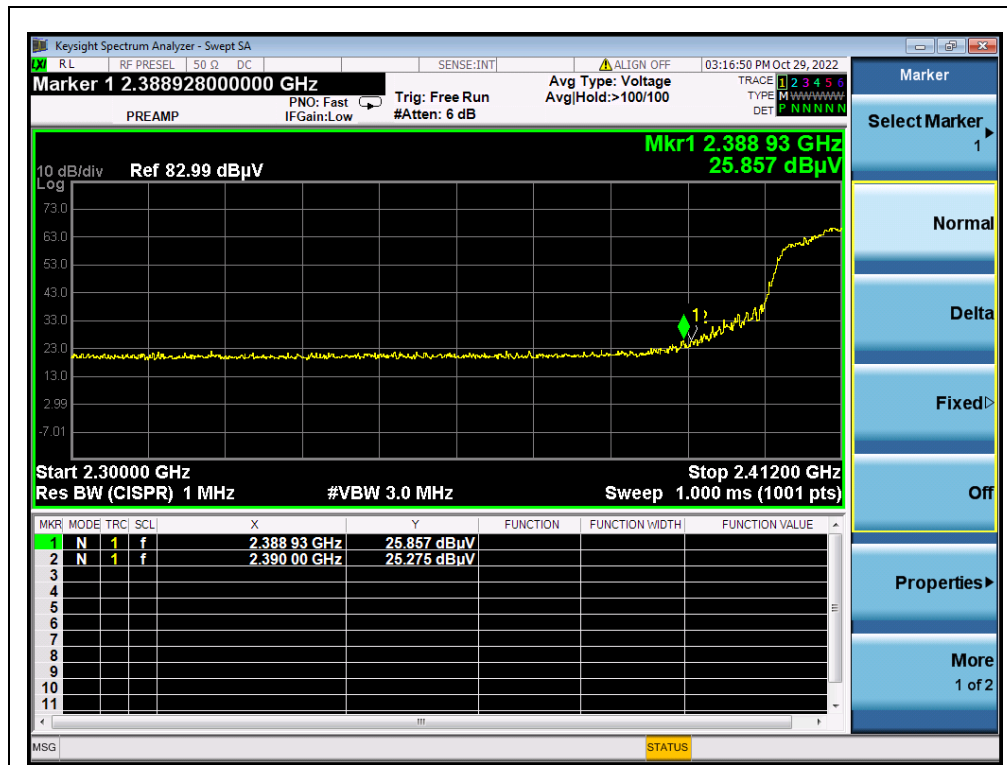


(PEAK, Channel 1, 802.11n (HT20))

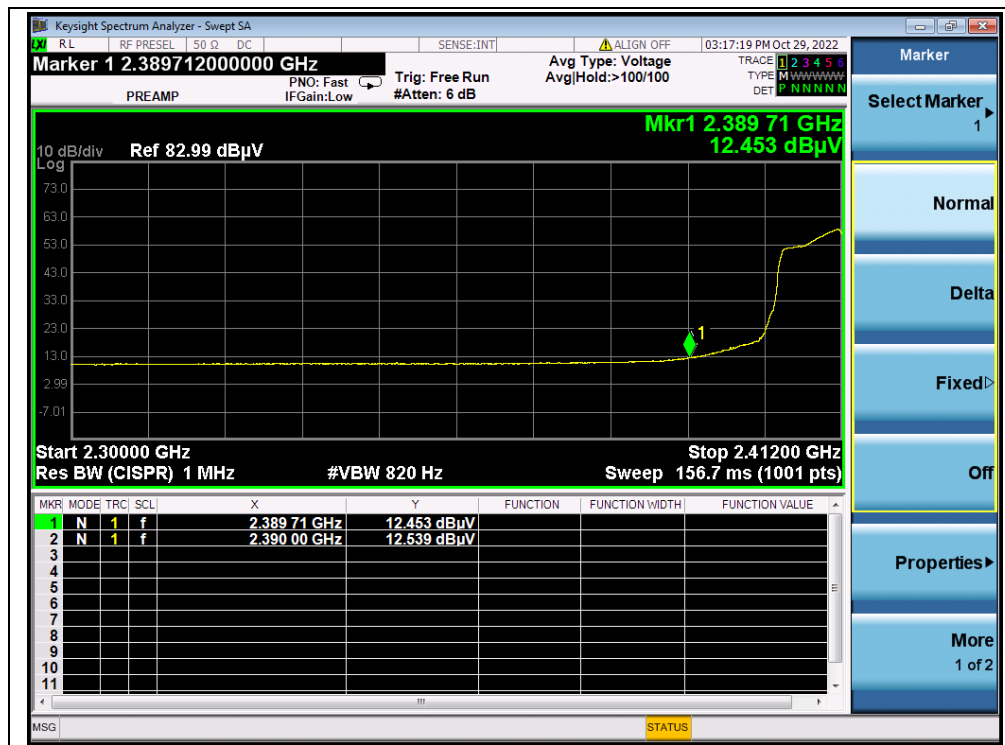

(AVERAGE, Channel 1, 802.11n (HT20))



(PEAK, Channel 11, 802.11n (HT20))

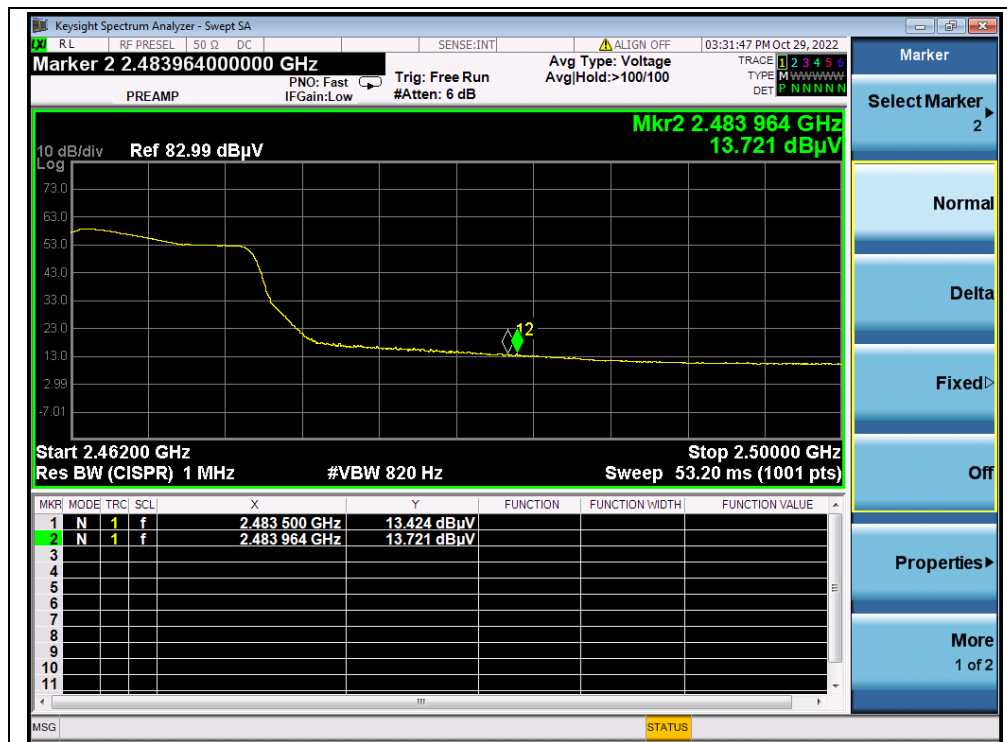

(AVERAGE, Channel 11, 802.11n (HT20))

2.3. Radiated Emission

2.3.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.3.2. Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

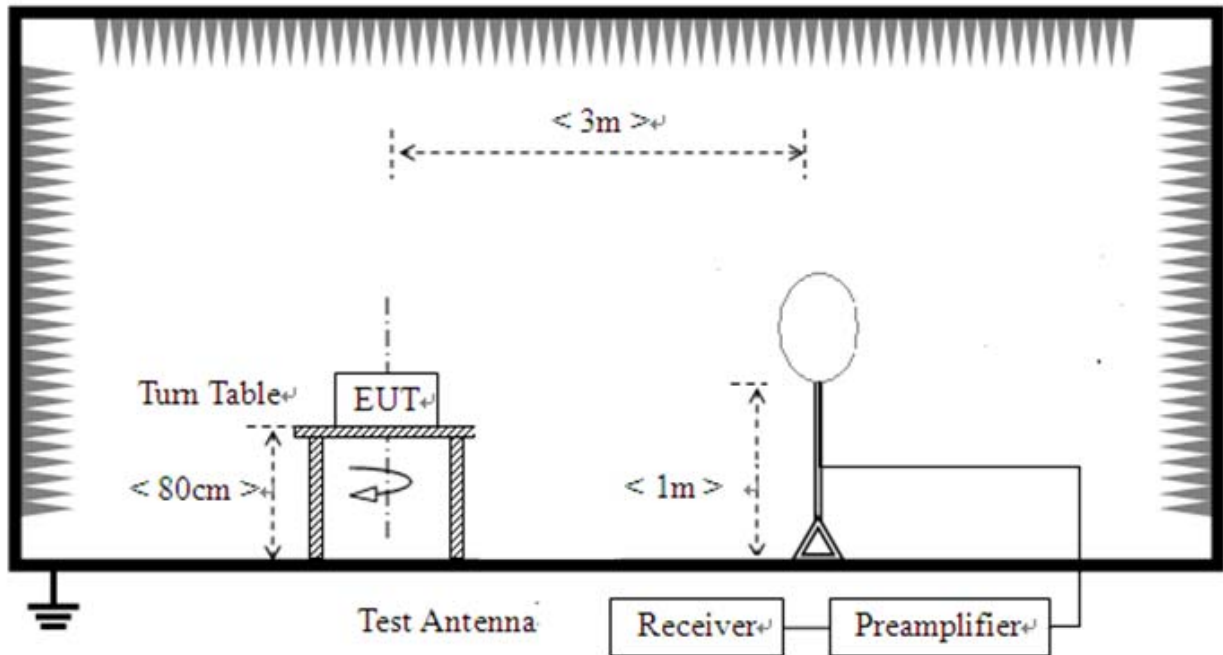

- 2) For radiated emissions from 30MHz to 1GHz

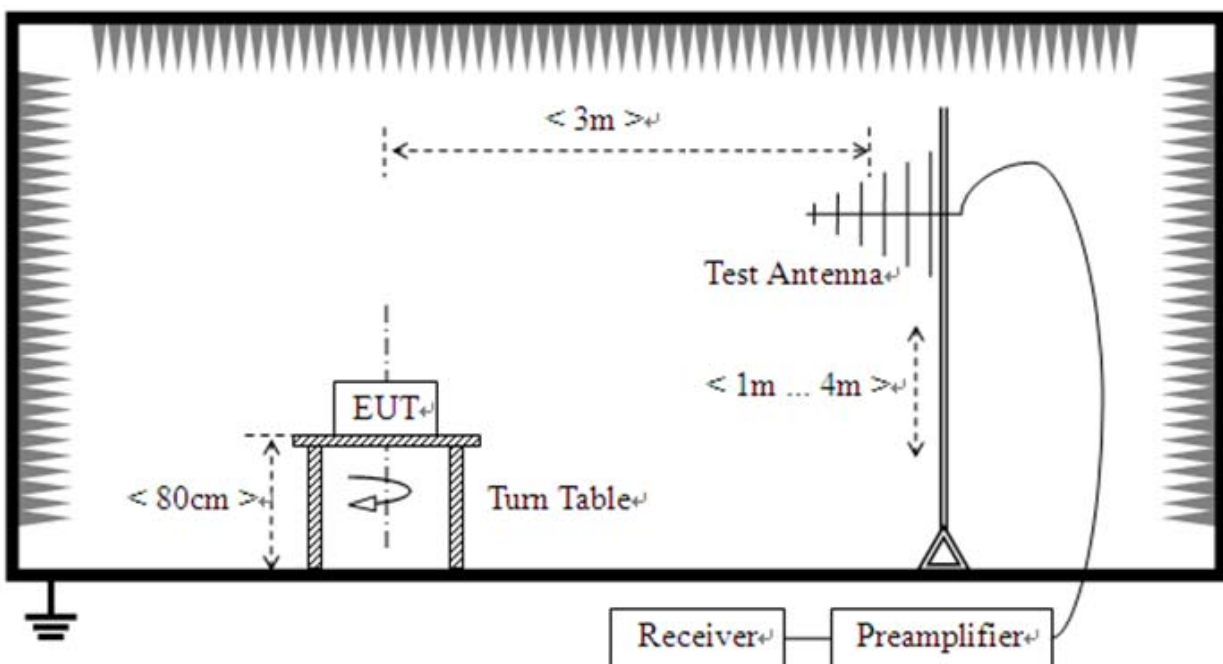

3) For radiated emissions above 1GHz

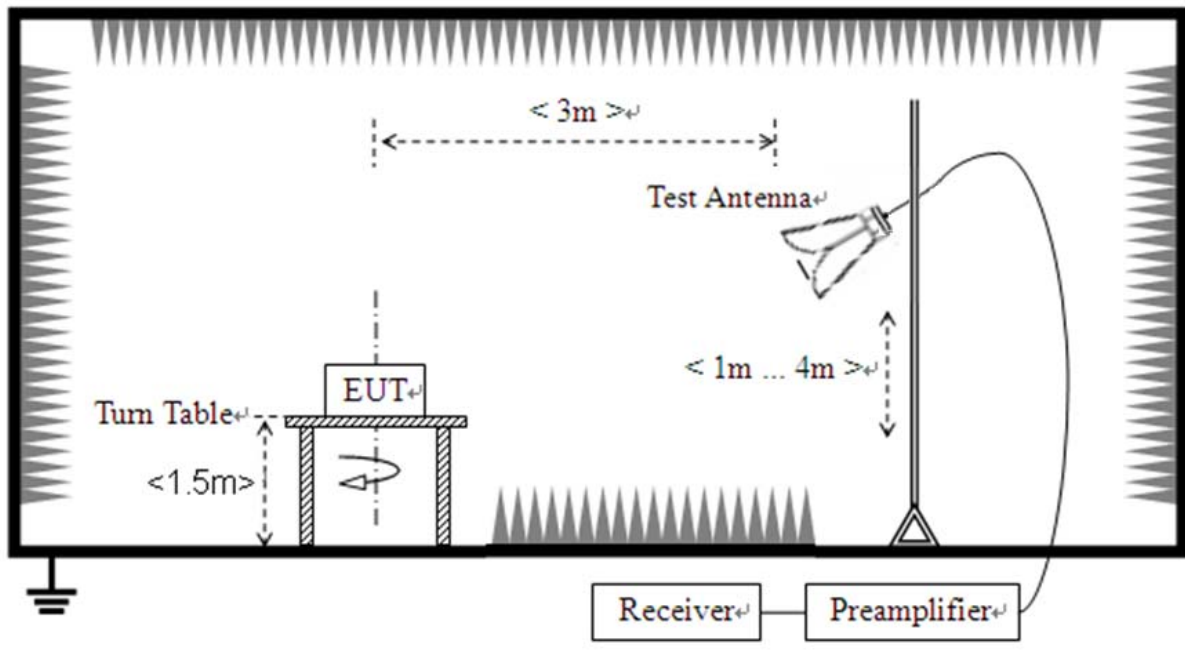

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.



2.3.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**802.11b Mode**

Plot for Channel 1

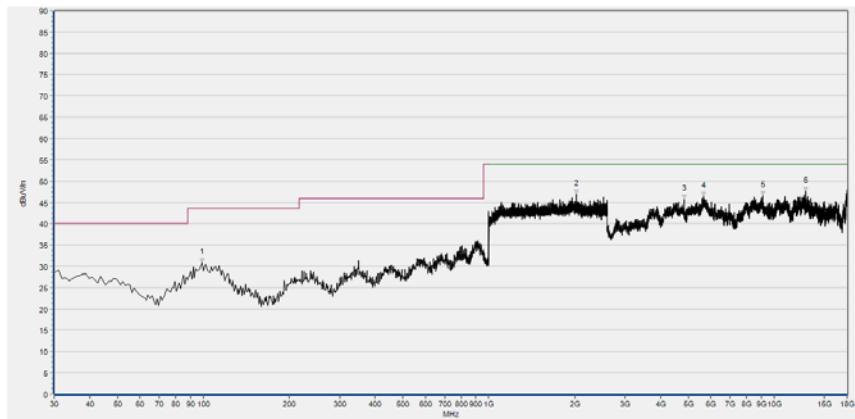

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
98.870	30.79	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2028.267	46.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4823.760	45.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5667.680	46.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9129.600	46.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12905.680	47.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

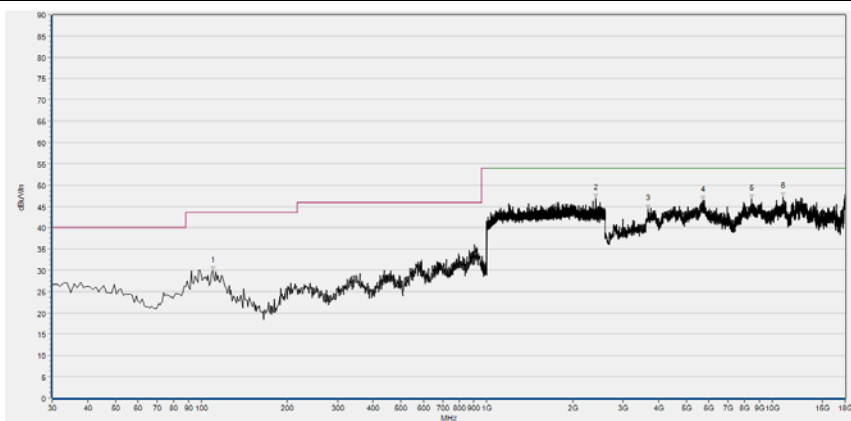


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	29.91	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2412.800	46.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3671.840	44.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5701.560	46.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8448.920	46.83	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10879.040	47.28	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

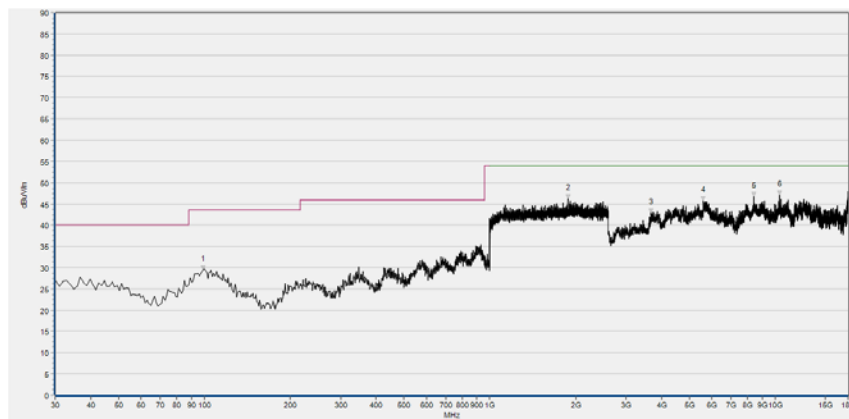

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
98.870	29.57	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1874.667	46.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3671.840	42.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5603.000	45.77	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8421.200	46.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10333.880	47.17	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

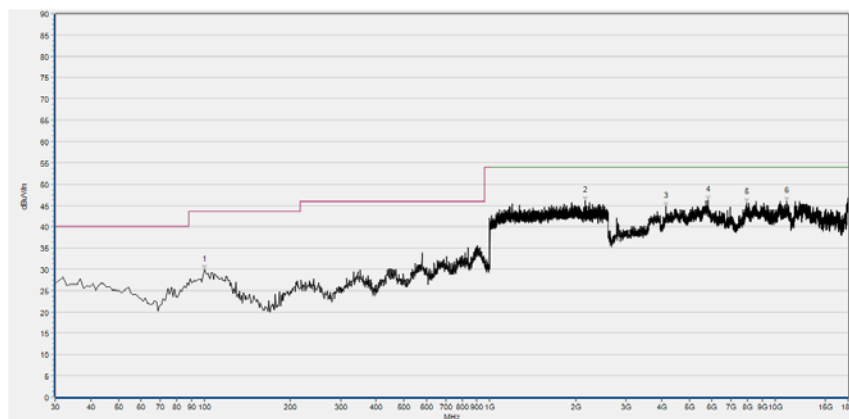


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.840	29.82	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2155.200	46.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4146.160	44.82	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5827.840	46.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7959.200	45.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10968.360	45.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 11

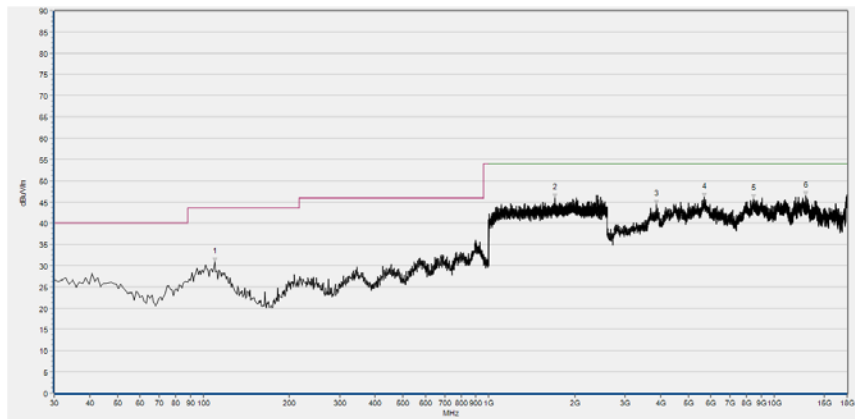

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	30.91	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1704.533	45.96	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3865.880	44.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5692.320	46.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8464.320	45.81	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12902.600	46.47	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

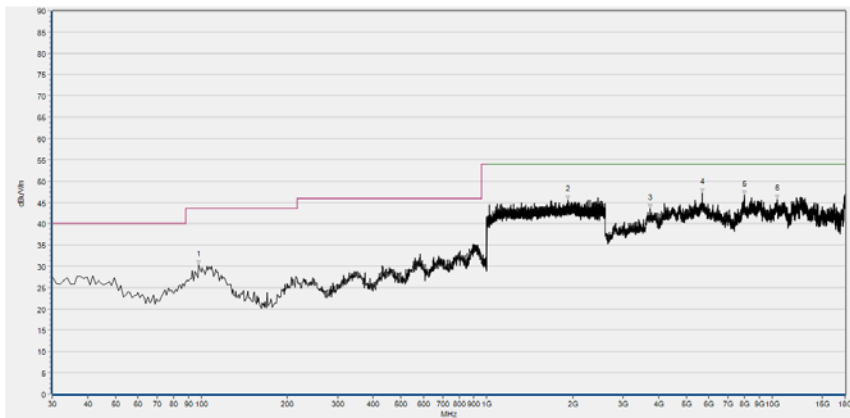


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.900	30.26	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1920.533	45.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3736.520	43.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5692.320	47.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7983.840	46.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10423.200	45.72	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11g Mode**

Plot for Channel 1

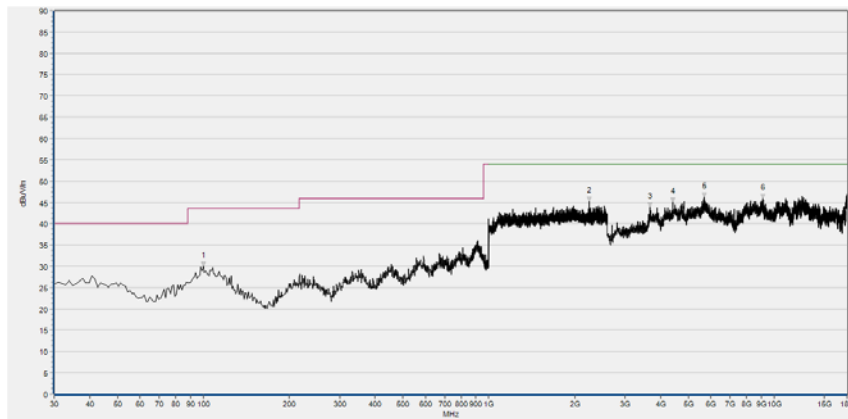

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.840	29.92	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2249.067	45.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3665.680	43.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4420.280	45.05	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5689.240	46.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9138.840	45.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

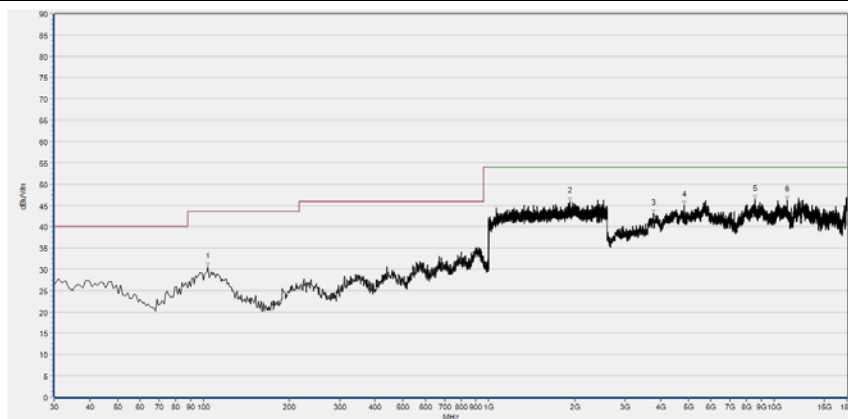


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
103.720	30.45	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1919.467	45.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3767.320	43.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4826.840	45.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8569.040	46.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11122.360	46.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

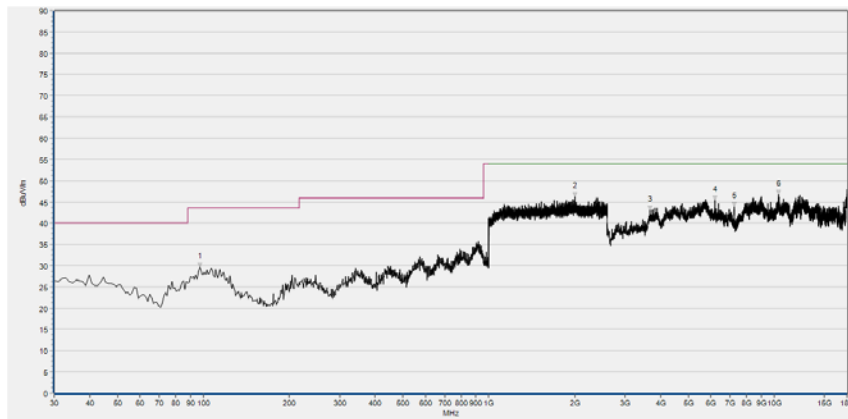

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
96.930	29.60	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2004.267	46.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3668.760	43.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6200.520	45.40	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7235.400	43.88	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10343.120	46.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

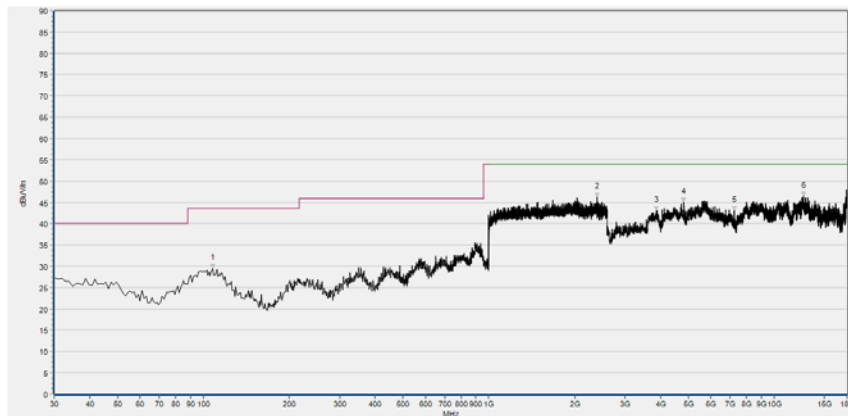


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	29.49	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2388.800	46.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3859.720	43.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4820.680	45.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7235.400	43.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12677.760	46.44	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 11

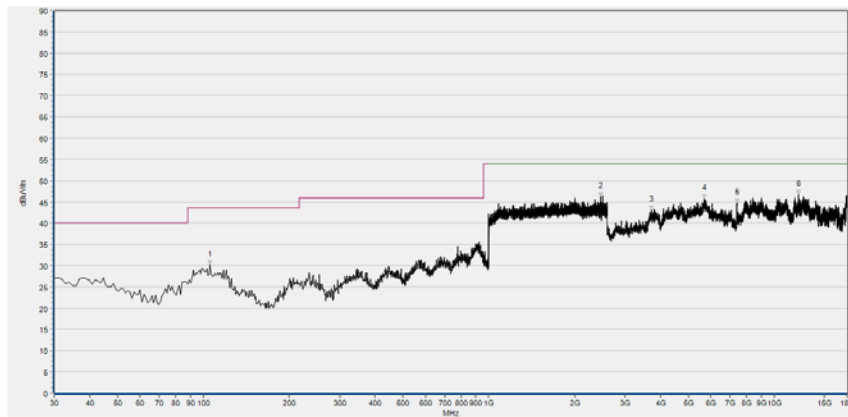

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
105.660	30.08	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2462.933	46.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3714.960	43.09	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5676.920	45.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7392.480	44.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12184.960	46.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

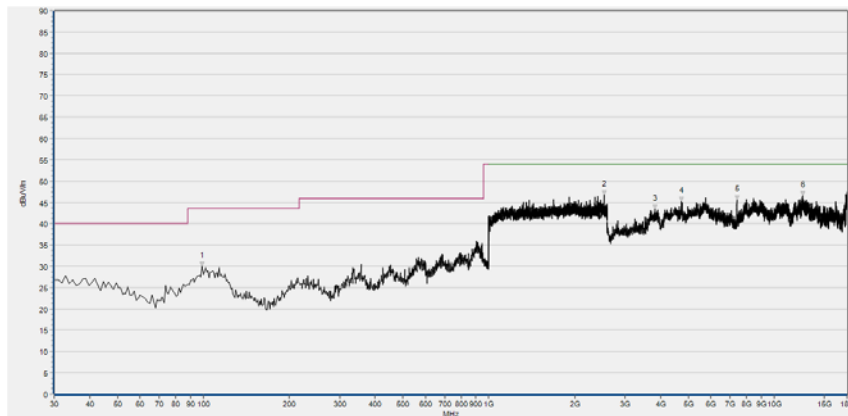


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
98.870	30.02	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2530.667	46.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3813.520	43.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4725.200	45.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7389.400	45.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12557.640	46.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11n (HT20) Mode**

Plot for Channel 1

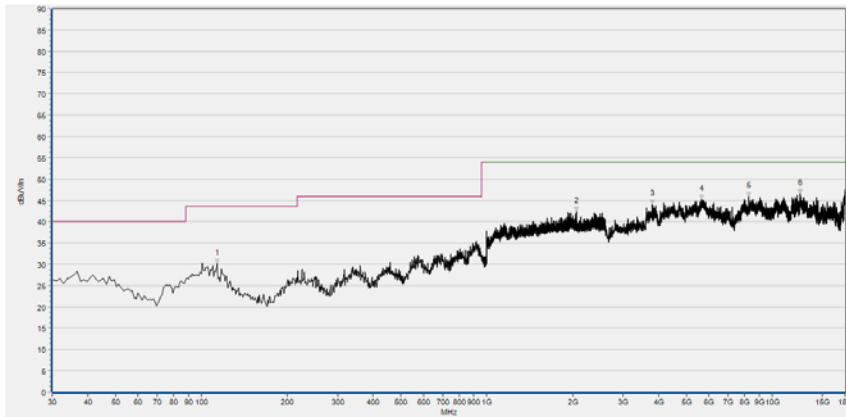

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	30.17	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2059.200	42.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3798.120	44.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5652.280	45.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8276.440	46.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12496.040	46.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

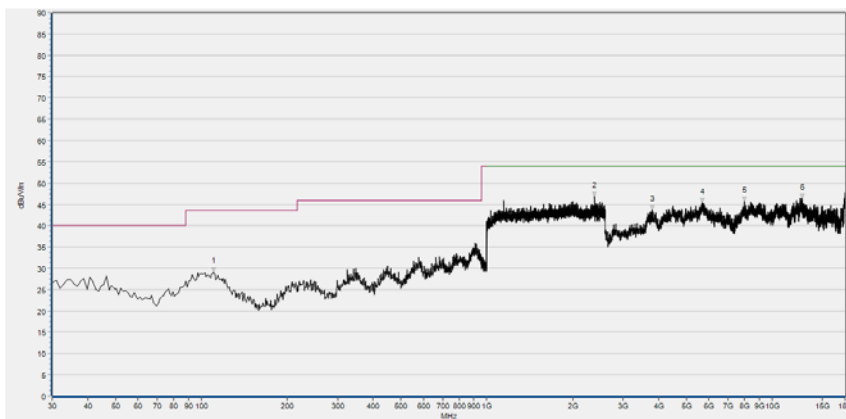


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	29.17	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2387.733	47.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3801.200	43.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5686.160	45.47	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7986.920	45.80	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12748.600	46.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 6

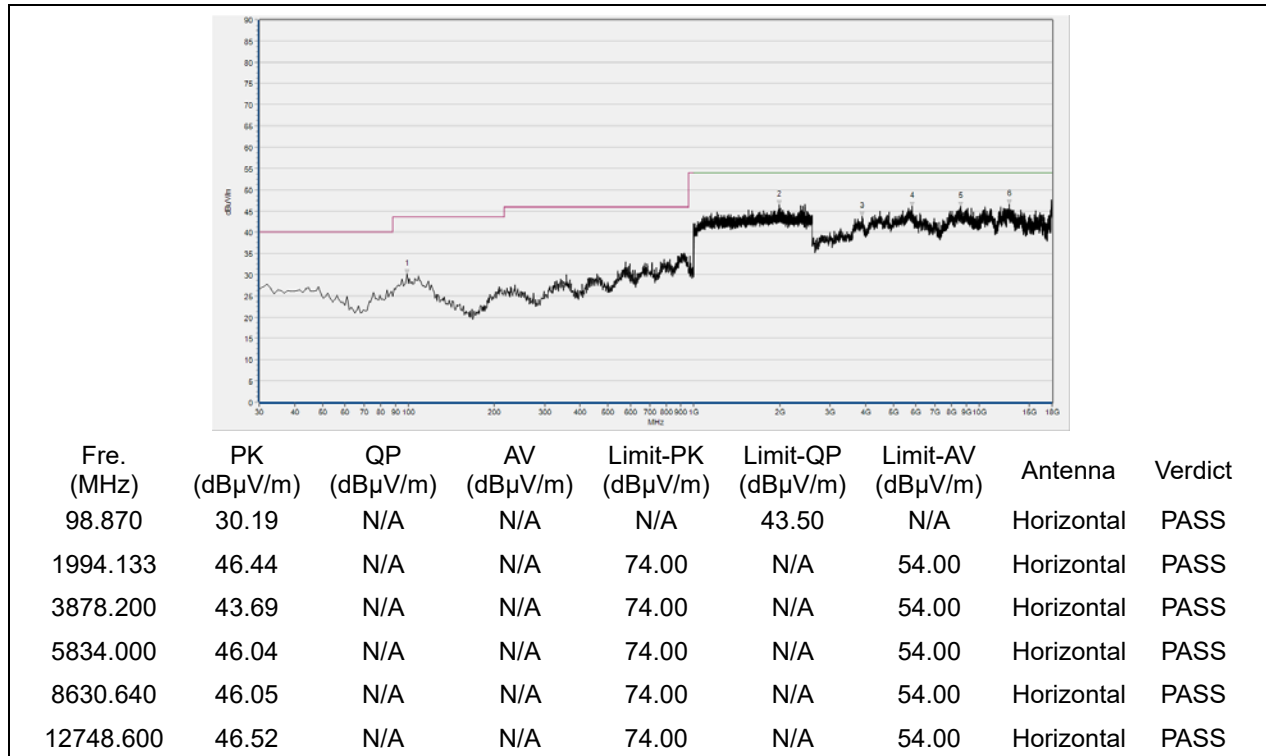


(Antenna Horizontal, 30MHz to 18GHz)

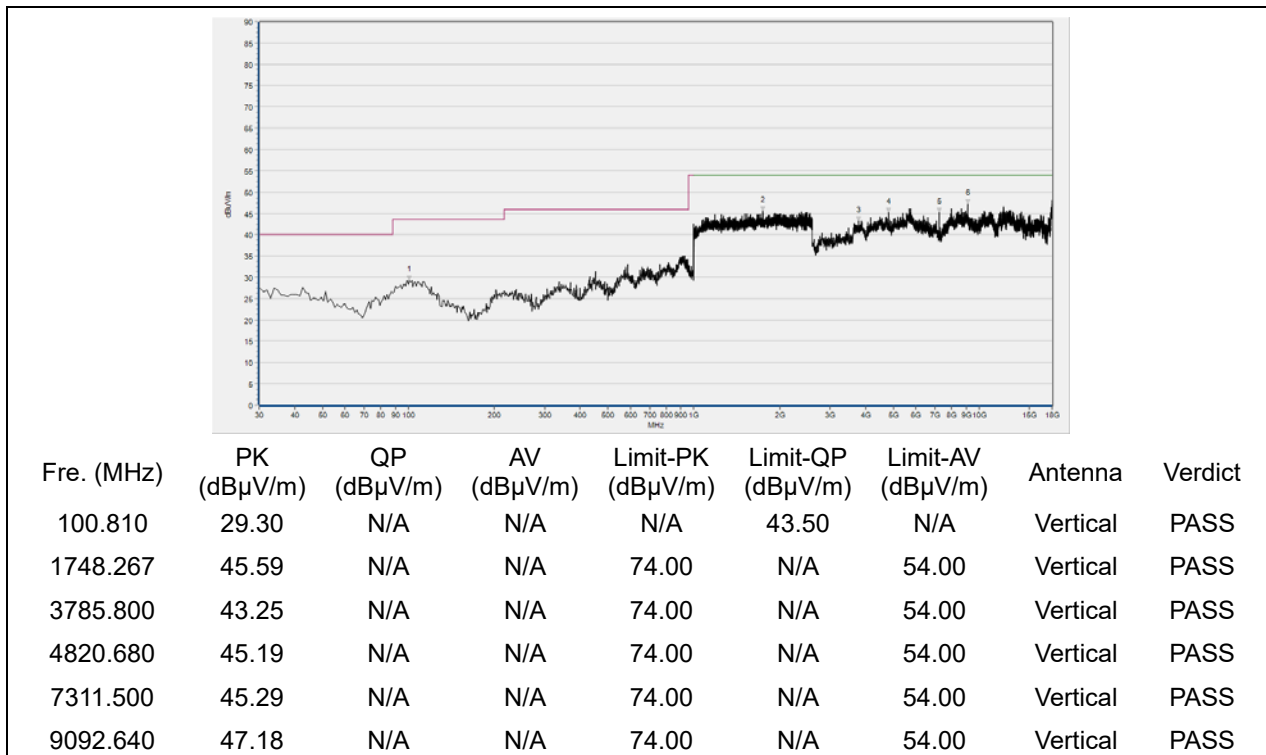

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 11

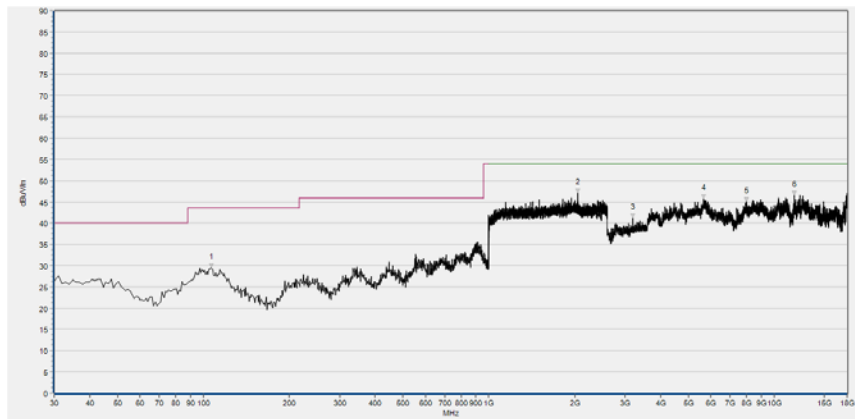

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
106.630	29.49	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2051.200	47.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3197.520	41.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5652.280	45.79	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8002.320	45.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11747.600	46.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

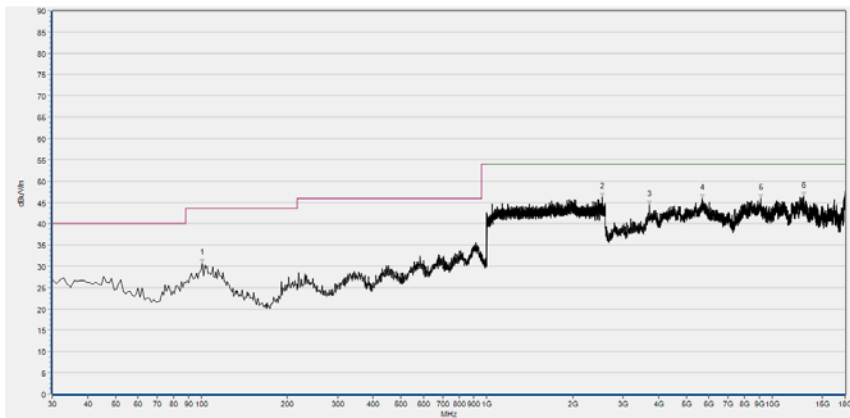

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.810	30.74	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2540.267	46.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3708.800	44.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5670.760	45.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9098.800	45.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12893.360	46.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2022.03.03	2023.03.02
LISN	812744	NSLK 8127	Schwarzbeck	2022.03.03	2023.03.02
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2022.07.06	2023.07.05
Coaxial Cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.2 List of Software Used

Description	Manufacturer	Software Version
Morlab EMCR V1.2	Morlab	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

4.3 Radiated Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2022.07.06	2023.07.05
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2022.07.13	2025.07.12
Test Antenna – Horn	BBHA9170#7 73	BBHA 9170	Schwarzbeck	2022.07.14	2025.07.13
Coaxial Cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial Cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial Cable (N male)	CB03	EMC03	Morlab	N/A	N/A



REPORT No.: SZ22090252W03

(30MHz-26GHz)					
Coaxial Cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2022.07.08	2023.07.07
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2022.07.08	2023.07.07
26-40GHz pre-Amplifier	56774	S40M400L40 02	Tonscend	2022.07.08	2023.07.07
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	2022.07.08	2023.07.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

————— END OF REPORT —————