

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 1 of 64

Applicant : SKYTECH USA LLC.
Address of Applicant : INCORP SERVICES, INC. 3458 LAKESHORE DRIVE
TALLAHASSEE, FL 32312 US

Product Name : ALL IN ONE
Brand Name : STGsivir & STGSivir
Model Name : SIV0323
Sample Acquisition Method : Sent by Client
Sample No. : E24080045-02#01
E24080045-02#03

FCC ID : 2BGCASIV0323

Standards : FCC CFR47 Part 15.407, Subpart E

Date of Receipt : 2024-09-10
Date of Test : 2024-09-11~ 2024-11-05
Date of Issue : 2024-11-07

Remark:
This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by: Erik Yang (Erik Yang) Reviewed by: Jennifer Zhou (Jennifer Zhou) Approved by: Echo Mu (Authorized signatory: Echo Mu)

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 2 of 64

Contents

1	GENERAL INFORMATION	3
1.1	TESTING LABORATORY	3
1.2	DETAILS OF APPLICATION	3
1.3	DETAILS OF EUT	3
1.4	TEST METHODOLOGY	5
1.5	TEST SUMMARY	6
2	TEST CONDITION	7
2.1	ENVIRONMENTAL CONDITIONS	7
2.2	EQUIPMENT LIST	7
2.3	MEASUREMENT UNCERTAINTY	8
3	TEST SET-UP AND OPERATION MODES	9
3.1	DETAILS OF TEST MODE	9
3.2	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
3.3	SUPPORT SOFTWARE	10
3.4	TEST SETUP DIAGRAM	11
4	TEST RESULTS	13
4.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
4.1.1	Antenna Requirement	13
4.1.2	Maximum Conducted Output Power	14
4.1.3	26dB Bandwidth and 99% Bandwidth	16
4.1.4	6dB Bandwidth and 99% Bandwidth	24
4.1.5	Maximum Conducted Output Power Spectral Density	39
4.1.6	Conducted Spurious Emission	41
4.1.7	24.8Radiated Emission	42
4.1.8	Band Edge (Restricted-band band-edge)	43
4.1.9	Frequency Stability	44
4.2	MAINS EMISSIONS	46
4.2.1	Conducted Emission on AC Mains	46
5	APPENDIXES	49
5.1	PHOTOGRAPHS OF THE SAMPLE	49
5.2	SET-UP FOR CONDUCTED EMISSIONS	63
5.3	SET-UP FOR CONDUCTED RF TEST AT ANTENNA PORT	63
5.4	SET-UP FOR SPURIOUS EMISSIONS BELOW 1GHZ	64
5.5	SET-UP FOR SPURIOUS EMISSIONS ABOVE 1GHZ	64

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 3 of 64

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Service (Shanghai) Co., Ltd.
Address	No.1298, Pingan Road, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Applicant Company Name	SKYTECH USA LLC.
Address	INCORP SERVICES, INC. 3458 LAKESHORE DRIVE TALLAHASSEE, FL 32312 US
Contact Person	Hu yan
Telephone	001-647-8892-868
Email	yan.hu@astsys.com
Manufacturer Company Name	SKYTECH USA LLC.
Address	INCORP SERVICES, INC. 3458 LAKESHORE DRIVE TALLAHASSEE, FL 32312 US
Factory Company Name	SKYTECH USA LLC.
Address	INCORP SERVICES, INC. 3458 LAKESHORE DRIVE TALLAHASSEE, FL 32312 US

1.3 Details of EUT

Product Name	ALL IN ONE
Brand Name	STGsivir & STGSivir
Test Model Name	SIV0323
FCC ID	2BGCASIV0323
Mode of Operation	WIFI 802.11a/n(HT20/40)/ac(VHT20/40/80)
Frequency Range	Band I:5150MHz~5250MHz; Band IV: 5725MHz ~ 5850MHz
Modulation Type	256QAM, 64QAM, 16QAM, BPSK, QPSK, 128QAM, OFDM
Number of Channels	14
Channel Bandwidth	802.11a: 20MHz 802.11n: 20MHz, 40MHz 802.11ac: 20MHz, 40MHz, 80MHz
Antenna Type	Internal Antenna
Antenna Gain	2.97dBi
Extreme Temperature Range	0℃~ +70℃
Test Voltage	DC 19V by AC/DC ADAPTER(Input: AC 100-240V 50/60Hz 2.5A,

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 4 of 64

	Output:DC 19V 6320mA)
Extreme Voltage	Low Voltage: AC 100V High Voltage: AC 240V
Product Type	Mobile for FCC standard
Hardware Version	4.6.5.4
Software Version	10.0.19045.4894
RF power setting in TEST SW	802.11a: Realtek 11ac 8821C PCIE WLAN MP Diagnostic Program 0.0007.00.20190801_Power level setting_52 for Band I 802.11a: Realtek 11ac 8821C PCIE WLAN MP Diagnostic Program 0.0007.00.20190801_Power level setting_48 for Band IV 802.11n(HT20): Realtek 11ac 8821C PCIE WLAN MP Diagnostic Program 0.0007.00.20190801_Power level setting_52 for Band I 802.11n(HT20): Realtek 11ac 8821C PCIE WLAN MP Diagnostic Program 0.0007.00.20190801_Power level setting_48 for Band IV 802.11n(HT40): Realtek 11ac 8821C PCIE WLAN MP Diagnostic Program 0.0007.00.20190801_Power level setting_50 for Band I 802.11n(HT40): Realtek 11ac 8821C PCIE WLAN MP Diagnostic Program 0.0007.00.20190801_Power level setting_46 for Band IV 802.11ac(VHT20): Realtek 11ac 8821C PCIE WLAN MP Diagnostic Program 0.0007.00.20190801_Power level setting_52 for Band I 802.11ac(VHT20): Realtek 11ac 8821C PCIE WLAN MP Diagnostic Program 0.0007.00.20190801_Power level setting_48 for Band IV 802.11ac(VHT40): Realtek 11ac 8821C PCIE WLAN MP Diagnostic Program 0.0007.00.20190801_Power level setting_50 for Band I 802.11ac(VHT40): Realtek 11ac 8821C PCIE WLAN MP Diagnostic Program 0.0007.00.20190801_Power level setting_46 for Band IV 802.11ac(VHT80): Realtek 11ac 8821C PCIE WLAN MP Diagnostic Program 0.0007.00.20190801_Power level setting_46 for Band I 802.11ac(VHT80): Realtek 11ac 8821C PCIE WLAN MP Diagnostic Program 0.0007.00.20190801_Power level setting_44 for Band IV

- Note:
- The above information was declared by the manufacture.
 - The EUT is designed as master device.
 - The EUT do not support TPC.
 - For more details, please refer to the User’s manual of the EUT.

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 5 of 64

Channel List

Frequency Band	Channel Number	Frequency
5150 MHz ~ 5250MHz	36	5180 MHz
	38	5190 MHz
	40	5200 MHz
	42	5210 MHz
	44	5220 MHz
	46	5230 MHz
	48	5240 MHz
5725 MHz ~ 5850MHz	149	5745 MHz
	151	5755 MHz
	153	5765 MHz
	155	5775 MHz
	157	5785 MHz
	159	5795 MHz
	165	5825 MHz

*Note: For 20MHZ bandwidth system use Channel 36,44,48,149,157,165;
For 40MHZ bandwidth system use Channel 38,46,151,159;
For 80MHZ bandwidth system use Channel 42,155.*

1.4 Test Methodology

47 CFR Part 15, Subpart E	Subpart E—Unlicensed National Information Infrastructure Devices
KDB Publication 789033 D02 v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 6 of 64

1.5 Test Summary

Test Item	FCC Rules	Result
Antenna Requirement	FCC Part 15.407(a), 15.203	PASS
Maximum Conducted Output Power	FCC Part 15.407(a)	PASS
26dB Bandwidth and 99% Bandwidth	FCC Part 15.407(a)	PASS
6dB Bandwidth	FCC Part 15.407(e)	PASS
Maximum Conducted Output Power Spectral Density	FCC Part 15.407(a)	PASS
Conducted Spurious Emission	FCC Part 15.407(b), 15.209	PASS
Radiated Emission	FCC Part 15.407(b), 15.209, 15.205	PASS
Band Edge (Restricted-band band-edge)	FCC Part 15.407(b), 15.205, 15.209	PASS
Frequency Stability	FCC Part 15.407(g)	PASS
Conducted Emission on AC Mains	FCC Part 15.207(a)	PASS

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 7 of 64

2 Test Condition

2.1 Environmental conditions

Temperature (°C)	15-35
Humidity (%RH)	30-60
Barometric Pressure (mbar)	860-1060

2.2 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Keysight	N9020A	MY54101709	2024-06-26	2025-06-25
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2024-06-04	2025-06-03
Signal Generator	Rohde & Schwarz	SMR27	100184	2024-06-26	2025-06-25
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2024-06-05	2025-06-04
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2024-06-04	2025-06-03
V-network	SCHWARZBECK	NSLK 8127	8127-902	2024-06-05	2025-06-04
Attenuator	SCHWARZBECK	VTSD 9561-FN	/	2024-06-05	2025-06-04
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2023-03-22	2025-03-21
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2023-06-13	2025-06-12
Loop Antenna	SCHWARZBECK	FMZB 1513	/	2023-06-09	2025-06-08
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2023-06-18	2025-06-17
Broadband Preamplifier	SCHWARZBECK	BBV 9718	346	2024-06-04	2025-06-03
Temperature Box	ESPEC	ECT-2	055239A	2023-11-09	2025-11-08
EMC chamber 9*6*6(L*W*H)	CHANGNING	966	N/A	2023-06-09	2025-06-08
Shielded Enclosure 8*5*4(L*W*H)	CHANGNING	854	N/A	2023-06-09	2025-06-08
Test Software	BL	BL410_E	Version:2.1.1.436	N/A	N/A
Test Software	BL	BL410_R	Version:2.1.1.409	N/A	N/A

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 8 of 64

2.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in measurement” (GUM) published by CISPR and ANSI. The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95.45%.

Parameter		Uncertainty
Antenna Port Conducted Emission		$\pm 1.04\text{dB}$
Radiated Emission	< 1GHz	$\pm 5.00\text{dB}$
	> 1GHz	$\pm 5.46\text{dB}$
Conducted Emission on AC Mains	150KHz-30MHz	$\pm 3.36\text{dB}$
Occupied Channel Bandwidth		$\pm 39.26\text{KHz}$
Maximum Conducted Output Power		$\pm 1.06\text{dB}$
Maximum Conducted Output Power Spectral Density		$\pm 1.12\text{dB}$
Frequency Stability		$\pm 0.38\text{ppm}$

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 9 of 64

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Using test software to control EUT work in continuous transmit mode. Select test channel as below:

For 802.11a/n(HT20), 802.11ac (VHT20)

Band I (5150 – 5250 MHz)		Band IV (5725 – 5850 MHz)	
Channel	Frequency	Channel	Frequency
The lowest channel(CH36)	5180MHz	The lowest channel(CH149)	5745MHz
The middle channel(CH44)	5220MHz	The middle channel(CH157)	5785MHz
The highest channel(CH48)	5240MHz	The highest channel(CH165)	5825MHz

For 802.11n(HT40), 802.11ac (VHT40)

Band I (5150 – 5250 MHz)		Band IV (5725 – 5850 MHz)	
Channel	Frequency	Channel	Frequency
The lowest channel(CH38)	5190MHz	The lowest channel(CH151)	5755MHz
The highest channel(CH46)	5230MHz	The highest channel(CH159)	5795MHz

For 802.11ac (VHT80)

Band I (5150 – 5250 MHz)		Band IV (5725 – 5850 MHz)	
Channel	Frequency	Channel	Frequency
The lowest channel(CH42)	5210MHz	The lowest channel(CH155)	5775MHz

Through Pre-scan under all rate at lowest channel, the data rate as below table described is the worst case, so we choose these data rate for test.

Type	Data rate
802.11a	48Mbps
802.11n(HT20), 802.11n(HT40)	MCS6
802.11ac (VHT20), 802.11ac (VHT40)	MCS6
802.11ac (VHT80)	MCS8

The basic operation modes are:

- A. On
 - 1. WLAN mode
 - a. Transmitting
 - b. Receiving
- B. Standby
- C. Off

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 10 of 64

3.2 Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model Name	Serial No.
AC/DC ADAPTER	Dongguan Jiayi Electric Co., Ltd.	K1211-1906320D	K12111906320D
Mouse	Dell	MS116t1	CN-065K5F-LO300-248-0VP2
Keyboard	Dell	KB216P	CN-0M4W71-73826-6C801SQ-A02


3.3 Support Software

Description	Manufacturer	Software Name
Software	N/A	Realtek 11ac 8821C PCIE WLAN MP Diagnostic Program 0.0007.00.20190801

TEST REPORT


3.4 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

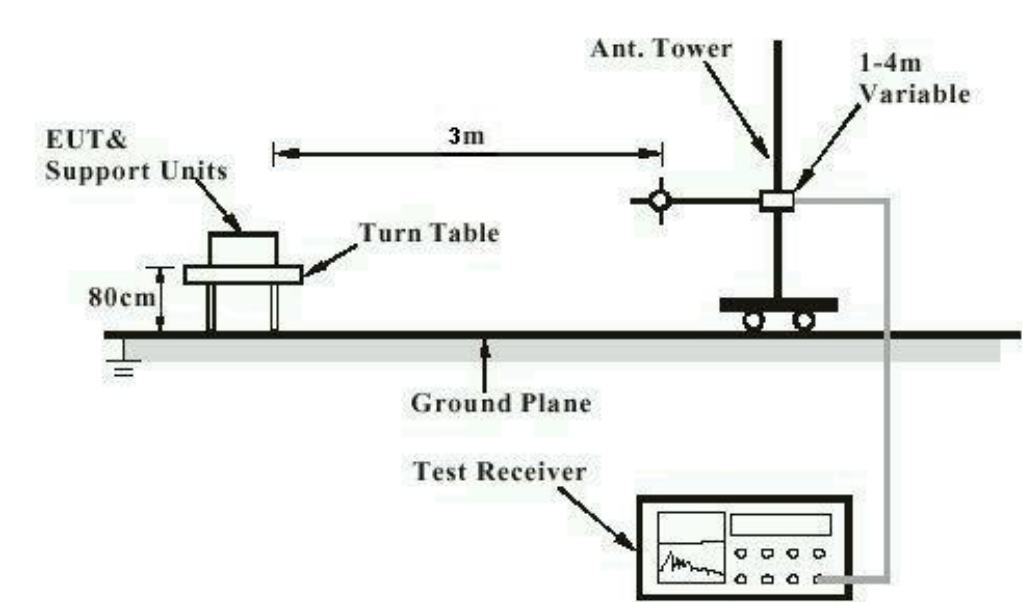

Note: Measurements above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Configuration for Conduction Test

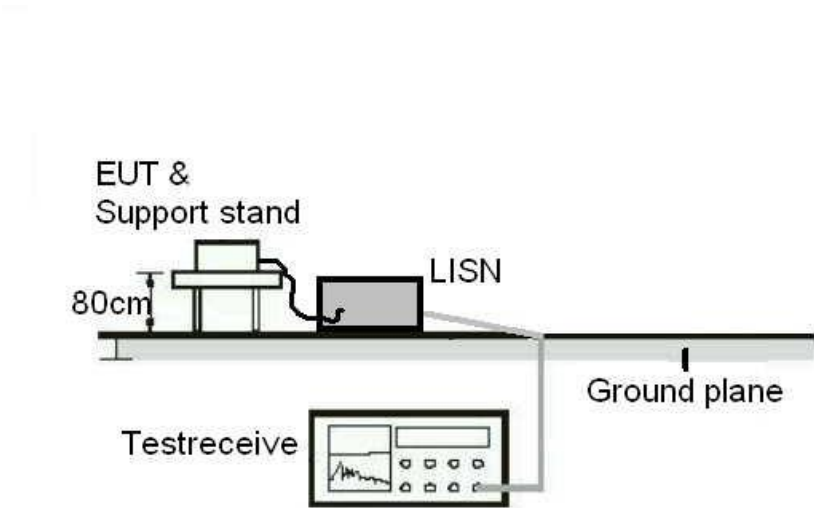

TEST REPORT

Diagram of Measurement Configuration for Transmitter Test


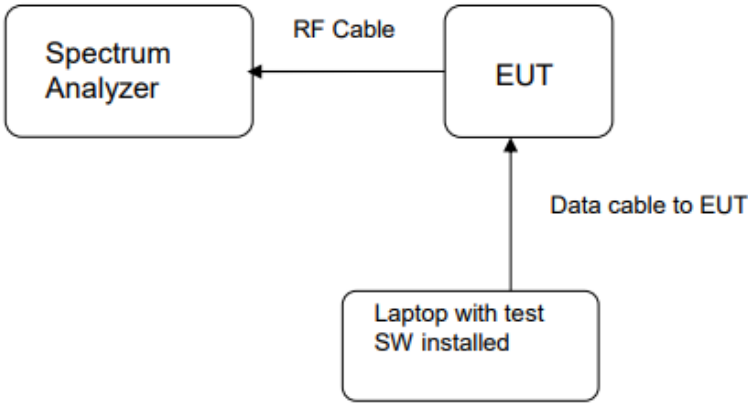


Diagram of Measurement Equipment Configuration for conducted output power setup

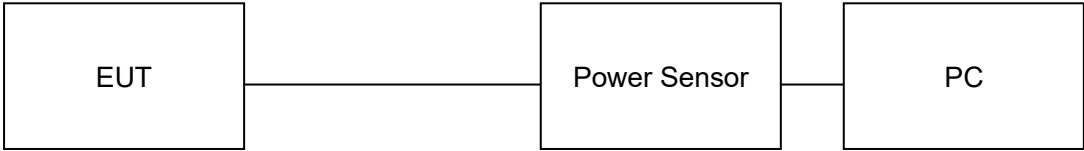

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 13 of 64

4 Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Antenna Requirement

RESULT:

PASS

Test standard	: FCC Part 15.407(a), 15.203
Requirement	: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. In addition, If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 2.97dBi. The antenna is an internal antenna with no possibility of replacement with a non-approved antenna by the end-user.

Therefore, the EUT is considered to comply with this provision.

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 14 of 64

4.1.2 Maximum Conducted Output Power

RESULT:

PASS

Test standard : FCC Part 15.407(a)

Requirement : ANSI C63.10-2013 clause 12.3.3.1, KDB 789033

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 24.5°C

Relative humidity : 38%

Table 1: Maximum Conducted Output Power for Band I (5150MHz~5250MHz)

Test Mode	Duty Cycle (%)	Test Channel (MHz)	Maximum Conducted Output Power		Applicable Limit
			(dBm)	(mW)	
802.11a	100	5180	11.13	12.97	250mW (23.98dBm)
		5220	12.11	16.26	
		5240	12.56	18.03	
802.11n(HT20)	100	5180	11.26	13.37	
		5220	12.42	17.46	
		5240	12.71	18.66	
802.11ac(VHT20)	100	5180	11.29	13.46	
		5220	12.18	16.52	
		5240	12.57	18.07	
802.11n(HT40)	100	5190	10.93	12.39	
		5230	11.85	15.31	
802.11ac(VHT40)	100	5190	10.90	12.30	
		5230	11.73	14.89	
802.11ac(VHT80)	100	5210	9.62	9.16	

Notes:

1. Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 15 of 64

Table 2: Maximum Conducted Output Power for Band IV (5725MHz~5850MHz)

Test Mode	Duty Cycle (%)	Test Channel (MHz)	Maximum Conducted Output Power		Applicable Limit
			(dBm)	(mW)	
802.11a	100	5745	13.19	20.84	1W(30dBm)
		5785	13.43	22.03	
		5825	13.35	21.63	
802.11n(HT20)	100	5745	13.20	20.89	
		5785	13.50	22.39	
		5825	13.32	21.48	
802.11ac(VHT20)	100	5745	13.08	20.32	
		5785	13.07	20.28	
		5825	12.93	19.63	
802.11n(HT40)	100	5755	12.55	17.99	
		5795	12.74	18.79	
802.11ac(VHT40)	100	5755	12.11	16.26	
		5795	12.25	16.79	
802.11ac(VHT80)	100	5775	11.31	13.52	

Notes:

1. Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 16 of 64

4.1.3 26dB Bandwidth and 99% Bandwidth

RESULT:

PASS

Test standard : FCC Part 15.407(a)

Requirement : ANSI C63.10-2013 clause 12.4, KDB 789033

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 24.4°C

Relative humidity : 36%

Table 3: 26dB Bandwidth and 99% Bandwidth for Band I (5150MHz~5250 MHz)

Test Mode	Test Channel (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11a	5180	19.80	16.539
	5220	19.77	16.535
	5240	19.85	16.529
802.11n(HT20)	5180	20.93	17.697
	5220	21.26	17.706
	5240	21.23	17.717
802.11ac(VHT20)	5180	21.12	17.708
	5220	21.19	17.708
	5240	21.13	17.731
802.11n(HT40)	5190	40.86	36.242
	5230	40.72	36.248
802.11ac(VHT40)	5190	41.40	36.272
	5230	41.44	36.204
802.11ac(VHT80)	5210	80.27	75.664

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 17 of 64

Figure 1: The plots of 26dB Bandwidth and 99% Bandwidth, 802.11a, 5180MHz


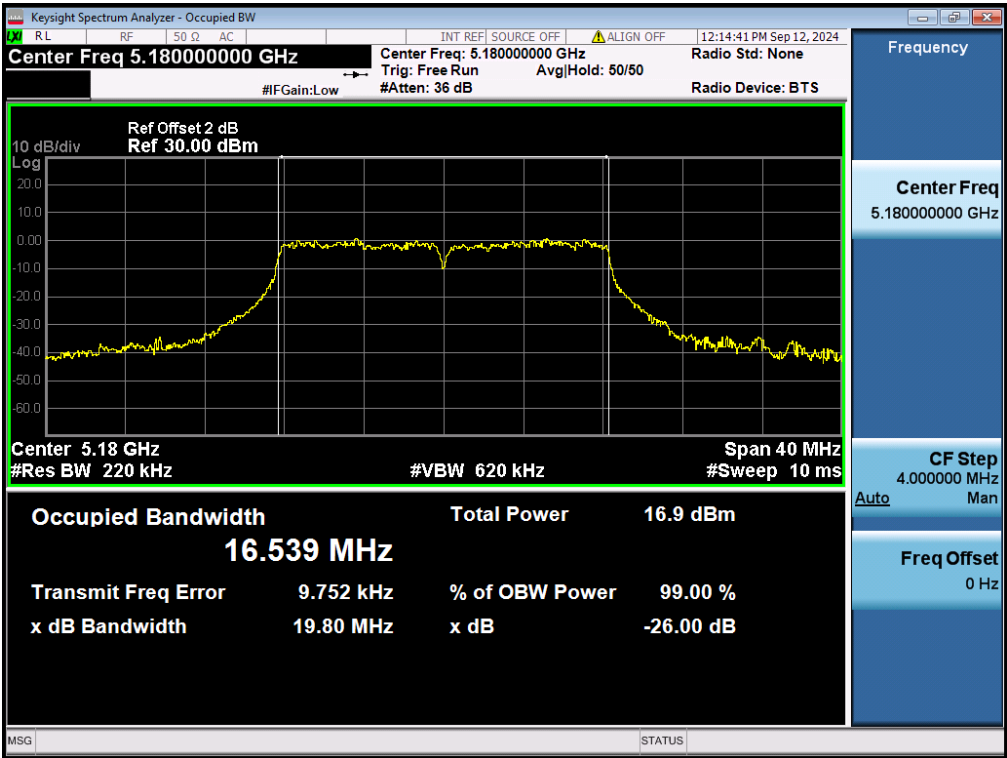


Figure 2: The plots of 26dB Bandwidth and 99% Bandwidth, 802.11a, 5220MHz

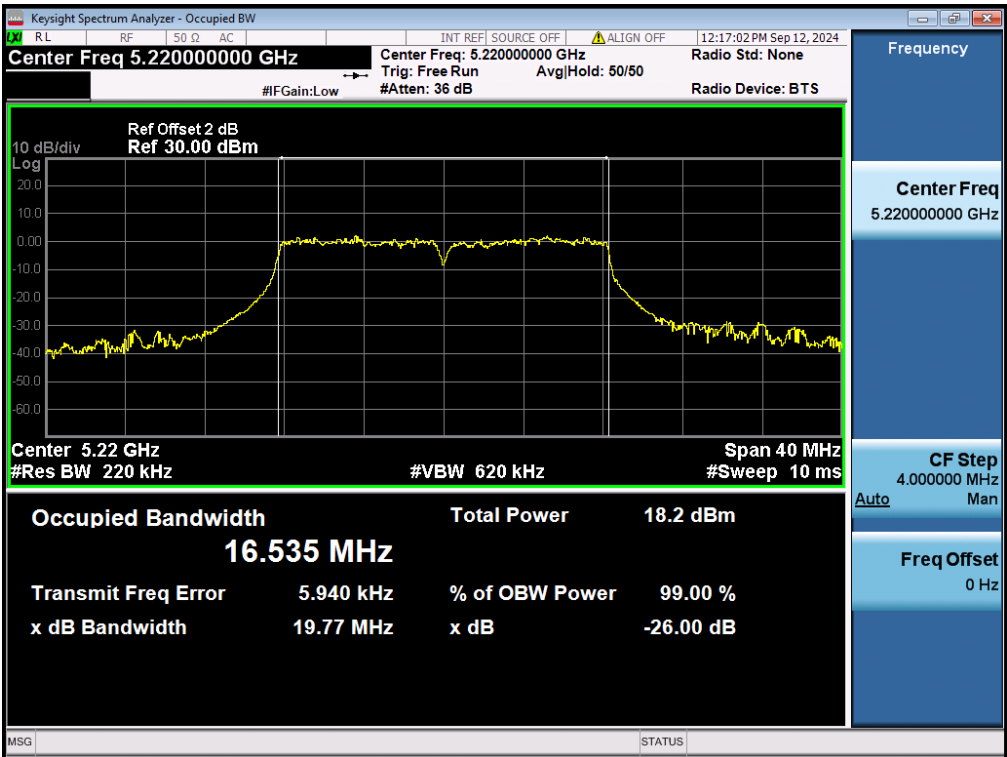

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 18 of 64

Figure 3: The plots of 26dB Bandwidth and 99% Bandwidth, 802.11a, 5240MHz


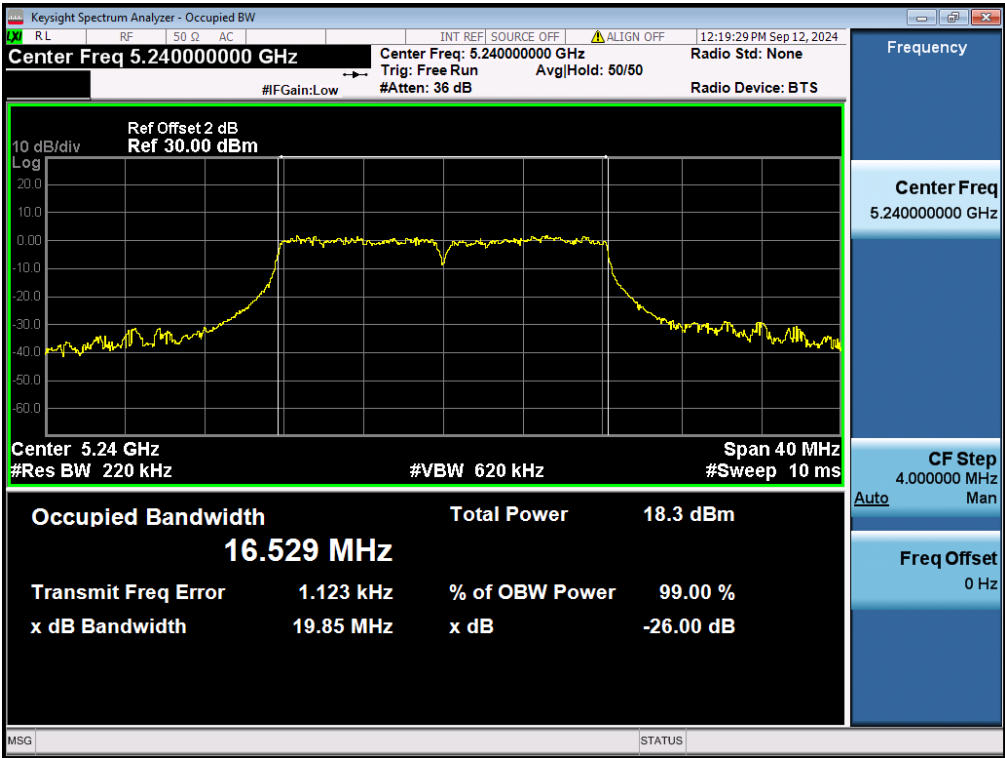


Figure 4: The plots of 26dB Bandwidth and 99% Bandwidth, 802.11n(HT20), 5180MHz

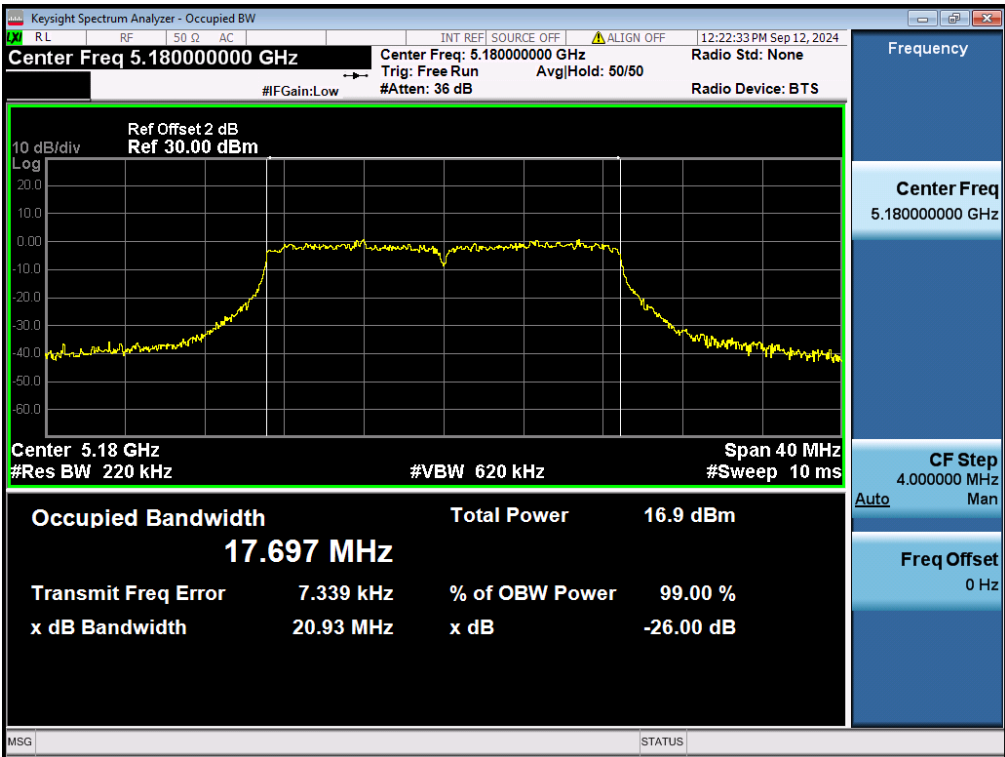

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 19 of 64

Figure 5: The plots of 26dB Bandwidth and 99% Bandwidth, 802.11n(HT20), 5220MHz


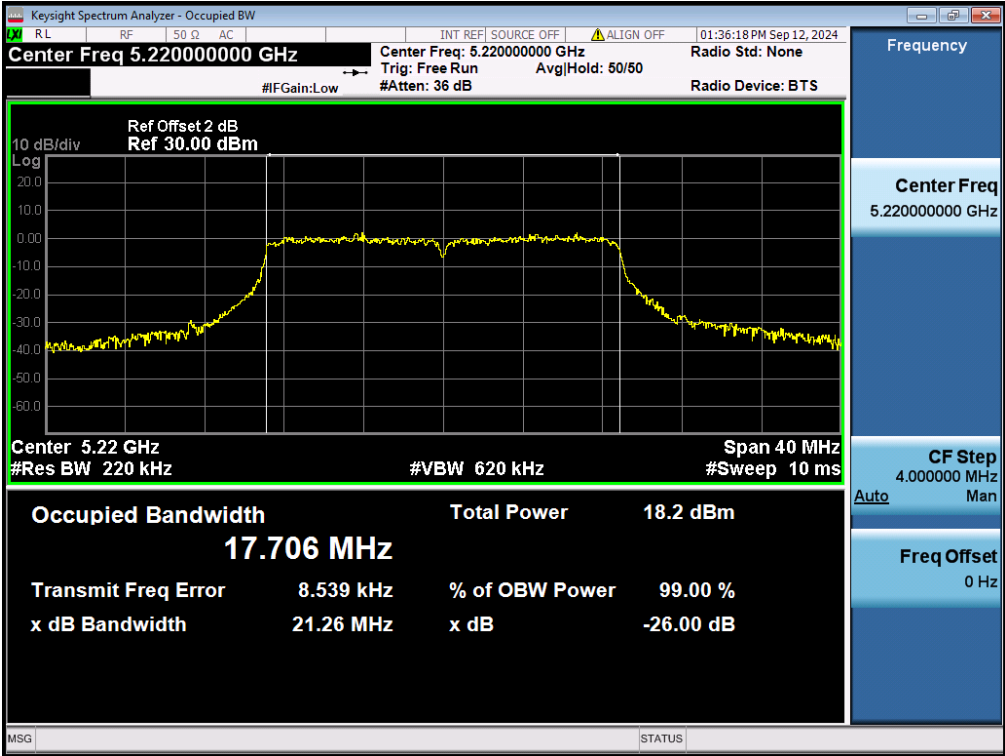


Figure 6: The plots of 26dB Bandwidth and 99% Bandwidth, 802.11n(HT20), 5240MHz

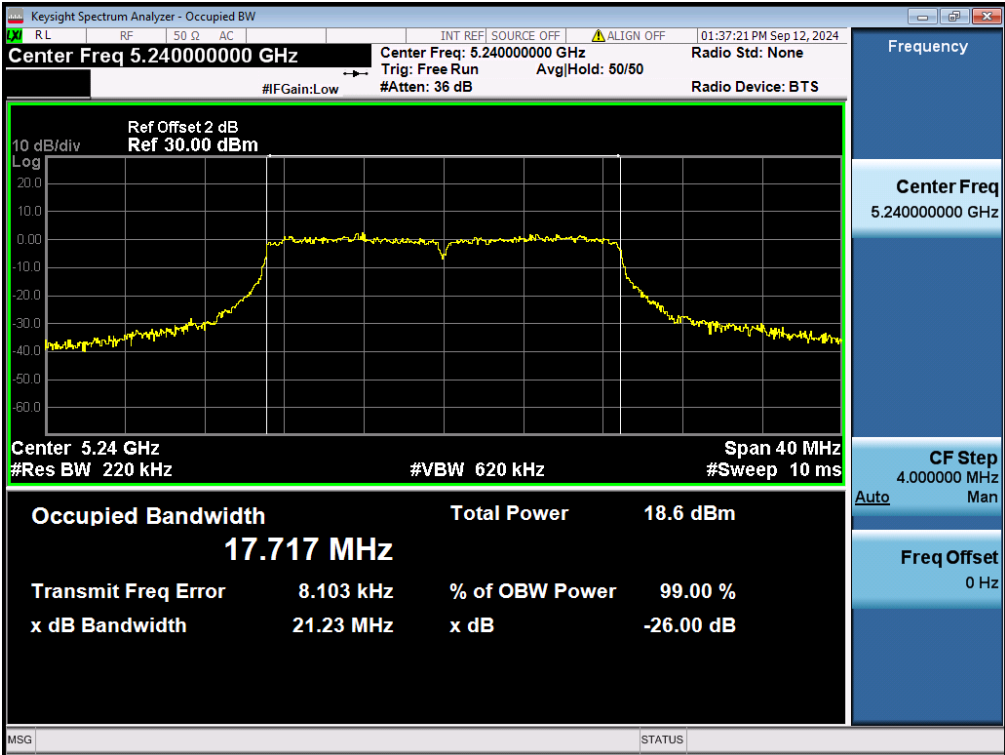

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 20 of 64

Figure 7: The plots of 26dB Bandwidth and 99% Bandwidth, 802.11ac(VHT20), 5180MHz


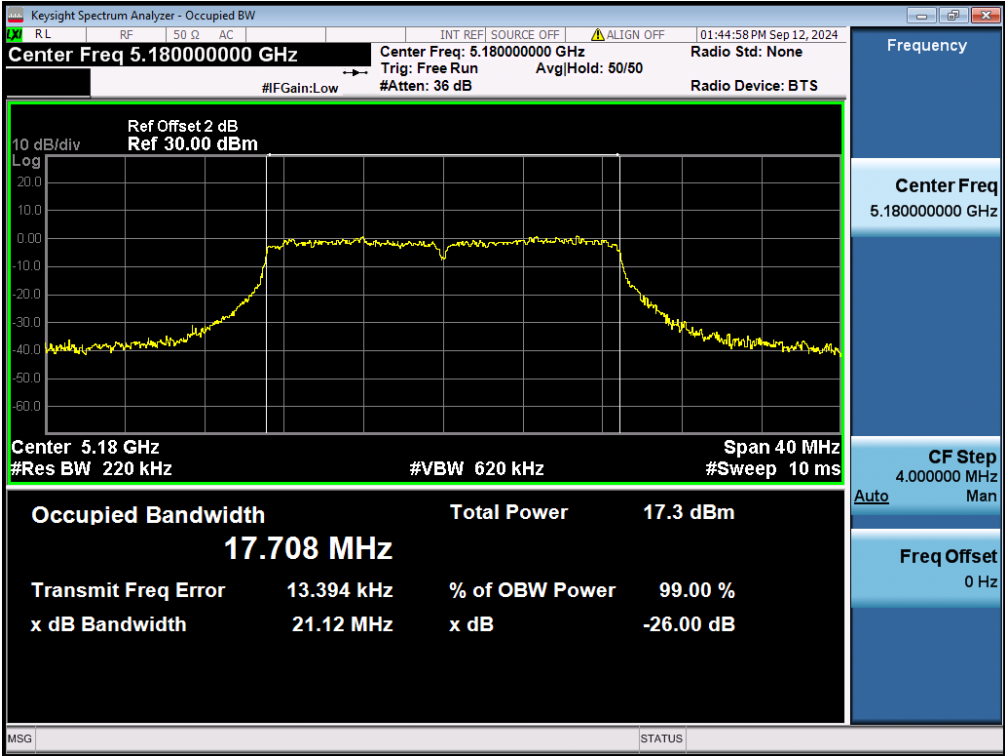


Figure 8: The plots of 26dB Bandwidth and 99% Bandwidth, 802.11ac(VHT20), 5220MHz

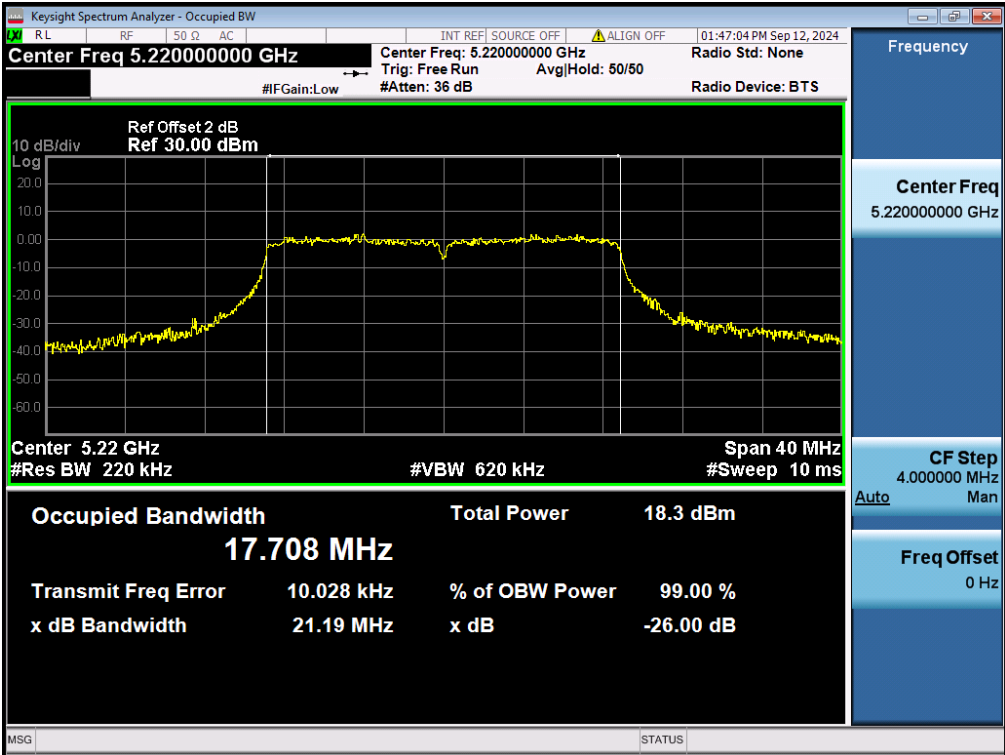

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 21 of 64

Figure 9: The plots of 26dB Bandwidth and 99% Bandwidth, 802.11ac(VHT20), 5240MHz


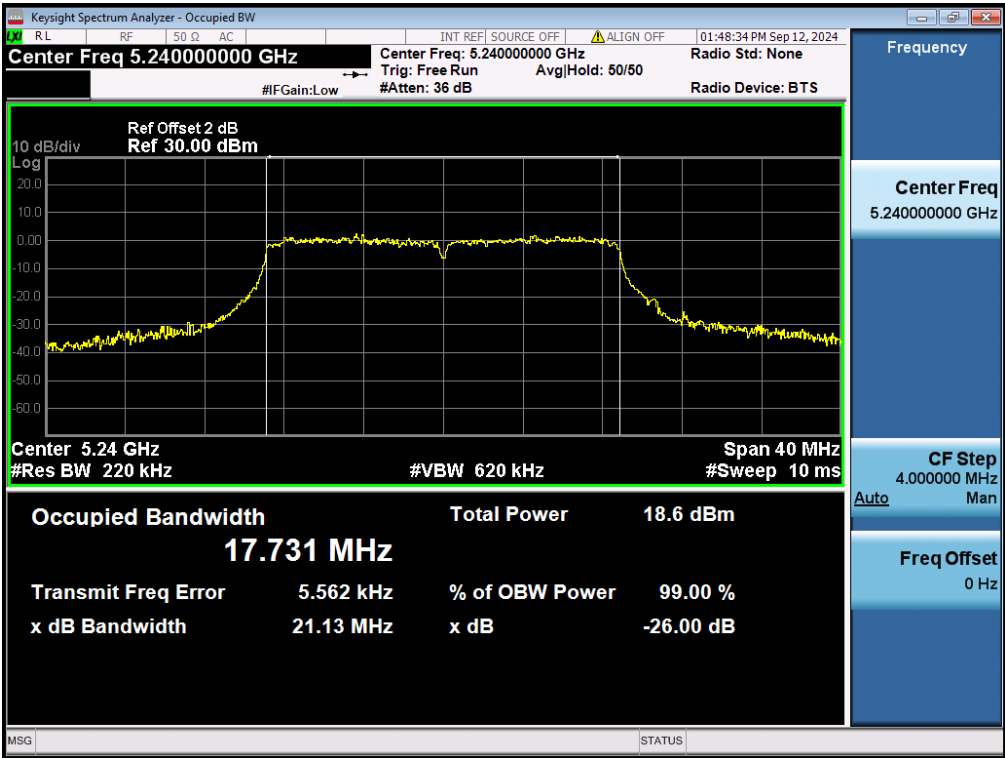


Figure 10: The plots of 26dB Bandwidth and 99% Bandwidth, 802.11n(HT40), 5190MHz

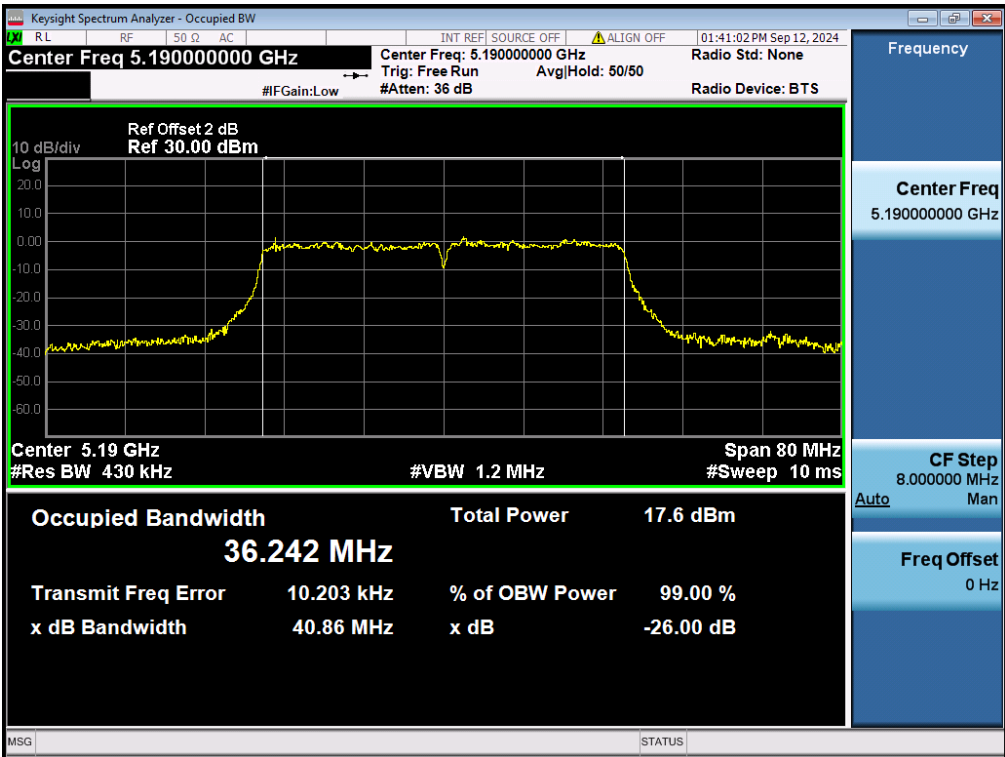

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 22 of 64

Figure 11: The plots of 26dB Bandwidth and 99% Bandwidth, 802.11n(HT40), 5230MHz


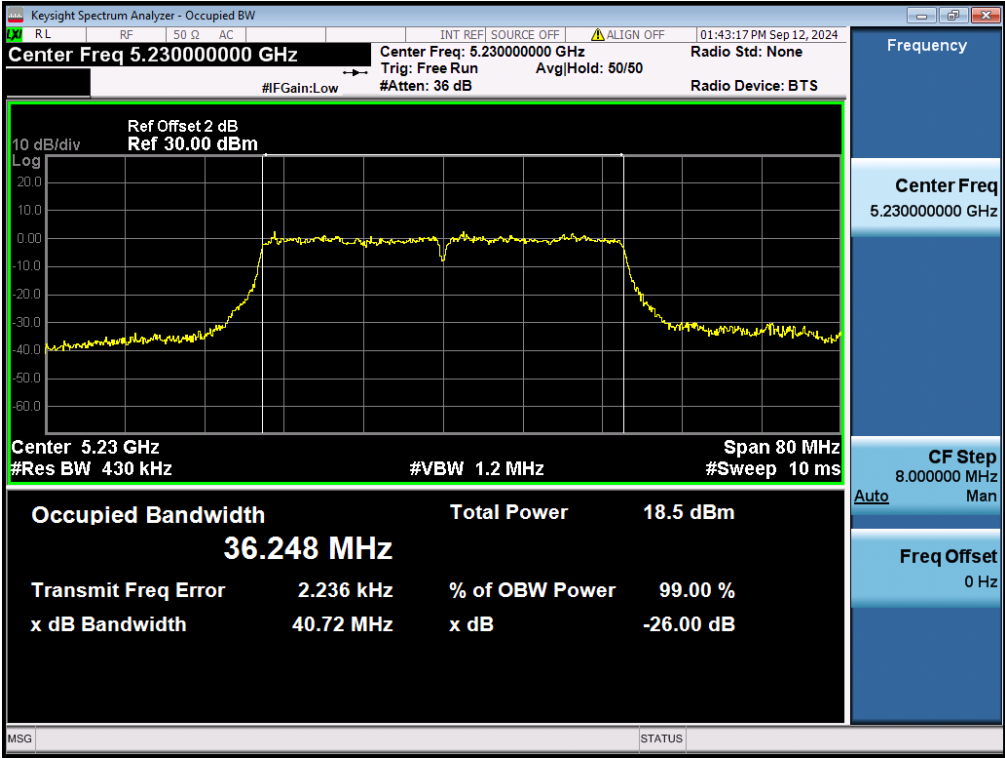


Figure 12: The plots of 26dB Bandwidth and 99% Bandwidth, 802.11ac(VHT40), 5190MHz

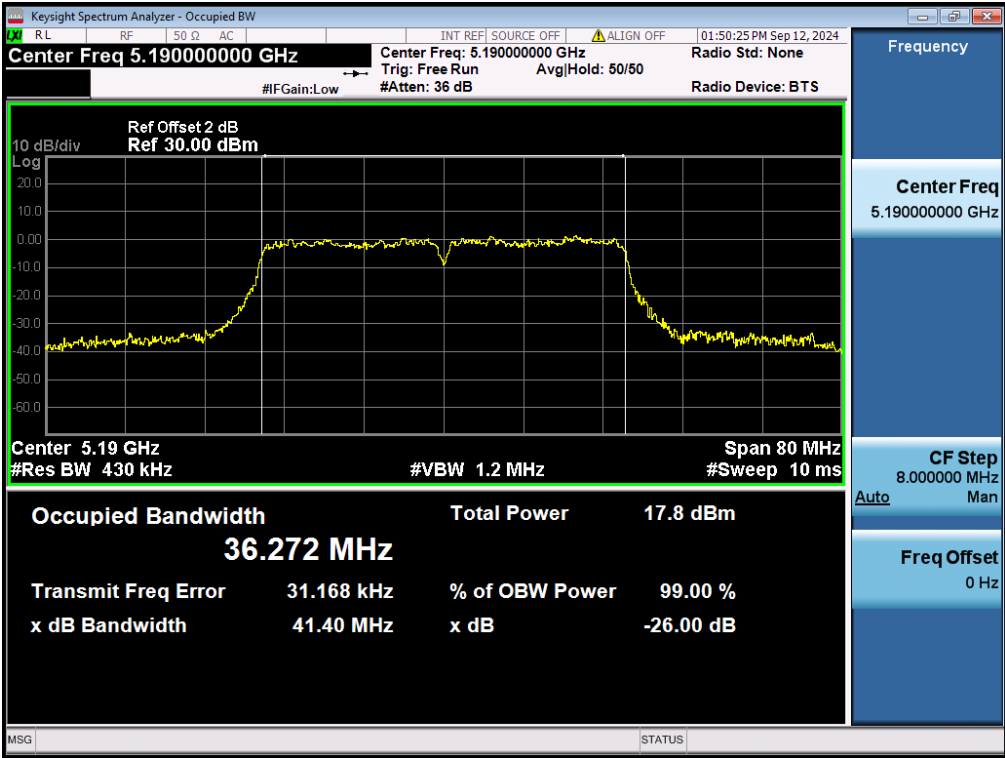

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 23 of 64

Figure 13: The plots of 26dB Bandwidth and 99% Bandwidth, 802.11ac(VHT40), 5230MHz


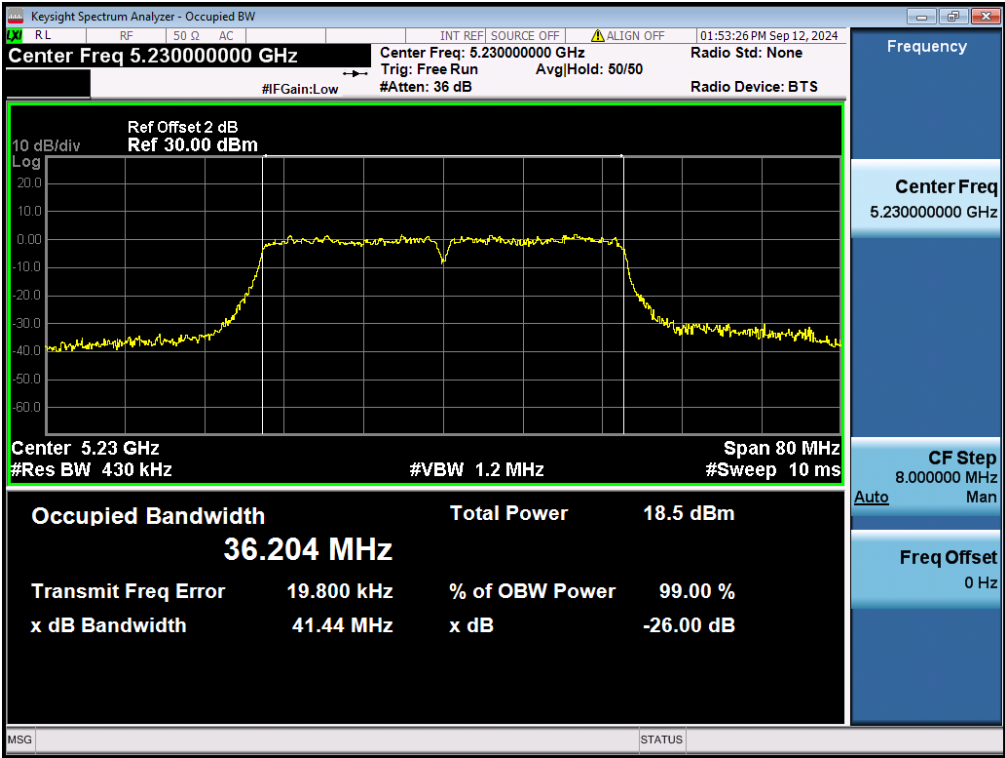


Figure 14: The plots of 26dB Bandwidth and 99% Bandwidth, 802.11ac(VHT80), 5210MHz

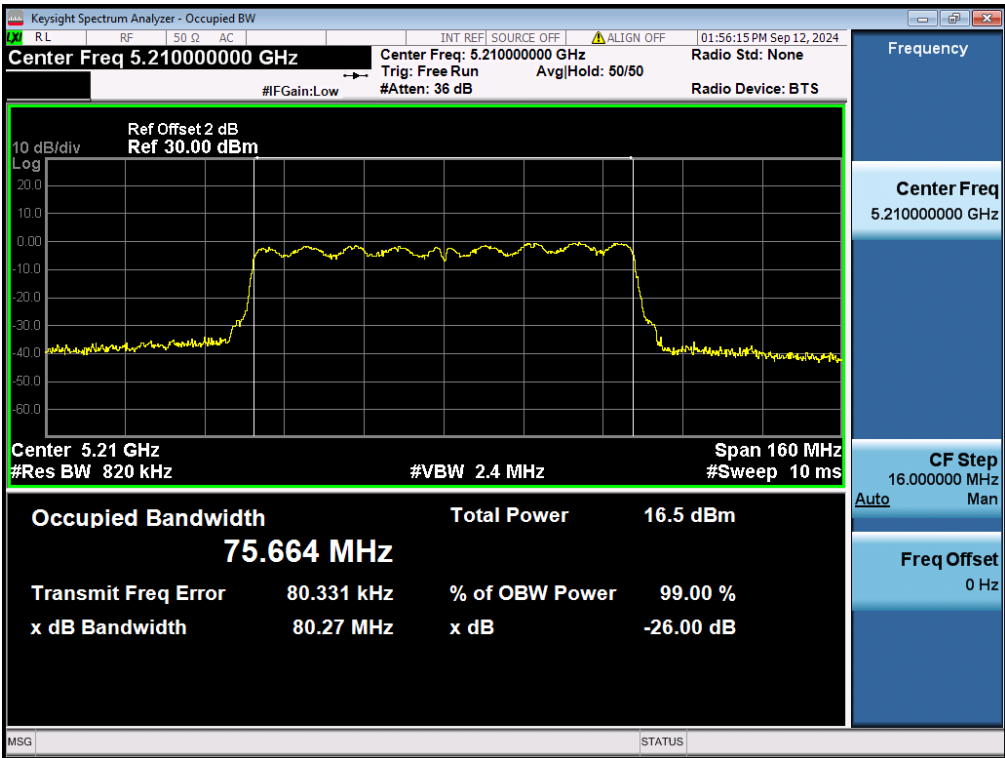

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 24 of 64

4.1.4 6dB Bandwidth and 99% Bandwidth

RESULT:

PASS

Test standard : FCC Part 15.407(e)

Requirement : ANSI C63.10-2013 clause 12.4, KDB 789033

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 24.4°C

Relative humidity : 36%

Table 4: 6dB Bandwidth for Band IV (5725 – 5850 MHz)

Test Mode	Test Channel (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Applicable Limit (MHz)
802.11a	5745	16.49	17.089	>0.5
	5785	16.44	17.244	
	5825	16.50	16.810	
802.11n(HT20)	5745	17.75	18.251	
	5785	17.75	18.321	
	5825	17.76	17.989	
802.11ac(VHT20)	5745	17.73	18.352	
	5785	17.74	18.308	
	5825	17.75	17.970	
802.11n(HT40)	5755	36.51	36.726	
	5795	36.53	36.675	
802.11ac(VHT40)	5755	36.47	36.664	
	5795	36.49	36.630	
802.11ac(VHT80)	5775	76.30	75.992	


TEST REPORT

Report No.: SHE24080045-02FE


Date: 2024-11-07

Page 25 of 64

Figure 15: 802.11a, 5745MHz
Test Plot of -6dB Bandwidth

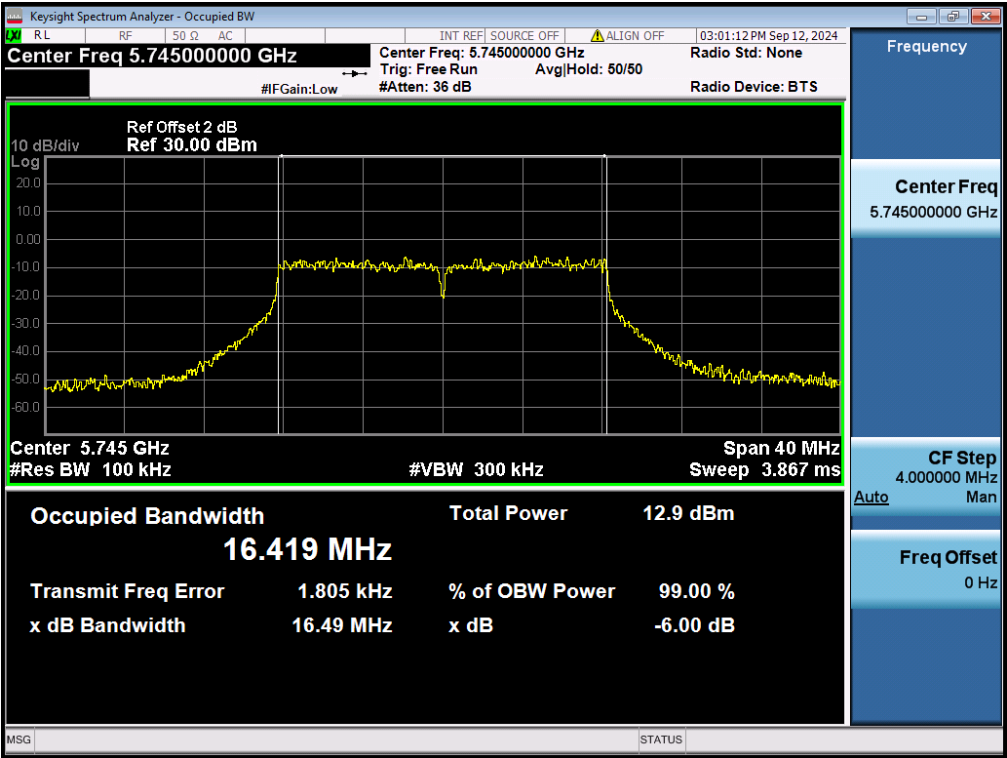

Test Plot of 99% Occupied Bandwidth

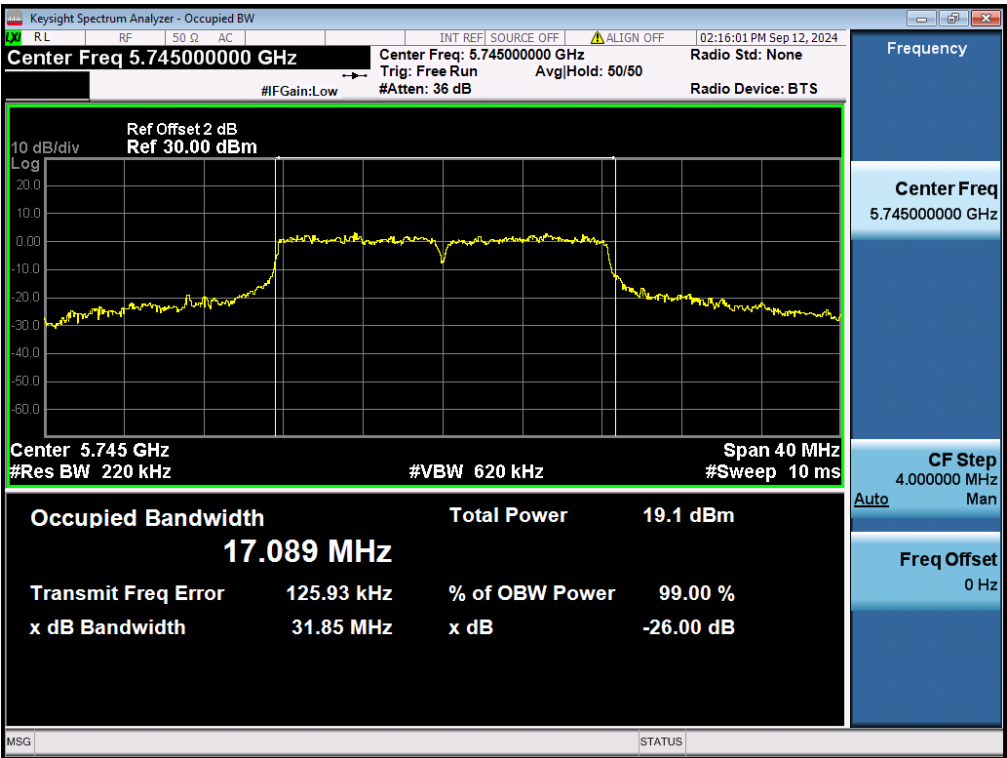


TEST REPORT

Report No.: SHE24080045-02FE


Date: 2024-11-07

Page 26 of 64

Figure 16: 802.11a, 5785MHz
Test Plot of -6dB Bandwidth

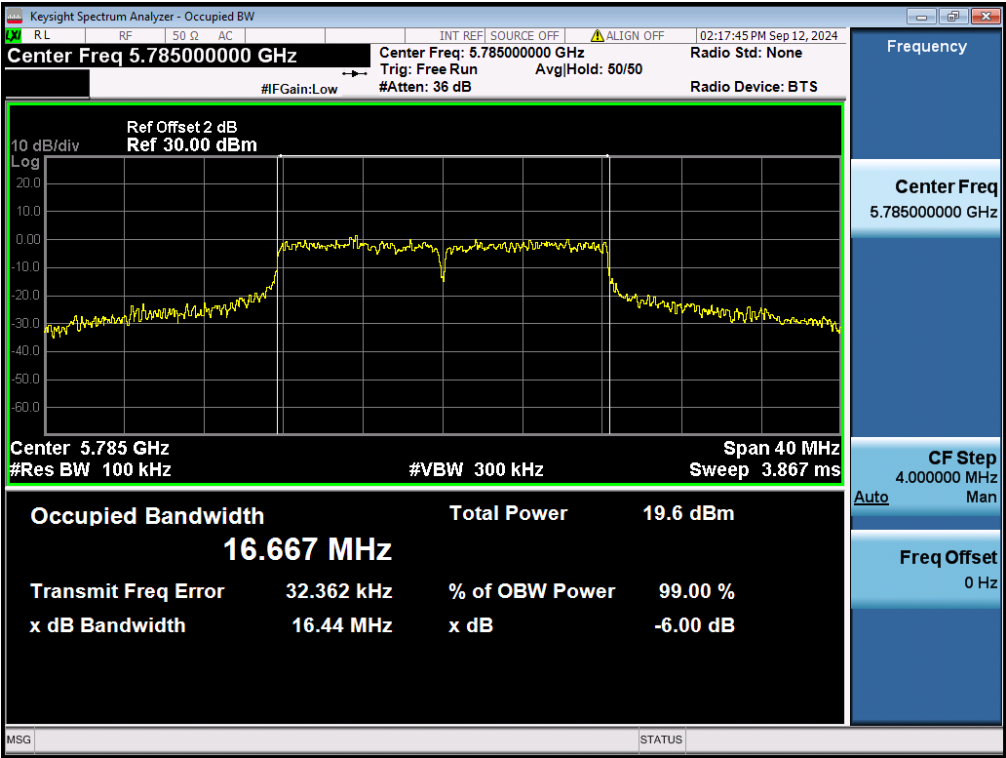

Test Plot of 99% Occupied Bandwidth

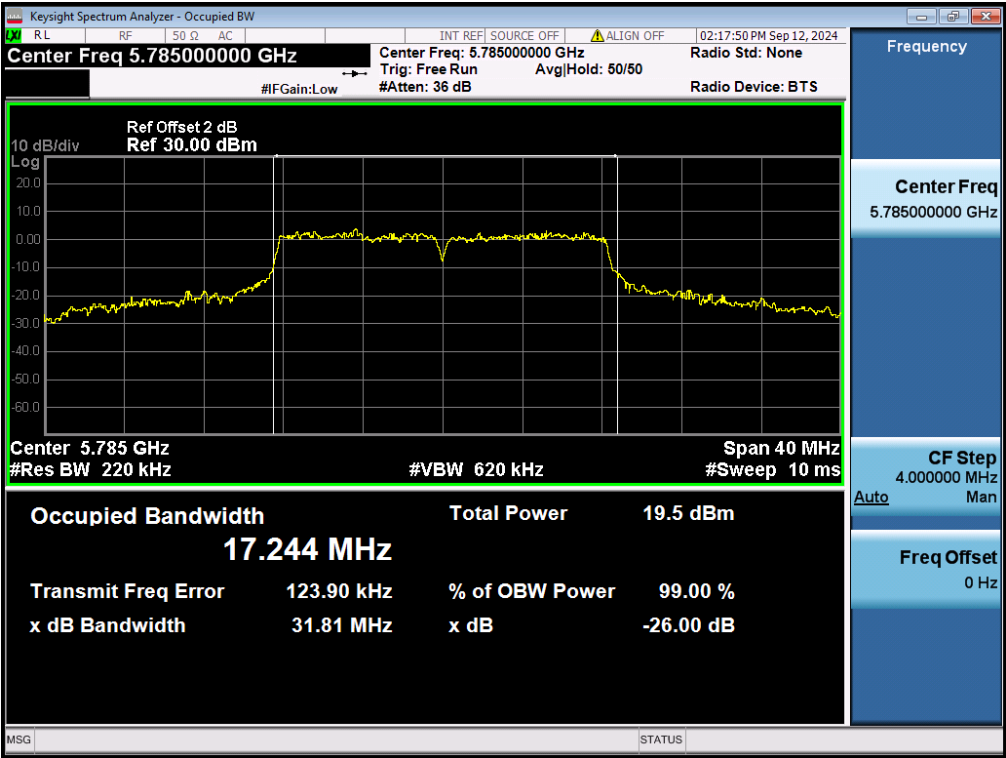

TEST REPORT


Report No.: SHE24080045-02FE

Date: 2024-11-07


Page 27 of 64

Figure 17: 802.11a, 5825MHz

Test Plot of -6dB Bandwidth

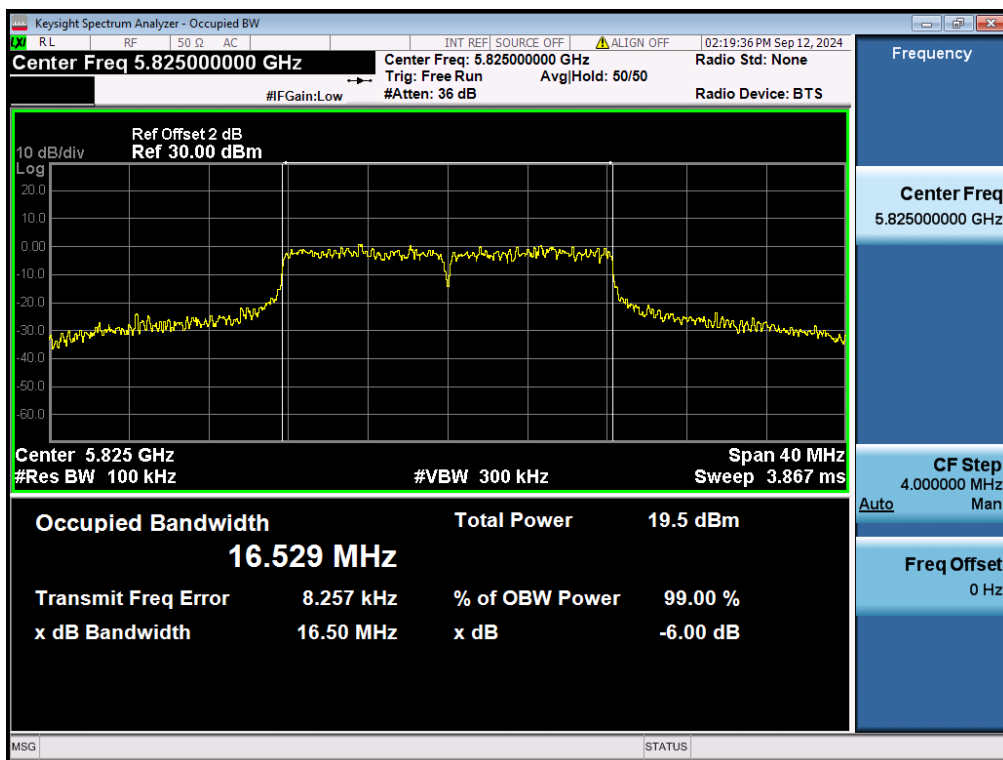

Test Plot of 99% Occupied Bandwidth

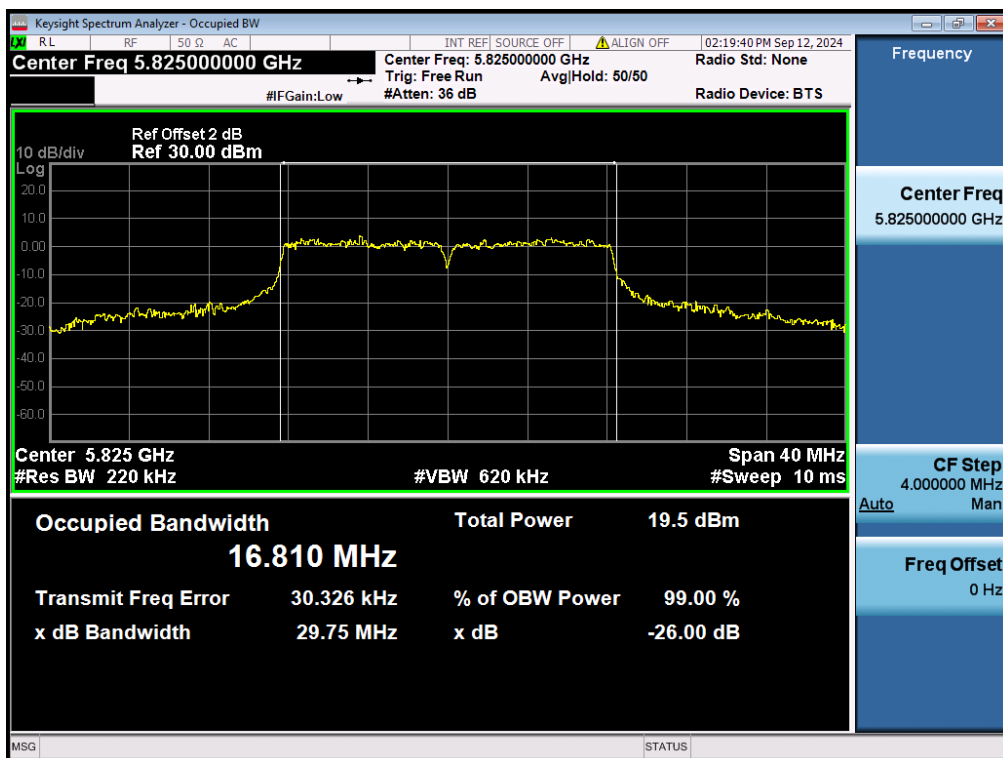


TEST REPORT

Report No.: SHE24080045-02FE


Date: 2024-11-07

Page 28 of 64

Figure 18: 802.11n(HT20), 5745MHz
Test Plot of -6dB Bandwidth

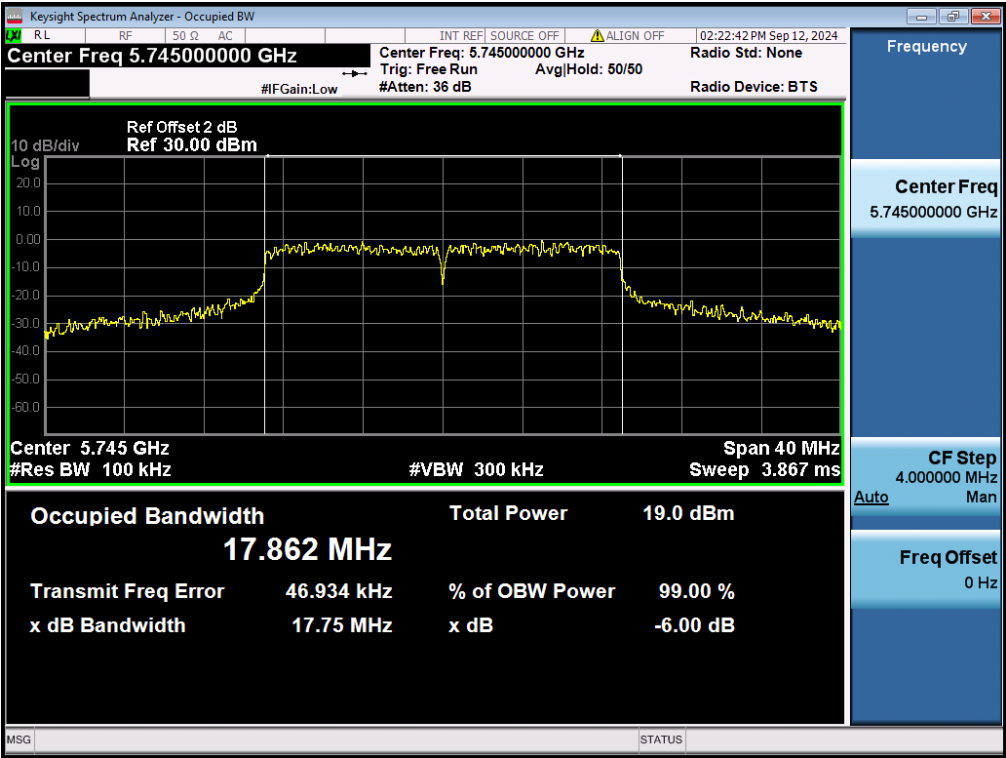

Test Plot of 99% Occupied Bandwidth

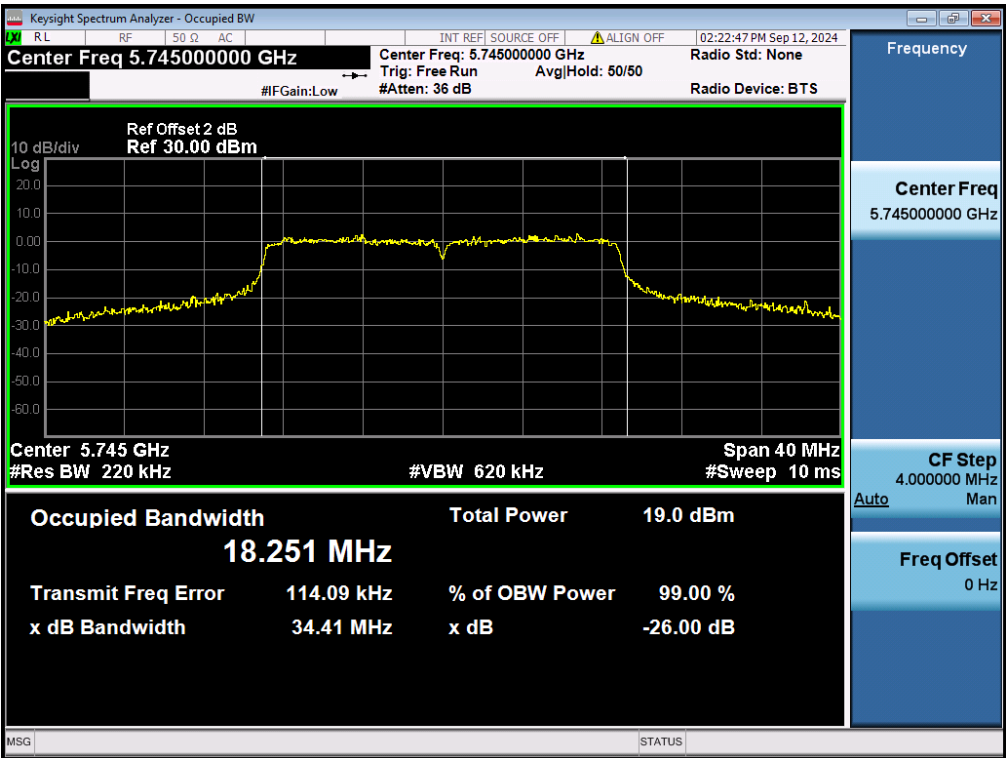


TEST REPORT

Report No.: SHE24080045-02FE


Date: 2024-11-07

Page 29 of 64

Figure 19: The plots of 6dB Bandwidth, 802.11n(HT20), 5785MHz
Test Plot of -6dB Bandwidth

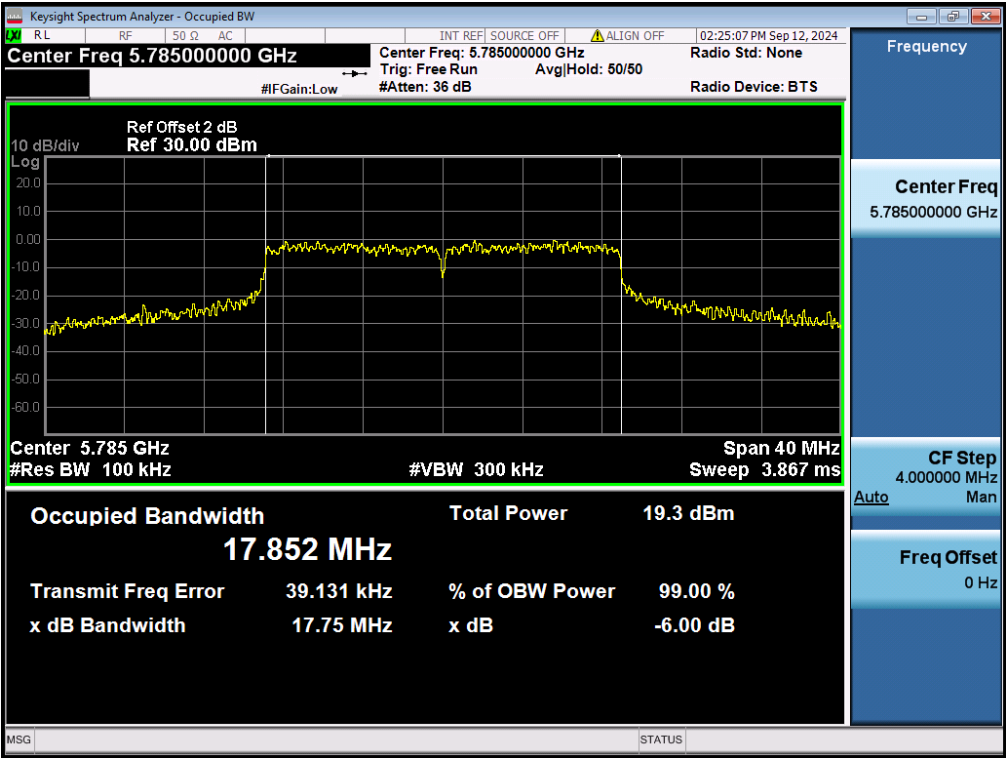

Test Plot of 99% Occupied Bandwidth

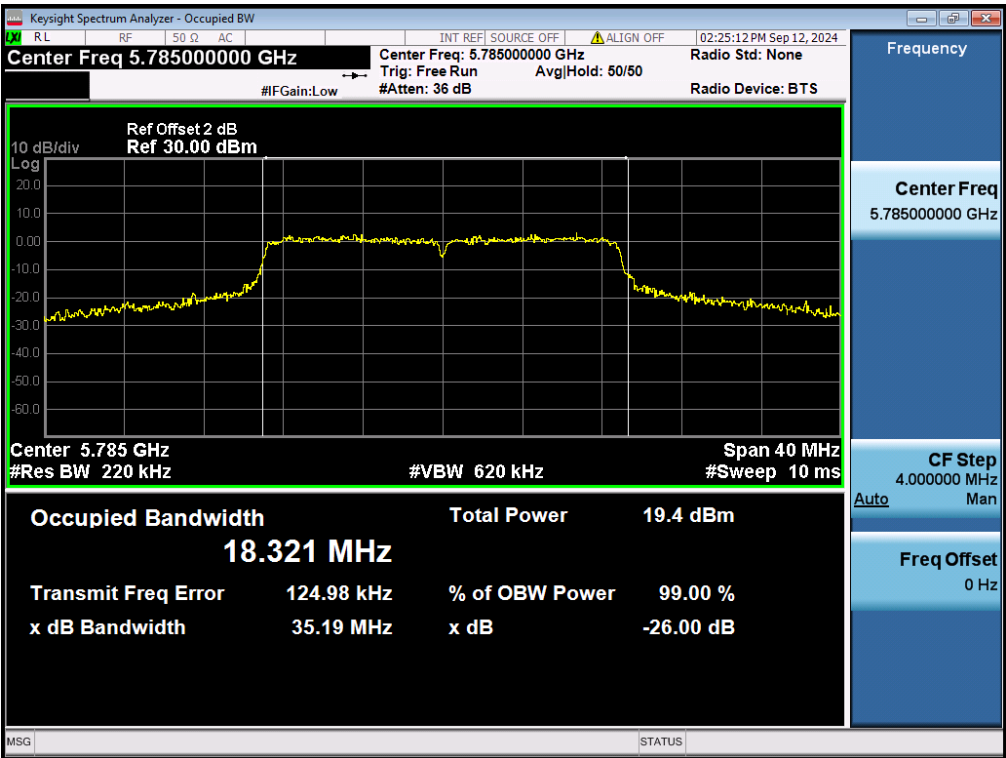


TEST REPORT

Report No.: SHE24080045-02FE


Date: 2024-11-07

Page 30 of 64

Figure 20: The plots of 6dB Bandwidth, 802.11n(HT20), 5825MHz
Test Plot of -6dB Bandwidth

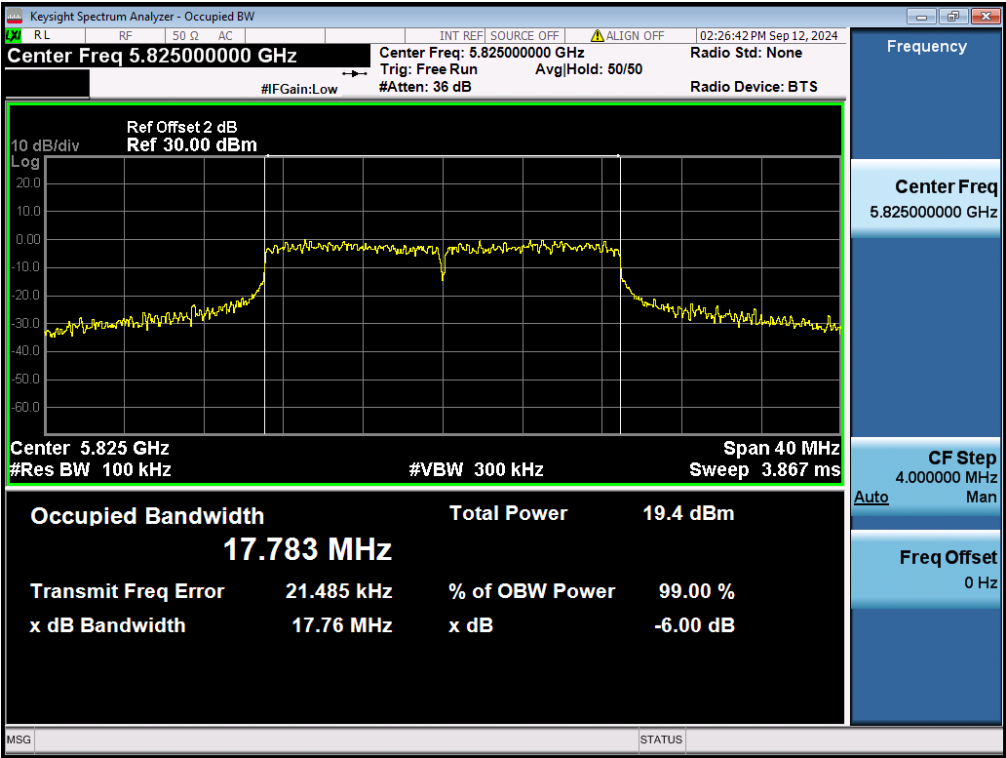

Test Plot of 99% Occupied Bandwidth

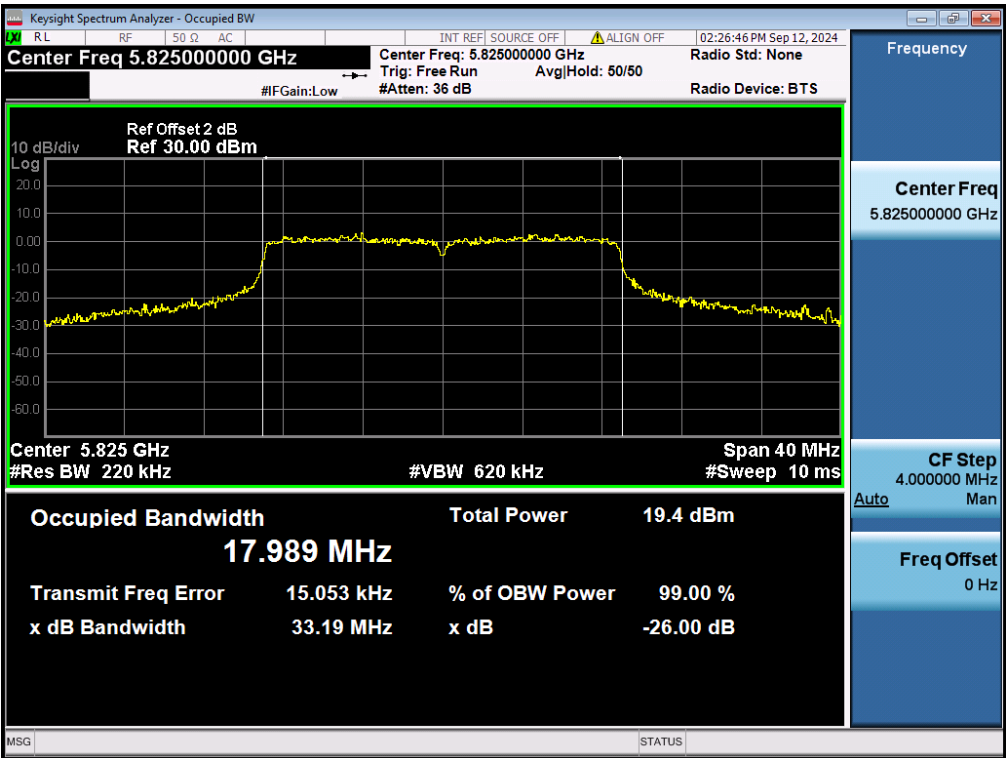


TEST REPORT

Report No.: SHE24080045-02FE


Date: 2024-11-07

Page 31 of 64

Figure 21: The plots of 6dB Bandwidth, 802.11ac(VHT20), 5745MHz
Test Plot of -6dB Bandwidth

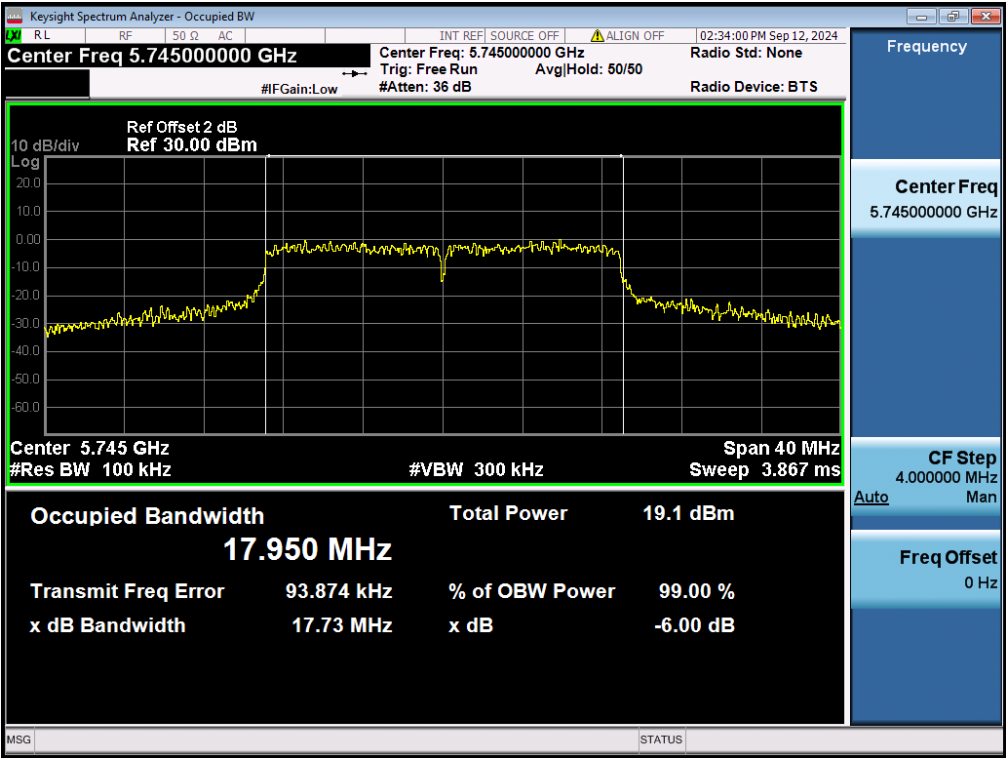

Test Plot of 99% Occupied Bandwidth

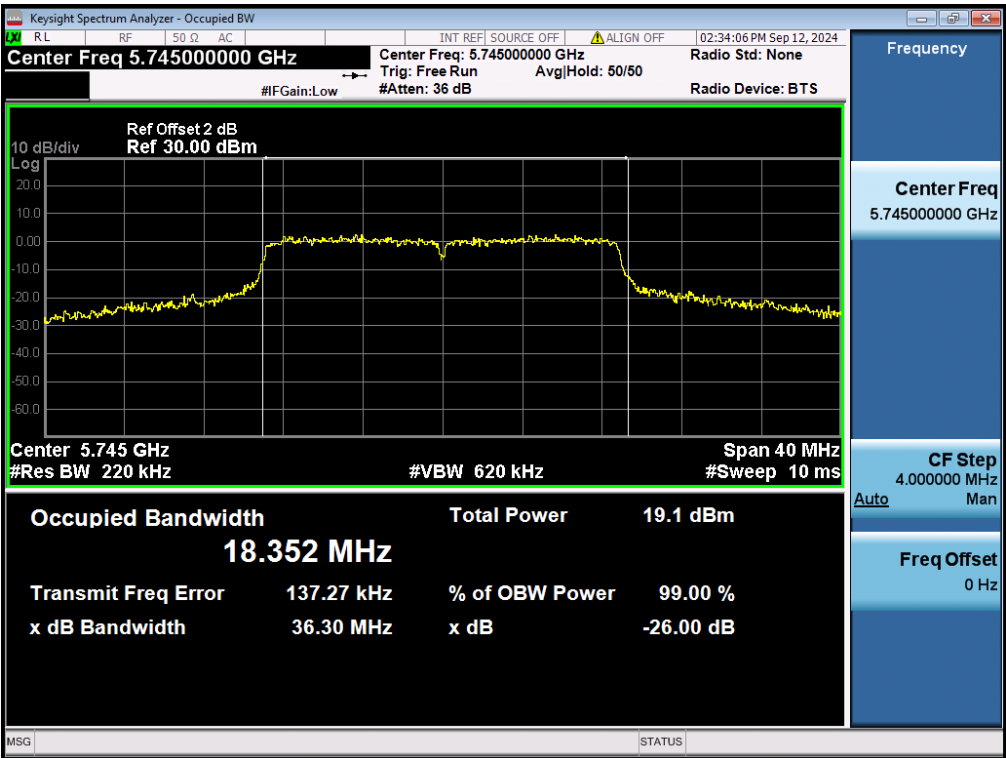


TEST REPORT

Report No.: SHE24080045-02FE


Date: 2024-11-07

Page 32 of 64

Figure 22: The plots of 6dB Bandwidth, 802.11ac(VHT20), 5785MHz
Test Plot of -6dB Bandwidth

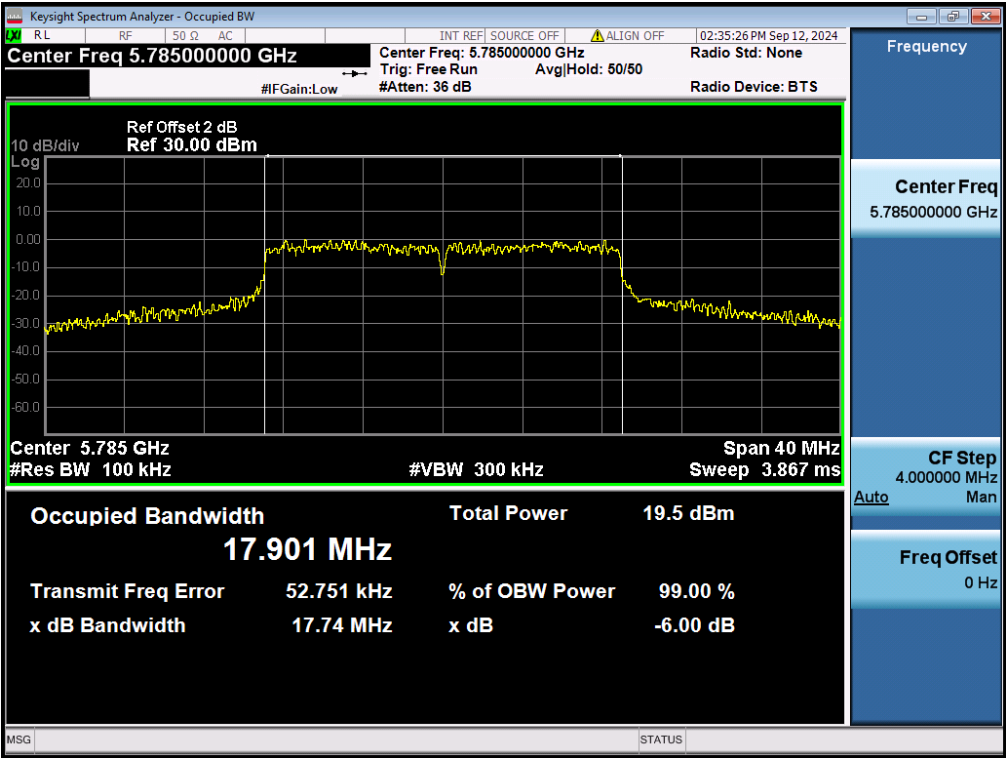

Test Plot of 99% Occupied Bandwidth

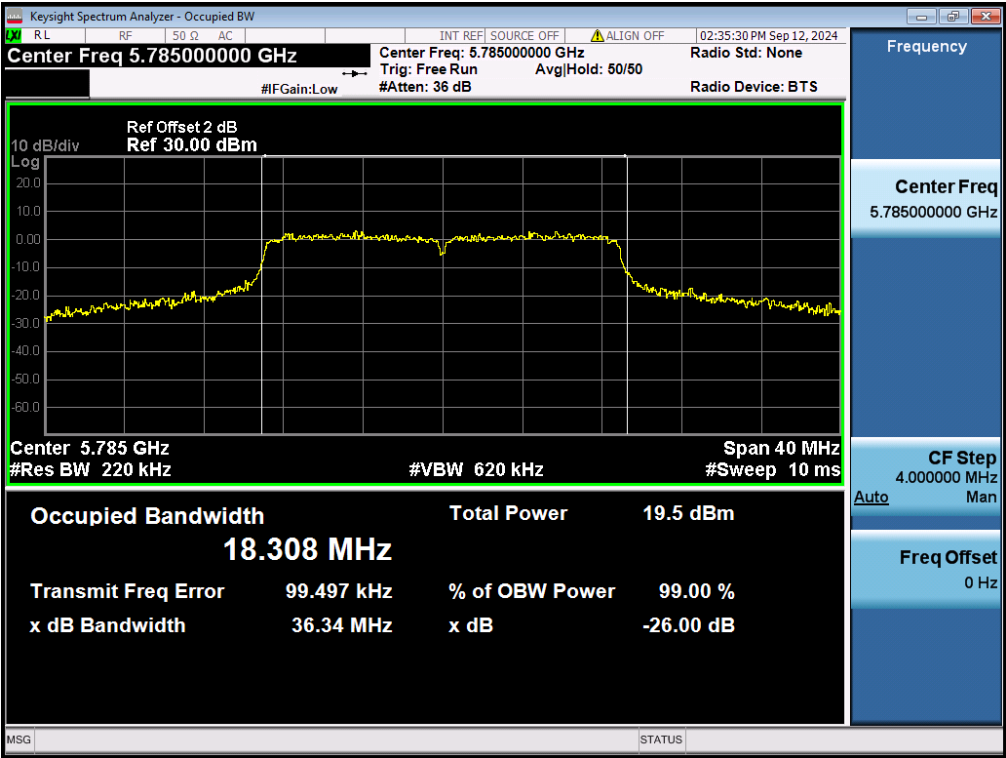


TEST REPORT

Report No.: SHE24080045-02FE


Date: 2024-11-07

Page 33 of 64

Figure 23: The plots of 6dB Bandwidth, 802.11ac(VHT20), 5825MHz
Test Plot of -6dB Bandwidth

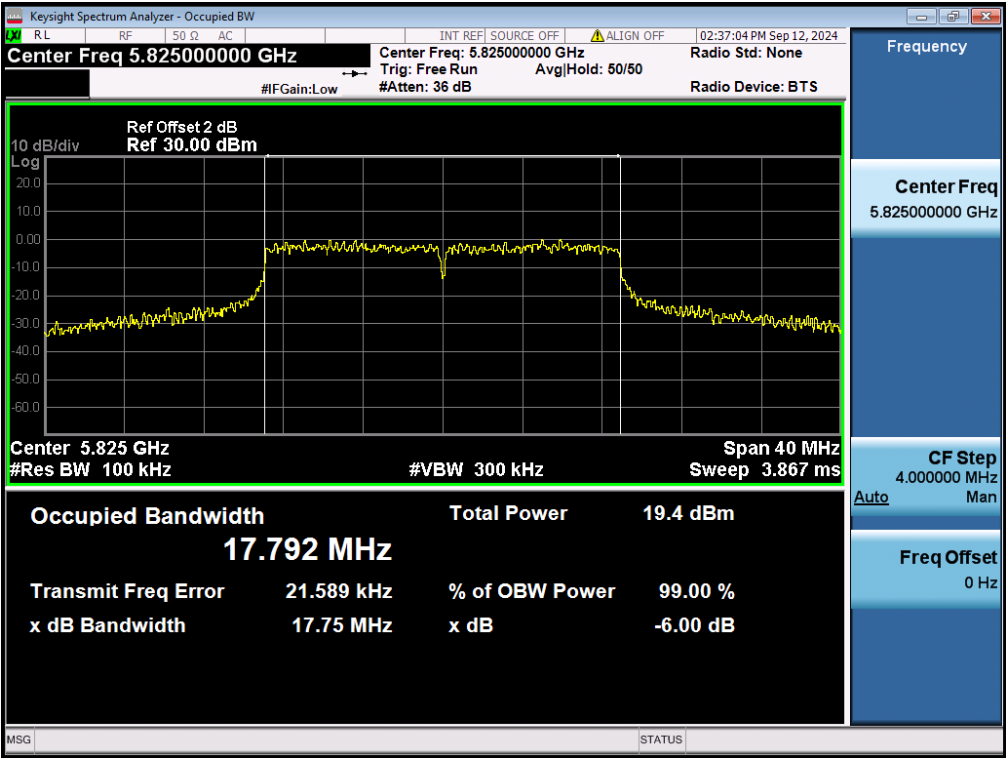

Test Plot of 99% Occupied Bandwidth

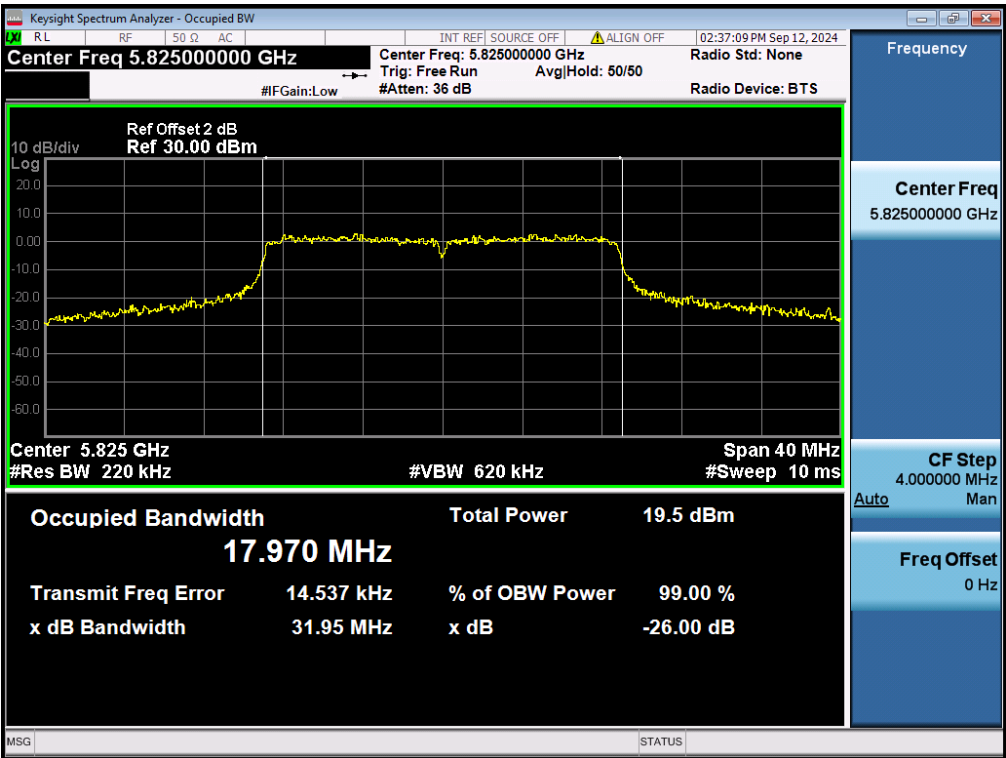


TEST REPORT

Report No.: SHE24080045-02FE


Date: 2024-11-07

Page 34 of 64

Figure 24: The plots of 6dB Bandwidth, 802.11n(HT40), 5755MHz
Test Plot of -6dB Bandwidth

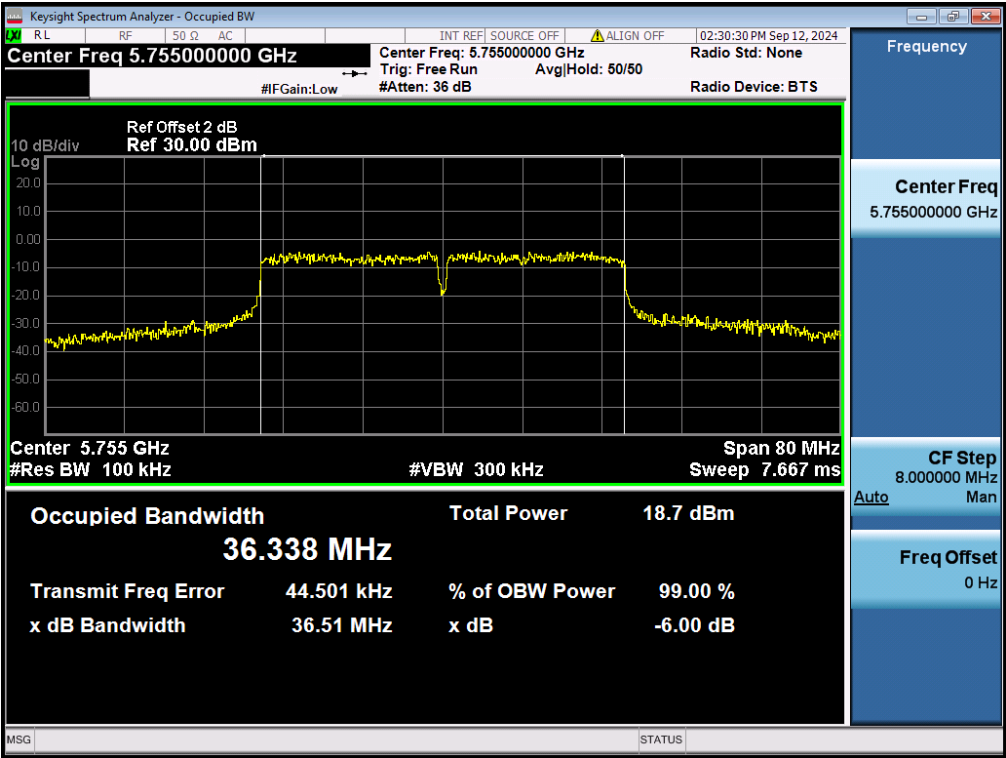

Test Plot of 99% Occupied Bandwidth

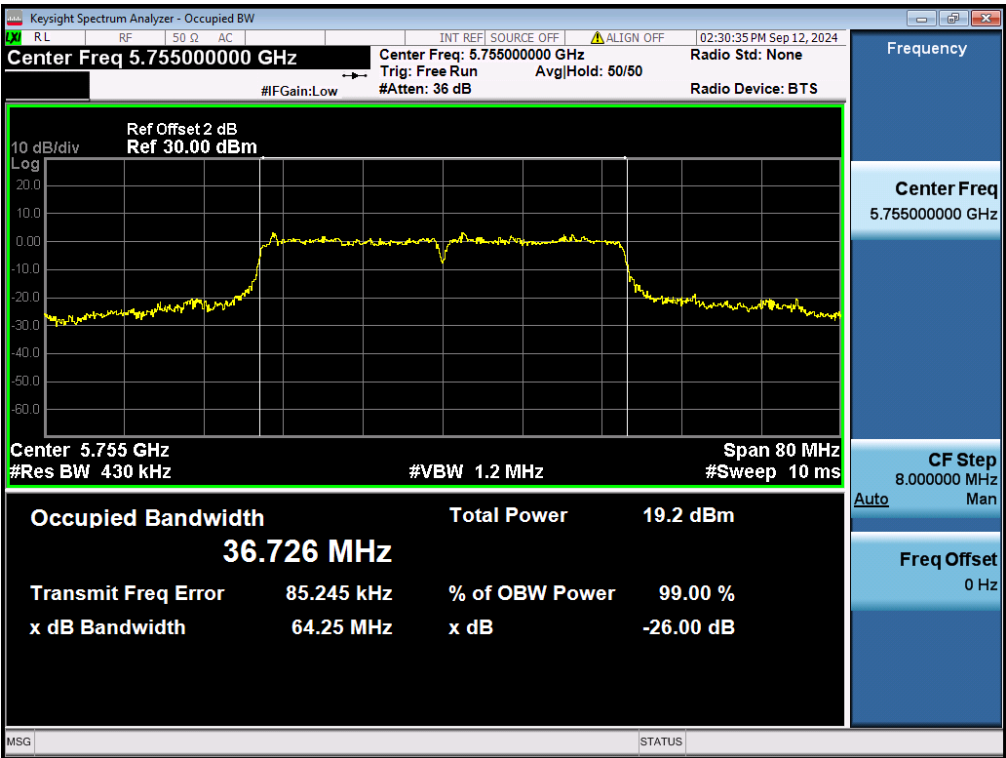


TEST REPORT

Report No.: SHE24080045-02FE


Date: 2024-11-07

Page 35 of 64

Figure 25: The plots of 6dB Bandwidth, 802.11n(HT40), 5795MHz
Test Plot of -6dB Bandwidth

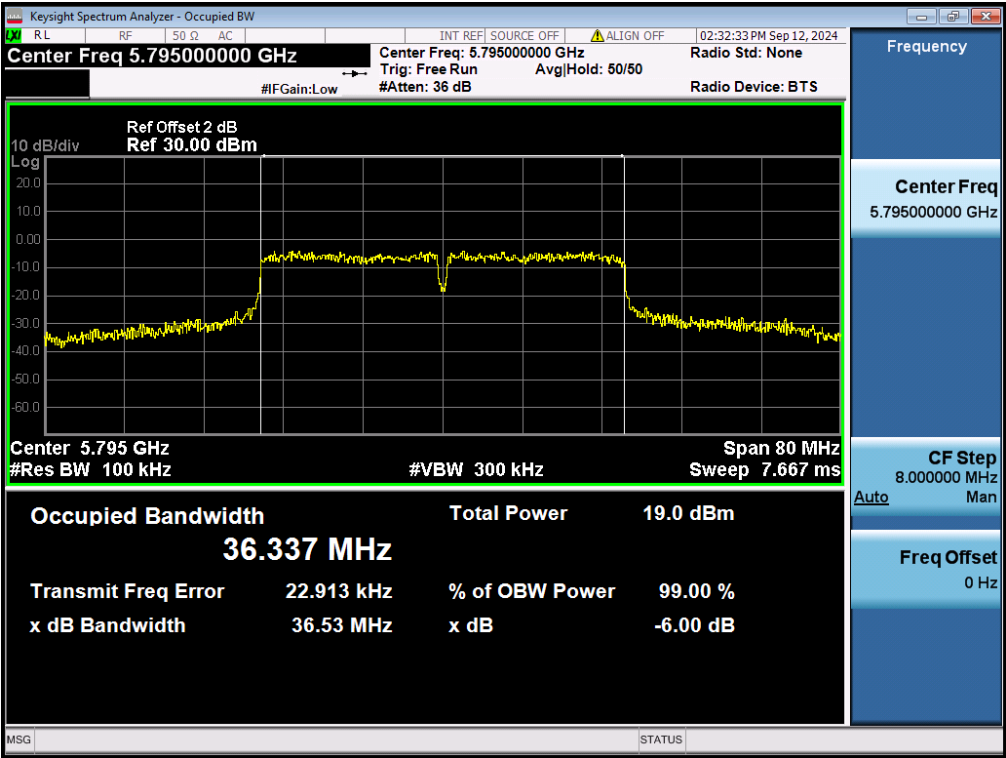

Test Plot of 99% Occupied Bandwidth

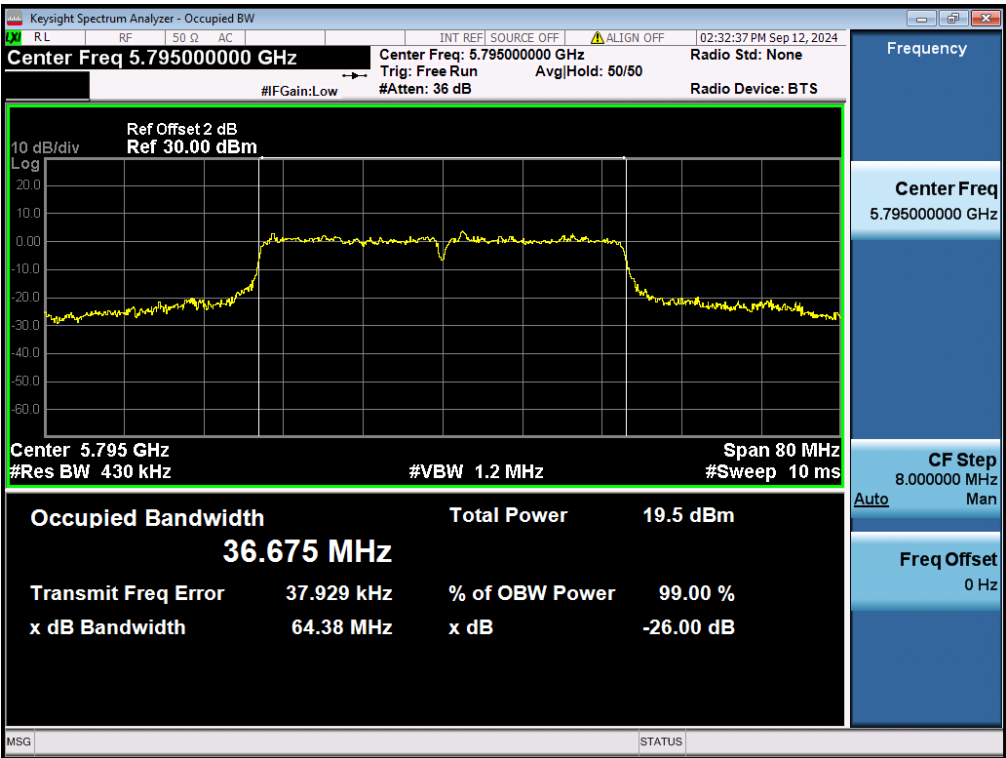


TEST REPORT

Report No.: SHE24080045-02FE


Date: 2024-11-07

Page 36 of 64

Figure 26: The plots of 6dB Bandwidth, 802.11ac(VHT40), 5755MHz
Test Plot of -6dB Bandwidth

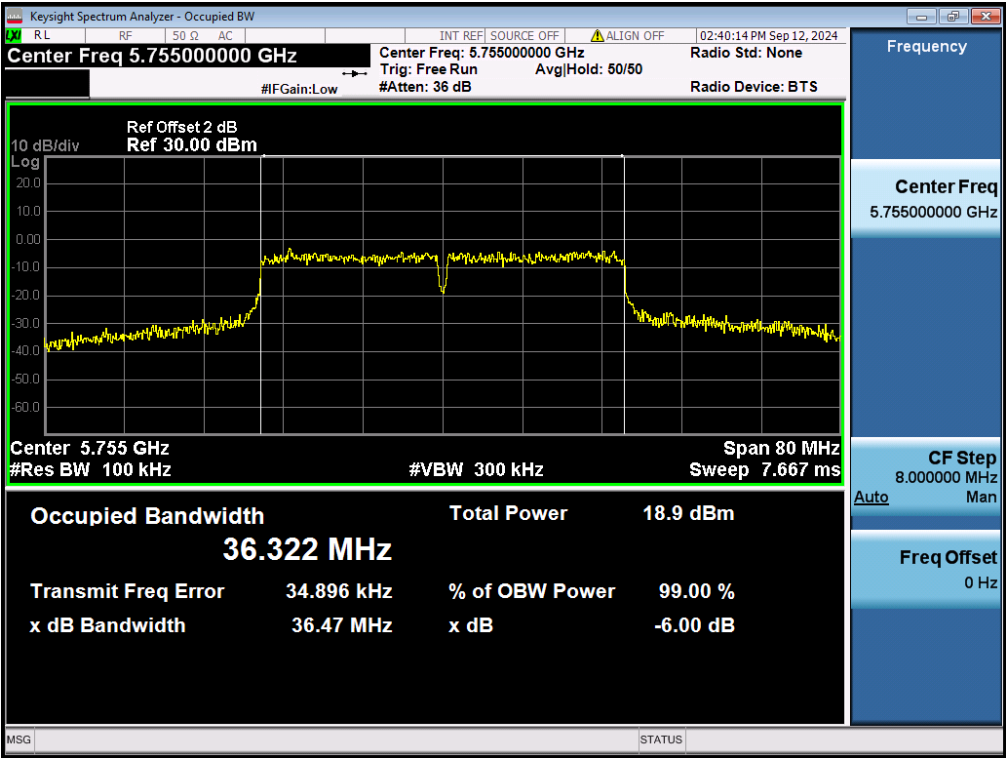

Test Plot of 99% Occupied Bandwidth

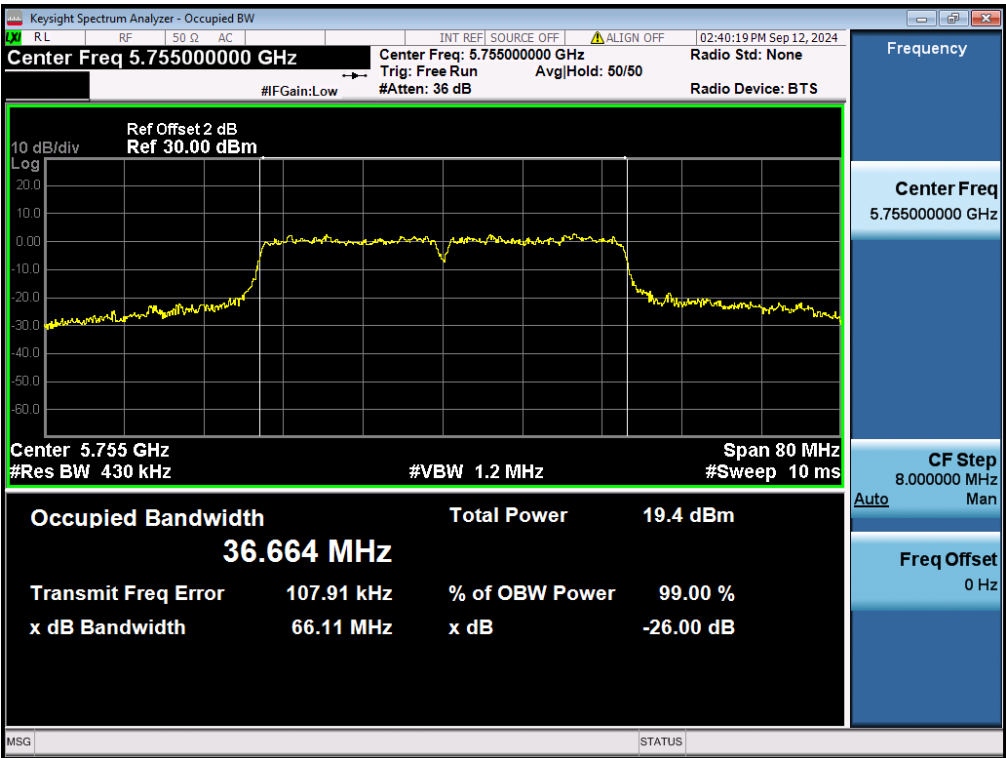


TEST REPORT

Report No.: SHE24080045-02FE


Date: 2024-11-07

Page 37 of 64

Figure 27: The plots of 6dB Bandwidth, 802.11ac(VHT40), 5795MHz
Test Plot of -6dB Bandwidth

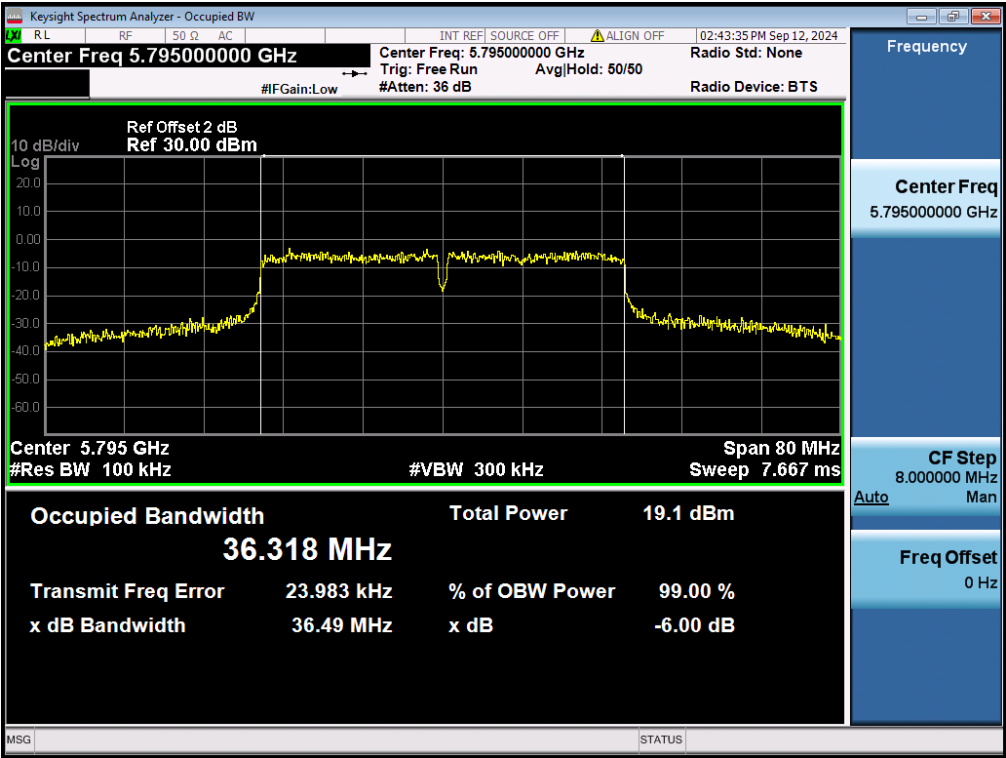

Test Plot of 99% Occupied Bandwidth

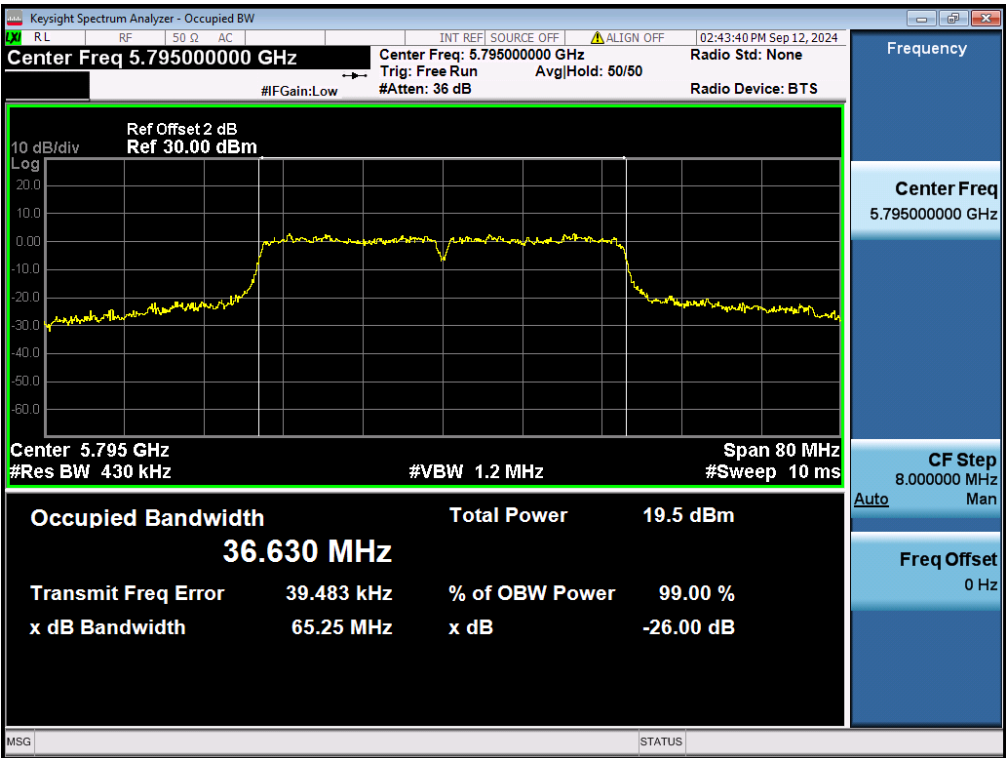


TEST REPORT

Report No.: SHE24080045-02FE


Date: 2024-11-07

Page 38 of 64

Figure 28: The plots of 6dB Bandwidth, 802.11ac(VHT80), 5775MHz
Test Plot of -6dB Bandwidth

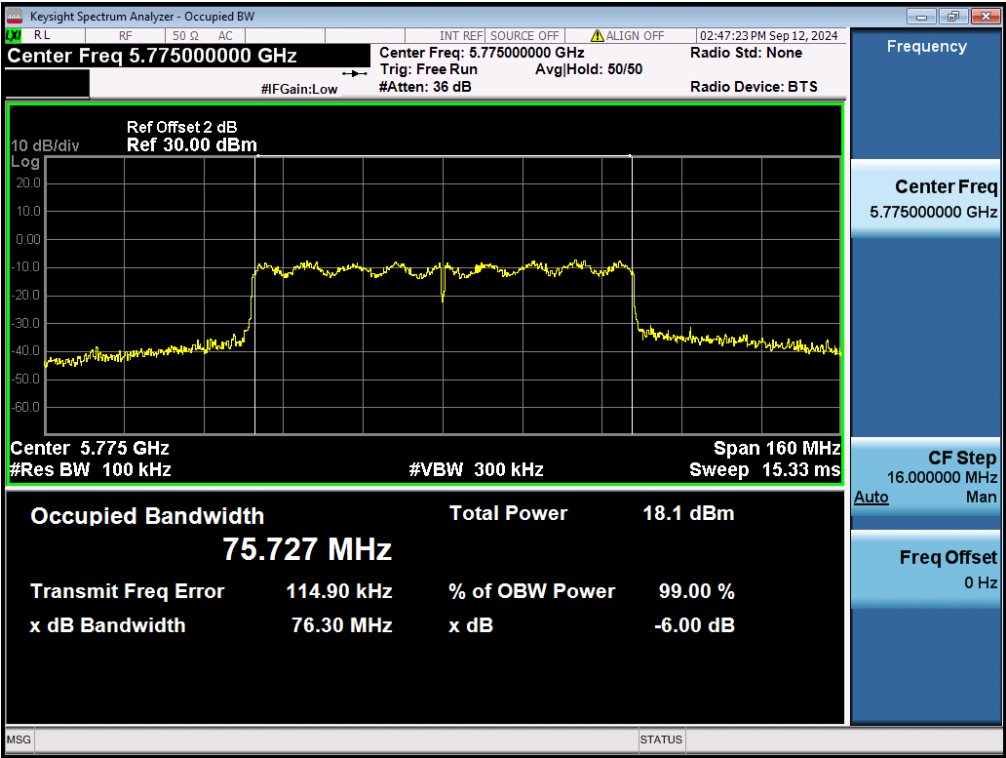

Test Plot of 99% Occupied Bandwidth

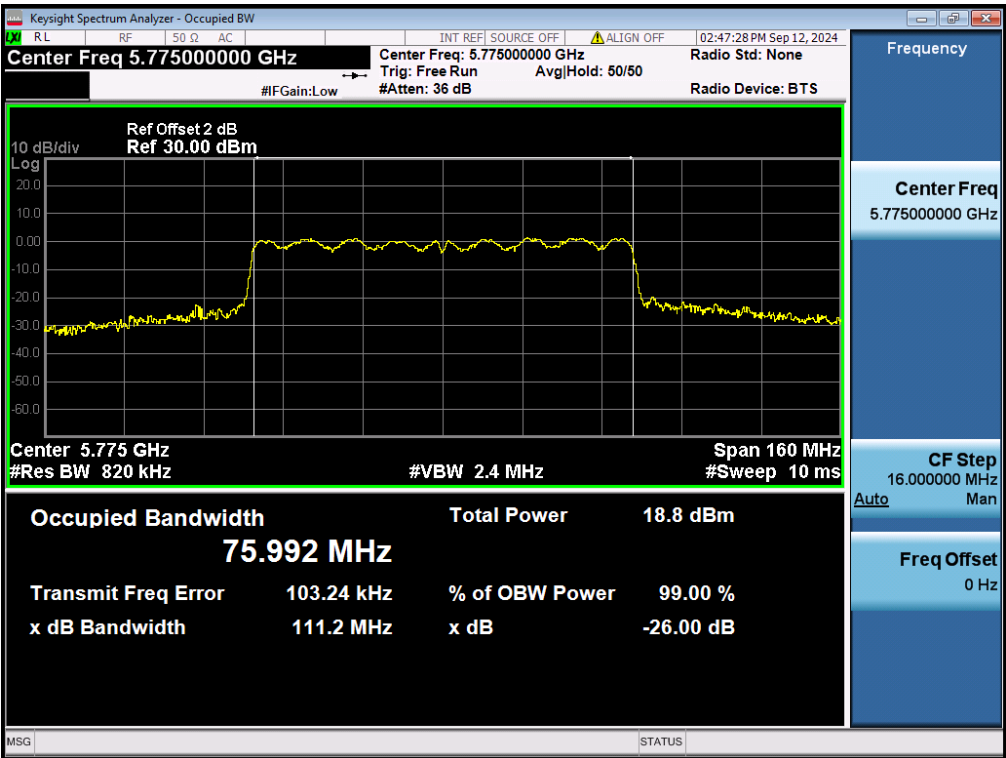

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 39 of 64

4.1.5 Maximum Conducted Output Power Spectral Density

RESULT:

PASS

Test standard : FCC Part 15.407(a)

Requirement : ANSI C63.10-2013 clause 12.5(SA-2), KDB 789033

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 24.4°C

Relative humidity : 36%

Notes:

Test plots please refer to the annex document “SHE24080045-02FE DATA WIFI 5GHz- Maximum Conducted Output Power Spectral Density EXHIBIT A”

Table 5: Maximum Conducted Output Power Spectral Density for Band I (5150MHz~5250MHz)

Test Mode	Duty Cycle	Test Channel (MHz)	Maximum PSD (dBm/MHz)	Applicable Limit (dBm/MHz)
802.11a	100	5180	4.91	11
		5220	6.10	
		5240	6.62	
802.11n(HT20)	100	5180	4.31	
		5220	6.11	
		5240	6.17	
802.11ac(VHT20)	100	5180	4.68	
		5220	6.17	
		5240	6.89	
802.11n(HT40)	100	5190	2.59	
		5230	3.25	
802.11ac(VHT40)	100	5190	1.89	
		5230	2.85	
802.11ac(VHT80)	100	5210	-2.75	

Notes:

1. Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.

TEST REPORT

Table 6: Maximum Conducted Output Power Spectral Density for Band IV (5725MHz~5850MHz)

Test Mode	Duty Cycle	Test Channel (MHz)	Maximum PSD (dBm/500kHz)	Applicable Limit (dBm/500kHz)
802.11a	100	5745	5.21	30
		5785	6.01	
		5825	4.60	
802.11n(HT20)	100	5745	5.49	
		5785	4.74	
		5825	4.65	
802.11ac(VHT20)	100	5745	5.08	
		5785	5.42	
		5825	5.30	
802.11n(HT40)	100	5755	1.16	
		5795	2.16	
802.11ac(VHT40)	100	5755	2.24	
		5795	1.78	
802.11ac(VHT80)	100	5775	-2.87	

Notes:

1. Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 41 of 64

4.1.6 Conducted Spurious Emission

RESULT:

PASS

Test standard	: FCC Part 15.407(b), 15.209
Requirement	: ANSI C63.10-2013 clause 12.7.4, KDB 789033
Kind of test site	: Shielded room

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A.1.a
Ambient temperature	: 24.5°C
Relative humidity	: 36%

Notes:

Test plots please refer to the annex document “SHE24080045-02FE DATA WIFI 5GHz-TX CSE EXHIBIT A”.

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 42 of 64

4.1.7 24.8 Radiated Emission

RESULT:

PASS

Test standard	: FCC Part 15.407(b), 15.209, 15.205
Requirement	: ANSI C63.10-2013 clause 12.7.4, KDB 789033
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A.1.a
Ambient temperature	: 22.5-24.8°C
Relative humidity	: 47-53%

Notes:

Test plots please refer to the annex document "SHE24080045-02FE DATA WIFI 5GHz-TX EXHIBIT A"

1. For 9 kHz ~ 30 MHz, the amplitude of spurious emissions that are attenuated by more than 20dB below the permissible. The value has no need to be reported.
2. The spurious above 18GHz is noise only and 20dB below the limit. The value has no need to be reported.
3. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.
4. Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Results-Limit.

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 43 of 64

4.1.8 Band Edge (Restricted-band band-edge)

RESULT:

PASS

Test standard	: FCC Part 15.407(b)
Requirement	: ANSI C63.10-2013 clause 12.7.4.4, KDB 789033
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/High
Operation Mode	: A.1.a
Ambient temperature	: 22.5-24.8°C
Relative humidity	: 47-53%

Notes:

Test plots please refer to the annex document "SHE24080045-02FE DATA WIFI 5GHz-TX EXHIBIT A"

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.
2. Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Results-Limit.

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 44 of 64

4.1.9 Frequency Stability

RESULT:

PASS

Test standard

: FCC Part 15.407(g)

Kind of test site

: Shielded room

Test setup

Test Channel

: Low/Middle/High

Operation Mode

: A.1.a

Ambient temperature

: 24.5°C

Relative humidity

: 36%

Table 7: Frequency Stability

Band I (5150MHz – 5250MHz):
Voltage vs. Frequency Stability (5180MHz)

Test Conditions		Frequency (MHz)	Max. Deviation (ppm)	Limit (ppm)
Temp (°C)	Voltage (V)			
20	AC 120V	5179.983550	3.18	± 20
	AC 100V	5179.984075	3.07	
	AC 240V	5179.984125	3.06	

Temperature vs. Frequency Stability (5180MHz)

Test Conditions		Frequency (MHz)	Max. Deviation (ppm)	Limit (ppm)
Voltage (V)	Temp (°C)			
AC 120V	0	5179.984050	3.08	± 20
	10	5179.984075	3.07	
	20	5179.982775	3.33	
	30	5179.983050	3.27	
	40	5179.983250	3.23	
	50	5179.982800	3.32	
	60	5179.982950	3.29	
	70	5179.982975	3.29	

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 45 of 64

Band IV (5725MHz – 5850MHz):
Voltage vs. Frequency Stability (5745MHz)

Test Conditions		Frequency (MHz)	Max. Deviation (ppm)	Limit (ppm)
Temp (°C)	Voltage (V)			
20	AC 120V	5744.984450	2.71	± 20
	AC 100V	5744.984100	2.77	
	AC 240V	5744.983800	2.82	

Temperature vs. Frequency Stability (5745MHz)

Test Conditions		Frequency (MHz)	Max. Deviation (ppm)	Limit (ppm)
Voltage (V)	Temp (°C)			
AC 120V	0	5744.983575	2.86	± 20
	10	5744.981875	3.15	
	20	5744.982125	3.11	
	30	5744.982175	3.10	
	40	5744.982250	3.09	
	50	5744.980800	3.34	
	60	5744.981225	3.27	
	70	5744.981475	3.22	

Note:
The all configurations were tested respectively, but only the worst channel shown here.

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 46 of 64

4.2 Mains Emissions

4.2.1 Conducted Emission on AC Mains

RESULT:

PASS

Test standard	: FCC Part 15.207
Requirement	: ANSI C63.10-2013 clause 6.2
Kind of test site	: Shielded room

Test setup

Input Voltage	: Which received AC 120V, 60Hz Power
Operation Mode	: A.1.a
Earthing	: Not Connected
Ambient temperature	: 26°C
Relative humidity	: 49%

For details refer to following test plot.

TEST REPORT


Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 47 of 64

Note: The all configurations were tested respectively, but only the worst configuration shown here.

Figure 29: Conducted Emission on AC Mains, L Phase

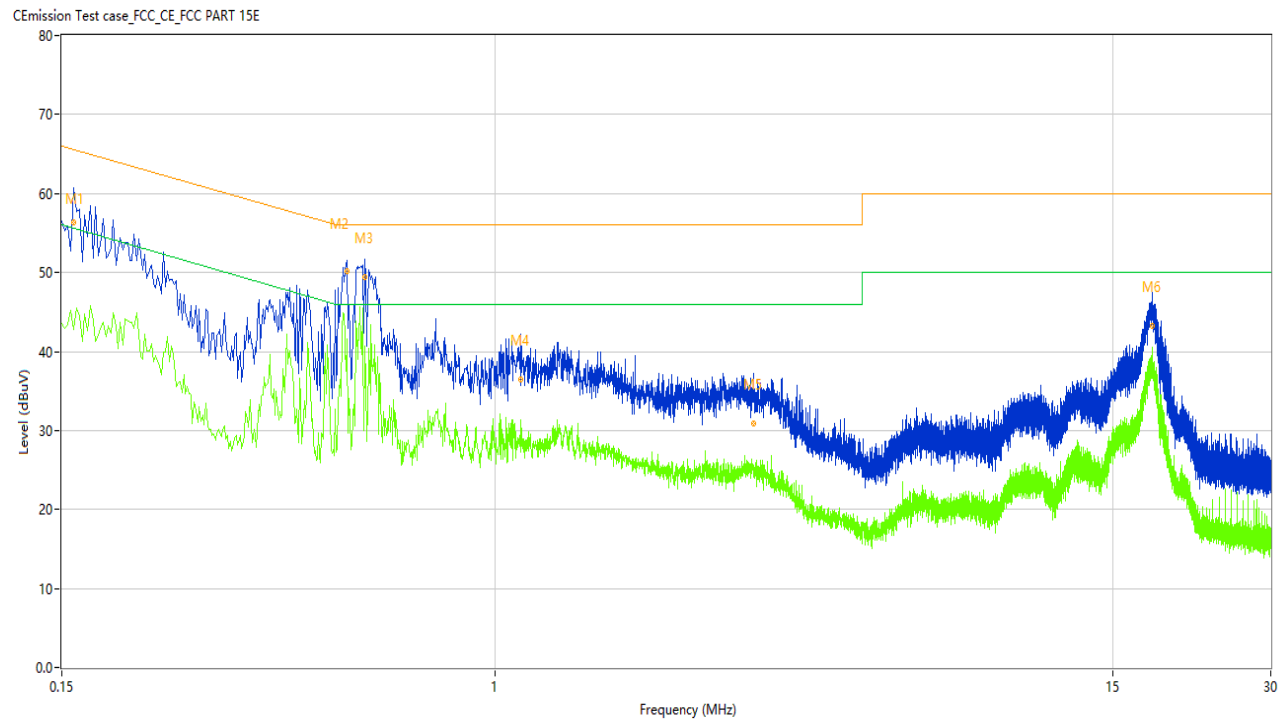

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.158	61.31	9.85	65.57	4.26	Peak	L	Pass
1*	0.158	56.39	9.85	65.57	9.18	QP	L	Pass
1**	0.158	42.78	9.85	55.57	12.79	AV	L	Pass
2	0.524	52.02	9.87	56.00	3.98	Peak	L	Pass
2*	0.524	50.21	9.87	56.00	5.79	QP	L	Pass
2**	0.524	41.58	9.87	46.00	4.42	AV	L	Pass
3	0.566	51.96	9.88	56.00	4.04	Peak	L	Pass
3*	0.566	49.38	9.88	56.00	6.62	QP	L	Pass
3**	0.566	40.63	9.88	46.00	5.37	AV	L	Pass
4	1.122	41.38	9.76	56.00	14.62	Peak	L	Pass
4*	1.122	36.45	9.76	56.00	19.55	QP	L	Pass
4**	1.122	31.38	9.76	46.00	14.62	AV	L	Pass
5	3.108	34.75	9.81	56.00	21.25	Peak	L	Pass
5*	3.108	30.94	9.81	56.00	25.06	QP	L	Pass
5**	3.108	25.42	9.81	46.00	20.58	AV	L	Pass
6	17.878	47.06	9.39	60.00	12.94	Peak	L	Pass
6*	17.878	43.18	9.39	60.00	16.82	QP	L	Pass
6**	17.878	40.57	9.39	50.00	9.43	AV	L	Pass


TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 48 of 64

Figure 30: Conducted Emission on AC Mains, N Phase

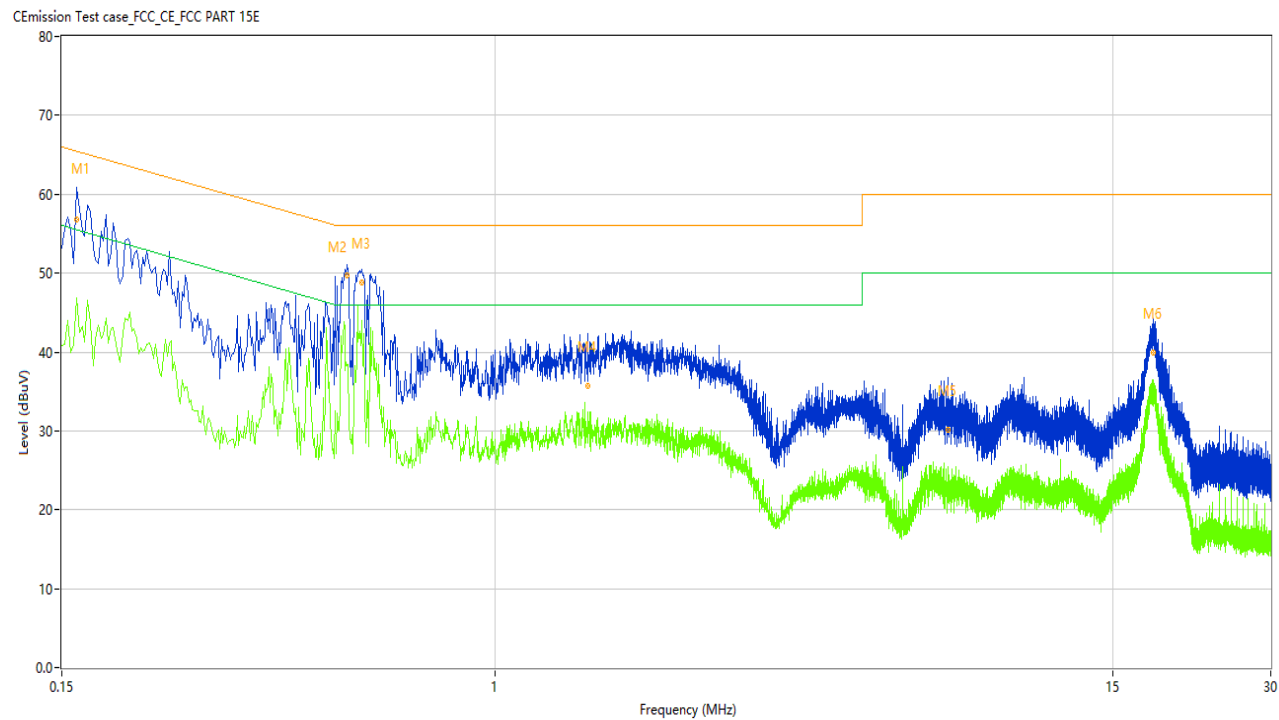

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.160	62.45	9.98	65.46	3.01	Peak	N	Pass
1*	0.160	56.77	9.98	65.46	8.69	QP	N	Pass
1**	0.160	46.84	9.98	55.46	8.62	AV	N	Pass
2	0.524	52.67	10.03	56.00	3.33	Peak	N	Pass
2*	0.524	49.74	10.03	56.00	6.26	QP	N	Pass
2**	0.524	38.29	10.03	46.00	7.71	AV	N	Pass
3	0.558	50.50	10.02	56.00	5.50	Peak	N	Pass
3*	0.558	48.74	10.02	56.00	7.26	QP	N	Pass
3**	0.558	44.02	10.02	46.00	1.98	AV	N	Pass
4	1.504	42.55	9.90	56.00	13.45	Peak	N	Pass
4*	1.504	35.64	9.90	56.00	20.36	QP	N	Pass
4**	1.504	32.42	9.90	46.00	13.58	AV	N	Pass
5	7.278	36.19	9.80	60.00	23.81	Peak	N	Pass
5*	7.278	30.20	9.80	60.00	29.80	QP	N	Pass
5**	7.278	25.52	9.80	50.00	24.48	AV	N	Pass
6	17.960	44.54	9.42	60.00	15.46	Peak	N	Pass
6*	17.960	39.94	9.42	60.00	20.06	QP	N	Pass
6**	17.960	34.45	9.42	50.00	15.55	AV	N	Pass

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 49 of 64

5 Appendixes

5.1 Photographs of the Sample



All of the sample




Front of the sample

TEST REPORT

Report No.: SHE24080045-02FE Date: 2024-11-07 Page 50 of 64



Rear of the sample

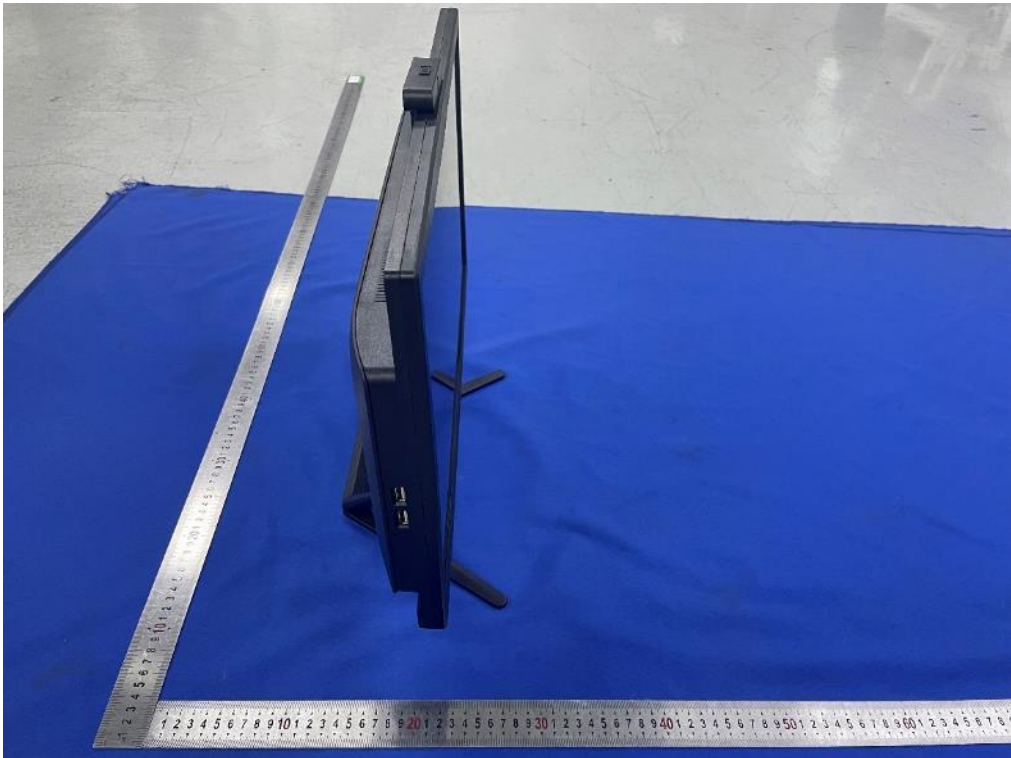


Left of the sample

TEST REPORT


Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 51 of 64

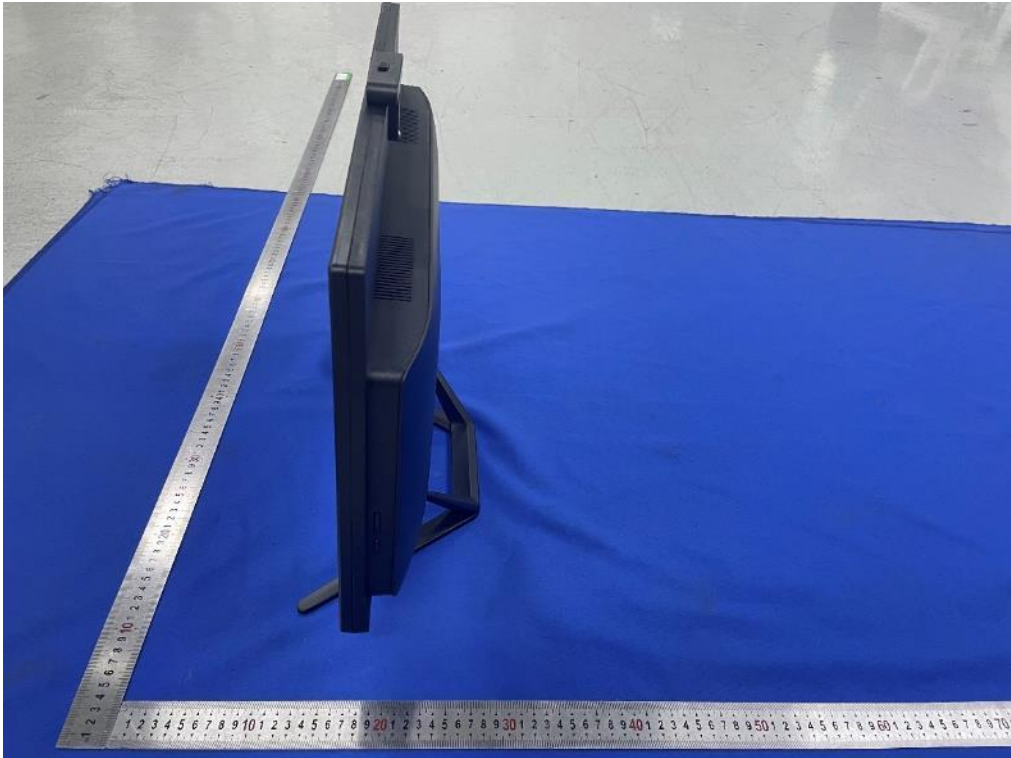

Right of the sample

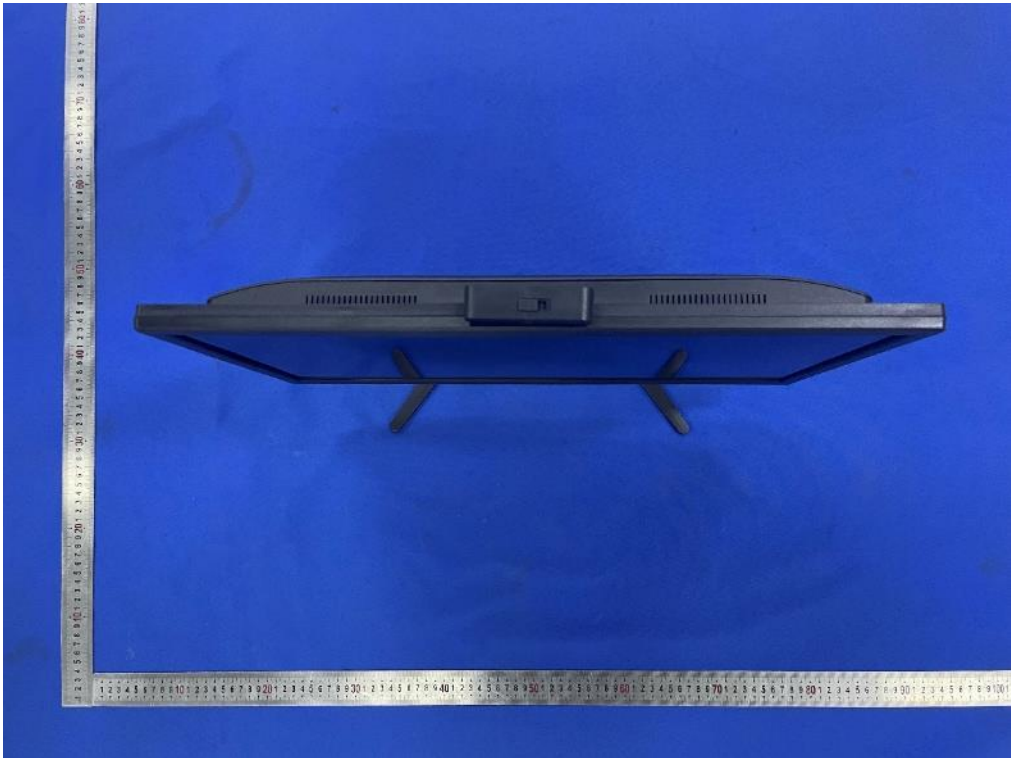

Top of the sample

TEST REPORT


Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 52 of 64



Bottom of the sample

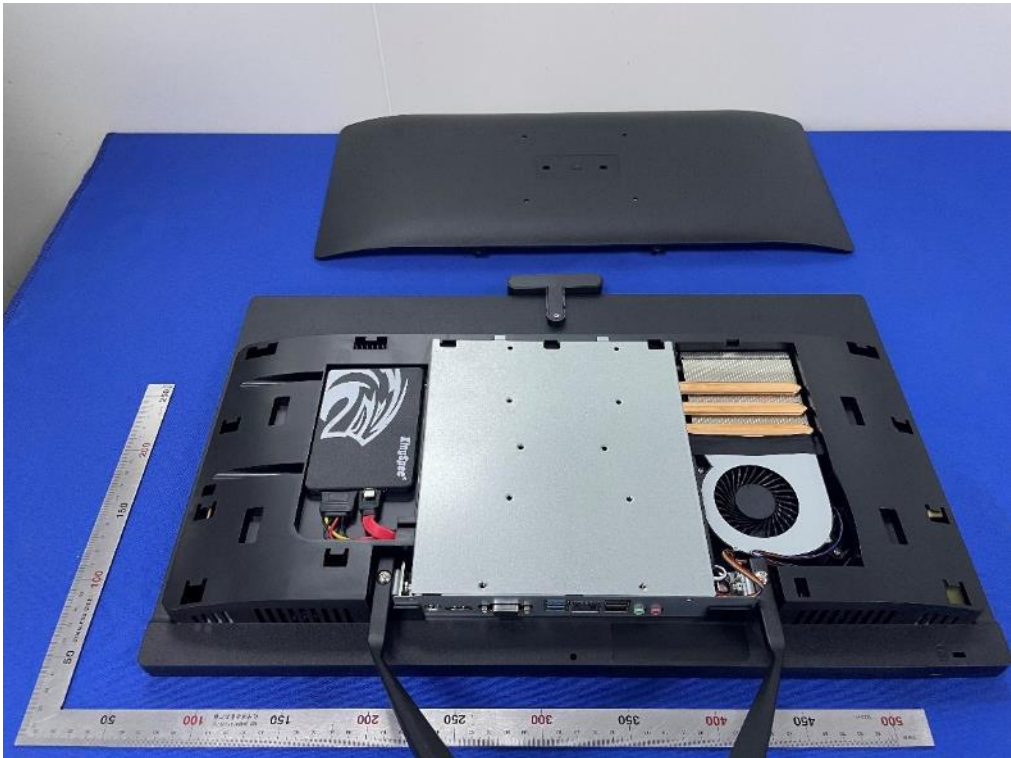


Open-1 of the sample

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 53 of 64

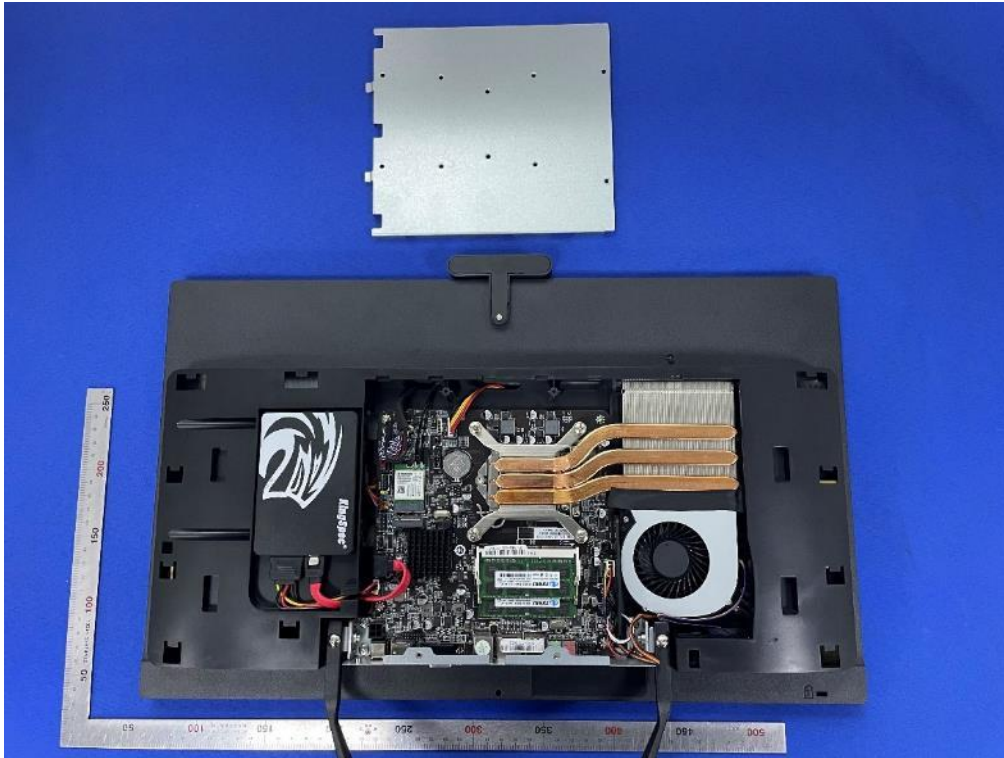

Open-2 of the sample




Open-3 of the sample

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 54 of 64

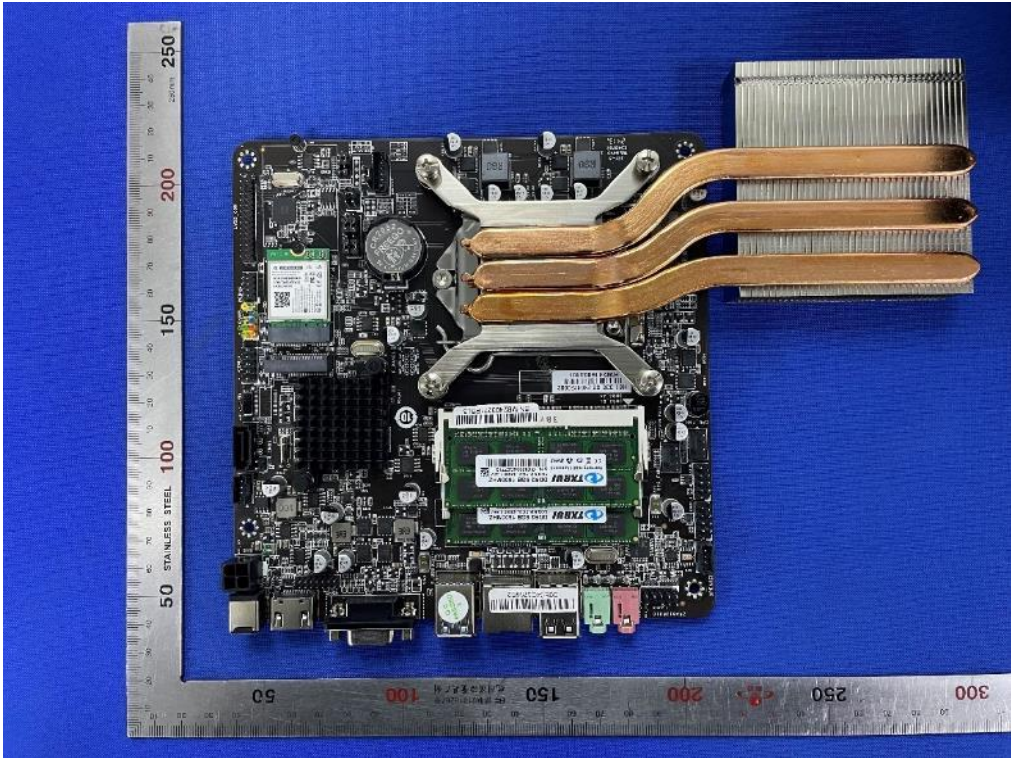

Internal-1 of the sample



Internal-2 of the sample

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 55 of 64



Internal-3 of the sample




Internal-4 of the sample

TEST REPORT


Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 56 of 64

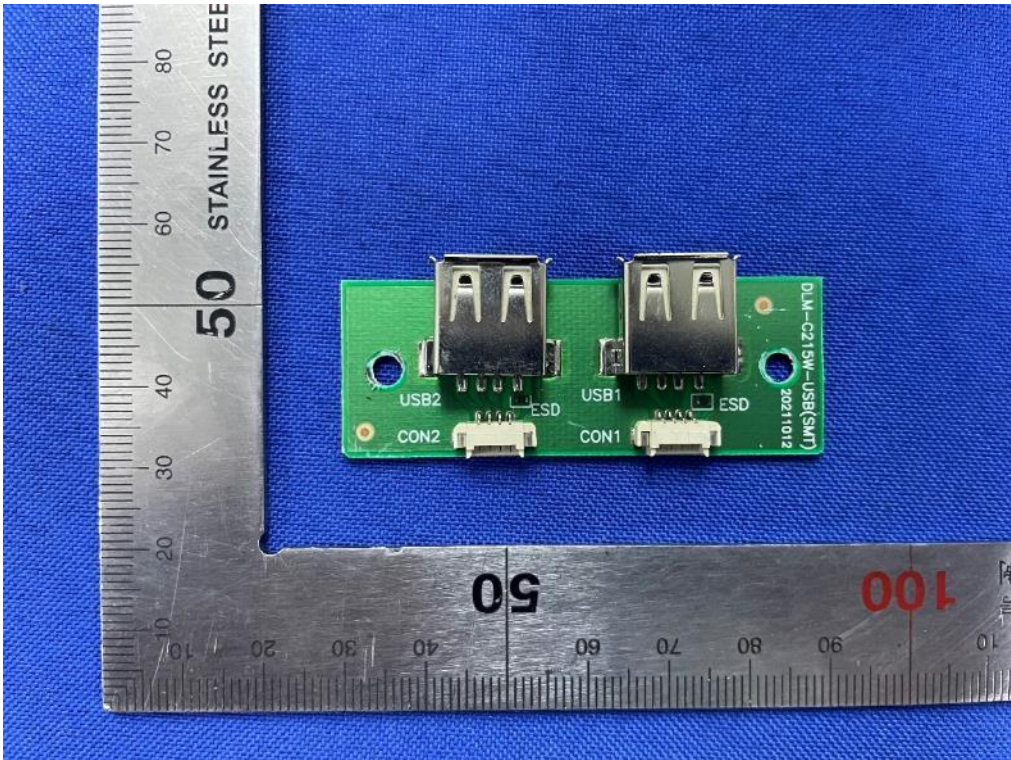

Internal-5 of the sample

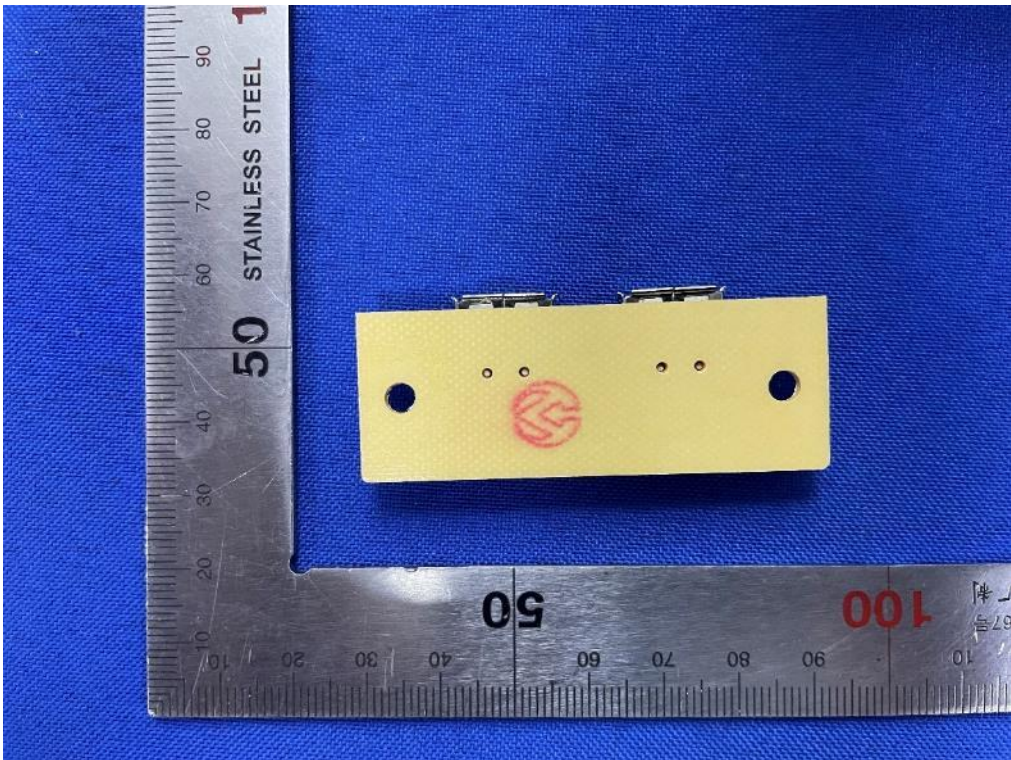


Internal-6 of the sample

TEST REPORT


Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 57 of 64

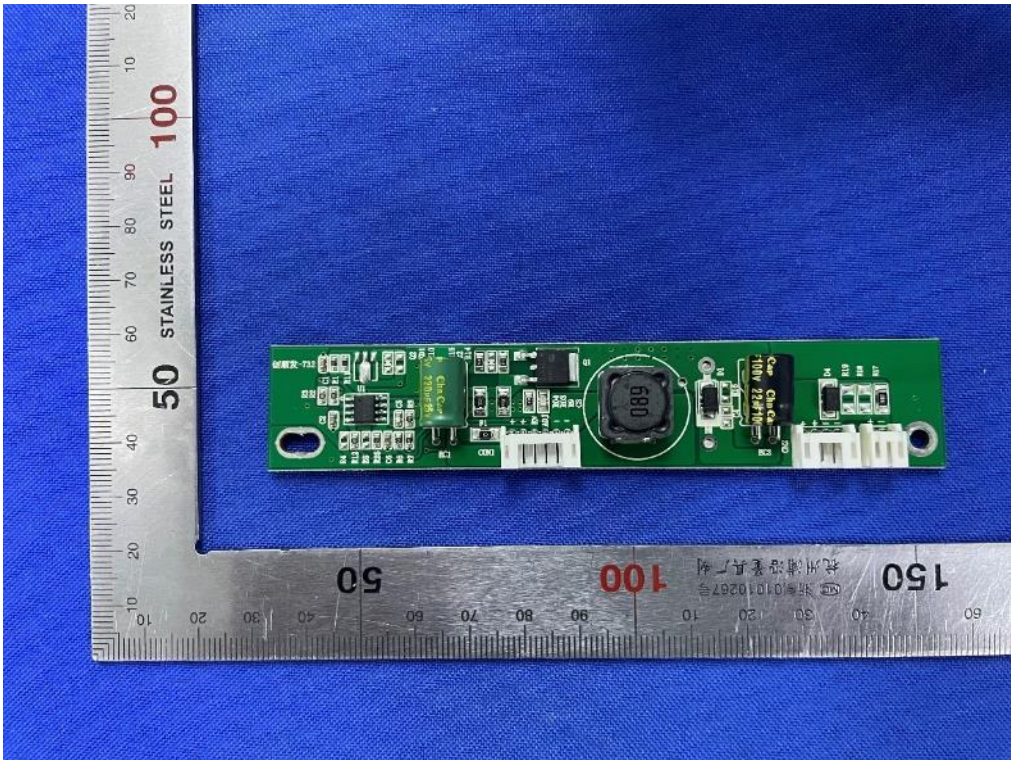

Internal-7 of the sample

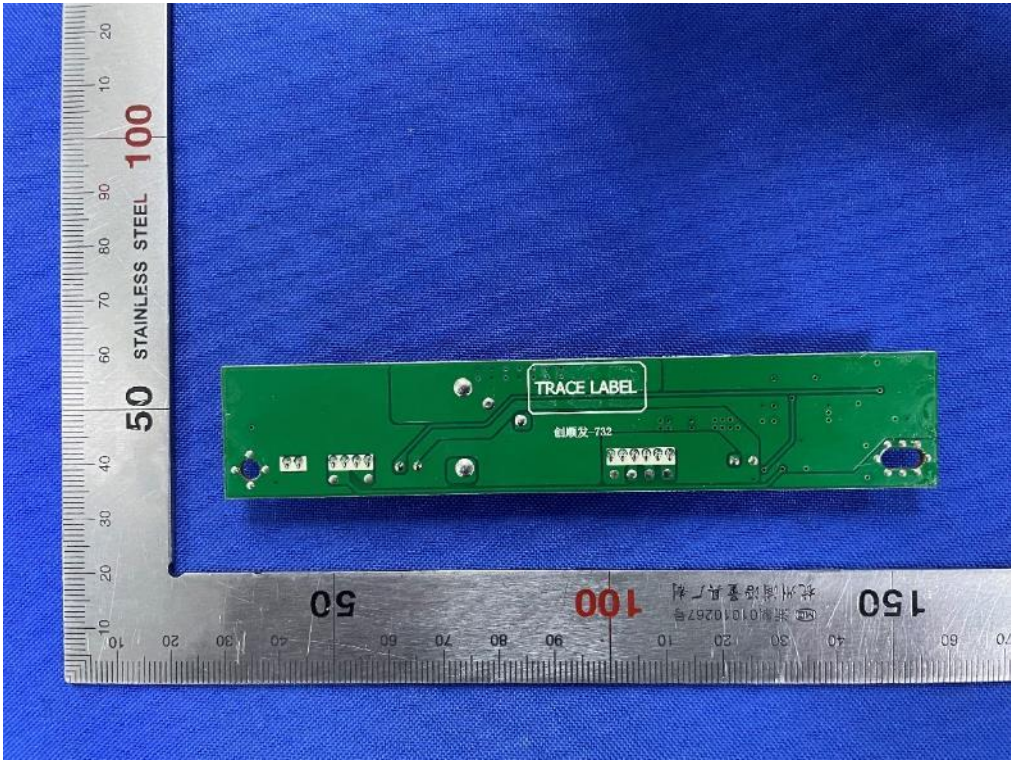


Internal-8 of the sample

TEST REPORT


Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 58 of 64

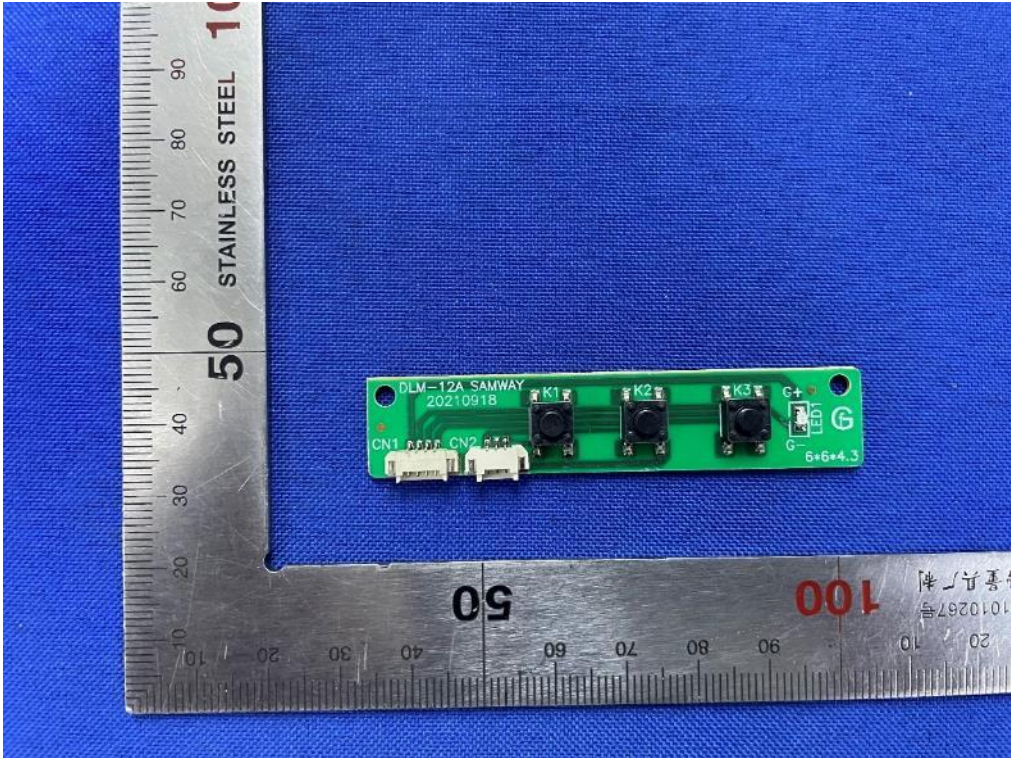

Internal-9 of the sample

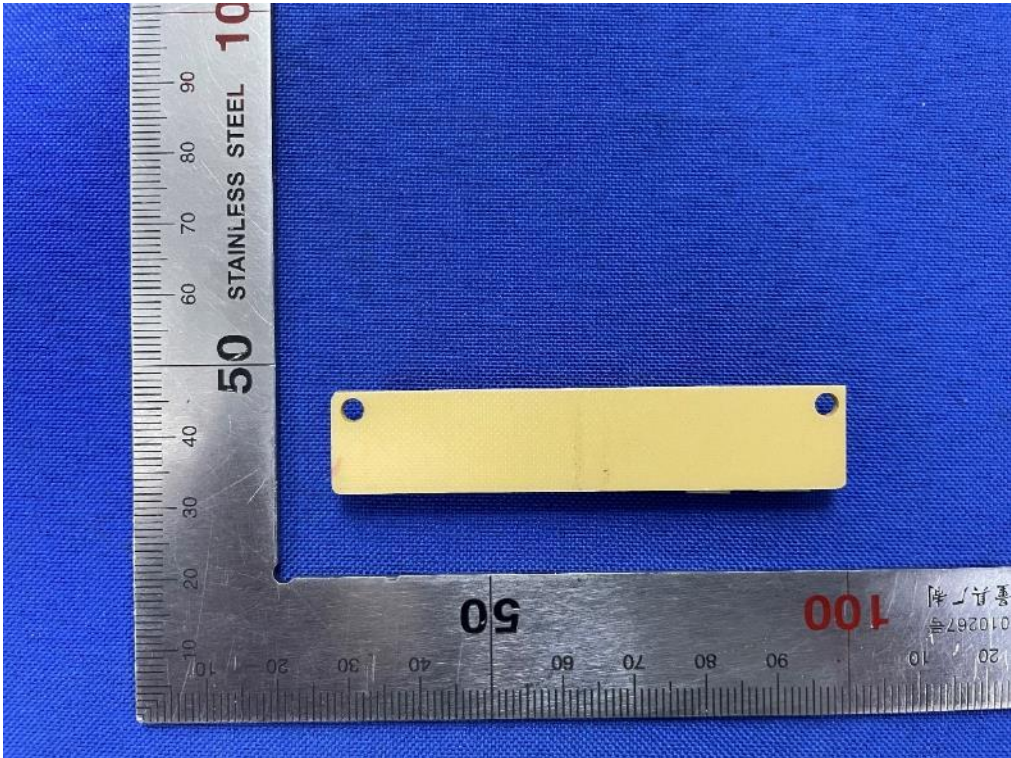


Internal-10 of the sample

TEST REPORT


Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 59 of 64

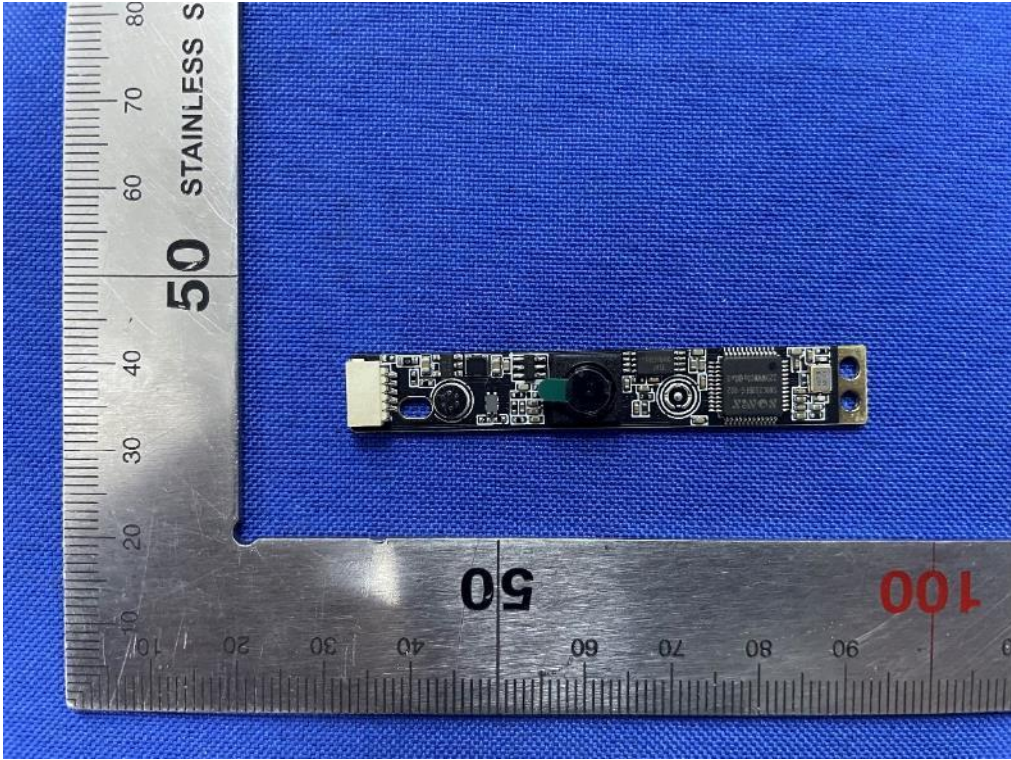

Internal-11 of the sample

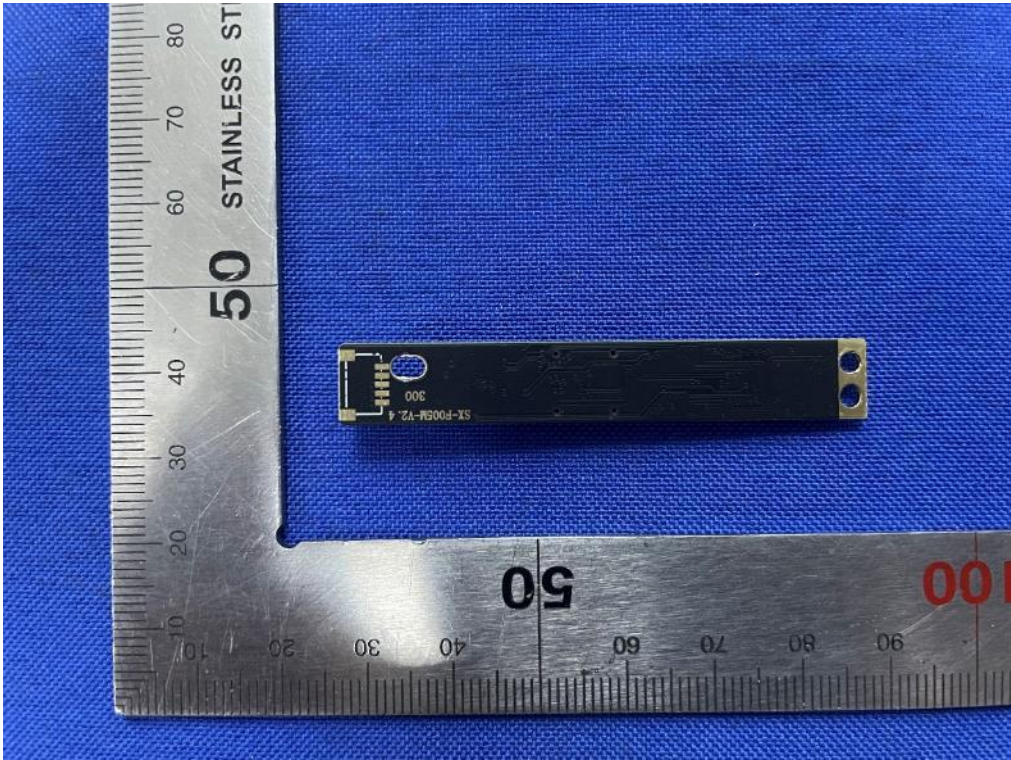


Internal-12 of the sample

TEST REPORT


Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 60 of 64

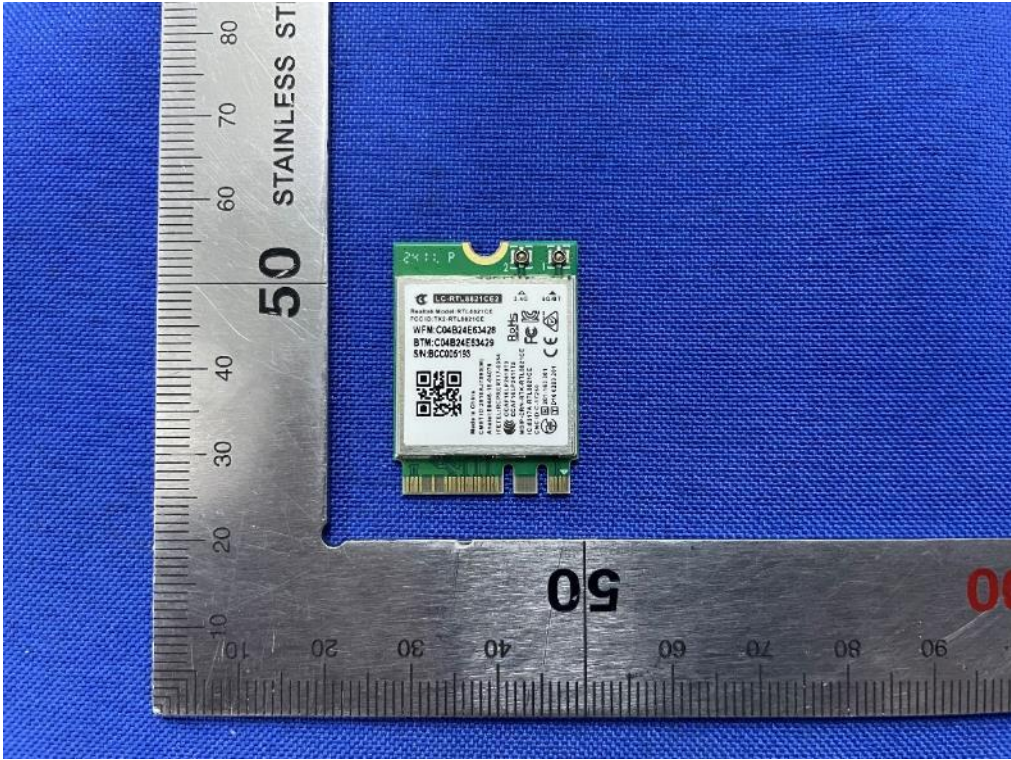

Internal-13 of the sample

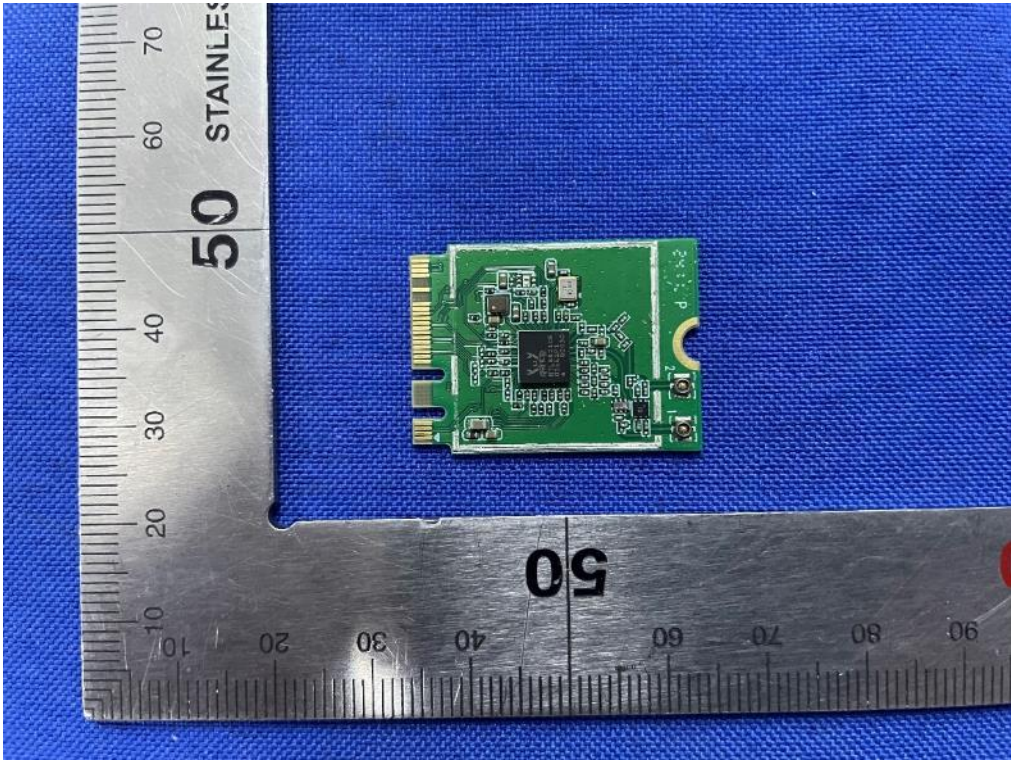


Internal-14 of the sample

TEST REPORT


Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 61 of 64

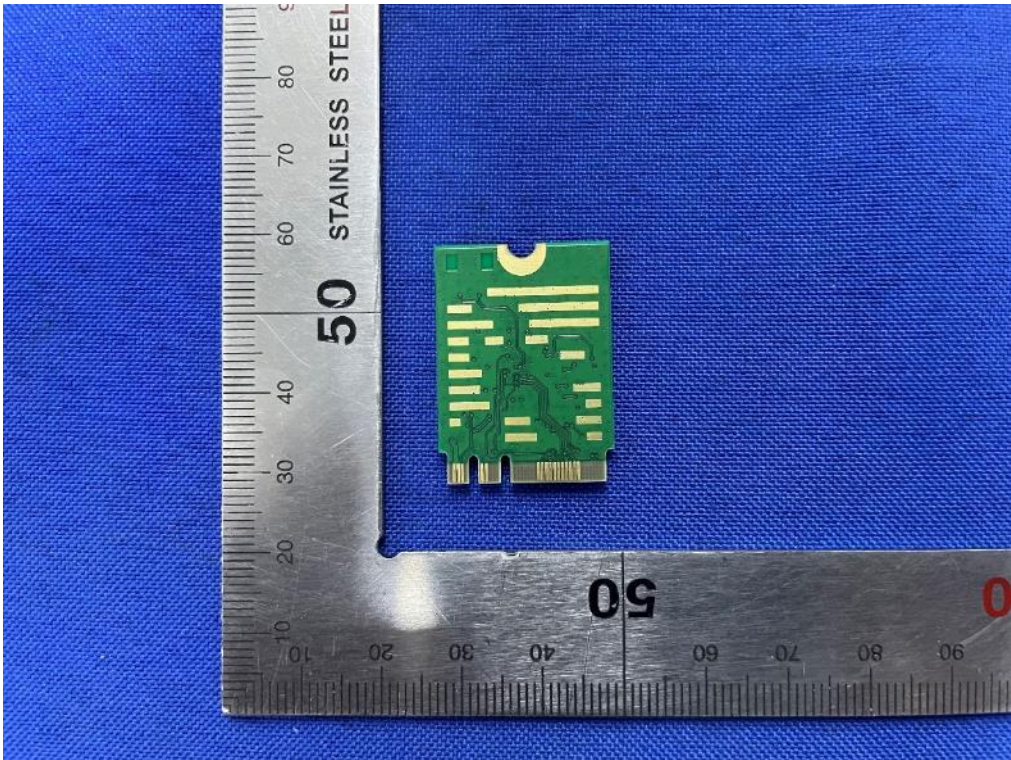

Internal-15 of the sample

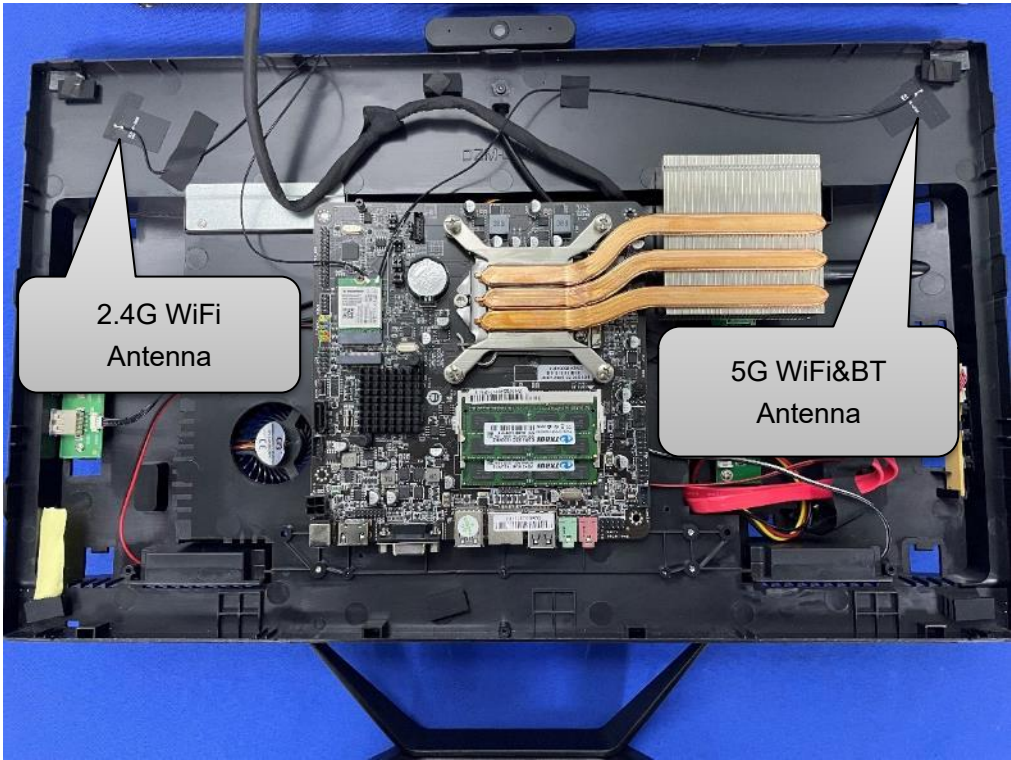

Antenna Position

TEST REPORT


Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 62 of 64



Antenna Interface

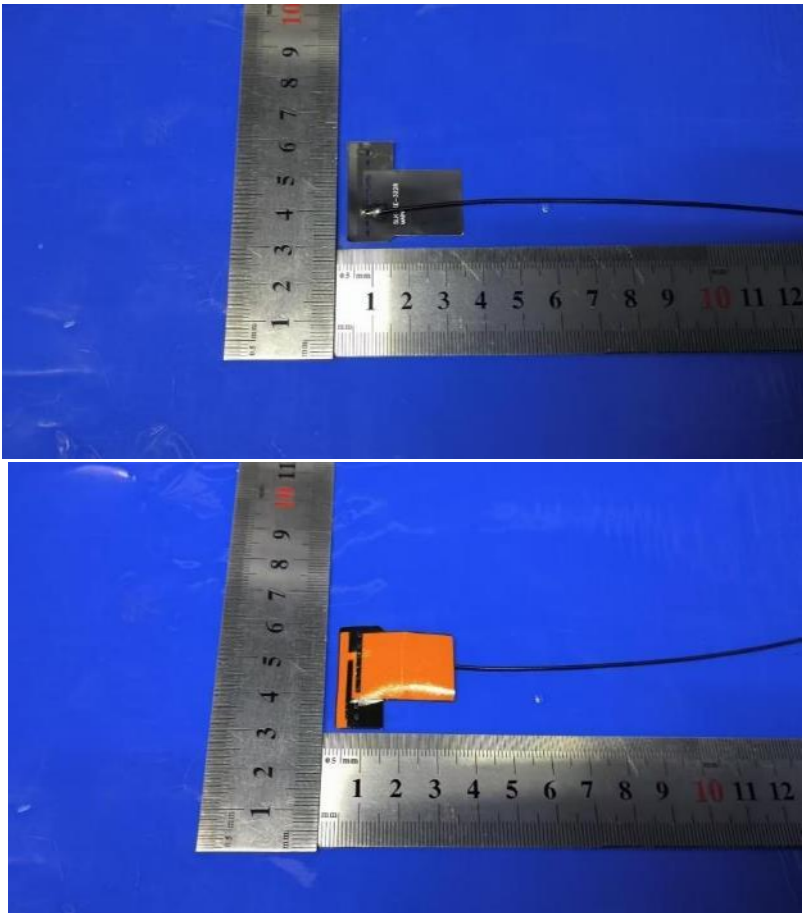

Antenna Photo

TEST REPORT

Report No.: SHE24080045-02FE


Date: 2024-11-07

Page 63 of 64

5.2 Set-up for Conducted Emissions



5.3 Set-up for Conducted RF test at Antenna Port

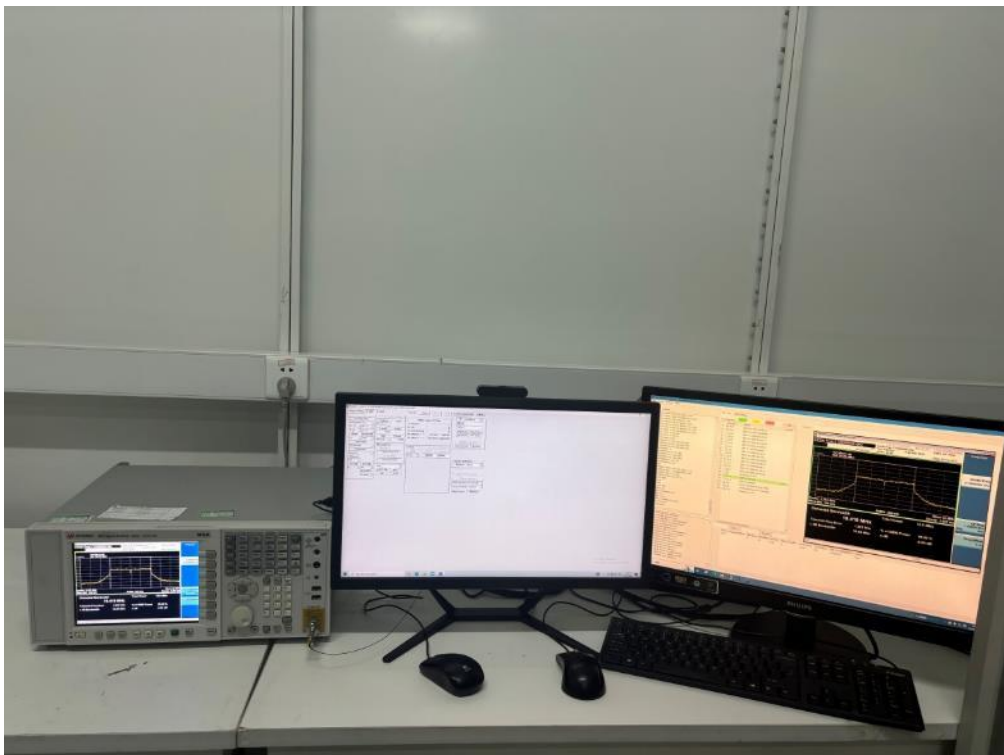

TEST REPORT

Report No.: SHE24080045-02FE

Date: 2024-11-07

Page 64 of 64

5.4 Set-up for Spurious Emissions below 1GHz



5.5 Set-up for Spurious Emissions above 1GHz



End of the report