



东莞市一佳电子通讯科技有限公司

Dongguan YiJia Electronics Communication Technology Co.,Ltd.

规格承认书

SPECIFICATION FOR APPROVAL

日期 Date	2024/06/07
编号 File No	24060703
版本 Revision	1.0

客户
CUSTOMER:

客户料号
CUSTOMER NO:

MPD-P006

品名
PART NAME:

BT Antenna L=155.0mm MHF

供方料号
SUPPLIER NO:

YJS01.005.069.303

送样日期Date:

送样数量Q “TY:

客户确认CUSTOMER APPROVED BY		
APPROVAL	CHIEF	SUPERVISOR

供方确认 SUPPLIER SIGNATURE		
APPROVAL	CHECK	DESIGN
 ChenGuoqiang	XieLi	ChenXingyi


YJ-RD-F04-A

add: Yuanfu Industrial Park, No.59, Muyu Road, Shatou Community, Chang'an Town, Dongguan, Guangdong



承认书项目表

NO	内 容 (Contents)	页 数 (Number of Page)	页 码 (Page Code)
1	承认书封面 (Spec Cover)	1	1
2	承认书项目表 (Spec Item)	1	2
3	工程成品图 (Drawing)	1	3
4	天线规格 (Antenna Specification)	1	4
5	S参数测试 (S Parameter)	1	5
6	无源测试 (Passive Test)	1	6
7	方向图 (Radiation Pattern)	4	7 ~ 10
8	有源测试 (Active Test)	1	11
9	天线装配图 (Antenna Profile)	3	12 ~ 14
10	材质证明 (Material Certificate)	42	15 ~ 56
11	RoHS报告 (RoHS Test Report)	**	**
12	N/A	N/A	N/A
13	-	-	-

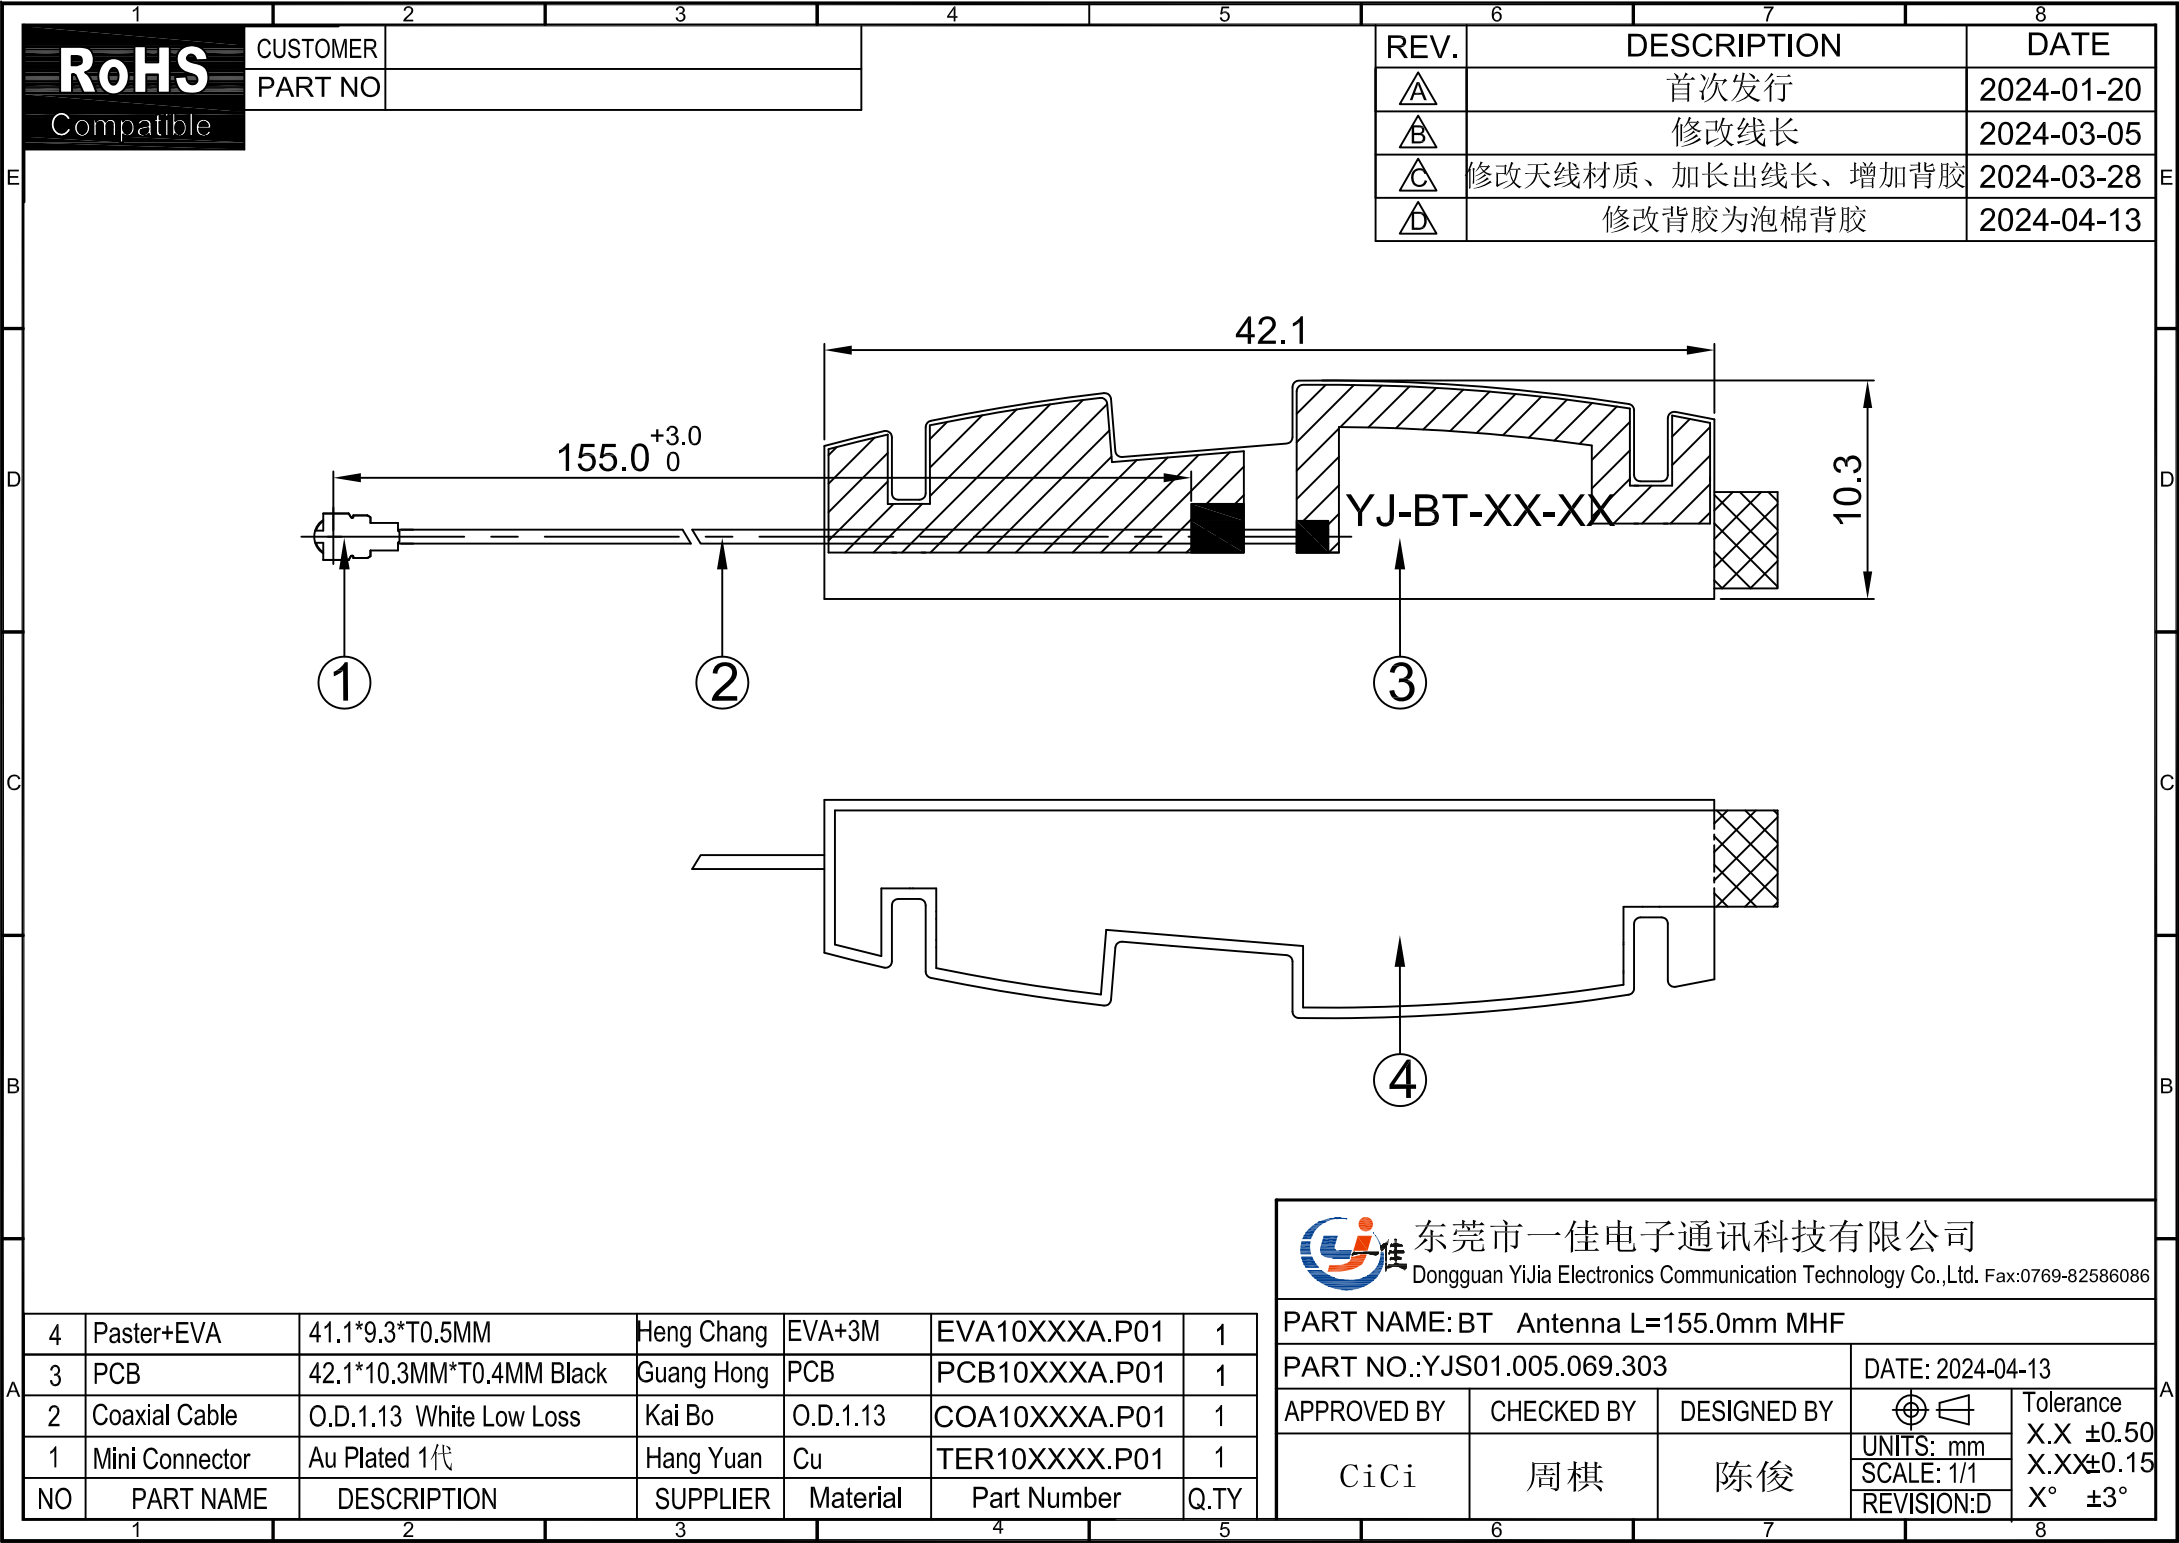

RoHS
Compatible

CUSTOMER	
PART NO	

REV.	DESCRIPTION	DATE
A	首次发行	2024-01-20
B	修改线长	2024-03-05
C	修改天线材质、加长出线长、增加背胶	2024-03-28
D	修改背胶为泡棉背胶	2024-04-13

4	Paster+EVA	41.1*9.3*T0.5MM	Heng Chang	EVA+3M	EVA10XXXXA.P01	1
3	PCB	42.1*10.3MM*T0.4MM Black	Guang Hong	PCB	PCB10XXXXA.P01	1
2	Coaxial Cable	O.D.1.13 White Low Loss	Kai Bo	O.D.1.13	COA10XXXXA.P01	1
1	Mini Connector	Au Plated 1代	Hang Yuan	Cu	TER10XXXXX.P01	1
NO	PART NAME	DESCRIPTION	SUPPLIER	Material	Part Number	Q.TY

 东莞市一佳电子通讯科技有限公司 Dongguan YiJia Electronics Communication Technology Co.,Ltd. Fax:0769-82586086				
PART NAME: BT Antenna L=155.0mm MHF				
PART NO.:YJS01.005.069.303			DATE: 2024-04-13	
APPROVED BY	CHECKED BY	DESIGNED BY		Tolerance
CiCi	周棋	陈俊	UNITS: mm	X.X ±0.50
			SCALE: 1/1	X.XX±0.15
			REVISION:D	X° ±3°



天线规格

Antenna Specification

Electrical Properties

Frequency	2.4-2.5GHz
Impedance	50 Ohm Nominal
V.S.W.R	2.0 Max
Gain	4.7 dBi
Radiation	Omni-directional
Polarization	Linear


Physical Properties

Connector	1代IPEX
Cable Type	O.D.1.13mm低损耗
Cable Length	155mm
Cable Color	White
Operating Temp.	-40 ~ +85 °C
Storage Temp / Humidity	25±5°C / <70%



Antenna Performance Test

**Agilent
E5071B
S11
Parameter
Test //
BT
Antenna**

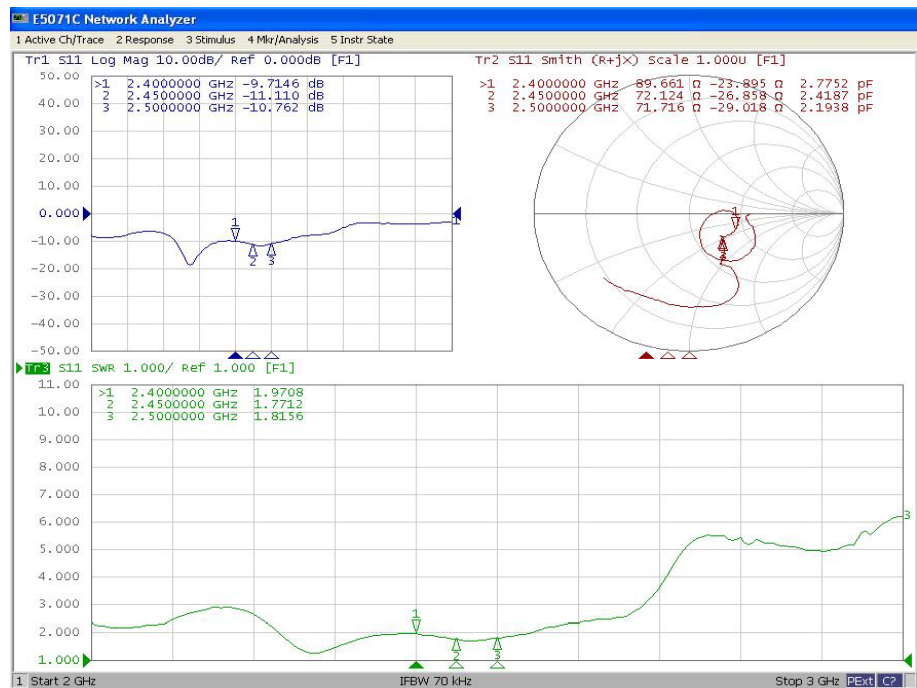




Passive Test For BT Antenna			
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	51.2	-2.9	4.3
2410	49.4	-3.1	4.1
2420	46.8	-3.3	3.8
2430	47.3	-3.3	4.0
2440	47.0	-3.3	4.1
2450	47.2	-3.3	4.3
2460	44.6	-3.5	4.3
2470	46.5	-3.3	4.7
2480	43.3	-3.6	4.5
2490	42.7	-3.7	4.3
2500	40.7	-3.9	3.8

add: Yuanfu Industrial Park, No.59, Muyu Road, Shatou Community, Chang'an Town, Dongguan, Guangdong




Radiation Pattern For BT Antenna (2400MHz)

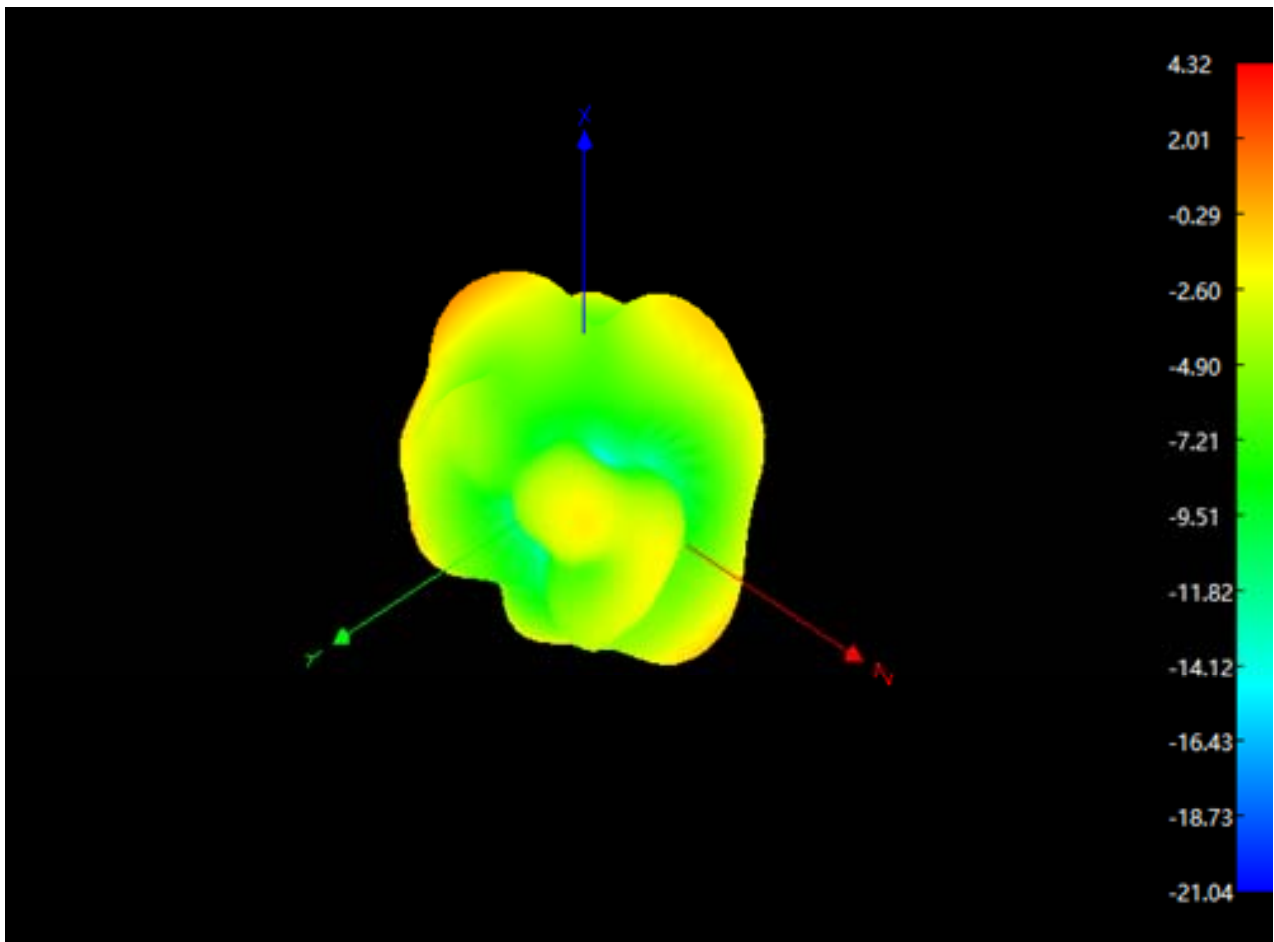




Radiation Pattern For BT Antenna (2450MHz)

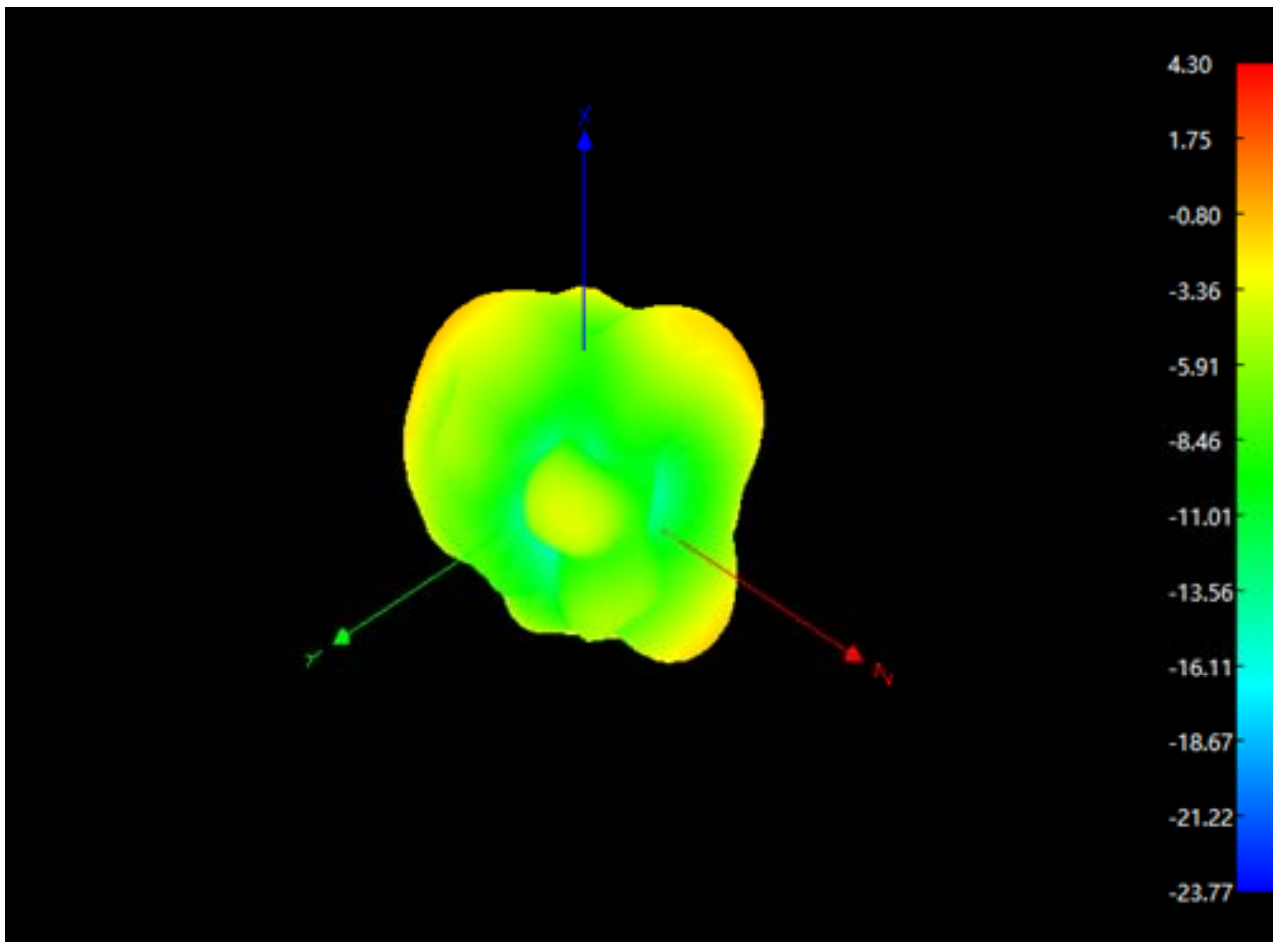




Radiation Pattern For BT Antenna (2500MHz)

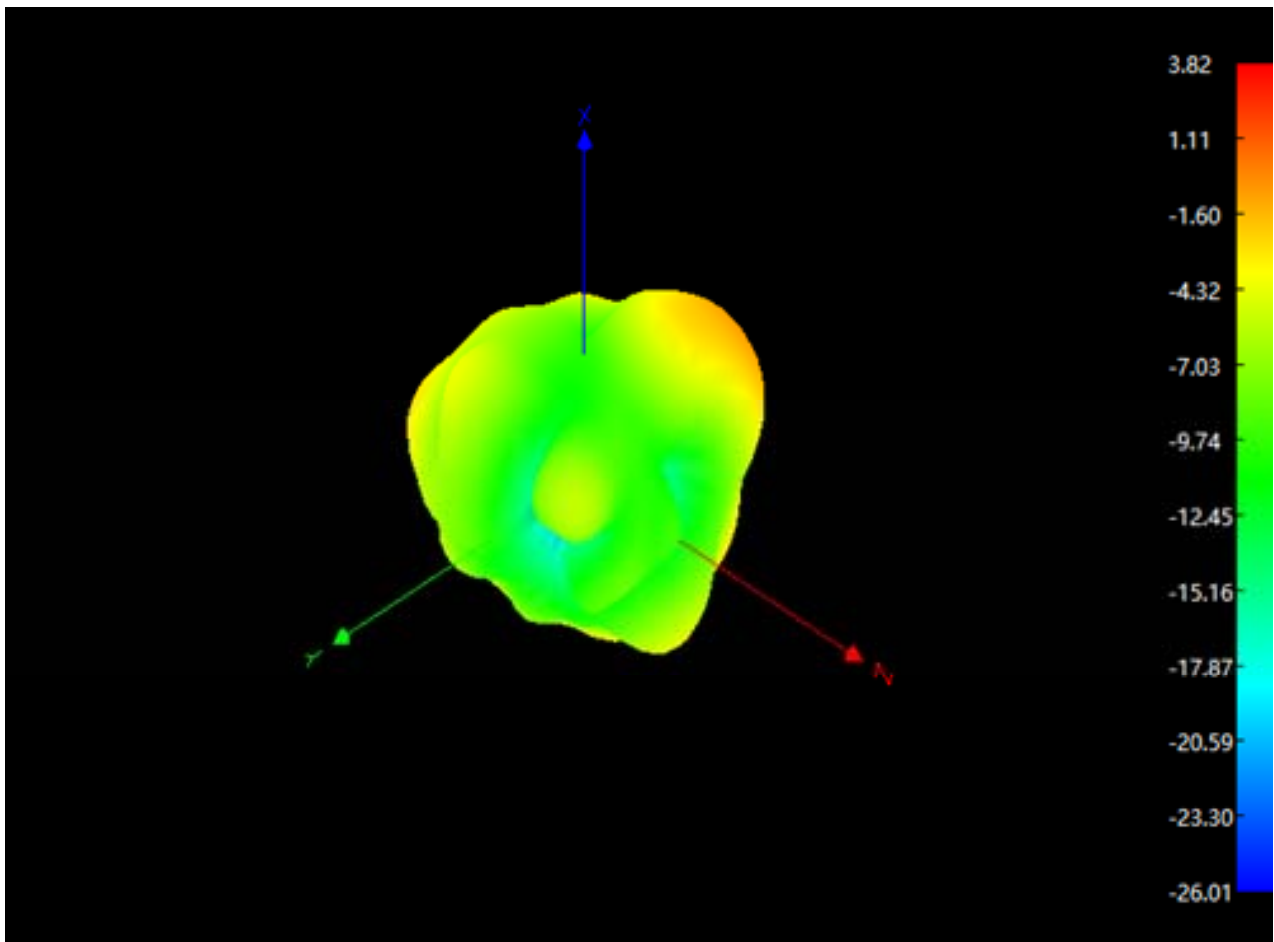




Radiation Pattern For BT Antenna


Phi 0°

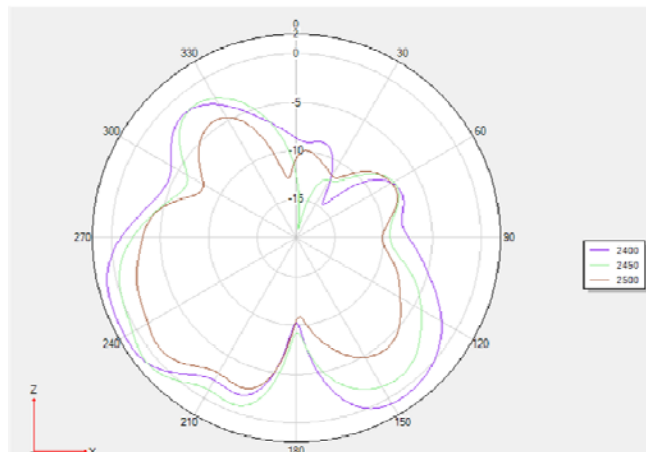

Phi 90°

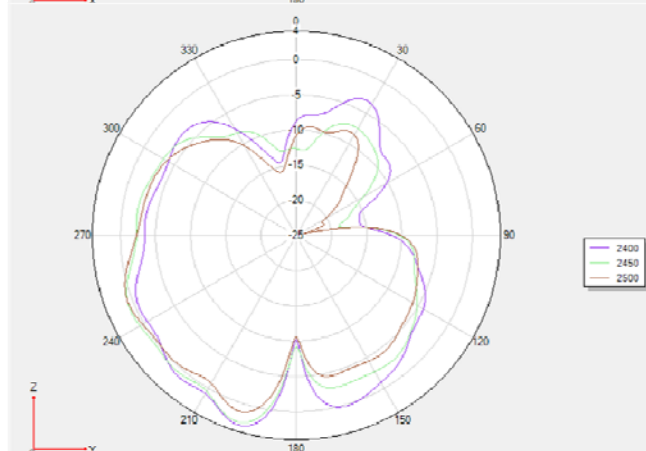

Theta 90°

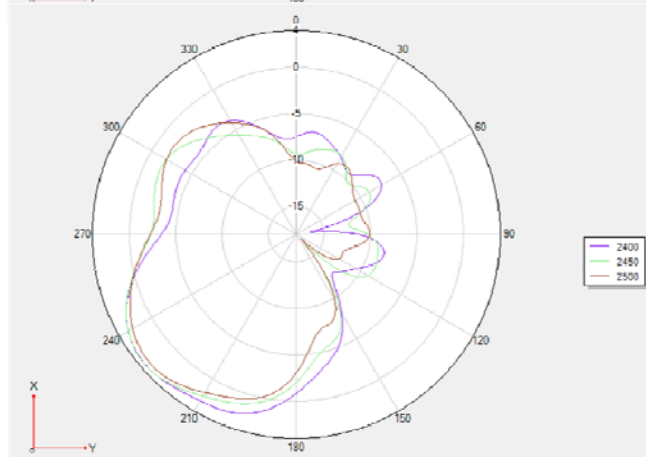



Active Test For BT Antenna					
Band	Channel	TRP	EIRP	TIS	EIS
BlueTooth	0	3.3	8.2	-91.2	-96.6
	39	3.7	9.3	-92.8	-98.2
	78	4.1	10.4	-93.0	-99.2

add: Yuanfu Industrial Park, No.59, Muyu Road, Shatou Community, Chang'an Town, Dongguan, Guangdong



Device





BT Antenna

