

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093) and
IEEE Std 1528-2013**

Product Name: Trackipet
Model No.: TRKM009
Serial Model: N/A
Brand Name: Trackimo, Tracki
Report No.: AITSZ24061410FW4
FCC ID: 2AAI6-TRKM009

Prepared for

Trackimo INC.

680 Central Ave, suite 108, Cedarhurst, New York 11516,USA

Prepared by

Guangdong Asia Hongke Test Technology Limited

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai
Street, Bao'an District, Shenzhen, Guangdong, China
Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

TEST RESULT CERTIFICATION

Applicant's name: Trackimo INC.

Address: 680 Central Ave, suite 108, Cedarhurst, New York 11516,USA

Manufacturer's Name: Trackimo INC.

Address: 680 Central Ave, suite 108, Cedarhurst, New York 11516,USA

Product description

Product name: Trackipet

Trademark: Trackimo, Tracki

Model and/or type reference ..: TRKM009

Serial Model.....: N/A

FCC 47 CFR Part 2(2.1093)

Standards: IEEE Std 1528-2013

Published RF exposure KDB procedures

This device described above has been tested by Guangdong Asia Hongke Test Technology Limited. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093). The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Guangdong Asia Hongke Test Technology Limited, this document may be altered or revised by Guangdong Asia Hongke Test Technology Limited, personal only, and shall be noted in the revision of the document.

Test Sample Number: N/A

Date of Test

Date (s) of performance of tests: Sep. 13, 2024 ~ Sep. 29, 2024

Date of Issue.....: Dec. 20, 2024

Test Result: **Pass**

Reviewed by:



Simba Huang

Approved by:



Seal.chen



※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Dec. 20, 2024	Seal.chen

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits	6
1.2. Statement of Compliance	7
1.3. EUT Description	8
1.4. Test specification(s)	9
1.5. Ambient Condition	9
1.6. Test Facility	9
2. SAR Measurement System	10
2.1. SATIMO SAR Measurement Set-up Diagram	10
2.2. Robot	11
2.3. Probe	12
2.3.1. E-Field Probe Calibration	12
2.4. Phantoms	13
2.5. Technical Data	14
2.6. Device Holder	15
2.7. Test Equipment List	16
3. SAR Measurement Procedures	18
3.1. Power Reference	18
3.2. Area scan & Zoom scan	18
3.3. Description of interpolation/extrapolation scheme	20
3.4. Volumetric Scan	20
3.5. Power Drift	20
4. System Verification Procedure	21
4.1. Tissue Verification	21
4.1.1. Tissue Dielectric Parameter Check Results	22
4.2. System Verification Procedure	24
4.2.1. System Verification Results	25
5. SAR measurement variability	26
6. SAR Measurement Uncertainty	27
7. RF Exposure Positions	28
7.1. Generic device	28
8. RF Output Power	29
8.1. LTE Conducted Power	29
8.2. Wi-Fi & BT Output Power	43
9. Stand-alone SAR test exclusion	44
10. SAR Measurement Results	46
11. Simultaneous Transmission Analysis	52
Appendix A. Photo documentation	53
Appendix B. System Check Plots	54
Appendix C. SAR Test Plots	67



Appendix D. Calibration Certificate	88
---	----

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE
TRUNK LIMIT
1.6 W/kg
APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing as follows.

Band	Max SAR Value Reported(W/kg)	
	1-g Body (Separation distance of 0mm)	Max SAR Summation
LTE band 2	0.510	Body: 1.174
LTE band 4	0.507	
LTE band 5	0.335	
LTE band 7	0.641	
LTE band 12	0.332	
LTE band 17	0.315	
LTE band 25	0.515	
LTE band 26	0.341	
LTE band 41	0.626	
2.4GHz WLAN	0.533	

NOTE: The Max SAR Summation is calculated based on the same configuration and test position.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093), and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information			
Product Name	Trackipet		
Model Name	TRKM009		
Family Model	N/A		
FCC ID	2AAI6-TRKM009		
Device Phase	Identical Prototype		
Exposure Category	General population / Uncontrolled environment		
Antenna Type	LDS Antenna		
Battery Information	DC 3.8V 500mAh		
Hardware version	VCAT 217 V1.1		
Software version	N/A		
Device Operating Configurations			
Supporting Mode(s)	LTE Band 2/4/5/7/12/17/25/26/41, WLAN 2.4G, Bluetooth		
Test Modulation	LTE(QPSK/16-QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, π /4DQPSK, 8DPSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	LTE Band 12	699-716	729-746
	LTE Band 17	704-716	734-746
	LTE Band 25	1850-1915	1930-1995
	LTE Band 26	814-849	859-894
	LTE Band 41	2555-2655	
	WLAN 2.4G	2412-2462	
	Bluetooth	2402-2480	
	Power Class	3, tested with power control all Max.(LTE Band 2)	
3, tested with power control all Max.(LTE Band 4)			
3, tested with power control all Max.(LTE Band 5)			
3, tested with power control all Max.(LTE Band 7)			
3, tested with power control all Max.(LTE Band 12)			
3, tested with power control all Max.(LTE Band 17)			
3, tested with power control all Max.(LTE Band 25)			
3, tested with power control all Max.(LTE Band 26)			
3, tested with power control all Max.(LTE Band 41)			

1.4. Test specification(s)

FCC 47 CFR Part 2(2.1093)
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D05 SAR for LTE Devices

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

1.6. Test Facility

Test Laboratory:**Guangdong Asia Hongke Test Technology Limited**

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

The test facility is recognized, certified or accredited by the following organizations:

FCC-Registration No.: 251906 Designation Number: CN1376

Guangdong Asia Hongke Test Technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

IC —Registration No.: 31737 CAB identifier: CN0165


The 3m Semi-anechoic chamber of Guangdong Asia Hongke Test Technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 31737

A2LA-Lab Cert. No.: 7133.01

Guangdong Asia Hongke Test Technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

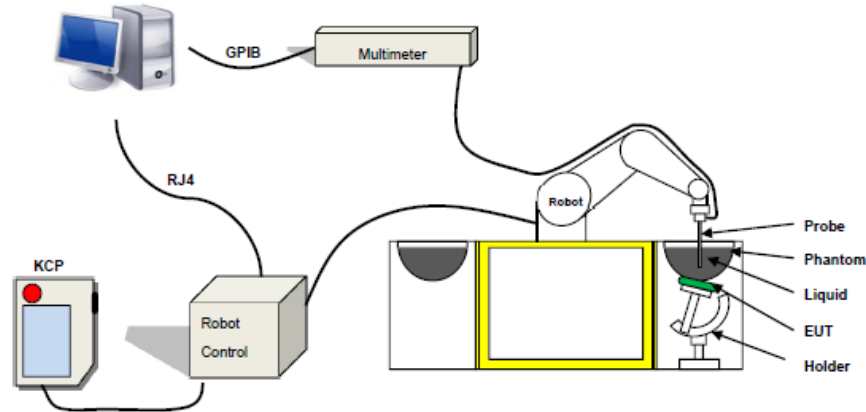

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe EPGO 0523-403 with following specifications is used.



- Probe Length: 330 mm
- Length of Individual Dipoles: 2 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 150 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within $\pm 0.25\text{dB}$. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. Phantoms


For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



SAM

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 μm .

2.6. Device Holder

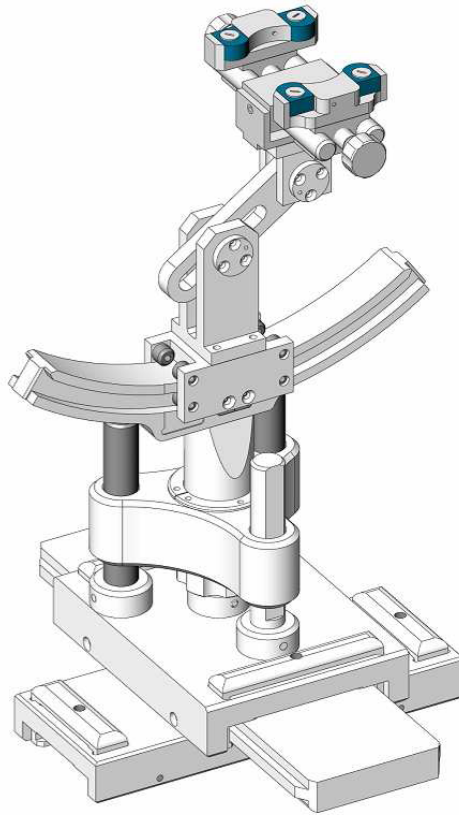

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

2.7. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	EPGO 0523-403	Sep. 11, 2024	Sep. 10, 2025
☒	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	900 MHz Dipole	SID900	SN 03/15 DI P 0G900-348	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	2300 MHz Dipole	SID2300	SN 03/16 DIP 2G300-358	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	Jul. 01, 2024	Jun. 30, 2025
☒	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	Jul. 01, 2024	Jun. 30, 2025
☐	R&S	Universal radio communication tester	CMU200	117858	Jul. 01, 2024	Jun. 30, 2025
☒	R&S	Wideband radio communication tester	CMW500	116581	Jul. 01, 2024	Jun. 30, 2025
☒	HP	Network Analyzer	8753D	3410J01136	Jul. 01, 2024	Jun. 30, 2025

☒	Agilent	PSG Analog Signal Generator	E8257D	MY51110112	Jul. 01, 2024	Jun. 30, 2025
☒	Agilent	Power meter	E4419B	MY45102538	Jul. 01, 2024	Jun. 30, 2025
☒	Agilent	Power meter	E4419B	MY45102140	Jul. 01, 2024	Jun. 30, 2025
☒	Agilent	Power meter	E4419B	MY45102215	Jul. 01, 2024	Jun. 30, 2025
☒	JFW	attenuator	50FPE-006	4360846-494-4	Jul. 01, 2024	Jun. 30, 2025
☒	JFW	attenuator	50FPE-006	4360846-492-1	Jul. 01, 2024	Jun. 30, 2025
☒	JFW	attenuator	50FPE-006	4360846-490-6	Jul. 01, 2024	Jun. 30, 2025
☒	Agilent	Power sensor	E9301A	MY41495644	Jul. 01, 2024	Jun. 30, 2025
☒	Agilent	Power sensor	E9301A	US39212148	Jul. 01, 2024	Jun. 30, 2025
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Jul. 17, 2024	Jul. 16, 2027
☒	MVG	SAR Phantom	SSM2	SN 24/11 SAM87	NCR	NCR
☒	MVG	Device Holder	SMPPD	SN 24/11 MSH73	NCR	NCR

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For Wi-Fi/BT power measurement, use engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure Wi-Fi/BT output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan

above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx _{Area} , Δy _{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz _{Zoom} (n)		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		Δz _{Zoom} (n>1): between subsequent points	≤ 1.5 · Δz _{Zoom} (n-1)	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful for multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scan to calculate the SAR value of the combined measurement as it is defined in the standard IEEE1528 and IEC62209..

3.5. Power Drift

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.

4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
	750	835	900	1800	1900	2000	2450	2600	5200	5800
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.



4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine of the dielectric parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r ($\pm 5\%$)	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Head 750	750	41.96 (39.86~44.06)	0.89 (0.85~0.93)	42.56	0.91	21.6 °C	Sep. 13, 2024
Head 750	707.5	42.13 (40.02~44.23)	0.89 (0.84~0.93)	42.13	0.91	21.6 °C	Sep. 13, 2024
Head 750	710	42.11 (40.01~44.22)	0.89 (0.84~0.93)	42.11	0.91	21.6 °C	Sep. 13, 2024
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	42.01	0.94	21.7 °C	Sep. 17, 2024
Head 850	831.5	41.52 (39.44~43.59)	0.90 (0.85~0.94)	41.52	0.90	21.7 °C	Sep. 17, 2024
Head 850	836.5	41.50 (39.43~43.58)	0.90 (0.85~0.94)	41.50	0.90	21.7 °C	Sep. 17, 2024
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.61	1.41	21.6 °C	Sep. 20, 2024
Head 1800	1732.5	40.10 (38.09~42.10)	1.36 (1.29~1.43)	40.12	1.36	21.6 °C	Sep. 20, 2024
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	41.42	1.39	21.7 °C	Sep. 21, 2024
Head 1900	1880	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.00	1.40	21.7 °C	Sep. 21, 2024
Head 1900	1882.5	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.00	1.40	21.7 °C	Sep. 21, 2024
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	40.41	1.82	21.5 °C	Sep. 24, 2024
Head 2450	2462	39.18 (37.22~41.14)	1.81 (1.72~1.90)	39.23	1.81	21.5 °C	Sep. 24, 2024
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	39.43	1.99	21.4 °C	Sep. 29, 2024
Head 2600	2535	39.09 (37.13~41.04)	1.89 (1.80~1.99)	39.09	1.89	21.4 °C	Sep. 29, 2024
Head 2600	2605	39.01 (37.06~40.96)	1.95 (1.85~2.05)	39.01	1.95	21.4 °C	Sep. 29, 2024


NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient

conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

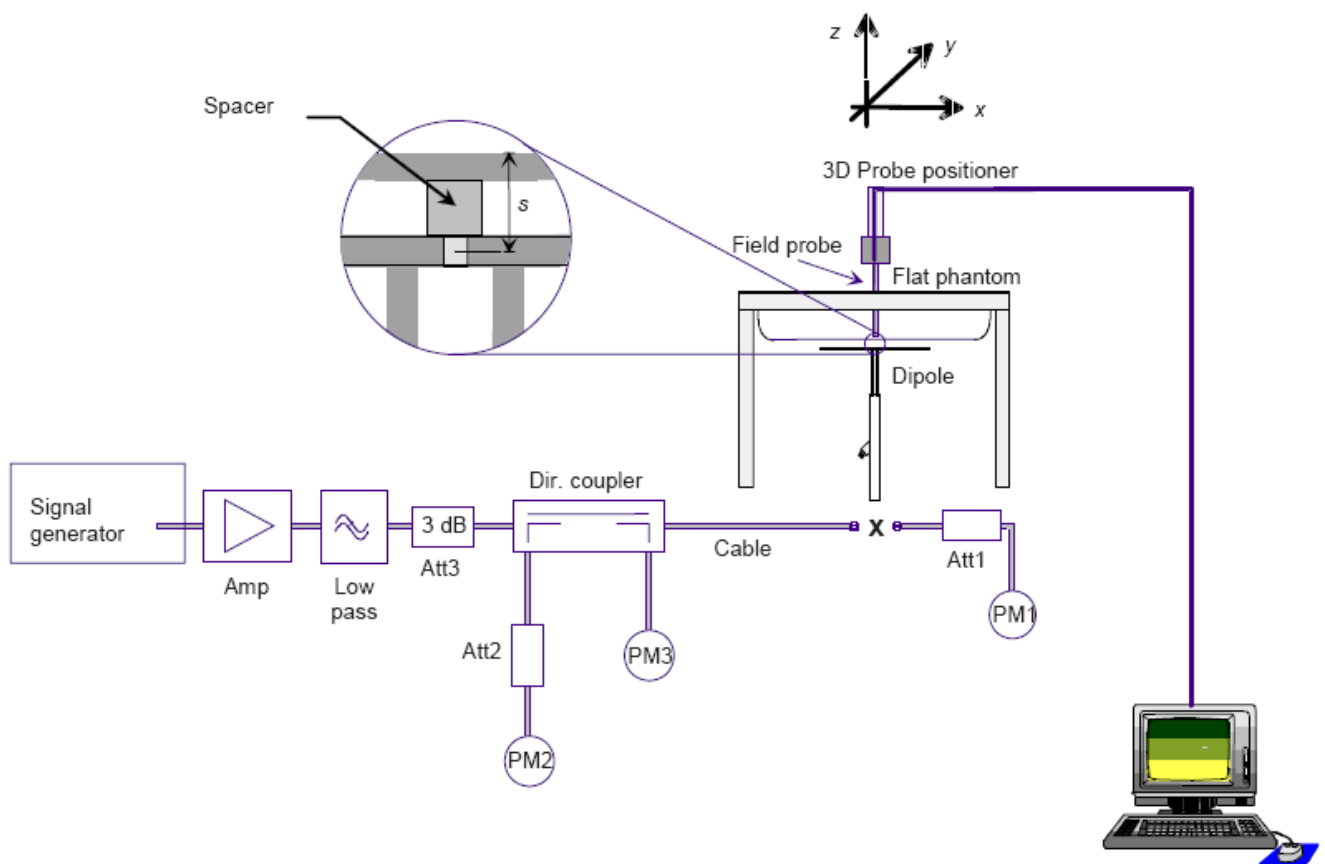

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) ($\pm 10\%$)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
750MHz	8.60 (7.74~9.46)	5.78 (5.20~6.36)	9.30	6.21	21.6 °C	Sep. 13, 2024
835MHz	9.40 (8.46~10.34)	6.28 (5.65~6.91)	10.11	6.12	21.7 °C	Sep. 17, 2024
1800MHz	37.06 (33.35~40.77)	20.01 (18.01~22.01)	38.32	20.25	21.6 °C	Sep. 20, 2024
1900MHz	39.69 (35.72~43.66)	20.92 (18.83~23.01)	41.54	21.53	21.7 °C	Sep. 21, 2024
2450MHz	50.05 (45.05~55.06)	23.80 (21.42~26.18)	51.84	23.59	21.5 °C	Sep. 24, 2024
2600MHz	54.16 (48.74~59.58)	24.85 (22.37~27.34)	54.33	25.23	21.4 °C	Sep. 29, 2024

5. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

6. SAR Measurement Uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

7. RF Exposure Positions

7.1. Generic device

The SAR evaluation shall be performed for surface of the DUT that are accessible during intended use, as indicated in Figure 7.1. Adjust the distance between the device surface and the flat phantom to 0mm.

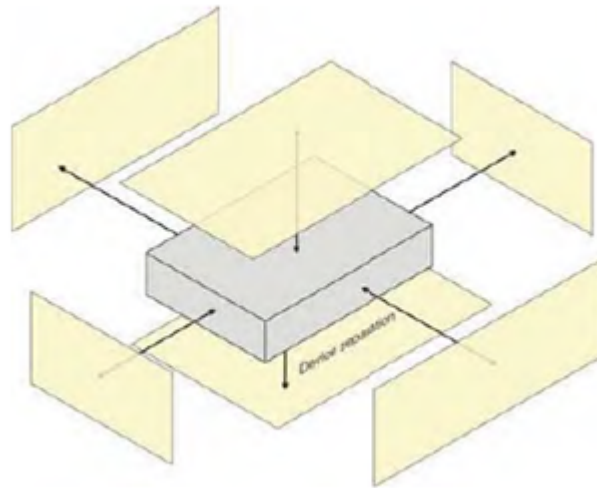


Figure 7.1 – Test positions for generic device

8. RF Output Power

8.1. LTE Conducted Power

- The following tests were conducted according to the test requirements outlines in 3GPP TS 36.521-1 specification. A summary of these configurations are illustrated below:

Test Parameters for Channel Bandwidths				
Downlink Configuration		Uplink Configuration		
Ch BW	N/A for Max UE output power testing	Mod'n	RB allocation	
			FDD	TDD
1.4MHz		QPSK	1	1
1.4MHz		QPSK	5	5
3MHz		QPSK	1	1
3MHz		QPSK	4	4
5MHz		QPSK	1	1
5MHz		QPSK	8	8
10MHz		QPSK	1	1
10MHz		QPSK	12	12
15MHz		QPSK	1	1
15MHz		QPSK	16	16
20MHz		QPSK	1	1
20MHz		QPSK	18	18
Note 1:	Test Channel Bandwidths are checked separately for each E-UTRA band, the applicable channel bandwidths are specified in Table 5.4.2.1-1.			
Note 2:	For E-UTRA bands not applied with Note 2 in Table 6.2.2.3-1:			
-	The 1 RB allocation shall be tested at RB#0 for low and mid range, RB #max for high range test frequency.			
-	The RBstart of non-1RB allocation shall be RB #0 for low and mid range, RB# (max +1 - RB allocation) for high range test frequency.			
Note 3:	For E-UTRA bands applied with Note 2 in Table 6.2.2.3-1:			
-	If the test channel bandwidth is larger than 4MHz, then the 1 RB allocation shall be tested at both RB #0 and RB #max.			
-	If the test channel bandwidth is smaller or equal to 4MHz, then the 1 RB allocation shall be tested at RB #0.			
-	If the test channel bandwidth = (FUL_high - FUL_low) specified by the operating band, then only one frequency range shall be tested and the 1 RB allocation shall be tested at RB #0, RB # $\left\lceil N_{RB}^{UL} / 2 \right\rceil$ and RB #max.			
-	For non-1RB allocation, test frequency is middle range, and the RBstart shall be RB #0.			

2. LTE Conducted Power Results

LTE output list

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band 2	1.4MHz	QPSK	1	0	23.50	23.25	23.16	22.37
			1	2	23.50	23.25	23.14	22.37
			1	5	23.50	23.20	23.09	22.34
			3	0	23.50	23.30	23.10	22.46
			3	1	23.50	23.30	22.77	22.52
			3	2	23.50	23.26	22.66	22.49
		16QAM	6	0	22.50	22.33	21.70	21.55
			1	0	22.50	22.27	21.69	21.36
			1	2	22.50	22.09	21.73	21.41
			1	5	22.50	21.82	21.63	21.35
			3	0	22.00	21.74	21.62	21.67
			3	1	22.00	21.72	21.64	21.71
			3	2	22.00	21.75	21.65	21.70
			6	0	21.00	20.81	20.72	20.59
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band 2	3MHz	QPSK	1	0	23.00	22.56	22.44	22.33
			1	7	23.00	22.59	22.55	22.46
			1	14	23.00	22.46	22.43	22.34
			8	0	22.00	21.68	21.66	21.57
			8	4	22.00	21.72	21.66	21.60
			8	7	22.00	21.65	21.58	21.49
			15	0	22.00	21.64	21.60	21.53
		16QAM	1	0	22.50	22.02	21.44	21.48
			1	7	22.50	22.15	21.58	21.62
			1	14	22.50	21.98	21.45	21.48
			8	0	21.00	20.86	20.69	20.57
			8	4	21.00	20.90	20.76	20.61
			8	7	21.00	20.85	20.68	20.49
			15	0	21.00	20.75	20.66	20.52
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE Band 2	5MHz	QPSK	1	0	23.00	22.71	22.72	22.57
			1	12	23.00	22.87	22.81	22.71
			1	24	23.00	22.73	22.68	22.61
			12	0	22.00	21.77	21.69	21.60
			12	6	22.00	21.85	21.74	21.63
			12	11	22.00	21.74	21.68	21.46
			25	0	22.00	21.78	21.74	21.60
		16QAM	1	0	22.00	21.61	21.80	21.84
			1	12	22.00	21.76	21.92	21.92
			1	24	22.00	21.69	21.82	21.91
			12	0	21.00	20.81	20.71	20.66

			12	6	21.00	20.83	20.75	20.70
			12	11	21.00	20.76	20.68	20.54
			25	0	21.00	20.84	20.76	20.62
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
LTE Band 2	10MHz	QPSK	1	0	23.00	22.78	22.79	22.54
			1	24	23.00	22.79	22.79	22.65
			1	49	23.00	22.79	22.75	22.67
			25	0	22.00	21.83	21.66	21.39
			25	12	22.00	21.86	21.80	21.66
			25	24	22.00	21.80	21.63	21.48
			50	0	22.00	21.83	21.71	21.46
		16QAM	1	0	22.50	22.33	21.81	21.71
			1	24	22.50	22.40	21.83	21.83
			1	49	22.50	22.41	21.78	21.88
			25	0	21.00	20.96	20.79	20.48
			25	12	21.00	20.91	20.90	20.70
			25	24	21.00	20.88	20.73	20.50
			50	0	21.00	20.89	20.77	20.46
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5
LTE Band 2	15MHz	QPSK	1	0	23.00	22.70	22.72	22.49
			1	37	23.00	22.83	22.76	22.58
			1	74	23.00	22.79	22.67	22.64
			36	0	22.00	21.75	21.69	21.40
			36	18	22.00	21.77	21.75	21.58
			36	37	22.00	21.77	21.62	21.52
			75	0	22.00	21.83	21.71	21.53
		16QAM	1	0	22.50	21.89	22.29	21.96
			1	37	22.50	22.01	22.39	22.00
			1	74	22.50	21.93	22.23	22.05
			36	0	21.00	20.82	20.73	20.42
			36	18	21.00	20.83	20.78	20.60
			36	37	21.00	20.82	20.70	20.54
			75	0	21.00	20.84	20.71	20.50
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band 2	20MHz	QPSK	1	0	23.50	23.10	23.17	23.00
			1	49	23.50	22.85	22.77	22.62
			1	99	23.50	22.79	22.62	22.59
			50	0	22.00	21.84	21.64	21.60
			50	24	22.00	21.83	21.80	21.67
			50	49	22.00	22.00	21.53	21.63
			100	0	22.00	21.93	21.60	21.58
		16QAM	1	0	23.00	22.62	22.38	22.30
			1	49	23.00	22.39	22.02	21.91
			1	99	23.00	22.28	21.83	21.86
			50	0	21.50	20.84	20.70	20.57

			50	24	21.50	20.90	20.83	20.70
			50	49	21.50	21.03	20.58	20.63
			100	0	21.00	20.95	20.62	20.61

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band 4	1.4MHz	QPSK	1	0	23.50	22.90	23.16	22.93
			1	2	23.50	22.97	23.23	23.00
			1	5	23.50	22.90	23.17	22.96
			3	0	23.50	23.18	23.16	23.12
			3	1	23.50	23.18	23.19	23.14
			3	2	23.50	23.18	23.18	23.09
			6	0	22.50	22.13	22.25	22.09
		16QAM	1	0	22.50	21.99	22.01	22.12
			1	2	22.50	22.06	22.09	22.09
			1	5	22.50	22.03	22.06	21.97
			3	0	22.50	22.42	22.18	21.98
			3	1	22.50	22.43	22.19	22.02
			3	2	22.50	22.45	22.18	21.97
			6	0	21.50	21.23	21.15	21.10
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5
LTE Band 4	3MHz	QPSK	1	0	23.00	22.76	22.45	22.25
			1	7	23.00	22.89	22.58	22.43
			1	14	23.00	22.76	22.40	22.28
			8	0	22.00	21.91	21.65	21.55
			8	4	22.00	21.93	21.65	21.60
			8	7	22.00	21.53	21.59	21.52
			15	0	22.00	21.59	21.56	21.53
		16QAM	1	0	22.50	21.99	21.37	21.51
			1	7	22.50	22.10	21.52	21.63
			1	14	22.50	21.93	21.37	21.46
			8	0	21.00	20.72	20.68	20.54
			8	4	21.00	20.84	20.73	20.60
			8	7	21.00	20.74	20.63	20.54
			15	0	21.00	20.70	20.60	20.53
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5
LTE Band 4	5MHz	QPSK	1	0	23.00	22.83	22.62	22.62
			1	12	23.00	22.74	22.73	22.74
			1	24	23.00	22.62	22.61	22.61
			12	0	22.00	21.60	21.61	21.55
			12	6	22.00	21.65	21.70	21.67
			12	11	22.00	21.71	21.65	21.68
			25	0	22.00	21.70	21.64	21.64
		16QAM	1	0	22.50	21.93	21.39	21.69
			1	12	22.50	22.07	21.51	21.78
			1	24	22.50	21.98	21.45	21.66

			12	0	21.00	20.73	20.65	20.62
			12	6	21.00	20.79	20.69	20.70
			12	11	21.00	20.80	20.68	20.68
			25	0	21.00	20.80	20.71	20.74
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750
LTE Band 4	10MHz	QPSK	1	0	23.00	22.60	22.75	22.63
			1	24	23.00	22.68	22.71	22.71
			1	49	23.00	22.68	22.65	22.66
			25	0	22.00	21.52	21.68	21.57
			25	12	22.00	21.74	21.70	21.70
			25	24	22.00	21.74	21.64	21.70
			50	0	22.00	21.72	21.66	21.70
		16QAM	1	0	22.50	21.85	22.14	21.75
			1	24	22.50	21.91	22.19	21.76
			1	49	22.50	21.86	22.22	21.66
			25	0	21.00	20.67	20.76	20.72
			25	12	21.00	20.85	20.80	20.84
			25	24	21.00	20.85	20.77	20.82
			50	0	21.00	20.80	20.73	20.75
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
LTE Band 4	15MHz	QPSK	1	0	23.00	22.56	22.63	22.63
			1	37	23.00	22.74	22.74	22.70
			1	74	23.00	22.70	22.60	22.56
			36	0	22.00	21.55	21.76	21.58
			36	18	22.00	21.67	21.78	21.65
			36	37	22.00	21.75	21.73	21.67
			75	0	22.00	21.69	21.78	21.69
		16QAM	1	0	22.50	21.83	22.07	22.09
			1	37	22.50	21.96	22.20	22.23
			1	74	22.50	21.75	22.28	21.92
			36	0	21.00	20.66	20.73	20.63
			36	18	21.00	20.76	20.79	20.71
			36	37	21.00	20.75	20.81	20.73
			75	0	21.00	20.73	20.72	20.69
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745
LTE Band 4	20MHz	QPSK	1	0	23.50	23.00	23.06	23.03
			1	49	23.50	22.73	22.76	22.68
			1	99	23.50	22.63	22.61	22.52
			50	0	22.00	21.54	21.67	21.72
			50	24	22.00	21.75	21.73	21.80
			50	49	22.00	21.67	21.72	21.89
			100	0	22.00	21.62	21.69	21.73
		16QAM	1	0	23.00	22.26	22.26	22.50
			1	49	23.00	21.95	21.99	22.34
			1	99	23.00	21.74	21.95	22.08

			50	0	21.00	20.61	20.69	20.77
			50	24	21.00	20.82	20.79	20.85
			50	49	21.00	20.70	20.73	20.93
			100	0	21.00	20.63	20.76	20.85

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band 5	1.4MHz	QPSK	1	0	24.00	23.75	23.35	23.23
			1	2	24.00	23.77	23.39	23.29
			1	5	24.00	23.64	23.30	23.24
			3	0	23.50	23.35	23.40	23.35
			3	1	23.50	23.36	23.42	23.37
			3	2	23.50	23.33	23.41	23.34
		16QAM	6	0	22.50	22.41	22.46	22.44
			1	0	22.50	22.18	22.31	22.41
			1	2	22.50	22.25	22.37	22.44
			1	5	22.50	22.18	22.34	22.34
			3	0	23.00	22.48	22.46	22.32
			3	1	23.00	22.53	22.47	22.34
			3	2	23.00	22.49	22.45	22.33
			6	0	21.50	21.44	21.44	21.47
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band 5	3MHz	QPSK	1	0	23.50	23.11	23.24	23.14
			1	7	23.50	23.22	23.32	23.30
			1	14	23.50	23.11	23.16	23.12
			8	0	22.50	22.34	22.38	22.40
			8	4	22.50	22.38	22.46	22.42
			8	7	22.50	22.29	22.38	22.36
			15	0	22.50	22.30	22.34	22.33
		16QAM	1	0	23.00	22.65	22.23	22.30
			1	7	23.00	22.71	22.35	22.45
			1	14	23.00	22.57	22.21	22.28
			8	0	22.00	21.46	21.45	21.33
			8	4	22.00	21.51	21.52	21.38
			8	7	22.00	21.43	21.43	21.31
			15	0	21.50	21.36	21.38	21.29
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band 5	5MHz	QPSK	1	0	24.00	23.35	23.40	23.35
			1	12	24.00	23.48	23.51	23.52
			1	24	24.00	23.36	23.42	23.40
			12	0	22.50	22.36	22.35	22.40
			12	6	22.50	22.38	22.46	22.46
			12	11	22.50	22.30	22.43	22.48
			25	0	22.50	22.34	22.43	22.48
		16QAM	1	0	23.00	22.44	22.65	22.22
			1	12	23.00	22.51	22.78	22.39
			1	24	23.00	22.43	22.71	22.25

			12	0	22.00	21.35	21.34	21.38
			12	6	22.00	21.36	21.49	21.47
			12	11	22.00	21.31	21.52	21.49
			25	0	22.00	21.36	21.44	21.50
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20450/829	20525/836.5	20600/844
LTE Band 5	10MHz	QPSK	1	0	24.00	23.40	23.48	23.47
			1	24	24.00	23.41	23.55	23.48
			1	49	24.00	23.44	23.49	23.44
			25	0	23.00	22.40	22.33	22.51
			25	12	23.00	22.42	22.50	22.47
			25	24	23.00	22.40	22.48	22.42
		16QAM	50	0	23.00	22.41	22.43	22.51
			1	0	23.00	22.88	22.45	22.63
			1	24	23.00	22.94	22.54	22.65
			1	49	23.00	22.99	22.49	22.59
			25	0	22.00	21.48	21.41	21.59
			25	12	22.00	21.48	21.62	21.51
			25	24	22.00	21.48	21.57	21.47
			50	0	21.50	21.40	21.40	21.48

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band 7	5MHz	QPSK	1	0	23.50	22.34	22.64	22.88
			1	12	23.50	22.53	22.79	23.08
			1	24	23.50	22.46	22.73	22.92
			12	0	22.00	21.42	21.72	21.88
			12	6	22.00	21.50	21.74	21.95
			12	11	22.00	21.43	21.70	21.87
		16QAM	25	0	22.00	21.43	21.75	21.85
			1	0	22.50	21.46	21.88	21.64
			1	12	22.50	21.65	22.05	21.77
			1	24	22.50	21.59	21.97	21.68
			12	0	21.00	20.41	20.77	20.90
			12	6	21.00	20.49	20.86	20.91
			12	11	21.00	20.40	20.78	20.92
			25	0	21.00	20.50	20.77	20.95
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20800/2505	21100/2535	21400/2565
LTE Band 7	10MHz	QPSK	1	0	23.50	22.40	22.74	22.97
			1	24	23.50	22.54	22.79	23.10
			1	49	23.50	22.61	22.82	23.14
			25	0	22.00	21.52	21.78	21.87
			25	12	22.00	21.57	21.74	21.96
			25	24	22.00	21.57	21.73	21.93
			50	0	22.00	21.56	21.79	21.90
		16QAM	1	0	22.50	21.61	22.17	21.90
			1	24	22.50	21.73	22.29	21.95
			1	49	22.50	21.75	22.32	21.93

			25	0	21.50	20.56	20.92	20.98
			25	12	21.50	20.60	20.91	21.08
			25	24	21.50	20.62	20.83	21.01
			50	0	21.00	20.53	20.84	20.93
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
LTE Band 7	15MHz	QPSK	1	0	23.50	22.29	22.67	22.83
			1	37	23.50	22.56	22.82	23.09
			1	74	23.50	22.57	22.82	22.99
			36	0	22.50	21.48	21.80	21.93
			36	18	22.50	21.55	21.83	22.09
			36	37	22.50	21.59	21.72	22.07
			75	0	22.50	21.57	21.82	22.02
		16QAM	1	0	22.50	21.86	21.90	21.96
			1	37	22.50	22.11	22.13	22.10
			1	74	22.50	22.05	22.17	22.00
			36	0	21.50	20.51	20.79	20.92
			36	18	21.50	20.57	20.86	21.05
			36	37	21.50	20.61	20.79	21.03
			75	0	21.00	20.57	20.80	20.99
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20850/2510	21100/2535	21350/2560
LTE Band 7	20MHz	QPSK	1	0	23.50	22.22	22.59	22.70
			1	49	23.50	22.61	22.82	23.01
			1	99	23.50	22.62	22.78	22.96
			50	0	22.50	21.47	21.76	21.78
			50	24	22.50	21.60	21.80	22.02
			50	49	22.50	21.70	21.66	21.96
			100	0	22.00	21.59	21.74	21.89
		16QAM	1	0	22.50	21.46	21.76	22.16
			1	49	22.50	21.78	22.08	22.42
			1	99	22.50	21.75	22.05	22.22
			50	0	21.00	20.44	20.80	20.80
			50	24	21.00	20.65	20.84	21.00
			50	49	21.00	20.75	20.69	20.97
			100	0	21.00	20.63	20.79	20.89

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23017/699.7	23095/707.5	23173/715.3
LTE Band 12	1.4MHz	QPSK	1	0	24.00	23.13	23.61	23.67
			1	2	24.00	23.24	23.63	23.77
			1	5	24.00	23.23	23.53	23.71
			3	0	23.50	23.32	23.33	23.30
			3	1	23.50	23.39	23.35	23.32
			3	2	23.50	23.37	23.31	23.32
			6	0	23.00	22.36	22.67	22.88
		16QAM	1	0	22.50	22.33	22.24	22.35
			1	2	22.50	22.44	22.26	22.42
			1	5	22.50	22.39	22.18	22.39

			3	0	22.50	22.31	22.32	22.13
			3	1	22.50	22.36	22.37	22.12
			3	2	22.50	22.37	22.39	22.08
			6	0	21.50	21.44	21.42	21.46
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23025/700.5	23095/707.5	23165/714.5
LTE Band 12	3MHz	QPSK	1	0	24.00	23.13	23.41	23.27
			1	7	24.00	23.32	23.61	23.69
			1	14	24.00	23.17	23.33	23.57
			8	0	23.00	22.39	22.51	22.49
			8	4	23.00	22.42	22.60	22.66
			8	7	23.00	22.37	22.51	22.63
		16QAM	15	0	22.50	22.33	22.37	22.42
			1	0	23.00	22.14	22.29	22.67
			1	7	23.00	22.35	22.46	22.74
			1	14	23.00	22.25	22.33	22.57
			8	0	22.00	21.48	21.25	21.52
			8	4	22.00	21.48	21.38	21.57
			8	7	22.00	21.44	21.28	21.52
			15	0	21.50	21.43	21.21	21.36
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23035/701.5	23095/707.5	23155/713.5
LTE Band 12	5MHz	QPSK	1	0	24.00	23.36	23.63	23.45
			1	12	24.00	23.57	23.75	23.72
			1	24	24.00	23.51	23.44	23.71
			12	0	23.00	22.45	22.31	22.49
			12	6	23.00	22.49	22.49	22.55
			12	11	23.00	22.53	22.34	22.52
		16QAM	25	0	23.00	22.51	22.30	22.53
			1	0	23.00	22.46	22.52	22.35
			1	12	23.00	22.66	22.68	22.36
			1	24	23.00	22.47	22.64	22.37
			12	0	22.00	21.48	21.22	21.54
			12	6	22.00	21.48	21.39	21.55
			12	11	22.00	21.52	21.33	21.40
			25	0	22.00	21.57	21.26	21.56
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23060/704	23095/707.5	23130/711
LTE Band 12	10MHz	QPSK	1	0	24.00	23.43	23.48	23.76
			1	24	24.00	23.61	23.78	23.62
			1	49	24.00	23.70	23.57	23.85
			25	0	23.00	22.40	22.20	22.63
			25	12	23.00	22.49	22.44	22.56
			25	24	23.00	22.52	22.20	22.54
			50	0	23.00	22.48	22.31	22.58
		16QAM	1	0	23.50	22.62	22.88	22.42
			1	24	23.50	22.62	22.86	22.62
			1	49	23.50	22.62	23.15	22.60
			25	0	22.00	21.49	21.19	21.66
			25	12	22.00	21.51	21.45	21.68

			25	24	22.00	21.46	21.31	21.69
			50	0	22.00	21.49	21.22	21.58

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23755/706.5	23790/710	23825/713.5
LTE Band 17	5MHz	QPSK	1	0	24.50	23.93	24.11	23.52
			1	12	24.50	24.17	23.91	23.75
			1	24	24.50	24.05	23.61	23.81
			12	0	23.00	22.72	22.57	22.60
			12	6	23.00	22.93	22.59	22.64
			12	11	23.00	22.82	22.48	22.60
			25	0	23.00	22.73	22.47	22.60
		16QAM	1	0	23.50	23.02	22.22	22.69
			1	12	23.50	23.16	22.42	22.71
			1	24	23.50	23.09	22.41	22.64
			12	0	22.00	21.70	21.50	21.64
			12	6	22.00	21.83	21.56	21.62
			12	11	22.00	21.74	21.43	21.51
			25	0	22.00	21.67	21.54	21.61
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23780/709	23790/710	23800/711
LTE Band 17	10MHz	QPSK	1	0	24.00	23.67	23.83	23.75
			1	24	24.00	23.71	23.69	23.67
			1	49	24.00	23.73	23.93	23.84
			25	0	23.00	22.38	22.50	22.69
			25	12	23.00	22.55	22.61	22.63
			25	24	23.00	22.44	22.56	22.65
			50	0	23.00	22.49	22.57	22.70
		16QAM	1	0	23.50	22.91	22.51	22.61
			1	24	23.50	23.02	22.66	22.86
			1	49	23.50	23.09	22.58	22.75
			25	0	22.00	21.36	21.52	21.66
			25	12	22.00	21.58	21.69	21.73
			25	24	22.00	21.52	21.66	21.67
			50	0	22.00	21.45	21.58	21.67

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26047/1850.7	26365/1882.5	26683/1914.3
LTE Band 25	1.4MHz	QPSK	1	0	23.50	23.42	22.91	22.83
			1	2	23.50	23.47	22.95	22.87
			1	5	23.50	23.35	22.92	22.84
			3	0	23.50	23.02	23.03	22.98
			3	1	23.50	23.04	23.06	23.02
			3	2	23.50	23.04	23.07	22.99
			6	0	22.50	22.05	22.08	22.00
		16QAM	1	0	22.50	21.92	22.08	21.85
			1	2	22.50	21.96	22.13	21.91
			1	5	22.50	21.92	22.03	21.85

			3	0	22.50	22.07	22.05	22.18
			3	1	22.50	22.12	22.06	22.23
			3	2	22.50	22.08	22.07	22.23
			6	0	21.50	21.02	21.14	21.07
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26055/1851.5	26365/1882.5	26675/1913.5
LTE Band 25	3MHz	QPSK	1	0	23.00	22.85	22.84	22.75
			1	7	23.00	22.98	22.97	22.88
			1	14	23.00	22.80	22.82	22.73
			8	0	22.50	22.04	22.09	21.99
			8	4	22.50	22.03	22.08	22.04
			8	7	22.50	21.97	21.98	21.98
			15	0	22.50	21.96	22.02	22.01
		16QAM	1	0	22.50	21.82	22.00	22.34
			1	7	22.50	21.99	22.12	22.47
			1	14	22.50	21.82	21.95	22.25
			8	0	21.50	21.14	21.00	21.17
			8	4	21.50	21.13	21.09	21.21
			8	7	21.50	21.06	20.97	21.16
			15	0	21.50	21.06	21.00	21.08
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26065/1852.5	26365/1882.5	26665/1912.5
LTE Band 25	5MHz	QPSK	1	0	23.50	23.04	23.09	23.05
			1	12	23.50	23.19	23.19	23.21
			1	24	23.50	23.05	23.07	23.03
			12	0	22.50	22.08	22.13	22.12
			12	6	22.50	22.13	22.16	22.14
			12	11	22.50	22.06	22.07	22.10
			25	0	22.50	22.07	22.10	22.15
		16QAM	1	0	22.50	22.29	21.98	22.14
			1	12	22.50	22.47	22.11	22.31
			1	24	22.50	22.36	22.02	22.17
			12	0	21.50	21.17	21.19	21.16
			12	6	21.50	21.18	21.16	21.13
			12	11	21.50	21.11	21.08	21.12
			25	0	21.50	21.14	21.19	21.22
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26090/1855	26365/1882.5	26640/1910
LTE Band 25	10MHz	QPSK	1	0	23.50	23.11	23.15	23.00
			1	24	23.50	23.14	23.23	23.11
			1	49	23.50	23.18	23.14	23.06
			25	0	22.50	22.15	22.14	22.28
			25	12	22.50	22.15	22.17	22.09
			25	24	22.50	22.15	22.00	21.94
			50	0	22.50	22.22	22.10	22.17
		16QAM	1	0	23.00	22.64	22.17	22.14
			1	24	23.00	22.72	22.24	22.31
			1	49	23.00	22.79	22.15	22.27

			25	0	21.50	21.25	21.24	21.30
			25	12	21.50	21.29	21.30	21.17
			25	24	21.50	21.26	21.12	21.02
			50	0	21.50	21.23	21.11	21.17
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26115/1857.5	26365/1882.5	26615/1907.5
LTE Band 25	15MHz	QPSK	1	0	23.50	23.03	23.11	22.81
			1	37	23.50	23.18	23.20	23.05
			1	74	23.50	23.11	23.07	22.95
			36	0	22.50	22.07	22.10	21.85
			36	18	22.50	22.15	22.13	22.04
			36	37	22.50	22.18	21.96	21.89
			75	0	22.50	22.20	22.08	21.88
		16QAM	1	0	23.00	22.41	22.23	22.44
			1	37	23.00	22.61	22.38	22.57
			1	74	23.00	22.58	22.22	22.57
			36	0	21.50	21.11	21.14	20.90
			36	18	21.50	21.16	21.15	21.08
			36	37	21.50	21.18	21.03	20.89
			75	0	21.50	21.16	21.11	20.91
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26140/1860	26365/1882.5	26590/1905
LTE Band 25	20MHz	QPSK	1	0	24.00	23.17	23.21	23.08
			1	49	24.00	23.51	23.43	23.29
			1	99	24.00	23.38	23.26	23.25
			50	0	23.00	22.45	22.33	22.01
			50	24	23.00	22.51	22.41	22.24
			50	49	23.00	22.60	22.16	21.86
			100	0	23.00	22.50	22.27	21.87
		16QAM	1	0	23.00	22.44	22.75	22.33
			1	49	23.00	22.79	22.98	22.51
			1	99	23.00	22.67	22.80	22.45
			50	0	22.00	21.47	21.38	20.97
			50	24	22.00	21.46	21.41	21.27
			50	49	22.00	21.65	21.24	20.85
			100	0	22.00	21.50	21.25	20.90

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26697/814.7	26865/831.5	27033/848.3
LTE Band 26	1.4MHz	QPSK	1	0	24.00	22.23	22.47	21.99
			1	2	24.00	21.29	22.34	20.97
			1	5	24.00	21.42	22.25	20.96
			3	0	23.50	21.40	22.34	21.07
			3	1	23.50	21.42	22.15	20.99
			3	2	23.50	21.48	22.20	20.96
			6	0	22.50	21.37	21.18	21.07
		16QAM	1	0	22.50	21.37	22.33	20.98
			1	2	22.50	21.42	22.45	21.01
			1	5	22.50	21.91	21.43	22.35

			3	0	22.50	21.45	21.28	21.61
			3	1	22.50	21.24	20.96	21.00
			3	2	22.50	21.26	21.39	20.80
			6	0	21.50	20.43	20.34	20.69
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26705/815.5	26865/831.5	27025/847.5
LTE Band 26	3MHz	QPSK	1	0	23.50	22.38	22.43	22.06
			1	7	23.50	22.20	22.28	22.12
			1	14	23.50	22.31	22.23	22.07
			8	0	22.50	21.35	21.35	21.55
			8	4	22.50	21.43	21.16	21.48
			8	7	22.50	21.35	21.18	21.00
			15	0	22.50	21.33	21.17	21.58
		16QAM	1	0	23.00	22.23	21.37	22.98
			1	7	23.00	22.53	21.99	21.61
			1	14	23.00	21.48	22.41	21.79
			8	0	21.50	20.60	20.44	20.64
			8	4	21.50	20.43	20.43	20.70
			8	7	21.50	20.51	20.33	20.88
			15	0	21.50	20.35	20.28	20.65
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26715/816.5	26865/831.5	27015/846.5
LTE Band 26	5MHz	QPSK	1	0	23.50	22.15	22.26	22.18
			1	12	23.50	22.08	22.20	22.19
			1	24	23.50	22.38	22.12	22.10
			12	0	22.50	21.24	21.36	21.28
			12	6	22.50	21.34	21.13	21.59
			12	11	22.50	21.28	21.18	21.54
			25	0	22.50	21.27	21.17	21.60
		16QAM	1	0	23.00	20.82	21.74	21.90
			1	12	23.00	21.68	20.66	22.06
			1	24	23.00	22.15	21.61	20.56
			12	0	21.50	20.40	20.31	20.41
			12	6	21.50	20.26	20.21	20.62
			12	11	21.50	20.32	20.23	20.55
			25	0	21.50	20.42	20.30	20.65
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26740/819	26865/831.5	26990/844
LTE Band 26	10MHz	QPSK	1	0	23.50	22.21	22.20	22.43
			1	24	23.50	22.28	22.26	22.39
			1	49	23.50	22.31	22.37	22.30
			25	0	22.50	21.37	21.35	21.22
			25	12	22.50	21.66	21.12	21.17
			25	24	22.50	21.32	21.26	21.67
			50	0	22.50	21.59	21.11	21.11
		16QAM	1	0	23.00	22.23	21.32	21.92
			1	24	23.00	22.53	21.72	21.87
			1	49	23.00	22.19	21.94	21.81
			25	0	21.50	20.35	20.51	20.79
			25	12	21.50	20.65	20.20	20.40

			25	24	21.50	20.28	20.20	20.70
			50	0	21.50	20.66	20.29	20.36
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26765/821.5	26865/831.5	26965/841.5
LTE Band 26	15MHz	QPSK	1	0	23.50	22.29	22.14	22.50
			1	37	23.50	22.30	22.14	22.49
			1	74	23.50	22.32	22.06	22.31
			36	0	22.50	21.59	21.32	21.23
			36	18	22.50	21.37	21.16	21.26
			36	37	22.50	21.35	21.23	21.41
			75	0	22.50	21.31	21.24	21.21
		16QAM	1	0	23.00	22.21	22.36	22.09
			1	37	23.00	22.24	21.95	21.94
			1	74	23.00	22.05	21.81	21.79
			36	0	21.50	20.63	20.65	20.36
			36	18	21.50	20.28	20.22	20.86
			36	37	21.50	20.41	20.74	20.58
			75	0	21.50	20.16	20.22	20.71

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		40265/2557.5	40740/2605	41215/2652.5
LTE Band 41	5MHz	QPSK	1	0	20.50	19.58	19.29	20.12
			1	12	20.50	19.59	19.43	20.11
			1	24	20.50	19.66	19.43	20.12
			12	0	19.50	18.62	18.53	19.04
			12	6	19.50	18.58	18.50	19.07
			12	11	19.50	18.56	18.58	19.16
			25	0	19.50	18.64	18.58	19.10
		16QAM	1	0	20.00	18.77	19.53	19.46
			1	12	20.00	18.74	19.88	19.75
			1	24	20.00	19.15	19.66	19.58
			12	0	18.50	17.62	17.28	17.94
			12	6	18.50	17.50	17.54	17.97
			12	11	18.50	17.41	17.48	18.01
			25	0	18.50	17.54	17.63	18.15
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		40290/2560	40740/2605	41190/2650
LTE Band 41	10MHz	QPSK	1	0	20.50	19.76	19.25	19.99
			1	24	20.50	19.64	19.19	20.18
			1	49	20.50	19.70	19.31	20.16
			25	0	19.50	18.64	18.46	19.04
			25	12	19.50	18.72	18.53	19.10
			25	24	19.50	18.74	18.64	19.07
			50	0	19.00	18.73	18.45	18.99
		16QAM	1	0	20.50	18.98	19.06	20.26
			1	24	21.00	19.22	19.05	20.51
			1	49	21.00	19.22	19.17	20.65
			25	0	18.50	17.67	17.74	18.15
			25	12	18.50	17.68	17.83	18.12

			25	24	18.50	17.79	17.91	18.08
			50	0	18.50	17.74	17.37	18.17
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		40315/2562.5	40740/2605	41165/2647.5
LTE Band 41	15MHz	QPSK	1	0	20.50	19.60	19.54	19.84
			1	37	20.50	19.68	19.42	19.99
			1	74	20.50	19.72	19.44	20.10
			36	0	19.50	18.71	18.57	18.97
			36	18	19.50	18.66	18.46	19.05
			36	37	19.50	18.69	18.44	19.09
			75	0	19.50	18.74	18.58	19.01
		16QAM	1	0	20.50	19.03	18.85	20.13
			1	37	20.50	19.29	18.84	20.31
			1	74	20.50	19.37	19.11	20.45
			36	0	18.50	17.72	17.65	17.97
			36	18	18.50	17.70	17.48	18.04
			36	37	18.50	17.81	17.73	17.99
			75	0	18.50	17.74	17.62	18.13
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		40340/2565	40740/2605	41140/2645
LTE Band 41	20MHz	QPSK	1	0	20.00	19.61	19.67	19.61
			1	49	20.00	19.57	19.45	19.88
			1	99	20.00	19.59	19.74	19.94
			50	0	19.50	18.67	18.55	18.78
			50	24	19.50	18.65	18.49	19.04
			50	49	19.50	18.65	18.48	18.95
			100	0	19.50	18.70	18.44	19.05
		16QAM	1	0	20.50	19.75	19.82	19.22
			1	49	20.50	20.18	19.77	19.24
			1	99	20.50	19.68	19.76	19.77
			50	0	18.50	17.77	17.77	17.92
			50	24	18.50	17.88	17.66	18.04
			50	49	18.50	17.98	17.69	18.24
			100	0	18.50	17.79	17.66	18.05

8.2. Wi-Fi & BT Output Power

Mode	Channel	Frequency (MHz)	Output Power Peak (dBm)	Output Power AV (dBm)	Tune-up (dBm)
802.11b	1	2412	9.50	7.99	8.00
	6	2437	8.85	7.31	8.00
	11	2462	9.69	8.15	8.50
802.11g	1	2412	16.89	13.47	14.00
	6	2437	15.89	12.34	13.00
	11	2462	17.11	13.62	14.00
802.11n HT20	1	2412	17.43	13.54	14.00
	6	2437	16.38	12.73	13.00
	11	2462	17.61	13.96	14.00
802.11n HT40	3	2422	16.81	13.18	14.00
	6	2437	16.79	12.76	13.00
	9	2452	17.24	13.38	14.00

Mode	Channel	Output Power Peak (dBm)	Output Power AV (dBm)	Tune-up (dBm)
BLE1M	CH00	-3.81	-4.01	-3.00
	CH19	-3.88	-4.25	-3.00
	CH39	-4.23	-5.11	-4.00

9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Pmax (dBm)	Pmax (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	-3.00	0.50	5	2.480	0.2	3	Yes

NOTE: Standalone SAR test exclusion for Bluetooth.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	Pmax (dBm)	Pmax (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/kg)
Bluetooth	Body	-3.00	0.50	5	2.48	7.5	0.021

NOTE: Estimated SAR calculation for Bluetooth

10. SAR Measurement Results

< LTE Band2 >

Test Position of Body with 0mm	Test channel /Freq.	Mode	SAR Value		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			(W/kg)							
			1-g	10-g						
1RB										
Front Side	18900/1880	20M QPSK(1,0)	0.288	0.158	-2.87	23.17	23.50	0.311	2024/9/21	
Back Side	18900/1880	20M QPSK(1,0)	0.473	0.270	-2.56	23.17	23.50	0.510	2024/9/21	2#
Left Side	18900/1880	20M QPSK(1,0)	0.260	0.142	-3.33	23.17	23.50	0.281	2024/9/21	
Right Side	18900/1880	20M QPSK(1,0)	0.245	0.133	2.74	23.17	23.50	0.264	2024/9/21	
Top Side	18900/1880	20M QPSK(1,0)	0.102	0.056	0.74	23.17	23.50	0.110	2024/9/21	
Bottom Side	18900/1880	20M QPSK(1,0)	0.312	0.176	3.31	23.17	23.50	0.337	2024/9/21	
50%RB										
Front Side	18900/1880	20M QPSK(50,49)	0.163	0.089	1.94	21.53	22.00	0.182	2024/9/21	
Back Side	18900/1880	20M QPSK(50,49)	0.241	0.144	1.78	21.53	22.00	0.269	2024/9/21	
Left Side	18900/1880	20M QPSK(50,49)	0.135	0.076	4.42	21.53	22.00	0.150	2024/9/21	
Right Side	18900/1880	20M QPSK(50,49)	0.137	0.069	1.23	21.53	22.00	0.153	2024/9/21	
Top Side	18900/1880	20M QPSK(50,49)	0.059	0.032	2.62	21.53	22.00	0.066	2024/9/21	
Bottom Side	18900/1880	20M QPSK(50,49)	0.182	0.103	1.94	21.53	22.00	0.203	2024/9/21	

< LTE Band4 >

Test Position of Body with 0mm	Test channel /Freq.	Mode	SAR Value		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			(W/kg)							
			1-g	10-g						
1RB										
Front Side	20175/1732.5	20M QPSK(1,0)	0.282	0.161	-1.19	23.06	23.50	0.312	2024/9/20	☐
Back Side	20175/1732.5	20M QPSK(1,0)	0.458	0.262	-3.88	23.06	23.50	0.507	2024/9/20	3#
Left Side	20175/1732.5	20M QPSK(1,0)	0.245	0.139	-2.21	23.06	23.50	0.271	2024/9/20	☐
Right Side	20175/1732.5	20M QPSK(1,0)	0.245	0.133	-3.30	23.06	23.50	0.271	2024/9/20	☐
Top Side	20175/1732.5	20M QPSK(1,0)	0.046	0.025	-2.11	23.06	23.50	0.051	2024/9/20	☐
Bottom Side	20175/1732.5	20M QPSK(1,0)	0.282	0.156	-1.95	23.06	23.50	0.312	2024/9/20	☐
50%RB										
Front Side	20175/1732.5	20M QPSK(50,49)	0.162	0.086	3.74	21.72	22.00	0.173	2024/9/20	☐
Back Side	20175/1732.5	20M QPSK(50,49)	0.269	0.154	-2.15	21.72	22.00	0.287	2024/9/20	☐

Left Side	20175/1732.5	20M QPSK(50,49)	0.140	0.074	-3.43	21.72	22.00	0.149	2024/9/20	☐
Right Side	20175/1732.5	20M QPSK(50,49)	0.145	0.073	0.24	21.72	22.00	0.155	2024/9/20	☐
Top Side	20175/1732.5	20M QPSK(50,49)	0.026	0.014	-0.84	21.72	22.00	0.028	2024/9/20	☐
Bottom Side	20175/1732.5	20M QPSK(50,49)	0.143	0.088	3.39	21.72	22.00	0.153	2024/9/20	☐

< LTE Band5 >

Test Position of Body with 0mm	Test channel /Freq.	Mode	SAR Value		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			(W/kg)							
			1-g	10-g						
1RB										
Front Side	20525/836.5	10M QPSK(1,24)	0.186	0.103	-3.87	23.55	24.00	0.206	2024/9/17	☐
Back Side	20525/836.5	10M QPSK(1,24)	0.302	0.173	-2.59	23.55	24.00	0.335	2024/9/17	4#
Left Side	20525/836.5	10M QPSK(1,24)	0.160	0.092	1.14	23.55	24.00	0.177	2024/9/17	☐
Right Side	20525/836.5	10M QPSK(1,24)	0.170	0.093	0.59	23.55	24.00	0.189	2024/9/17	☐
Top Side	20525/836.5	10M QPSK(1,24)	0.032	0.018	-2.25	23.55	24.00	0.035	2024/9/17	☐
Bottom Side	20525/836.5	10M QPSK(1,24)	0.198	0.112	-3.29	23.55	24.00	0.220	2024/9/17	☐
50%RB										
Front Side	20525/836.5	10M QPSK(25,0)	0.097	0.055	-4.05	22.33	23.00	0.113	2024/9/17	☐
Back Side	20525/836.5	10M QPSK(25,0)	0.173	0.096	-1.30	22.33	23.00	0.202	2024/9/17	☐
Left Side	20525/836.5	10M QPSK(25,0)	0.081	0.052	-4.39	22.33	23.00	0.095	2024/9/17	☐
Right Side	20525/836.5	10M QPSK(25,0)	0.094	0.048	5.00	22.33	23.00	0.110	2024/9/17	☐
Top Side	20525/836.5	10M QPSK(25,0)	0.018	0.009	-0.85	22.33	23.00	0.021	2024/9/17	☐
Bottom Side	20525/836.5	10M QPSK(25,0)	0.116	0.063	0.67	22.33	23.00	0.135	2024/9/17	☐

< LTE Band7 >

Test Position of Body with 0mm	Test channel /Freq.	Mode	SAR Value		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			(W/kg)							
			1-g	10-g						
1RB										
Front Side	21100/2535	20M QPSK(1,49)	0.342	0.198	1.45	22.82	23.50	0.400	2024/9/29	☐
Back Side	21100/2535	20M QPSK(1,49)	0.548	0.324	-2.97	22.82	23.50	0.641	2024/9/29	5#
Left Side	21100/2535	20M QPSK(1,49)	0.290	0.168	-1.06	22.82	23.50	0.339	2024/9/29	☐
Right Side	21100/2535	20M QPSK(1,49)	0.290	0.171	-2.50	22.82	23.50	0.339	2024/9/29	☐
Top Side	21100/2535	20M QPSK(1,49)	0.059	0.034	-3.37	22.82	23.50	0.069	2024/9/29	☐

Bottom Side	21100/2535	20M QPSK(1,49)	0.330	0.191	-2.57	22.82	23.50	0.386	2024/9/29	☐
50%RB										
Front Side	21100/2535	20M QPSK(50,24)	0.187	0.114	-0.38	21.80	22.50	0.220	2024/9/29	☐
Back Side	21100/2535	20M QPSK(50,24)	0.307	0.174	2.99	21.80	22.50	0.361	2024/9/29	☐
Left Side	21100/2535	20M QPSK(50,24)	0.165	0.087	4.49	21.80	22.50	0.194	2024/9/29	☐
Right Side	21100/2535	20M QPSK(50,24)	0.170	0.094	-3.93	21.80	22.50	0.200	2024/9/29	☐
Top Side	21100/2535	20M QPSK(50,24)	0.034	0.019	-2.65	21.80	22.50	0.040	2024/9/29	☐
Bottom Side	21100/2535	20M QPSK(50,24)	0.173	0.096	-3.49	21.80	22.50	0.203	2024/9/29	☐

< LTE Band12 >

Test Position of Body with 0mm	Test channel /Freq.	Mode	SAR Value		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			(W/kg)							
			1-g	10-g						
1RB										
Front Side	23095/707.5	10M QPSK(1,49)	0.204	0.121	-2.98	23.57	24.00	0.225	2024/9/13	☐
Back Side	23095/707.5	10M QPSK(1,49)	0.301	0.182	-0.66	23.57	24.00	0.332	2024/9/13	6#
Left Side	23095/707.5	10M QPSK(1,49)	0.175	0.102	1.15	23.57	24.00	0.193	2024/9/13	☐
Right Side	23095/707.5	10M QPSK(1,49)	0.165	0.097	3.63	23.57	24.00	0.182	2024/9/13	☐
Top Side	23095/707.5	10M QPSK(1,49)	0.032	0.018	2.01	23.57	24.00	0.035	2024/9/13	☐
Bottom Side	23095/707.5	10M QPSK(1,49)	0.210	0.122	3.46	23.57	24.00	0.232	2024/9/13	☐
50%RB										
Front Side	23095/707.5	10M QPSK(25,0)	0.116	0.062	-4.31	22.20	23.00	0.139	2024/9/13	☐
Back Side	23095/707.5	10M QPSK(25,0)	0.155	0.100	4.64	22.20	23.00	0.186	2024/9/13	☐
Left Side	23095/707.5	10M QPSK(25,0)	0.104	0.057	-2.61	22.20	23.00	0.125	2024/9/13	☐
Right Side	23095/707.5	10M QPSK(25,0)	0.098	0.051	-1.42	22.20	23.00	0.118	2024/9/13	☐
Top Side	23095/707.5	10M QPSK(25,0)	0.018	0.010	2.95	22.20	23.00	0.022	2024/9/13	☐
Bottom Side	23095/707.5	10M QPSK(25,0)	0.111	0.064	1.73	22.20	23.00	0.133	2024/9/13	☐

< LTE Band17 >

Test Position of Body with 0mm	Test channel /Freq.	Mode	SAR Value		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			(W/kg)							
			1-g	10-g						
1RB										
Front Side	23790/710	10M	0.198	0.111	-1.83	23.93	24.00	0.201	2024/9/13	☐

		QPSK(1,49)								
Back Side	23790/710	10M QPSK(1,49)	0.310	0.178	4.75	23.93	24.00	0.315	2024/9/13	7#
Left Side	23790/710	10M QPSK(1,49)	0.170	0.093	2.46	23.93	24.00	0.173	2024/9/13	☐
Right Side	23790/710	10M QPSK(1,49)	0.165	0.092	-1.97	23.93	24.00	0.168	2024/9/13	☐
Top Side	23790/710	10M QPSK(1,49)	0.032	0.018	-1.72	23.93	24.00	0.033	2024/9/13	☐
Bottom Side	23790/710	10M QPSK(1,49)	0.210	0.118	3.77	23.93	24.00	0.213	2024/9/13	☐
50%RB										
Front Side	23790/710	10M QPSK(25,0)	0.119	0.066	4.26	22.50	23.00	0.134	2024/9/13	☐
Back Side	23790/710	10M QPSK(25,0)	0.159	0.103	0.92	22.50	23.00	0.178	2024/9/13	☐
Left Side	23790/710	10M QPSK(25,0)	0.098	0.049	3.57	22.50	23.00	0.110	2024/9/13	☐
Right Side	23790/710	10M QPSK(25,0)	0.095	0.052	4.62	22.50	23.00	0.107	2024/9/13	☐
Top Side	23790/710	10M QPSK(25,0)	0.016	0.010	-4.40	22.50	23.00	0.018	2024/9/13	☐
Bottom Side	23790/710	10M QPSK(25,0)	0.122	0.061	-3.19	22.50	23.00	0.137	2024/9/13	☐

< LTE Band25 >

Test Position of Body with 0mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	26365/1882.5	20M QPSK(1,49)	0.288	0.158	0.59	23.43	24.00	0.328	2024/9/21	☐
Back Side	26365/1882.5	20M QPSK(1,49)	0.452	0.259	3.95	23.43	24.00	0.515	2024/9/21	8#
Left Side	26365/1882.5	20M QPSK(1,49)	0.235	0.128	0.38	23.43	24.00	0.268	2024/9/21	☐
Right Side	26365/1882.5	20M QPSK(1,49)	0.245	0.140	-1.39	23.43	24.00	0.279	2024/9/21	☐
Top Side	26365/1882.5	20M QPSK(1,49)	0.046	0.026	-0.37	23.43	24.00	0.052	2024/9/21	☐
Bottom Side	26365/1882.5	20M QPSK(1,49)	0.294	0.168	2.15	23.43	24.00	0.335	2024/9/21	☐
50%RB										
Front Side	26365/1882.5	20M QPSK(50,49)	0.166	0.082	4.73	22.16	23.00	0.201	2024/9/21	☐
Back Side	26365/1882.5	20M QPSK(50,49)	0.232	0.154	-2.20	22.16	23.00	0.282	2024/9/21	☐
Left Side	26365/1882.5	20M QPSK(50,49)	0.126	0.065	4.64	22.16	23.00	0.153	2024/9/21	☐
Right Side	26365/1882.5	20M QPSK(50,49)	0.128	0.072	-0.14	22.16	23.00	0.155	2024/9/21	☐
Top Side	26365/1882.5	20M QPSK(50,49)	0.026	0.015	3.51	22.16	23.00	0.032	2024/9/21	☐
Bottom Side	26365/1882.5	20M QPSK(50,49)	0.162	0.100	2.05	22.16	23.00	0.197	2024/9/21	☐

< LTE Band26 >

Test Position of Body	Test	Mode	SAR Value	Power	Conducted	Tune-up	Scaled	Date	Plot
-----------------------	------	------	-----------	-------	-----------	---------	--------	------	------

with 0mm	channel /Freq.		(W/kg)		Drift(%)	Power (dBm)	Power (dBm)	SAR 1-g (W/Kg)		
			1-g	10-g						
1RB										
Front Side	26865/831.5	15M QPSK(1,37)	0.198	0.113	-0.80	22.14	23.00	0.241	2024/9/17	☐
Back Side	26865/831.5	15M QPSK(1,37)	0.280	0.167	-0.40	22.14	23.00	0.341	2024/9/17	10#
Left Side	26865/831.5	15M QPSK(1,37)	0.160	0.094	3.49	22.14	23.00	0.195	2024/9/17	☐
Right Side	26865/831.5	15M QPSK(1,37)	0.165	0.097	-1.73	22.14	23.00	0.201	2024/9/17	☐
Top Side	26865/831.5	15M QPSK(1,37)	0.031	0.018	-2.92	22.14	23.00	0.038	2024/9/17	☐
Bottom Side	26865/831.5	15M QPSK(1,37)	0.186	0.110	0.27	22.14	23.00	0.227	2024/9/17	☐
50%RB										
Front Side	26865/831.5	15M QPSK(36,37)	0.114	0.064	-1.18	21.23	22.00	0.136	2024/9/17	☐
Back Side	26865/831.5	15M QPSK(36,37)	0.165	0.098	-0.13	21.23	22.00	0.197	2024/9/17	☐
Left Side	26865/831.5	15M QPSK(36,37)	0.085	0.049	-4.74	21.23	22.00	0.101	2024/9/17	☐
Right Side	26865/831.5	15M QPSK(36,37)	0.097	0.053	0.17	21.23	22.00	0.116	2024/9/17	☐
Top Side	26865/831.5	15M QPSK(36,37)	0.017	0.010	2.80	21.23	22.00	0.020	2024/9/17	☐
Bottom Side	26865/831.5	15M QPSK(36,37)	0.094	0.061	-4.45	21.23	22.00	0.112	2024/9/17	☐

< LTE Band41 >

Test Position of Body with 0mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	40740/2605	20M QPSK(1,99)	0.360	0.201	2.75	19.74	20.00	0.382	2024/9/29	☐
Back Side	40740/2605	20M QPSK(1,99)	0.590	0.332	-4.38	19.74	20.00	0.626	2024/9/29	9#
Left Side	40740/2605	20M QPSK(1,99)	0.305	0.172	-1.79	19.74	20.00	0.324	2024/9/29	
Right Side	40740/2605	20M QPSK(1,99)	0.300	0.162	-3.23	19.74	20.00	0.319	2024/9/29	
Top Side	40740/2605	20M QPSK(1,99)	0.064	0.035	-2.68	19.74	20.00	0.068	2024/9/29	
Bottom Side	40740/2605	20M QPSK(1,99)	0.360	0.192	1.07	19.74	20.00	0.382	2024/9/29	
50%RB										
Front Side	40740/2605	20M QPSK(50,24)	0.202	0.114	-2.38	18.49	19.50	0.255	2024/9/29	
Back Side	40740/2605	20M QPSK(50,24)	0.330	0.194	3.90	18.49	19.50	0.416	2024/9/29	
Left Side	40740/2605	20M QPSK(50,24)	0.168	0.097	-3.55	18.49	19.50	0.212	2024/9/29	

Right Side	40740/2605	20M QPSK(50,24)	0.159	0.091	-2.98	18.49	19.50	0.201	2024/9/29	
Top Side	40740/2605	20M QPSK(50,24)	0.033	0.021	-3.25	18.49	19.50	0.042	2024/9/29	
Bottom Side	40740/2605	20M QPSK(50,24)	0.197	0.111	0.30	18.49	19.50	0.249	2024/9/29	

< WLAN 2.4G >

Test Position of Body with 0mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	11/2462	802.11b	0.312	0.182	-3.51	8.15	8.50	0.338	2024/9/24	
Back Side	11/2462	802.11b	0.492	0.290	-2.30	8.15	8.50	0.533	2024/9/24	1#
Back Side	11/2462	802.11n HT20	0.468	0.254	1.20	13.96	14.00	0.472	2024/9/24	
Left Side	11/2462	802.11b	0.270	0.159	1.80	8.15	8.50	0.293	2024/9/24	
Right Side	11/2462	802.11b	0.260	0.152	3.78	8.15	8.50	0.282	2024/9/24	
Top Side	11/2462	802.11b	0.030	0.017	-3.60	8.15	8.50	0.033	2024/9/24	
Bottom Side	11/2462	802.11b	0.027	0.010	2.55	8.15	8.50	0.029	2024/9/24	

11. Simultaneous Transmission Analysis

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

1) Scalar SAR summation $< 1.6\text{W/kg}$.

2) $\text{SPLSR} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{(\text{min. separation distance, mm})}$, and the peak separation distance is

determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where

(x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.

If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Exposure Position		WWAN Band	DTS/DSS Band	Simultaneous Tx SAR(W/Kg)
		SAR(W/Kg)	SAR(W/Kg)	
Body	Front Side	0.400	0.338	0.738
	Back Side	0.641	0.533	1.174
	Left Side	0.339	0.472	0.811
	Right Side	0.339	0.293	0.632
	Top Side	0.110	0.282	0.392
	Bottom Side	0.386	0.033	0.419

Note : The Simultaneous Tx is calculated based on the same configuration and test position.

Appendix A. Photo documentation

Refer to appendix Test Setup photo-SAR

Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - 750MHz
MEASUREMENT 2 System Performance Check - 835MHz
MEASUREMENT 3 System Performance Check - 1800MHz
MEASUREMENT 4 System Performance Check - 1900MHz
MEASUREMENT 5 System Performance Check - 2450MHz
MEASUREMENT 6 System Performance Check - 2600MHz

MEASUREMENT 1


Date of measurement: 13/9/2024

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW750</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>1.65</u>

B. SAR Measurement Results


Frequency (MHz)	750.000000
Relative permittivity (real part)	42.562010
Relative permittivity (imaginary part)	19.132740
Conductivity (S/m)	0.912054
Variation (%)	0.210000

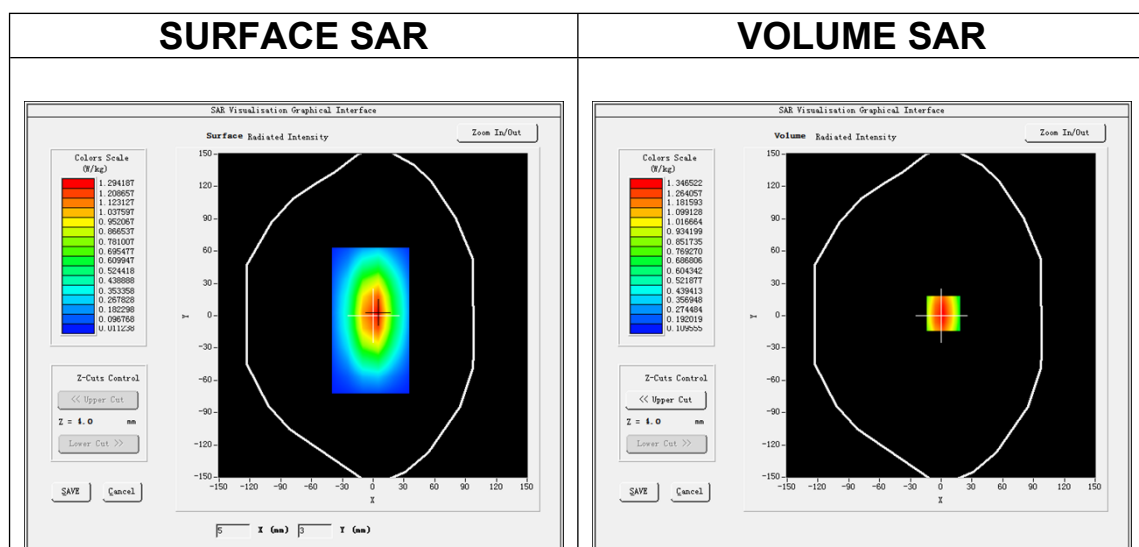

Maximum location: X=2.00, Y=2.00

SAR Peak: 1.87 W/kg

SAR 10g (W/Kg)	0.621031
SAR 1g (W/Kg)	0.930125

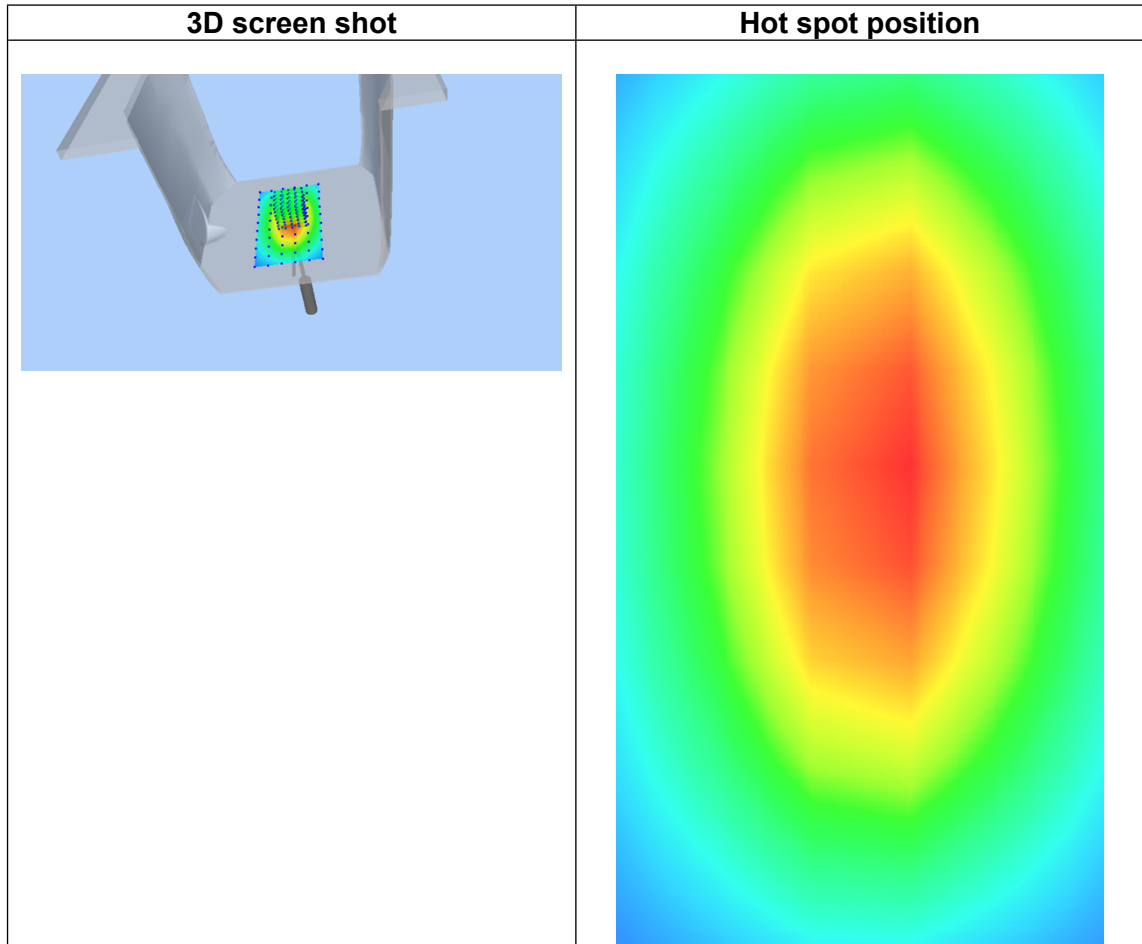

MEASUREMENT 2


Date of measurement: 17/9/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.66</u>

B. SAR Measurement Results


Frequency (MHz)	835.000000
Relative permittivity (real part)	42.012031
Relative permittivity (imaginary part)	19.131021
Conductivity (S/m)	0.941030
Variation (%)	0.310000

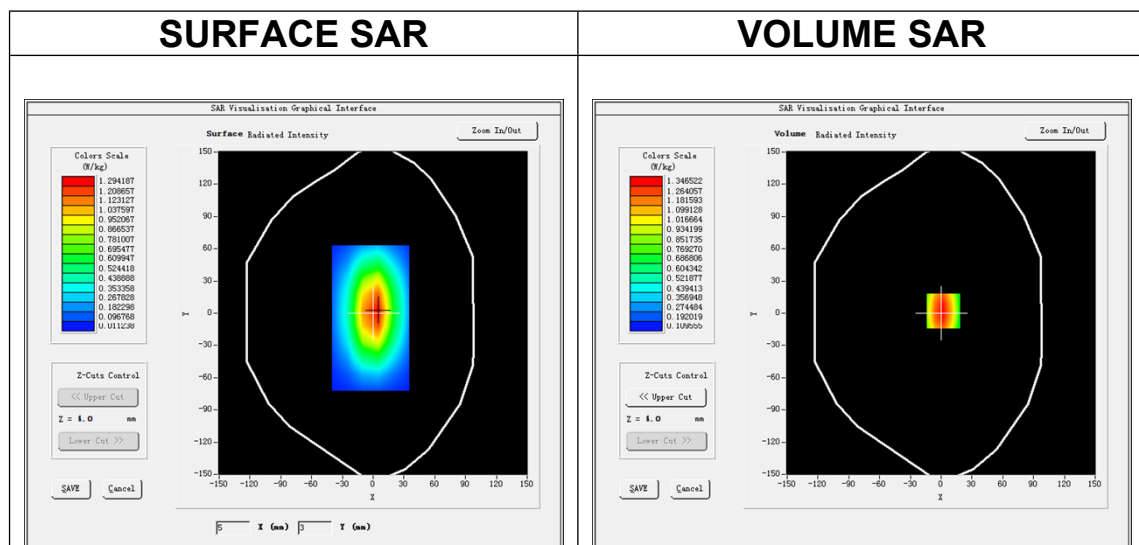

Maximum location: X=2.00, Y=2.00

SAR Peak: 1.87 W/kg

SAR 10g (W/Kg)	0.612031
SAR 1g (W/Kg)	1.011231

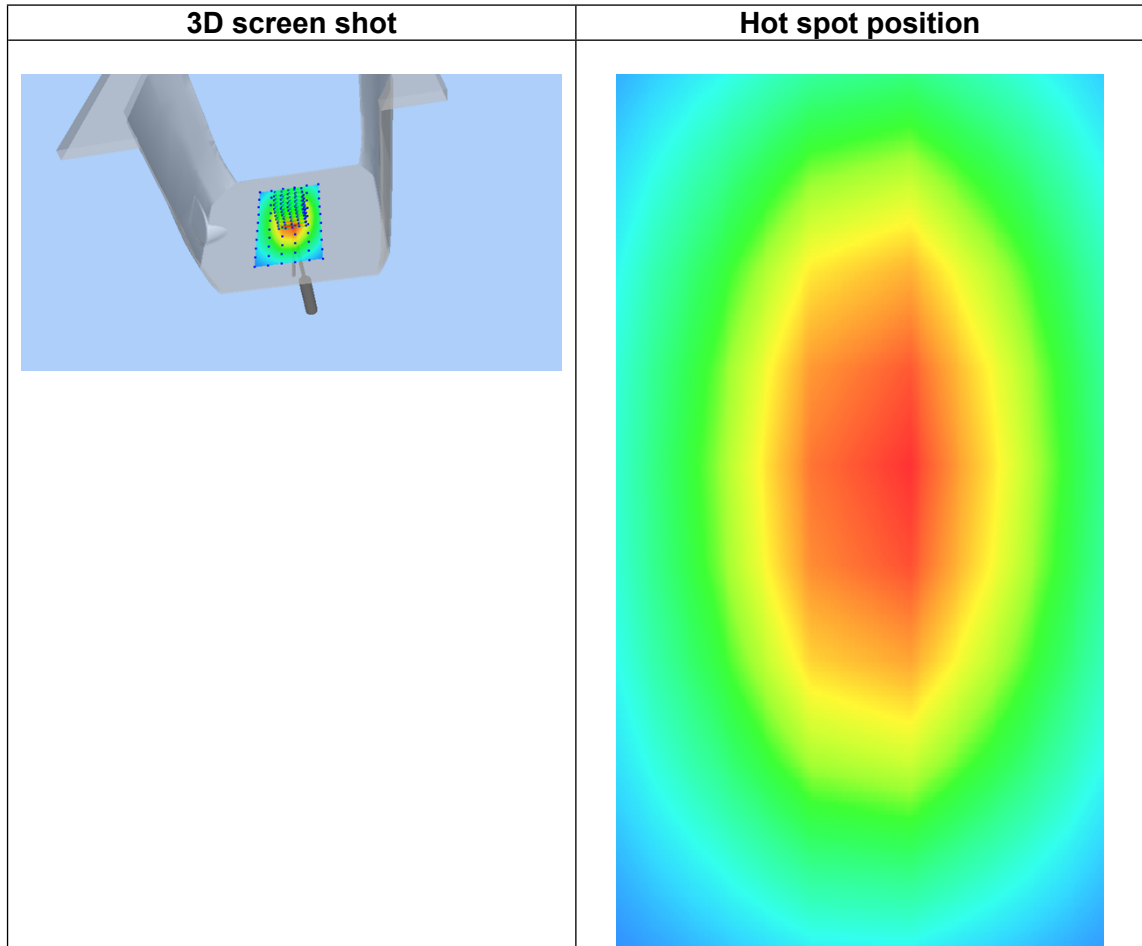

MEASUREMENT 3


Date of measurement: 20/9/2024

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1800</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>2.05</u>

B. SAR Measurement Results


Frequency (MHz)	1800.000000
Relative permittivity (real part)	39.606403
Relative permittivity (imaginary part)	14.067180
Conductivity (S/m)	1.406718
Variation (%)	-0.140000

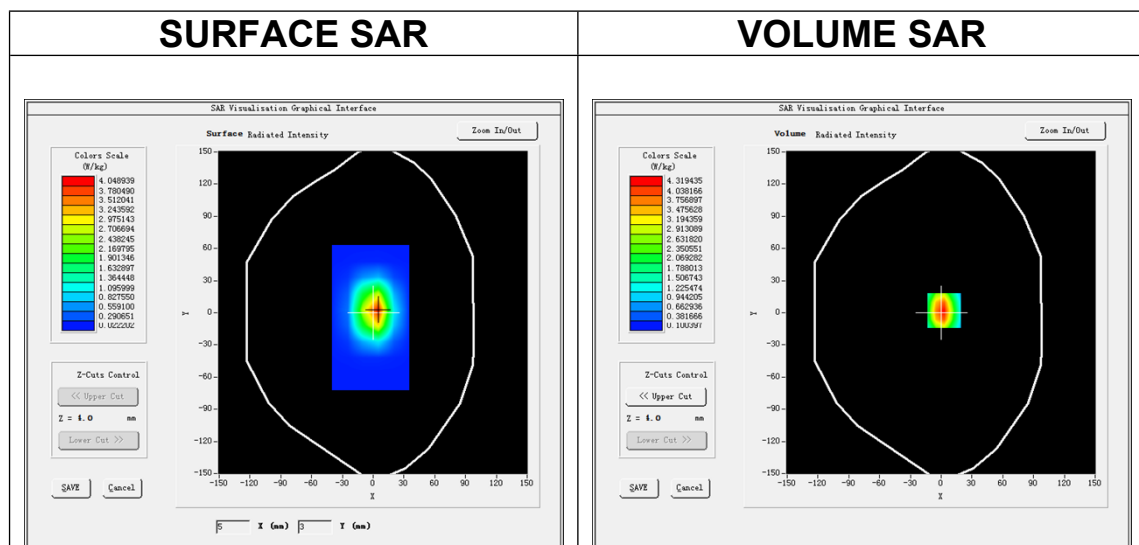

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	2.024557
SAR 1g (W/Kg)	3.832112

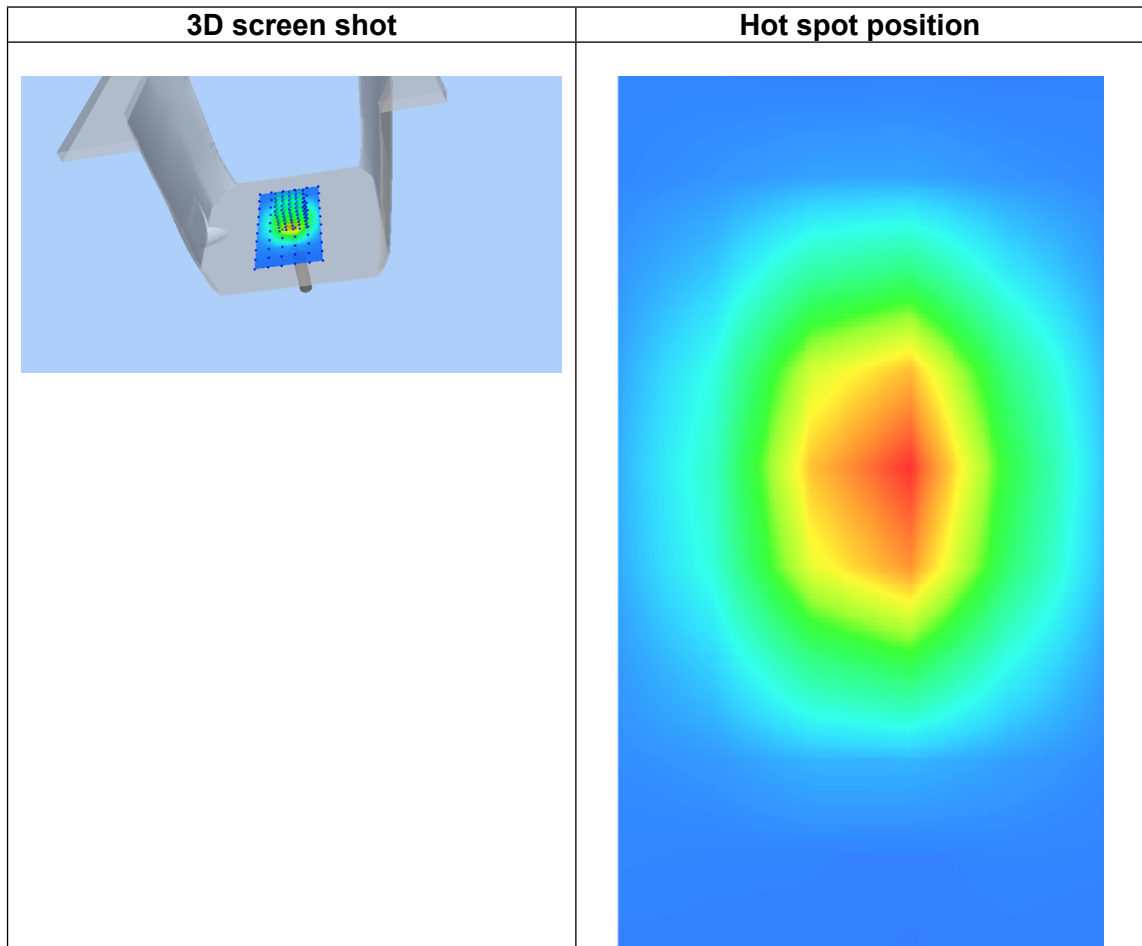

MEASUREMENT 4

Date of measurement: 21/9/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.05</u>

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	41.420140
Relative permittivity (imaginary part)	12.570123
Conductivity (S/m)	1.390503
Variation (%)	-0.440000


SURFACE SAR

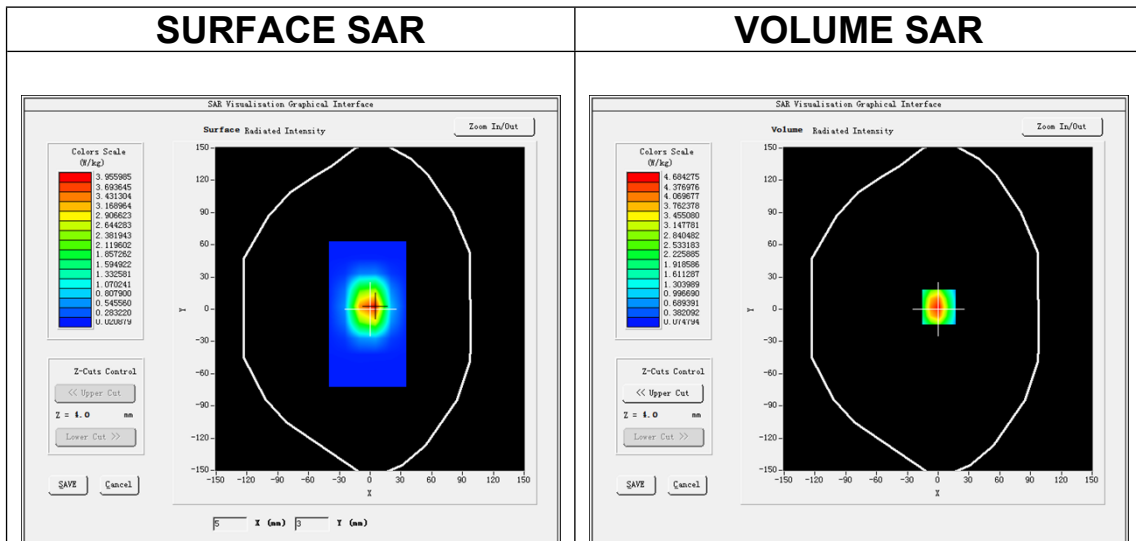

Maximum location: X=1.00, Y=2.00

SAR Peak: 7.65 W/kg

SAR 10g (W/Kg)	2.153165
SAR 1g (W/Kg)	4.153568

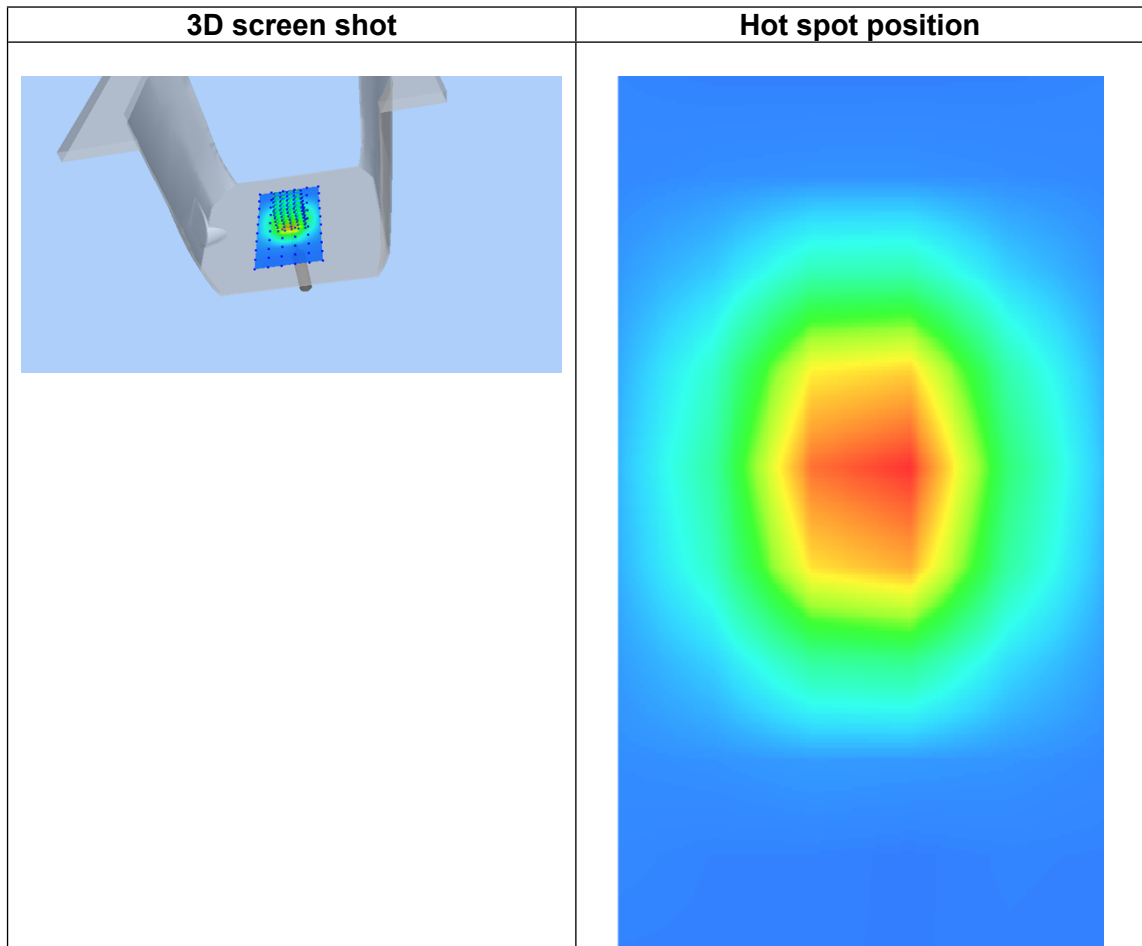

MEASUREMENT 5


Date of measurement: 24/9/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.38</u>

B. SAR Measurement Results


Frequency (MHz)	2450.000000
Relative permittivity (real part)	40.408511
Relative permittivity (imaginary part)	13.399264
Conductivity (S/m)	1.823789
Variation (%)	-1.250000

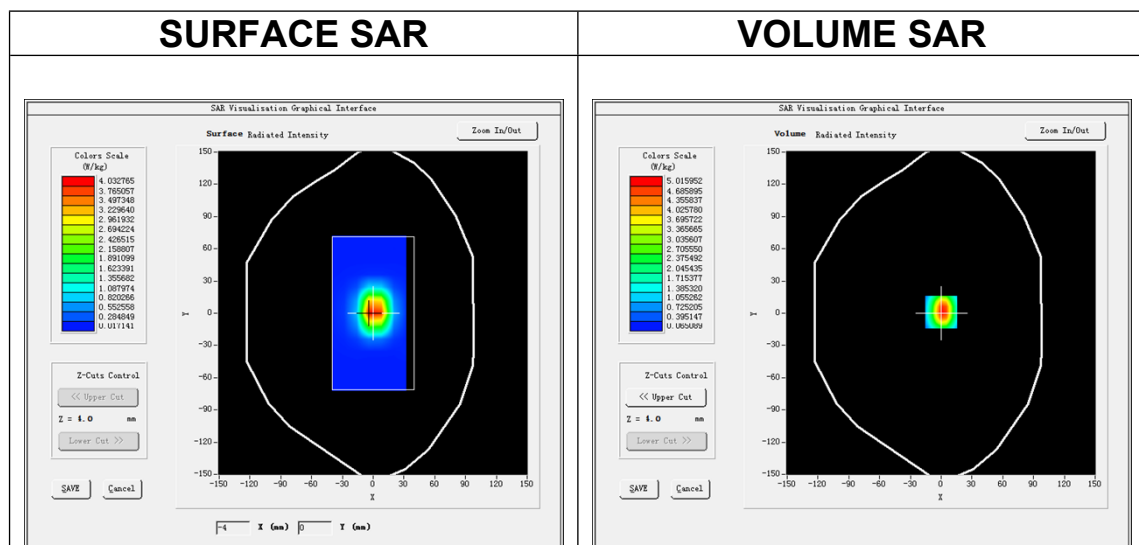

Maximum location: X=0.00, Y=1.00

SAR Peak: 8.14 W/kg

SAR 10g (W/Kg)	2.359425
SAR 1g (W/Kg)	5.183642

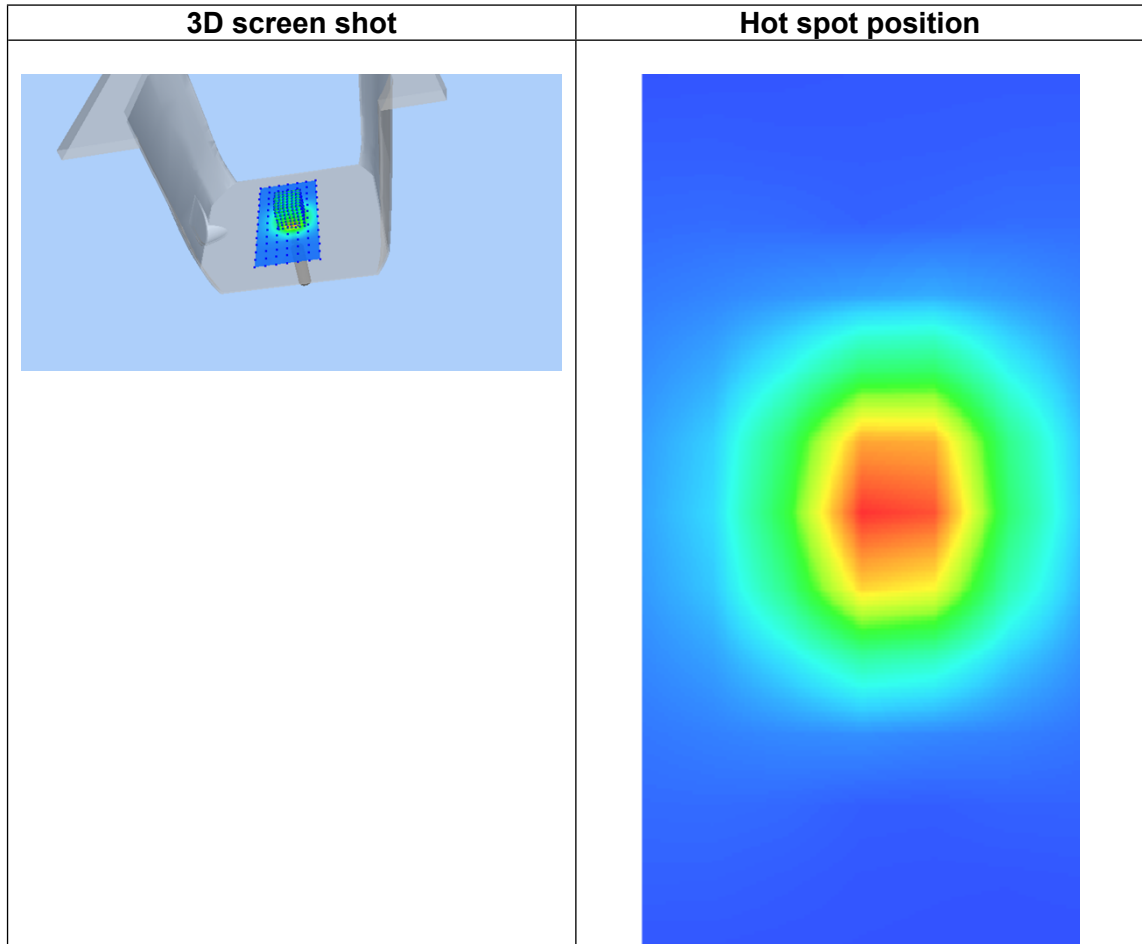

MEASUREMENT 6


Date of measurement: 29/9/2024

A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW2600</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>2.35</u>

B. SAR Measurement Results


Frequency (MHz)	2600.000000
Relative permittivity (real part)	39.432362
Relative permittivity (imaginary part)	13.768602
Conductivity (S/m)	1.988798
Variation (%)	-3.980000

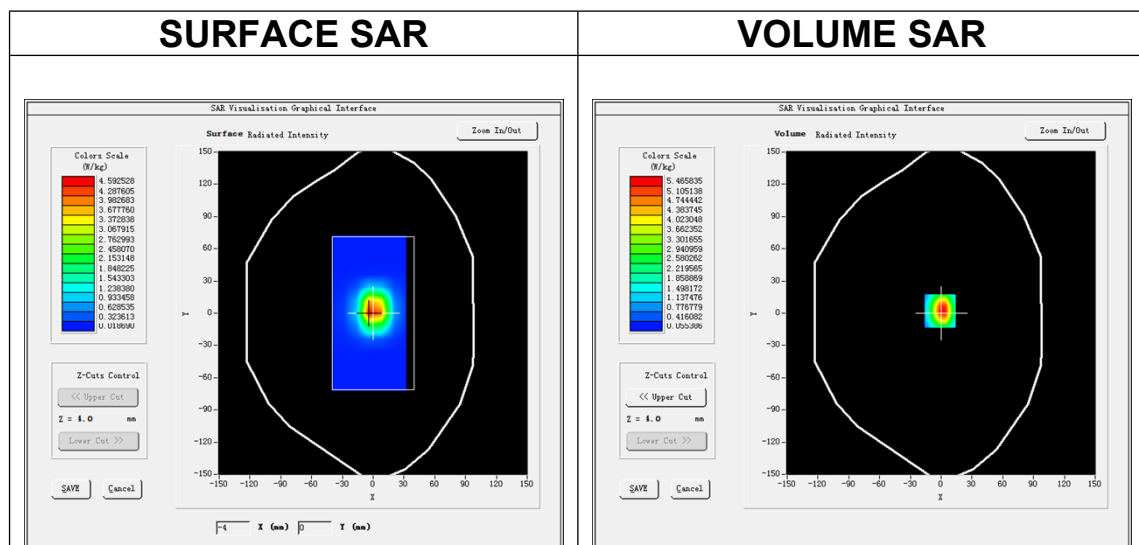

Maximum location: X=-1.00, Y=2.00

SAR Peak: 9.07 W/kg

SAR 10g (W/Kg)	2.523157
SAR 1g (W/Kg)	5.432595

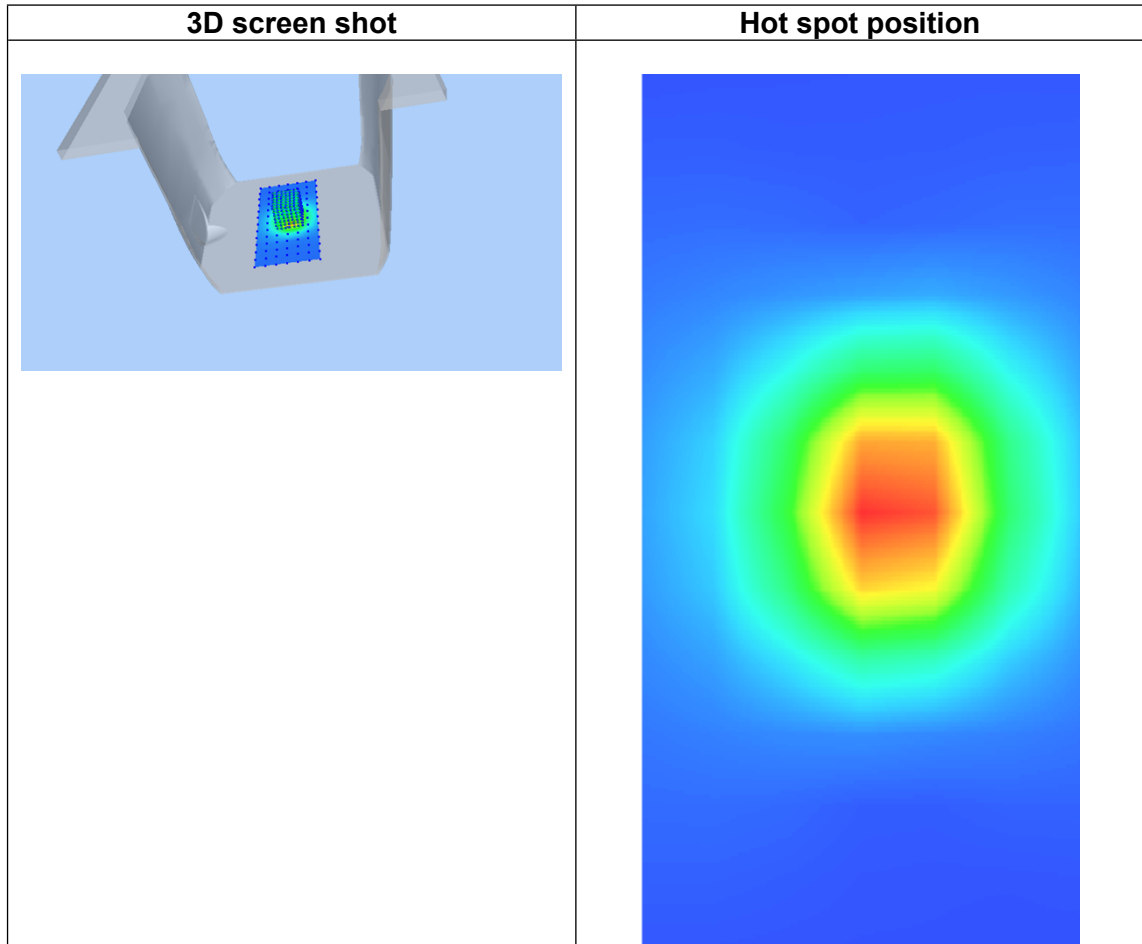

Appendix C. SAR Test Plots

Table of contents
MEASUREMENT 1 WLAN 2.4G Body
MEASUREMENT 2 LTE Band 2 Body
MEASUREMENT 3 LTE Band 4 Body
MEASUREMENT 4 LTE Band 5 Body
MEASUREMENT 5 LTE Band 7 Body
MEASUREMENT 6 LTE Band 12 Body
MEASUREMENT 7 LTE Band 17 Body
MEASUREMENT 8 LTE Band 25 Body
MEASUREMENT 9 LTE Band 41 Body
MEASUREMENT 10 LTE Band 26 Body

MEASUREMENT 1


Date of measurement: 24/9/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>High</u>
<u>Signal</u>	<u>IEEE802.b (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.38</u>

B. SAR Measurement Results



Frequency (MHz)	2462.000000
Relative permittivity (real part)	39.226002
Relative permittivity (imaginary part)	13.207000
Conductivity (S/m)	1.806424
Variation (%)	-2.300000

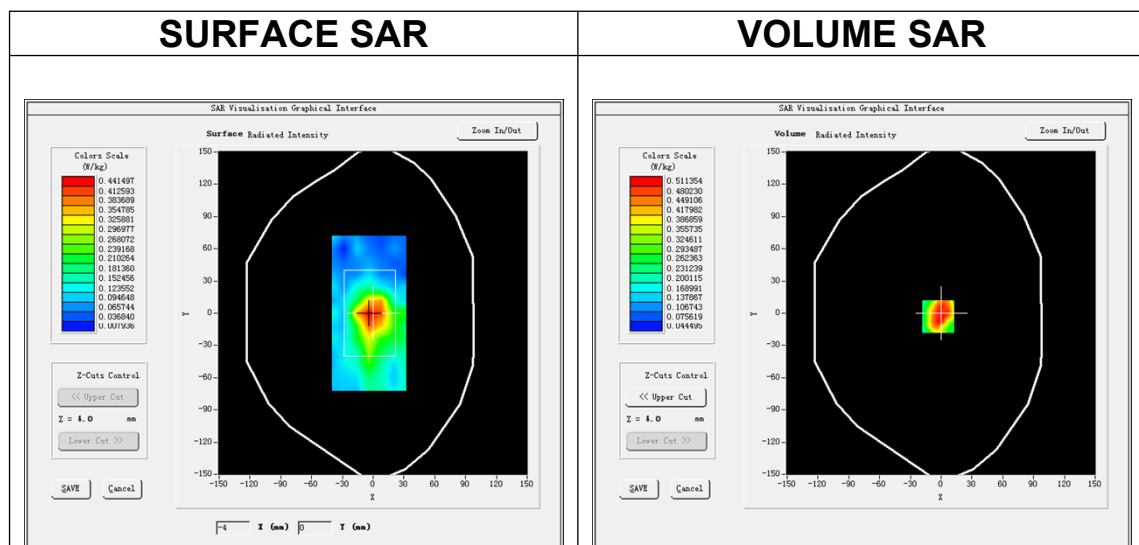

Maximum location: X=-3.00, Y=-3.00

SAR Peak: 0.88 W/kg

SAR 10g (W/Kg)	0.289525
SAR 1g (W/Kg)	0.491628

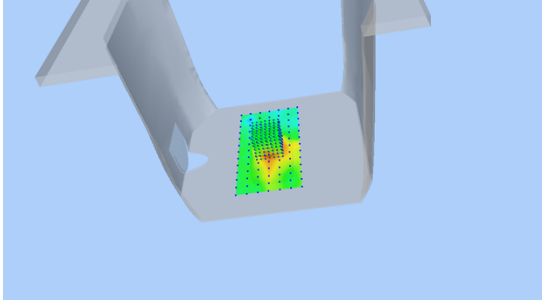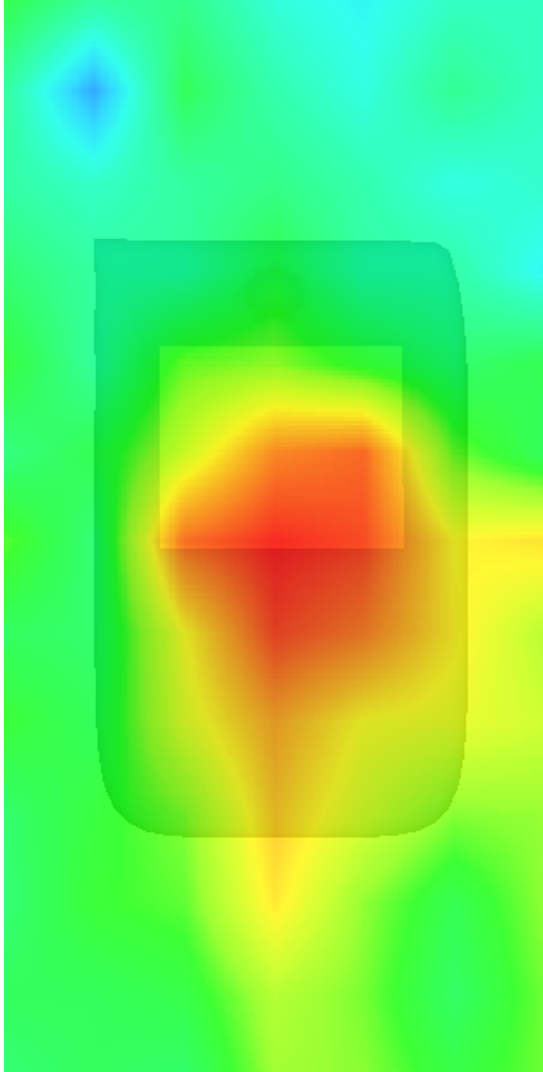3D screen shot	Hot spot position
 A 3D perspective view of a grey, L-shaped structure against a light blue background. A small, rectangular, multi-colored heatmap is overlaid on the inner corner of the structure, indicating a hot spot.	 A 2D heatmap visualization showing the spatial distribution of a hot spot. The background is a gradient of green and cyan. A large, rounded rectangular area in the center is colored in shades of yellow and orange, with a distinct red rectangular region at its core, representing the highest intensity of the hot spot.

MEASUREMENT 2


Date of measurement: 21/9/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.05</u>

B. SAR Measurement Results


Frequency (MHz)	1879.500000
Relative permittivity (real part)	40.000000
Relative permittivity (imaginary part)	13.411700
Conductivity (S/m)	1.400405
Variation (%)	-2.559999

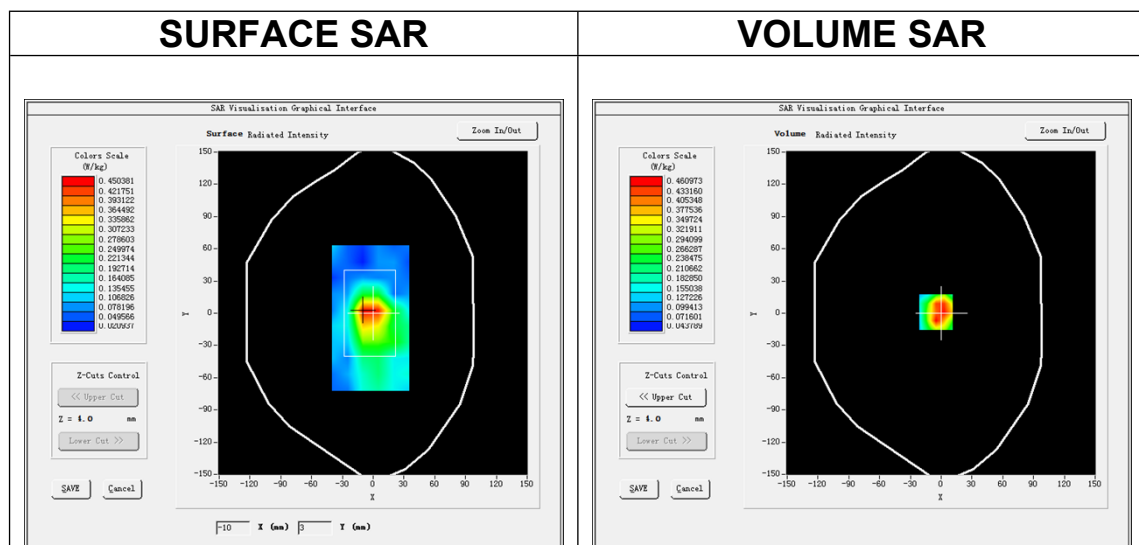

Maximum location: X=-5.00, Y=1.00

SAR Peak: 0.85 W/kg

SAR 10g (W/Kg)	0.269630
SAR 1g (W/Kg)	0.473079

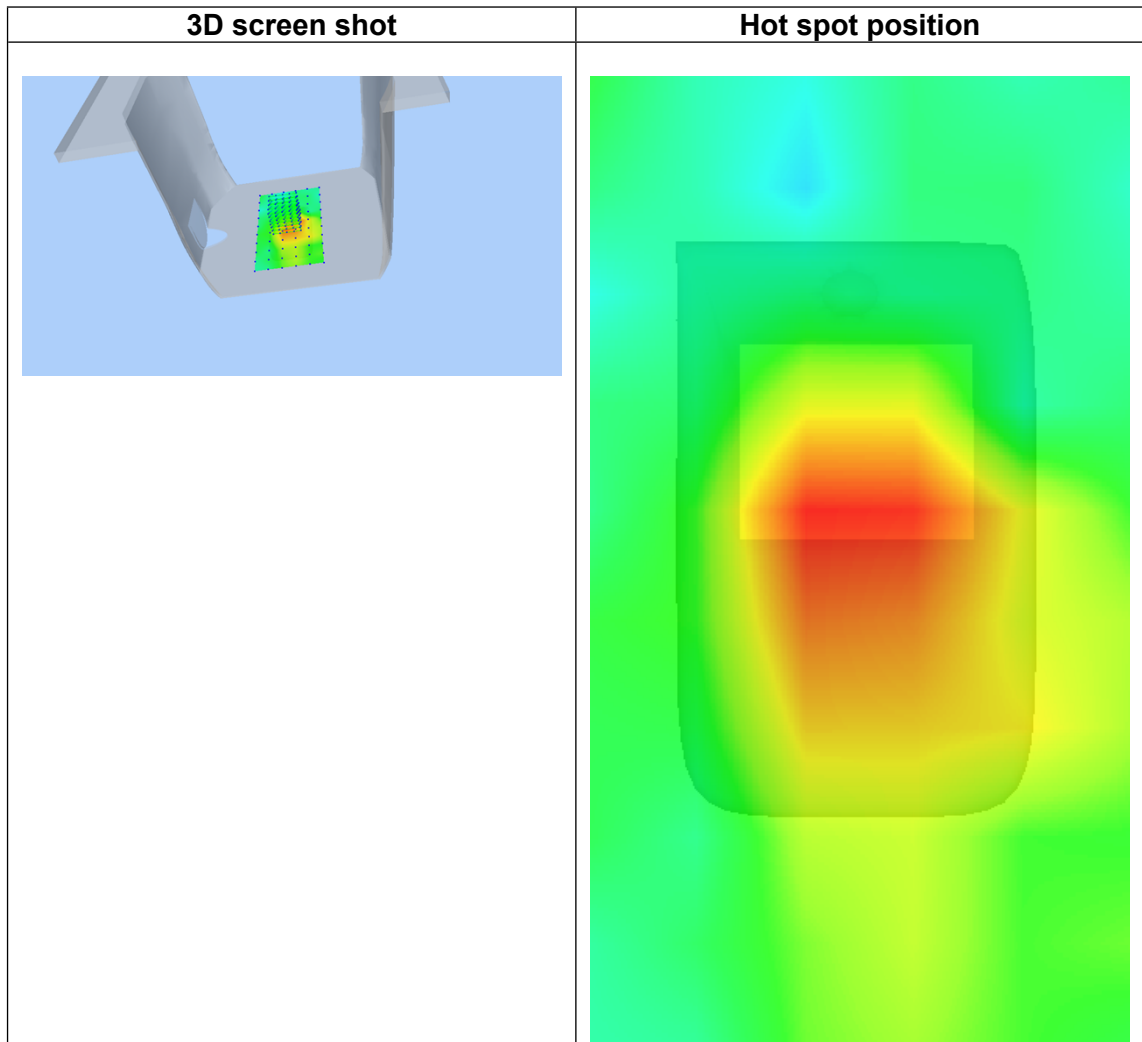

MEASUREMENT 3


Date of measurement: 20/9/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.05</u>

B. SAR Measurement Results


Frequency (MHz)	1732.500000
Relative permittivity (real part)	40.115910
Relative permittivity (imaginary part)	14.136136
Conductivity (S/m)	1.360603
Variation (%)	-3.880000

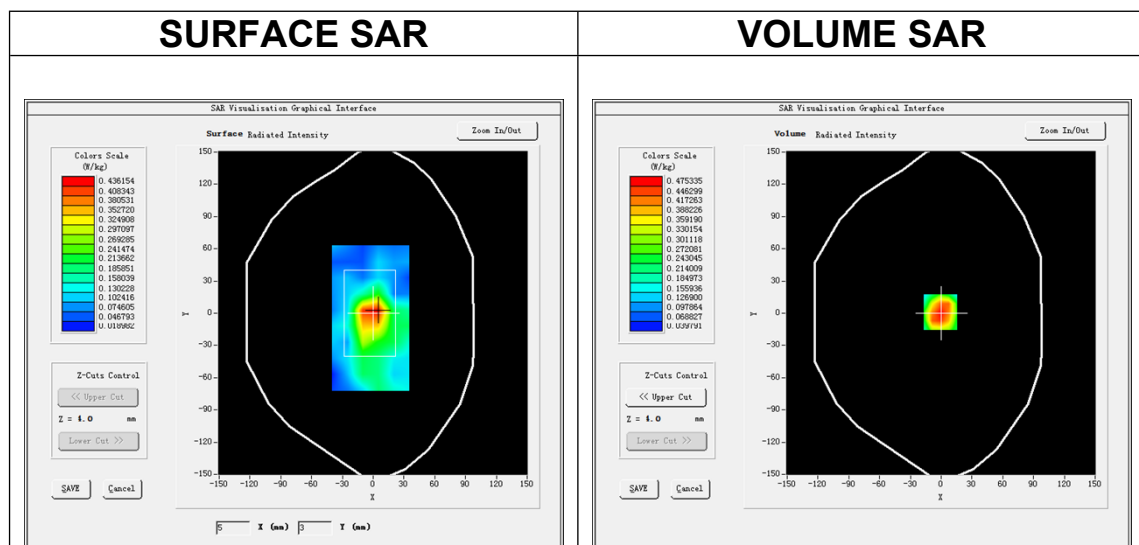

Maximum location: X=-1.00, Y=1.00

SAR Peak: 0.79 W/kg

SAR 10g (W/Kg)	0.262352
SAR 1g (W/Kg)	0.457568

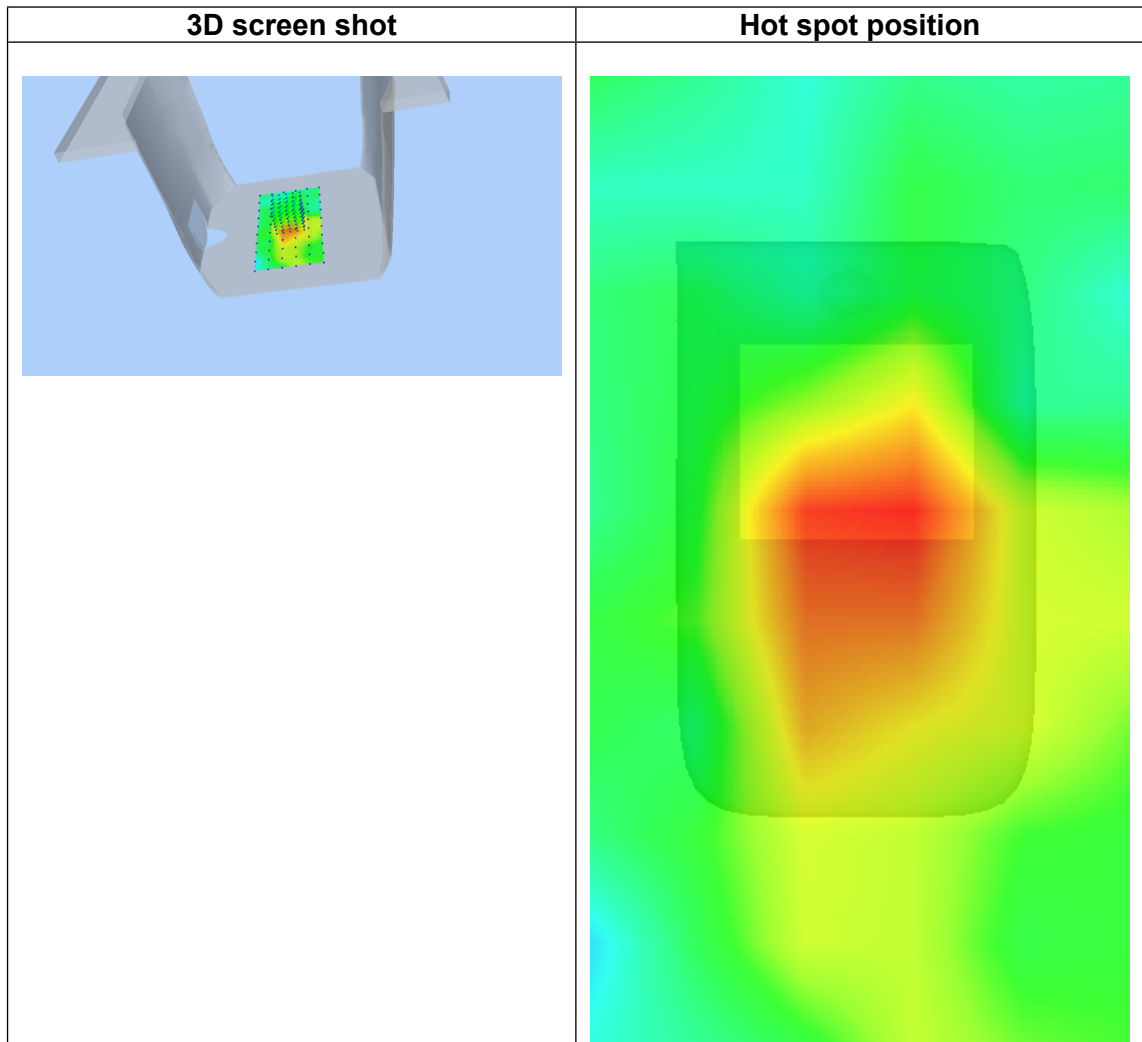

MEASUREMENT 4


Date of measurement: 17/9/2024

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 5</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.0)</u>
ConvF	<u>1.66</u>

B. SAR Measurement Results



Frequency (MHz)	836.500000
Relative permittivity (real part)	41.500000
Relative permittivity (imaginary part)	19.400000
Conductivity (S/m)	0.901561
Variation (%)	-2.590000

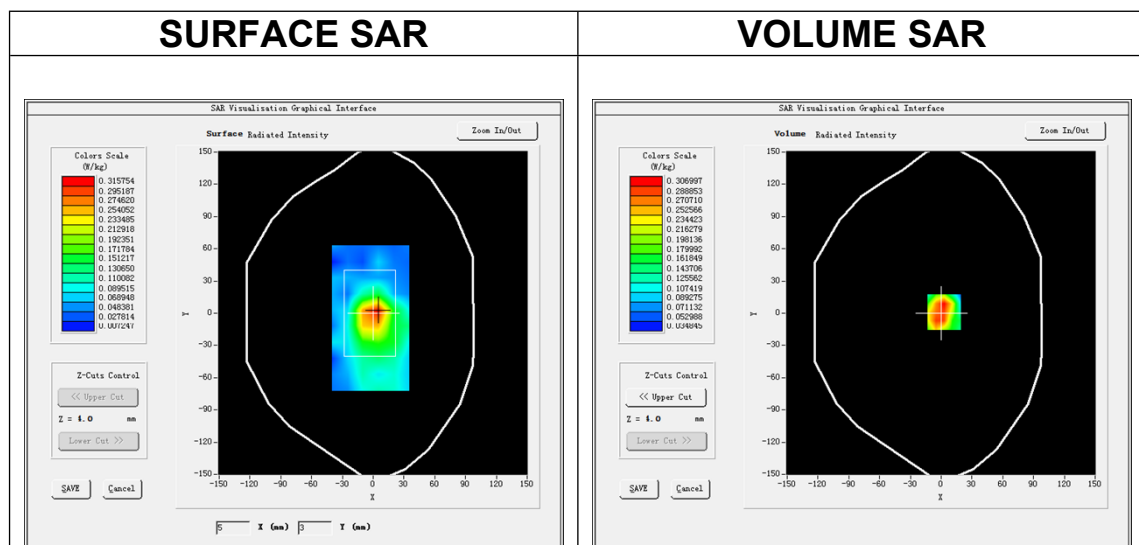

Maximum location: X=3.00, Y=1.00

SAR Peak: 0.54 W/kg

SAR 10g (W/Kg)	0.173269
SAR 1g (W/Kg)	0.301657

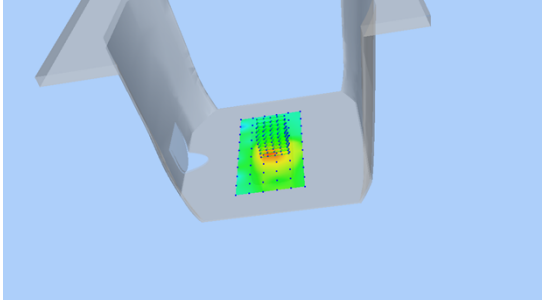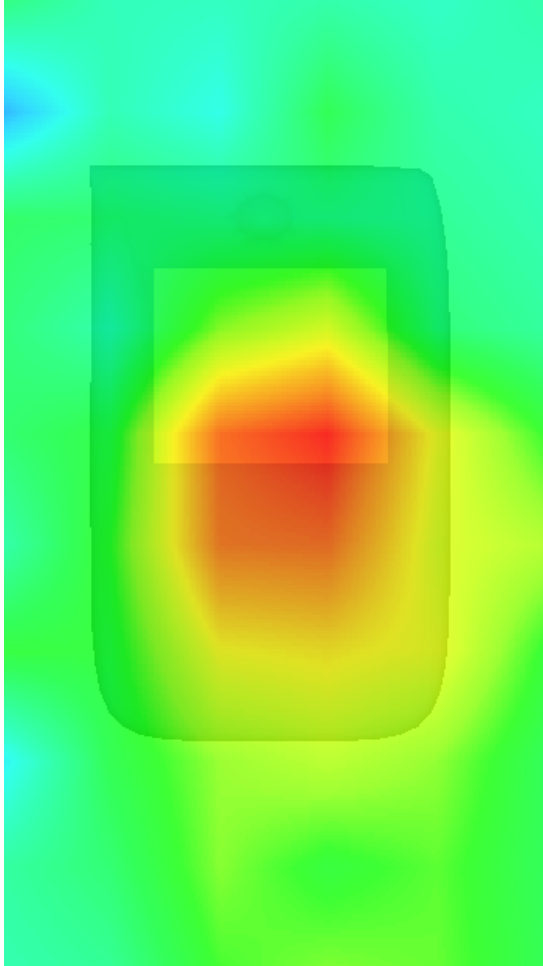3D screen shot	Hot spot position
 A 3D perspective view of a grey, L-shaped structure against a light blue background. A small, rectangular area on the horizontal base of the structure is highlighted with a green-to-yellow color gradient, indicating a hot spot.	 A 2D heatmap visualization showing the spatial distribution of the hot spot. The background is a uniform light green. A large, rounded rectangular area in the center is colored with a gradient from yellow to red, indicating the highest intensity of the hot spot. The red area is concentrated in the center of the rounded rectangle.

MEASUREMENT 5

Date of measurement: 29/9/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.35</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	39.086666
Relative permittivity (imaginary part)	13.418333
Conductivity (S/m)	1.889749
Variation (%)	-2.970000

SURFACE SAR

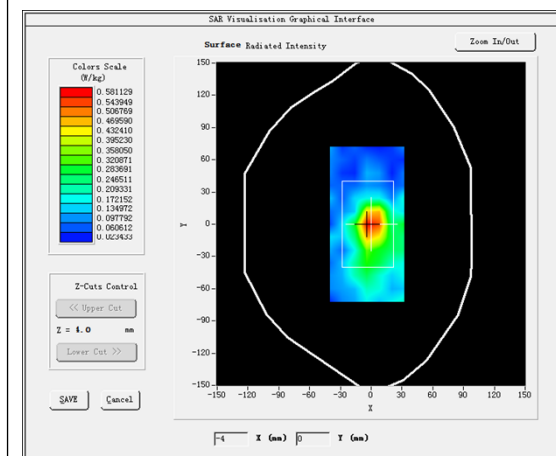



VOLUME SAR

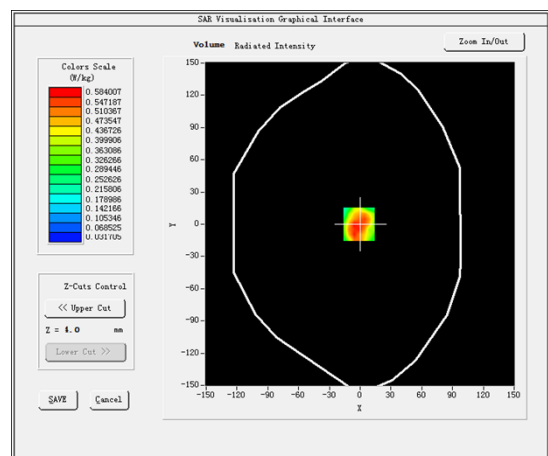

Maximum location: X=-1.00, Y=0.00

SAR Peak: 1.03 W/kg

SAR 10g (W/Kg)	0.323518
SAR 1g (W/Kg)	0.548077

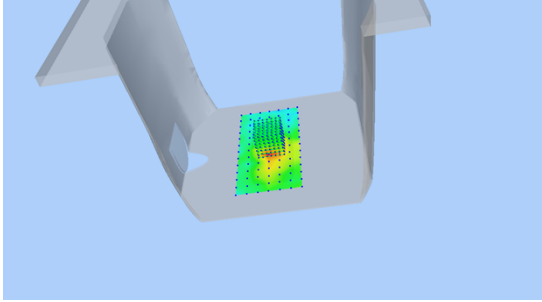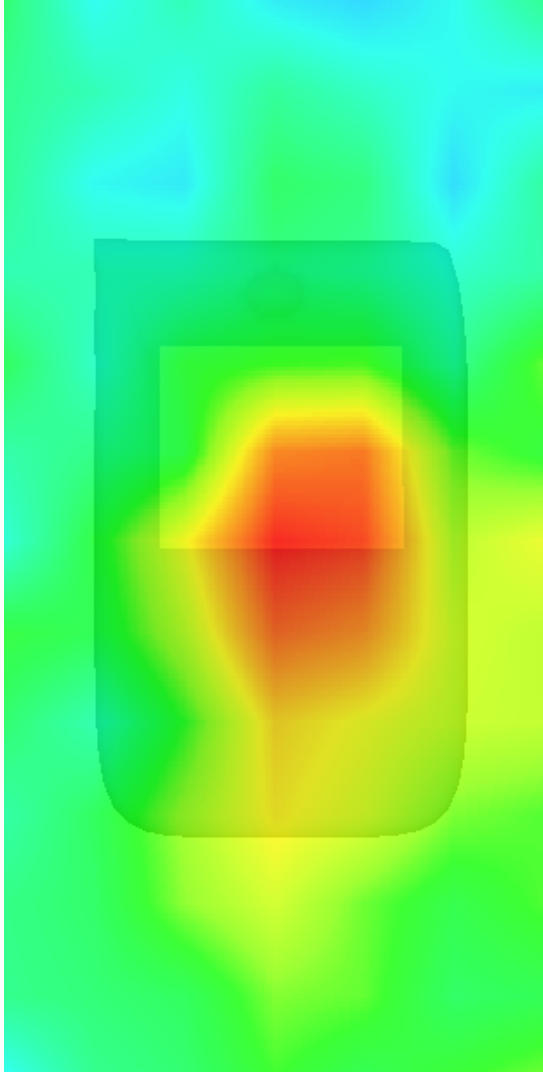3D screen shot	Hot spot position
	

MEASUREMENT 6


Date of measurement: 13/9/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.65</u>

B. SAR Measurement Results



Frequency (MHz)	707.500000
Relative permittivity (real part)	42.126667
Relative permittivity (imaginary part)	23.264000
Conductivity (S/m)	0.914404
Variation (%)	-0.660000

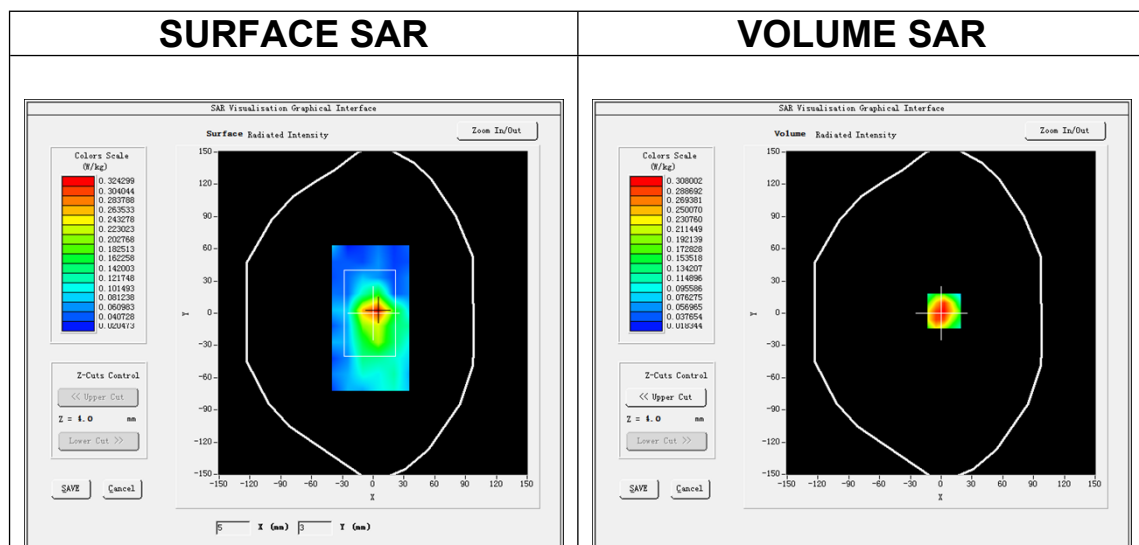

Maximum location: X=3.00, Y=2.00

SAR Peak: 0.49 W/kg

SAR 10g (W/Kg)	0.181786
SAR 1g (W/Kg)	0.300563

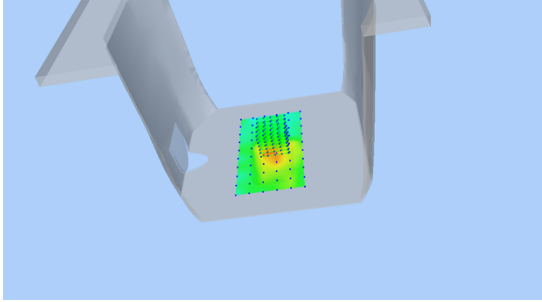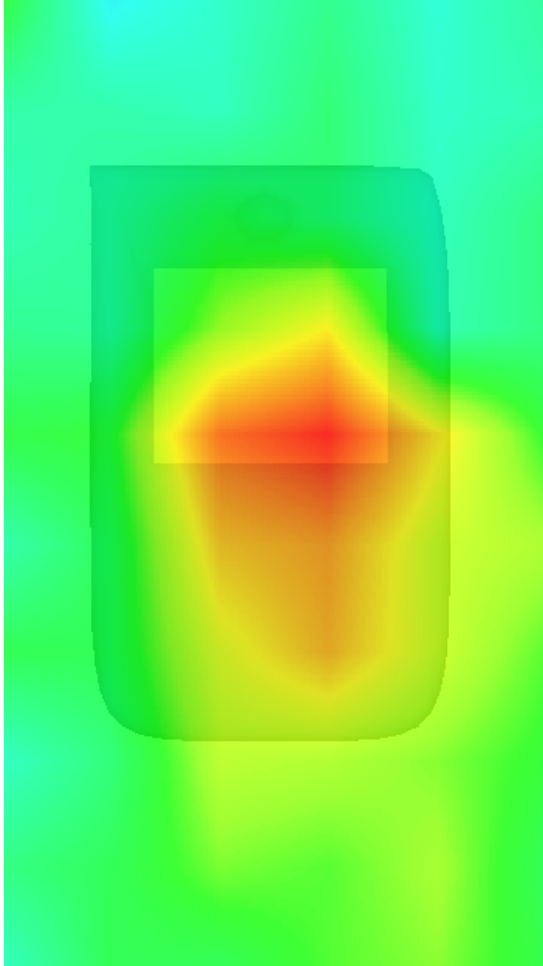3D screen shot	Hot spot position
	

MEASUREMENT 7


Date of measurement: 13/9/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.65</u>

B. SAR Measurement Results


Frequency (MHz)	710.000000
Relative permittivity (real part)	42.113335
Relative permittivity (imaginary part)	23.152000
Conductivity (S/m)	0.913218
Variation (%)	4.750000

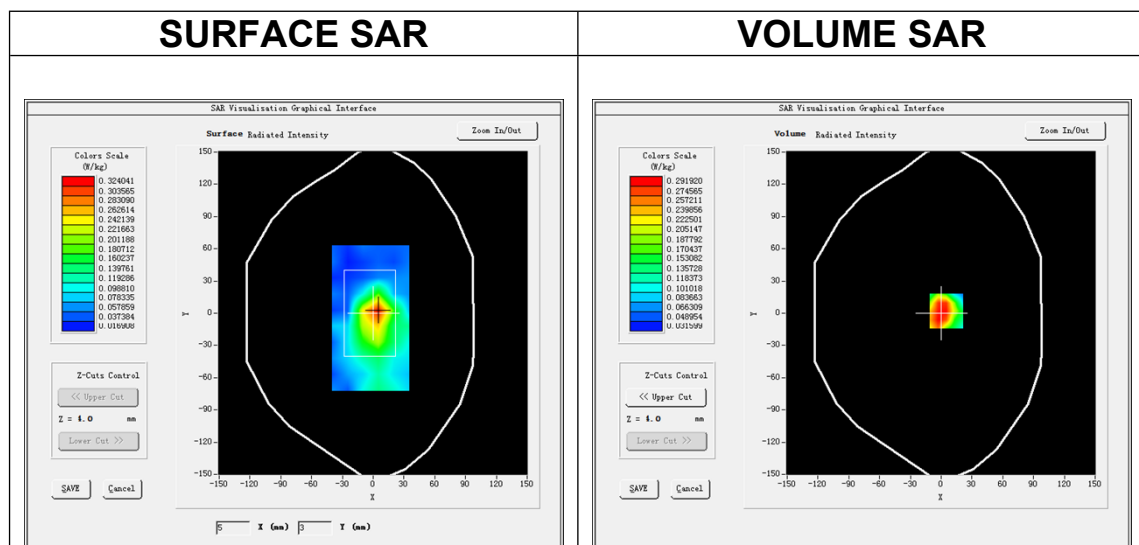

Maximum location: X=5.00, Y=2.00

SAR Peak: 0.53 W/kg

SAR 10g (W/Kg)	0.177598
SAR 1g (W/Kg)	0.310133

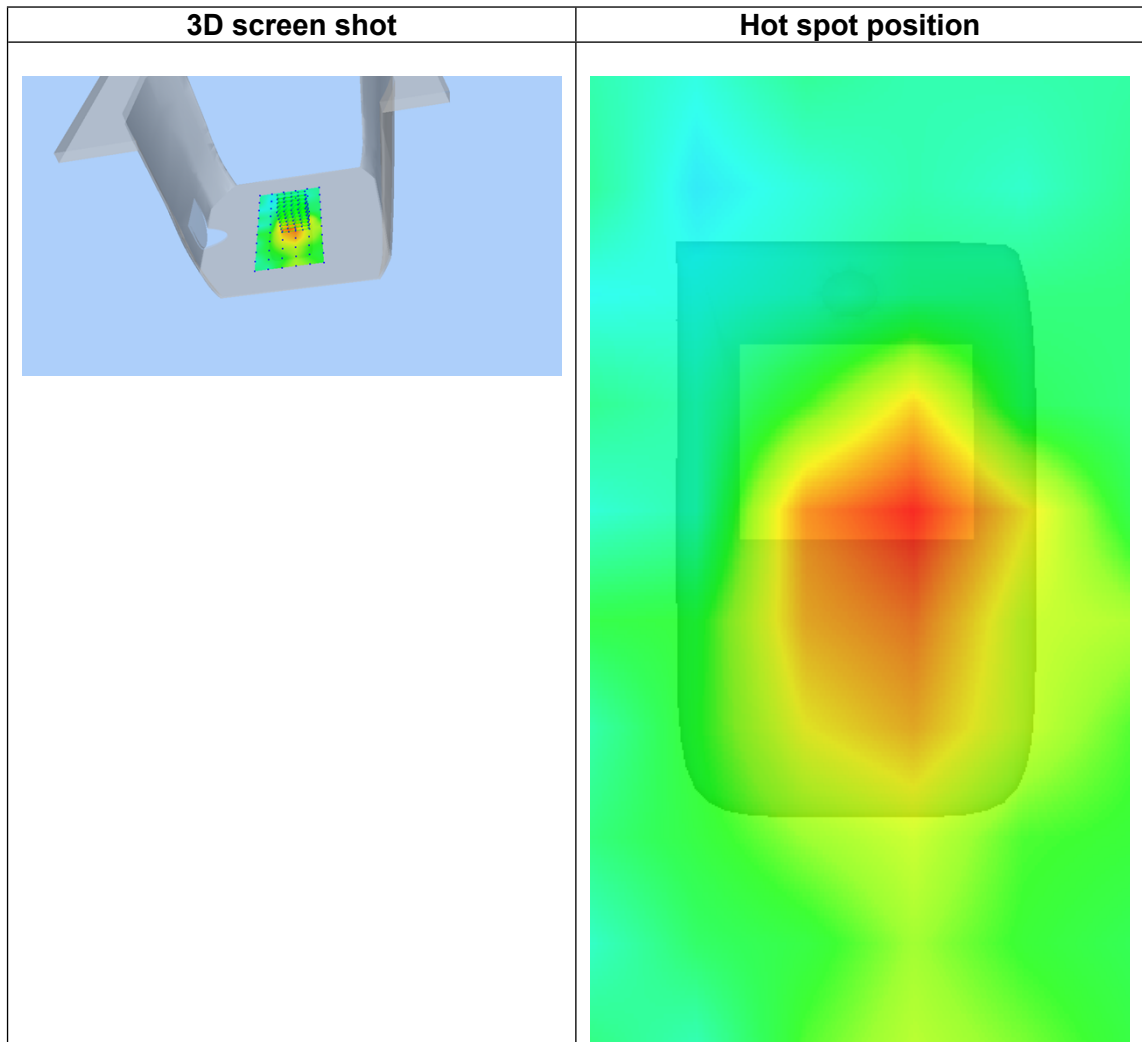

MEASUREMENT 8


Date of measurement: 21/9/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 25</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.05</u>

B. SAR Measurement Results


Frequency (MHz)	1882.500000
Relative permittivity (real part)	40.000000
Relative permittivity (imaginary part)	13.393200
Conductivity (S/m)	1.400333
Variation (%)	3.950000

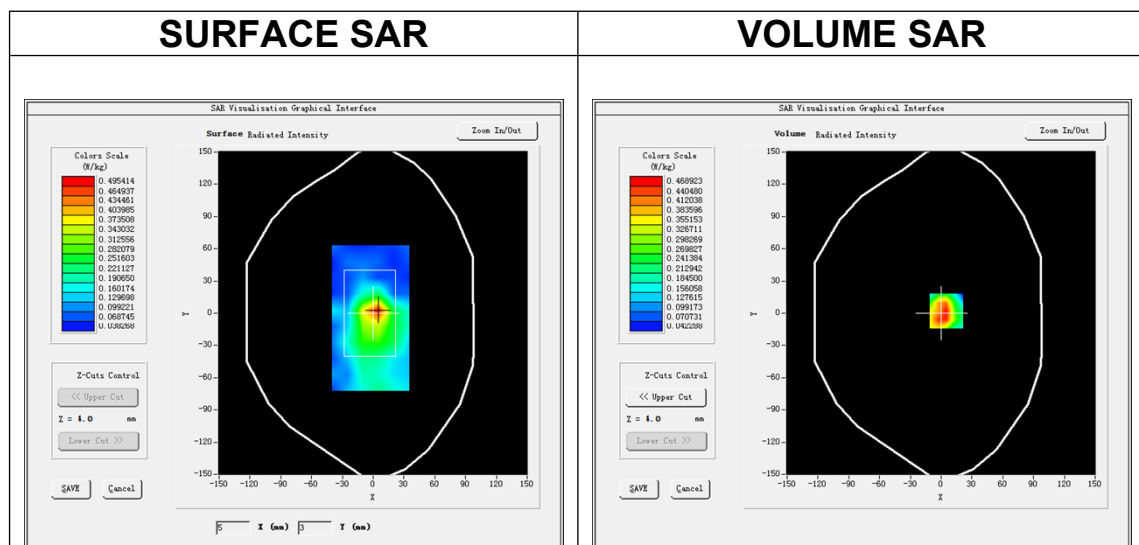

Maximum location: X=5.00, Y=2.00

SAR Peak: 0.81 W/kg

SAR 10g (W/Kg)	0.258907
SAR 1g (W/Kg)	0.452136

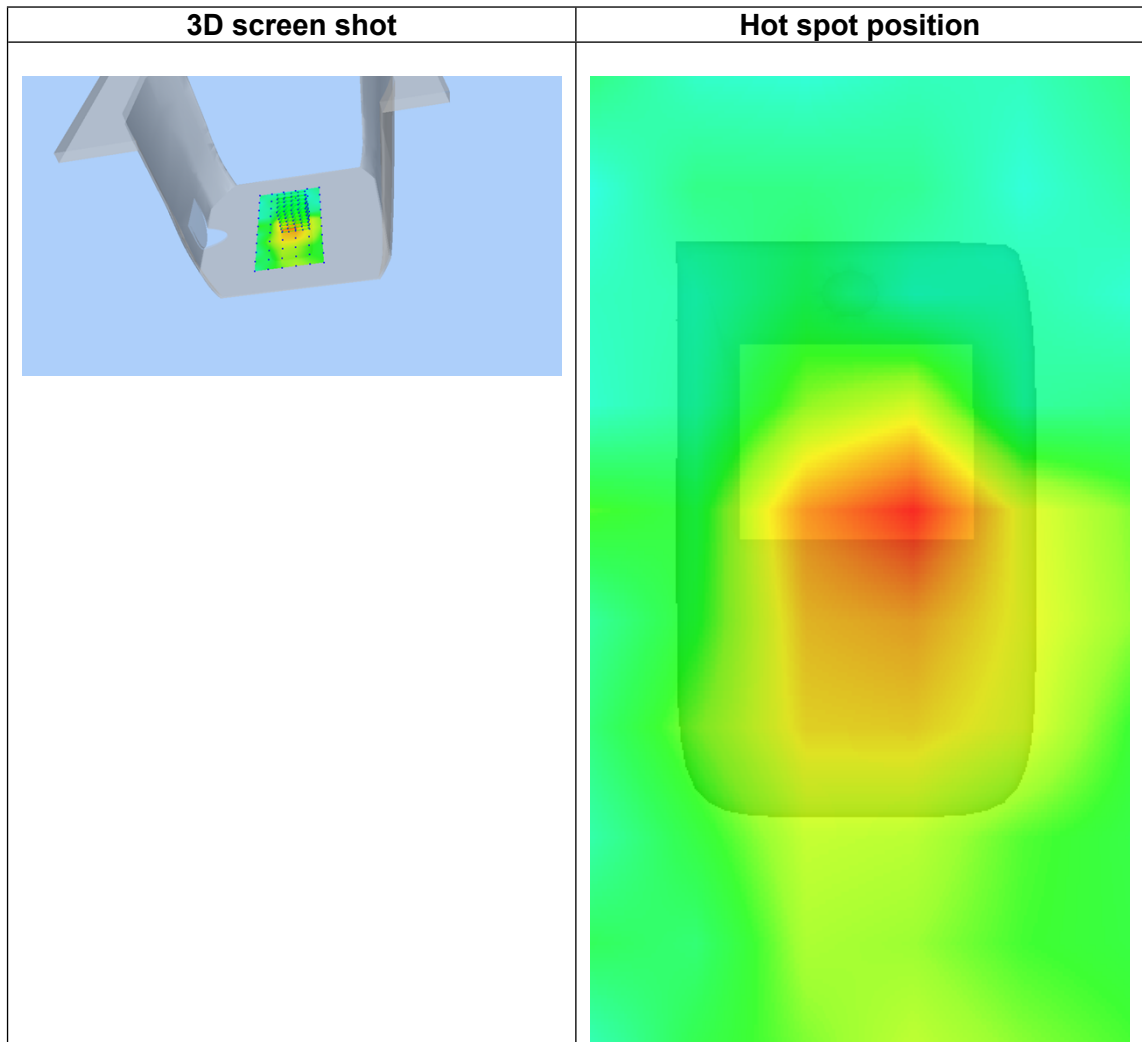

MEASUREMENT 9


Date of measurement: 29/9/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 41</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.35</u>

B. SAR Measurement Results

Frequency (MHz)	2605.000000
Relative permittivity (real part)	39.009335
Relative permittivity (imaginary part)	13.553667
Conductivity (S/m)	1.952481
Variation (%)	-4.380000

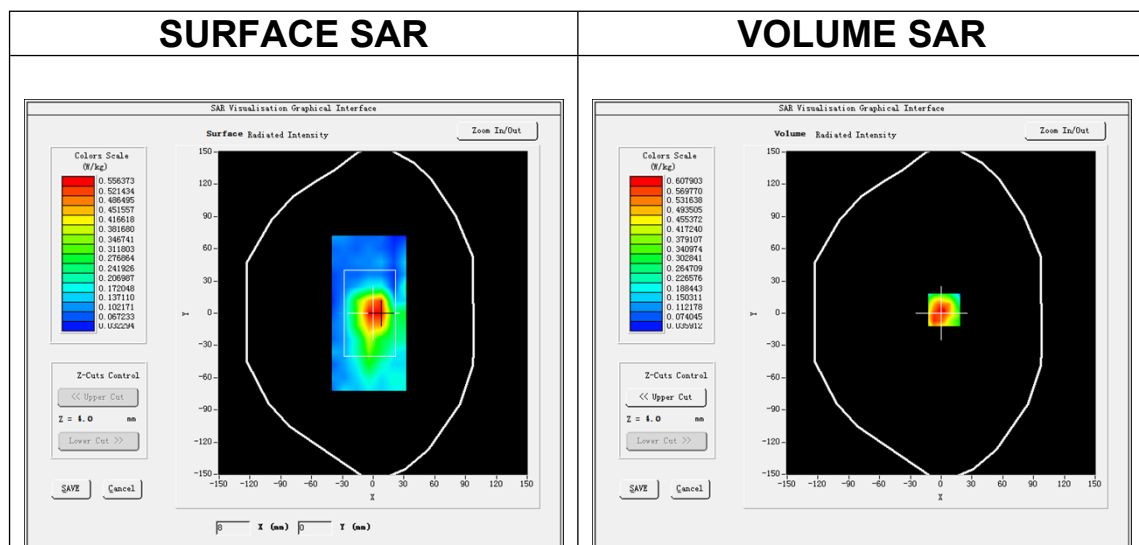

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.16 W/kg

SAR 10g (W/Kg)	0.331971
SAR 1g (W/Kg)	0.589516

3D screen shot	Hot spot position
