

FCC Test Report

(PART 24)

Report No.: RF200715C05-1

FCC ID: L6AITF100-1

Test Model: ITF100-1

Received Date: Jul. 15, 2020

Test Date: Aug. 11 ~ Nov. 02, 2020

Issued Date: Nov. 03, 2020

Applicant: BlackBerry Limited

Address: 2200 University Avenue East, Waterloo, Ontario, Canada N2K 0A7

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty.....	6
2.2 Test Site and Instruments	7
3 General Information	9
3.1 General Description of EUT	9
3.2 Configuration of System under Test.....	11
3.2.1 Description of Support Units	11
3.3 Test Mode Applicability and Tested Channel Detail	11
3.4 EUT Operating Conditions	14
3.5 General Description of Applied Standards and references.....	14
4 Test Types and Results	15
4.1 Output Power Measurement.....	15
4.1.1 Limits of Output Power Measurement	15
4.1.2 Test Procedures.....	15
4.1.3 Test Setup.....	16
4.1.4 Test Results	17
4.2 Modulation Characteristics Measurement	24
4.2.1 Limits of Modulation Characteristics	24
4.2.2 Test Setup.....	24
4.2.3 Test Procedure	24
4.2.4 Test Results	25
4.3 Frequency Stability Measurement	26
4.3.1 Limits of Frequency Stability Measurement	26
4.3.2 Test Procedure	26
4.3.3 Test Setup.....	26
4.3.4 Test Results	27
4.4 Occupied Bandwidth Measurement.....	36
4.4.1 Test Procedure	36
4.4.2 Test Setup.....	36
4.4.3 Test Result.....	37
4.5 Band Edge Measurement	42
4.5.1 Limits of Band Edge Measurement	42
4.5.2 Test Setup.....	42
4.5.3 Test Procedures.....	42
4.5.4 Test Results	43
4.6 Peak to Average Ratio	50
4.6.1 Limits of Peak to Average Ratio Measurement	50
4.6.2 Test Setup.....	50
4.6.3 Test Procedures.....	50
4.6.4 Test Results	51
4.7 Conducted Spurious Emissions	55
4.7.1 Limits of Conducted Spurious Emissions Measurement	55
4.7.2 Test Setup.....	55
4.7.3 Test Procedure	55
4.7.4 Test Results	56
4.8 Radiated Emission Measurement.....	77
4.8.1 Limits of Radiated Emission Measurement	77
4.8.2 Test Procedure	77
4.8.3 Deviation from Test Standard	77
4.8.4 Test Setup.....	78
4.8.5 Test Results	79

5 Pictures of Test Arrangements.....	95
Appendix – Information of the Testing Laboratories	96

Release Control Record

Issue No.	Description	Date Issued
RF200715C05-1	Original Release	Nov. 03, 2020

1 Certificate of Conformity

Product: Radar H2

Brand: BlackBerry

Test Model: ITF100-1

Sample Status: Identical Prototype

Applicant: BlackBerry Limited

Test Date: Aug. 11 ~ Nov. 02, 2020

Standards: FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :

Lena Wang

Date: Nov. 03, 2020

Lena Wang / Specialist

Approved by :

Dylan Chiou

Date: Nov. 03, 2020

Dylan Chiou / Senior Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
24.232(d)	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
24.238	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -34.50 dB at 3760.00 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 16, 2020	Apr. 15, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jun. 12, 2020	Jun. 11, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Nov. 07, 2019	Nov. 06, 2020
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Nov. 08, 2019	Nov. 07, 2020
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 24, 2019	Nov. 23, 2020
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 24, 2019	Nov. 23, 2020
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 24, 2019	Nov. 23, 2020
Loop Antenna EMCI	EM-6879	269	Sep. 16, 2019 Sep. 17, 2020	Sep. 15, 2020 Sep. 16, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Jun. 08, 2020	Jun. 07, 2021
Preamplifier Agilent (Above 1GHz)	8449B	3008A02367	Feb. 18, 2020	Feb. 17, 2021
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM- SM8000	CABLE-CH9-02 (248780+171006)	Jan. 18, 2020	Jan. 17, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9- (250795/4)	Jan. 18, 2020	Jan. 17, 2021
RF signal cable Woken	8D-FB	Cable-CH9-01	Jun. 08, 2020	Jun. 07, 2021
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Standard Temperature And Humidity Chamber TERCHY	MHU-225AU	920842	May 27, 2020	May 26, 2021
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
True RMS Clamp Meter Fluke	325	31130711WS	Jun. 06, 2020	Jun. 05, 2021
Communications Tester- Wireless Agilent	8960 Series 10	MY53201073	Jul. 01, 2019	Jun. 30, 2021

Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 19, 2019	Aug. 18, 2021
Radio Communication Analyzer Anritsu	MT8821C	6201462755	Feb. 13, 2020	Feb. 12, 2021
Radio Communication Tester ROHDE & SCHWARZ	CMU200	101095	Nov. 11, 2019	Nov. 10, 2020
DC power supply Keysight	U8002A	MY56330015	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.

3 General Information

3.1 General Description of EUT

Product	Radar H2		
Brand	BlackBerry		
Test Model	ITF100-1		
Status of EUT	Identical Prototype		
Power Supply Rating	7.2 Vdc (battery)		
Modulation Type	GPRS	GMSK	
	EDGE	GMSK, 8PSK	
	WCDMA	QPSK	
	LTE	QPSK, 16QAM	
Frequency Range	GPRS/EDGE	1850.2 ~ 1909.8 MHz	
	WCDMA	1852.4 ~ 1907.6 MHz	
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz	
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz	
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz	
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz	
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz	
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz	
Max. EIRP Power	GPRS	1047.129 mW (30.20 dBm)	
	EDGE	812.831 mW (29.10 dBm)	
	WCDMA	134.896 mW (21.30 dBm)	
		QPSK	16QAM
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	144.544 mW (21.60 dBm)	112.202 mW (20.50 dBm)
	LTE Band 2 (Channel Bandwidth: 3 MHz)	141.254 mW (21.50 dBm)	114.815 mW (20.60 dBm)
	LTE Band 2 (Channel Bandwidth: 5 MHz)	144.544 mW (21.60 dBm)	112.202 mW (20.50 dBm)
	LTE Band 2 (Channel Bandwidth: 10 MHz)	138.038 mW (21.40 dBm)	109.648 mW (20.40 dBm)
	LTE Band 2 (Channel Bandwidth: 15 MHz)	128.825 mW (21.10 dBm)	109.648 mW (20.40 dBm)
	LTE Band 2 (Channel Bandwidth: 20 MHz)	147.911 mW (21.70 dBm)	109.648 mW (20.40 dBm)
	GPRS	258KGXW	
	EDGE	257KG7W	
Emission Designator	WCDMA	4M08F9W	
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1M09D7W	
	LTE Band 2 (Channel Bandwidth: 3 MHz)	2M70G7D	
	LTE Band 2 (Channel Bandwidth: 5 MHz)	4M49D7W	
	LTE Band 2 (Channel Bandwidth: 10 MHz)	8M99D7W	
	LTE Band 2 (Channel Bandwidth: 15 MHz)	13M5G7D	
	LTE Band 2 (Channel Bandwidth: 20 MHz)	18M0D7W	

Antenna Type	Refer to Note as below
Accessory Device	Refer to Note as below
Data Cable Supplied	N/A

Note:

1. The EUT contains following accessory devices.

Product	Brand	Model	Description
Battery	BlackBerry	BAT-63320-001	7.2 Vdc, 38 A


2. The antenna information is listed as below.

Antenna Type	Monopole with gnd resonator
Band	PCS1900 / WCDMA / LTE
	2
Gain (dBi)	2.01

3. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
5. SRD & WWAN technology cannot transmit same time.

3.2 Configuration of System under Test

<Radiated Emission Test> & <E.I.R.P. Test>

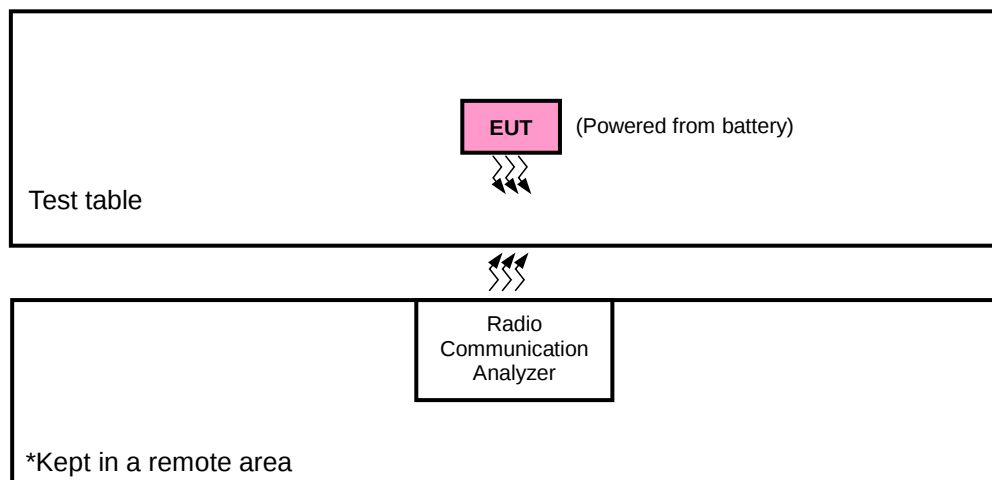

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
PCS1900	Y-plane	Y-plane
WCDMA	Y-plane	Y-plane
LTE Band 2	Y-plane	Y-plane

PCS1900

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	512 to 810	512, 661, 810	GPRS, EDGE
-	Modulation Characteristics	512 to 810	661	GPRS, EDGE
-	Frequency Stability	512 to 810	512, 810	GPRS, EDGE
-	Occupied Bandwidth	512 to 810	512, 661, 810	GPRS, EDGE
-	Band Edge	512 to 810	512, 810	GPRS, EDGE
-	Peak to Average Ratio	512 to 810	512, 661, 810	GPRS, EDGE
-	Conducted Emission	512 to 810	512, 661, 810	GPRS, EDGE
-	Radiated Emission	512 to 810	512, 661, 810	GPRS

Note:

1. According ERP power test, pre-tested GPRS, EDGE modulation type and found GPRS was the worst. For radiated emission test, pre-tested GPRS, EDGE modulation type and found GPRS was the worst, therefore chosen for the final test.
2. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
-	Modulation Characteristics	9262 to 9538	9400	WCDMA
-	Frequency Stability	9262 to 9538	9262, 9538	WCDMA
-	Occupied Bandwidth	9262 to 9538	9262, 9400, 9538	WCDMA
-	Band Edge	9262 to 9538	9262, 9538	WCDMA
-	Peak to Average Ratio	9262 to 9538	9262, 9400, 9538	WCDMA
-	Conducted Emission	9262 to 9538	9262, 9400, 9538	WCDMA
-	Radiated Emission	9262 to 9538	9262, 9400, 9538	WCDMA

Note: For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	18700 to 19100	18900	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Frequency Stability	18607 to 19193	18607, 19193	1.4 MHz	QPSK	6 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3 MHz	QPSK	15 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5 MHz	QPSK	25 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10 MHz	QPSK	50 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15 MHz	QPSK	75 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20 MHz	QPSK	100 RB / 0 RB Offset
-	Occupied Bandwidth	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Band Edge	18607 to 19193	18607	1.4 MHz	QPSK	1 RB / 0 RB Offset
			19193	1.4 MHz	QPSK	6 RB / 0 RB Offset
		18615 to 19185	18615	3 MHz	QPSK	1 RB / 5 RB Offset
			19185	3 MHz	QPSK	6 RB / 0 RB Offset
		18625 to 19175	18625	5 MHz	QPSK	1 RB / 0 RB Offset
			19175	5 MHz	QPSK	15 RB / 0 RB Offset
		18650 to 19150	18650	10 MHz	QPSK	1 RB / 14 RB Offset
			19150	10 MHz	QPSK	15 RB / 0 RB Offset
		18675 to 19125	18675	15 MHz	QPSK	1 RB / 0 RB Offset
			19125	15 MHz	QPSK	25 RB / 0 RB Offset
		18700 to 19100	18700	20 MHz	QPSK	1 RB / 24 RB Offset
			19100	20 MHz	QPSK	25 RB / 0 RB Offset
	Conducted Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK	6 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 5 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK	6 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 7 RB Offset
-	Radiated Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only EIRP, modulation characteristics, occupied bandwidth and peak to average ratio items had been tested under QPSK, 16QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	26 deg. C, 58 % RH	7.2 Vdc	Greg Lin
Modulation Characteristics	26 deg. C, 58 % RH	7.2 Vdc	Tank Wu
Frequency Stability	26 deg. C, 58 % RH	7.2 Vdc	James Yang
Occupied Bandwidth	26 deg. C, 58 % RH	7.2 Vdc	Tank Wu
Band Edge	26 deg. C, 58 % RH	7.2 Vdc	Tank Wu
Peak to Average Ratio	26 deg. C, 58 % RH	7.2 Vdc	Tank Wu
Conducted Emission	26 deg. C, 58 % RH	7.2 Vdc	Tank Wu
Radiated Emission	25 deg. C, 65 % RH	7.2 Vdc	Greg Lin

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

ANSI 63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

NOTE: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW is 1 MHz for GPRS & EDGE, and 5 MHz for WCDMA, and 1.4 MHz 、 5 MHz 、 10 MHz 、 15 MHz 、 20 MHz for LTE mode, and VBW $\geq 3 \times$ RBW.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

The EUT was set up for the maximum power with GPRS, EDGE, WCDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

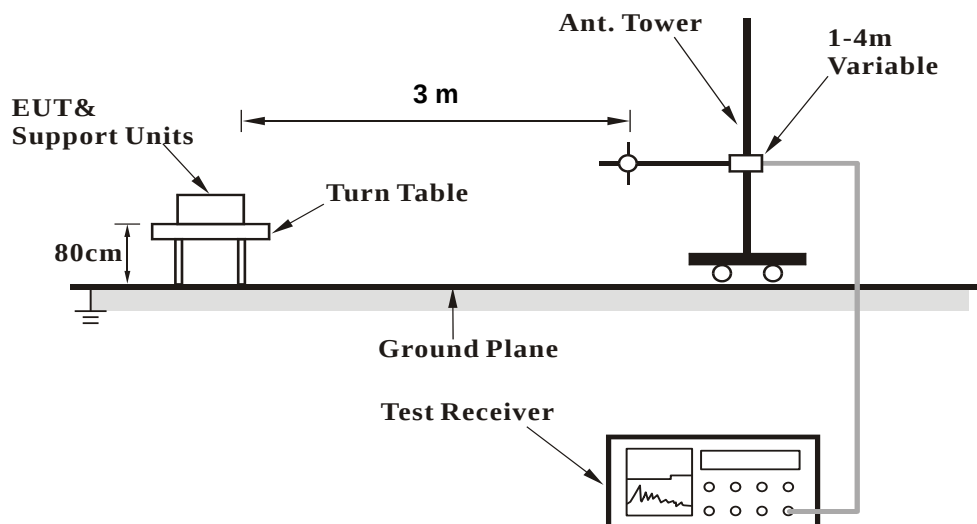


<Radiated Emission above 1 GHz>

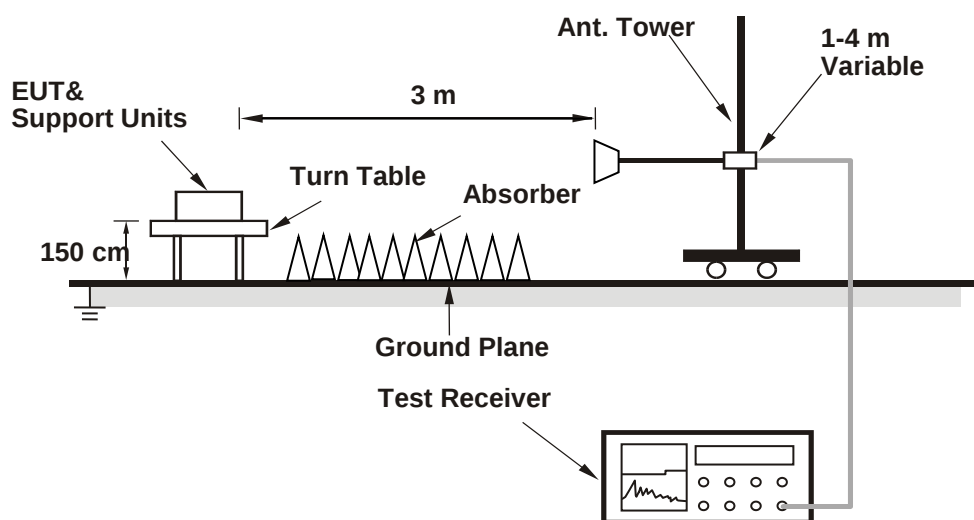

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band	PCS1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8
GPRS (GMSK, 1Tx-slot)	29.12	28.91	28.94
GPRS (GMSK, 2Tx-slot)	29.04	28.92	29.08
GPRS (GMSK, 3Tx-slot)	29.06	28.95	29.07
GPRS (GMSK, 4Tx-slot)	28.94	28.95	28.90
DTM (GMSK, 2Tx-slot)	28.96	28.93	28.96
DTM (GMSK, 3Tx-slot)	28.97	28.97	28.94
EDGE (8PSK, 1Tx-slot)	28.35	28.40	28.24
EDGE (8PSK, 2Tx-slot)	28.20	28.34	28.28
EDGE (8PSK, 3Tx-slot)	28.38	28.28	28.30
EDGE (8PSK, 4Tx-slot)	28.27	28.24	28.37
DTM (8PSK, 2Tx-slot)	28.33	28.23	28.35
DTM (8PSK, 3Tx-slot)	28.36	28.29	28.40

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	21.33	21.25	21.23
HSDPA Subtest-1	20.50	20.38	20.49
HSDPA Subtest-2	20.41	20.30	20.39
HSDPA Subtest-3	20.31	20.45	20.49
HSDPA Subtest-4	20.30	20.46	20.40
HSUPA Subtest-1	19.77	19.69	19.75
HSUPA Subtest-2	19.78	19.80	19.73
HSUPA Subtest-3	19.68	19.74	19.65
HSUPA Subtest-4	19.75	19.62	19.76
HSUPA Subtest-5	19.74	19.77	19.69

LTE Band 2															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100				Channel		18675	18900	19125	
		Frequency (MHz)		1860.0	1880.0	1900.0				Frequency (MHz)		1857.5	1880.0	1902.5	
20M	QPSK	1	0	21.42	21.45	21.46	0	15M	QPSK	1	0	21.44	21.42	21.24	0
		1	50	21.38	21.40	21.20	0			1	37	21.33	21.41	21.39	0
		1	99	21.38	21.28	21.40	0			1	74	21.29	21.25	21.29	0
		50	0	20.33	20.41	20.46	1			36	0	20.44	20.32	20.30	1
		50	25	20.31	20.43	20.25	1			36	19	20.44	20.24	20.23	1
		50	50	20.35	20.23	20.36	1			36	39	20.21	20.43	20.34	1
		100	0	20.22	20.26	20.27	1			75	0	20.27	20.22	20.38	1
	16QAM	1	0	20.57	20.32	20.42	1		16QAM	1	0	20.42	20.30	20.46	1
		1	50	20.55	20.41	20.53	1			1	37	20.44	20.54	20.46	1
		1	99	20.31	20.53	20.40	1			1	74	20.47	20.49	20.40	1
		50	0	19.46	19.56	19.32	2			36	0	19.41	19.47	19.60	2
		50	25	19.57	19.49	19.43	2			36	19	19.39	19.35	19.36	2
		50	50	19.52	19.59	19.60	2			36	39	19.37	19.35	19.59	2
		100	0	19.32	19.54	19.60	2			75	0	19.31	19.33	19.55	2
10M	QPSK	1	0	21.23	21.44	21.29	0	5M	QPSK	1	0	21.29	21.39	21.30	0
		1	24	21.34	21.42	21.50	0			1	12	21.35	21.33	21.25	0
		1	49	21.46	21.21	21.29	0			1	24	21.33	21.33	21.28	0
		25	0	20.20	20.48	20.39	1			12	0	20.20	20.30	20.46	1
		25	12	20.38	20.38	20.39	1			12	6	20.39	20.27	20.45	1
		25	25	20.47	20.28	20.44	1			12	13	20.49	20.49	20.47	1
		50	0	20.49	20.22	20.39	1			25	0	20.36	20.27	20.21	1
	16QAM	1	0	20.48	20.33	20.39	1		16QAM	1	0	20.58	20.41	20.52	1
		1	24	20.58	20.48	20.39	1			1	12	20.46	20.53	20.33	1
		1	49	20.60	20.40	20.59	1			1	24	20.39	20.50	20.39	1
		25	0	19.58	19.59	19.59	2			12	0	19.32	19.59	19.54	2
		25	12	19.54	19.59	19.45	2			12	6	19.60	19.30	19.60	2
		25	25	19.48	19.55	19.50	2			12	13	19.41	19.55	19.30	2
		50	0	19.50	19.40	19.57	2			25	0	19.51	19.39	19.59	2
3M	QPSK	1	0	21.33	21.24	21.25	0	1.4M	QPSK	1	0	21.51	21.30	21.21	0
		1	7	21.22	21.46	21.43	0			1	2	21.47	21.32	21.45	0
		1	14	21.42	21.24	21.22	0			1	5	21.40	21.48	21.28	0
		8	0	20.36	20.32	20.30	1			3	0	20.36	20.31	20.25	0
		8	3	20.47	20.32	20.37	1			3	1	20.49	20.44	20.34	0
		8	7	20.28	20.28	20.42	1			3	3	20.32	20.45	20.50	0
		15	0	20.27	20.38	20.46	1			6	0	20.41	20.21	20.44	1
	16QAM	1	0	20.53	20.43	20.30	1		16QAM	1	0	20.47	20.52	20.43	1
		1	7	20.41	20.37	20.50	1			1	2	20.41	20.36	20.31	1
		1	14	20.36	20.39	20.46	1			1	5	20.51	20.47	20.51	1
		8	0	19.54	19.35	19.60	2			3	0	19.49	19.35	19.41	1
		8	3	19.53	19.49	19.40	2			3	1	19.43	19.33	19.53	1
		8	7	19.30	19.51	19.43	2			3	3	19.39	19.52	19.60	1
		15	0	19.57	19.44	19.56	2			6	0	19.59	19.56	19.58	2

Modulation Type: QPSK

LTE Band 2, Channel Bandwidth 1.4MHz

MODE		TX channel 18607, 18900, 19193					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-23.70	16.50	0.10	16.60	33.00	-16.40
2	1880.00	-23.30	17.20	0.00	17.20	33.00	-15.80
3	1909.30	-24.00	16.70	-0.10	16.60	33.00	-16.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-19.50	20.90	0.10	21.00	33.00	-12.00
2	1880.00	-19.00	21.60	0.00	21.60	33.00	-11.40
3	1909.30	-19.40	21.40	-0.10	21.30	33.00	-11.70

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 3MHz

MODE		TX channel 18615, 18900, 19185					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-23.90	16.30	0.10	16.40	33.00	-16.60
2	1880.00	-24.00	16.50	0.00	16.50	33.00	-16.50
3	1908.50	-23.50	17.20	-0.10	17.10	33.00	-15.90
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-19.00	21.40	0.10	21.50	33.00	-11.50
2	1880.00	-19.70	20.90	0.00	20.90	33.00	-12.10
3	1908.50	-19.80	21.00	-0.10	20.90	33.00	-12.10

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 5MHz

MODE		TX channel 18625, 18900, 19175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-23.60	16.60	0.10	16.70	33.00	-16.30
2	1880.00	-23.10	17.40	0.00	17.40	33.00	-15.60
3	1907.50	-23.60	17.10	-0.10	17.00	33.00	-16.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-19.80	20.60	0.10	20.70	33.00	-12.30
2	1880.00	-19.00	21.60	0.00	21.60	33.00	-11.40
3	1907.50	-19.60	21.20	-0.10	21.10	33.00	-11.90

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Modulation Type: 16QAM

LTE Band 2, Channel Bandwidth 1.4MHz

MODE		TX channel 18607, 18900, 19193					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-24.80	15.40	0.10	15.50	33.00	-17.50
2	1880.00	-24.40	16.10	0.00	16.10	33.00	-16.90
3	1909.30	-24.80	15.90	-0.10	15.80	33.00	-17.20
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1850.70	-20.00	20.40	0.10	20.50	33.00	-12.50
2	1880.00	-20.20	20.40	0.00	20.40	33.00	-12.60
3	1909.30	-20.60	20.20	-0.10	20.10	33.00	-12.90

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 3MHz

MODE		TX channel 18615, 18900, 19185					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-24.90	15.30	0.10	15.40	33.00	-17.60
2	1880.00	-25.00	15.50	0.00	15.50	33.00	-17.50
3	1908.50	-24.50	16.20	-0.10	16.10	33.00	-16.90
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1851.50	-19.90	20.50	0.10	20.60	33.00	-12.40
2	1880.00	-20.60	20.00	0.00	20.00	33.00	-13.00
3	1908.50	-21.00	19.80	-0.10	19.70	33.00	-13.30

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 5MHz

MODE		TX channel 18625, 18900, 19175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-24.70	15.50	0.10	15.60	33.00	-17.40
2	1880.00	-24.30	16.20	0.00	16.20	33.00	-16.80
3	1907.50	-24.70	16.00	-0.10	15.90	33.00	-17.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1852.50	-20.80	19.60	0.10	19.70	33.00	-13.30
2	1880.00	-20.10	20.50	0.00	20.50	33.00	-12.50
3	1907.50	-20.70	20.10	-0.10	20.00	33.00	-13.00

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A




4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

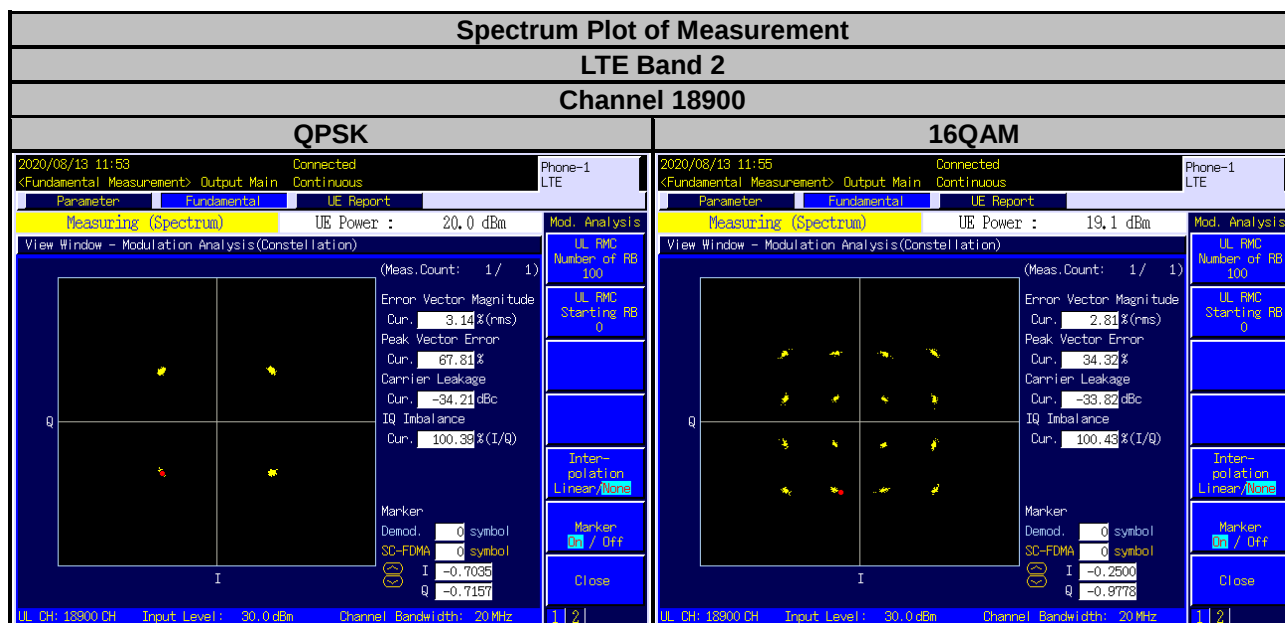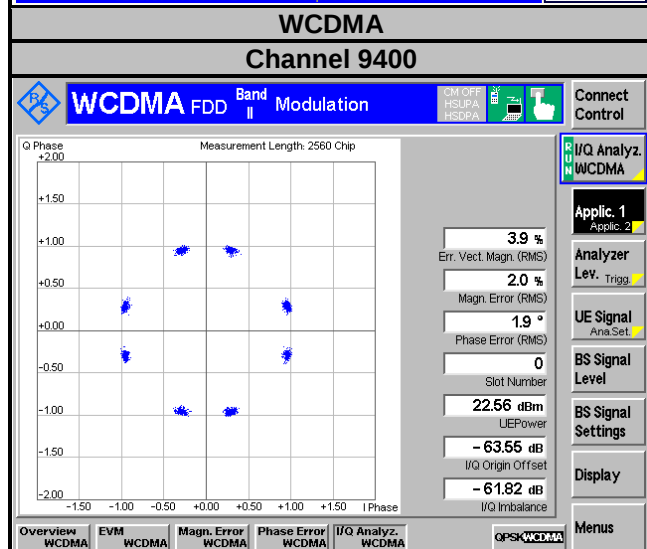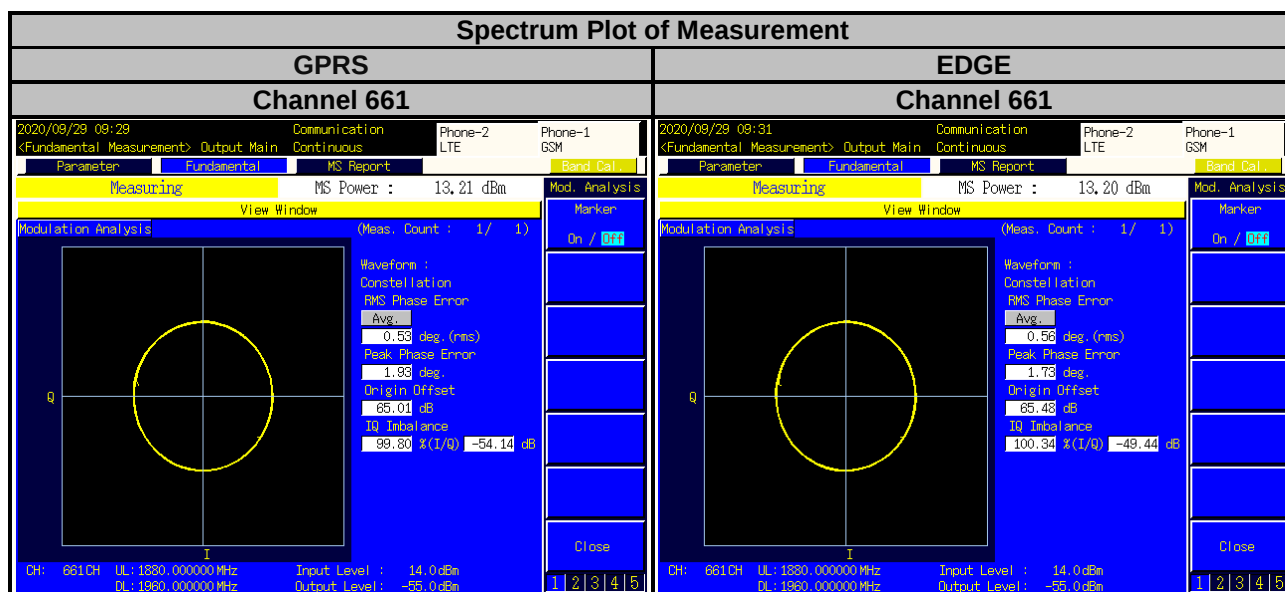

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

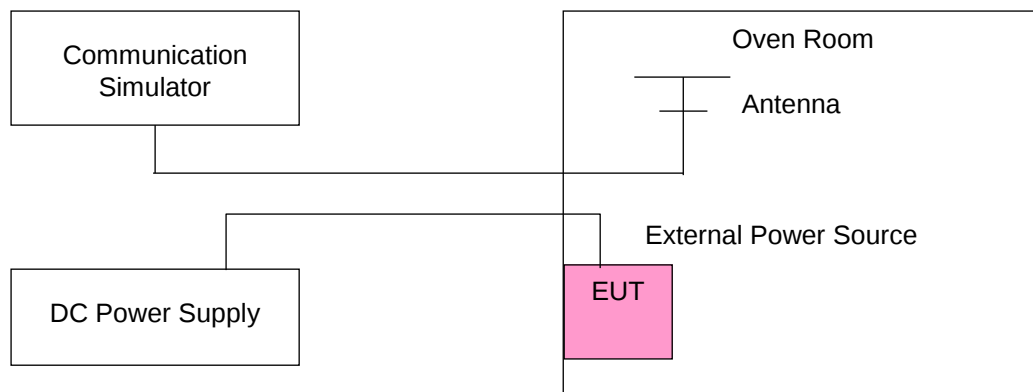

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	GPRS			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	1850.200001	0.001	1909.800004	0.002
6.12	1850.200002	0.001	1909.800003	0.001
8.28	1850.200003	0.002	1909.800003	0.002

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	GPRS			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.200003	0.001	1909.800002	0.001
-20	1850.200004	0.002	1909.800001	0.001
-10	1850.200003	0.002	1909.800002	0.001
0	1850.200003	0.002	1909.800003	0.002
10	1850.200002	0.001	1909.800001	0.001
20	1850.199998	-0.001	1909.799996	-0.002
30	1850.199998	-0.001	1909.799996	-0.002
40	1850.199999	-0.001	1909.799999	-0.001
50	1850.199997	-0.002	1909.799996	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	EDGE			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	1850.200003	0.001	1909.800002	0.001
6.12	1850.200002	0.001	1909.800002	0.001
8.28	1850.200003	0.001	1909.800003	0.002

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	EDGE			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.200002	0.001	1909.800002	0.001
-20	1850.200002	0.001	1909.800004	0.002
-10	1850.200003	0.002	1909.800002	0.001
0	1850.200002	0.001	1909.800003	0.001
10	1850.200002	0.001	1909.800004	0.002
20	1850.199996	-0.002	1909.799997	-0.002
30	1850.199998	-0.001	1909.799999	-0.001
40	1850.199996	-0.002	1909.799999	-0.001
50	1850.199997	-0.002	1909.799997	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	1852.400001	0.001	1907.600002	0.001
6.12	1852.400002	0.001	1907.600002	0.001
8.28	1852.400002	0.001	1907.600002	0.001

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1852.400003	0.002	1907.600002	0.001
-20	1852.400004	0.002	1907.600002	0.001
-10	1852.400004	0.002	1907.600001	0.001
0	1852.400003	0.001	1907.600004	0.002
10	1852.400003	0.002	1907.600001	0.001
20	1852.399998	-0.001	1907.599996	-0.002
30	1852.399999	-0.001	1907.599996	-0.002
40	1852.399999	-0.001	1907.599997	-0.002
50	1852.399999	-0.001	1907.599998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	1850.700002	0.001	1909.300000	0.001
6.12	1850.700003	0.001	1909.300001	0.001
8.28	1850.700004	0.002	1909.300003	0.001

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.700004	0.002	1909.300002	0.001
-20	1850.700004	0.002	1909.300003	0.002
-10	1850.700004	0.002	1909.300003	0.001
0	1850.700002	0.001	1909.300003	0.001
10	1850.700001	0.001	1909.300004	0.002
20	1850.699998	-0.001	1909.299997	-0.002
30	1850.699998	-0.001	1909.299999	-0.001
40	1850.699999	-0.001	1909.299999	-0.001
50	1850.699997	-0.001	1909.299997	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	1851.500002	0.001	1908.500003	0.002
6.12	1851.500003	0.002	1908.500002	0.001
8.28	1851.500002	0.001	1908.500003	0.001

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1851.500003	0.002	1908.500002	0.001
-20	1851.500002	0.001	1908.500004	0.002
-10	1851.500004	0.002	1908.500003	0.002
0	1851.500004	0.002	1908.500002	0.001
10	1851.500003	0.002	1908.500002	0.001
20	1851.499999	-0.001	1908.499998	-0.001
30	1851.499996	-0.002	1908.499998	-0.001
40	1851.499998	-0.001	1908.499997	-0.002
50	1851.499997	-0.002	1908.499998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	1852.500001	0.001	1907.500004	0.002
6.12	1852.500003	0.002	1907.500004	0.002
8.28	1852.500003	0.002	1907.500004	0.002

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1852.500001	0.001	1907.500002	0.001
-20	1852.500002	0.001	1907.500002	0.001
-10	1852.500001	0.001	1907.500004	0.002
0	1852.500002	0.001	1907.500004	0.002
10	1852.500003	0.001	1907.500004	0.002
20	1852.499997	-0.001	1907.499997	-0.001
30	1852.499996	-0.002	1907.499997	-0.001
40	1852.499996	-0.002	1907.499998	-0.001
50	1852.499998	-0.001	1907.499996	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	1855.000002	0.001	1905.000002	0.001
6.12	1855.000004	0.002	1905.000003	0.001
8.28	1855.000002	0.001	1905.000003	0.001

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1855.000002	0.001	1905.000003	0.001
-20	1855.000002	0.001	1905.000002	0.001
-10	1855.000001	0.001	1905.000002	0.001
0	1855.000004	0.002	1905.000002	0.001
10	1855.000002	0.001	1905.000001	0.001
20	1854.999996	-0.002	1904.999997	-0.002
30	1854.999997	-0.002	1904.999999	-0.001
40	1854.999998	-0.001	1904.999998	-0.001
50	1854.999999	-0.001	1904.999999	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	1857.500003	0.002	1902.500003	0.001
6.12	1857.500003	0.001	1902.500003	0.001
8.28	1857.500003	0.001	1902.500003	0.001

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1857.500001	0.001	1902.500002	0.001
-20	1857.500002	0.001	1902.500003	0.002
-10	1857.500002	0.001	1902.500001	0.001
0	1857.500001	0.001	1902.500001	0.001
10	1857.500002	0.001	1902.500003	0.002
20	1857.499999	-0.001	1902.499998	-0.001
30	1857.499997	-0.002	1902.499999	-0.001
40	1857.499997	-0.002	1902.499996	-0.002
50	1857.499996	-0.002	1902.499997	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	1860.000002	0.001	1900.000004	0.002
6.12	1860.000002	0.001	1900.000003	0.002
8.28	1860.000003	0.002	1900.000002	0.001

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature


Temp. (°C)	LTE Band 2			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1860.000002	0.001	1900.000004	0.002
-20	1860.000001	0.001	1900.000004	0.002
-10	1860.000001	0.001	1900.000002	0.001
0	1860.000004	0.002	1900.000002	0.001
10	1860.000003	0.002	1900.000003	0.002
20	1859.999999	-0.001	1899.999996	-0.002
30	1859.999997	-0.002	1899.999996	-0.002
40	1859.999998	-0.001	1899.999997	-0.002
50	1859.999998	-0.001	1899.999998	-0.001

4.4 Occupied Bandwidth Measurement

4.4.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Refer to ANSI C63.26 section 5.4.4. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth. For the 26dBc bandwidth measurement method, please refer to section 5.4.3 of ANSI C63.26.

4.4.2 Test Setup

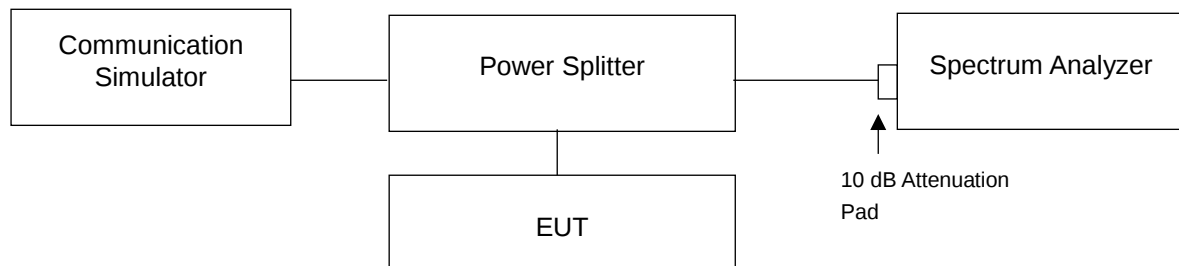


4.4.3 Test Result


GPRS				EDGE			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)	Channel	Frequency (MHz)	99 % Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	254.51	328.6	512	1850.2	256.65	325.6
661	1880.0	256.76	326.6	661	1880.0	255.16	322.8
810	1909.8	257.74	326.5	810	1909.8	255.34	328.8

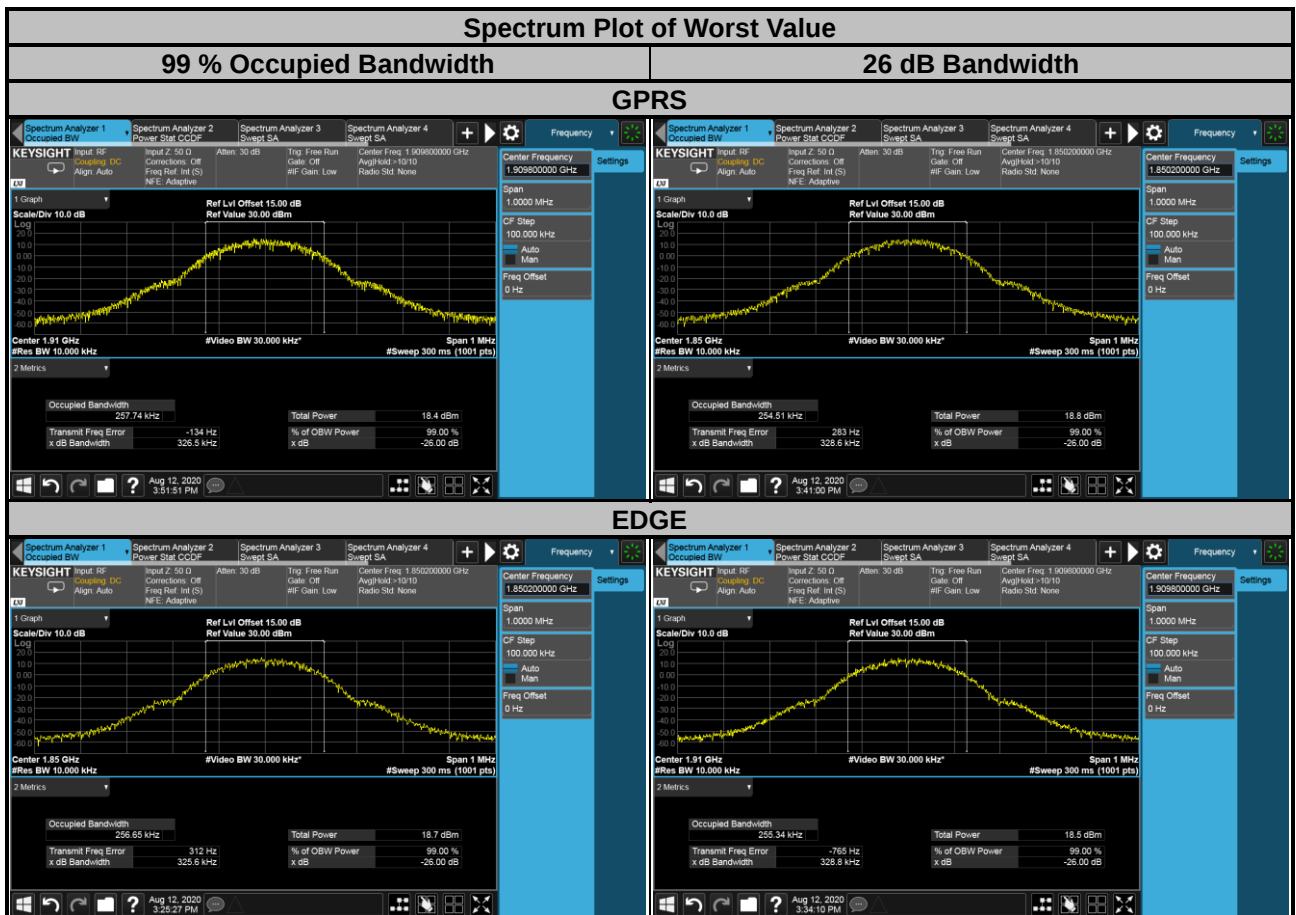


WCDMA			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.08	4.67
9400	1880.0	4.07	4.66
9538	1907.6	4.06	4.63

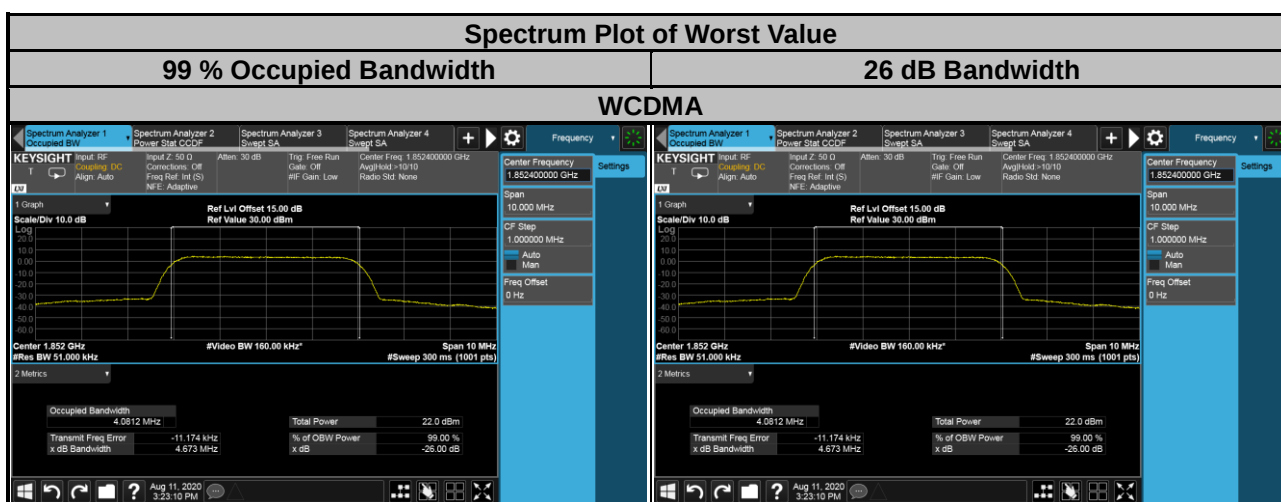


LTE Band 2					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18607	1850.7	1.0886	1.0905	1.288	1.295
18900	1880.0	1.0892	1.0890	1.288	1.281
19193	1909.3	1.0885	1.0899	1.293	1.288
Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18615	1851.5	2.7011	2.6980	2.927	2.931
18900	1880.0	2.6992	2.6935	2.918	2.931
19185	1908.5	2.7019	2.6949	2.927	2.932

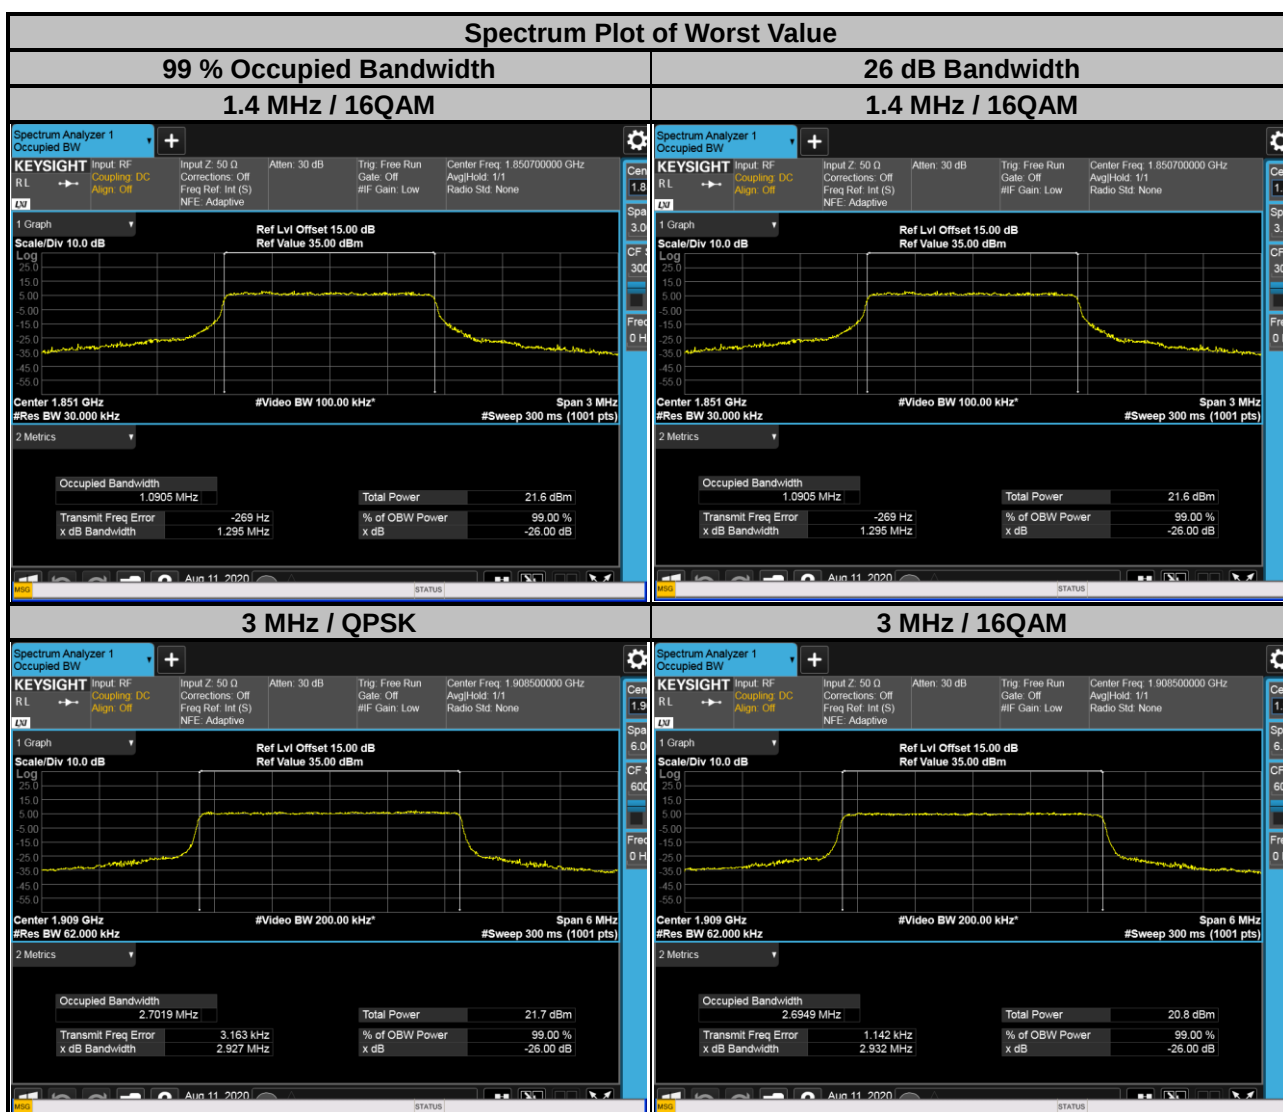

LTE Band 2					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18625	1852.5	4.4860	4.4896	4.825	4.851
18900	1880.0	4.4825	4.4849	4.820	4.807
19175	1907.5	4.4807	4.4823	4.837	4.804
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18650	1855.0	8.9821	8.9863	9.555	9.570
18900	1880.0	8.9549	8.9611	9.548	9.513
19150	1905.0	8.9688	8.9740	9.546	9.554

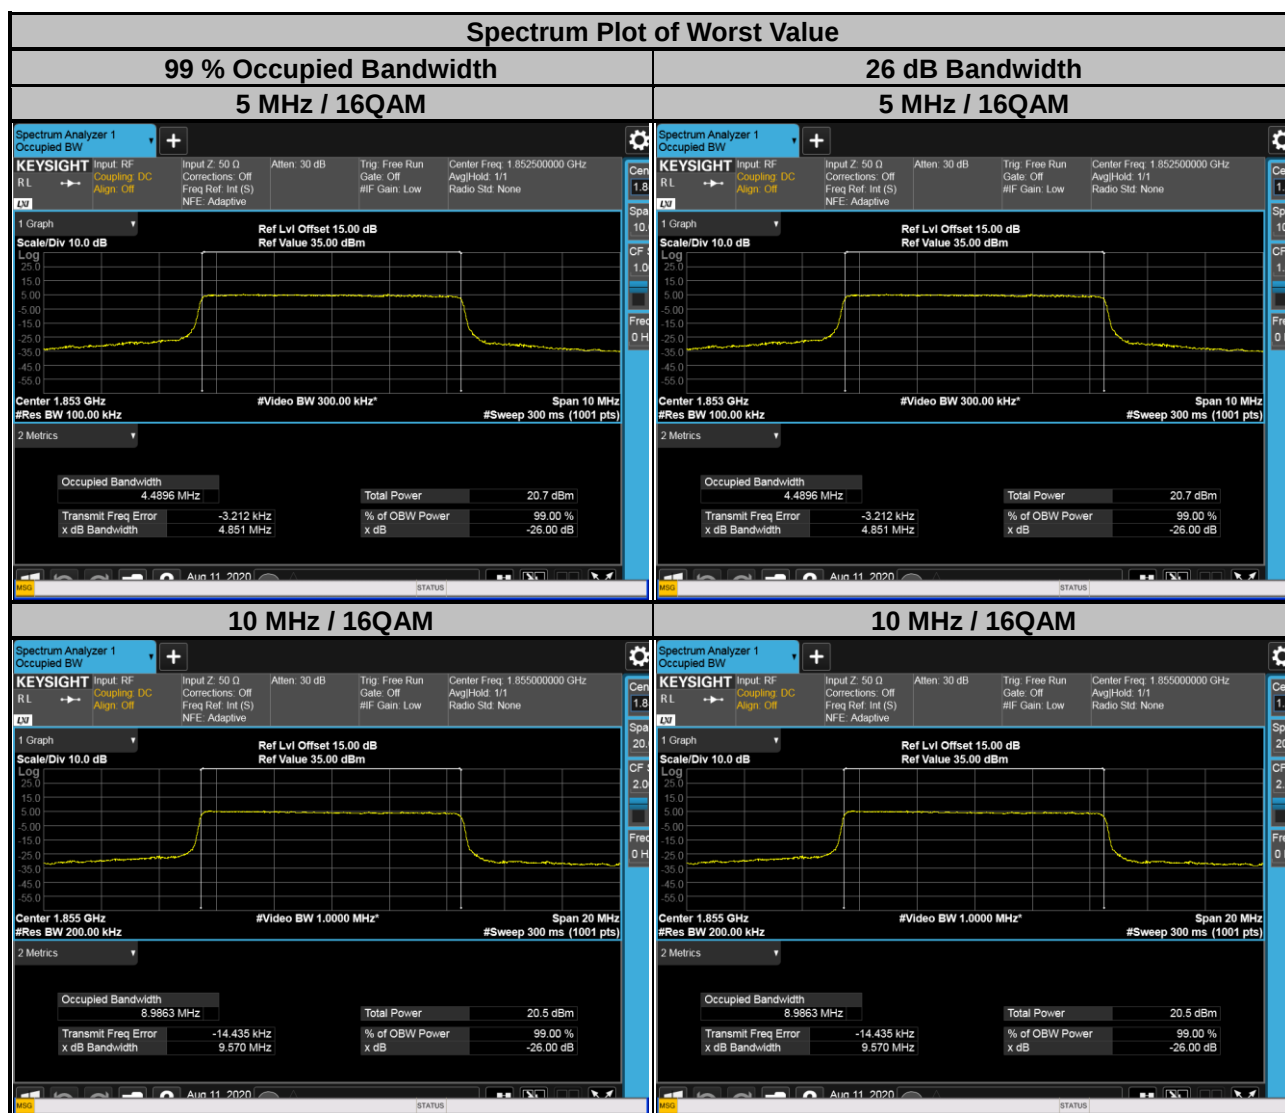

LTE Band 2					
Channel Bandwidth: 15 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18675	1857.5	13.5075	13.4935	14.362	14.474
18900	1880.0	13.4237	13.4122	14.245	14.297
19125	1902.5	13.4894	13.4803	14.289	14.339
Channel Bandwidth: 20 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18700	1860.0	18.0187	18.0375	19.119	19.142
18900	1880.0	17.8438	17.8675	18.998	19.018
19100	1900.0	18.0143	18.0344	19.133	19.099

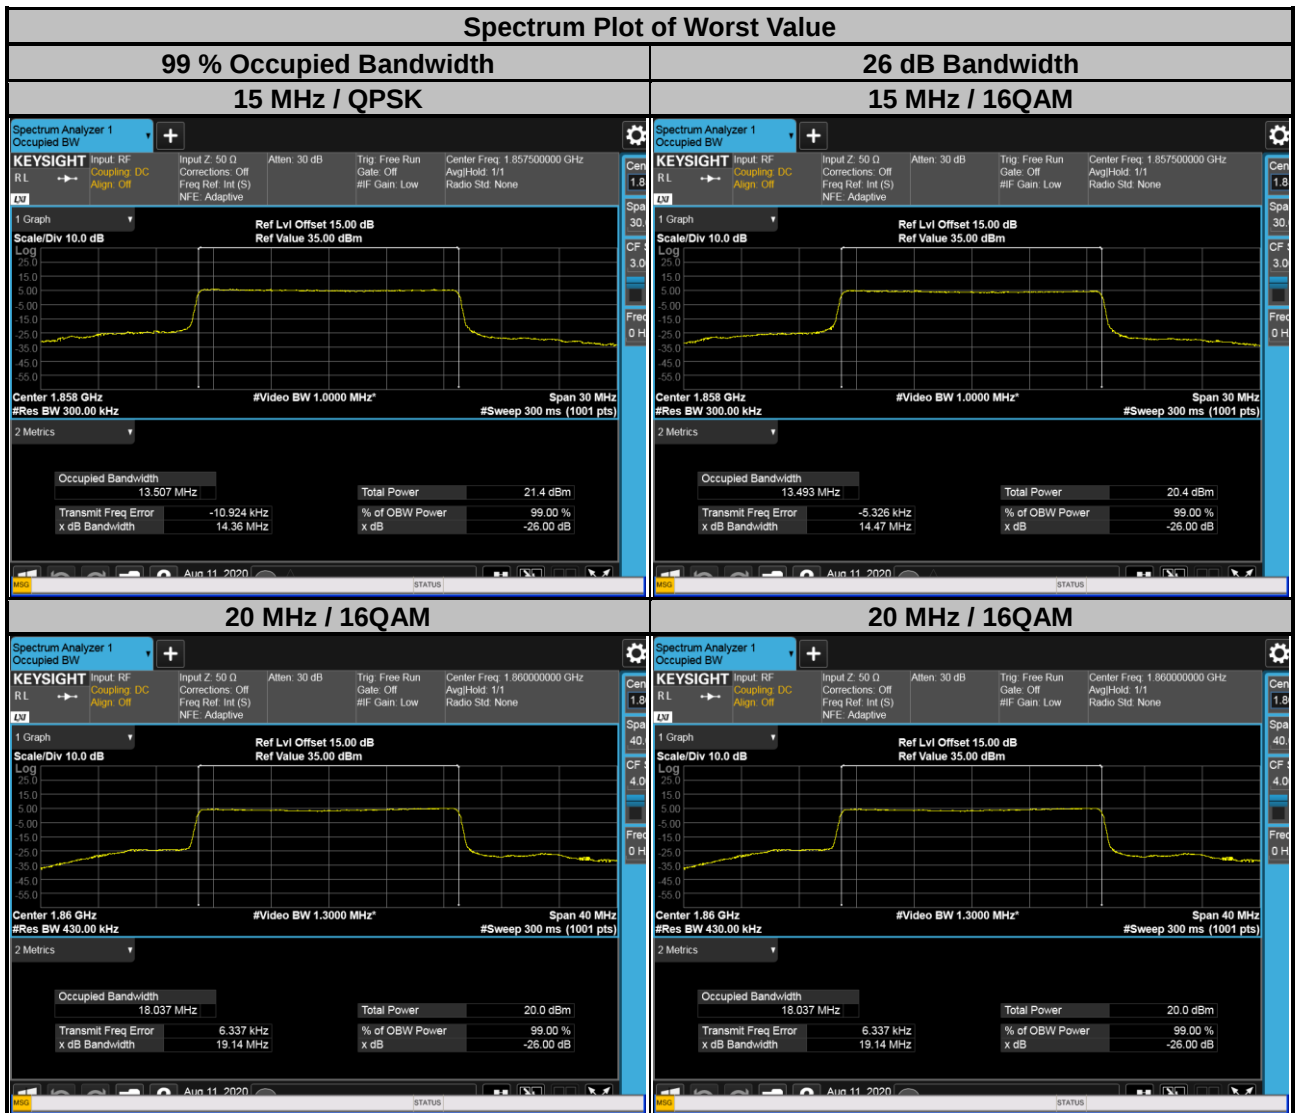


4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4.5.2 Test Setup


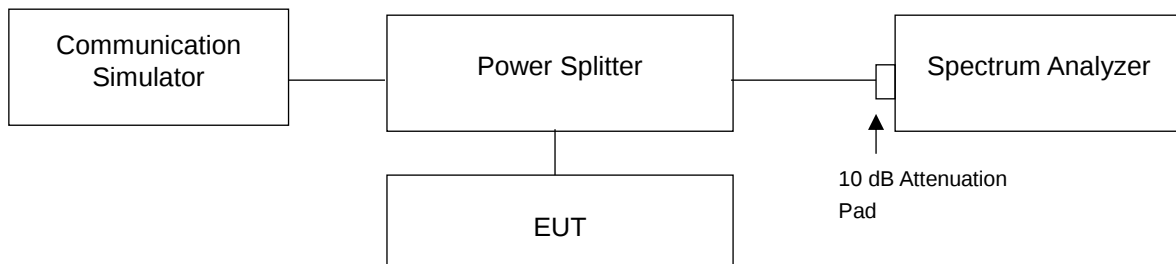



4.5.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 3 kHz and VB of the spectrum is 10 kHz (GPRS/EDGE).
- The center frequency of spectrum is the band edge frequency and span is 2 MHz. RB of the spectrum is 51 kHz and VB of the spectrum is 160 kHz (WCDMA).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 15 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 62 kHz and VB of the spectrum is 200 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 10 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 150 kHz and VB of the spectrum is 470 kHz (LTE Bandwidth 15 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 200 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 20 MHz).
- Record the max trace plot into the test report.


4.5.4 Test Results

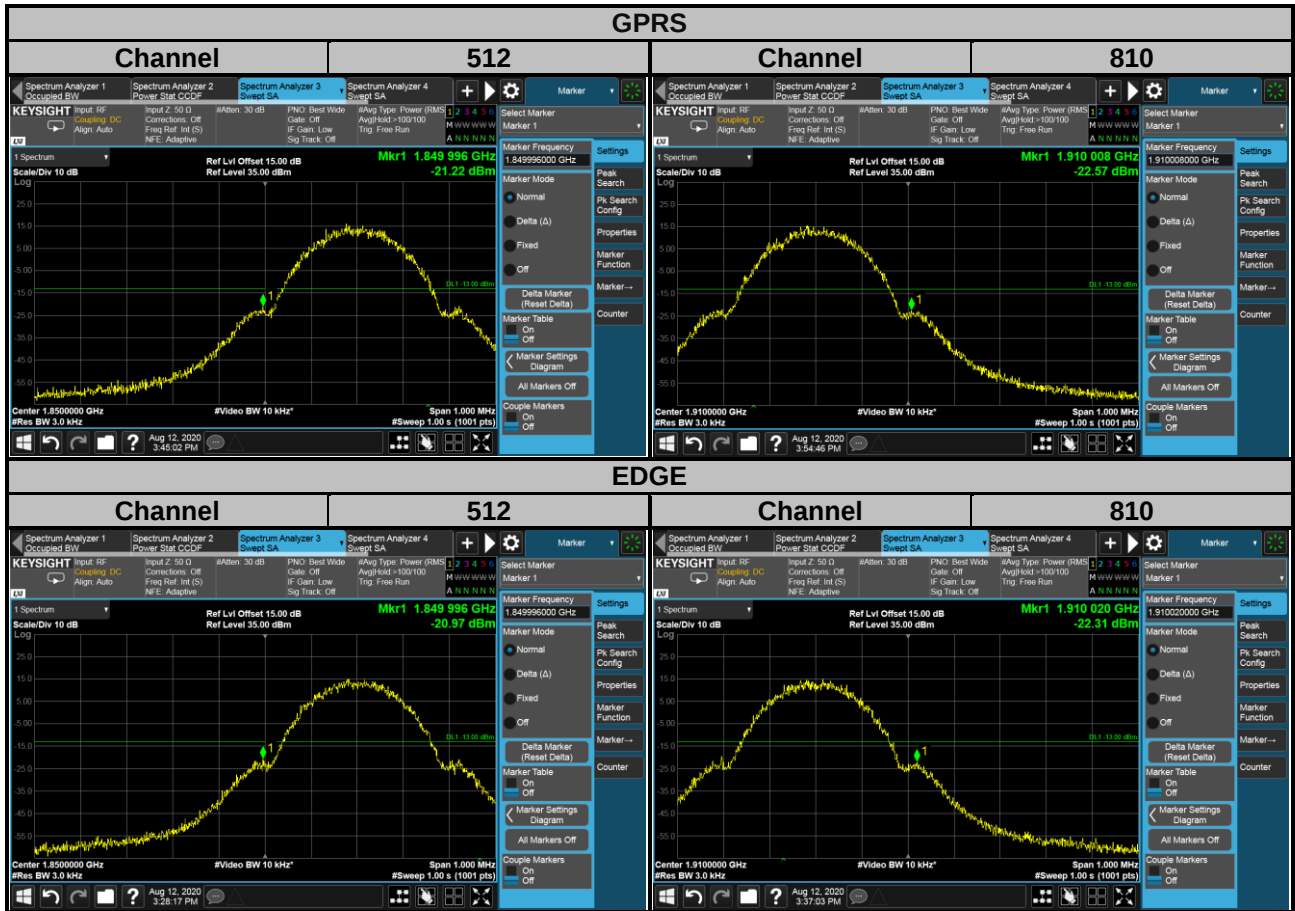


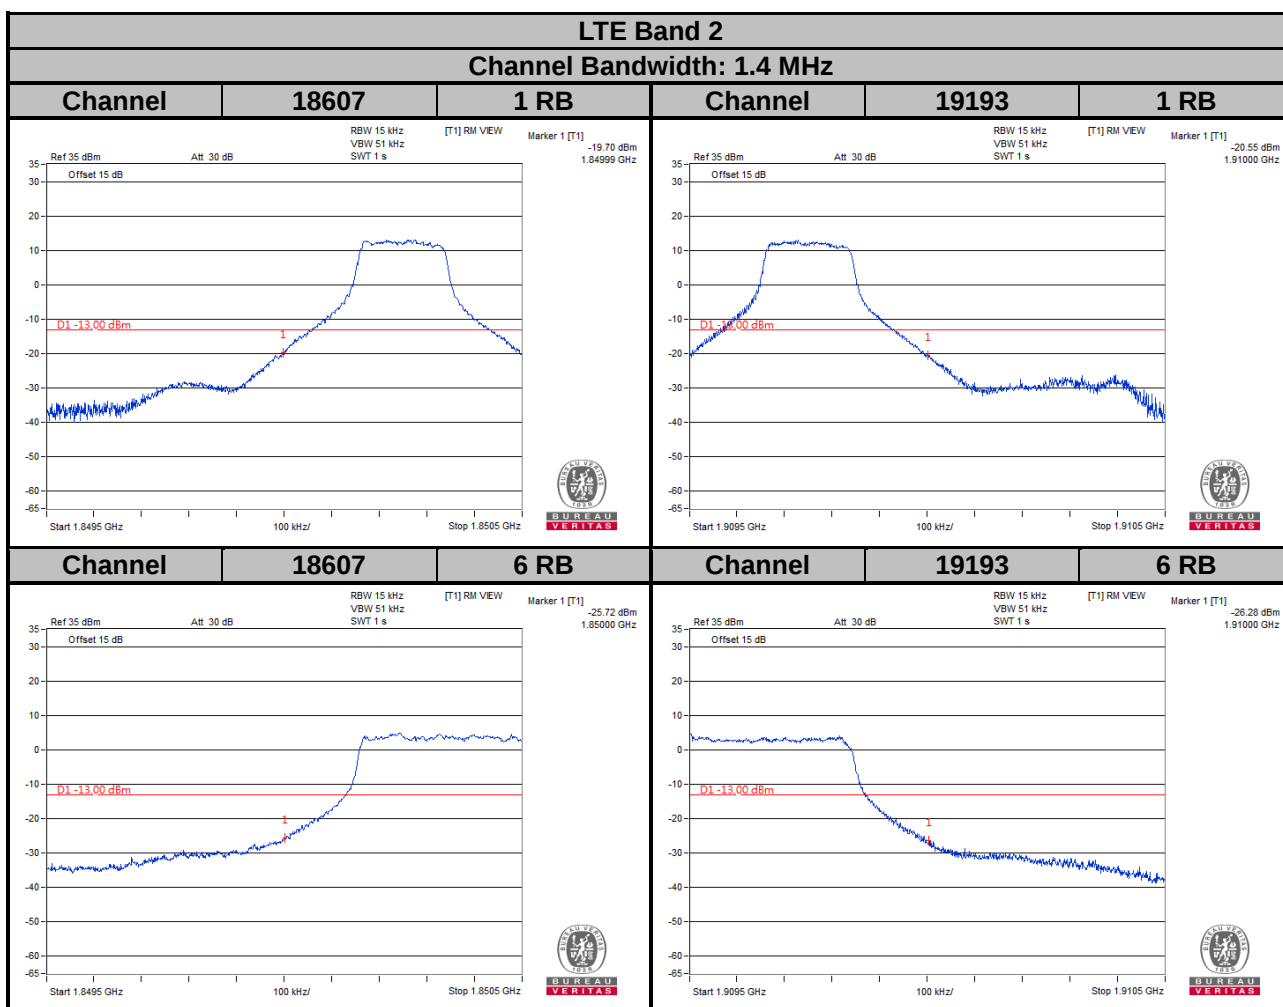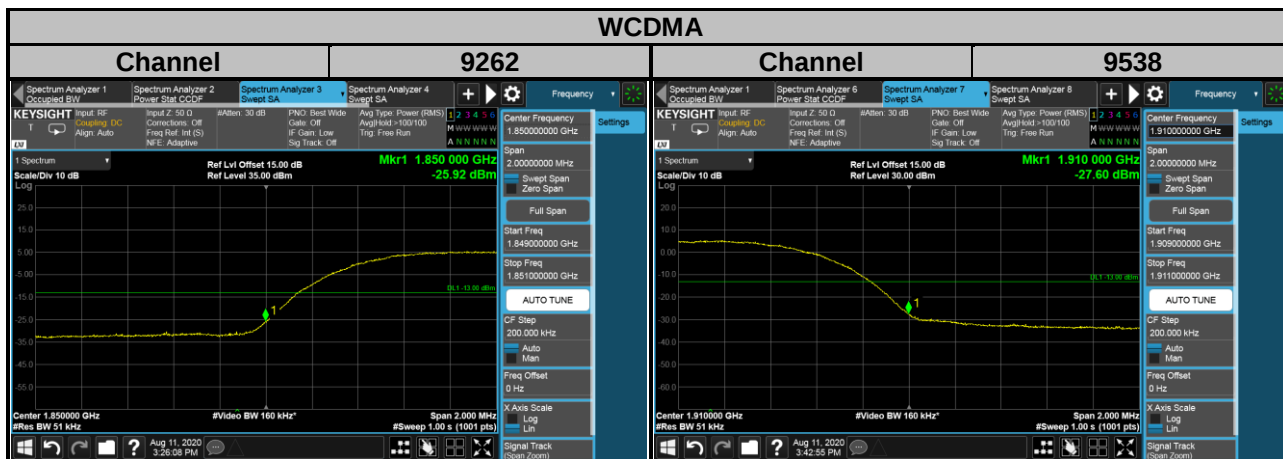


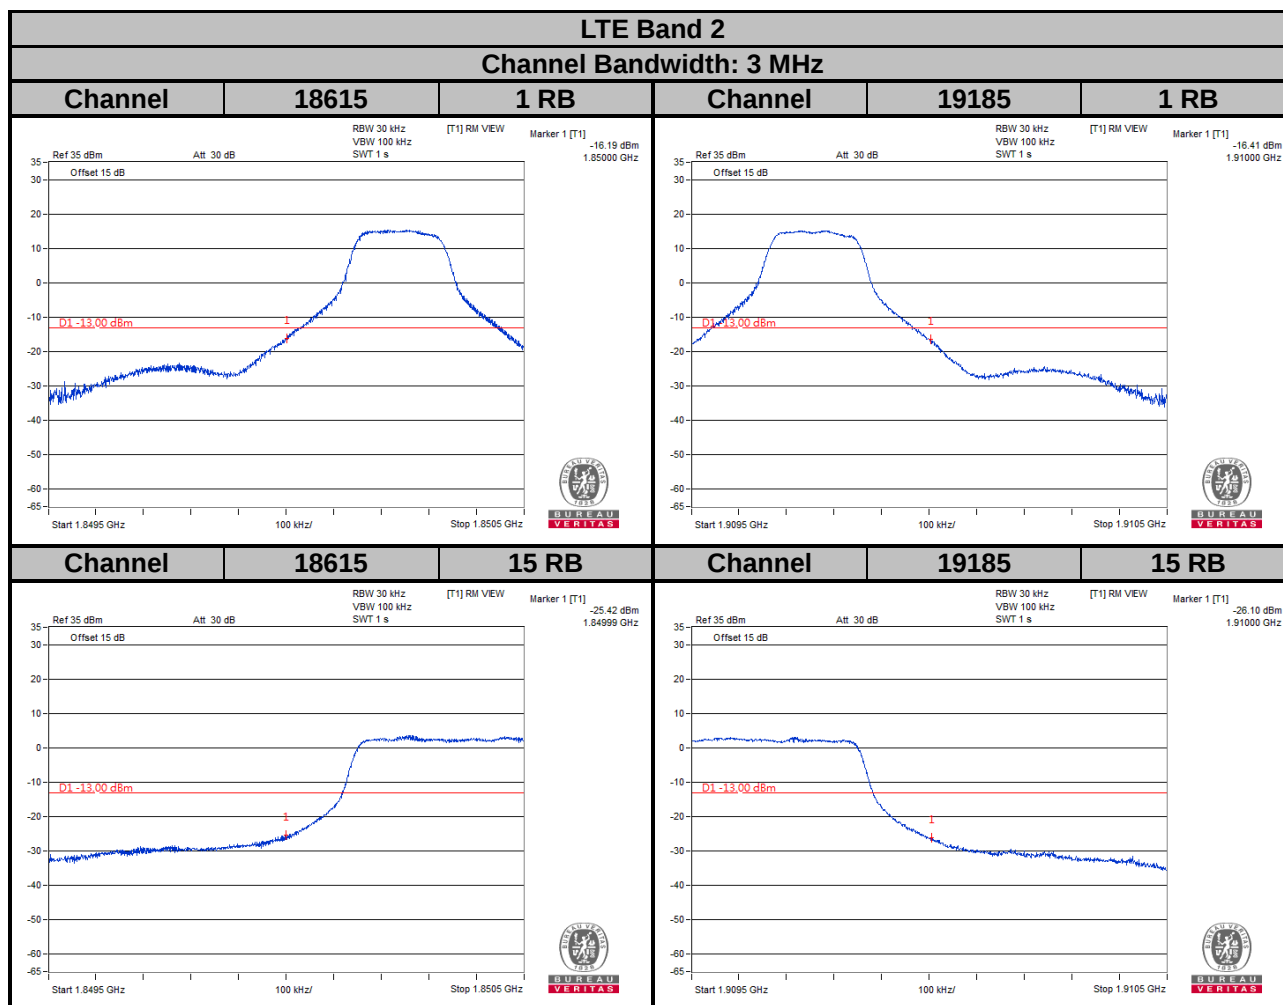

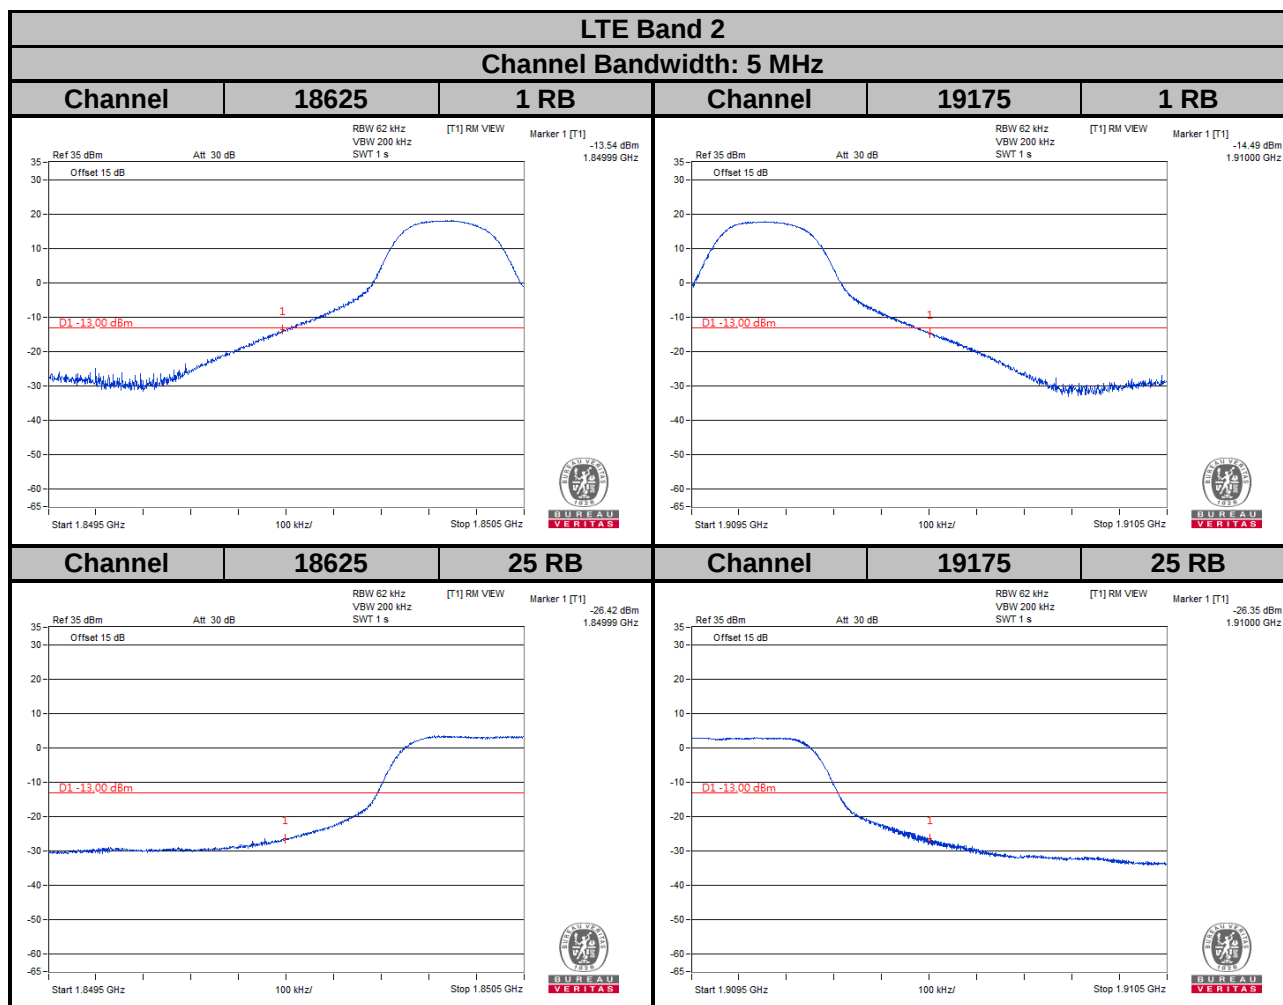

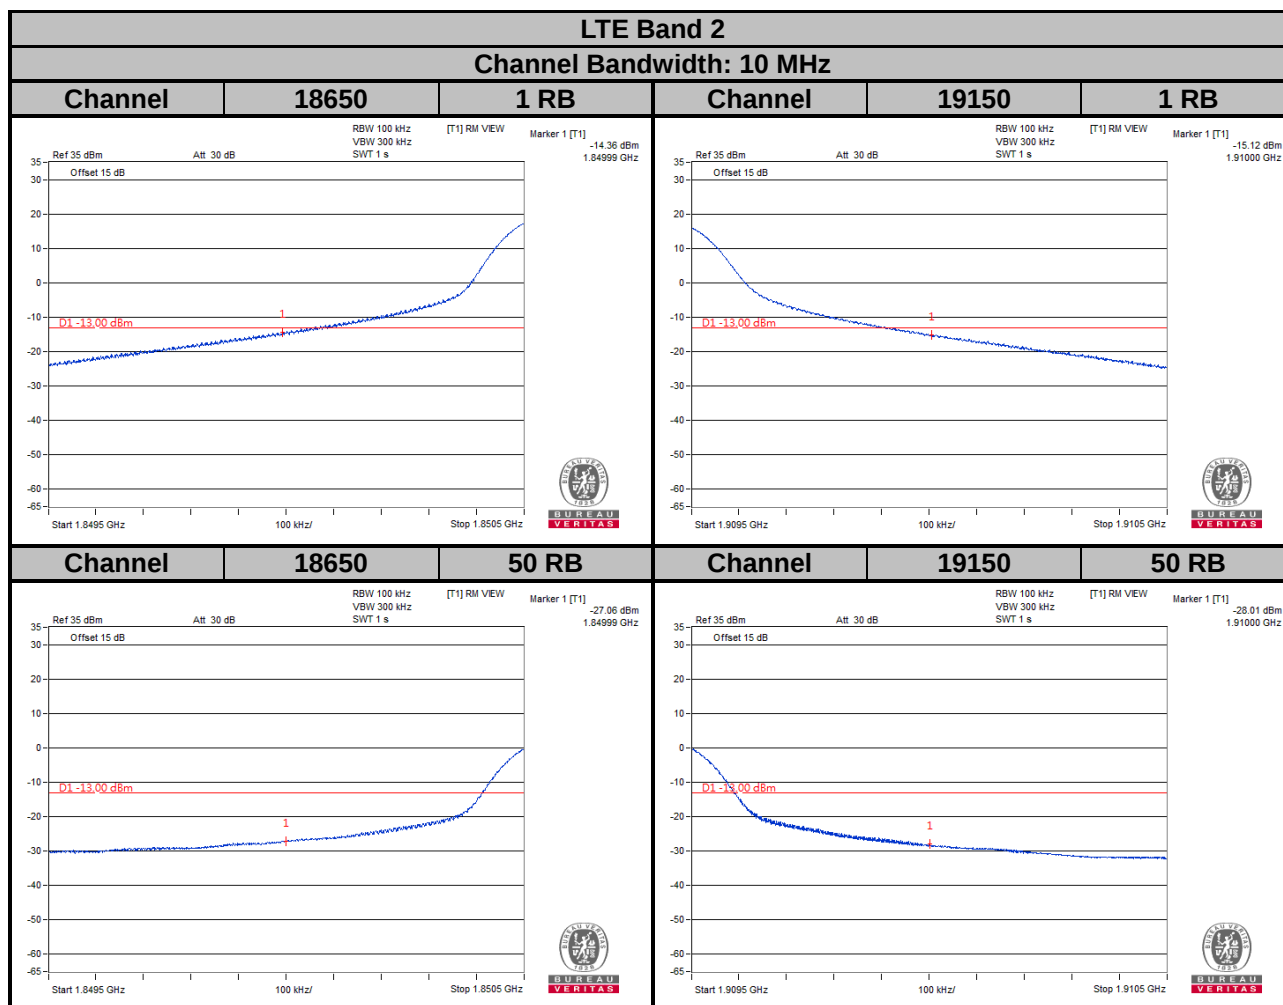

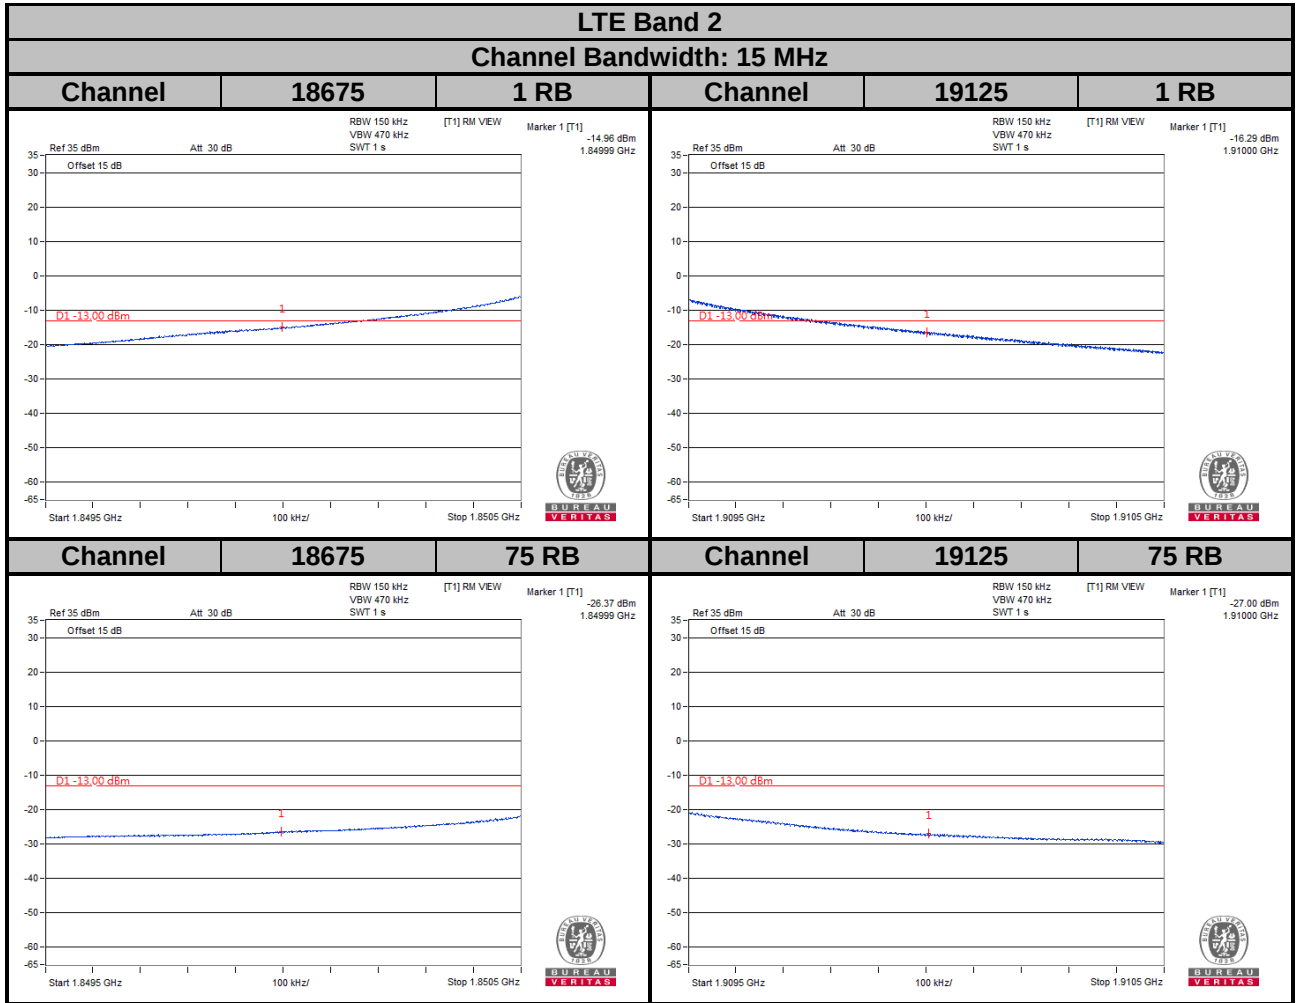

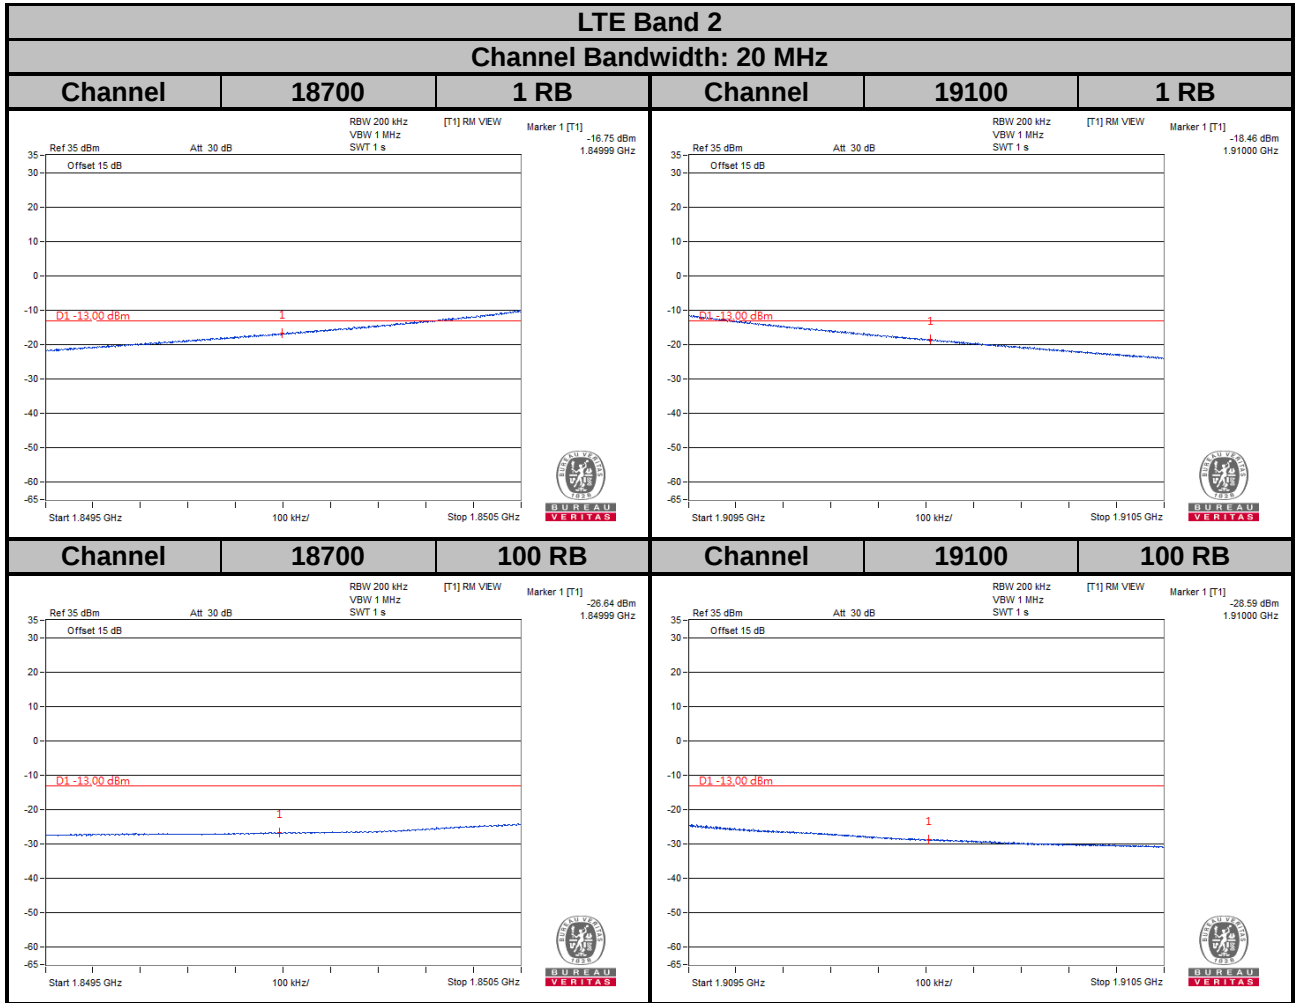


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

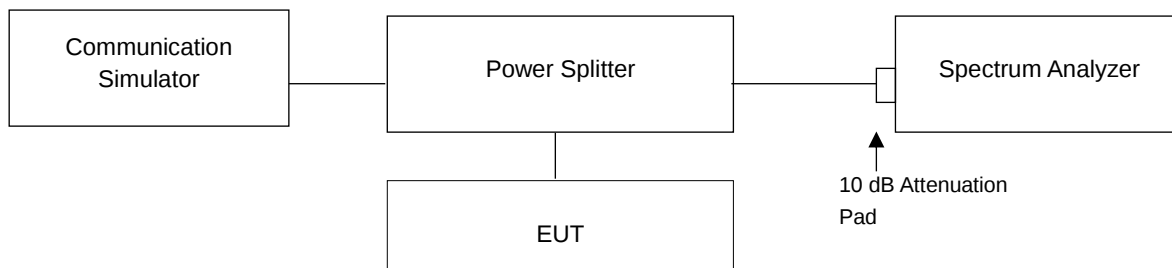


4.6.3 Test Procedures


1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)
		GPRS	EDGE			
512	1850.2	3.07	3.08	9262	1852.4	2.78
661	1880.0	3.07	3.07	9400	1880.0	2.94
810	1909.8	3.01	3.01	9538	1907.6	3.14

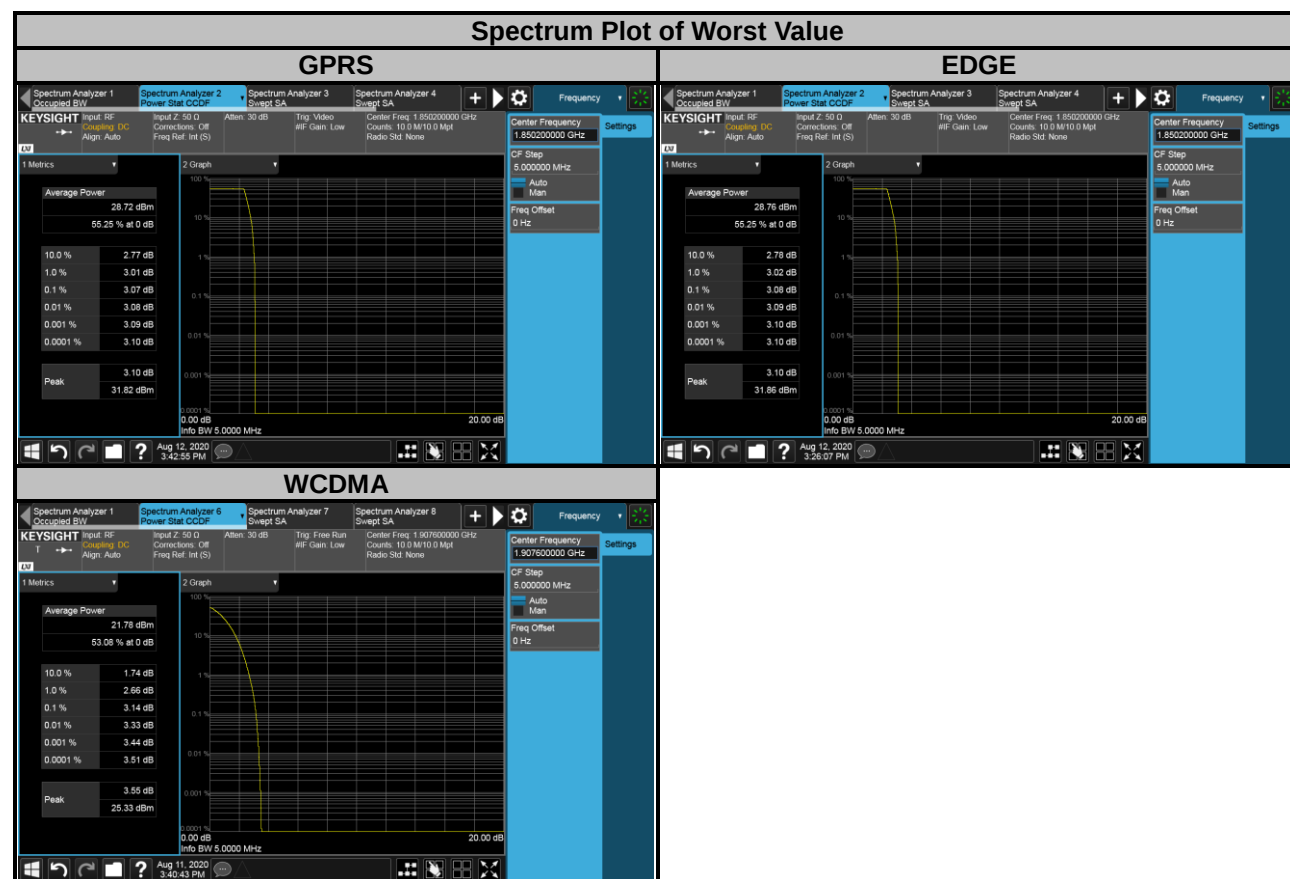

LTE Band 2							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	4.82	5.79	18615	1851.5	4.65	5.55
18900	1880.0	5.30	6.38	18900	1880.0	5.23	6.03
19193	1909.3	5.34	6.28	19185	1908.5	5.44	6.28

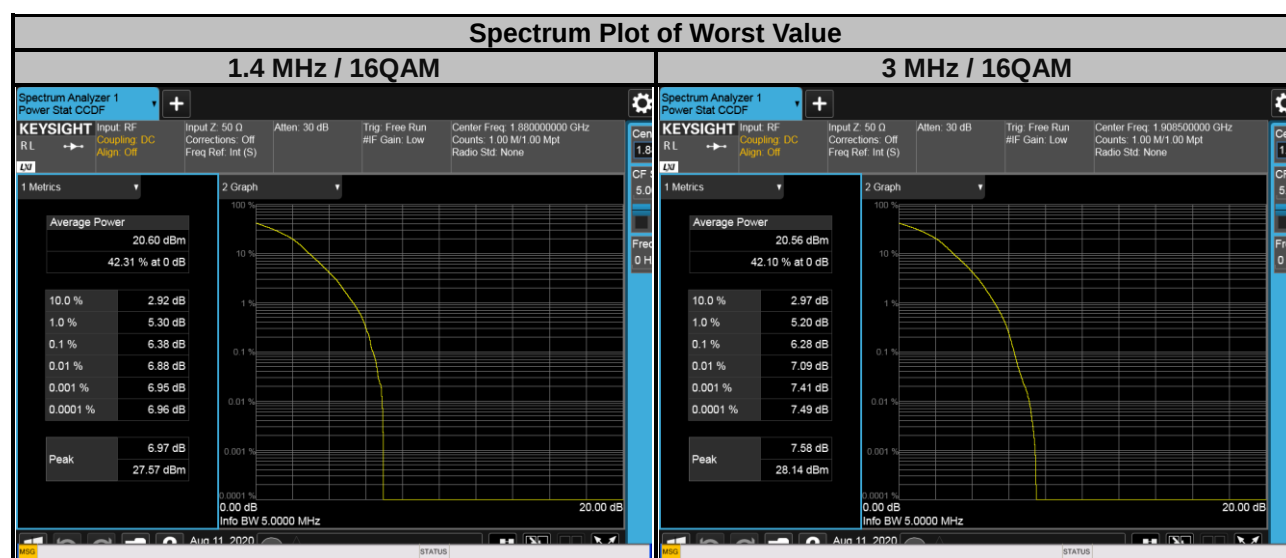

LTE Band 2							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	4.77	5.71	18650	1855.0	4.62	5.50
18900	1880.0	5.43	6.39	18900	1880.0	5.48	6.47
19175	1907.5	5.71	6.68	19150	1905.0	5.39	6.47

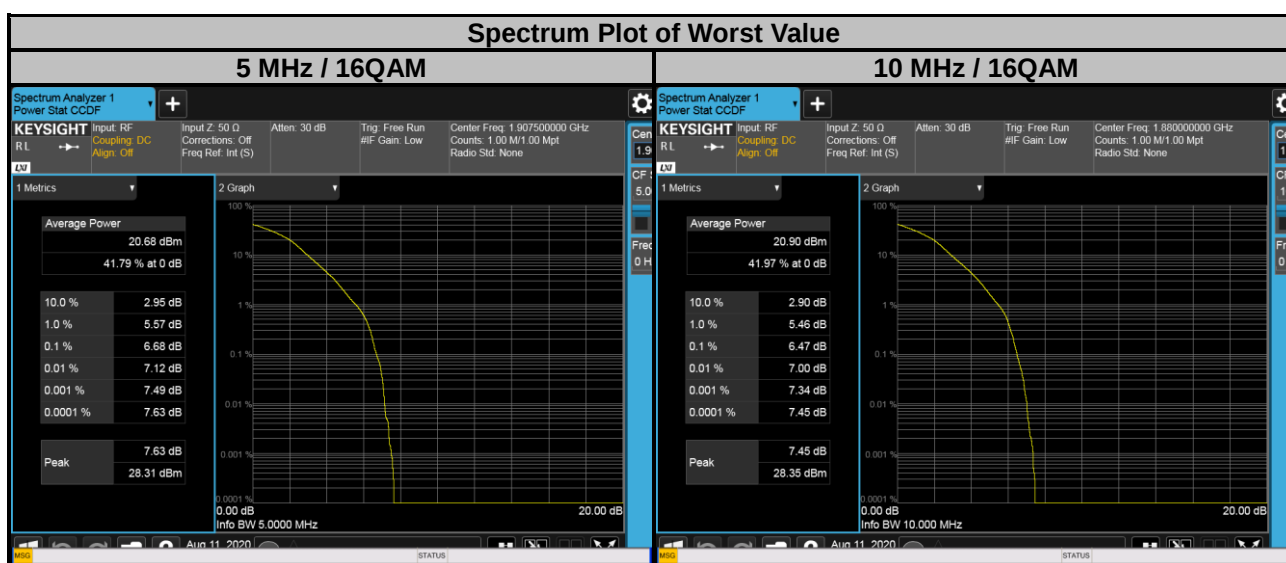

LTE Band 2							
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	4.51	5.50	18700	1860.0	4.57	5.34
18900	1880.0	5.45	6.76	18900	1880.0	5.70	6.53
19125	1902.5	5.27	6.24	19100	1900.0	5.03	5.94




4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.


4.7.2 Test Setup

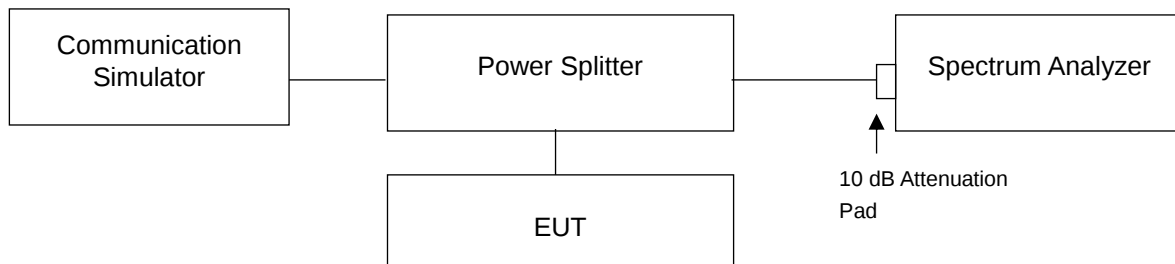

4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 20 GHz / 26.5 GHz / 27 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.


4.7.4 Test Results

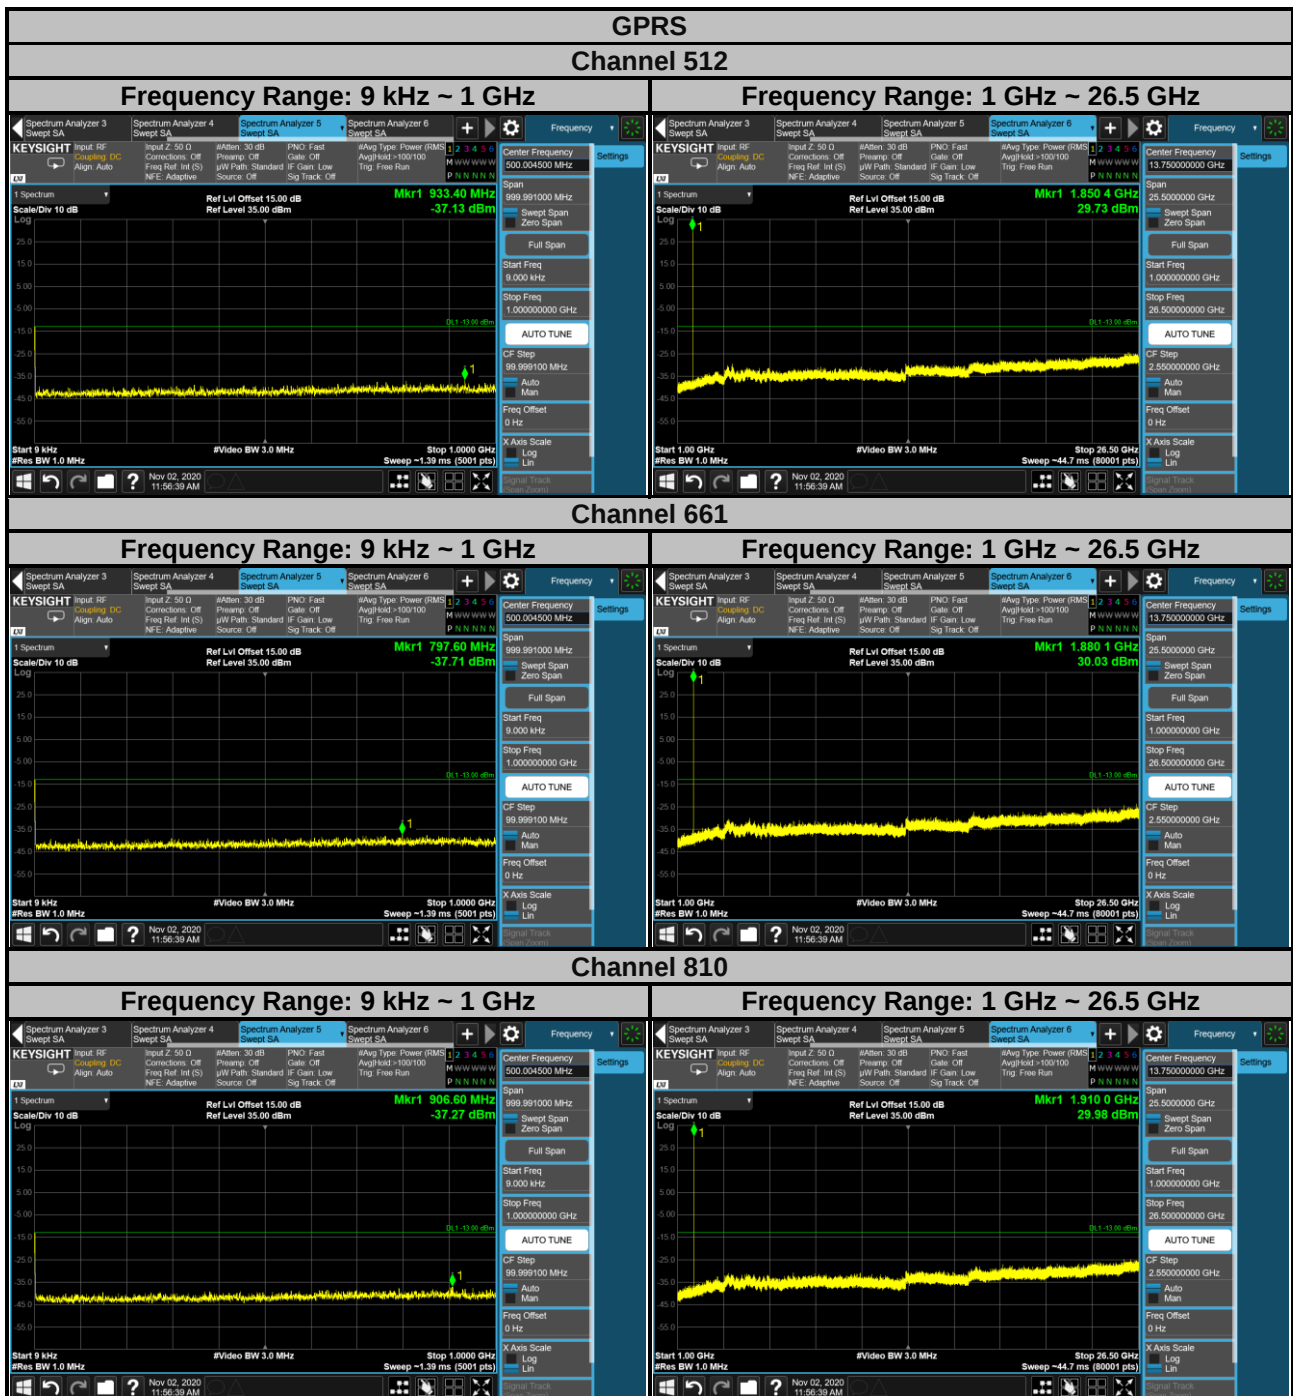


Note: The signal over the limit in 9 kHz is from spectrum analyzer.




Note: The signal over the limit in 9 kHz is from spectrum analyzer.

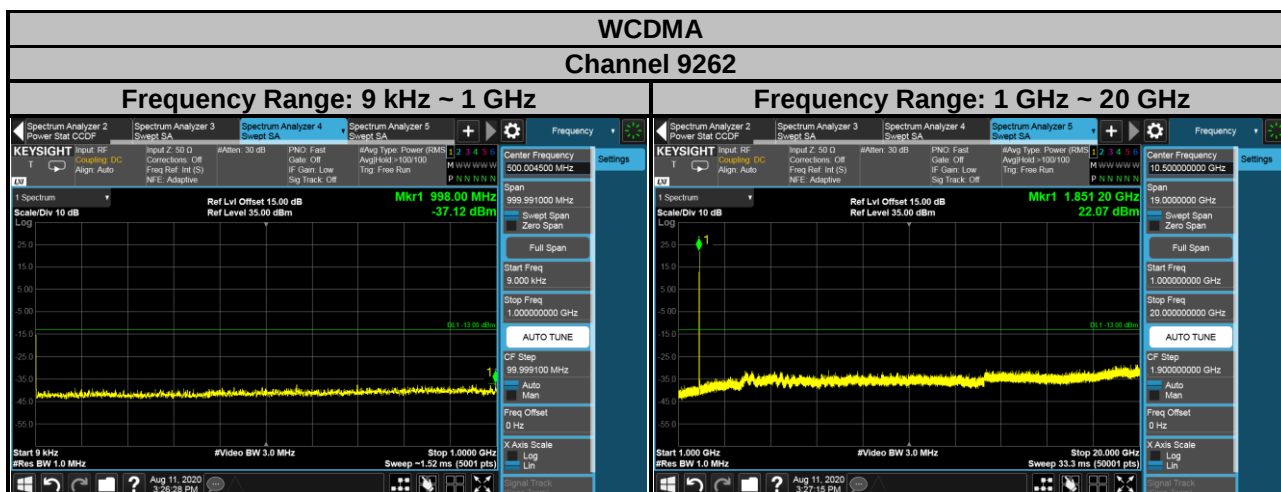


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

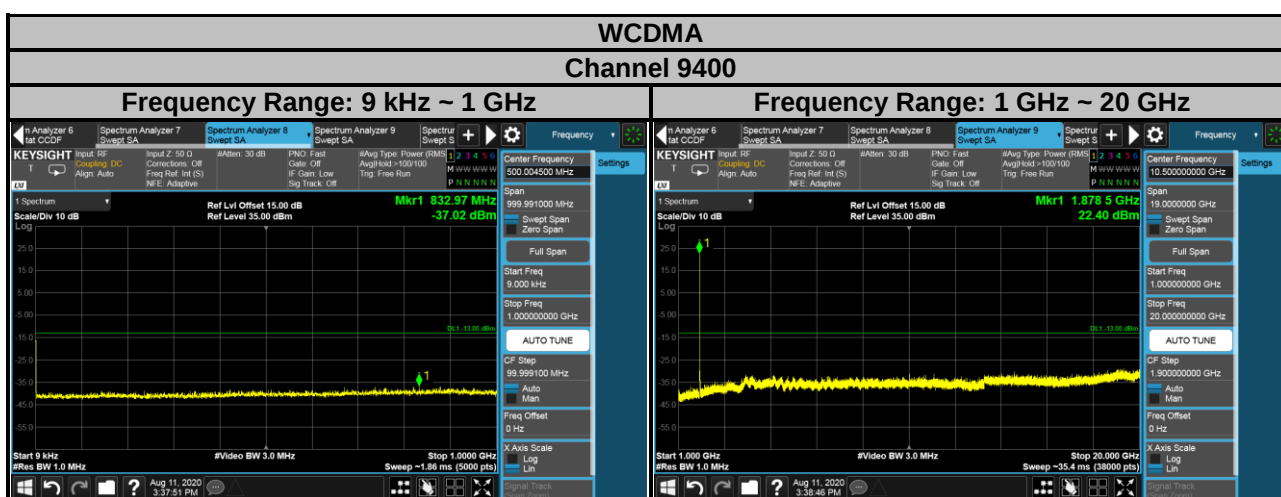


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

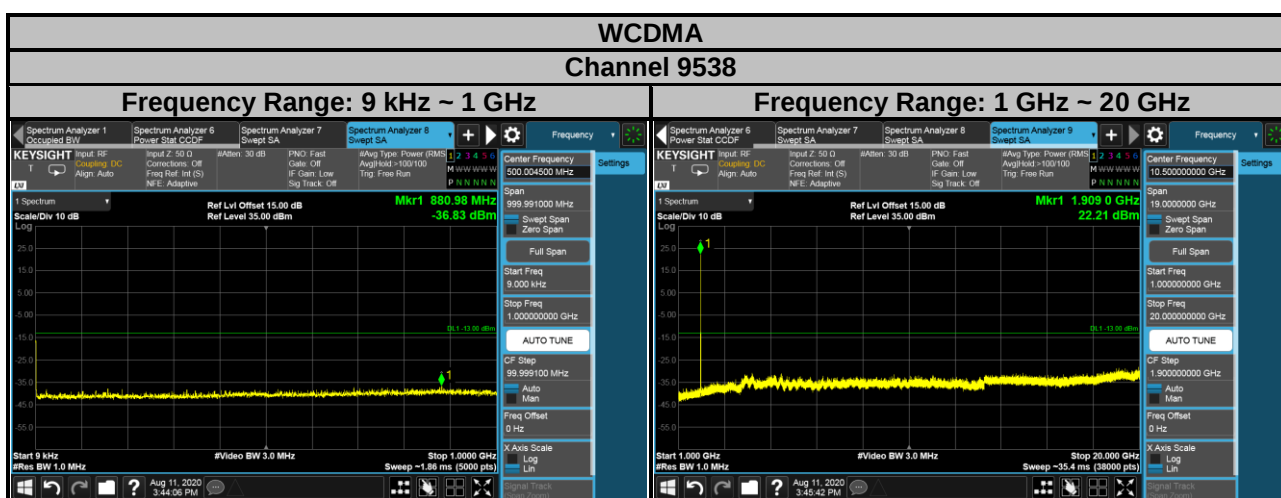


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

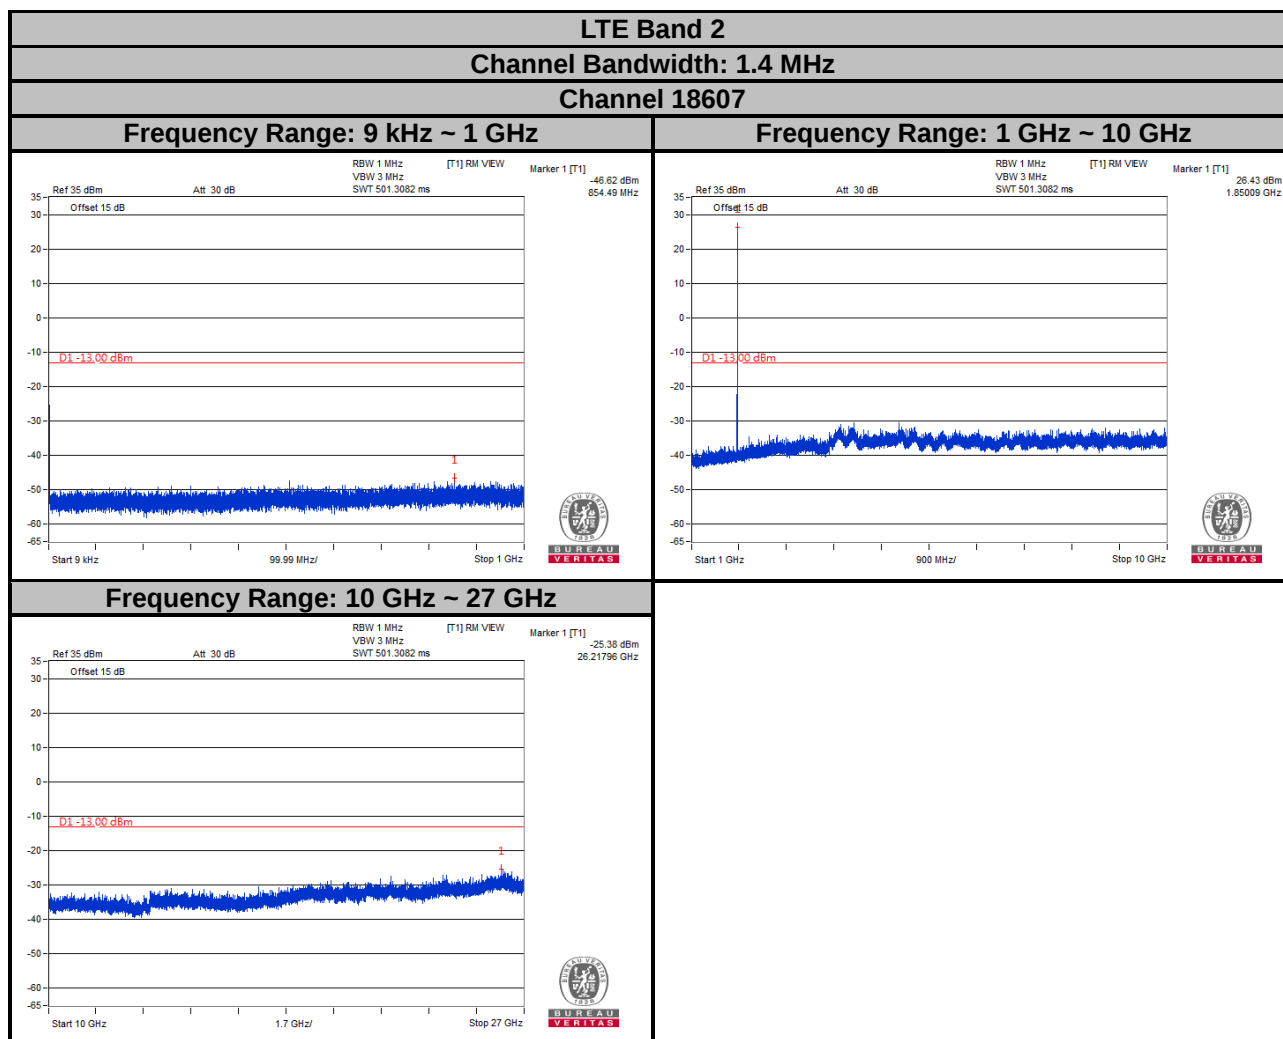


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

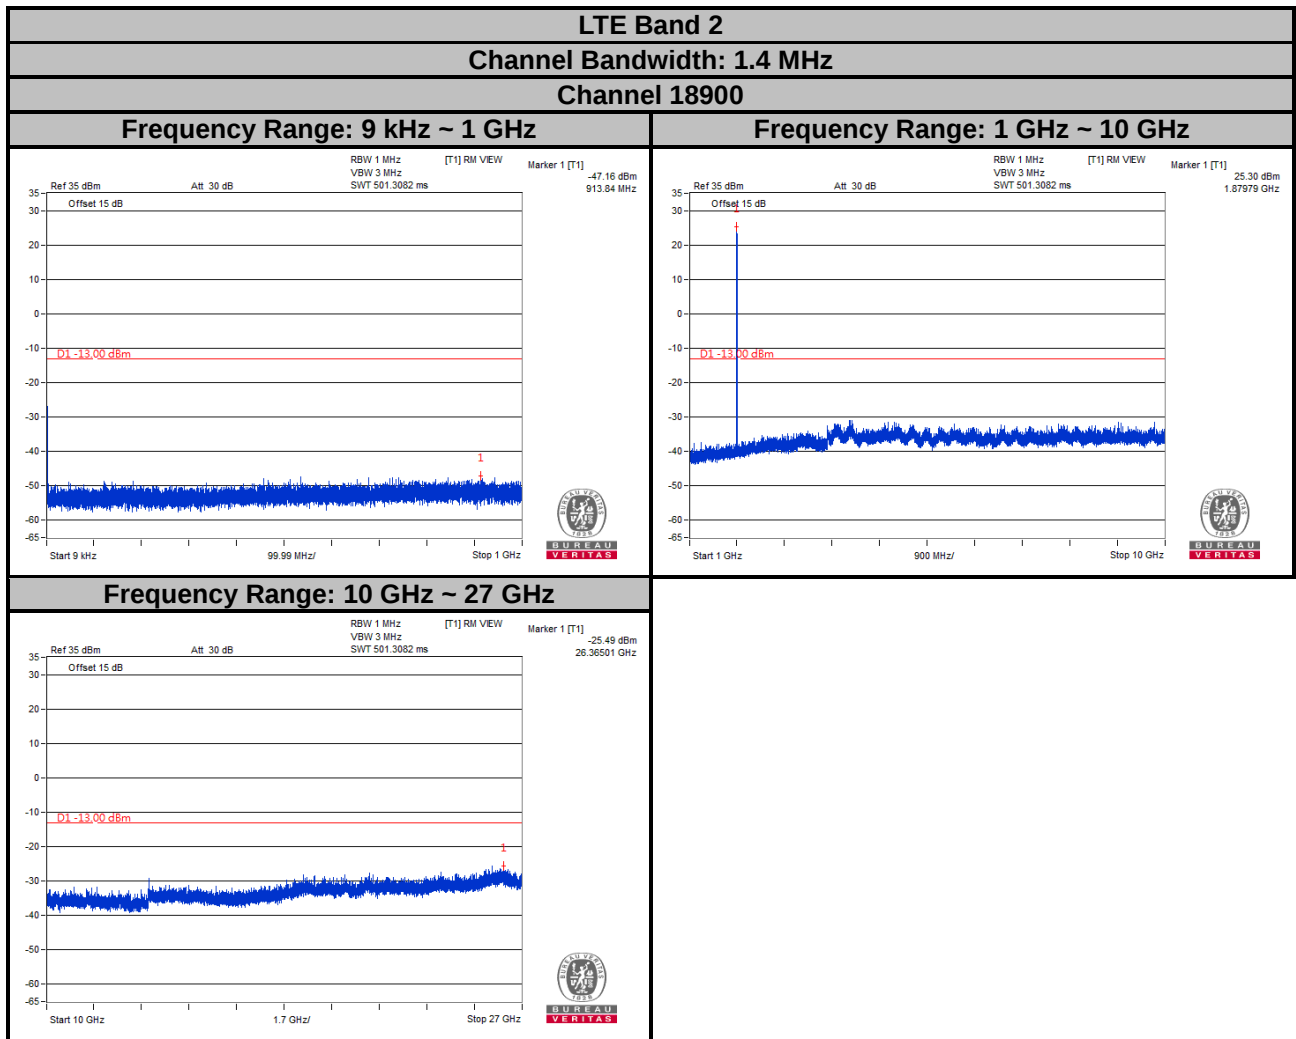


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

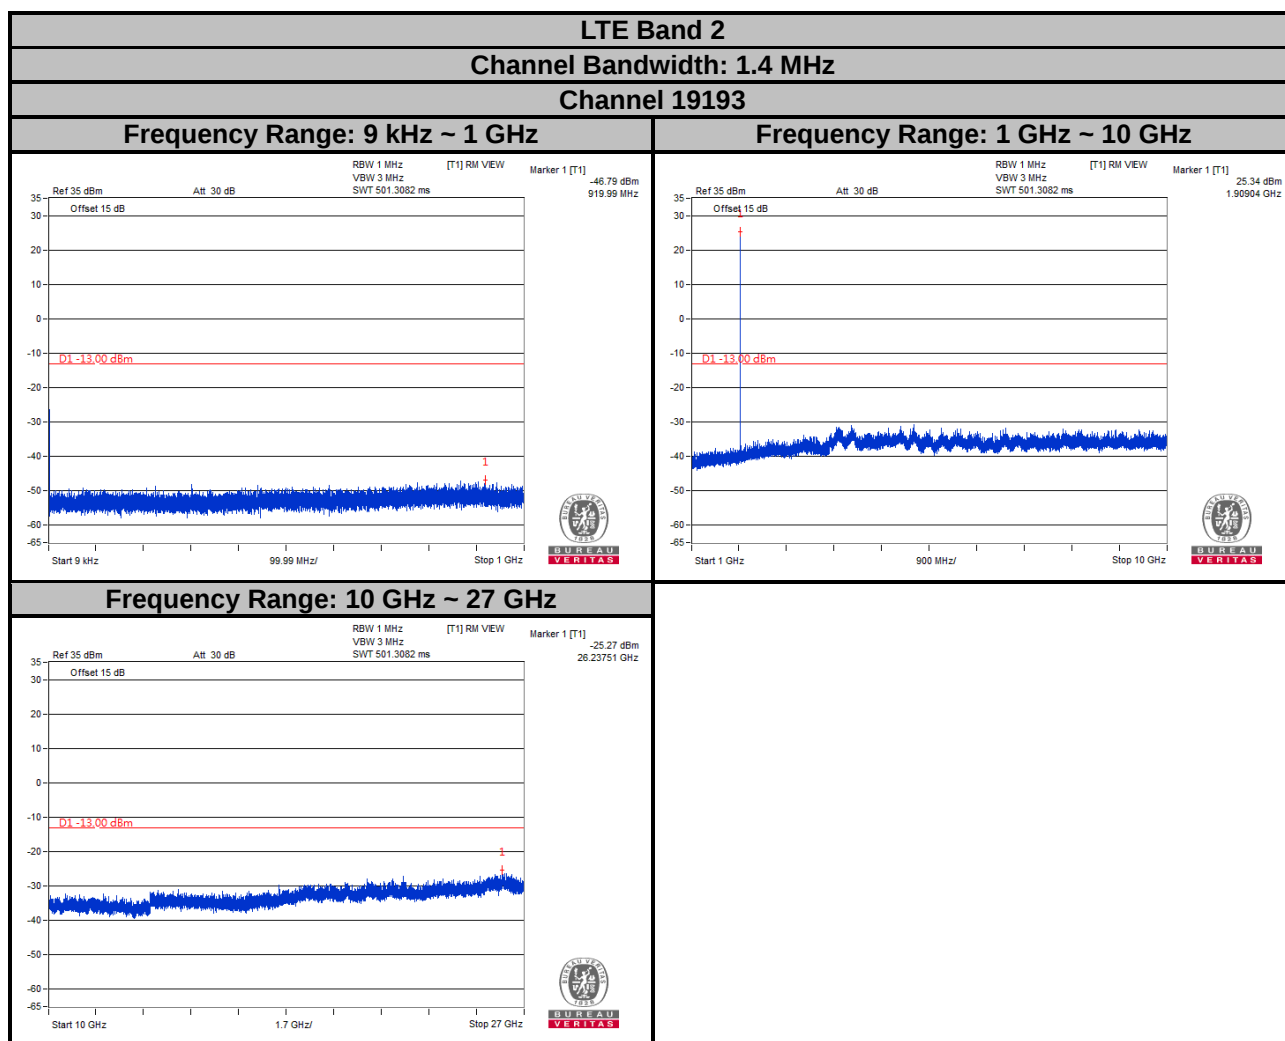


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

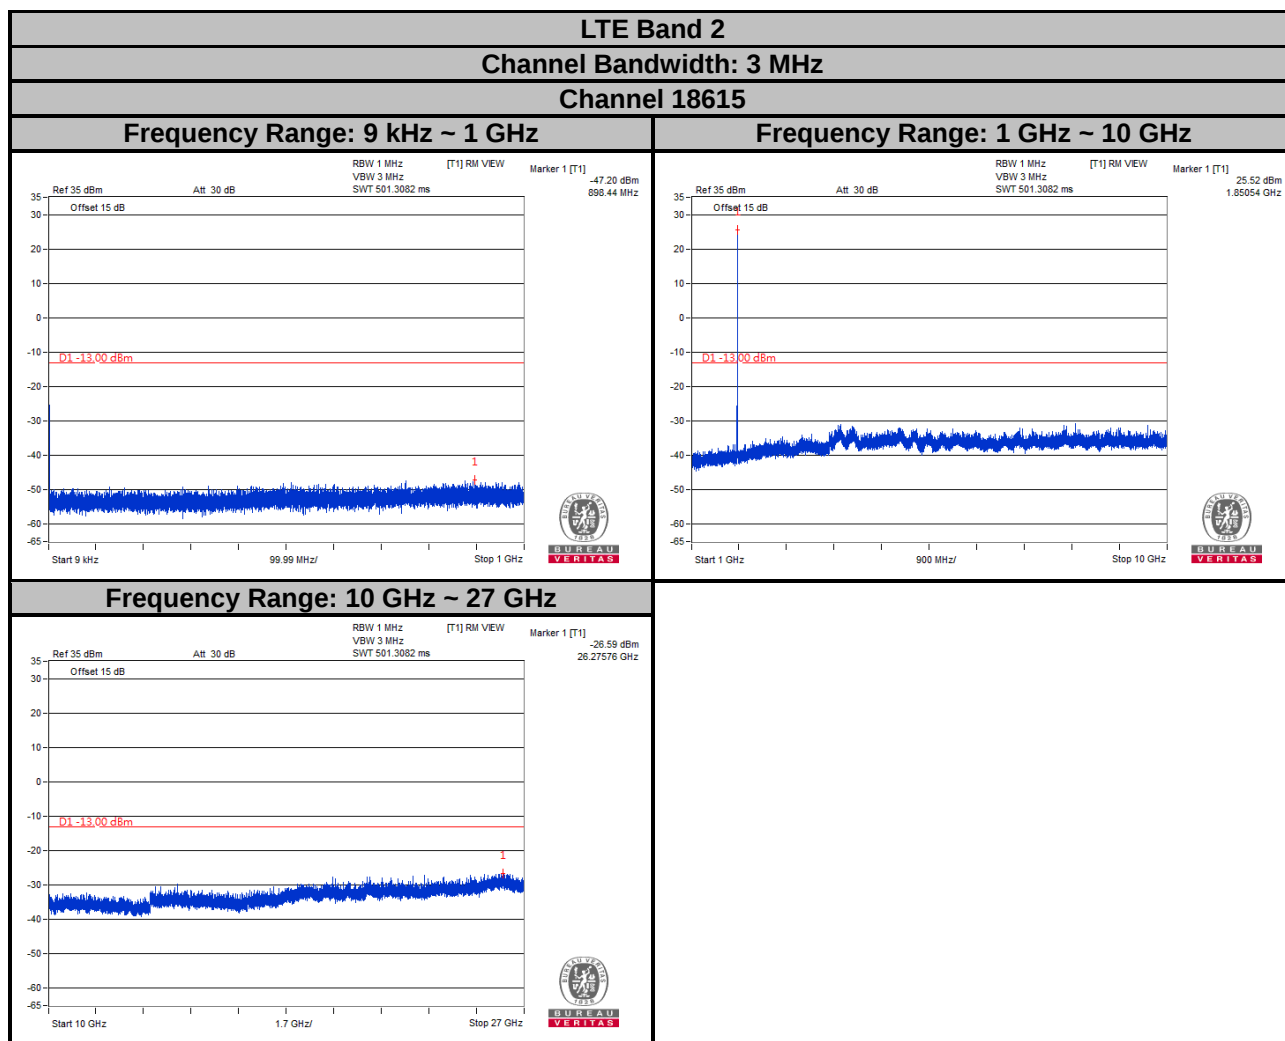


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

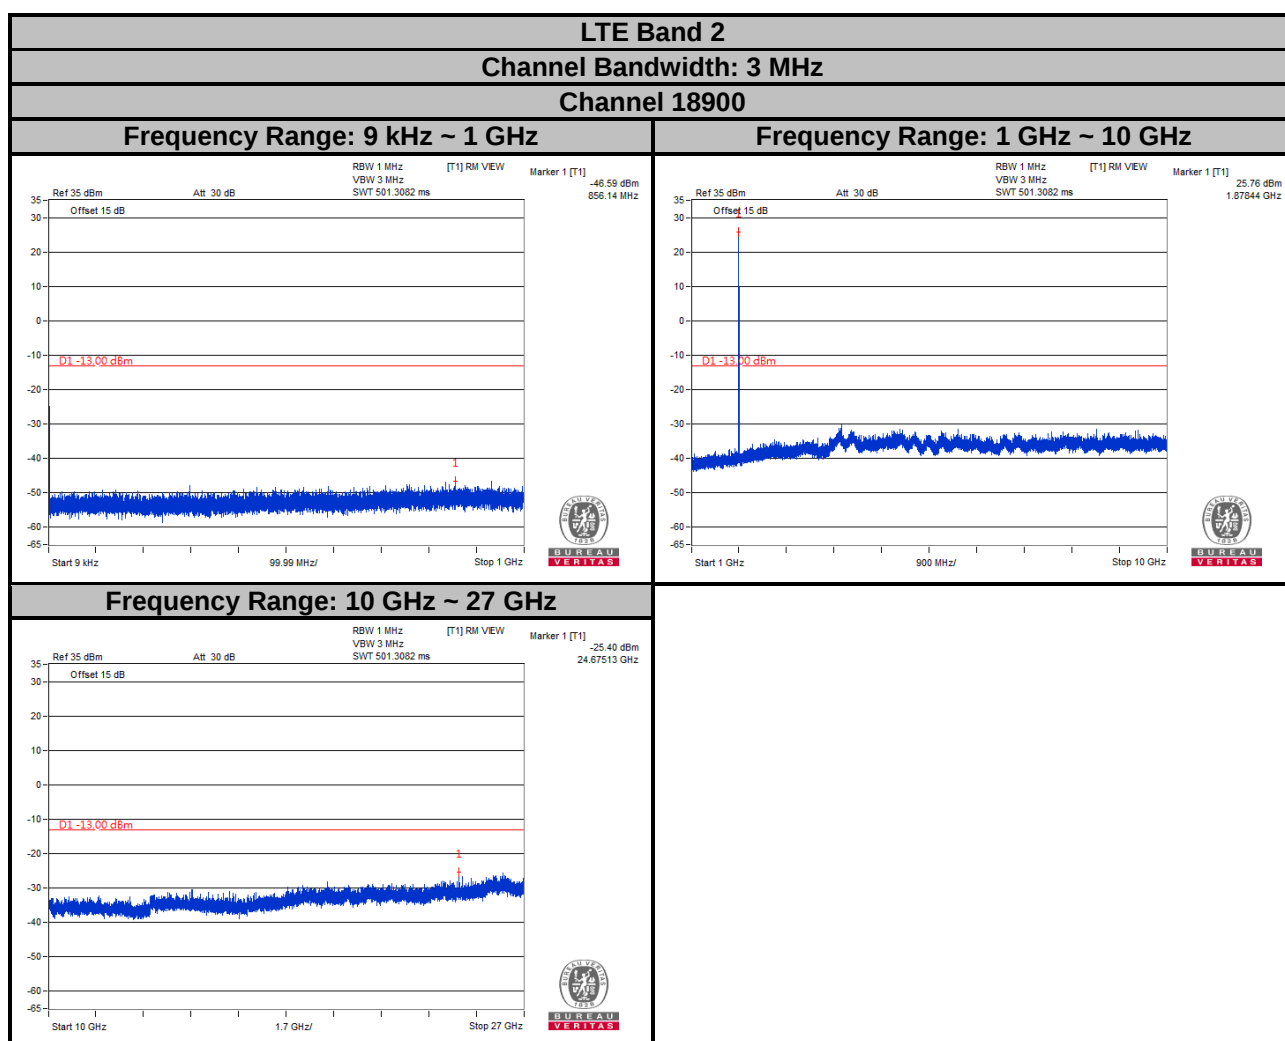


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

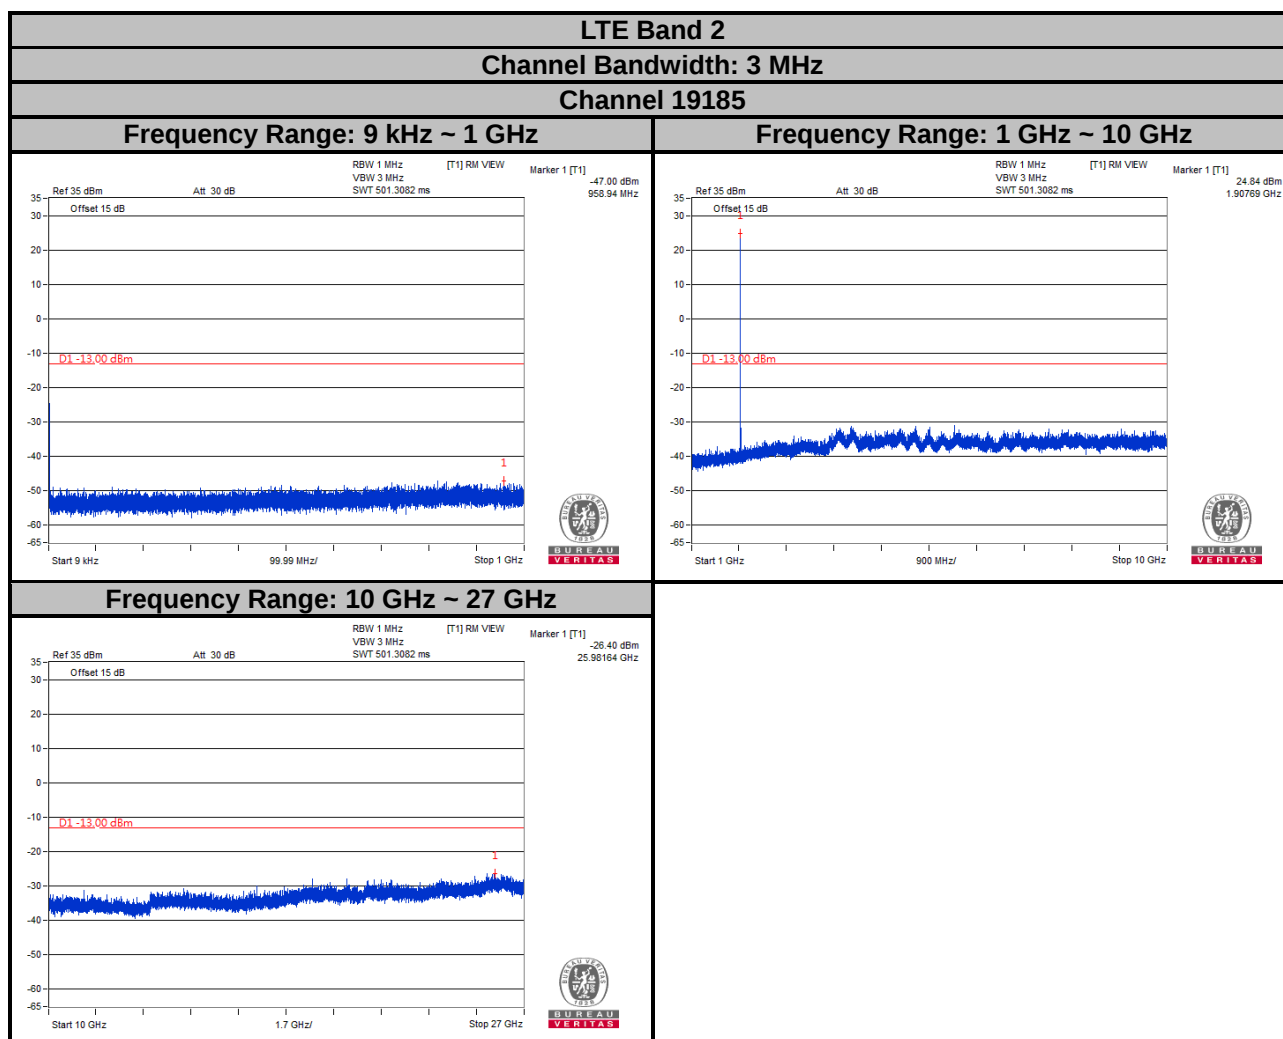


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

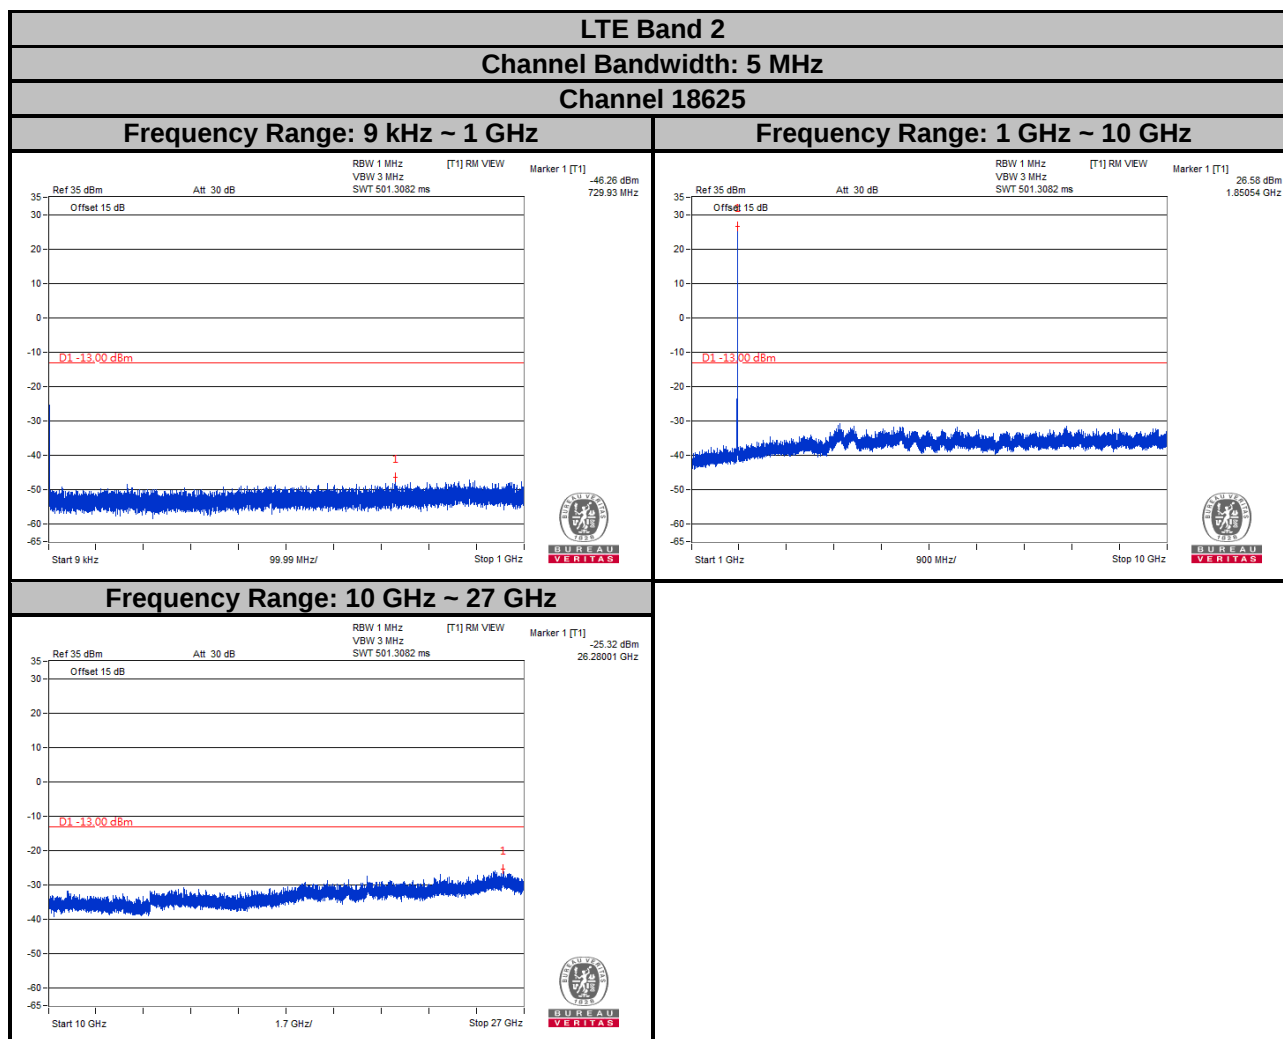


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

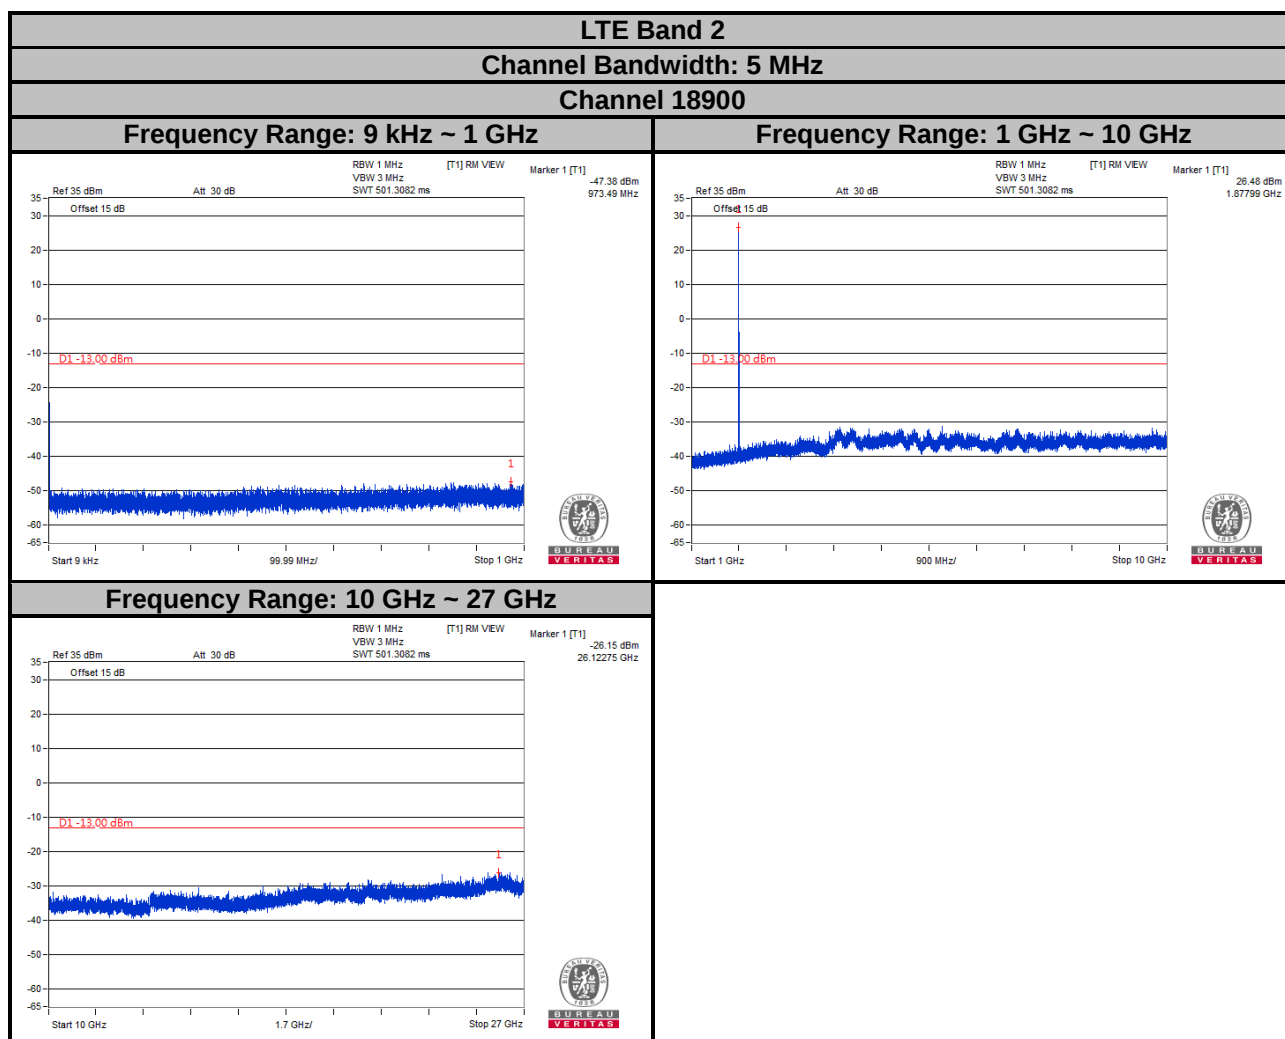


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

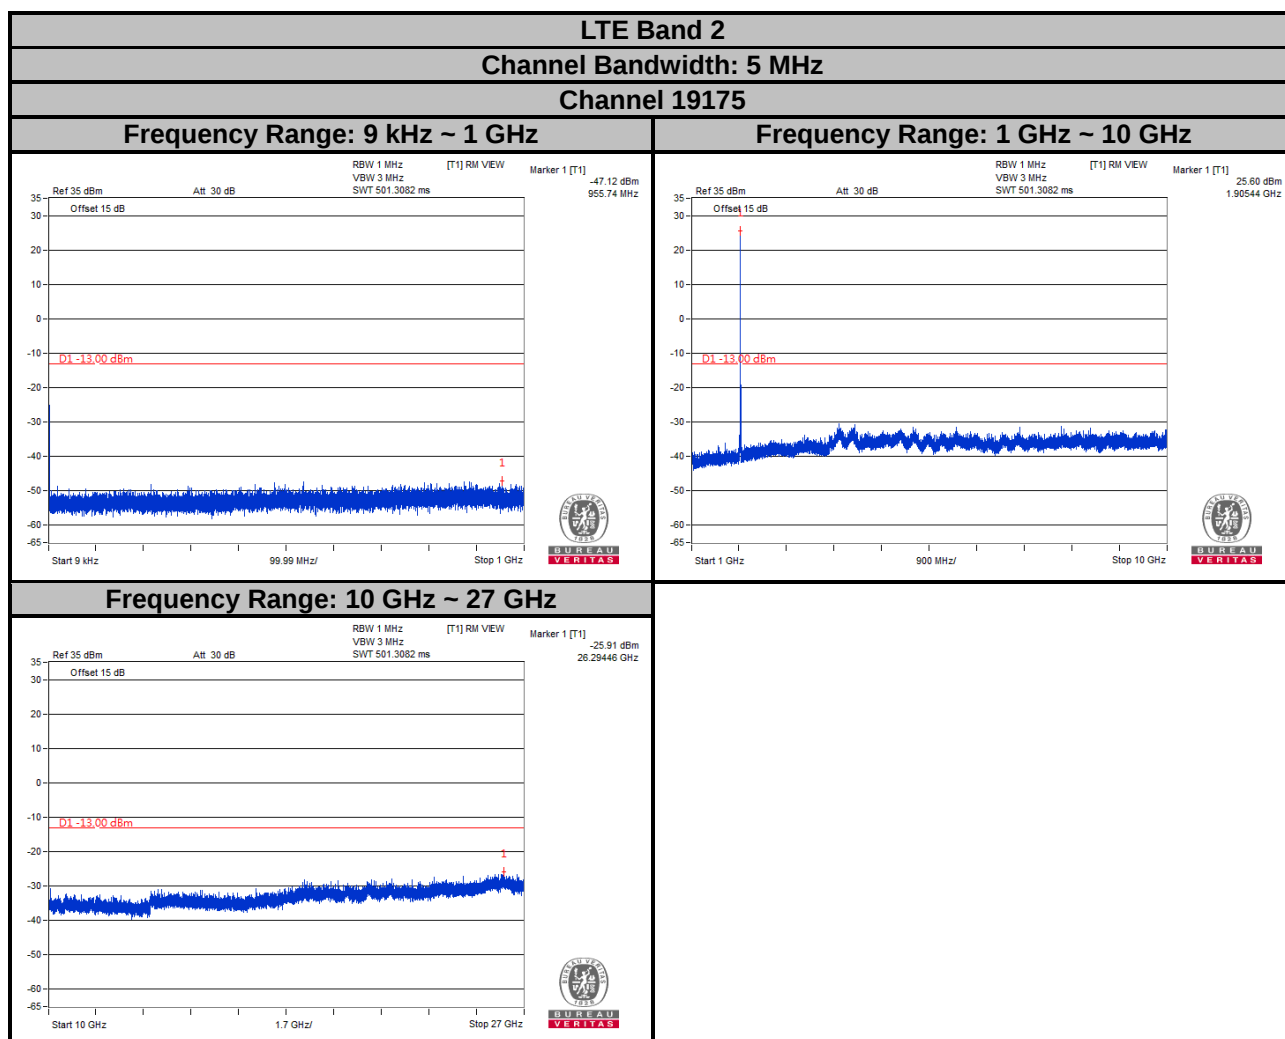


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

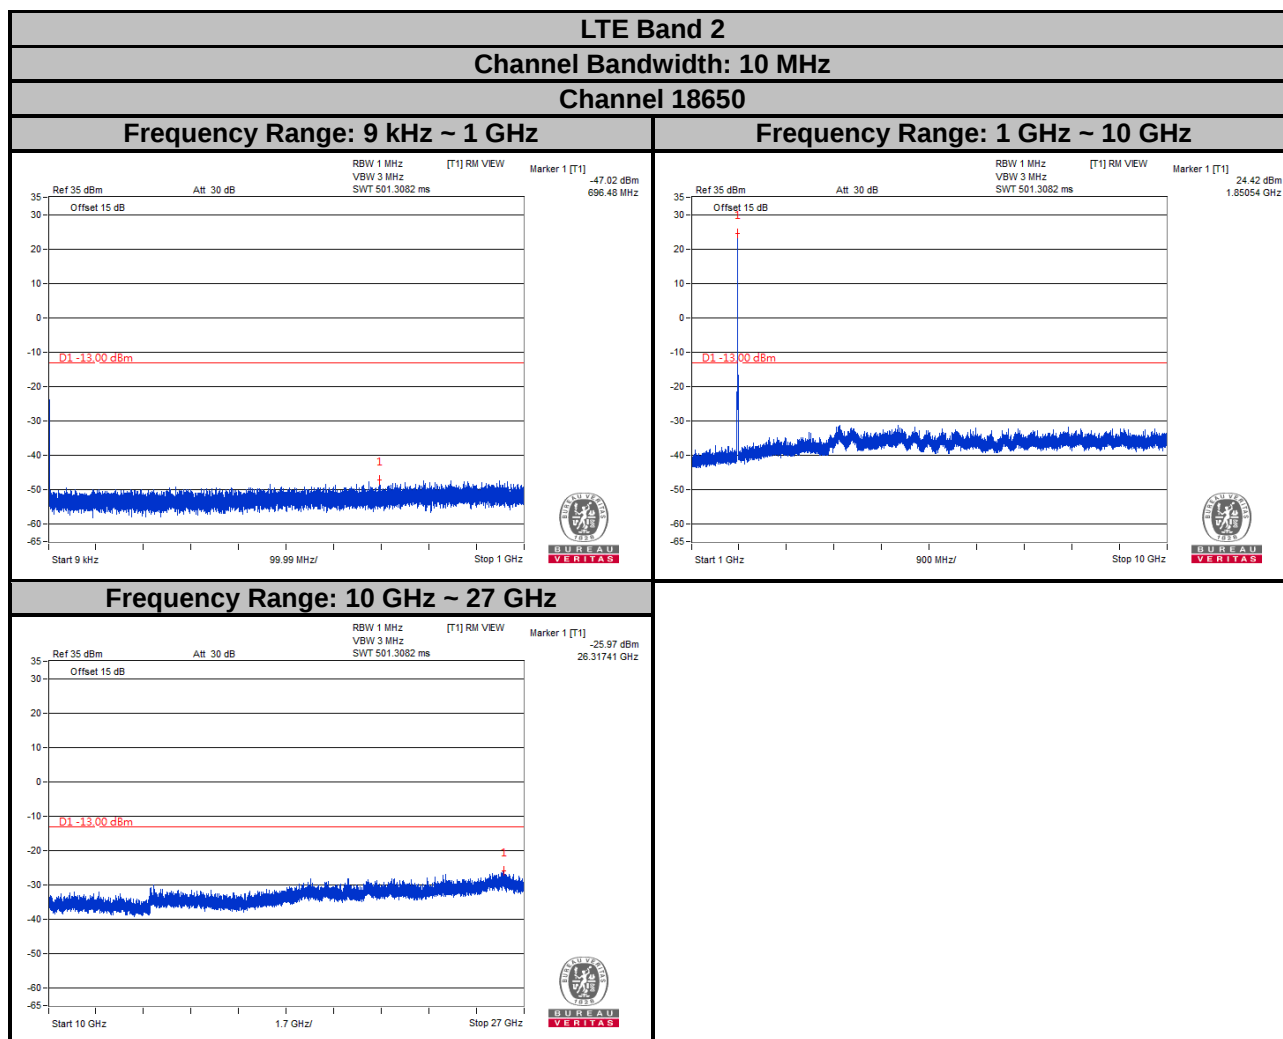


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

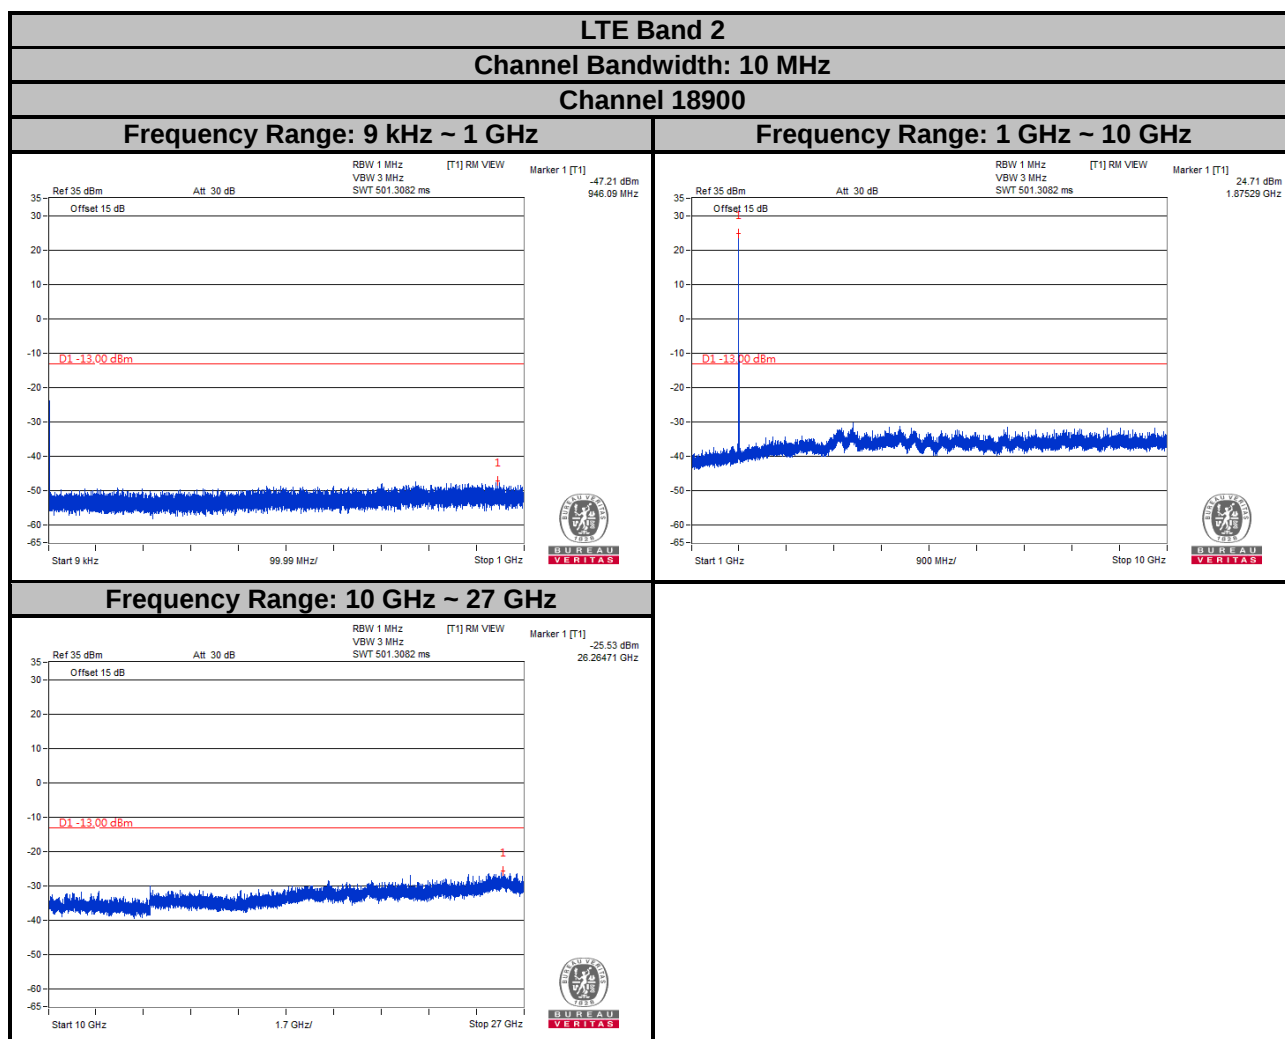


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

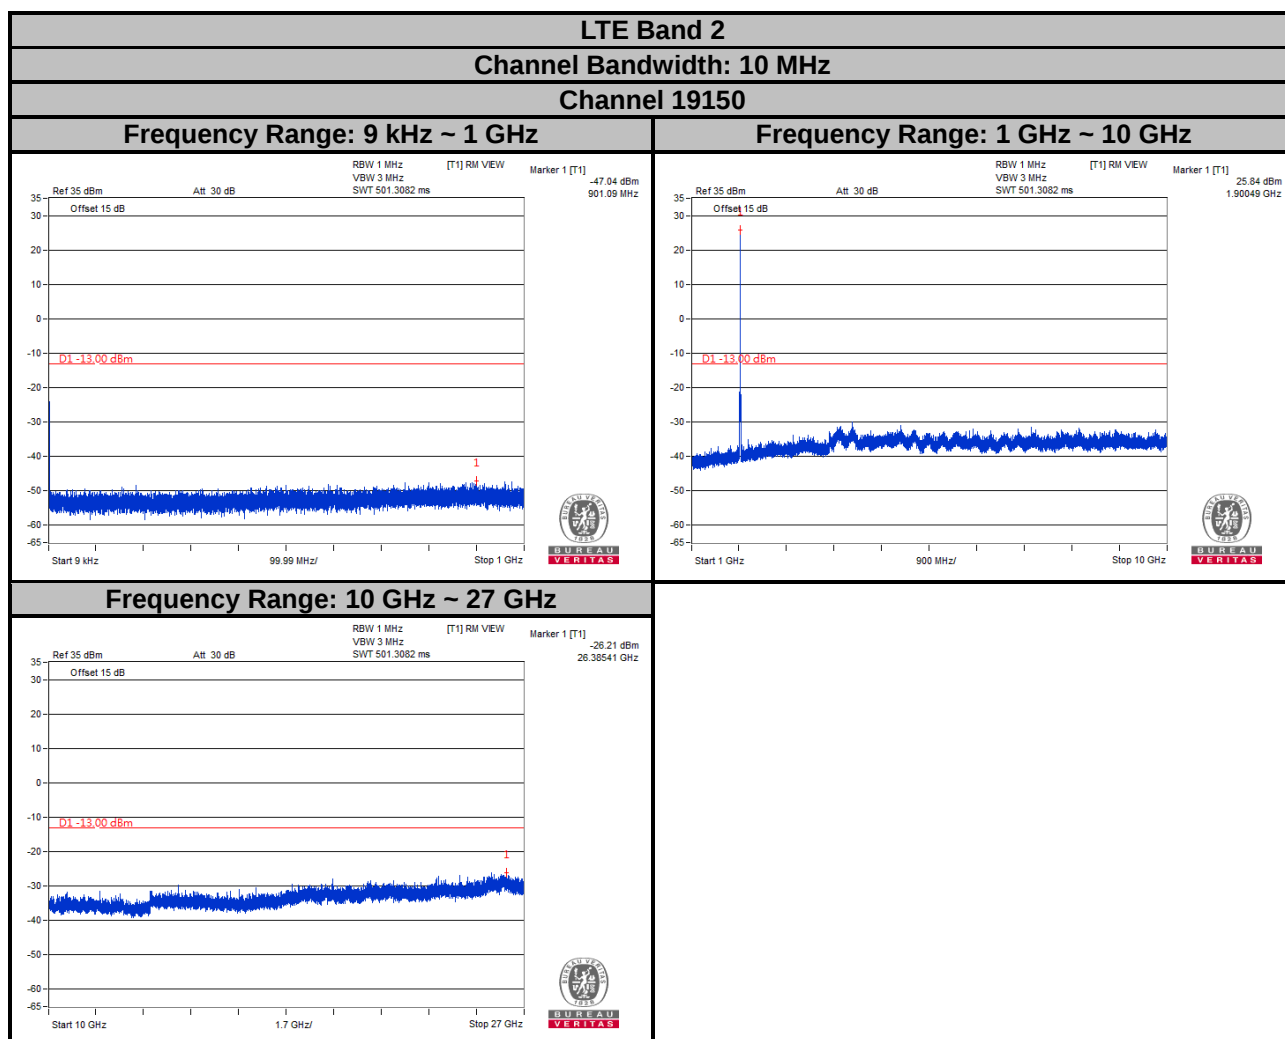


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

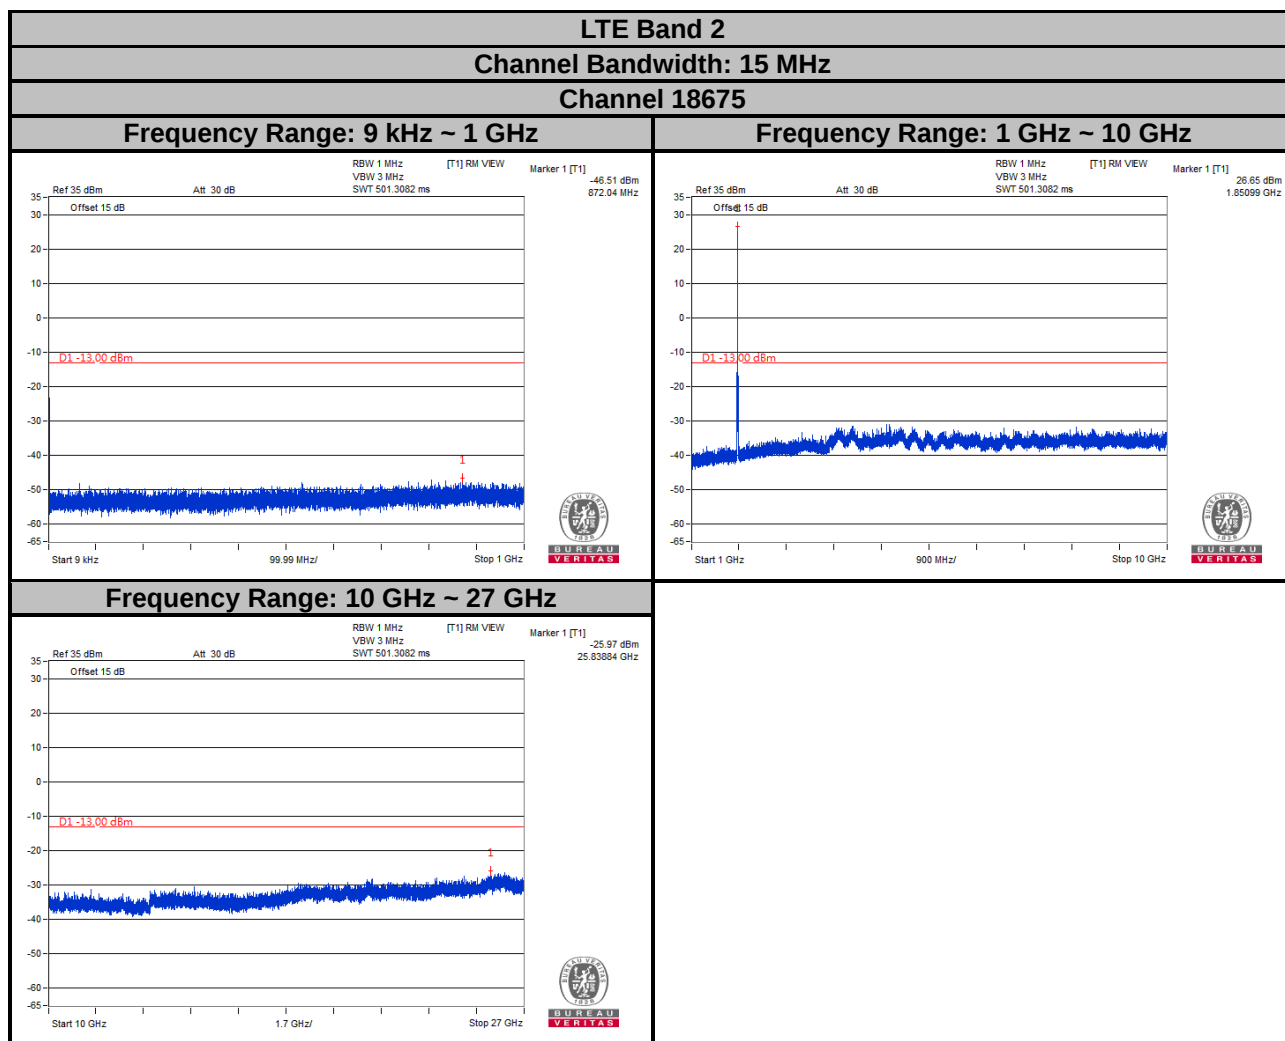


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

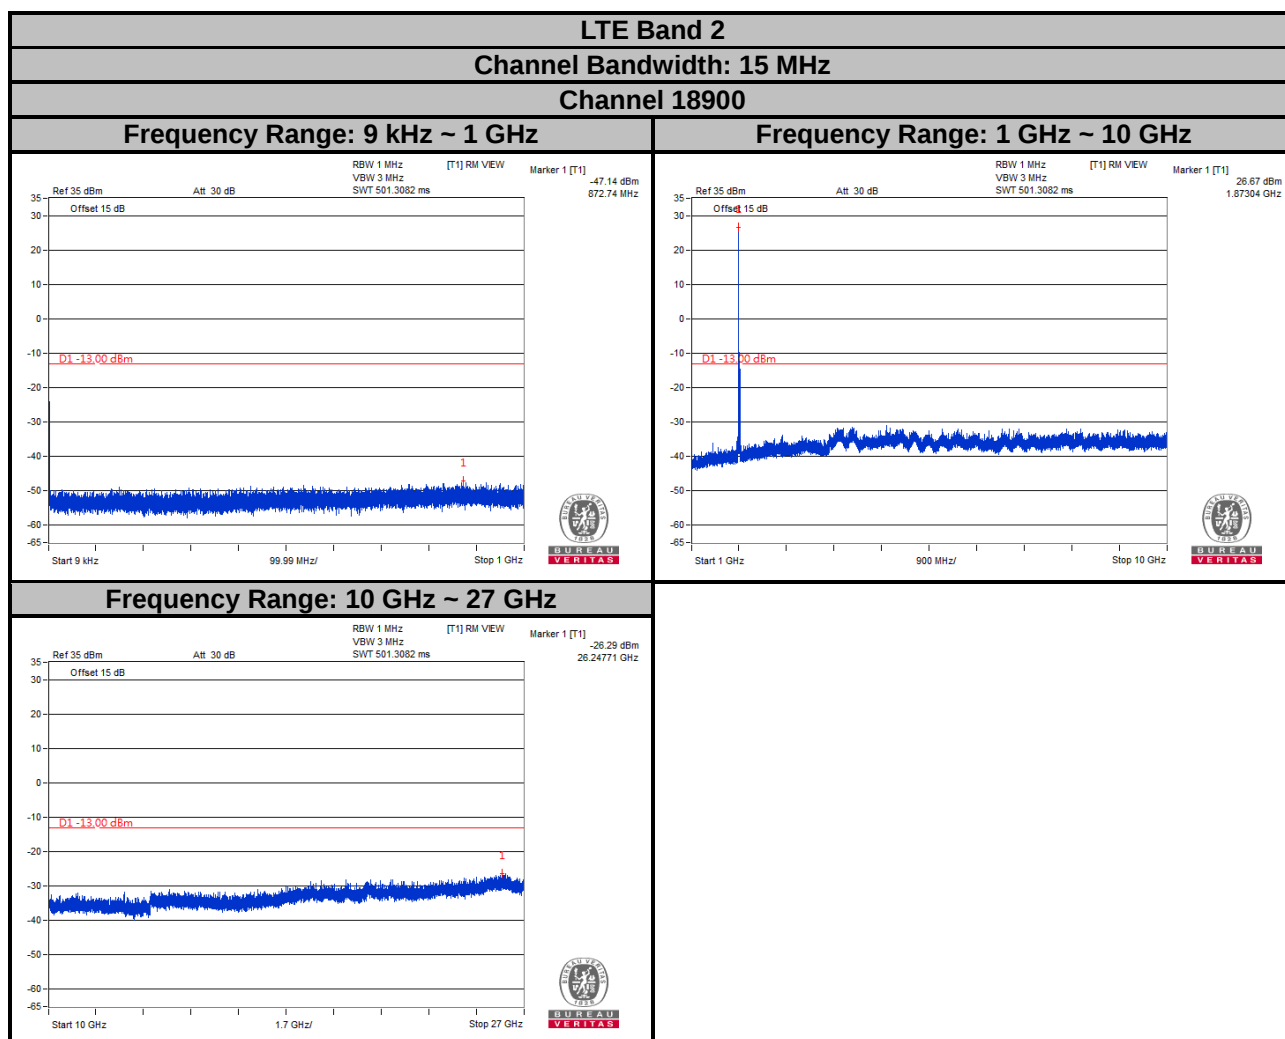


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

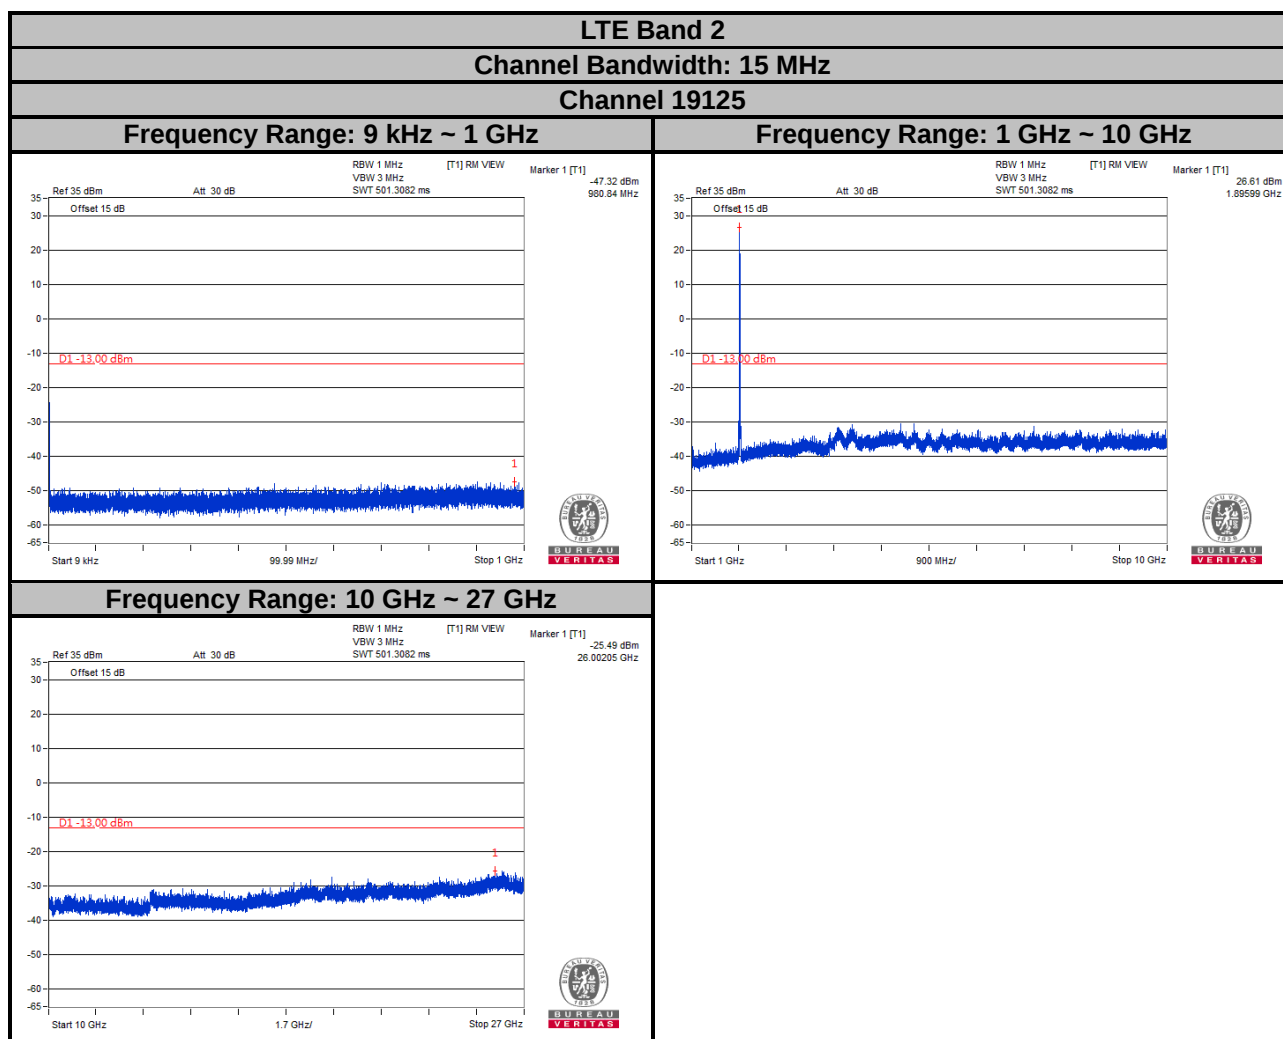


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

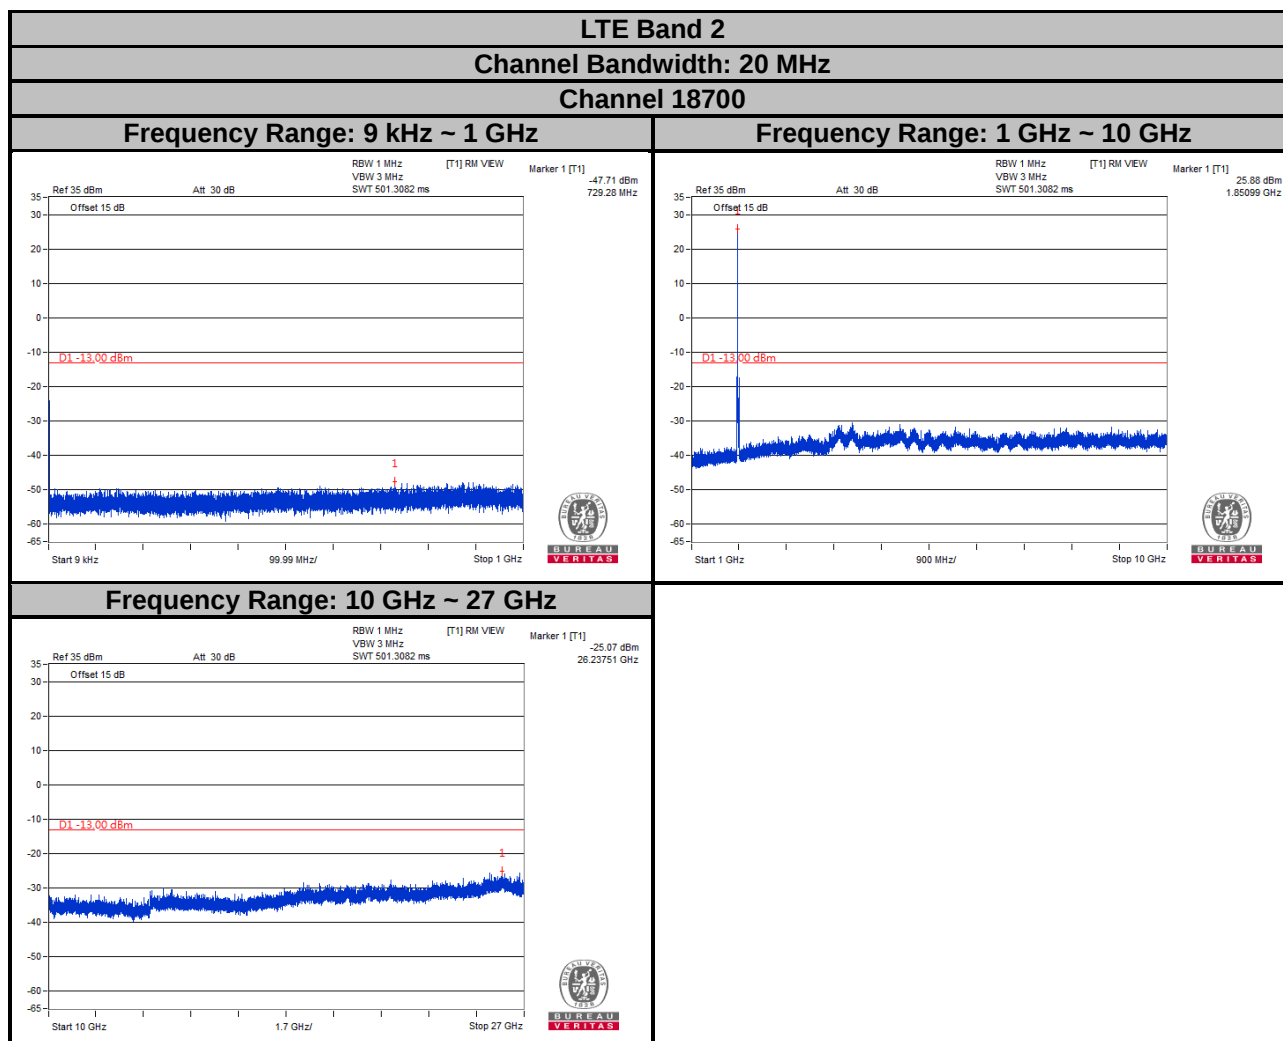

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

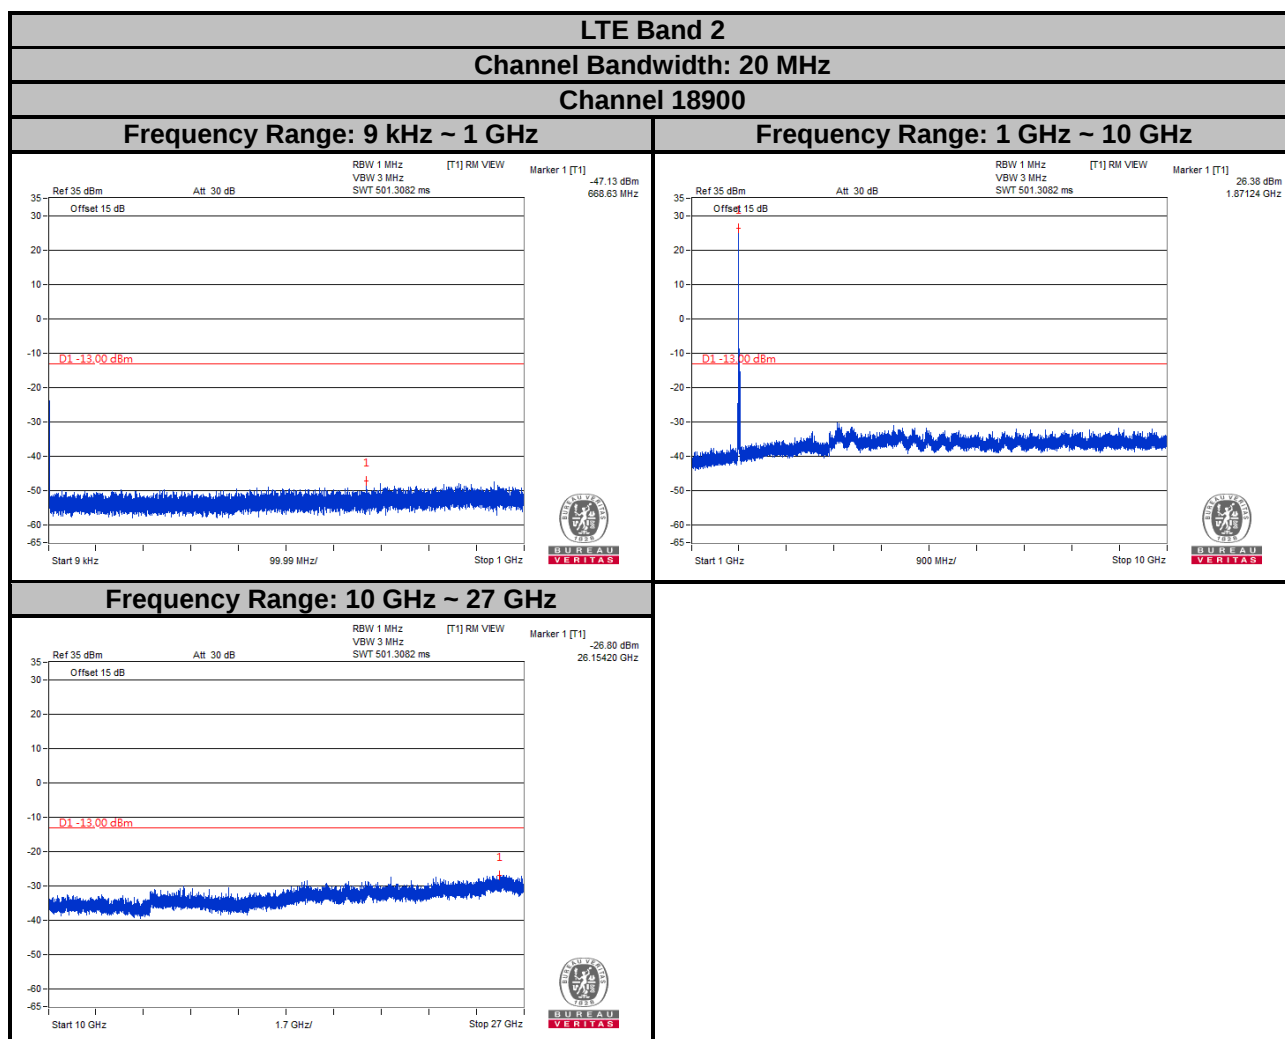

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

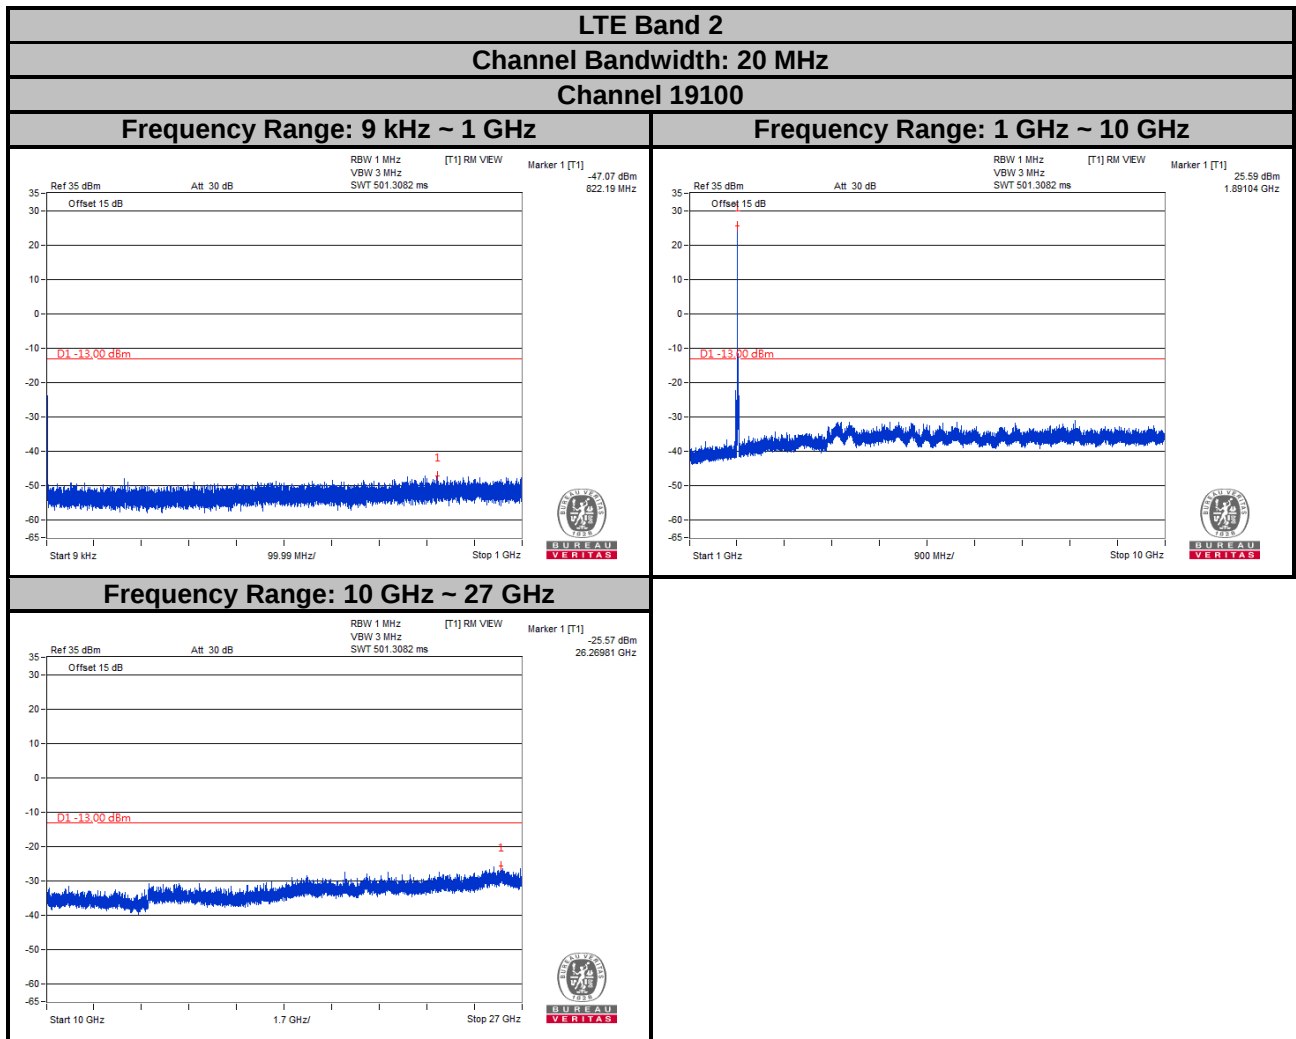

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- c. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

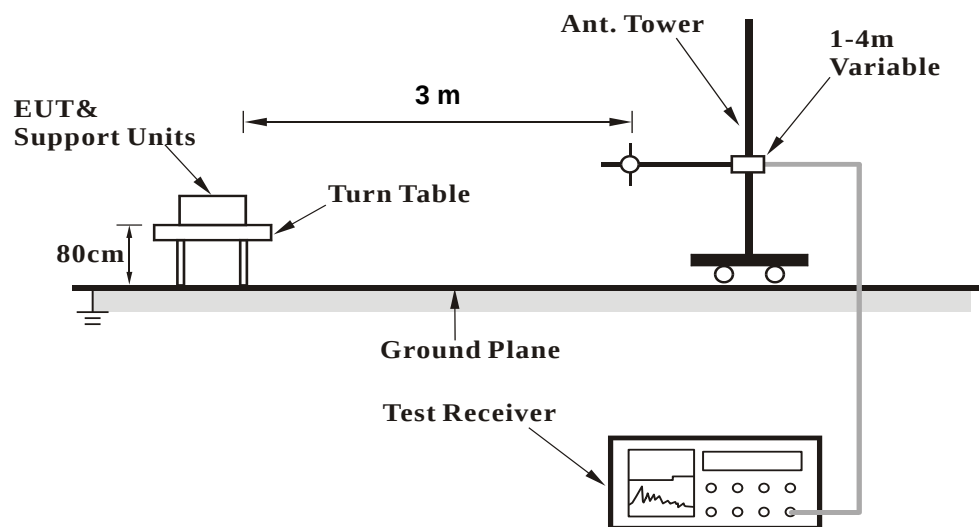

<Radiated Emission above 1 GHz>

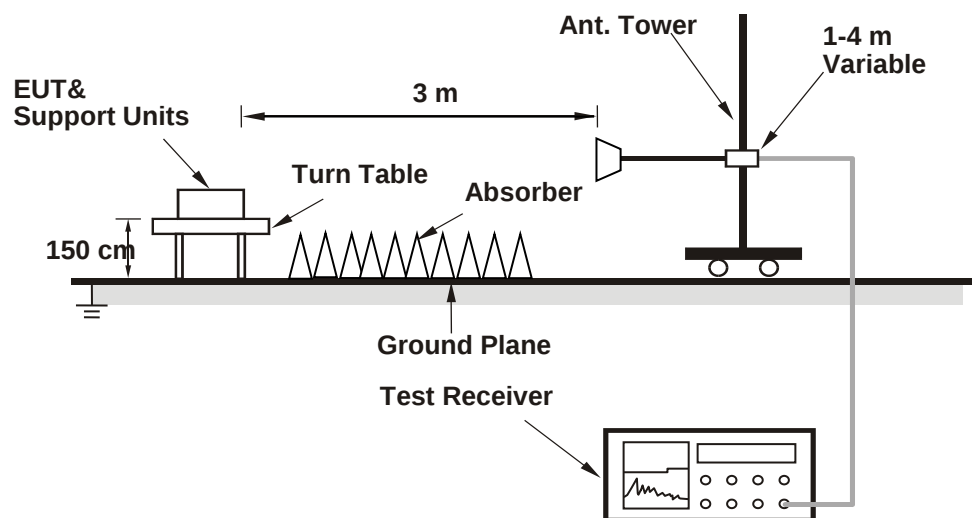

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

Below 1GHz


PCS Mode

Mode	TX channel 810 (1909.8MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	33.88	-48.00	-28.00	-17.10	-45.10	-13.00	-32.10
2	87.23	-44.00	-51.10	-0.10	-51.20	-13.00	-38.20
3	165.80	-63.20	-66.80	-3.00	-69.80	-13.00	-56.80
4	333.61	-64.80	-72.60	4.00	-68.60	-13.00	-55.60
5	698.33	-67.00	-67.60	3.40	-64.20	-13.00	-51.20
6	992.24	-68.20	-62.70	3.40	-59.30	-13.00	-46.30

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

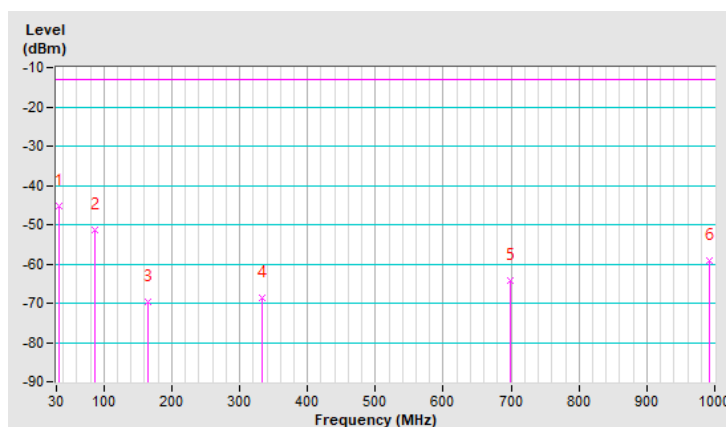


Mode	TX channel 810 (1909.8MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-49.60	-40.10	-19.40	-59.50	-13.00	-46.50
2	58.13	-38.90	-41.60	-4.20	-45.80	-13.00	-32.80
3	234.67	-54.50	-55.10	-1.60	-56.70	-13.00	-43.70
4	335.55	-63.80	-68.40	4.00	-64.40	-13.00	-51.40
5	670.20	-67.00	-65.30	3.60	-61.70	-13.00	-48.70
6	909.79	-65.90	-61.00	3.50	-57.50	-13.00	-44.50

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

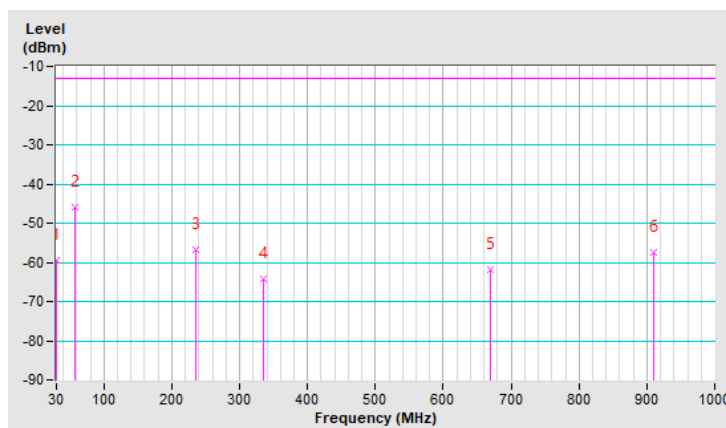


WCDMA Band 2

Mode	TX channel 9400 (1880.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-50.60	-27.20	-19.40	-46.60	-13.00	-33.60
2	81.41	-43.90	-49.50	0.50	-49.00	-13.00	-36.00
3	165.80	-63.20	-66.80	-3.00	-69.80	-13.00	-56.80
4	316.15	-64.00	-72.00	4.00	-68.00	-13.00	-55.00
5	678.93	-67.30	-68.20	3.50	-64.70	-13.00	-51.70
6	909.79	-65.70	-61.70	3.50	-58.20	-13.00	-45.20

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

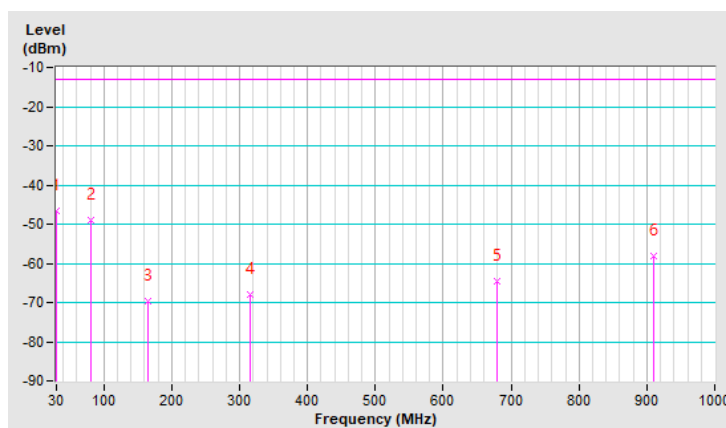


Mode	TX channel 9400 (1880.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	33.88	-38.30	-31.80	-17.10	-48.90	-13.00	-35.90
2	79.47	-53.30	-58.80	0.60	-58.20	-13.00	-45.20
3	278.32	-69.40	-64.50	-1.60	-66.10	-13.00	-53.10
4	343.31	-64.60	-69.20	4.00	-65.20	-13.00	-52.20
5	705.12	-67.50	-65.00	3.50	-61.50	-13.00	-48.50
6	948.59	-67.70	-62.10	3.70	-58.40	-13.00	-45.40

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

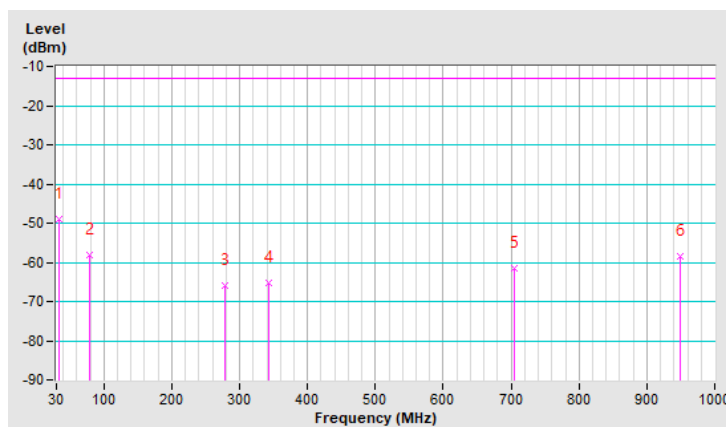


LTE Band 2, Channel Bandwidth: 5MHz

Mode	TX channel 18625 (1852.50MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	33.88	-53.70	-33.70	-17.10	-50.80	-13.00	-37.80
2	87.23	-43.20	-50.30	-0.10	-50.40	-13.00	-37.40
3	334.58	-64.70	-72.40	4.00	-68.40	-13.00	-55.40
4	603.27	-69.40	-71.50	3.70	-67.80	-13.00	-54.80
5	829.28	-70.10	-67.10	3.90	-63.20	-13.00	-50.20
6	916.58	-69.60	-65.20	3.60	-61.60	-13.00	-48.60

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

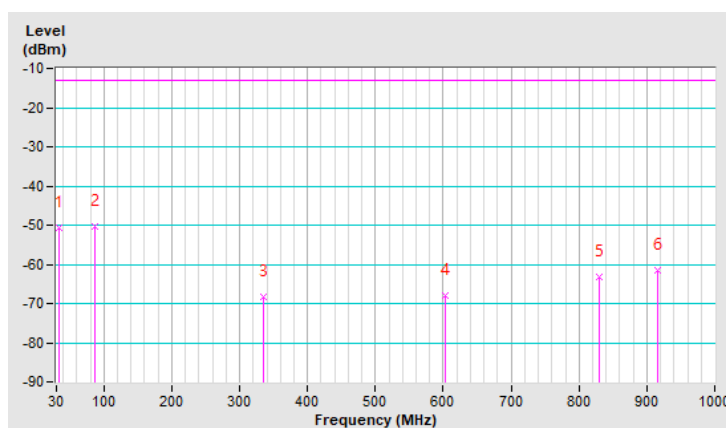


Mode	TX channel 18625 (1852.50MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-39.50	-31.70	-18.30	-50.00	-13.00	-37.00
2	81.41	-52.60	-57.70	0.50	-57.20	-13.00	-44.20
3	166.77	-63.10	-63.50	-2.90	-66.40	-13.00	-53.40
4	275.41	-68.90	-64.20	-1.60	-65.80	-13.00	-52.80
5	656.62	-67.10	-65.10	3.60	-61.50	-13.00	-48.50
6	943.74	-67.00	-61.60	3.70	-57.90	-13.00	-44.90

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

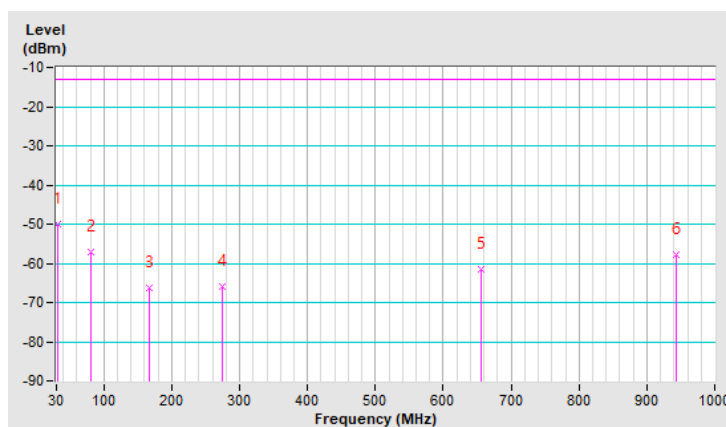

Above 1GHz
PCS 1900

Mode	TX channel 512 (1850.2MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3700.40	-60.30	-51.80	1.40	-50.40	-13.00	-37.40
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3700.40	-58.20	-50.00	1.40	-48.60	-13.00	-35.60

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

Mode	TX channel 661 (1880.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-59.70	-51.20	1.30	-49.90	-13.00	-36.90
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-57.70	-49.40	1.30	-48.10	-13.00	-35.10

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

Mode	TX channel 810 (1909.8MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3819.60	-59.80	-51.50	1.40	-50.10	-13.00	-37.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3819.60	-57.50	-49.30	1.40	-47.90	-13.00	-34.90

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

WCDMA Band 2

Mode	TX channel 9262 (1852.4MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3704.80	-59.60	-51.10	1.40	-49.70	-13.00	-36.70
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3704.80	-57.30	-49.10	1.40	-47.70	-13.00	-34.70

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

Mode	TX channel 9400 (1880.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-59.30	-50.80	1.30	-49.50	-13.00	-36.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-57.10	-48.80	1.30	-47.50	-13.00	-34.50

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

Mode	TX channel 9538 (1907.6MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.20	-59.60	-51.30	1.40	-49.90	-13.00	-36.90
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.20	-57.50	-49.30	1.40	-47.90	-13.00	-34.90

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 1.4MHz

Mode	TX channel 18607 (1850.70MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3701.40	-61.90	-53.40	1.40	-52.00	-13.00	-39.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3701.40	-59.30	-51.10	1.40	-49.70	-13.00	-36.70

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-61.80	-53.30	1.30	-52.00	-13.00	-39.00
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-59.40	-51.10	1.30	-49.80	-13.00	-36.80

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

Mode	TX channel 19193 (1909.30MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3818.60	-61.20	-52.90	1.40	-51.50	-13.00	-38.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3818.60	-59.70	-51.50	1.40	-50.10	-13.00	-37.10

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 5MHz

Mode	TX channel 18625 (1852.50MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3705.00	-61.40	-52.90	1.40	-51.50	-13.00	-38.50
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3705.00	-59.00	-50.80	1.40	-49.40	-13.00	-36.40

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-62.00	-53.50	1.30	-52.20	-13.00	-39.20
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-59.60	-51.30	1.30	-50.00	-13.00	-37.00

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

Mode	TX channel 19175 (1907.50MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.00	-61.80	-53.50	1.40	-52.10	-13.00	-39.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.00	-59.80	-51.60	1.40	-50.20	-13.00	-37.20

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

LTE Band 2, Channel Bandwidth 20MHz

Mode	TX channel 18700 (1860.00MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3720.00	-62.00	-53.50	1.40	-52.10	-13.00	-39.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3720.00	-59.20	-51.00	1.40	-49.60	-13.00	-36.60

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-61.60	-53.10	1.30	-51.80	-13.00	-38.80
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-59.80	-51.50	1.30	-50.20	-13.00	-37.20

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

Mode	TX channel 19100 (1900.00MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3800.00	-62.00	-53.60	1.30	-52.30	-13.00	-39.30
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3800.00	-59.80	-51.60	1.30	-50.30	-13.00	-37.30

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---