




FCC RADIO TEST REPORT

FCC ID : 2A3G3-WMU721X
Equipment : Wi-Fi 802.11ax 2x2 Tri-band Module
Brand Name : Emwicon
Model Name : WMU721X (X=2,3,4,5,6,7)
Applicant : Emwicon Corporation
7F.-5, No. 258, Liancheng Rd., Zhonghe Dist.,
New Taipei City 235, Taiwan (R.O.C.)
Manufacturer : Emwicon Corporation
7F.-5, No. 258, Liancheng Rd., Zhonghe Dist.,
New Taipei City 235, Taiwan (R.O.C.)
Standard : FCC Part 15 Subpart C §15.247

The product was received on May 16, 2024 and testing was performed from Jun. 06, 2024 to Aug. 20, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	7
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	12
2.6 Measurement Results Explanation Example.....	12
3 Test Result.....	13
3.1 6dB and 99% Bandwidth Measurement	13
3.2 Output Power Measurement.....	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	16
3.5 Radiated Band Edges and Spurious Emission Measurement	17
3.6 AC Conducted Emission Measurement.....	21
3.7 Antenna Requirements.....	23
4 List of Measuring Equipment	24
5 Measurement Uncertainty	26
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR450901B	01	Initial issue of report	Oct. 15, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	0.15 dB under the limit at 30.00 MHz
3.6	15.207	AC Conducted Emission	Pass	15.47 dB under the limit at 0.15 MHz
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The purpose of different model name is for connector and interface.

Reviewed by: Keven Cheng

Report Producer: Wilda Wei



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and Wi-Fi 6GHz 802.11ax.
Sample 1	WMU7212
Sample 2	WMU7213
Sample 3	WMU7214-U
Sample 4	WMU7214-P
Sample 5	WMU7215-U
Sample 6	WMU7215-P
Sample 7	WMU7216-U
Sample 8	WMU7216-P
Sample 9	WMU7217-U
Sample 10	WMU7217-P
Antenna Type	Dipole Antenna: <Model: RFA-27-H60-B-C1035-1> <Model: RFA-27-H60-B-C1035-4> <Model: RFA-27-C2-B-C1035-1> <Model: RFA-27-C2-B-C1035-4> <Model: ADT7352> <Model: RFA-27-C55-U-B70-1> <Model: RFA-27-C55-U-B70-4> <Model: RFA-27-AP152R-C1035> <Model: RFA-27-AP152R-4BC1035> <Model: RFA-27-JP326-C1035> <Model: RFA-27-JP326-4BC1035> PCB Antenna: <Model: ATB7214>

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	<Model: RFA-27-H60-B-C1035-1>: 1.34 <Model: RFA-27-H60-B-C1035-4>: 1.34 <Model: RFA-27-C2-B-C1035-1>: 1.91 <Model: RFA-27-C2-B-C1035-4>: 1.91 <Model: RFA-27-C55-U-B70-1>: 1.84 <Model: RFA-27-C55-U-B70-4>: 1.84 <Model: RFA-27-JP326-C1035>: 2.79 <Model: RFA-27-JP326-4BC1035>: 2.79 <Model: RFA-27-AP152R-C1035>: 2.31 <Model: RFA-27-AP152R-4BC1035>: 2.31 <Model: ADT7352>: 2.66 <Model: ATB7214>: 2.57

Remark:

1. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
2. The Sample1~10 has identical PCB layout only path loss difference & the sample3~10 have same trace design only Connector is difference, above is declared by manufacturer.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY, CO07-HY, 03CH13-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps

Bluetooth – LE / GFSK	
Radiated Test Cases	<Sample 1> Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps <Sample 2> Mode 7: Bluetooth Tx CH39_2480 MHz_2Mbps <Sample 3> Mode 8: Bluetooth Tx CH39_2480 MHz_2Mbps <Sample 8> Mode 56: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 57: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 58: Bluetooth Tx CH39_2480 MHz_1Mbps Mode 59: Bluetooth Tx CH00_2402 MHz_2Mbps Mode 60: Bluetooth Tx CH19_2440 MHz_2Mbps Mode 61: Bluetooth Tx CH39_2480 MHz_2Mbps
	AC Conducted Emission Mode 1: WLAN (2.4GHz) +Bluetooth Link + Adapter for Sample 1
Remark: 1. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. 2. For Radiated Test Cases, the tests were performed with Sample 1, 2, 3, and 8. 3. For Conducted test items are verified Sample 1~10 and the worst case is Sample 7 the report only performed Sample 7 test results. 4. For Radiated spurious emissions, tests were performed using high-gain antennas in dipole &PCB antenna.	

2.3 Connection Diagram of Test System

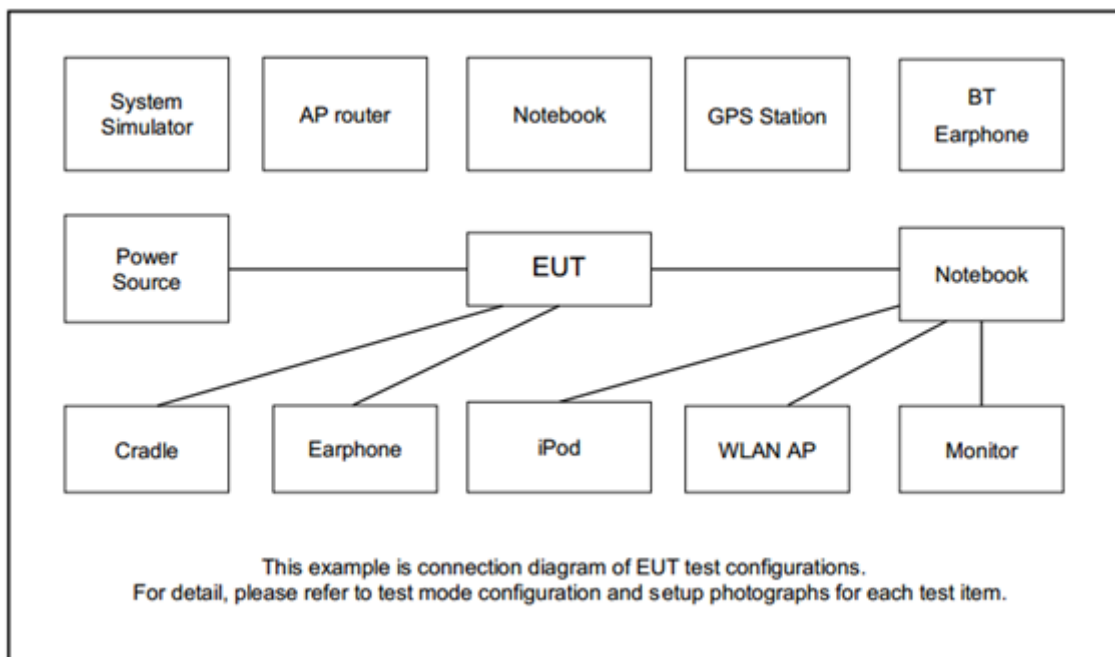

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	Netgear	RAXE500	PY320300508	N/A	Unshielded, 1.8m
3.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
4.	Notebook	Acer	N18Q13	PD9AX201NG	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
5.	Adapter	Jiangsu Sunward	AD36AM050600	FCC DoC	N/A	Unshielded, 1.2m
6.	Fixture	AAEON	UPS-APLC2-A20-0432	N/A	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “RtBluetoothMP.dll v.5.3.2.37 RTLBTAPP v.5.2.3.58” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

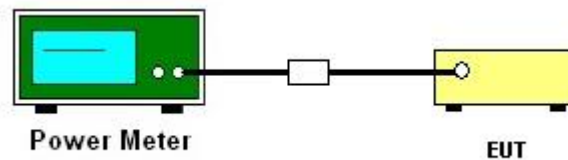

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

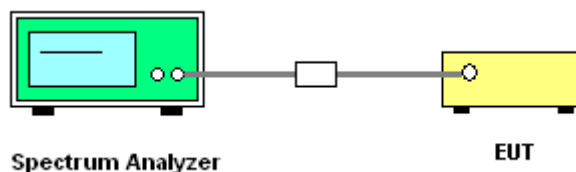

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

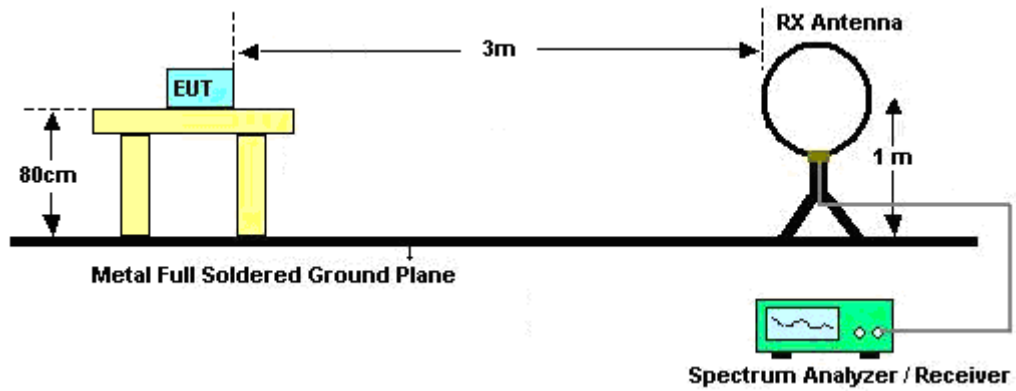


For radiated test from 30MHz to 1GHz

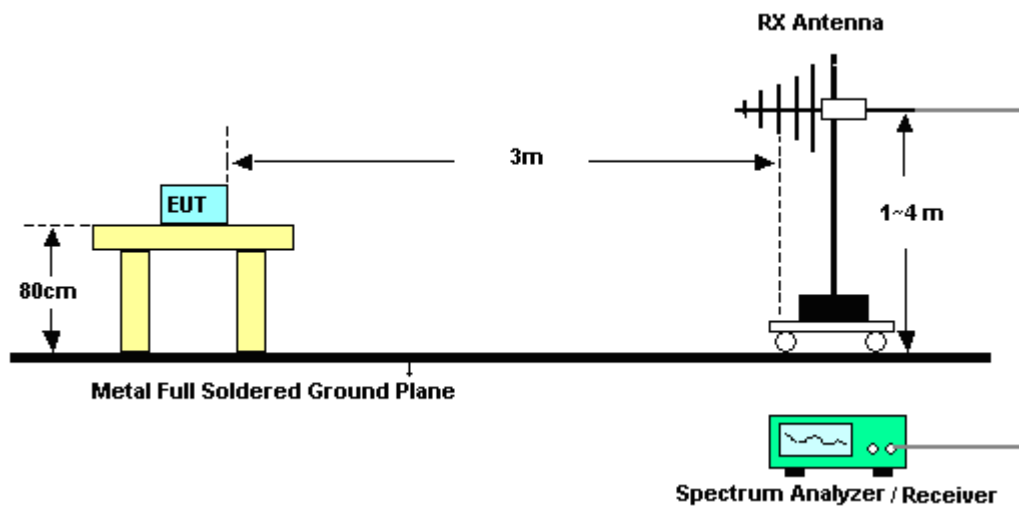

For radiated test from 1GHz to 18GHz

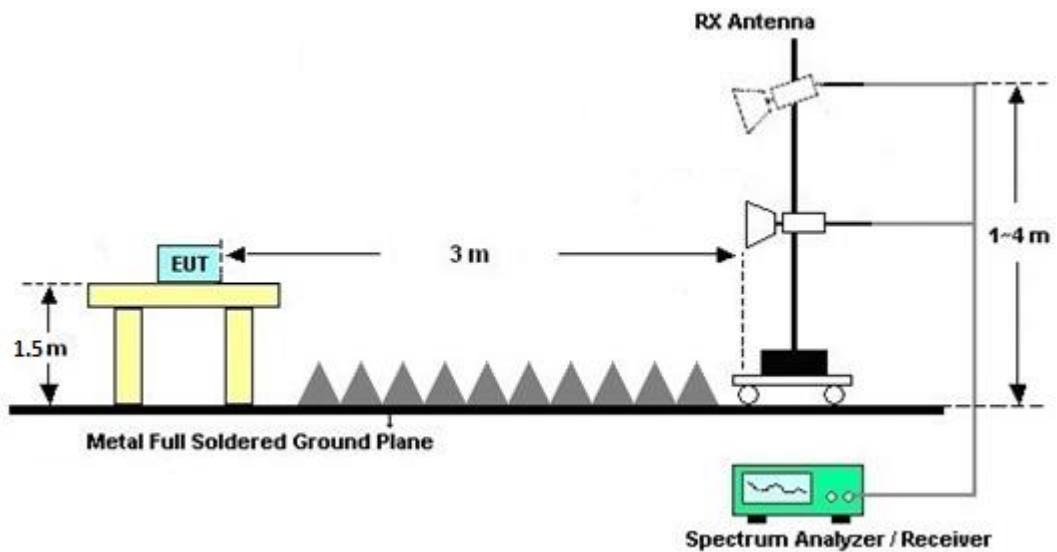

For radiated test above 18GHz

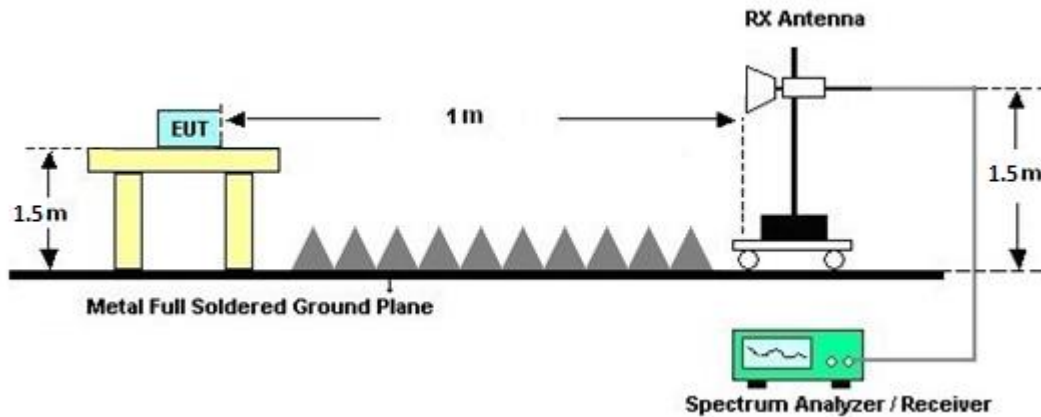

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

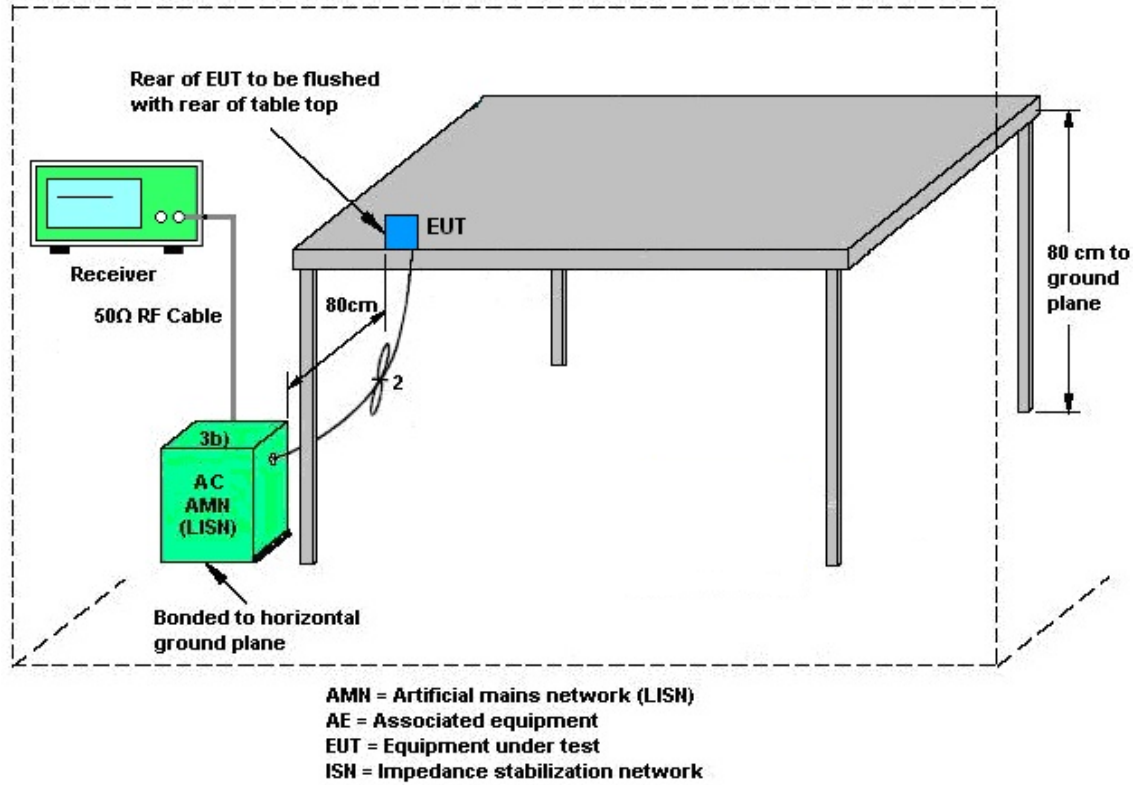

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz~18GHz	Aug. 17, 2023	Jun. 28, 2024~ Aug. 15, 2024	Aug. 16, 2024	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1212	1GHz~18GHz	Mar. 21, 2024	Aug. 16, 2024~ Aug. 20, 2024	Mar. 20, 2025	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz~40GHz	Nov. 24, 2023	Aug. 16, 2024~ Aug. 20, 2024	Nov. 23, 2023	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	40103 & 07	30MHz~1GHz	Apr. 12, 2024	Aug. 16, 2024~ Aug. 20, 2024	Apr. 11, 2025	Radiation (03CH13-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Aug. 16, 2024~ Aug. 20, 2024	Sep. 11, 2024	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 15, 2024	Jun. 28, 2024~ Aug. 20, 2024	May 14, 2025	Radiation (03CH13-HY)
Preamplifier	EM Electronics	EM01G18G	060803	1GHz~18GHz	Jan. 09, 2024	Jun. 28, 2024~ Aug. 20, 2024	Jan. 08, 2025	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 27, 2024	Jun. 28, 2024~ Aug. 20, 2024	May 26, 2025	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187282	9kHz~1GHz	Dec. 13, 2023	Jun. 28, 2024~ Aug. 20, 2024	Dec. 12, 2024	Radiation (03CH13-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290045	20Hz~8.4GHz	Apr. 17, 2024	Aug. 16, 2024~ Aug. 20, 2024	Apr. 16, 2025	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Jan. 18, 2024	Jun. 28, 2024~ Aug. 20, 2024	Jan. 17, 2025	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 OSS	SN2	3GHz High Pass Filter	Jul. 10, 2023	Jun. 28, 2024~ Jul. 08, 2024	Jul. 09, 2024	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 OSS	SN2	3GHz High Pass Filter	Jul. 09, 2024	Jul. 09, 2024 ~ Aug. 20, 2024	Jul. 08, 2025	Radiation (03CH13-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN12	1.53GHz Low Pass Filter	Sep. 12, 2023	Jun. 28, 2024~ Aug. 20, 2024	Sep. 11, 2024	Radiation (03CH13-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN5	6.75GHz High Pass Filter	Mar. 08, 2024	Jun. 28, 2024~ Aug. 20, 2024	Mar. 07, 2025	Radiation (03CH13-HY)
Filter	Wainwright	WHKX6-7268- 9200-26500-40 CD	SN4	9GHz High Pass Filter	May 22, 2024	Jun. 28, 2024~ Aug. 20, 2024	May 21, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 07, 2024	Jun. 28, 2024~ Aug. 20, 2024	Feb. 06, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30MHz~18GHz	Feb. 07, 2024	Jun. 28, 2024~ Aug. 20, 2024	Feb. 06, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30MHz~18GHz	Feb. 07, 2024	Jun. 28, 2024~ Aug. 20, 2024	Feb. 06, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Dec. 18, 2023	Jun. 28, 2024~ Aug. 20, 2024	Dec. 17, 2024	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4	9kHz~30MHz	Feb. 21, 2024	Jun. 28, 2024~ Aug. 20, 2024	Feb. 20, 2025	Radiation (03CH13-HY)
Hygrometer	TECPEL	DTM-303A	TP215159	N/A	Sep. 13, 2023	Jun. 28, 2024~ Aug. 20, 2024	Sep. 12, 2024	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 28, 2024~ Aug. 20, 2024	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Jun. 28, 2024~ Aug. 20, 2024	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jun. 28, 2024~ Aug. 20, 2024	N/A	Radiation (03CH13-HY)
Software	Audix	N/A	RK-002392	N/A	N/A	Jun. 28, 2024~ Aug. 20, 2024	N/A	Radiation (03CH13-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Jul. 10, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jul. 10, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	9561-FN00373	9kHz-200MHz	Oct. 20, 2023	Jul. 10, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz-30MHz	Mar. 14, 2024	Jul. 10, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Jul. 10, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Jul. 10, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz-3.6GHz	Sep. 20, 2023	Jul. 10, 2024	Sep. 19, 2024	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Jun. 06, 2024~ Jun. 21, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO35 (NO:109)	10MHz-6GHz	Jan. 15, 2024	Jun. 06, 2024~ Jun. 21, 2024	Jan. 14, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz-40GHz	Aug. 23, 2023	Jun. 06, 2024~ Jun. 21, 2024	Aug. 22, 2024	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version:1.0(2024-04-11)	N/A	Conducted Items	N/A	Jun. 06, 2024~ Jun. 21, 2024	N/A	Conducted (TH05-HY)
Switch Control Mainframe	EM Electronics	ETF-058	EC1208382 (BOX1)	N/A	Apr. 01, 2024	Jun. 06, 2024~ Jun. 21, 2024	Mar. 31, 2025	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.44 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.20 dB
---	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.60 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.30 dB
---	---------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Mina Liu	Temperature:	21~25	°C
Test Date:	2024/06/06~2024/06/21	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.031	0.665	0.50	Pass
BLE	1Mbps	1	19	2440	1.037	0.658	0.50	Pass
BLE	1Mbps	1	39	2480	1.023	0.667	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	4.50	30.00	2.79	7.29	36.00	Pass
BLE	1Mbps	1	19	2440	4.90	30.00	2.79	7.69	36.00	Pass
BLE	1Mbps	1	39	2480	4.60	30.00	2.79	7.39	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	4.58	-11.00	2.79	8.00	Pass
BLE	1Mbps	1	19	2440	4.61	-9.46	2.79	8.00	Pass
BLE	1Mbps	1	39	2480	4.41	-10.39	2.79	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.062	1.118	0.50	Pass
BLE	2Mbps	1	19	2440	2.066	1.118	0.50	Pass
BLE	2Mbps	1	39	2480	2.042	0.961	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	4.60	30.00	2.79	7.39	36.00	Pass
BLE	2Mbps	1	19	2440	4.90	30.00	2.79	7.69	36.00	Pass
BLE	2Mbps	1	39	2480	4.70	30.00	2.79	7.49	36.00	Pass




TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	5.24	-13.18	2.79	8.00	Pass
BLE	2Mbps	1	19	2440	5.17	-12.70	2.79	8.00	Pass
BLE	2Mbps	1	39	2480	5.14	-13.22	2.79	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**6dB Bandwidth**


<1Mbps>

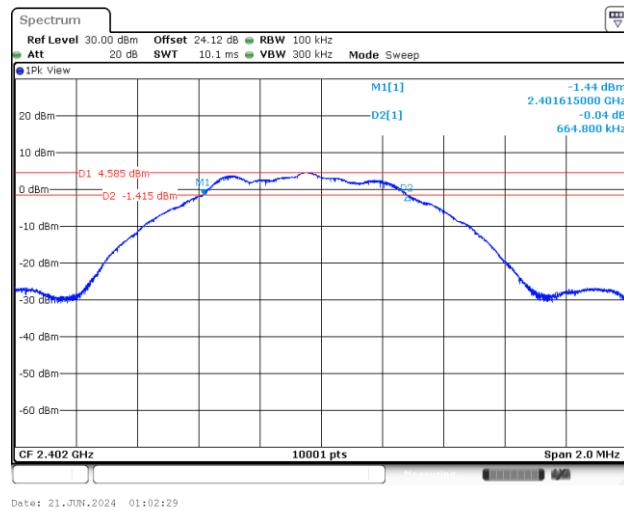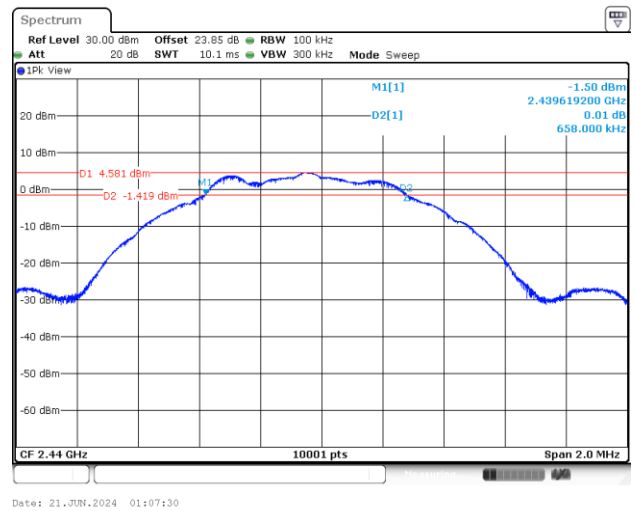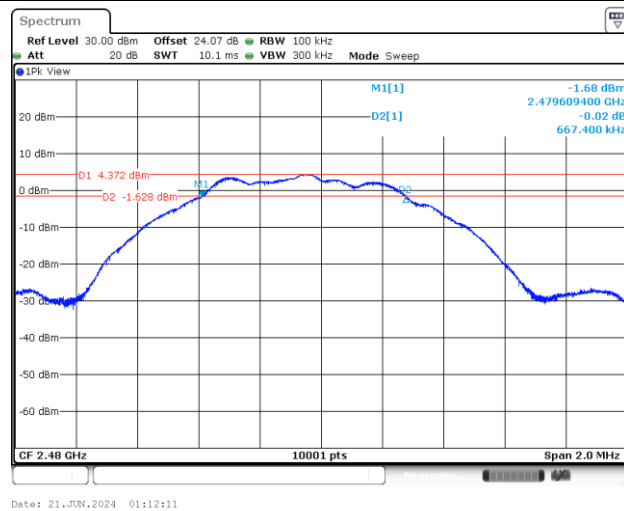6 dB Bandwidth Plot on Channel 00**6 dB Bandwidth Plot on Channel 19****6 dB Bandwidth Plot on Channel 39**




<2Mbps>


6 dB Bandwidth Plot on Channel 00

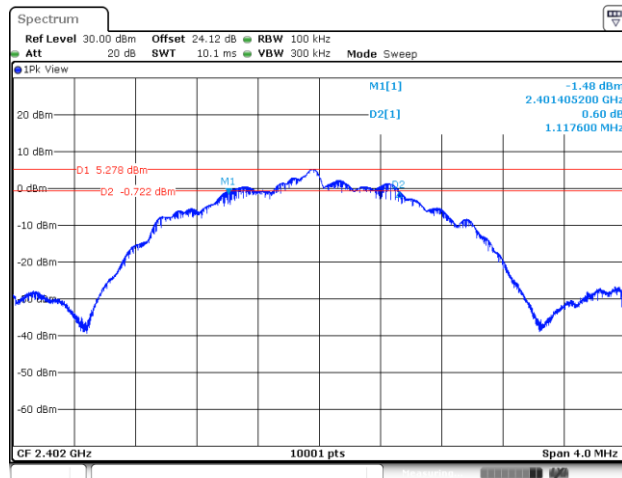

6 dB Bandwidth Plot on Channel 19

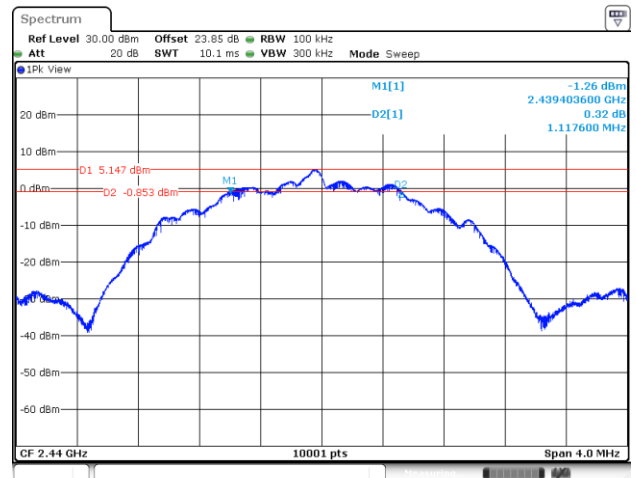

6 dB Bandwidth Plot on Channel 39

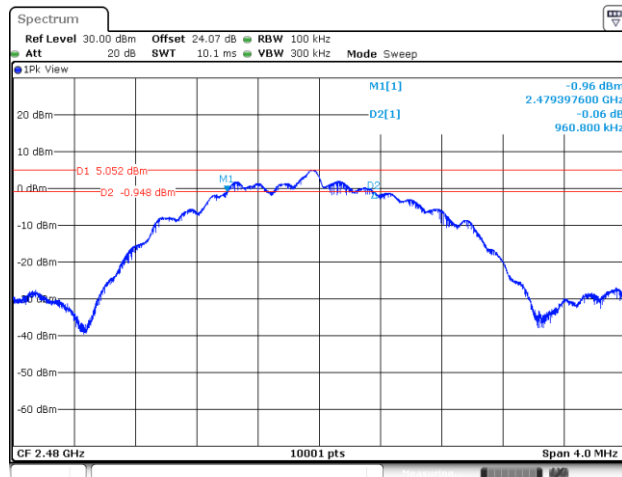





99% Occupied Bandwidth

<1Mbps>


99% Occupied Bandwidth Plot on Channel 00

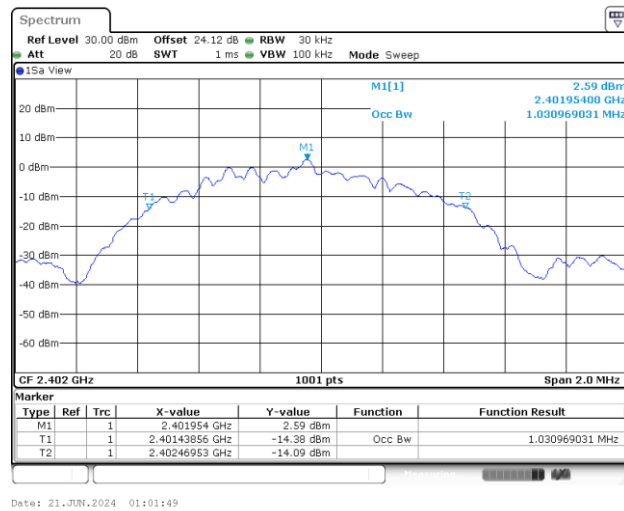

99% Occupied Bandwidth Plot on Channel 19

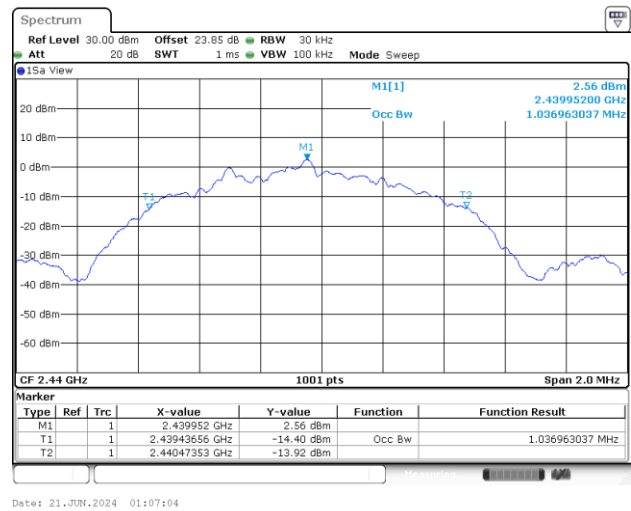


99% Occupied Bandwidth Plot on Channel 39

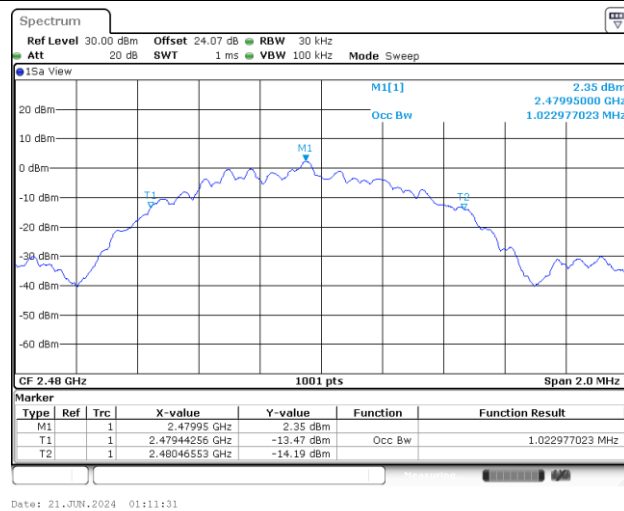




<2Mbps>


99% Occupied Bandwidth Plot on Channel 00

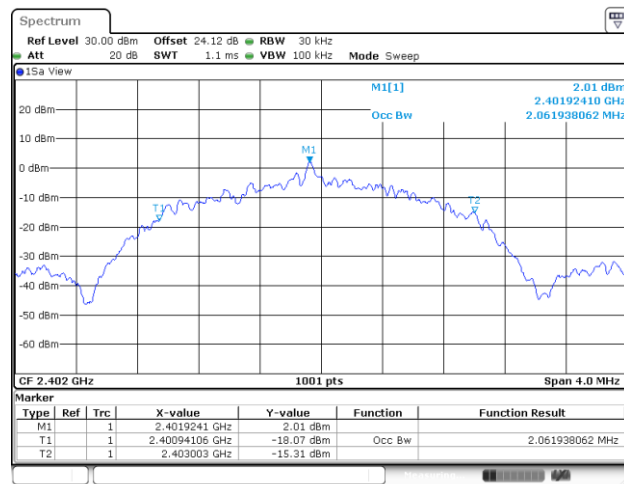

99% Occupied Bandwidth Plot on Channel 19



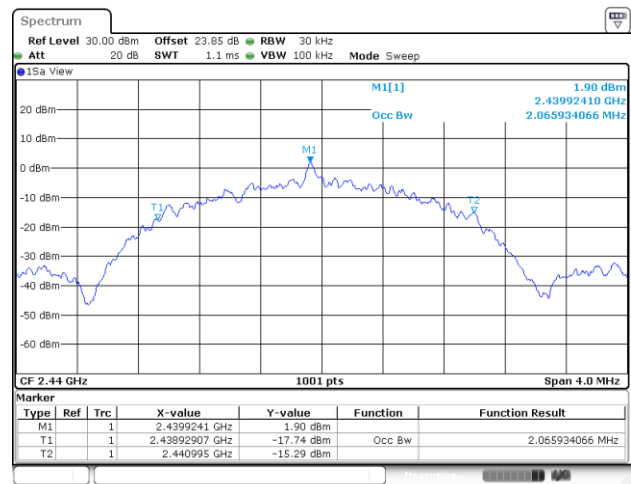


99% Occupied Bandwidth Plot on Channel 39

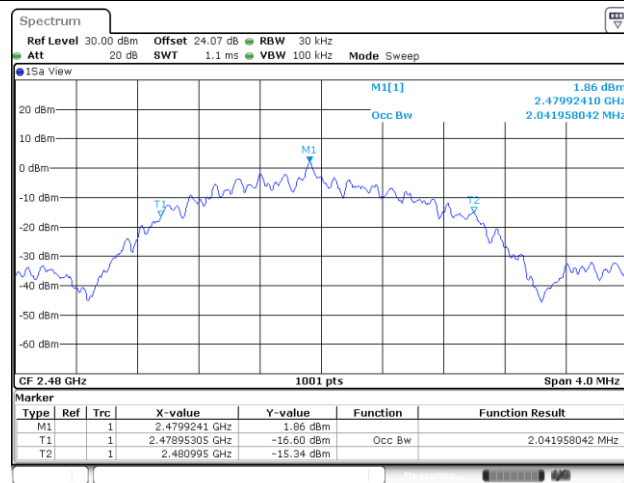

**Power Spectral Density (dBm/3kHz)**


<1Mbps>

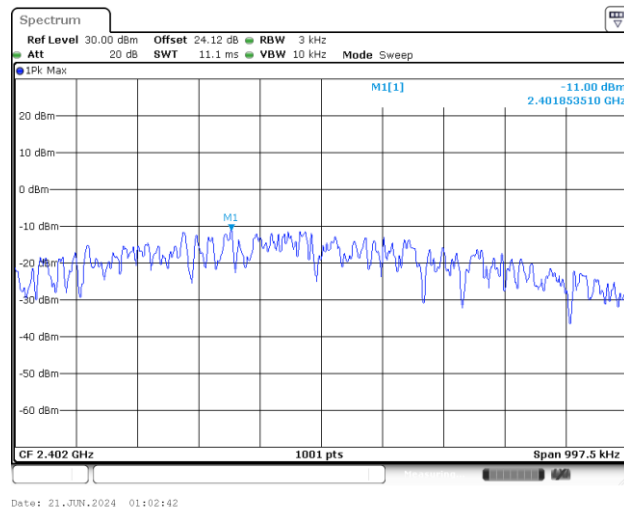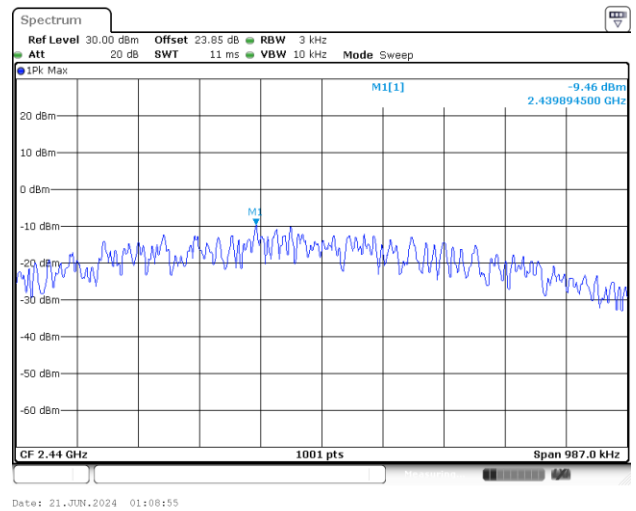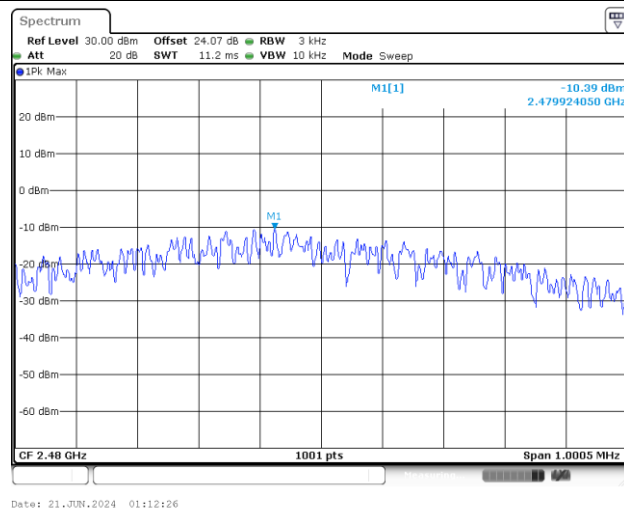Power Density (dBm/3kHz) Plot Channel 00**Power Density (dBm/3kHz) Plot Channel 19****Power Density (dBm/3kHz) Plot Channel 39**




<2Mbps>


Power Density (dBm/3kHz) Plot Channel 00

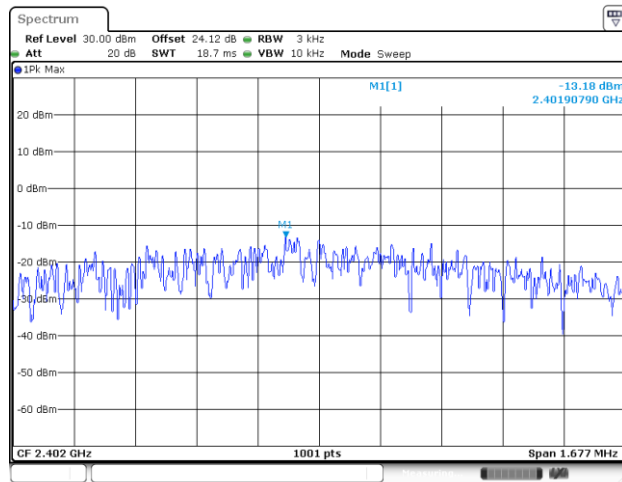

Power Density (dBm/3kHz) Plot Channel 19

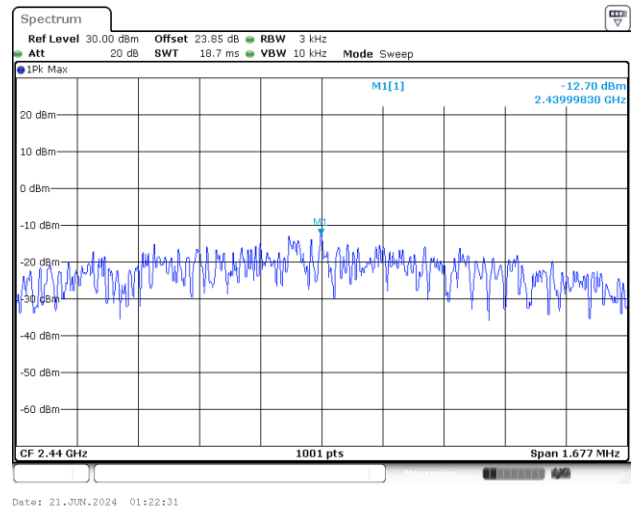


Power Density (dBm/3kHz) Plot Channel 39

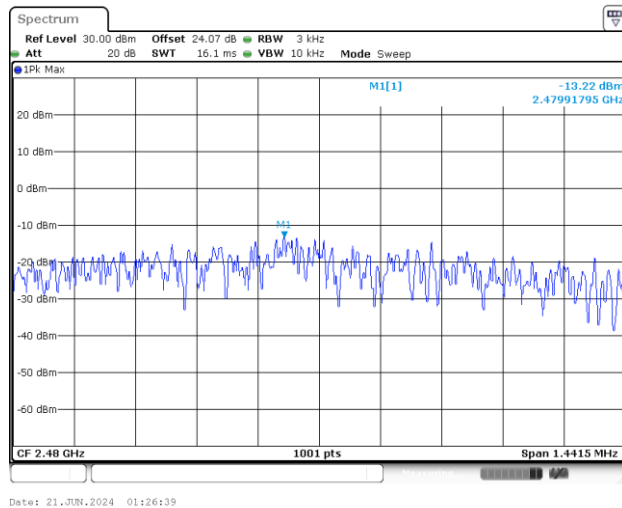




Band Edge and Conducted Spurious Emission

<1Mbps>

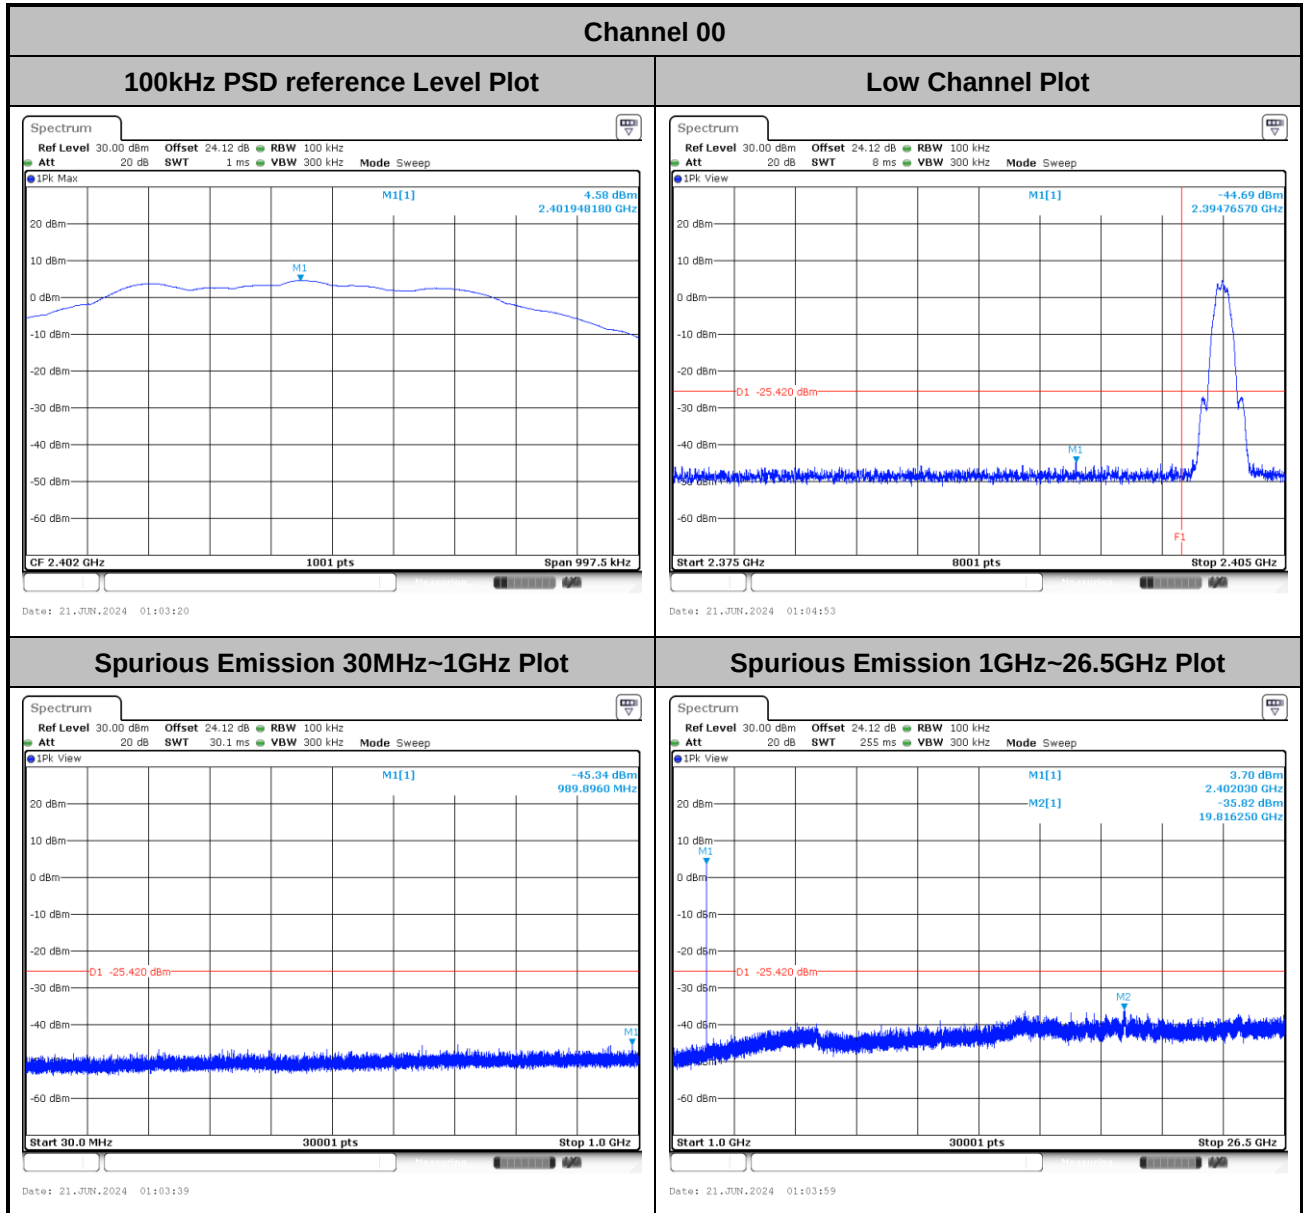

Channel 19


100kHz PSD reference Level Plot

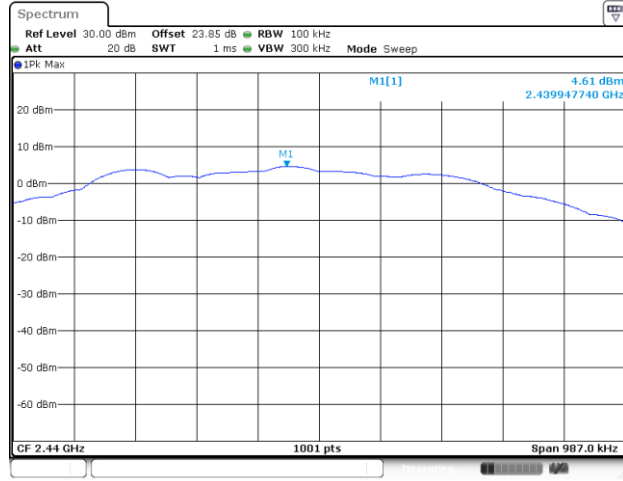

Date: 21.JUN.2024 01:09:55


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

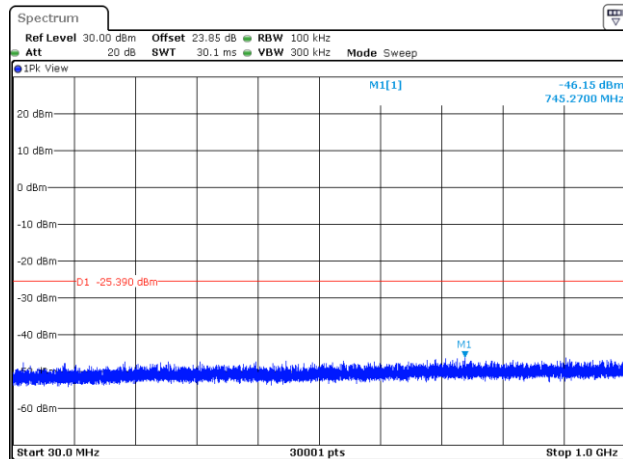

Date: 21.JUN.2024 01:10:21

Spurious Emission 1GHz~26.5GHz Plot

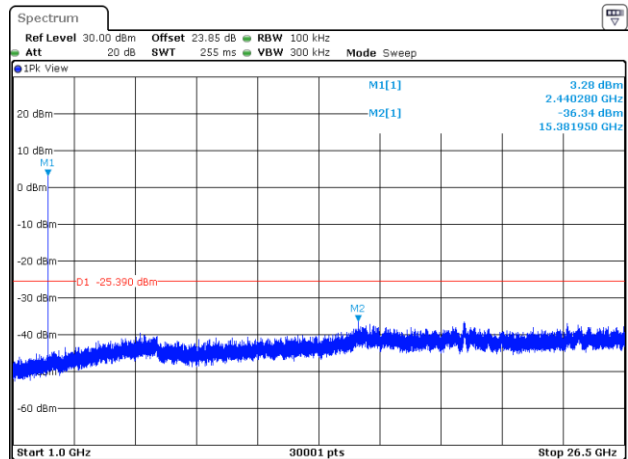


Date: 21.JUN.2024 01:10:41




Channel 39


100kHz PSD reference Level Plot

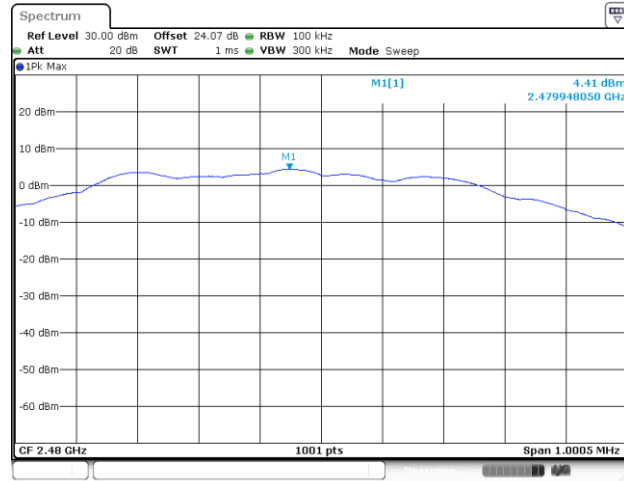


High Channel Plot

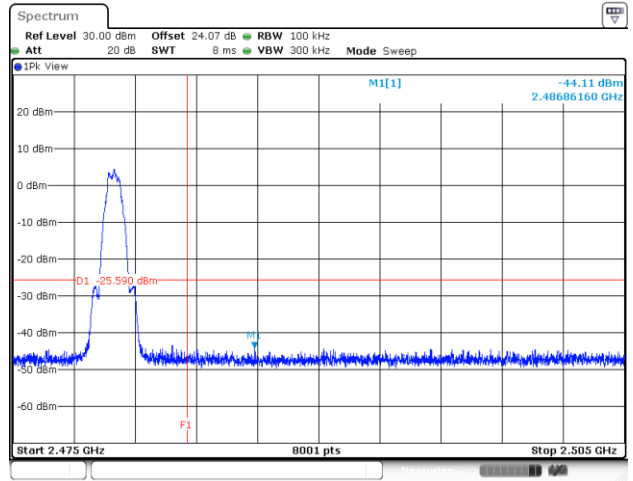

Spurious Emission 30MHz~1GHz Plot

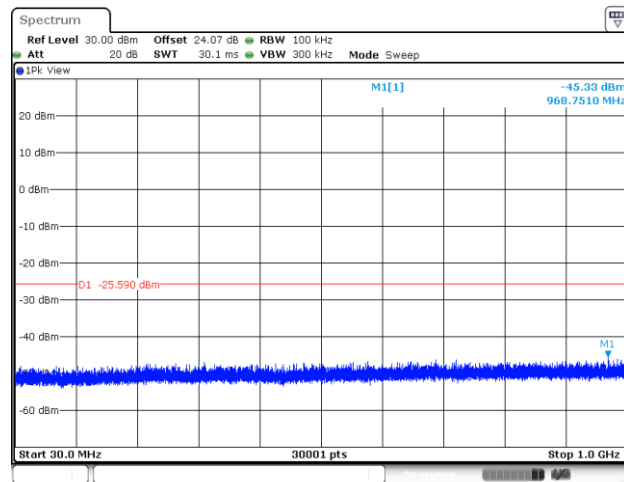


Spurious Emission 1GHz~26.5GHz Plot

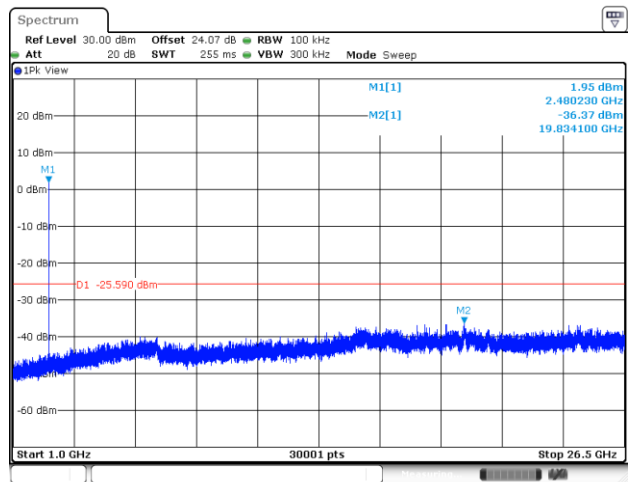




<2M>

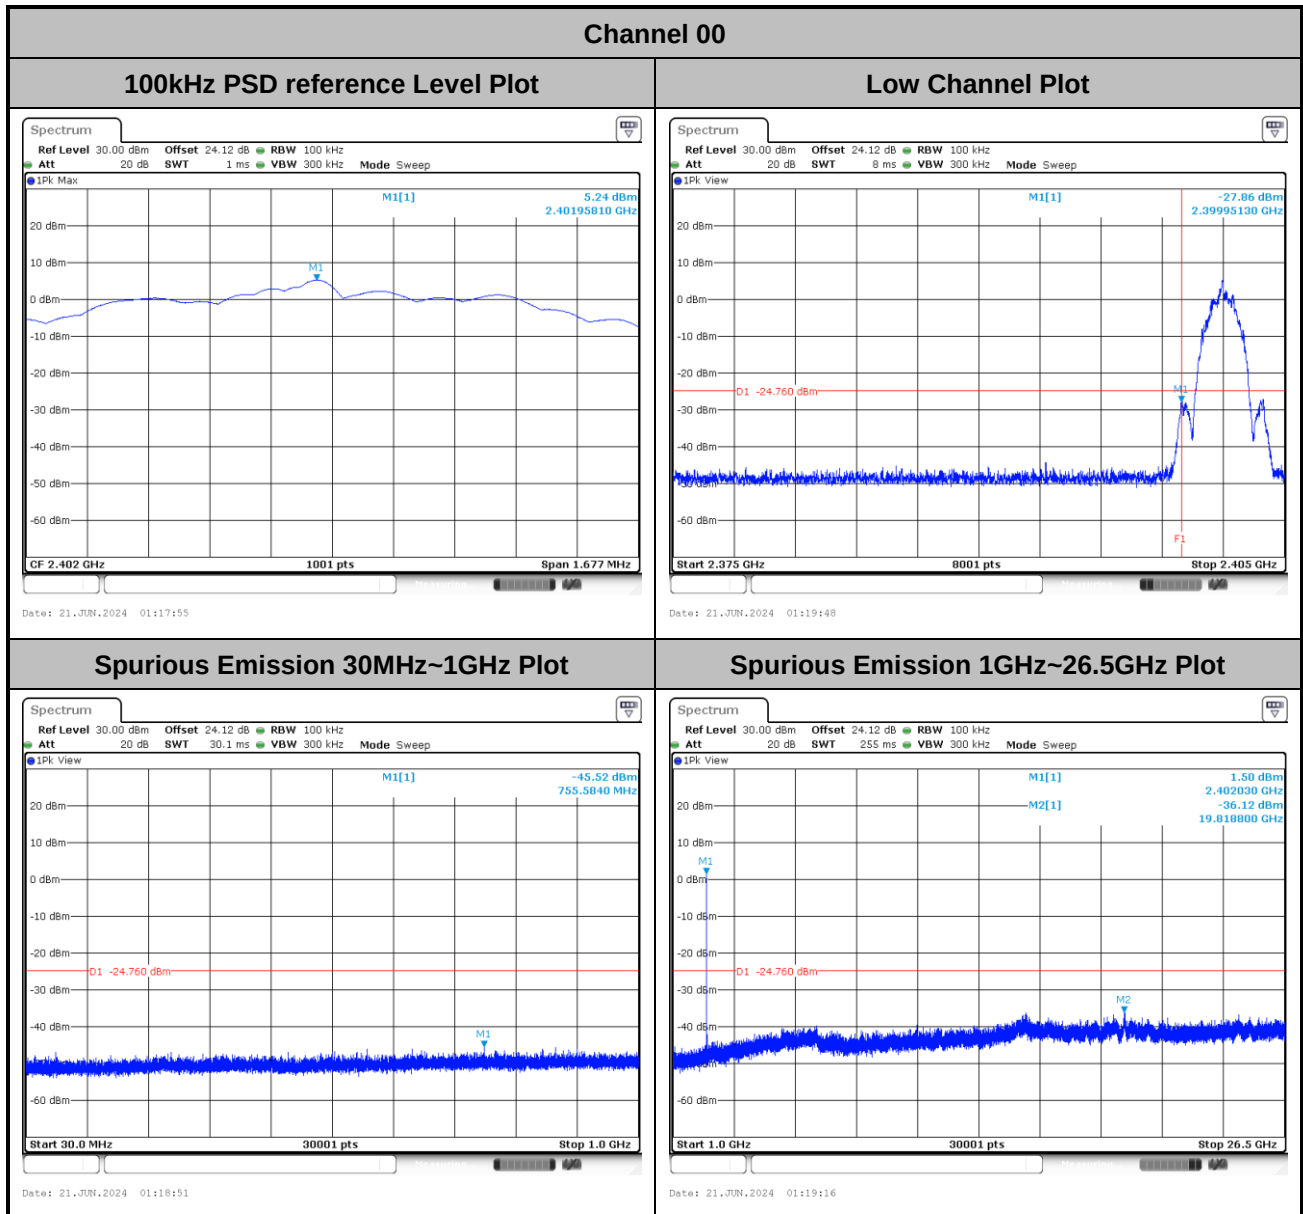




Channel 19

100kHz PSD reference Level Plot

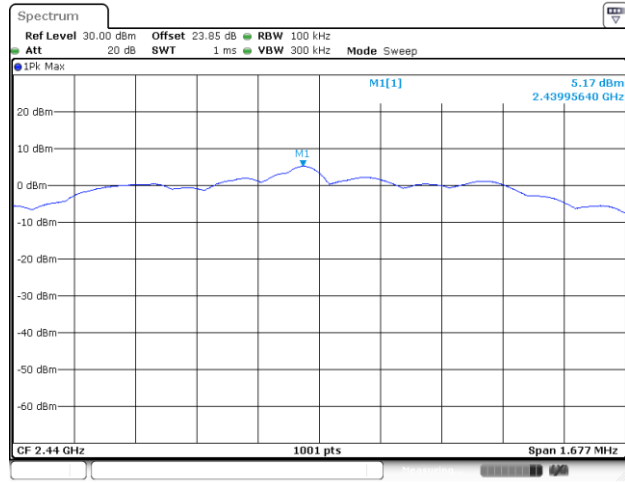


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

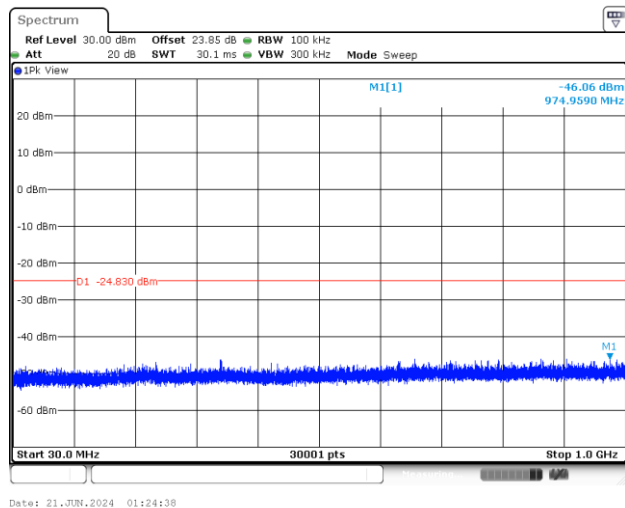


Spurious Emission 1GHz~26.5GHz Plot

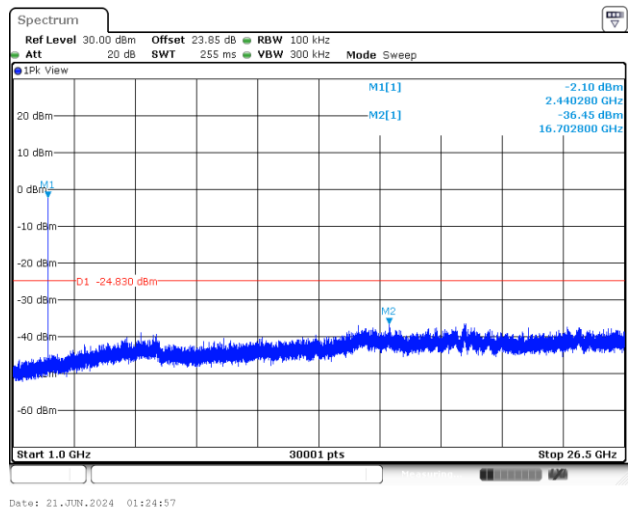




Channel 39


100kHz PSD reference Level Plot

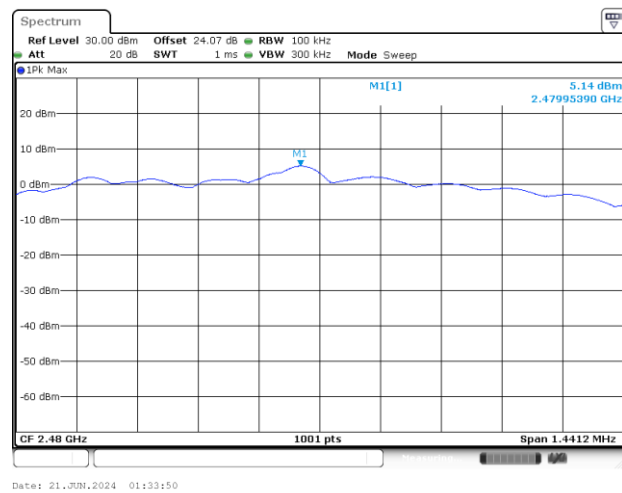


High Channel Plot

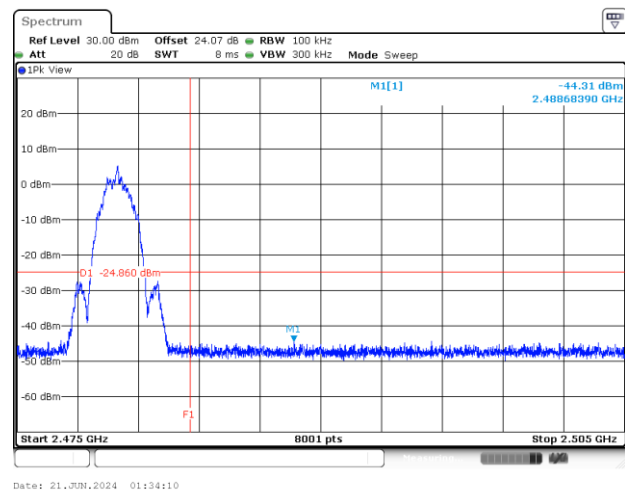

Spurious Emission 30MHz~1GHz Plot

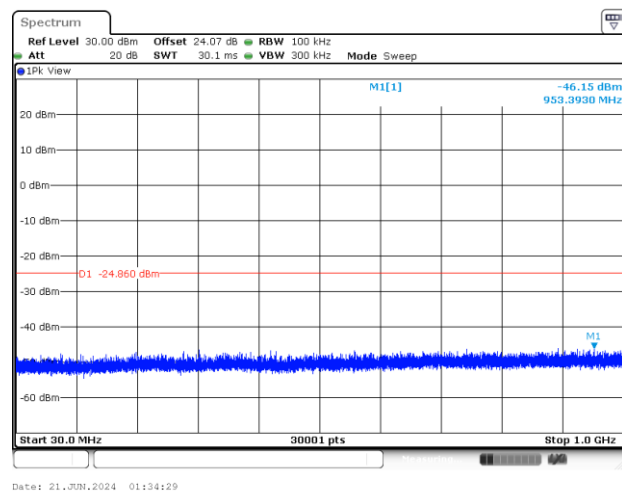

Spurious Emission 1GHz~26.5GHz Plot

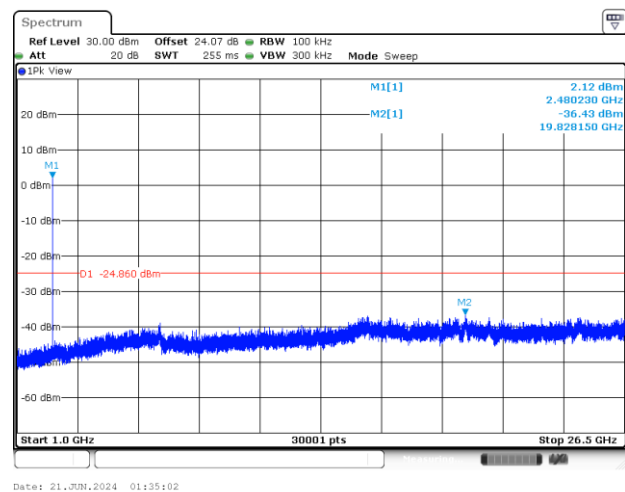



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Louis Chung	Temperature :	23.5~26.7°C
		Relative Humidity :	52.2~57.9%

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

450901
Mode 1
120Vac/60Hz
Line

Full Spectrum

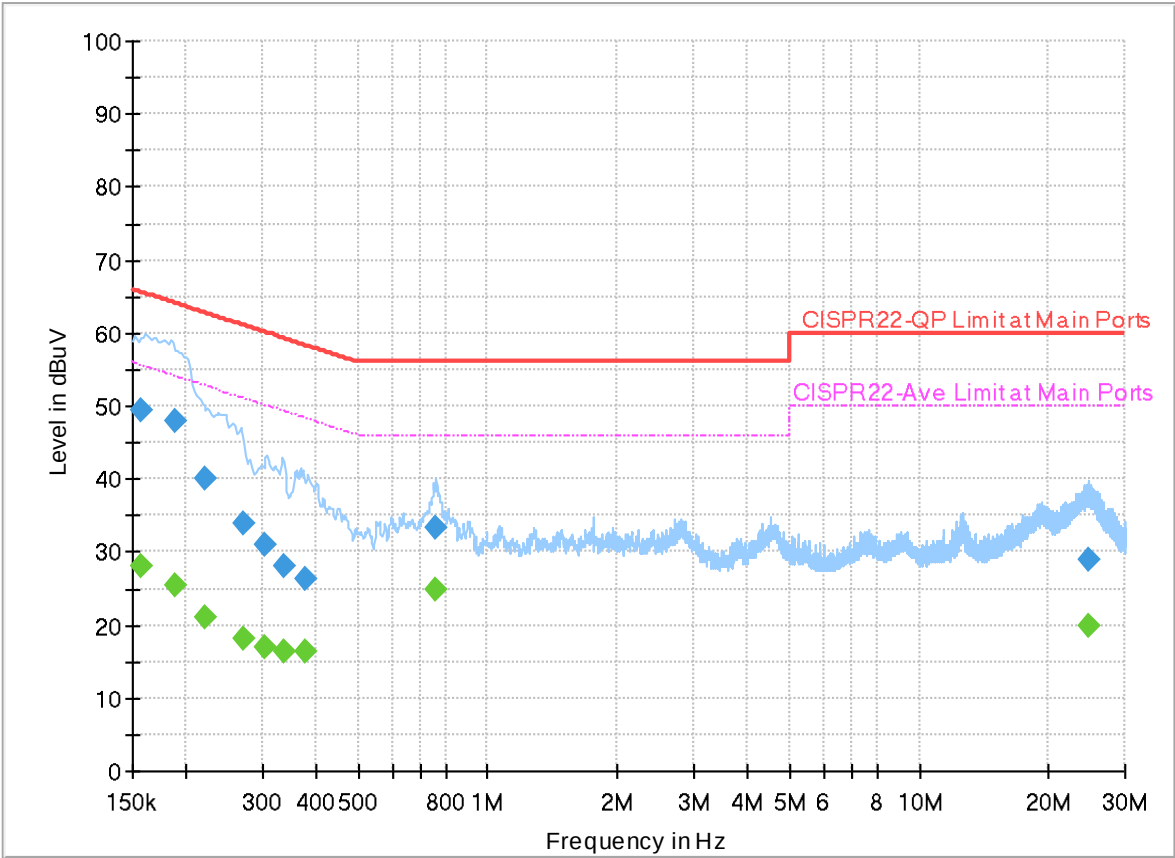

Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	27.99	55.63	27.64	L1	OFF	19.9
0.156750	49.55	---	65.63	16.08	L1	OFF	19.9
0.188250	---	25.57	54.11	28.54	L1	OFF	19.9
0.188250	47.91	---	64.11	16.20	L1	OFF	19.9
0.221460	---	20.98	52.76	31.78	L1	OFF	19.9
0.221460	39.95	---	62.76	22.81	L1	OFF	19.9
0.270780	---	18.15	51.09	32.94	L1	OFF	19.9
0.270780	34.03	---	61.09	27.06	L1	OFF	19.9
0.304350	---	16.92	50.12	33.20	L1	OFF	19.9
0.304350	30.89	---	60.12	29.23	L1	OFF	19.9
0.336390	---	16.25	49.29	33.04	L1	OFF	19.9
0.336390	27.98	---	59.29	31.31	L1	OFF	19.9
0.379500	---	16.33	48.29	31.96	L1	OFF	19.9
0.379500	26.27	---	58.29	32.02	L1	OFF	19.9
0.757140	---	24.83	46.00	21.17	L1	OFF	19.9
0.757140	33.29	---	56.00	22.71	L1	OFF	19.9
24.778500	---	19.93	50.00	30.07	L1	OFF	20.2
24.778500	28.82	---	60.00	31.18	L1	OFF	20.2

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

450901
Mode 1
120Vac/60Hz
Neutral

Full Spectrum

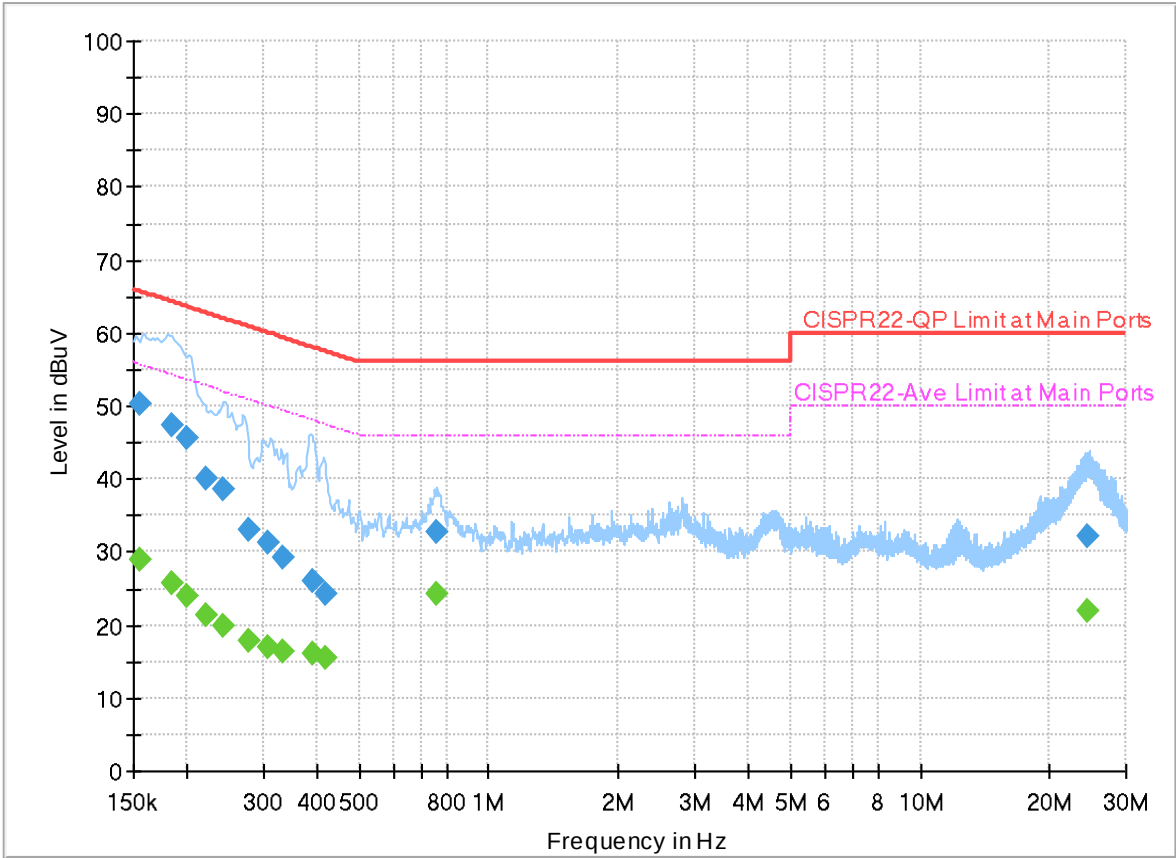

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	29.07	55.75	26.68	N	OFF	19.9
0.154500	50.28	---	65.75	15.47	N	OFF	19.9
0.183750	---	25.69	54.31	28.62	N	OFF	19.9
0.183750	47.49	---	64.31	16.82	N	OFF	19.9
0.199500	---	23.85	53.63	29.78	N	OFF	19.9
0.199500	45.55	---	63.63	18.08	N	OFF	19.9
0.221910	---	21.33	52.75	31.42	N	OFF	19.9
0.221910	40.10	---	62.75	22.65	N	OFF	19.9
0.242790	---	19.92	52.00	32.08	N	OFF	19.9
0.242790	38.51	---	62.00	23.49	N	OFF	19.9
0.276000	---	17.79	50.94	33.15	N	OFF	19.9
0.276000	33.02	---	60.94	27.92	N	OFF	19.9
0.307500	---	16.94	50.04	33.10	N	OFF	19.9
0.307500	31.21	---	60.04	28.83	N	OFF	19.9
0.334500	---	16.51	49.34	32.83	N	OFF	19.9
0.334500	29.20	---	59.34	30.14	N	OFF	19.9
0.389490	---	16.23	48.08	31.85	N	OFF	19.9
0.389490	26.03	---	58.08	32.05	N	OFF	19.9
0.420000	---	15.63	47.45	31.82	N	OFF	19.9

0.420000	24.23	---	57.45	33.22	N	OFF	19.9
0.755250	---	24.26	46.00	21.74	N	OFF	19.9
0.755250	32.78	---	56.00	23.22	N	OFF	19.9
24.400500	---	21.92	50.00	28.08	N	OFF	20.2
24.400500	32.25	---	60.00	27.75	N	OFF	20.2

Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Rain Lee, Jacky Hong and Mancy Chou	Relative Humidity :	40~65%
		Temperature :	20~26°C

C1. Radiated Spurious Emission Test Modes

<Sample 1>

<1Mbps>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 7	2400-2483.5	1	Bluetooth-LE_GSKF	00	2402	1Mbps	-	-
Mode 8	2400-2483.5	1	Bluetooth-LE_GSKF	19	2440	1Mbps	-	-
Mode 9	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	1Mbps	-	-

<2Mbps>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 10	2400-2483.5	1	Bluetooth-LE_GSKF	00	2402	2Mbps	-	-
Mode 11	2400-2483.5	1	Bluetooth-LE_GSKF	19	2440	2Mbps	-	-
Mode 12	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	2Mbps	-	-
Mode 13	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	2Mbps	-	LF
Mode 14	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	2Mbps	-	SHF

<Sample 2>

<2Mbps>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 14	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	2Mbps	-	-
Mode 15	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	2Mbps	-	LF
Mode 16	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	2Mbps	-	SHF

**<Sample 3>****<2Mbps>**

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 15	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	2Mbps	-	-
Mode 16	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	2Mbps	-	LF
Mode 17	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	2Mbps	-	SHF

<Sample 8>**<1Mbps>**

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 56	2400-2483.5	1	Bluetooth-LE_GSKF	00	2402	1Mbps	-	-
Mode 57	2400-2483.5	1	Bluetooth-LE_GSKF	19	2440	1Mbps	-	-
Mode 58	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	1Mbps	-	-

<2Mbps>

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 59	2400-2483.5	1	Bluetooth-LE_GSKF	00	2402	2Mbps	-	-
Mode 60	2400-2483.5	1	Bluetooth-LE_GSKF	19	2440	2Mbps	-	-
Mode 61	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	2Mbps	-	-
Mode 62	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	2Mbps	-	LF
Mode 63	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	2Mbps	-	SHF

C2. Summary of each worse mode

<Sample 1>

<1Mbps>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
7	Bluetooth-LE_GSKF	00	2387.37	39.99	54.00	-14.01	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	00	3202.00	41.40	74.00	-32.60	V	Peak	Pass	-	Harmonic
8	Bluetooth-LE_GSKF	19	2484.64	40.16	54.00	-13.84	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	19	7320.00	46.41	74.00	-27.59	V	Peak	Pass	-	Harmonic
9	Bluetooth-LE_GSKF	39	2483.86	40.86	54.00	-13.14	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	39	7440.00	44.92	74.00	-29.08	V	Peak	Pass	-	Harmonic

<2Mbps>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
10	Bluetooth-LE_GSKF	00	2384.43	39.84	54.00	-14.16	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	00	3202.00	42.58	74.00	-31.42	V	Peak	Pass	-	Harmonic
11	Bluetooth-LE_GSKF	19	2500.00	40.43	54.00	-13.57	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	19	7320.00	44.95	74.00	-29.05	V	Peak	Pass	-	Harmonic
12	Bluetooth-LE_GSKF	39	2483.60	43.56	54.00	-10.44	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	39	7440.00	44.69	74.00	-29.31	V	Peak	Pass	-	Harmonic
13	LF	39	30.00	39.65	40.00	-0.35	V	QP	Pass	-	LF
14	SHF	39	24636.32	40.87	74.00	-33.13	V	Peak	Pass	-	SHF

<Sample 2>

<2Mbps>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
14	Bluetooth-LE_GSKF	39	2499.96	42.70	54.00	-11.30	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	39	7440.00	45.18	74.00	-28.82	H	Peak	Pass	-	Harmonic
15	LF	39	30.00	39.85	40.00	-0.15	V	QP	Pass	-	LF
16	SHF	39	24256.78	40.47	74.00	-33.53	H	Peak	Pass	-	SHF



<Sample 3>

<2Mbps>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
15	Bluetooth-LE_GSKF	39	2483.54	42.56	54.00	-11.44	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	39	7440.00	44.53	74.00	-29.47	V	Peak	Pass	-	Harmonic
16	LF	39	31.94	24.18	40.00	-15.82	V	QP	Pass	-	LF
17	SHF	39	23976.36	40.45	74.00	-33.55	H	Peak	Pass	-	SHF

<Sample 8>

<1Mbps>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
56	Bluetooth-LE_GSKF	00	2370.54	39.83	54.00	-14.17	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	00	4804.00	39.93	74.00	-34.07	V	Peak	Pass	-	Harmonic
57	Bluetooth-LE_GSKF	19	2486.86	40.27	54.00	-13.73	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	19	7320.00	46.30	74.00	-27.70	V	Peak	Pass	-	Harmonic
58	Bluetooth-LE_GSKF	39	2483.64	43.45	54.00	-10.55	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	39	7440.00	44.93	74.00	-29.07	H	Peak	Pass	-	Harmonic





<2Mbps>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
59	Bluetooth-LE_GSKF	00	2351.95	41.48	54.00	-12.52	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	00	4804.00	40.80	74.00	-33.20	H	Peak	Pass	-	Harmonic
60	Bluetooth-LE_GSKF	19	2388.78	41.99	54.00	-12.01	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	19	7320.00	45.71	74.00	-28.29	V	Peak	Pass	-	Harmonic
61	Bluetooth-LE_GSKF	39	2483.60	46.25	54.00	-7.75	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	39	7440.00	44.86	74.00	-29.14	V	Peak	Pass	-	Harmonic
62	LF	39	50.37	30.35	40.00	-9.65	V	Peak	Pass	-	LF
63	SHF	39	24034	40.11	74	-33.89	H	Peak.	Pass	-	SHF







<Sample 1>



<1Mbps>

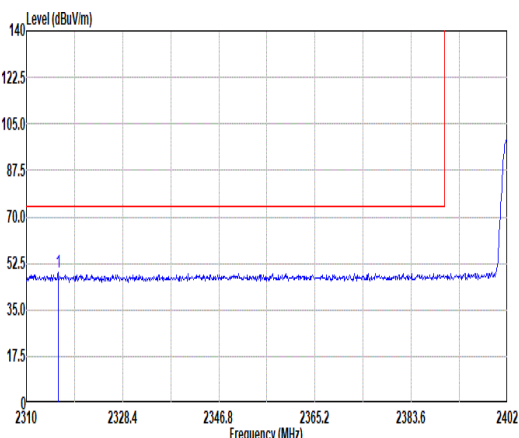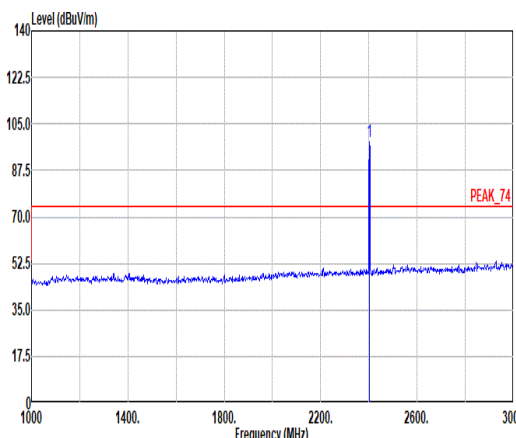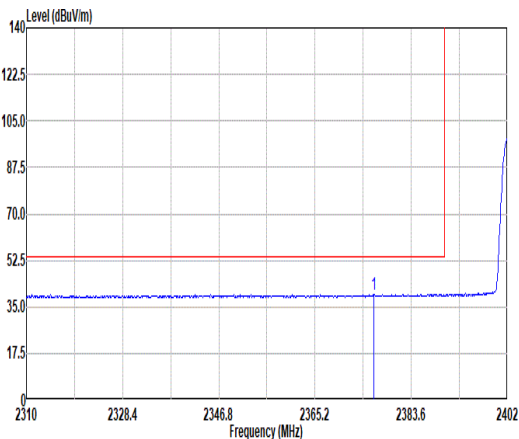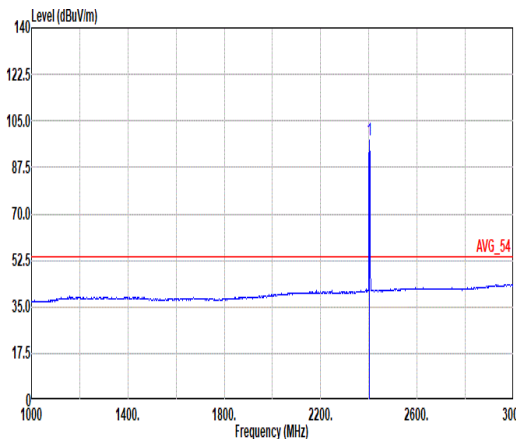Mode	7																																																																			
	Band Edge																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																			
ANT	1																																																																			
Pol.	Horizontal	Fundamental																																																																		
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2316.07</td><td>48.98</td><td>74.00</td><td>-25.02</td><td>44.32</td><td>27.20</td><td>4.62</td><td>37.09</td><td>9.93</td><td>138</td><td>239 PEAK</td></tr></tbody></table>	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2316.07	48.98	74.00	-25.02	44.32	27.20	4.62	37.09	9.93	138	239 PEAK	 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2402.00</td><td>98.30</td><td>-----</td><td>93.25</td><td>27.50</td><td>4.70</td><td>37.08</td><td>9.93</td><td>138</td><td>239</td><td>PEAK</td></tr></tbody></table>	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2402.00	98.30	-----	93.25	27.50	4.70	37.08	9.93	138	239	PEAK
	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1 2316.07	48.98	74.00	-25.02	44.32	27.20	4.62	37.09	9.93	138	239 PEAK																																																										
Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1 2402.00	98.30	-----	93.25	27.50	4.70	37.08	9.93	138	239	PEAK																																																										
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2376.42</td><td>39.74</td><td>54.00</td><td>-14.26</td><td>34.85</td><td>27.36</td><td>4.68</td><td>37.08</td><td>9.93</td><td>138</td><td>239 AVERAGE</td></tr></tbody></table>	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2376.42	39.74	54.00	-14.26	34.85	27.36	4.68	37.08	9.93	138	239 AVERAGE	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2402.00</td><td>97.65</td><td>-----</td><td>92.60</td><td>27.50</td><td>4.70</td><td>37.08</td><td>9.93</td><td>138</td><td>239</td><td>AVERAGE</td></tr></tbody></table>	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2402.00	97.65	-----	92.60	27.50	4.70	37.08	9.93	138	239	AVERAGE
Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1 2376.42	39.74	54.00	-14.26	34.85	27.36	4.68	37.08	9.93	138	239 AVERAGE																																																										
Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1 2402.00	97.65	-----	92.60	27.50	4.70	37.08	9.93	138	239	AVERAGE																																																										

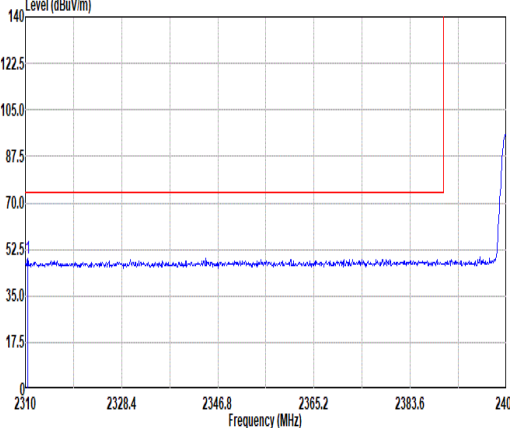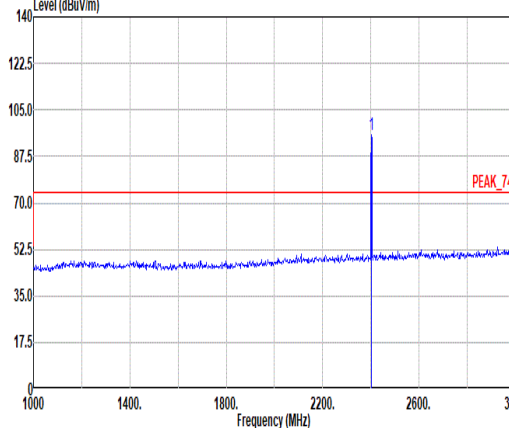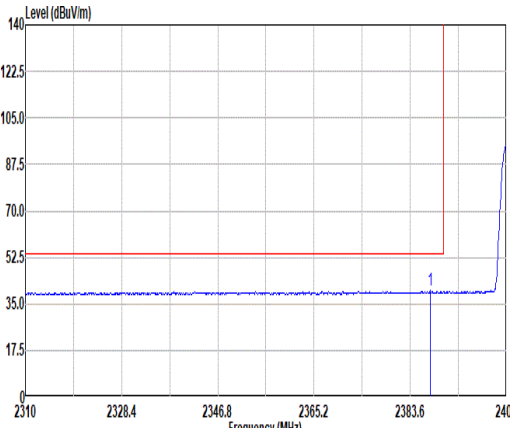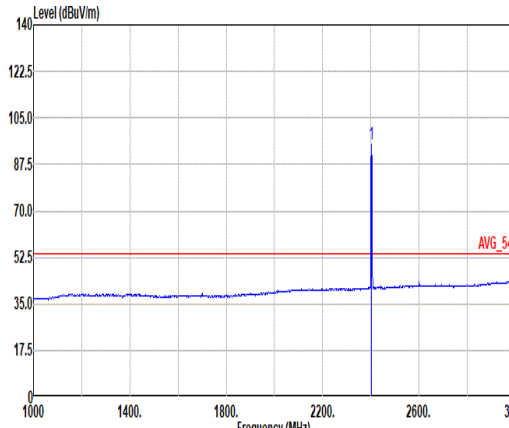

		7																																																																																																	
Mode	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2310.46</td><td>49.09</td><td>74.00</td><td>-24.91</td><td>44.44</td><td>27.20</td><td>4.61</td><td>37.09</td><td>9.93</td><td>300</td><td>156</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2310.46	49.09	74.00	-24.91	44.44	27.20	4.61	37.09	9.93	300	156	PEAK	Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>95.85</td><td>-----</td><td>-----</td><td>90.80</td><td>27.50</td><td>4.70</td><td>37.08</td><td>9.93</td><td>300</td><td>156</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	95.85	-----	-----	90.80	27.50	4.70	37.08	9.93	300	156
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2310.46	49.09	74.00	-24.91	44.44	27.20	4.61	37.09	9.93	300	156	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	95.85	-----	-----	90.80	27.50	4.70	37.08	9.93	300	156	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.37</td><td>39.99</td><td>54.00</td><td>-14.01</td><td>34.98</td><td>27.47</td><td>4.69</td><td>37.08</td><td>9.93</td><td>300</td><td>156</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.37	39.99	54.00	-14.01	34.98	27.47	4.69	37.08	9.93	300	156	AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>95.16</td><td>-----</td><td>-----</td><td>90.11</td><td>27.50</td><td>4.70</td><td>37.08</td><td>9.93</td><td>300</td><td>156</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	95.16	-----	-----	90.11	27.50	4.70	37.08	9.93	300	156
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2387.37	39.99	54.00	-14.01	34.98	27.47	4.69	37.08	9.93	300	156	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	95.16	-----	-----	90.11	27.50	4.70	37.08	9.93	300	156	AVERAGE																																																																																							



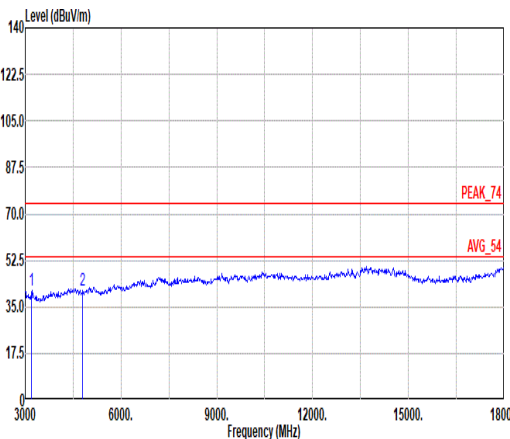
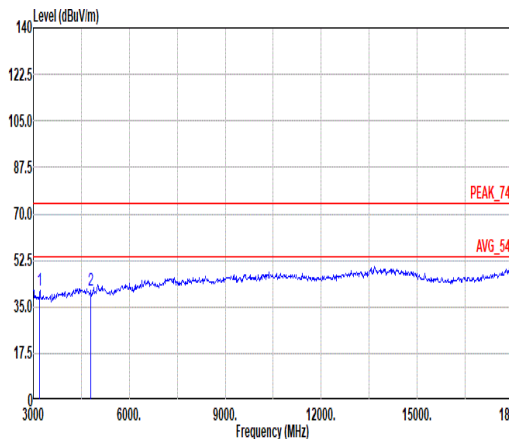


Mode	7																																																																	
	Harmonic																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal						Vertical																																																											
Peak Avg																																																																		
	Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL						Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL																																																											
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3202.00</td><td>41.27</td><td>74.00</td><td>-32.73</td><td>61.81</td><td>29.89</td><td>6.05</td><td>57.84</td><td>1.36</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>40.98</td><td>74.00</td><td>-33.02</td><td>58.81</td><td>32.32</td><td>6.82</td><td>57.44</td><td>0.47</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3202.00	41.27	74.00	-32.73	61.81	29.89	6.05	57.84	1.36	--	PEAK	2	4804.00	40.98	74.00	-33.02	58.81	32.32	6.82	57.44	0.47	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	3202.00	41.27	74.00	-32.73	61.81	29.89	6.05	57.84	1.36	--	PEAK																																																							
2	4804.00	40.98	74.00	-33.02	58.81	32.32	6.82	57.44	0.47	--	PEAK																																																							





Mode	7	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL
17.7G ~18G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL

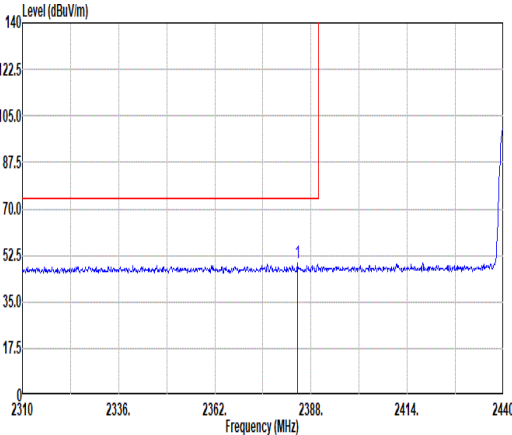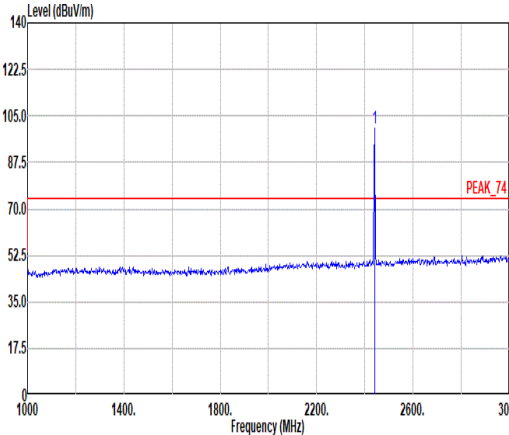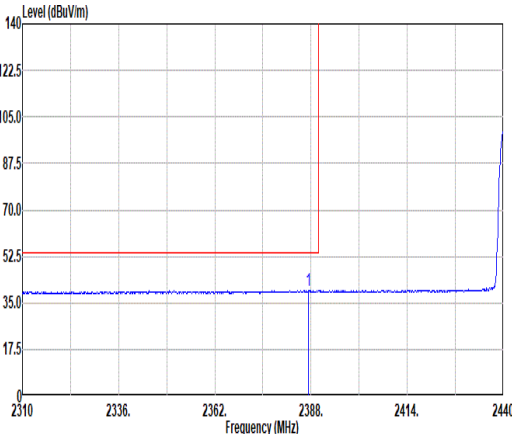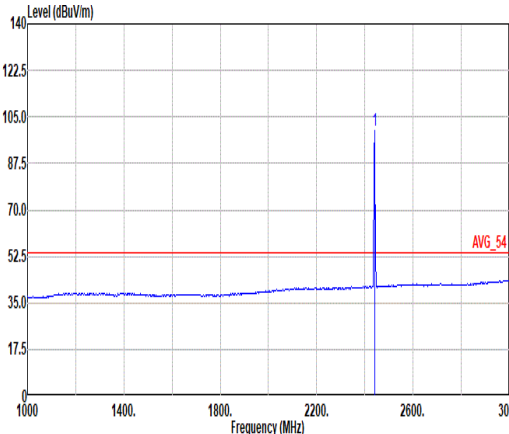

Mode	8																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak																																																																																																				
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2384.36</td><td>49.65</td><td>74.00</td><td>-24.35</td><td>44.67</td><td>27.44</td><td>4.69</td><td>37.08</td><td>9.93</td><td>136</td><td>237</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.36	49.65	74.00	-24.35	44.67	27.44	4.69	37.08	9.93	136	237	PEAK	Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>100.31</td><td>-----</td><td>-----</td><td>95.12</td><td>27.60</td><td>4.74</td><td>37.08</td><td>9.93</td><td>136</td><td>237</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2440.00	100.31	-----	-----	95.12	27.60	4.74	37.08	9.93	136	237
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2384.36	49.65	74.00	-24.35	44.67	27.44	4.69	37.08	9.93	136	237	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2440.00	100.31	-----	-----	95.12	27.60	4.74	37.08	9.93	136	237	PEAK																																																																																								
Avg																																																																																																				
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.22</td><td>39.81</td><td>54.00</td><td>-14.19</td><td>34.80</td><td>27.47</td><td>4.69</td><td>37.08</td><td>9.93</td><td>136</td><td>237</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.22	39.81	54.00	-14.19	34.80	27.47	4.69	37.08	9.93	136	237	AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>99.75</td><td>-----</td><td>-----</td><td>94.56</td><td>27.60</td><td>4.74</td><td>37.08</td><td>9.93</td><td>136</td><td>237</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2440.00	99.75	-----	-----	94.56	27.60	4.74	37.08	9.93	136	237
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2387.22	39.81	54.00	-14.19	34.80	27.47	4.69	37.08	9.93	136	237	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2440.00	99.75	-----	-----	94.56	27.60	4.74	37.08	9.93	136	237	AVERAGE																																																																																								

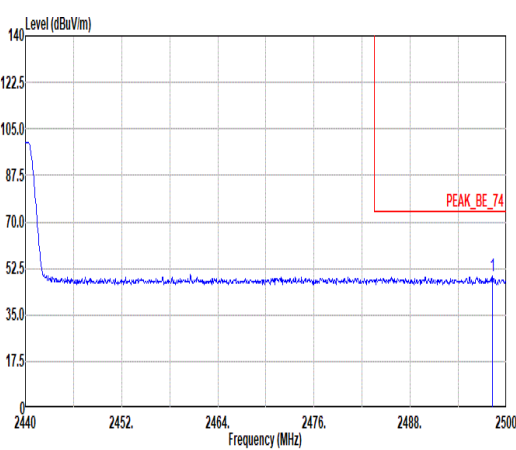
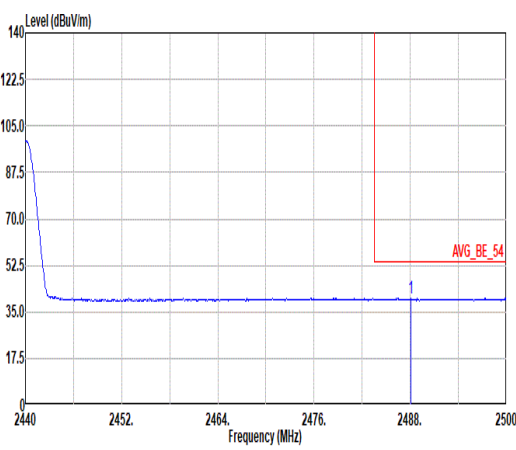


Mode	8																																																							
	Band Edge - R																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2498.26</td><td>49.53</td><td>74.00</td><td>-24.47</td><td>44.06</td><td>27.80</td><td>4.81</td><td>37.07</td><td>9.93</td><td>136</td><td>237</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.26	49.53	74.00	-24.47	44.06	27.80	4.81	37.07	9.93	136	237	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2498.26	49.53	74.00	-24.47	44.06	27.80	4.81	37.07	9.93	136	237	PEAK																																												
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.06</td><td>40.13</td><td>54.00</td><td>-13.87</td><td>34.67</td><td>27.80</td><td>4.80</td><td>37.07</td><td>9.93</td><td>136</td><td>237</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.06	40.13	54.00	-13.87	34.67	27.80	4.80	37.07	9.93	136	237	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2488.06	40.13	54.00	-13.87	34.67	27.80	4.80	37.07	9.93	136	237	AVERAGE																																												





Mode	8																																																																																																
	Band Edge - L																																																																																																
	2400-2483.5 Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2366.42</td><td>49.16</td><td>74.00</td><td>-24.84</td><td>44.35</td><td>27.30</td><td>4.67</td><td>37.09</td><td>9.93</td><td>261</td><td>157 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2366.42	49.16	74.00	-24.84	44.35	27.30	4.67	37.09	9.93	261	157 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>98.12</td><td>-----</td><td>-----</td><td>92.93</td><td>27.60</td><td>4.74</td><td>37.08</td><td>9.93</td><td>261</td><td>157 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	98.12	-----	-----	92.93	27.60	4.74	37.08	9.93	261
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2366.42	49.16	74.00	-24.84	44.35	27.30	4.67	37.09	9.93	261	157 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2440.00	98.12	-----	-----	92.93	27.60	4.74	37.08	9.93	261	157 PEAK																																																																																						
Avg																																																																																																	
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto						Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.65</td><td>39.68</td><td>54.00</td><td>-14.32</td><td>34.65</td><td>27.49</td><td>4.69</td><td>37.08</td><td>9.93</td><td>261</td><td>157 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.65	39.68	54.00	-14.32	34.65	27.49	4.69	37.08	9.93	261	157 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>97.52</td><td>-----</td><td>-----</td><td>92.33</td><td>27.60</td><td>4.74</td><td>37.08</td><td>9.93</td><td>261</td><td>157 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	97.52	-----	-----	92.33	27.60	4.74	37.08	9.93	261
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2388.65	39.68	54.00	-14.32	34.65	27.49	4.69	37.08	9.93	261	157 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2440.00	97.52	-----	-----	92.33	27.60	4.74	37.08	9.93	261	157 AVERAGE																																																																																						

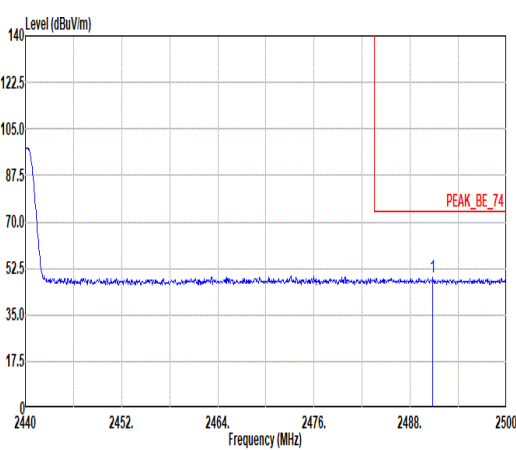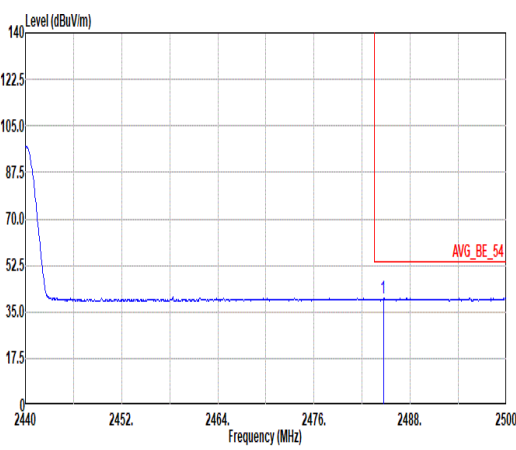

Mode	8																																													
	Band Edge - R																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																													
ANT	1																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.82</td><td>48.89</td><td>74.00</td><td>-25.11</td><td>43.43</td><td>27.80</td><td>4.80</td><td>37.07</td><td>9.93</td><td>261</td><td>157</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.82	48.89	74.00	-25.11	43.43	27.80	4.80	37.07	9.93	261	157	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2490.82	48.89	74.00	-25.11	43.43	27.80	4.80	37.07	9.93	261	157	PEAK																																		
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.64</td><td>40.16</td><td>54.00</td><td>-13.84</td><td>34.71</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>261</td><td>157</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.64	40.16	54.00	-13.84	34.71	27.80	4.79	37.07	9.93	261	157	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2484.64	40.16	54.00	-13.84	34.71	27.80	4.79	37.07	9.93	261	157	AVERAGE																																		



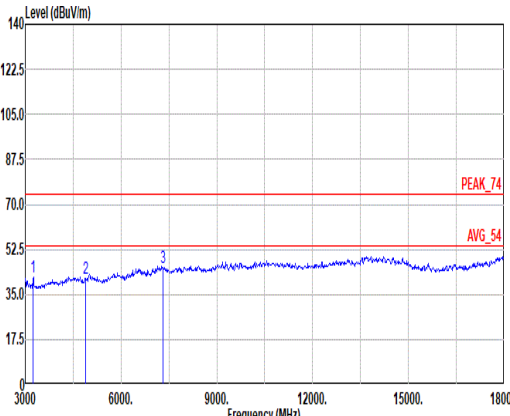
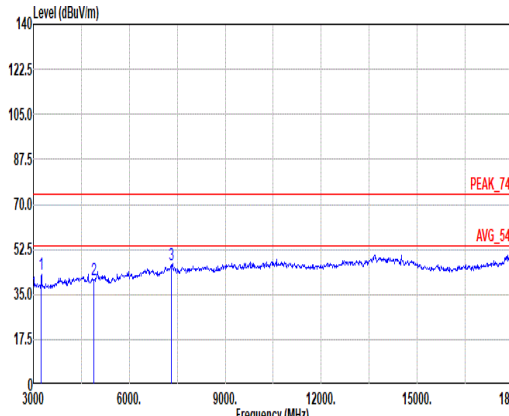


Mode	8																																																																																																																																							
	Harmonic																																																																																																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																																																							
ANT	1																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3253.00</td><td>41.63</td><td>74.00</td><td>-32.37</td><td>62.41</td><td>29.69</td><td>6.11</td><td>57.89</td><td>1.31</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>41.23</td><td>74.00</td><td>-32.77</td><td>58.31</td><td>32.66</td><td>7.08</td><td>57.27</td><td>0.45</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7320.00</td><td>45.39</td><td>74.00</td><td>-28.61</td><td>56.38</td><td>36.92</td><td>8.95</td><td>57.39</td><td>0.53</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3253.00	41.63	74.00	-32.37	62.41	29.69	6.11	57.89	1.31	--	PEAK	2	4880.00	41.23	74.00	-32.77	58.31	32.66	7.08	57.27	0.45	--	PEAK	3	7320.00	45.39	74.00	-28.61	56.38	36.92	8.95	57.39	0.53	--	PEAK	 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3253.00</td><td>42.86</td><td>74.00</td><td>-31.14</td><td>63.64</td><td>29.69</td><td>6.11</td><td>57.89</td><td>1.31</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>40.86</td><td>74.00</td><td>-33.14</td><td>57.94</td><td>32.66</td><td>7.08</td><td>57.27</td><td>0.45</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7320.00</td><td>46.41</td><td>74.00</td><td>-27.59</td><td>57.40</td><td>36.92</td><td>8.95</td><td>57.39</td><td>0.53</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3253.00	42.86	74.00	-31.14	63.64	29.69	6.11	57.89	1.31	--	PEAK	2	4880.00	40.86	74.00	-33.14	57.94	32.66	7.08	57.27	0.45	--	PEAK	3	7320.00	46.41	74.00	-27.59	57.40	36.92	8.95	57.39	0.53	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	3253.00	41.63	74.00	-32.37	62.41	29.69	6.11	57.89	1.31	--	PEAK																																																																																																																													
2	4880.00	41.23	74.00	-32.77	58.31	32.66	7.08	57.27	0.45	--	PEAK																																																																																																																													
3	7320.00	45.39	74.00	-28.61	56.38	36.92	8.95	57.39	0.53	--	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	3253.00	42.86	74.00	-31.14	63.64	29.69	6.11	57.89	1.31	--	PEAK																																																																																																																													
2	4880.00	40.86	74.00	-33.14	57.94	32.66	7.08	57.27	0.45	--	PEAK																																																																																																																													
3	7320.00	46.41	74.00	-27.59	57.40	36.92	8.95	57.39	0.53	--	PEAK																																																																																																																													







Mode	8	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL
17.7G ~18G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL

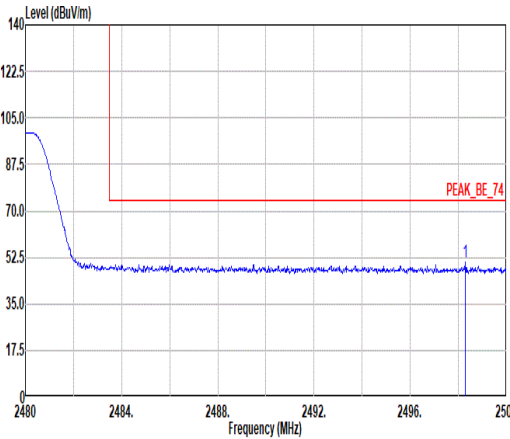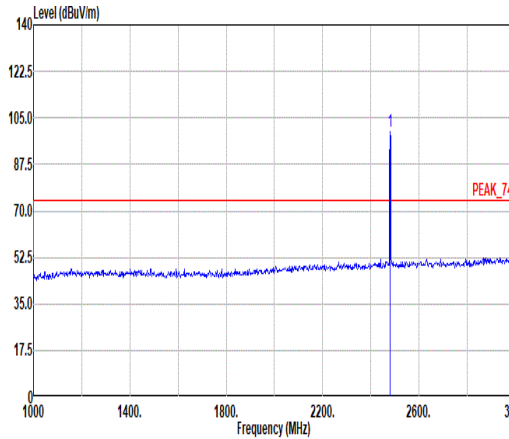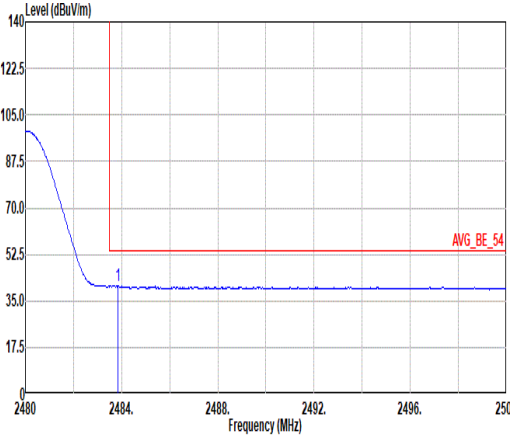
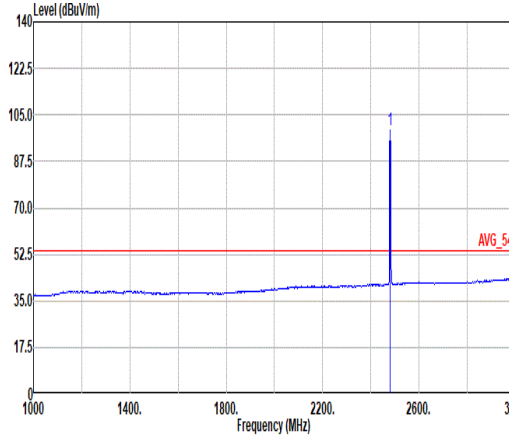


		9																																																																																																	
Mode	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2498.30</td><td>50.69</td><td>74.00</td><td>-23.31</td><td>45.22</td><td>27.80</td><td>4.81</td><td>37.07</td><td>9.93</td><td>100</td><td>242</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.30	50.69	74.00	-23.31	45.22	27.80	4.81	37.07	9.93	100	242	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>99.68</td><td>-----</td><td>-----</td><td>94.23</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>100</td><td>242</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.68	-----	-----	94.23	27.80	4.79	37.07	9.93	100	242
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2498.30	50.69	74.00	-23.31	45.22	27.80	4.81	37.07	9.93	100	242	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	99.68	-----	-----	94.23	27.80	4.79	37.07	9.93	100	242	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto						Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.86</td><td>40.86</td><td>54.00</td><td>-13.14</td><td>35.41</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>100</td><td>242</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.86	40.86	54.00	-13.14	35.41	27.80	4.79	37.07	9.93	100	242	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>99.13</td><td>-----</td><td>-----</td><td>93.68</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>100</td><td>242</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.13	-----	-----	93.68	27.80	4.79	37.07	9.93	100	242
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.86	40.86	54.00	-13.14	35.41	27.80	4.79	37.07	9.93	100	242	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	99.13	-----	-----	93.68	27.80	4.79	37.07	9.93	100	242	AVERAGE																																																																																							

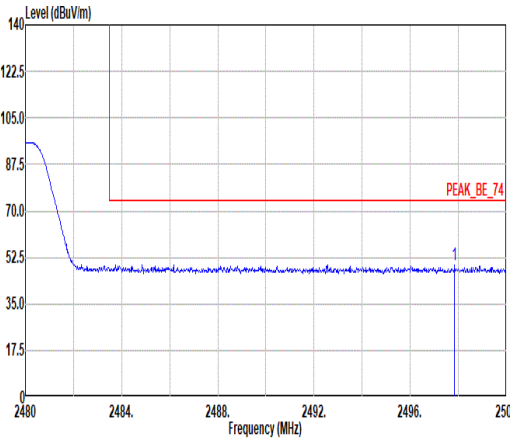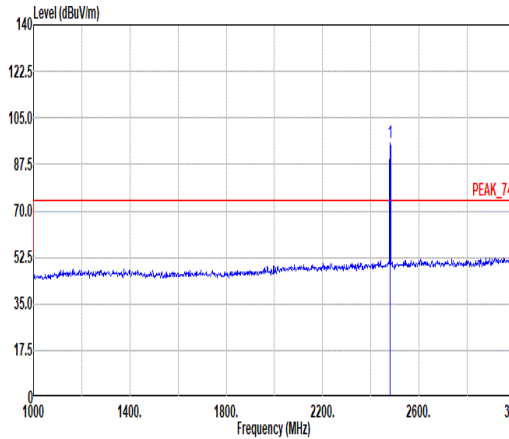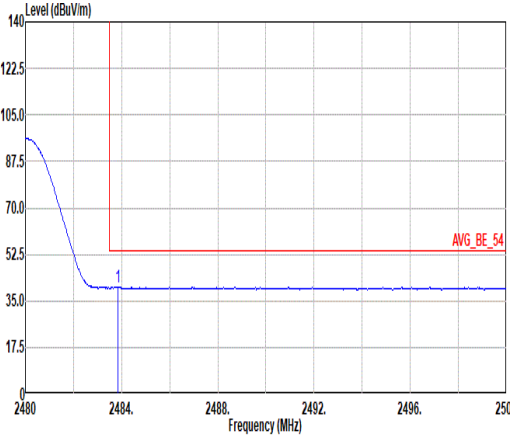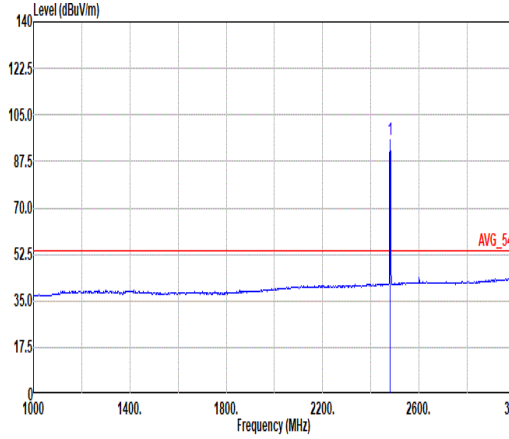

Mode	9																																																																																																
	Band Edge																																																																																																
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2497.84</td><td>49.92</td><td>74.00</td><td>-24.08</td><td>44.45</td><td>27.80</td><td>4.81</td><td>37.07</td><td>9.93</td><td>300</td><td>171 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2497.84	49.92	74.00	-24.08	44.45	27.80	4.81	37.07	9.93	300	171 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>95.87</td><td>-----</td><td>-----</td><td>90.42</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>300</td><td>171 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	95.87	-----	-----	90.42	27.80	4.79	37.07	9.93	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2497.84	49.92	74.00	-24.08	44.45	27.80	4.81	37.07	9.93	300	171 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2480.00	95.87	-----	-----	90.42	27.80	4.79	37.07	9.93	300	171 PEAK																																																																																						
Avg																																																																																																	
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto						Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.84</td><td>40.18</td><td>54.00</td><td>-13.82</td><td>34.73</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>300</td><td>171 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.84	40.18	54.00	-13.82	34.73	27.80	4.79	37.07	9.93	300	171 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>95.36</td><td>-----</td><td>-----</td><td>89.91</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>300</td><td>171 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	95.36	-----	-----	89.91	27.80	4.79	37.07	9.93	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.84	40.18	54.00	-13.82	34.73	27.80	4.79	37.07	9.93	300	171 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2480.00	95.36	-----	-----	89.91	27.80	4.79	37.07	9.93	300	171 AVERAGE																																																																																						

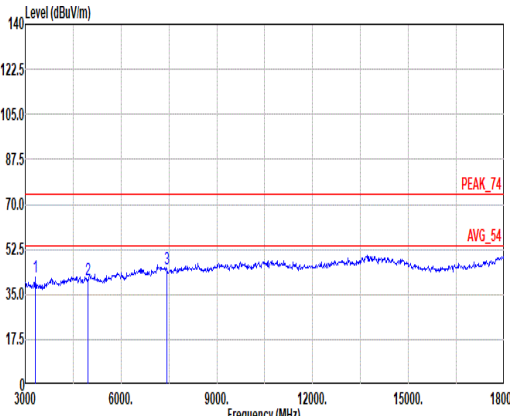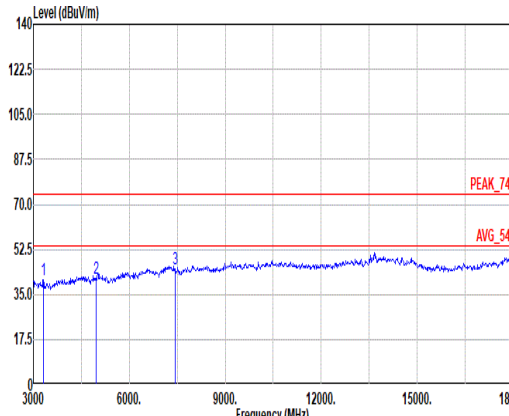





Mode	9																																																																																																																																							
	Harmonic																																																																																																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																							
ANT	1																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3306.00</td><td>41.69</td><td>74.00</td><td>-32.31</td><td>62.62</td><td>29.60</td><td>6.17</td><td>57.95</td><td>1.25</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4968.00</td><td>40.93</td><td>74.00</td><td>-33.07</td><td>57.19</td><td>33.06</td><td>7.35</td><td>57.09</td><td>0.42</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7448.00</td><td>44.76</td><td>74.00</td><td>-29.24</td><td>56.50</td><td>36.42</td><td>8.98</td><td>57.62</td><td>0.48</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3306.00	41.69	74.00	-32.31	62.62	29.60	6.17	57.95	1.25	--	PEAK	2	4968.00	40.93	74.00	-33.07	57.19	33.06	7.35	57.09	0.42	--	PEAK	3	7448.00	44.76	74.00	-29.24	56.50	36.42	8.98	57.62	0.48	--	PEAK	 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3306.00</td><td>40.73</td><td>74.00</td><td>-33.27</td><td>61.66</td><td>29.60</td><td>6.17</td><td>57.95</td><td>1.25</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4968.00</td><td>41.41</td><td>74.00</td><td>-32.59</td><td>57.67</td><td>33.06</td><td>7.35</td><td>57.09</td><td>0.42</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7448.00</td><td>44.92</td><td>74.00</td><td>-29.08</td><td>56.66</td><td>36.42</td><td>8.98</td><td>57.62</td><td>0.48</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3306.00	40.73	74.00	-33.27	61.66	29.60	6.17	57.95	1.25	--	PEAK	2	4968.00	41.41	74.00	-32.59	57.67	33.06	7.35	57.09	0.42	--	PEAK	3	7448.00	44.92	74.00	-29.08	56.66	36.42	8.98	57.62	0.48	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	3306.00	41.69	74.00	-32.31	62.62	29.60	6.17	57.95	1.25	--	PEAK																																																																																																																													
2	4968.00	40.93	74.00	-33.07	57.19	33.06	7.35	57.09	0.42	--	PEAK																																																																																																																													
3	7448.00	44.76	74.00	-29.24	56.50	36.42	8.98	57.62	0.48	--	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	3306.00	40.73	74.00	-33.27	61.66	29.60	6.17	57.95	1.25	--	PEAK																																																																																																																													
2	4968.00	41.41	74.00	-32.59	57.67	33.06	7.35	57.09	0.42	--	PEAK																																																																																																																													
3	7448.00	44.92	74.00	-29.08	56.66	36.42	8.98	57.62	0.48	--	PEAK																																																																																																																													







Mode	9	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL
17.7G ~18G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL



<2Mbps>

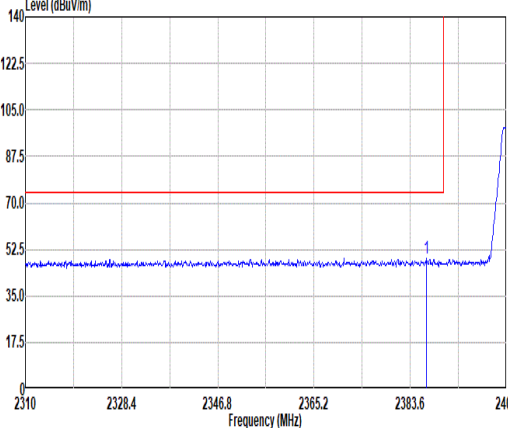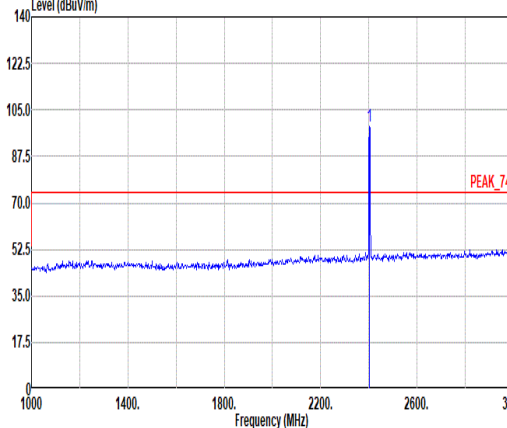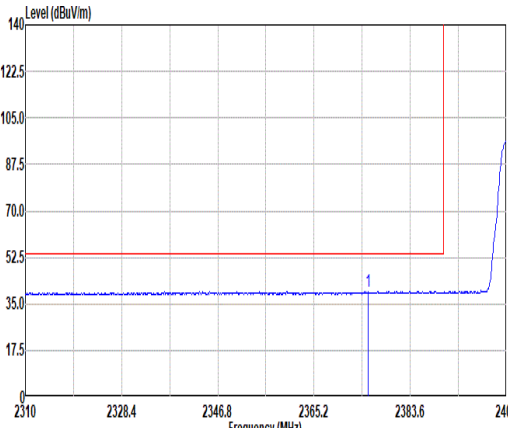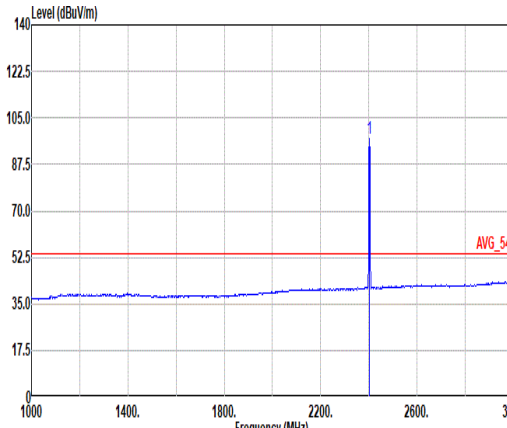		10																																																																																																	
Mode	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.64</td><td>49.31</td><td>74.00</td><td>-24.69</td><td>44.30</td><td>27.47</td><td>4.69</td><td>37.08</td><td>9.93</td><td>136</td><td>242</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.64	49.31	74.00	-24.69	44.30	27.47	4.69	37.08	9.93	136	242	PEAK	Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>98.64</td><td>-----</td><td>-----</td><td>93.59</td><td>27.50</td><td>4.70</td><td>37.08</td><td>9.93</td><td>136</td><td>242</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	98.64	-----	-----	93.59	27.50	4.70	37.08	9.93	136	242
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2386.64	49.31	74.00	-24.69	44.30	27.47	4.69	37.08	9.93	136	242	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	98.64	-----	-----	93.59	27.50	4.70	37.08	9.93	136	242	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2375.60</td><td>39.83</td><td>54.00</td><td>-14.17</td><td>34.94</td><td>27.36</td><td>4.68</td><td>37.08</td><td>9.93</td><td>136</td><td>242</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2375.60	39.83	54.00	-14.17	34.94	27.36	4.68	37.08	9.93	136	242	AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>97.13</td><td>-----</td><td>-----</td><td>92.08</td><td>27.50</td><td>4.70</td><td>37.08</td><td>9.93</td><td>136</td><td>242</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	97.13	-----	-----	92.08	27.50	4.70	37.08	9.93	136	242
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2375.60	39.83	54.00	-14.17	34.94	27.36	4.68	37.08	9.93	136	242	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	97.13	-----	-----	92.08	27.50	4.70	37.08	9.93	136	242	AVERAGE																																																																																							

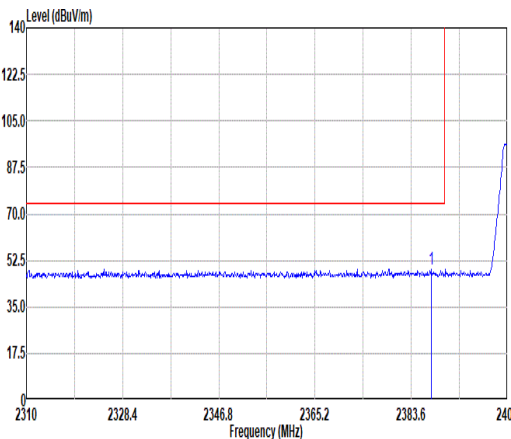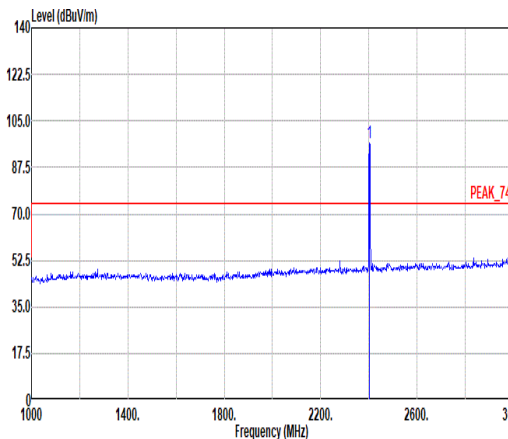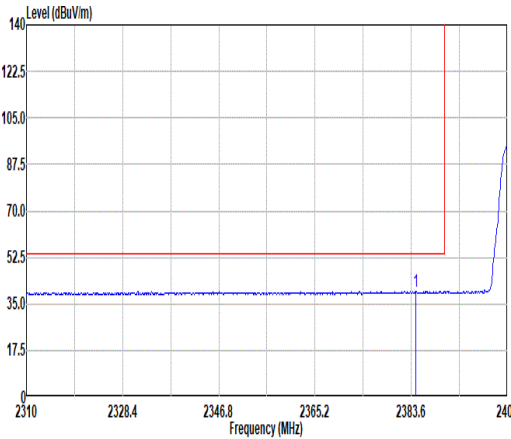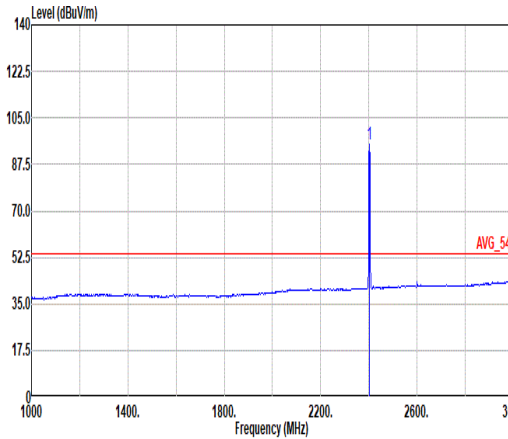

Mode	10																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.46</td><td>49.32</td><td>74.00</td><td>-24.68</td><td>44.31</td><td>27.47</td><td>4.69</td><td>37.08</td><td>9.93</td><td>291</td><td>159</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.46	49.32	74.00	-24.68	44.31	27.47	4.69	37.08	9.93	291	159	PEAK	Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>96.67</td><td>-----</td><td>-----</td><td>91.62</td><td>27.50</td><td>4.70</td><td>37.08</td><td>9.93</td><td>291</td><td>159</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	96.67	-----	-----	91.62	27.50	4.70	37.08	9.93	291	159
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2387.46	49.32	74.00	-24.68	44.31	27.47	4.69	37.08	9.93	291	159	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	96.67	-----	-----	91.62	27.50	4.70	37.08	9.93	291	159	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2384.43</td><td>39.84</td><td>54.00</td><td>-14.16</td><td>34.86</td><td>27.44</td><td>4.69</td><td>37.08</td><td>9.93</td><td>291</td><td>159</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.43	39.84	54.00	-14.16	34.86	27.44	4.69	37.08	9.93	291	159	AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>95.07</td><td>-----</td><td>-----</td><td>90.02</td><td>27.50</td><td>4.70</td><td>37.08</td><td>9.93</td><td>291</td><td>159</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	95.07	-----	-----	90.02	27.50	4.70	37.08	9.93	291	159
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2384.43	39.84	54.00	-14.16	34.86	27.44	4.69	37.08	9.93	291	159	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	95.07	-----	-----	90.02	27.50	4.70	37.08	9.93	291	159	AVERAGE																																																																																							







Mode	10																																																																																																																						
	Harmonic																																																																																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Horizontal					Vertical																																																																																																																	
Peak Avg																																																																																																																							
	Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL					Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3202.00</td><td>41.90</td><td>74.00</td><td>-32.10</td><td>62.44</td><td>29.89</td><td>6.05</td><td>57.84</td><td>1.36</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>40.97</td><td>74.00</td><td>-33.03</td><td>58.00</td><td>32.32</td><td>6.82</td><td>57.44</td><td>0.47</td><td>--</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3202.00	41.90	74.00	-32.10	62.44	29.89	6.05	57.84	1.36	--	PEAK	2	4804.00	40.97	74.00	-33.03	58.00	32.32	6.82	57.44	0.47	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3202.00</td><td>42.58</td><td>74.00</td><td>-31.42</td><td>63.12</td><td>29.89</td><td>6.05</td><td>57.84</td><td>1.36</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4804.00</td><td>39.85</td><td>74.00</td><td>-34.15</td><td>57.68</td><td>32.32</td><td>6.82</td><td>57.44</td><td>0.47</td><td>--</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3202.00	42.58	74.00	-31.42	63.12	29.89	6.05	57.84	1.36	--	PEAK	2	4804.00	39.85	74.00	-34.15	57.68	32.32	6.82	57.44	0.47	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	3202.00	41.90	74.00	-32.10	62.44	29.89	6.05	57.84	1.36	--	PEAK																																																																																																												
2	4804.00	40.97	74.00	-33.03	58.00	32.32	6.82	57.44	0.47	--	PEAK																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	3202.00	42.58	74.00	-31.42	63.12	29.89	6.05	57.84	1.36	--	PEAK																																																																																																												
2	4804.00	39.85	74.00	-34.15	57.68	32.32	6.82	57.44	0.47	--	PEAK																																																																																																												





Mode	10	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL
17.7G ~18G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL

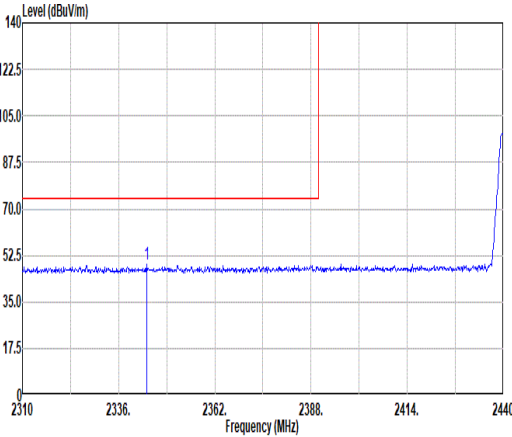
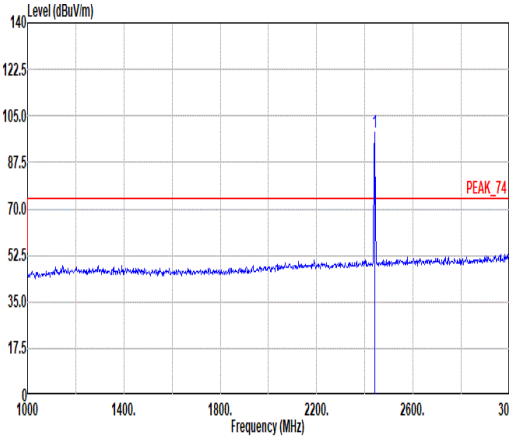
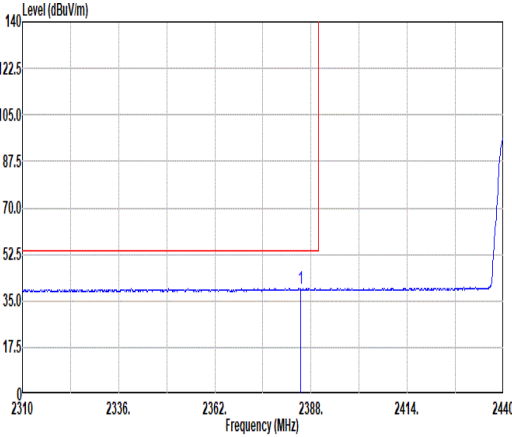
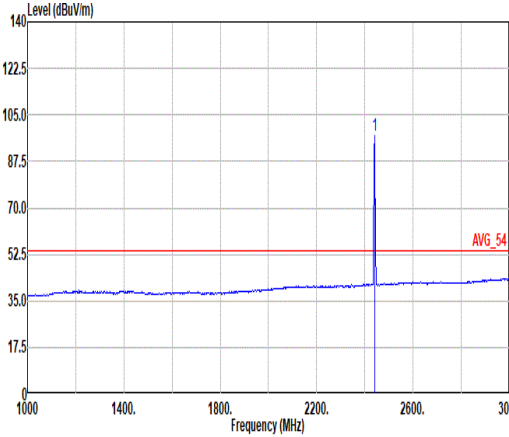


Mode	11																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5 Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2343.67</td><td>49.01</td><td>74.00</td><td>-24.99</td><td>44.28</td><td>27.24</td><td>4.65</td><td>37.09</td><td>9.93</td><td>100</td><td>236</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2343.67	49.01	74.00	-24.99	44.28	27.24	4.65	37.09	9.93	100	236	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>98.93</td><td>-----</td><td>-----</td><td>93.74</td><td>27.60</td><td>4.74</td><td>37.08</td><td>9.93</td><td>100</td><td>236</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	98.93	-----	-----	93.74	27.60	4.74	37.08	9.93	100	236
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2343.67	49.01	74.00	-24.99	44.28	27.24	4.65	37.09	9.93	100	236	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	98.93	-----	-----	93.74	27.60	4.74	37.08	9.93	100	236	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto						Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2385.14</td><td>39.67</td><td>54.00</td><td>-14.33</td><td>34.68</td><td>27.45</td><td>4.69</td><td>37.08</td><td>9.93</td><td>100</td><td>236</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.14	39.67	54.00	-14.33	34.68	27.45	4.69	37.08	9.93	100	236	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>97.26</td><td>-----</td><td>-----</td><td>92.07</td><td>27.60</td><td>4.74</td><td>37.08</td><td>9.93</td><td>100</td><td>236</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	97.26	-----	-----	92.07	27.60	4.74	37.08	9.93	100	236
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2385.14	39.67	54.00	-14.33	34.68	27.45	4.69	37.08	9.93	100	236	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	97.26	-----	-----	92.07	27.60	4.74	37.08	9.93	100	236	AVERAGE																																																																																							

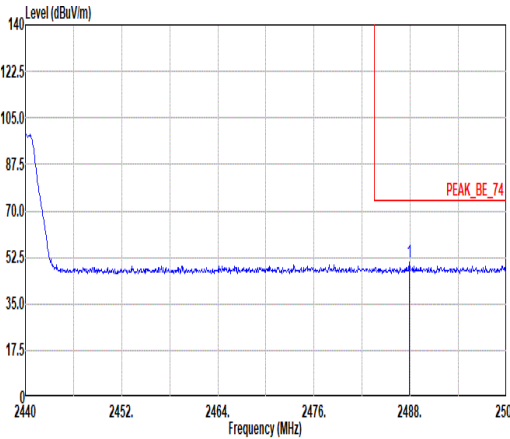
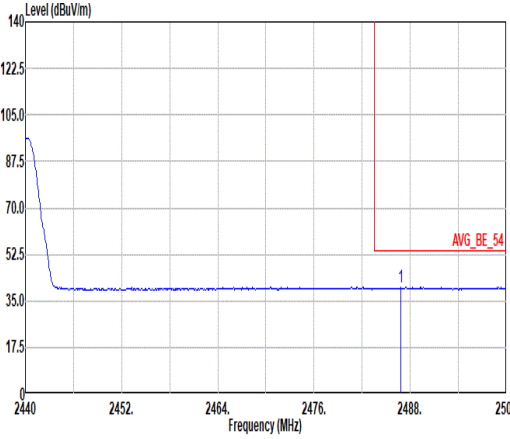


Mode	11																																																							
	Band Edge - R																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.88</td><td>50.74</td><td>74.00</td><td>-23.26</td><td>45.28</td><td>27.80</td><td>4.80</td><td>37.07</td><td>9.93</td><td>100</td><td>236</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.88	50.74	74.00	-23.26	45.28	27.80	4.80	37.07	9.93	100	236	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2487.88	50.74	74.00	-23.26	45.28	27.80	4.80	37.07	9.93	100	236	PEAK																																												
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.80</td><td>40.15</td><td>54.00</td><td>-13.85</td><td>34.69</td><td>27.80</td><td>4.80</td><td>37.07</td><td>9.93</td><td>100</td><td>236</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.80	40.15	54.00	-13.85	34.69	27.80	4.80	37.07	9.93	100	236	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2486.80	40.15	54.00	-13.85	34.69	27.80	4.80	37.07	9.93	100	236	AVERAGE																																												

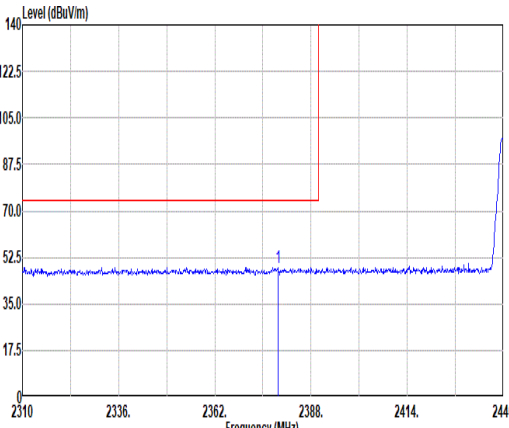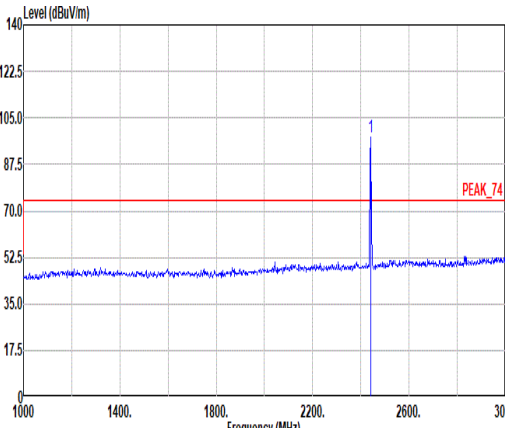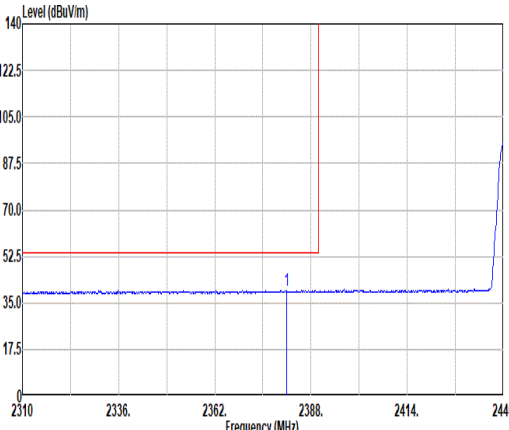
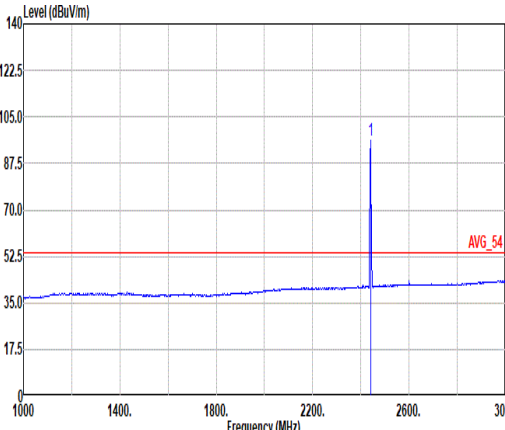


Mode	11																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2379.03</td><td>48.69</td><td>74.00</td><td>-25.31</td><td>43.77</td><td>27.39</td><td>4.68</td><td>37.08</td><td>9.93</td><td>218</td><td>155</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2379.03	48.69	74.00	-25.31	43.77	27.39	4.68	37.08	9.93	218	155	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>97.70</td><td>-----</td><td>-----</td><td>92.51</td><td>27.60</td><td>4.74</td><td>37.08</td><td>9.93</td><td>218</td><td>155</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	97.70	-----	-----	92.51	27.60	4.74	37.08	9.93	218	155
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2379.03	48.69	74.00	-25.31	43.77	27.39	4.68	37.08	9.93	218	155	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	97.70	-----	-----	92.51	27.60	4.74	37.08	9.93	218	155	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto						Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2381.37</td><td>39.84</td><td>54.00</td><td>-14.16</td><td>34.90</td><td>27.41</td><td>4.68</td><td>37.08</td><td>9.93</td><td>218</td><td>155</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2381.37	39.84	54.00	-14.16	34.90	27.41	4.68	37.08	9.93	218	155	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>96.08</td><td>-----</td><td>-----</td><td>90.89</td><td>27.60</td><td>4.74</td><td>37.08</td><td>9.93</td><td>218</td><td>155</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	96.08	-----	-----	90.89	27.60	4.74	37.08	9.93	218	155
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2381.37	39.84	54.00	-14.16	34.90	27.41	4.68	37.08	9.93	218	155	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	96.08	-----	-----	90.89	27.60	4.74	37.08	9.93	218	155	AVERAGE																																																																																							



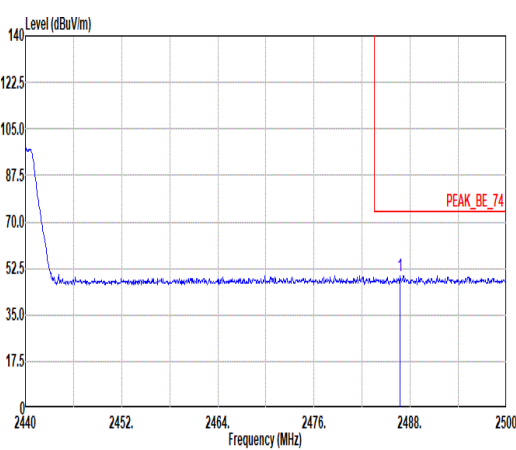
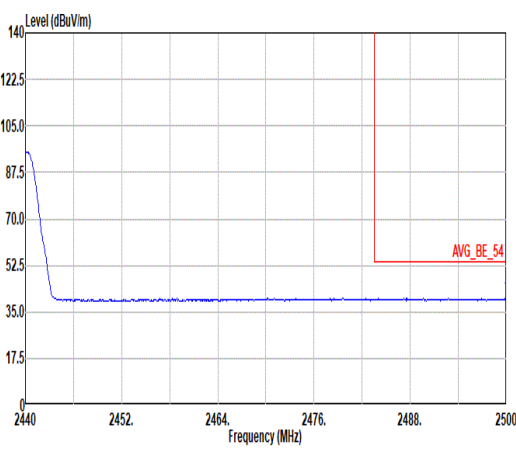


Mode	11																																																																									
	Band Edge - R																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																									
ANT	1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2486.74</td><td>49.70</td><td>74.00</td><td>-24.30</td><td>44.24</td><td>27.80</td><td>4.80</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>37.07</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>9.93</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>218</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>155</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2486.74	49.70	74.00	-24.30	44.24	27.80	4.80								37.07								9.93								218								155								PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2486.74	49.70	74.00	-24.30	44.24	27.80	4.80																																																																			
							37.07																																																																			
							9.93																																																																			
							218																																																																			
							155																																																																			
							PEAK																																																																			
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2500.00</td><td>40.43</td><td>54.00</td><td>-13.57</td><td>34.96</td><td>27.80</td><td>4.81</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>37.07</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>9.93</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>218</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>155</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2500.00	40.43	54.00	-13.57	34.96	27.80	4.81								37.07								9.93								218								155								AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2500.00	40.43	54.00	-13.57	34.96	27.80	4.81																																																																			
							37.07																																																																			
							9.93																																																																			
							218																																																																			
							155																																																																			
							AVERAGE																																																																			



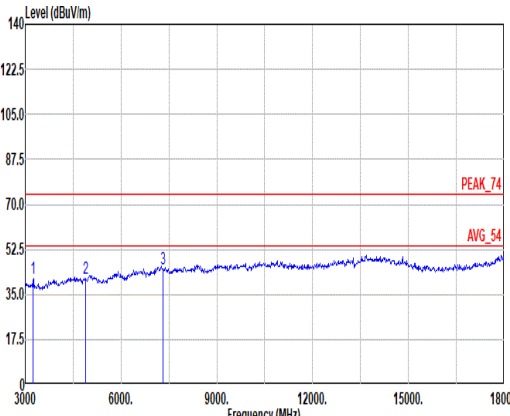
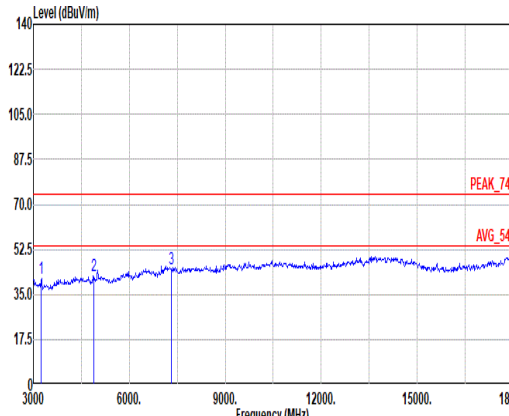


Mode	11																																																																																																																																							
	Harmonic																																																																																																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																																																							
ANT	1																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3253.00</td><td>41.06</td><td>74.00</td><td>-32.94</td><td>61.84</td><td>29.69</td><td>6.11</td><td>57.89</td><td>1.31</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>41.42</td><td>74.00</td><td>-32.58</td><td>58.50</td><td>32.66</td><td>7.08</td><td>57.27</td><td>0.45</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7320.00</td><td>44.73</td><td>74.00</td><td>-29.27</td><td>55.72</td><td>36.92</td><td>8.95</td><td>57.39</td><td>0.53</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3253.00	41.06	74.00	-32.94	61.84	29.69	6.11	57.89	1.31	--	PEAK	2	4880.00	41.42	74.00	-32.58	58.50	32.66	7.08	57.27	0.45	--	PEAK	3	7320.00	44.73	74.00	-29.27	55.72	36.92	8.95	57.39	0.53	--	PEAK	 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3253.00</td><td>41.20</td><td>74.00</td><td>-32.80</td><td>61.90</td><td>29.69</td><td>6.11</td><td>57.89</td><td>1.31</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>42.10</td><td>74.00</td><td>-31.90</td><td>59.18</td><td>32.66</td><td>7.08</td><td>57.27</td><td>0.45</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7320.00</td><td>44.95</td><td>74.00</td><td>-29.05</td><td>55.94</td><td>36.92</td><td>8.95</td><td>57.39</td><td>0.53</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3253.00	41.20	74.00	-32.80	61.90	29.69	6.11	57.89	1.31	--	PEAK	2	4880.00	42.10	74.00	-31.90	59.18	32.66	7.08	57.27	0.45	--	PEAK	3	7320.00	44.95	74.00	-29.05	55.94	36.92	8.95	57.39	0.53	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	3253.00	41.06	74.00	-32.94	61.84	29.69	6.11	57.89	1.31	--	PEAK																																																																																																																													
2	4880.00	41.42	74.00	-32.58	58.50	32.66	7.08	57.27	0.45	--	PEAK																																																																																																																													
3	7320.00	44.73	74.00	-29.27	55.72	36.92	8.95	57.39	0.53	--	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	3253.00	41.20	74.00	-32.80	61.90	29.69	6.11	57.89	1.31	--	PEAK																																																																																																																													
2	4880.00	42.10	74.00	-31.90	59.18	32.66	7.08	57.27	0.45	--	PEAK																																																																																																																													
3	7320.00	44.95	74.00	-29.05	55.94	36.92	8.95	57.39	0.53	--	PEAK																																																																																																																													

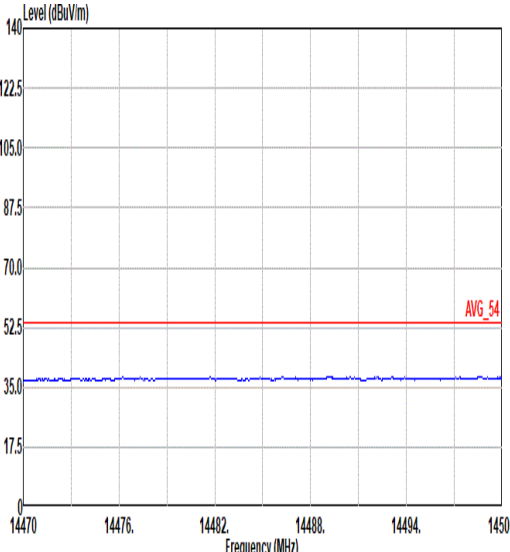
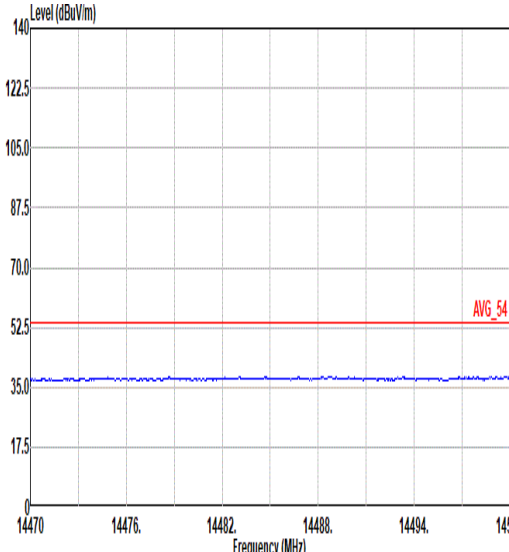
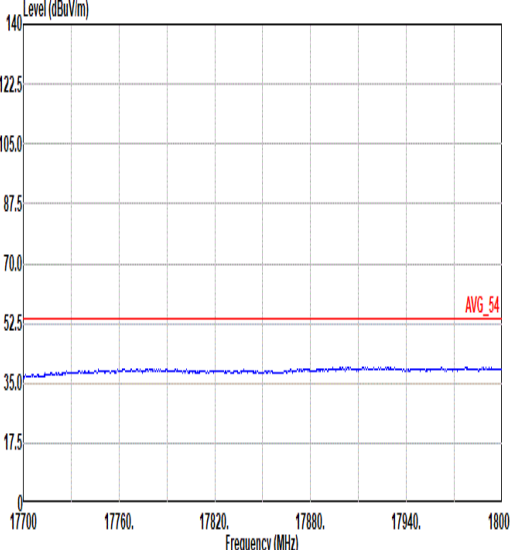
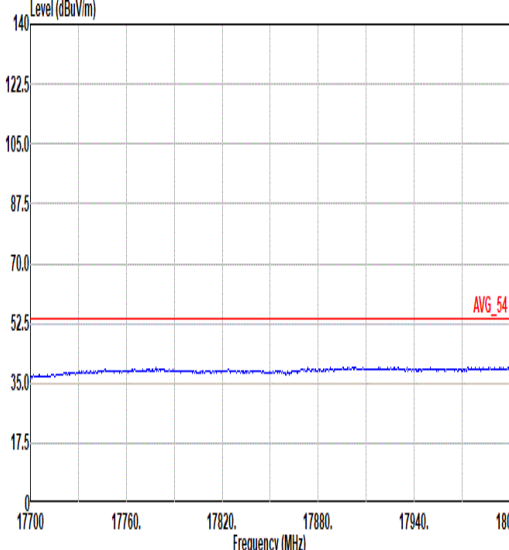


Mode	11	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL
17.7G ~18G Avg	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL

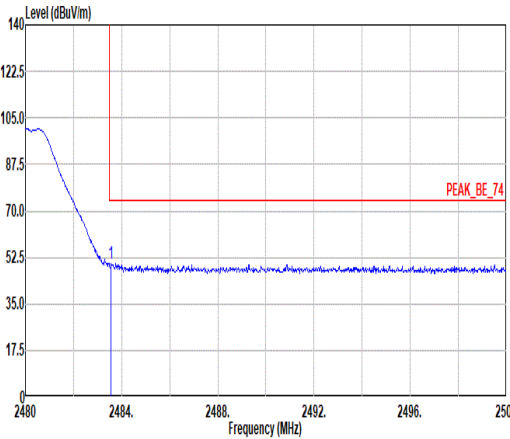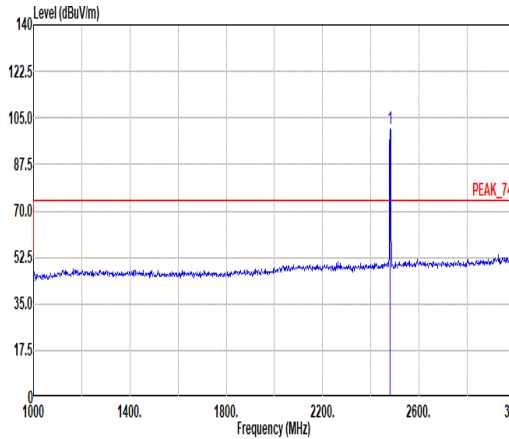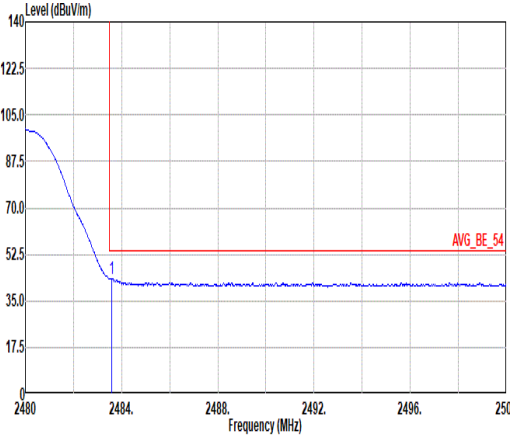
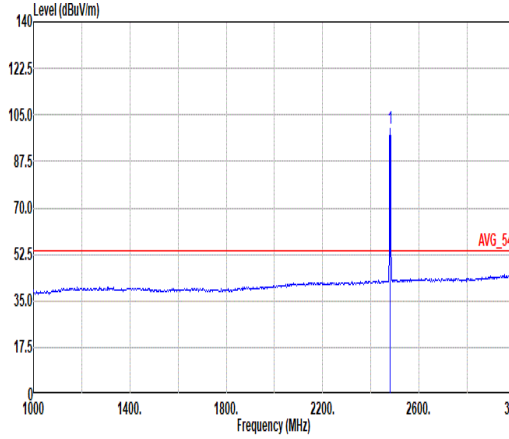


Mode	12																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.56</td><td>50.27</td><td>74.00</td><td>-23.73</td><td>44.82</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>100</td><td>241</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	50.27	74.00	-23.73	44.82	27.80	4.79	37.07	9.93	100	241	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>101.09</td><td>-----</td><td>-----</td><td>95.64</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>100</td><td>241</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.09	-----	-----	95.64	27.80	4.79	37.07	9.93	100	241
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.56	50.27	74.00	-23.73	44.82	27.80	4.79	37.07	9.93	100	241	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	101.09	-----	-----	95.64	27.80	4.79	37.07	9.93	100	241	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto						Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.60</td><td>43.56</td><td>54.00</td><td>-10.44</td><td>38.11</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>100</td><td>241</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.60	43.56	54.00	-10.44	38.11	27.80	4.79	37.07	9.93	100	241	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>99.78</td><td>-----</td><td>-----</td><td>94.33</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>100</td><td>241</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.78	-----	-----	94.33	27.80	4.79	37.07	9.93	100	241
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.60	43.56	54.00	-10.44	38.11	27.80	4.79	37.07	9.93	100	241	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	99.78	-----	-----	94.33	27.80	4.79	37.07	9.93	100	241	AVERAGE																																																																																							

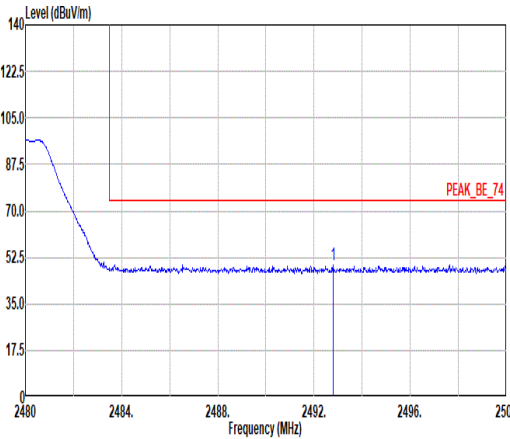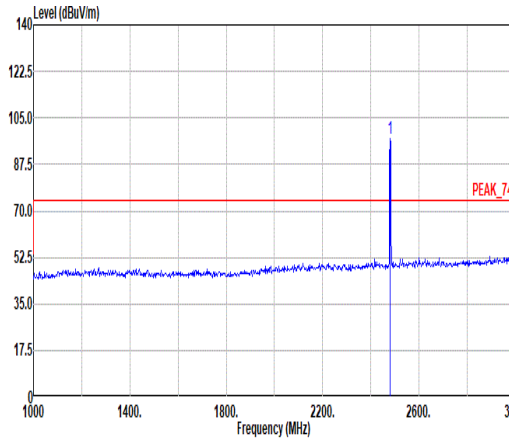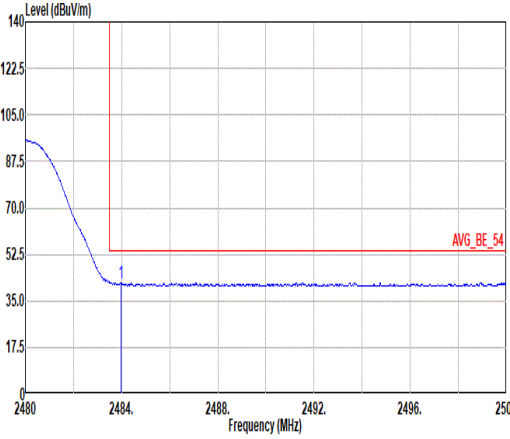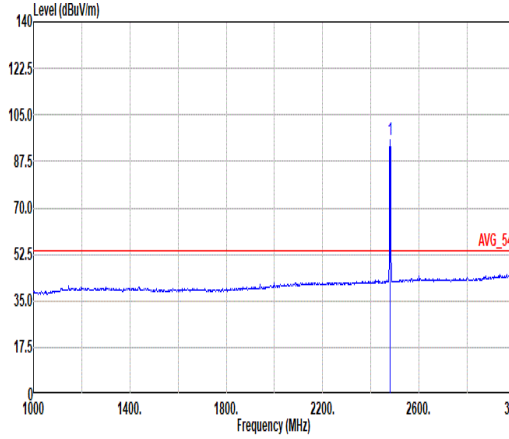

Mode	12																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2492.00</td><td>49.70</td><td>74.00</td><td>-24.30</td><td>44.24</td><td>27.80</td><td>4.80</td><td>37.07</td><td>9.93</td><td>276</td><td>154</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.00	49.70	74.00	-24.30	44.24	27.80	4.80	37.07	9.93	276	154	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>97.01</td><td>-----</td><td>-----</td><td>91.56</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>276</td><td>154</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.01	-----	-----	91.56	27.80	4.79	37.07	9.93	276	154
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2492.00	49.70	74.00	-24.30	44.24	27.80	4.80	37.07	9.93	276	154	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	97.01	-----	-----	91.56	27.80	4.79	37.07	9.93	276	154	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto						Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.98</td><td>41.80</td><td>54.00</td><td>-12.20</td><td>36.35</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>276</td><td>154</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.98	41.80	54.00	-12.20	36.35	27.80	4.79	37.07	9.93	276	154	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>95.66</td><td>-----</td><td>-----</td><td>90.21</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>276</td><td>154</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	95.66	-----	-----	90.21	27.80	4.79	37.07	9.93	276	154
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.98	41.80	54.00	-12.20	36.35	27.80	4.79	37.07	9.93	276	154	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	95.66	-----	-----	90.21	27.80	4.79	37.07	9.93	276	154	AVERAGE																																																																																							

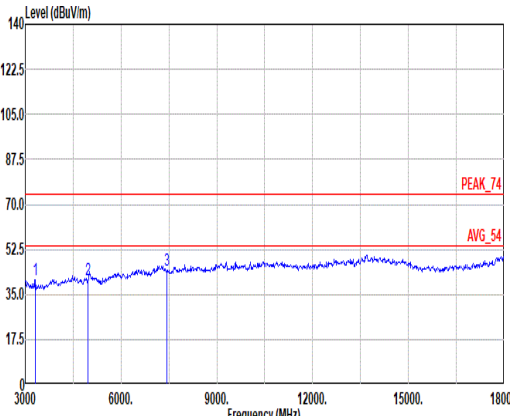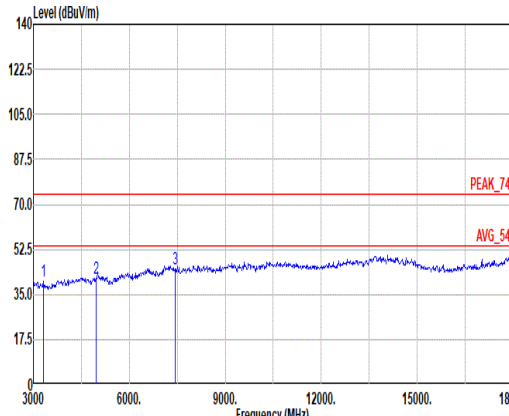

Mode	12												
	Harmonic												
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz												
ANT	1												
Pol.	Horizontal						Vertical						
Peak Avg													
	Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL						Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	3306.00	40.78	74.00	-33.22	61.71	29.60	6.17	57.95	1.25	--	--	--	PEAK
2	4968.00	40.77	74.00	-33.23	57.03	33.06	7.35	57.09	0.42	--	--	--	PEAK
3	7448.00	44.39	74.00	-29.61	56.13	36.42	8.98	57.62	0.48	--	--	--	PEAK
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	3306.00	40.25	74.00	-33.75	61.18	29.60	6.17	57.95	1.25	--	--	--	PEAK
2	4968.00	41.44	74.00	-32.56	57.70	33.06	7.35	57.09	0.42	--	--	--	PEAK
3	7448.00	44.69	74.00	-29.31	56.43	36.42	8.98	57.62	0.48	--	--	--	PEAK





Mode	12	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL
17.7G ~18G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL



Mode	13																																																																																																																																																																																																																						
	LF																																																																																																																																																																																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																																																																																																						
ANT	1																																																																																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																																																																																
QP/ Peak																																																																																																																																																																																																																							
	Site : 03CH13-HY Condition: QP 3m BILOG_40103 HORIZONTAL						Site : 03CH13-HY Condition: QP 3m BILOG_40103 VERTICAL																																																																																																																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>30.97</td><td>29.81</td><td>40.00</td><td>-10.19</td><td>36.22</td><td>24.81</td><td>1.05</td><td>32.32</td><td>0.05</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>164.83</td><td>33.23</td><td>43.50</td><td>-10.27</td><td>47.73</td><td>15.93</td><td>1.64</td><td>32.19</td><td>0.12</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>257.95</td><td>40.12</td><td>46.00</td><td>-5.88</td><td>50.57</td><td>19.67</td><td>1.90</td><td>32.13</td><td>0.11</td><td>101</td><td>311 QP</td></tr><tr><td>4</td><td>305.48</td><td>34.25</td><td>46.00</td><td>-11.75</td><td>44.88</td><td>19.31</td><td>2.01</td><td>32.08</td><td>0.13</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>714.82</td><td>33.29</td><td>46.00</td><td>-12.71</td><td>35.49</td><td>26.99</td><td>2.78</td><td>32.11</td><td>0.14</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>955.38</td><td>33.08</td><td>46.00</td><td>-12.92</td><td>29.70</td><td>31.00</td><td>3.11</td><td>30.94</td><td>0.21</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	30.97	29.81	40.00	-10.19	36.22	24.81	1.05	32.32	0.05	--	Peak	2	164.83	33.23	43.50	-10.27	47.73	15.93	1.64	32.19	0.12	--	Peak	3	257.95	40.12	46.00	-5.88	50.57	19.67	1.90	32.13	0.11	101	311 QP	4	305.48	34.25	46.00	-11.75	44.88	19.31	2.01	32.08	0.13	--	Peak	5	714.82	33.29	46.00	-12.71	35.49	26.99	2.78	32.11	0.14	--	Peak	6	955.38	33.08	46.00	-12.92	29.70	31.00	3.11	30.94	0.21	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>30.00</td><td>39.65</td><td>40.00</td><td>-0.35</td><td>45.58</td><td>25.30</td><td>1.05</td><td>32.31</td><td>0.03</td><td>100</td><td>135 QP</td></tr><tr><td>2</td><td>172.59</td><td>36.36</td><td>43.50</td><td>-7.14</td><td>51.39</td><td>15.38</td><td>1.66</td><td>32.20</td><td>0.13</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>257.95</td><td>39.18</td><td>46.00</td><td>-6.82</td><td>49.63</td><td>19.67</td><td>1.90</td><td>32.13</td><td>0.11</td><td>102</td><td>331 QP</td></tr><tr><td>4</td><td>500.45</td><td>32.45</td><td>46.00</td><td>-13.55</td><td>38.21</td><td>23.92</td><td>2.41</td><td>32.19</td><td>0.10</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>600.36</td><td>33.62</td><td>46.00</td><td>-12.38</td><td>37.54</td><td>25.60</td><td>2.58</td><td>32.23</td><td>0.13</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>949.56</td><td>34.36</td><td>46.00</td><td>-11.64</td><td>31.06</td><td>30.98</td><td>3.10</td><td>30.99</td><td>0.21</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	30.00	39.65	40.00	-0.35	45.58	25.30	1.05	32.31	0.03	100	135 QP	2	172.59	36.36	43.50	-7.14	51.39	15.38	1.66	32.20	0.13	--	Peak	3	257.95	39.18	46.00	-6.82	49.63	19.67	1.90	32.13	0.11	102	331 QP	4	500.45	32.45	46.00	-13.55	38.21	23.92	2.41	32.19	0.10	--	Peak	5	600.36	33.62	46.00	-12.38	37.54	25.60	2.58	32.23	0.13	--	Peak	6	949.56	34.36	46.00	-11.64	31.06	30.98	3.10	30.99	0.21	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																																																																																																																														
1	30.97	29.81	40.00	-10.19	36.22	24.81	1.05	32.32	0.05	--	Peak																																																																																																																																																																																																												
2	164.83	33.23	43.50	-10.27	47.73	15.93	1.64	32.19	0.12	--	Peak																																																																																																																																																																																																												
3	257.95	40.12	46.00	-5.88	50.57	19.67	1.90	32.13	0.11	101	311 QP																																																																																																																																																																																																												
4	305.48	34.25	46.00	-11.75	44.88	19.31	2.01	32.08	0.13	--	Peak																																																																																																																																																																																																												
5	714.82	33.29	46.00	-12.71	35.49	26.99	2.78	32.11	0.14	--	Peak																																																																																																																																																																																																												
6	955.38	33.08	46.00	-12.92	29.70	31.00	3.11	30.94	0.21	--	Peak																																																																																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																																																																																																																														
1	30.00	39.65	40.00	-0.35	45.58	25.30	1.05	32.31	0.03	100	135 QP																																																																																																																																																																																																												
2	172.59	36.36	43.50	-7.14	51.39	15.38	1.66	32.20	0.13	--	Peak																																																																																																																																																																																																												
3	257.95	39.18	46.00	-6.82	49.63	19.67	1.90	32.13	0.11	102	331 QP																																																																																																																																																																																																												
4	500.45	32.45	46.00	-13.55	38.21	23.92	2.41	32.19	0.10	--	Peak																																																																																																																																																																																																												
5	600.36	33.62	46.00	-12.38	37.54	25.60	2.58	32.23	0.13	--	Peak																																																																																																																																																																																																												
6	949.56	34.36	46.00	-11.64	31.06	30.98	3.10	30.99	0.21	--	Peak																																																																																																																																																																																																												



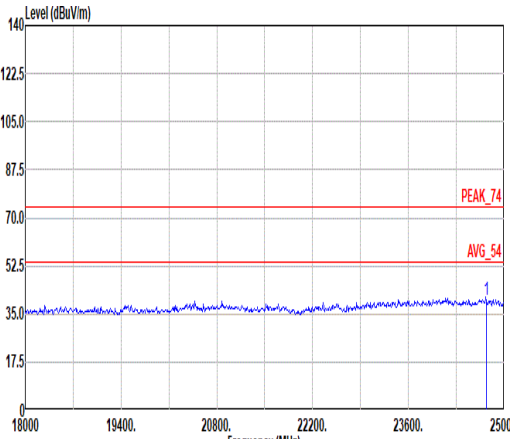
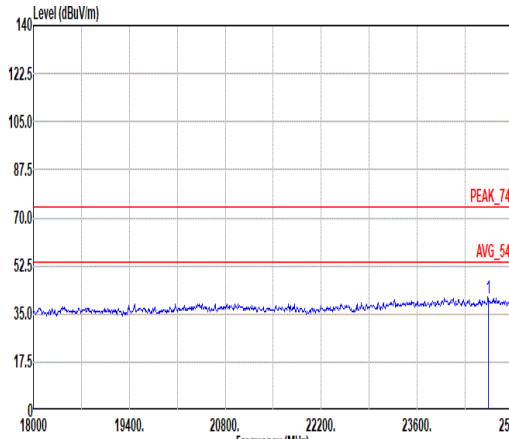


Mode	14																																																																																																			
	SHF																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak																																																																																																				
	Site : 03CH13-HY Condition: PEAK_74 1m SHF_00993_231124 HORIZONTAL						Site : 03CH13-HY Condition: PEAK_74 1m SHF_00993_231124 VERTICAL																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24744.52</td><td>40.15</td><td>74.00</td><td>-33.85</td><td>56.92</td><td>39.12</td><td>7.00</td><td>53.35</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24744.52	40.15	74.00	-33.85	56.92	39.12	7.00	53.35	-9.54	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24636.32</td><td>40.87</td><td>74.00</td><td>-33.13</td><td>57.64</td><td>39.17</td><td>7.02</td><td>53.42</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	24636.32	40.87	74.00	-33.13	57.64	39.17	7.02	53.42	-9.54	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	24744.52	40.15	74.00	-33.85	56.92	39.12	7.00	53.35	-9.54	--	--	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	24636.32	40.87	74.00	-33.13	57.64	39.17	7.02	53.42	-9.54	--	--	PEAK																																																																																								







<Sample 2>



<2Mbps>

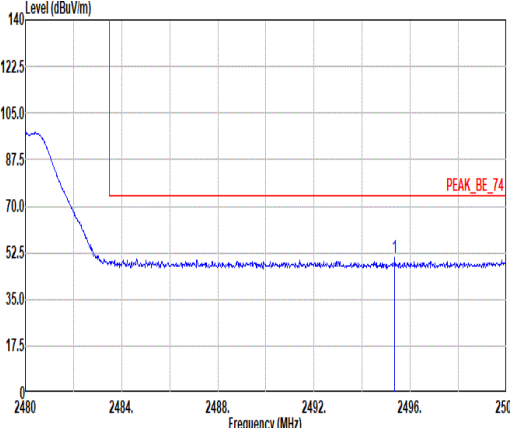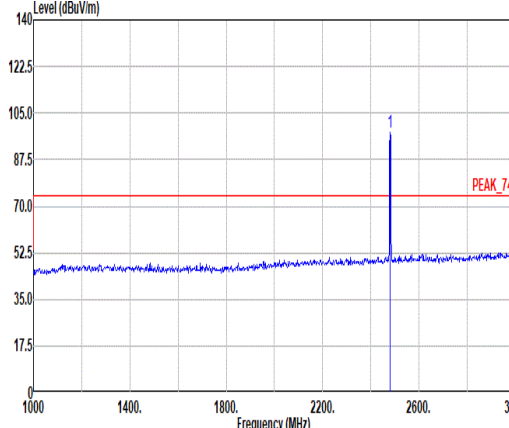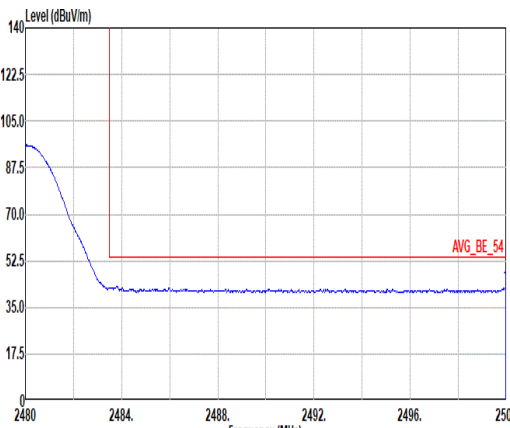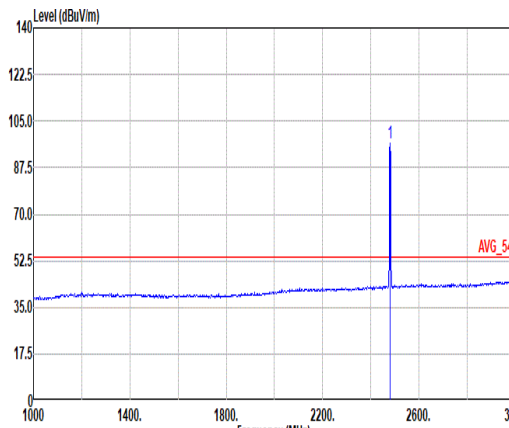Mode	14																																																																																																																						
	Band Edge																																																																																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																																
Peak																																																																																																																							
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto												Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2495.36</td><td>50.66</td><td>74.00</td><td>-23.34</td><td>45.20</td><td>27.80</td><td>4.80</td><td>37.07</td><td>9.93</td><td>100</td><td>241 PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2495.36	50.66	74.00	-23.34	45.20	27.80	4.80	37.07	9.93	100	241 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>97.88</td><td>-----</td><td>-----</td><td>92.43</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>100</td><td>241 PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	97.88	-----	-----	92.43	27.80	4.79	37.07	9.93	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	2495.36	50.66	74.00	-23.34	45.20	27.80	4.80	37.07	9.93	100	241 PEAK																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	2480.00	97.88	-----	-----	92.43	27.80	4.79	37.07	9.93	100	241 PEAK																																																																																																												
Avg																																																																																																																							
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto												Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2499.96</td><td>42.70</td><td>54.00</td><td>-11.30</td><td>37.23</td><td>27.80</td><td>4.81</td><td>37.07</td><td>9.93</td><td>100</td><td>241 AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2499.96	42.70	54.00	-11.30	37.23	27.80	4.81	37.07	9.93	100	241 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>96.73</td><td>-----</td><td>-----</td><td>91.28</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>100</td><td>241 AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	96.73	-----	-----	91.28	27.80	4.79	37.07	9.93	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	2499.96	42.70	54.00	-11.30	37.23	27.80	4.81	37.07	9.93	100	241 AVERAGE																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	2480.00	96.73	-----	-----	91.28	27.80	4.79	37.07	9.93	100	241 AVERAGE																																																																																																												

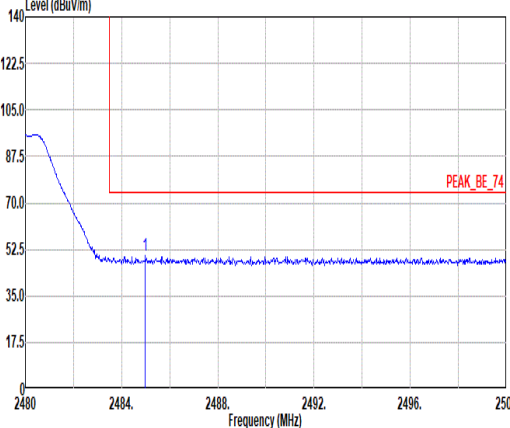
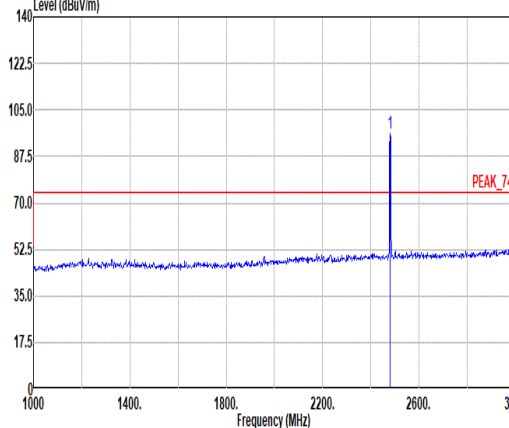
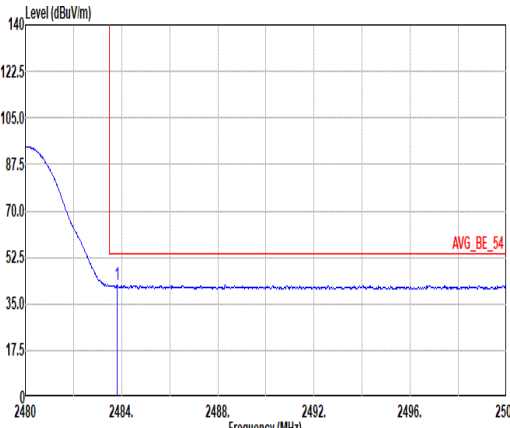
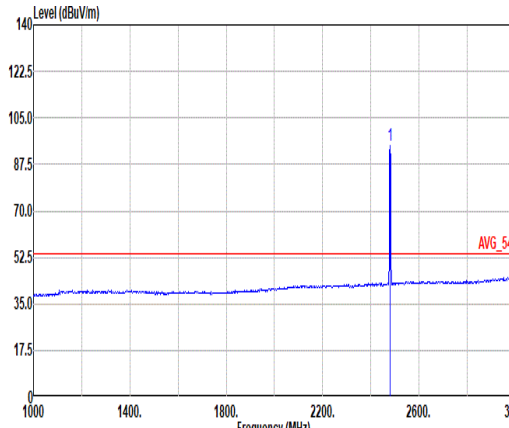


Mode	14																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																									
ANT	1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2484.98</td><td>49.96</td><td>74.00</td><td>-24.04</td><td>44.51</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.98	49.96	74.00	-24.04	44.51	27.80	4.79	37.07	9.93	 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2480.00</td><td>96.07</td><td>-----</td><td>-----</td><td>90.62</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2480.00	96.07	-----	-----	90.62	27.80	4.79	37.07	9.93
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																		
1 2484.98	49.96	74.00	-24.04	44.51	27.80	4.79	37.07	9.93																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																		
1 2480.00	96.07	-----	-----	90.62	27.80	4.79	37.07	9.93																																																																		
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2483.00</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>36.95</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.00	42.40	54.00	-11.60	36.95	27.80	4.79	37.07	9.93	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2480.00</td><td>94.80</td><td>-----</td><td>-----</td><td>89.35</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2480.00	94.80	-----	-----	89.35	27.80	4.79	37.07	9.93
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																		
1 2483.00	42.40	54.00	-11.60	36.95	27.80	4.79	37.07	9.93																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																		
1 2480.00	94.80	-----	-----	89.35	27.80	4.79	37.07	9.93																																																																		

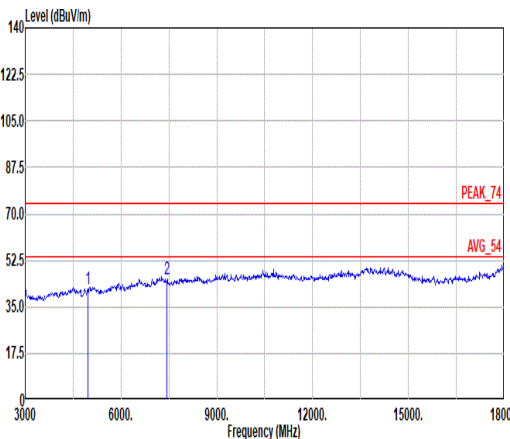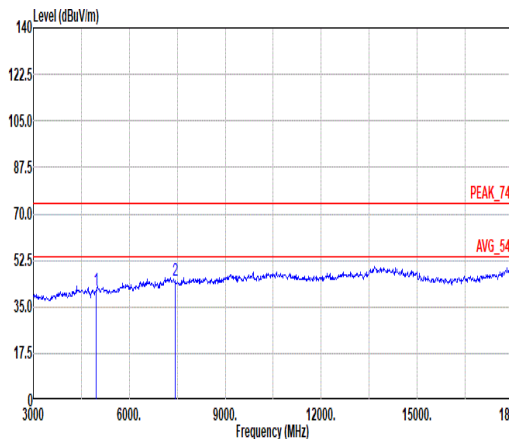

Mode	14																																																																						
	Harmonic																																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																						
ANT	1																																																																						
Pol.	Horizontal						Vertical																																																																
Peak Avg																																																																							
	Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL						Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL																																																																
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>41.52</td><td>74.00</td><td>-32.48</td><td>57.78</td><td>33.06</td><td>7.35</td><td>57.09</td><td>0.42</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>45.18</td><td>74.00</td><td>-28.82</td><td>56.92</td><td>36.42</td><td>8.98</td><td>57.62</td><td>0.48</td><td>--</td><td>--</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4960.00	41.52	74.00	-32.48	57.78	33.06	7.35	57.09	0.42	--	--	PEAK	2	7440.00	45.18	74.00	-28.82	56.92	36.42	8.98	57.62	0.48	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																												
1	4960.00	41.52	74.00	-32.48	57.78	33.06	7.35	57.09	0.42	--	--	PEAK																																																											
2	7440.00	45.18	74.00	-28.82	56.92	36.42	8.98	57.62	0.48	--	--	PEAK																																																											

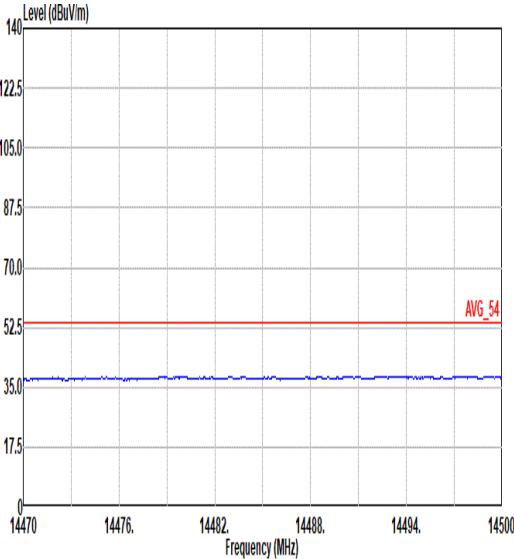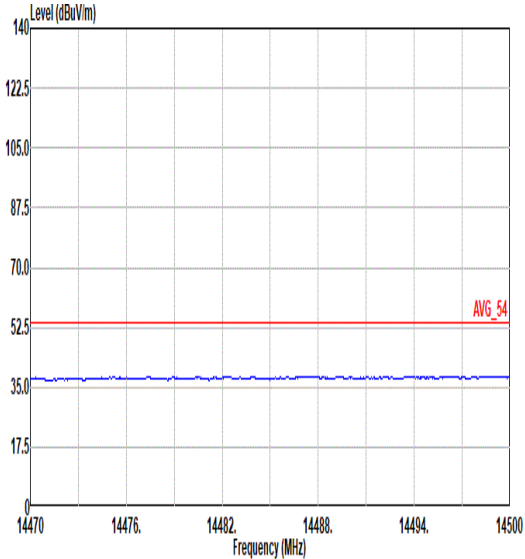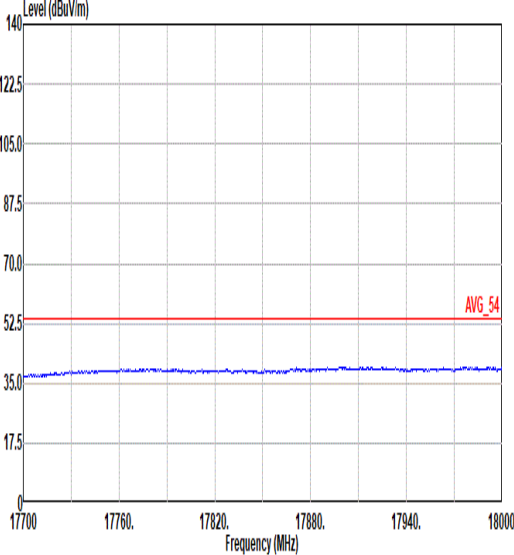
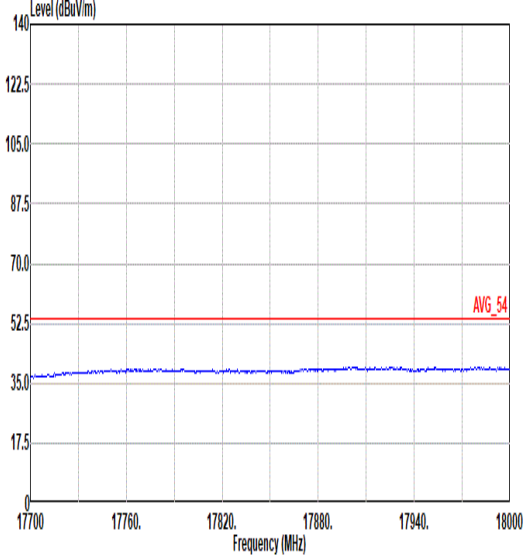


Mode	14	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL
17.7G ~18G Avg	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL



Mode	15																																																																																																													
	LF																																																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Horizontal																																																																																																													
QP/ Peak																																																																																																														
	Site : 03CH13-HY Condition: QP 3m BILOG_40103 HORIZONTAL																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>53.28</td><td>31.06</td><td>40.00</td><td>-8.94</td><td>49.06</td><td>12.99</td><td>1.19</td><td>32.23</td><td>0.05</td><td>-- Peak</td></tr><tr><td>2</td><td>124.09</td><td>38.14</td><td>43.50</td><td>-5.36</td><td>51.40</td><td>17.42</td><td>1.51</td><td>32.25</td><td>0.06</td><td>214 15 QP</td></tr><tr><td>3</td><td>254.07</td><td>41.10</td><td>46.00</td><td>-4.90</td><td>52.15</td><td>19.09</td><td>1.89</td><td>32.14</td><td>0.11</td><td>100 127 QP</td></tr><tr><td>4</td><td>305.48</td><td>36.34</td><td>46.00</td><td>-9.66</td><td>46.97</td><td>19.31</td><td>2.01</td><td>32.08</td><td>0.13</td><td>-- Peak</td></tr><tr><td>5</td><td>600.36</td><td>36.06</td><td>46.00</td><td>-9.94</td><td>39.98</td><td>25.60</td><td>2.58</td><td>32.23</td><td>0.13</td><td>-- Peak</td></tr><tr><td>6</td><td>955.38</td><td>33.87</td><td>46.00</td><td>-12.13</td><td>30.49</td><td>31.00</td><td>3.11</td><td>30.94</td><td>0.21</td><td>-- Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	53.28	31.06	40.00	-8.94	49.06	12.99	1.19	32.23	0.05	-- Peak	2	124.09	38.14	43.50	-5.36	51.40	17.42	1.51	32.25	0.06	214 15 QP	3	254.07	41.10	46.00	-4.90	52.15	19.09	1.89	32.14	0.11	100 127 QP	4	305.48	36.34	46.00	-9.66	46.97	19.31	2.01	32.08	0.13	-- Peak	5	600.36	36.06	46.00	-9.94	39.98	25.60	2.58	32.23	0.13	-- Peak	6	955.38	33.87	46.00	-12.13	30.49	31.00	3.11	30.94	0.21	-- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
	1	53.28	31.06	40.00	-8.94	49.06	12.99	1.19	32.23	0.05	-- Peak																																																																																																			
	2	124.09	38.14	43.50	-5.36	51.40	17.42	1.51	32.25	0.06	214 15 QP																																																																																																			
	3	254.07	41.10	46.00	-4.90	52.15	19.09	1.89	32.14	0.11	100 127 QP																																																																																																			
	4	305.48	36.34	46.00	-9.66	46.97	19.31	2.01	32.08	0.13	-- Peak																																																																																																			
5	600.36	36.06	46.00	-9.94	39.98	25.60	2.58	32.23	0.13	-- Peak																																																																																																				
6	955.38	33.87	46.00	-12.13	30.49	31.00	3.11	30.94	0.21	-- Peak																																																																																																				
Vertical																																																																																																														
Site : 03CH13-HY Condition: QP 3m BILOG_40103 VERTICAL																																																																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.00</td><td>39.85</td><td>40.00</td><td>-0.15</td><td>45.78</td><td>25.30</td><td>1.05</td><td>32.31</td><td>0.03</td><td>100 338 QP</td></tr><tr><td>2</td><td>54.25</td><td>33.19</td><td>40.00</td><td>-6.81</td><td>51.59</td><td>12.60</td><td>1.20</td><td>32.24</td><td>0.04</td><td>100 212 QP</td></tr><tr><td>3</td><td>126.03</td><td>30.27</td><td>43.50</td><td>-13.23</td><td>43.34</td><td>17.60</td><td>1.52</td><td>32.25</td><td>0.06</td><td>100 30 QP</td></tr><tr><td>4</td><td>257.95</td><td>39.95</td><td>46.00</td><td>-6.05</td><td>50.40</td><td>19.67</td><td>1.90</td><td>32.13</td><td>0.11</td><td>-- Peak</td></tr><tr><td>5</td><td>722.58</td><td>31.31</td><td>46.00</td><td>-14.69</td><td>33.18</td><td>27.30</td><td>2.79</td><td>32.10</td><td>0.14</td><td>-- Peak</td></tr><tr><td>6</td><td>947.62</td><td>34.45</td><td>46.00</td><td>-11.55</td><td>31.25</td><td>30.90</td><td>3.10</td><td>31.01</td><td>0.21</td><td>-- Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.00	39.85	40.00	-0.15	45.78	25.30	1.05	32.31	0.03	100 338 QP	2	54.25	33.19	40.00	-6.81	51.59	12.60	1.20	32.24	0.04	100 212 QP	3	126.03	30.27	43.50	-13.23	43.34	17.60	1.52	32.25	0.06	100 30 QP	4	257.95	39.95	46.00	-6.05	50.40	19.67	1.90	32.13	0.11	-- Peak	5	722.58	31.31	46.00	-14.69	33.18	27.30	2.79	32.10	0.14	-- Peak	6	947.62	34.45	46.00	-11.55	31.25	30.90	3.10	31.01	0.21	-- Peak	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	30.00	39.85	40.00	-0.15	45.78	25.30	1.05	32.31	0.03	100 338 QP																																																																																																				
2	54.25	33.19	40.00	-6.81	51.59	12.60	1.20	32.24	0.04	100 212 QP																																																																																																				
3	126.03	30.27	43.50	-13.23	43.34	17.60	1.52	32.25	0.06	100 30 QP																																																																																																				
4	257.95	39.95	46.00	-6.05	50.40	19.67	1.90	32.13	0.11	-- Peak																																																																																																				
5	722.58	31.31	46.00	-14.69	33.18	27.30	2.79	32.10	0.14	-- Peak																																																																																																				
6	947.62	34.45	46.00	-11.55	31.25	30.90	3.10	31.01	0.21	-- Peak																																																																																																				



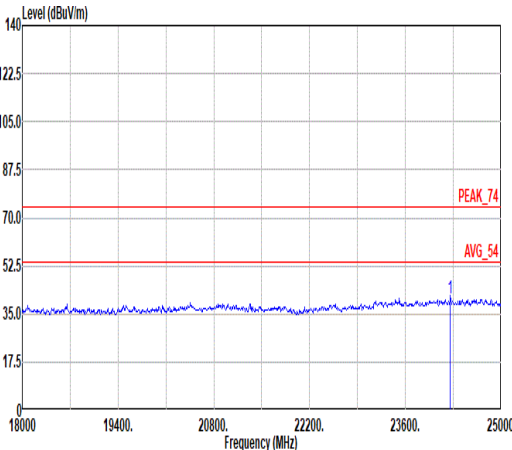
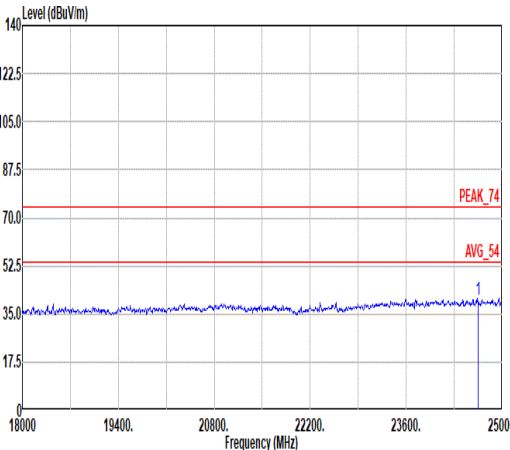


Mode	16																																																							
	SHF																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Vertical																																																	
Peak																																																								
	Site : 03CH13-HY Condition: PEAK_74 1m SHF_00993_231124 HORIZONTAL																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24256.78</td><td>40.47</td><td>74.00</td><td>-33.53</td><td>58.02</td><td>38.63</td><td>7.01</td><td>53.65</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24256.78	40.47	74.00	-33.53	58.02	38.63	7.01	53.65	-9.54	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	24256.78	40.47	74.00	-33.53	58.02	38.63	7.01	53.65	-9.54	--	--	PEAK																																												
Site : 03CH13-HY Condition: PEAK_74 1m SHF_00993_231124 VERTICAL																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24646.42</td><td>40.37</td><td>74.00</td><td>-33.63</td><td>57.11</td><td>39.19</td><td>7.02</td><td>53.41</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	24646.42	40.37	74.00	-33.63	57.11	39.19	7.02	53.41	-9.54	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	24646.42	40.37	74.00	-33.63	57.11	39.19	7.02	53.41	-9.54	--	--	PEAK																																												







<Sample 3>



<2Mbps>

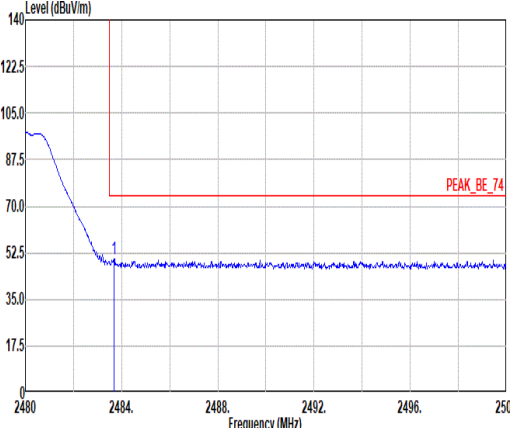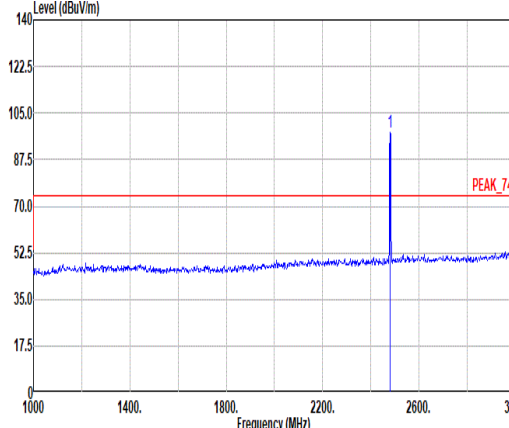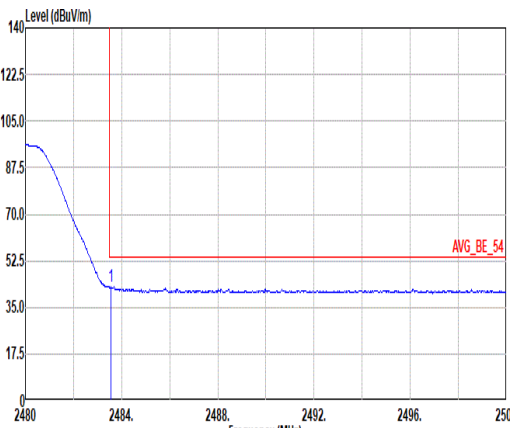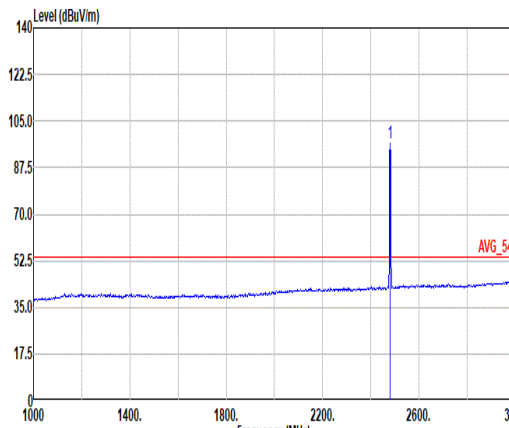Mode	15																																																																																																																						
	Band Edge																																																																																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																																
Peak																																																																																																																							
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto												Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.68</td><td>50.08</td><td>74.00</td><td>-23.92</td><td>44.63</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>400</td><td>224 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.68	50.08	74.00	-23.92	44.63	27.80	4.79	37.07	9.93	400	224 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>97.93</td><td>-----</td><td>-----</td><td>92.48</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>400</td><td>224 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2480.00	97.93	-----	-----	92.48	27.80	4.79	37.07	9.93	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	2483.68	50.08	74.00	-23.92	44.63	27.80	4.79	37.07	9.93	400	224 PEAK																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	2480.00	97.93	-----	-----	92.48	27.80	4.79	37.07	9.93	400	224 PEAK																																																																																																												
Avg																																																																																																																							
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto												Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.54</td><td>42.56</td><td>54.00</td><td>-11.44</td><td>37.11</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>400</td><td>224 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.54	42.56	54.00	-11.44	37.11	27.80	4.79	37.07	9.93	400	224 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>96.71</td><td>-----</td><td>-----</td><td>91.26</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>400</td><td>224 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2480.00	96.71	-----	-----	91.26	27.80	4.79	37.07	9.93	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	2483.54	42.56	54.00	-11.44	37.11	27.80	4.79	37.07	9.93	400	224 AVERAGE																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	2480.00	96.71	-----	-----	91.26	27.80	4.79	37.07	9.93	400	224 AVERAGE																																																																																																												

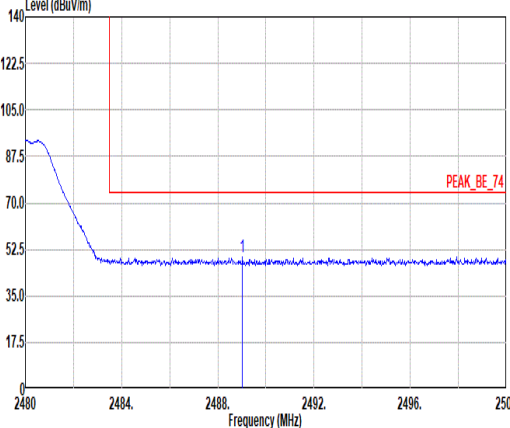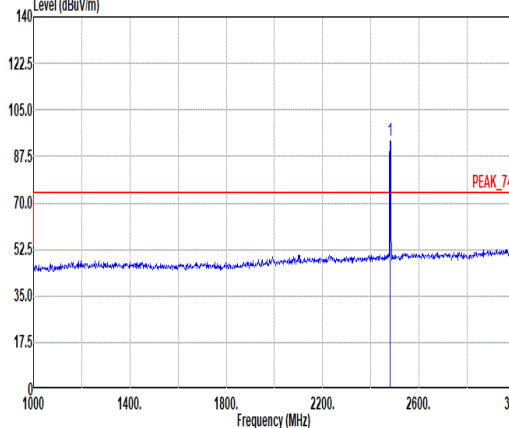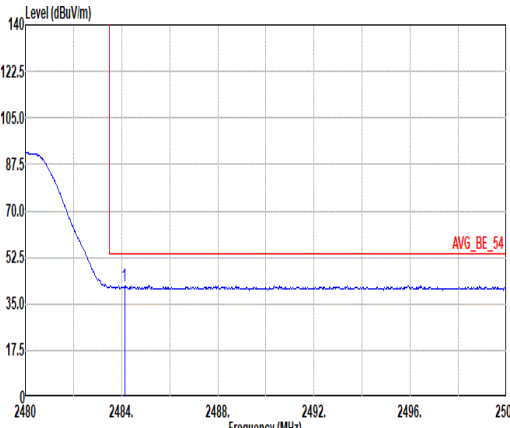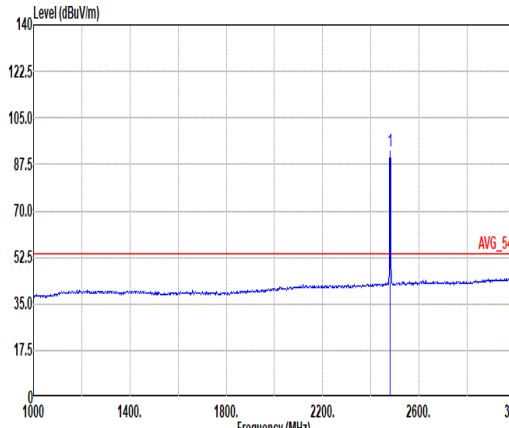

		15																																																																																																															
Mode	Band Edge																																																																																																																
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																
ANT	1																																																																																																																
Pol.	Vertical						Fundamental																																																																																																										
Peak																																																																																																																	
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																																										
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr></thead><tbody><tr><td>1</td><td>2489.02</td><td>49.63</td><td>74.00</td><td>-24.37</td><td>44.17</td><td>27.80</td><td>4.80</td><td>37.07</td><td>9.93</td><td>400</td><td>260</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	2489.02	49.63	74.00	-24.37	44.17	27.80	4.80	37.07	9.93	400	260	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>93.60</td><td>-----</td><td>-----</td><td>88.15</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>400</td><td>260</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	2480.00	93.60	-----	-----	88.15	27.80	4.79	37.07	9.93	400	260	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2489.02	49.63	74.00	-24.37	44.17	27.80	4.80	37.07	9.93	400	260	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2480.00	93.60	-----	-----	88.15	27.80	4.79	37.07	9.93	400	260	PEAK																																																																																																					
Avg																																																																																																																	
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto						Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto																																																																																																										
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr></thead><tbody><tr><td>1</td><td>2484.12</td><td>41.99</td><td>54.00</td><td>-12.01</td><td>36.54</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>400</td><td>260</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	2484.12	41.99	54.00	-12.01	36.54	27.80	4.79	37.07	9.93	400	260	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>92.45</td><td>-----</td><td>-----</td><td>87.00</td><td>27.80</td><td>4.79</td><td>37.07</td><td>9.93</td><td>400</td><td>260</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	2480.00	92.45	-----	-----	87.00	27.80	4.79	37.07	9.93	400	260	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2484.12	41.99	54.00	-12.01	36.54	27.80	4.79	37.07	9.93	400	260	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2480.00	92.45	-----	-----	87.00	27.80	4.79	37.07	9.93	400	260	AVERAGE																																																																																																					

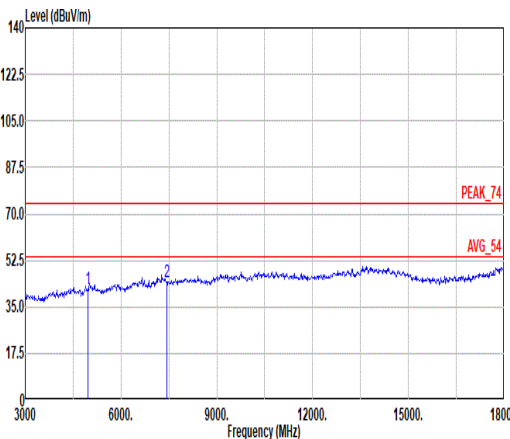
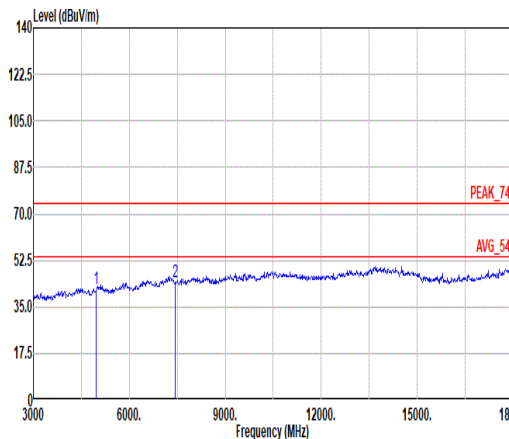


Mode	15																																																																						
	Harmonic																																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																						
ANT	1																																																																						
Pol.	Horizontal						Vertical																																																																
Peak Avg																																																																							
	Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL						Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL																																																																
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>41.72</td><td>74.00</td><td>-32.28</td><td>57.98</td><td>33.06</td><td>7.35</td><td>57.09</td><td>0.42</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>44.47</td><td>74.00</td><td>-29.53</td><td>56.21</td><td>36.42</td><td>8.98</td><td>57.62</td><td>0.48</td><td>--</td><td>--</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4960.00	41.72	74.00	-32.28	57.98	33.06	7.35	57.09	0.42	--	--	PEAK	2	7440.00	44.47	74.00	-29.53	56.21	36.42	8.98	57.62	0.48	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																												
1	4960.00	41.72	74.00	-32.28	57.98	33.06	7.35	57.09	0.42	--	--	PEAK																																																											
2	7440.00	44.47	74.00	-29.53	56.21	36.42	8.98	57.62	0.48	--	--	PEAK																																																											





Mode	15	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL
17.7G ~18G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL

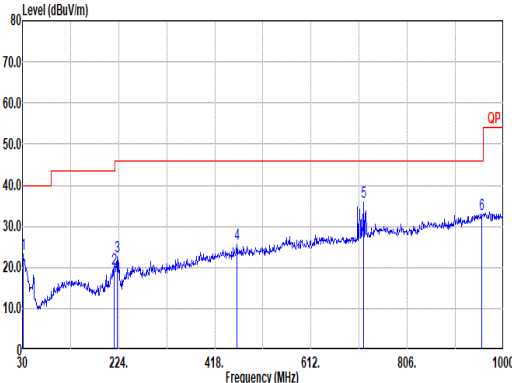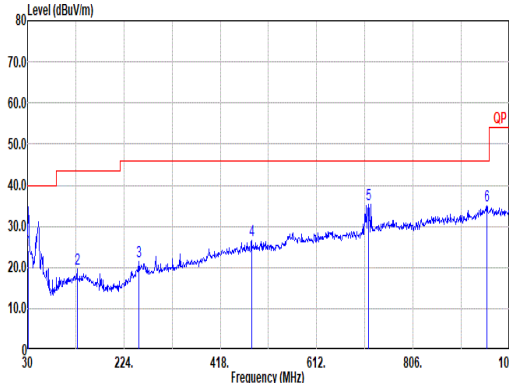

Mode	16																																																																																																																																																																																																			
	LF																																																																																																																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																																																																																			
ANT	1																																																																																																																																																																																																			
Pol.	Horizontal								Vertical																																																																																																																																																																																											
QP/ Peak																																																																																																																																																																																																				
	Site : 03CH13-HY Condition: QP 3m BILOG_40103 HORIZONTAL								Site : 03CH13-HY Condition: QP 3m BILOG_40103 VERTICAL																																																																																																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>30.97</td><td>23.20</td><td>40.00</td><td>-16.80</td><td>29.60</td><td>24.82</td><td>1.05</td><td>32.32</td><td>0.05 -- -- Peak</td></tr><tr><td>2</td><td>215.27</td><td>19.70</td><td>43.50</td><td>-23.80</td><td>35.20</td><td>14.83</td><td>1.78</td><td>32.18</td><td>0.07 -- -- Peak</td></tr><tr><td>3</td><td>221.09</td><td>22.54</td><td>46.00</td><td>-23.46</td><td>37.34</td><td>15.49</td><td>1.80</td><td>32.17</td><td>0.08 -- -- Peak</td></tr><tr><td>4</td><td>462.62</td><td>25.51</td><td>46.00</td><td>-20.49</td><td>31.89</td><td>23.35</td><td>2.34</td><td>32.17</td><td>0.10 -- -- Peak</td></tr><tr><td>5</td><td>718.70</td><td>35.78</td><td>46.00</td><td>-10.22</td><td>37.82</td><td>27.15</td><td>2.78</td><td>32.11</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>956.35</td><td>33.04</td><td>46.00</td><td>-12.96</td><td>29.65</td><td>31.00</td><td>3.11</td><td>30.93</td><td>0.21 -- -- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	30.97	23.20	40.00	-16.80	29.60	24.82	1.05	32.32	0.05 -- -- Peak	2	215.27	19.70	43.50	-23.80	35.20	14.83	1.78	32.18	0.07 -- -- Peak	3	221.09	22.54	46.00	-23.46	37.34	15.49	1.80	32.17	0.08 -- -- Peak	4	462.62	25.51	46.00	-20.49	31.89	23.35	2.34	32.17	0.10 -- -- Peak	5	718.70	35.78	46.00	-10.22	37.82	27.15	2.78	32.11	0.14 -- -- Peak	6	956.35	33.04	46.00	-12.96	29.65	31.00	3.11	30.93	0.21 -- -- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>31.94</td><td>24.18</td><td>40.00</td><td>-15.82</td><td>31.26</td><td>24.14</td><td>1.05</td><td>32.34</td><td>0.07 100 202 QP</td></tr><tr><td>2</td><td>129.91</td><td>19.50</td><td>43.50</td><td>-24.00</td><td>32.56</td><td>17.60</td><td>1.53</td><td>32.25</td><td>0.06 -- -- Peak</td></tr><tr><td>3</td><td>254.07</td><td>21.39</td><td>46.00</td><td>-24.61</td><td>32.44</td><td>19.09</td><td>1.89</td><td>32.14</td><td>0.11 -- -- Peak</td></tr><tr><td>4</td><td>481.05</td><td>26.55</td><td>46.00</td><td>-19.45</td><td>32.64</td><td>23.62</td><td>2.37</td><td>32.18</td><td>0.10 -- -- Peak</td></tr><tr><td>5</td><td>715.79</td><td>35.40</td><td>46.00</td><td>-10.60</td><td>37.56</td><td>27.03</td><td>2.78</td><td>32.11</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>954.41</td><td>34.95</td><td>46.00</td><td>-11.05</td><td>31.58</td><td>31.00</td><td>3.11</td><td>30.95</td><td>0.21 -- -- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	31.94	24.18	40.00	-15.82	31.26	24.14	1.05	32.34	0.07 100 202 QP	2	129.91	19.50	43.50	-24.00	32.56	17.60	1.53	32.25	0.06 -- -- Peak	3	254.07	21.39	46.00	-24.61	32.44	19.09	1.89	32.14	0.11 -- -- Peak	4	481.05	26.55	46.00	-19.45	32.64	23.62	2.37	32.18	0.10 -- -- Peak	5	715.79	35.40	46.00	-10.60	37.56	27.03	2.78	32.11	0.14 -- -- Peak	6	954.41	34.95	46.00	-11.05	31.58	31.00	3.11	30.95	0.21 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																										
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																																																											
	1	30.97	23.20	40.00	-16.80	29.60	24.82	1.05	32.32	0.05 -- -- Peak																																																																																																																																																																																										
	2	215.27	19.70	43.50	-23.80	35.20	14.83	1.78	32.18	0.07 -- -- Peak																																																																																																																																																																																										
	3	221.09	22.54	46.00	-23.46	37.34	15.49	1.80	32.17	0.08 -- -- Peak																																																																																																																																																																																										
	4	462.62	25.51	46.00	-20.49	31.89	23.35	2.34	32.17	0.10 -- -- Peak																																																																																																																																																																																										
5	718.70	35.78	46.00	-10.22	37.82	27.15	2.78	32.11	0.14 -- -- Peak																																																																																																																																																																																											
6	956.35	33.04	46.00	-12.96	29.65	31.00	3.11	30.93	0.21 -- -- Peak																																																																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																																																												
1	31.94	24.18	40.00	-15.82	31.26	24.14	1.05	32.34	0.07 100 202 QP																																																																																																																																																																																											
2	129.91	19.50	43.50	-24.00	32.56	17.60	1.53	32.25	0.06 -- -- Peak																																																																																																																																																																																											
3	254.07	21.39	46.00	-24.61	32.44	19.09	1.89	32.14	0.11 -- -- Peak																																																																																																																																																																																											
4	481.05	26.55	46.00	-19.45	32.64	23.62	2.37	32.18	0.10 -- -- Peak																																																																																																																																																																																											
5	715.79	35.40	46.00	-10.60	37.56	27.03	2.78	32.11	0.14 -- -- Peak																																																																																																																																																																																											
6	954.41	34.95	46.00	-11.05	31.58	31.00	3.11	30.95	0.21 -- -- Peak																																																																																																																																																																																											



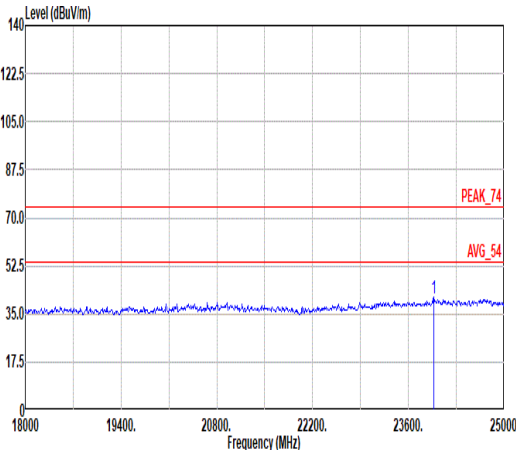
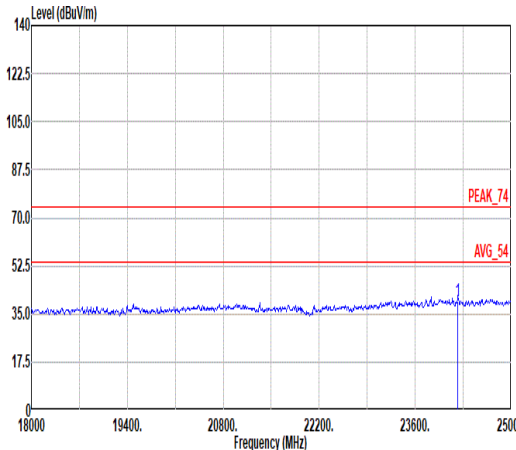


Mode	17																																																																																																		
	SHF																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_74 1m SHF_00993_231124 HORIZONTAL						Site : 03CH13-HY Condition: PEAK_74 1m SHF_00993_231124 VERTICAL																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>23976.36</td><td>40.45</td><td>74.00</td><td>-33.55</td><td>58.14</td><td>38.70</td><td>6.96</td><td>53.81</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	23976.36	40.45	74.00	-33.55	58.14	38.70	6.96	53.81	-9.54	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24217.26</td><td>39.82</td><td>74.00</td><td>-34.18</td><td>57.43</td><td>38.60</td><td>7.00</td><td>53.67</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24217.26	39.82	74.00	-34.18	57.43	38.60	7.00	53.67	-9.54	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	23976.36	40.45	74.00	-33.55	58.14	38.70	6.96	53.81	-9.54	--	--	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	24217.26	39.82	74.00	-34.18	57.43	38.60	7.00	53.67	-9.54	--	--	PEAK																																																																																							







<Sample 8>



<1Mbps>

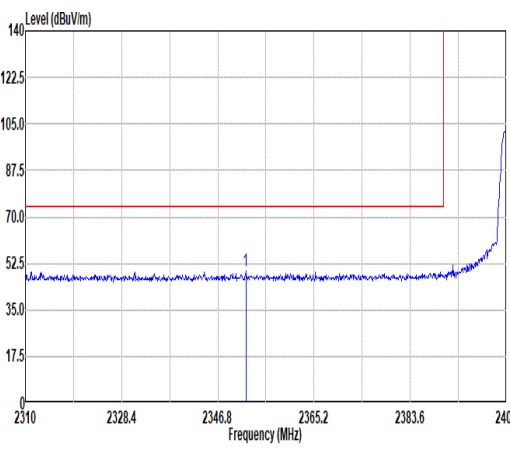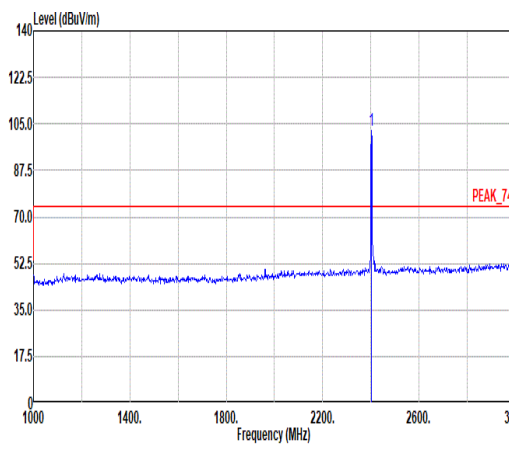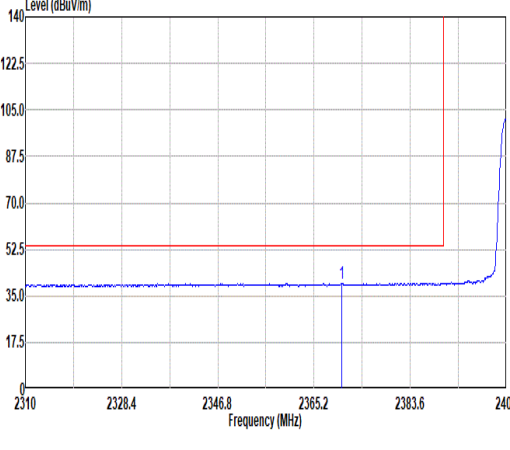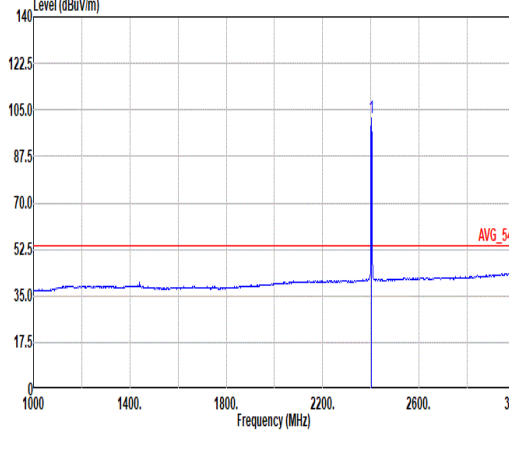Mode	56																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2352.14</td><td>49.71</td><td>74.00</td><td>-24.29</td><td>44.92</td><td>27.30</td><td>4.65</td><td>37.09</td><td>9.93</td><td>148</td><td>130</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2352.14	49.71	74.00	-24.29	44.92	27.30	4.65	37.09	9.93	148	130	PEAK	Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>102.30</td><td>-----</td><td>-----</td><td>97.25</td><td>27.50</td><td>4.70</td><td>37.08</td><td>9.93</td><td>148</td><td>130</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	102.30	-----	-----	97.25	27.50	4.70	37.08	9.93	148	130
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2352.14	49.71	74.00	-24.29	44.92	27.30	4.65	37.09	9.93	148	130	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	102.30	-----	-----	97.25	27.50	4.70	37.08	9.93	148	130	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2370.54</td><td>39.83</td><td>54.00</td><td>-14.17</td><td>35.01</td><td>27.31</td><td>4.67</td><td>37.09</td><td>9.93</td><td>148</td><td>130</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2370.54	39.83	54.00	-14.17	35.01	27.31	4.67	37.09	9.93	148	130	AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>101.84</td><td>-----</td><td>-----</td><td>96.79</td><td>27.50</td><td>4.70</td><td>37.08</td><td>9.93</td><td>148</td><td>130</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.84	-----	-----	96.79	27.50	4.70	37.08	9.93	148	130
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2370.54	39.83	54.00	-14.17	35.01	27.31	4.67	37.09	9.93	148	130	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	101.84	-----	-----	96.79	27.50	4.70	37.08	9.93	148	130	AVERAGE																																																																																							

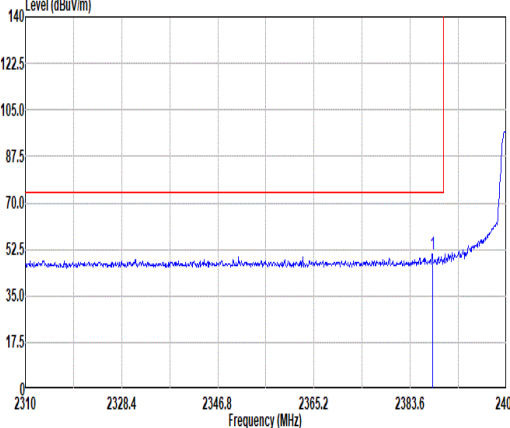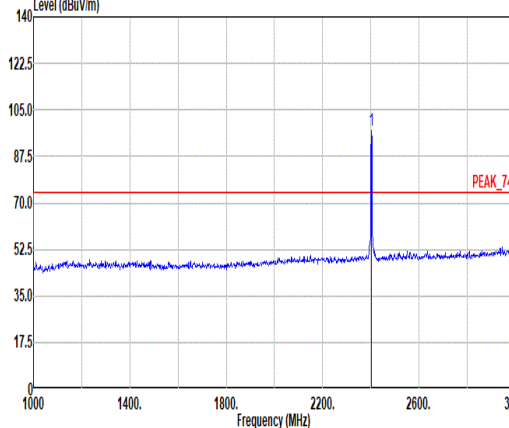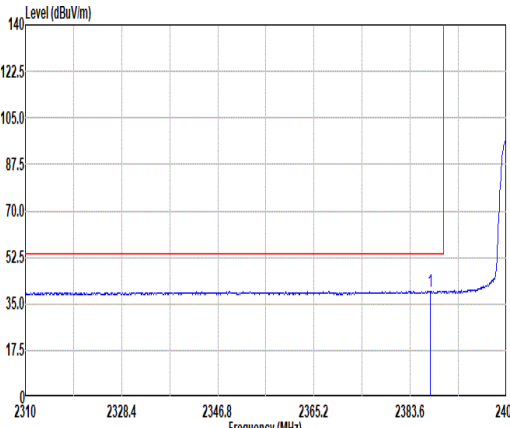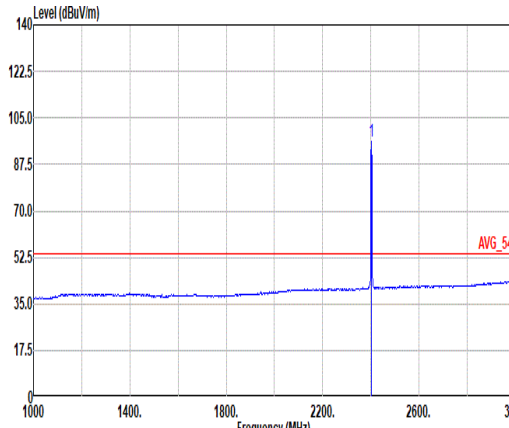

Mode	56																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.83</td><td>50.97</td><td>74.00</td><td>-23.03</td><td>45.95</td><td>27.48</td><td>4.69</td><td>37.08</td><td>9.93</td><td>400</td><td>107</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.83	50.97	74.00	-23.03	45.95	27.48	4.69	37.08	9.93	400	107	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>96.99</td><td>-----</td><td>-----</td><td>91.94</td><td>27.50</td><td>4.70</td><td>37.08</td><td>9.93</td><td>400</td><td>107</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	96.99	-----	-----	91.94	27.50	4.70	37.08	9.93	400	107
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2387.83	50.97	74.00	-23.03	45.95	27.48	4.69	37.08	9.93	400	107	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	96.99	-----	-----	91.94	27.50	4.70	37.08	9.93	400	107	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto						Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.37</td><td>39.81</td><td>54.00</td><td>-14.19</td><td>34.00</td><td>27.47</td><td>4.69</td><td>37.08</td><td>9.93</td><td>400</td><td>107</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.37	39.81	54.00	-14.19	34.00	27.47	4.69	37.08	9.93	400	107	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>96.41</td><td>-----</td><td>-----</td><td>91.36</td><td>27.50</td><td>4.70</td><td>37.08</td><td>9.93</td><td>400</td><td>107</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	96.41	-----	-----	91.36	27.50	4.70	37.08	9.93	400	107
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2387.37	39.81	54.00	-14.19	34.00	27.47	4.69	37.08	9.93	400	107	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	96.41	-----	-----	91.36	27.50	4.70	37.08	9.93	400	107	AVERAGE																																																																																							



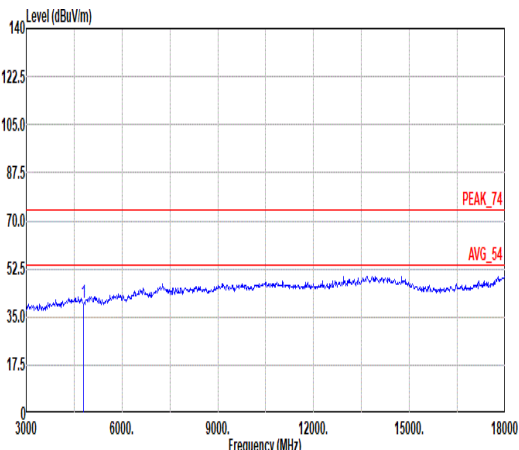
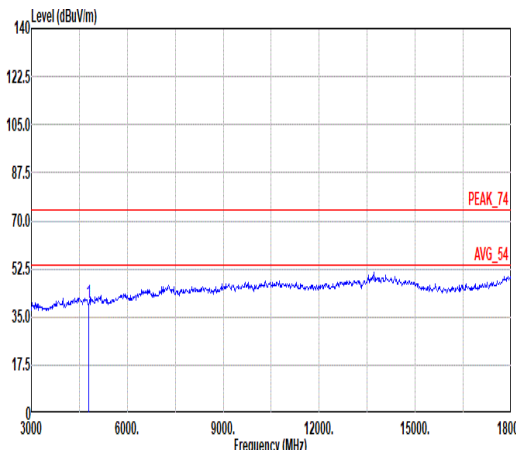


Mode	56																																																																																																		
	Harmonic																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak Avg																																																																																																			
	Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL						Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>39.92</td><td>74.00</td><td>-34.08</td><td>57.75</td><td>32.32</td><td>6.82</td><td>57.44</td><td>0.47</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	39.92	74.00	-34.08	57.75	32.32	6.82	57.44	0.47	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>39.93</td><td>74.00</td><td>-34.07</td><td>57.76</td><td>32.32</td><td>6.82</td><td>57.44</td><td>0.47</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	39.93	74.00	-34.07	57.76	32.32	6.82	57.44	0.47	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4804.00	39.92	74.00	-34.08	57.75	32.32	6.82	57.44	0.47	--	--	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4804.00	39.93	74.00	-34.07	57.76	32.32	6.82	57.44	0.47	--	--	PEAK																																																																																							





Mode	56	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL
17.7G ~18G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL

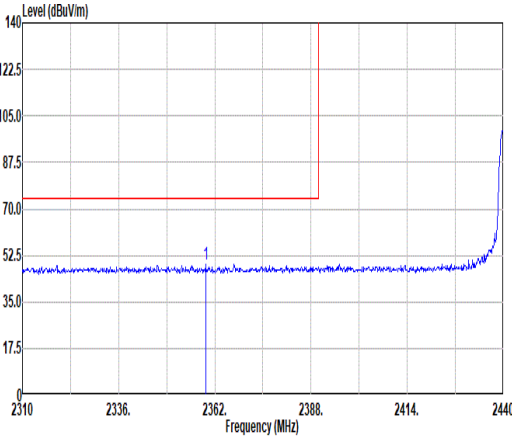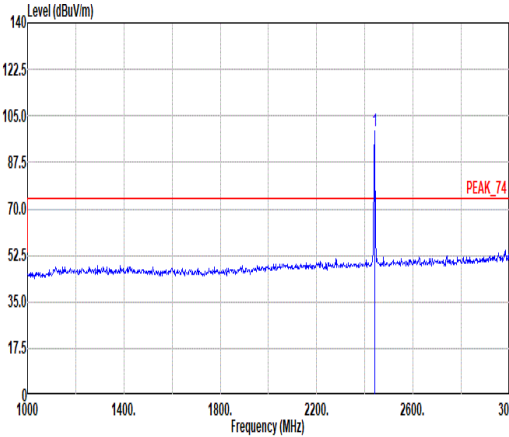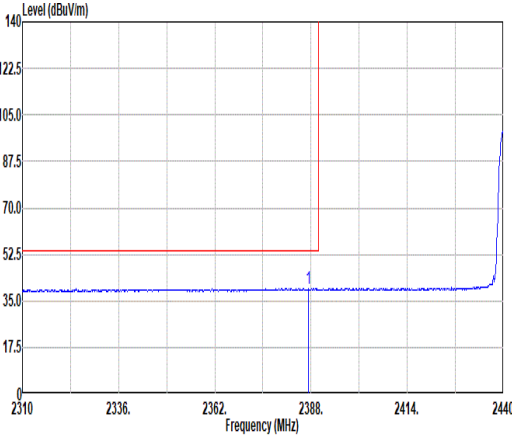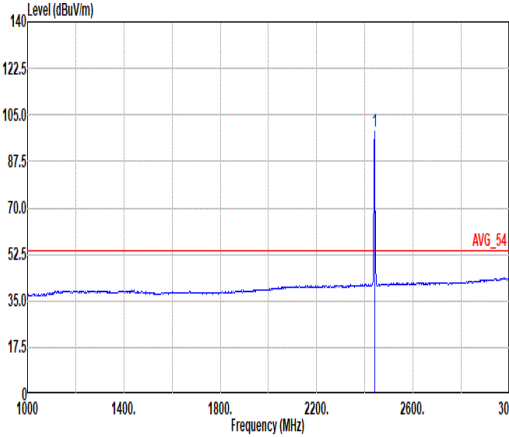

Mode	57																																																																																																
	Band Edge - L																																																																																																
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2359.53</td><td>49.39</td><td>74.00</td><td>-24.61</td><td>44.59</td><td>27.30</td><td>4.66</td><td>37.09</td><td>9.93</td><td>148</td><td>128</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2359.53	49.39	74.00	-24.61	44.59	27.30	4.66	37.09	9.93	148	128	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>99.50</td><td>-----</td><td>-----</td><td>94.31</td><td>27.60</td><td>4.74</td><td>37.08</td><td>9.93</td><td>148</td><td>128</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2440.00	99.50	-----	-----	94.31	27.60	4.74	37.08	9.93	148	128
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2359.53	49.39	74.00	-24.61	44.59	27.30	4.66	37.09	9.93	148	128	PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2440.00	99.50	-----	-----	94.31	27.60	4.74	37.08	9.93	148	128	PEAK																																																																																					
Avg																																																																																																	
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto						Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.35</td><td>39.72</td><td>54.00</td><td>-14.28</td><td>34.71</td><td>27.47</td><td>4.69</td><td>37.08</td><td>9.93</td><td>148</td><td>128</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2387.35	39.72	54.00	-14.28	34.71	27.47	4.69	37.08	9.93	148	128	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>98.97</td><td>-----</td><td>-----</td><td>93.78</td><td>27.60</td><td>4.74</td><td>37.08</td><td>9.93</td><td>148</td><td>128</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2440.00	98.97	-----	-----	93.78	27.60	4.74	37.08	9.93	148	128
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2387.35	39.72	54.00	-14.28	34.71	27.47	4.69	37.08	9.93	148	128	AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2440.00	98.97	-----	-----	93.78	27.60	4.74	37.08	9.93	148	128	AVERAGE																																																																																					

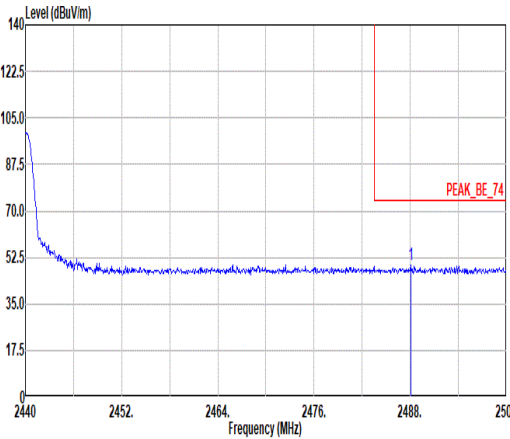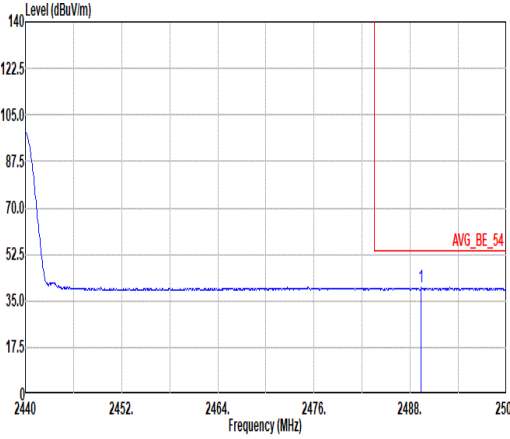

Mode	57																																													
	Band Edge - R																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																													
ANT	1																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.06</td><td>49.51</td><td>74.00</td><td>-24.49</td><td>44.05</td><td>27.80</td><td>4.80</td><td>37.07</td><td>9.93</td><td>148</td><td>128</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.06	49.51	74.00	-24.49	44.05	27.80	4.80	37.07	9.93	148	128	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2488.06	49.51	74.00	-24.49	44.05	27.80	4.80	37.07	9.93	148	128	PEAK																																		
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.38</td><td>40.00</td><td>54.00</td><td>-14.00</td><td>34.54</td><td>27.80</td><td>4.80</td><td>37.07</td><td>9.93</td><td>148</td><td>128</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.38	40.00	54.00	-14.00	34.54	27.80	4.80	37.07	9.93	148	128	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2489.38	40.00	54.00	-14.00	34.54	27.80	4.80	37.07	9.93	148	128	AVERAGE																																		