

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and
IEEE Std 1528-2013**

Product Name : Smart Phone

Trademark : OUKITEL

Model Name : WP17

Family Model : N/A

Report No. : S21072701306001

FCC ID : 2ANMU-WP17

Prepared for

SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU INDUSTRIAL ZONE,
GUANLAN, LONGHUA SHENZHEN, 518XXX China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen 518126 P.R.China.
Tel.: 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION**Applicant's name**.....: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD

A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU

Address.....: INDUSTRIAL ZONE, GUANLAN, LONGHUA SHENZHEN, 518XXX
China**Manufacturer's Name**.....: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD

A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU

Address.....: INDUSTRIAL ZONE, GUANLAN, LONGHUA SHENZHEN, 518XXX
China**Product description**

Product name.....: Smart Phone

Trademark.....: OUKITEL

Model Name.....: WP17

Family Model.....: N/A

FCC 47 CFR Part 2(2.1093)

Standards.....: ANSI/IEEE C95.1-1992;IEEE Std 1528-2013

Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests.....: Aug. 02, 2021 ~Aug. 28, 2021

Date of Issue.....: Sep. 07, 2021

Test Result.....: **Pass**

Prepared By : Jacob . chen
(Test Engineer) (Jacob Chen)

Approved By : Alex
(Lab Manager) (Alex Li)

※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Sep. 07, 2021	Jacob Chen

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits.....	6
1.2. Statement of Compliance	7
1.3. EUT Description	7
1.4. Test specification(s)	9
1.5. Ambient Condition.....	9
2. SAR Measurement System	10
2.1. SATIMO SAR Measurement Set-up Diagram	10
2.2. Robot	11
2.3. E-Field Probe.....	12
2.3.1. E-Field Probe Calibration	12
2.4. SAM phantoms	13
2.4.1. Technical Data	14
2.5. Device Holder	15
2.6. Test Equipment List	16
3. SAR Measurement Procedures	18
3.1. Power Reference	18
3.2. Area scan & Zoom scan.....	18
3.3. Description of interpolation/extrapolation scheme	20
3.4. Volumetric Scan	20
3.5. Power Drift	20
4. System Verification Procedure	21
4.1. Tissue Verification	21
4.1.1. Tissue Dielectric Parameter Check Results	22
4.2. System Verification Procedure	23
4.2.1. System Verification Results	24
5. SAR Measurement variability and uncertainty	25
5.1. SAR measurement variability.....	25
5.2. SAR measurement uncertainty	25
6. RF Exposure Positions	26
6.1. Ear and handset reference point	26
6.2. Definition of the cheek position	26
6.3. Definition of the tilt position	28
6.4. Body Worn Accessory	28
6.5. Wireless Router Devices	29
7. RF Output Power	30
7.1. GSM Conducted Power	30
7.2. WCDMA Conducted Power	31
7.3. LTE Conducted Power	32

7.4. WLAN & Bluetooth Output Power	46
7.4.1. Output Power Results Of WLAN	46
7.4.2. Output Power Results Of Bluetooth.....	49
8. Antenna Location.....	50
9. Stand-alone SAR test exclusion.....	51
10. SAR Results	51
10.1. SAR measurement results	51
10.1.1. SAR measurement Result of GSM850.....	51
10.1.2. SAR measurement Result of GSM1900.....	52
10.1.3. SAR measurement Result of WCDMA Band 2.....	53
10.1.4. SAR measurement Result of WCDMA Band 4.....	54
10.1.5. SAR measurement Result of WCDMA Band 5.....	55
10.1.6. SAR measurement Result of LTE Band 2	56
10.1.7. SAR measurement Result of LTE Band 4	58
10.1.8. SAR measurement Result of LTE Band 5	60
10.1.9. SAR measurement Result of LTE Band 7	61
10.1.10. SAR measurement Result of LTE Band 12	63
10.1.11. SAR measurement Result of LTE Band 17	65
10.1.12. SAR measurement Result of LTE Band 66	67
10.1.13. SAR measurement Result of WLAN 2.4G	69
10.1.14. SAR measurement Result of WLAN 5.2G	70
10.1.15. SAR measurement Result of WLAN 5.3G	70
10.1.16. SAR measurement Result of WLAN 5.6G	71
10.1.17. SAR measurement Result of WLAN 5.8G	72
10.2. SAR Summation Scenario.....	73
11. Appendix A. Photo documentation	75
12. Appendix B. System Check Plots.....	75
13. Appendix C. Plots of High SAR Measurement.....	94
14. Appendix D. Calibration Certificate	163

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE
HEAD AND TRUNK LIMIT
1.6 W/kg
APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for WP17 are as follows.

RF Exposure Conditions		Equipment Class -Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
1-g Head		0.423	0.284	0.596	N/A
1-g Body-Worn		0.789	0.117	0.427	N/A
(Separation distance of 10mm)					
1-g Hotspot		0.789	0.117	0.427	N/A
(Separation distance of 10mm)					
Max Simultaneous Tx	Head	1.019	0.707	1.019	0.619
	Body-Worn	1.216	0.906	1.216	0.887
	Hotspot	1.216	0.906	1.216	0.887

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information	
Product Name	Smart Phone
Trade Name	OUKITEL
Model Name	WP17
Family Model	N/A
FCC ID	2ANMU-WP17
Device Phase	Identical Prototype
Exposure Category	General population / Uncontrolled environment
Antenna	FPC Antenna
Battery Information	DC 3.85V, 7760mAh
Hard Ware Version	2100-MB-P1.1
Soft Ware Version	OUKITEL_WP17_EEA_V01
Device Operating Configurations	
Supporting Mode(s)	GSM 850/1900, WCDMA Band 2/4/5, LTE Band 2/4/5/7/12/17/66, WLAN 2.4G/5G, Bluetooth, NFC
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, $\pi/4$ -DQPSK, 8DPSK), NFC(ASK)
Device Class	B

Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990
	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 4	1710-1755	2110-2155
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	LTE Band 12	699-716	729-746
	LTE Band 17	704-716	734-746
	LTE Band 66	1710-1780	2110-2200
	WLAN 2.4G	2412-2462	
	WLAN 5.2G	5180-5240	
	WLAN 5.3G	5260-5320	
	WLAN 5.6G	5500-5700	
	WLAN 5.8G	5745-5825	
	Bluetooth	2402-2480	
	NFC	13.56	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
EDGE Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
Power Class	4, tested with power level 5(GSM 850)		
	1, tested with power level 0(GSM 1900)		
	3, tested with power control "all 1"(WCDMA Band 2)		
	3, tested with power control "all 1"(WCDMA Band 4)		
	3, tested with power control "all 1"(WCDMA Band 5)		
	3, tested with power control all Max.(LTE Band 2)		
	3, tested with power control all Max.(LTE Band 4)		
	3, tested with power control all Max.(LTE Band 5)		
	3, tested with power control all Max.(LTE Band 7)		
	3, tested with power control all Max.(LTE Band 12)		
	3, tested with power control all Max.(LTE Band 17)		
	3, tested with power control all Max.(LTE Band 66)		

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 941225 D06 Hotspot SAR
KDB 648474 D04 Handset SAR

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

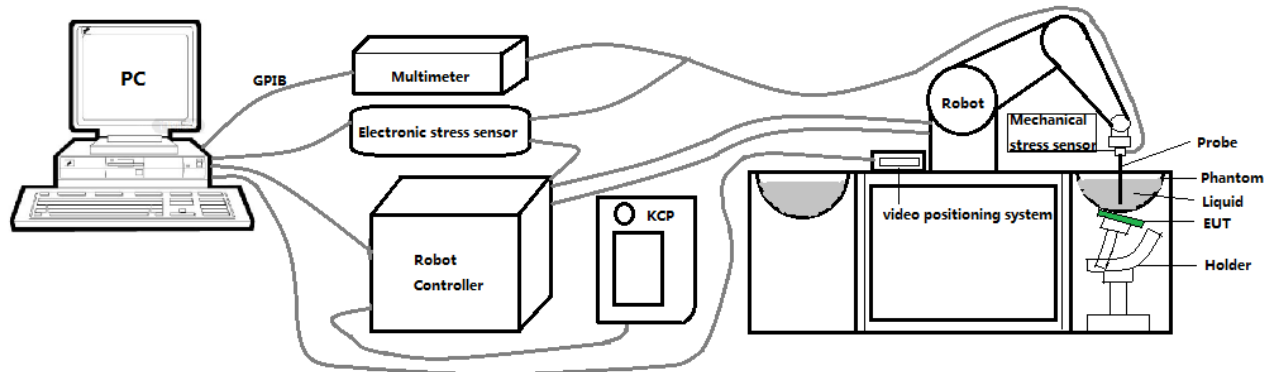

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 08/16 EPGO287 with following specifications is used



- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 2.5 mm
- Distance between probe tip and sensor center: 1 mm
- Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
- Probe linearity: ± 0.08 dB
- Axial isotropy: ± 0.01 dB
- Hemispherical Isotropy: ± 0.01 dB
- Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
- Lower detection limit: 8mW/kg

Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by mobile phones.

2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm $\pm$ 0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

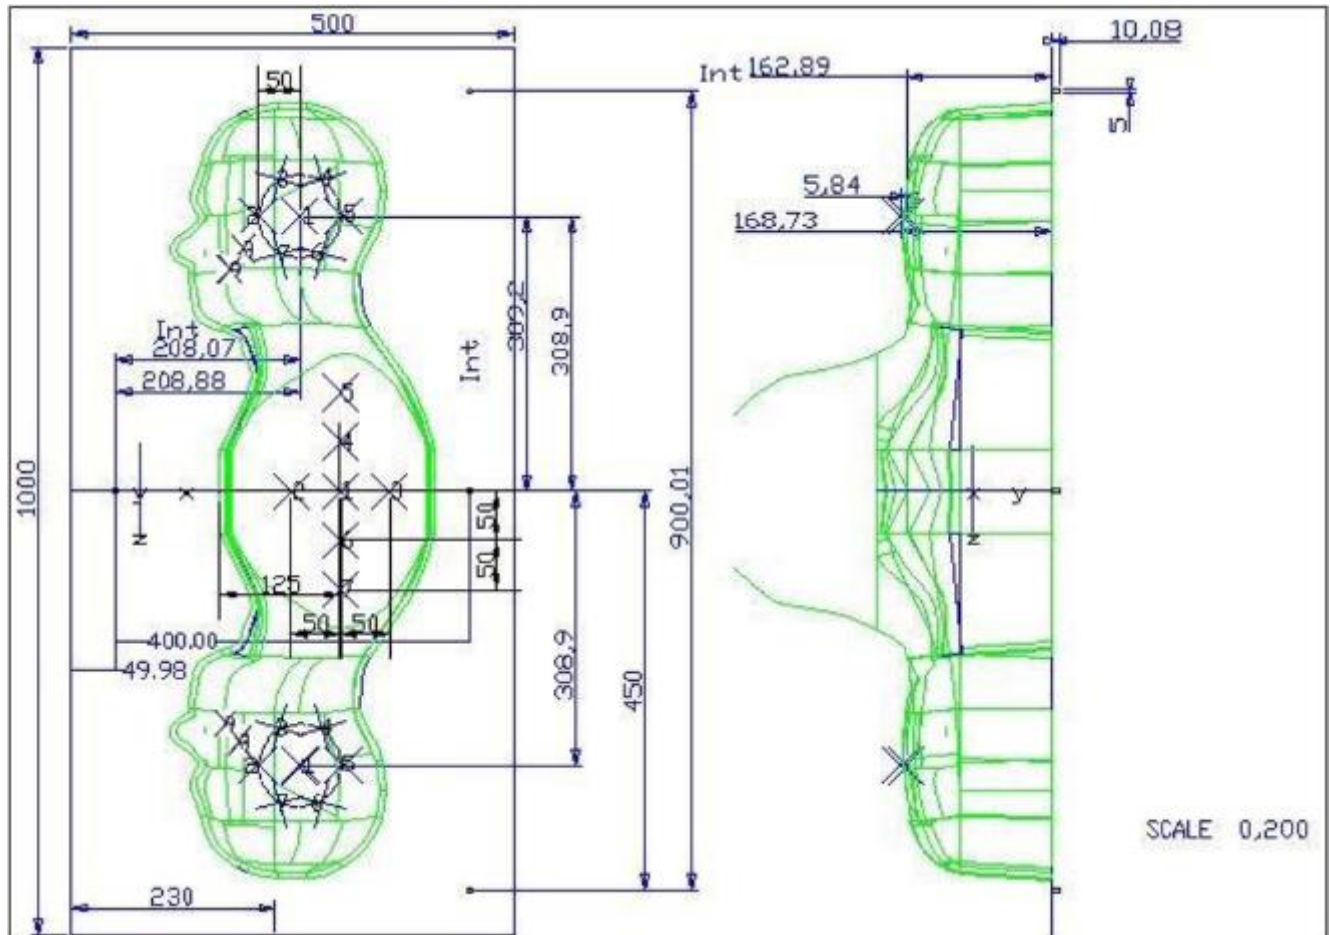


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 μ m.

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

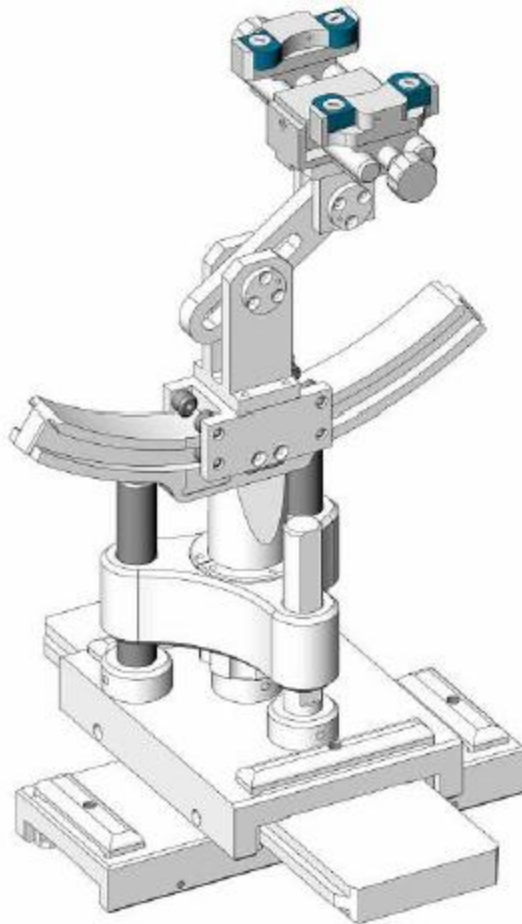

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	SN 08/16 EPGO287	Mar. 01, 2021	Feb. 28, 2022
☒	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
☒	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
☒	R&S	Universal radio communication tester	CMU200	117858	Jul. 01, 2021	Jun. 30, 2022
☒	R&S	Wideband radio communication tester	CMW500	103917	Jul. 01, 2021	Jun. 30, 2022
☒	HP	Network Analyzer	8753D	3410J01136	Jul. 01, 2021	Jun. 30, 2022
☒	Agilent	PSG Analog Signal Generator	E8257D	MY51110112	Jul. 01, 2021	Jun. 30, 2022

☒	Agilent	Power meter	E4419B	MY45102538	Jul. 01, 2021	Jun. 30, 2022
☒	Agilent	Power sensor	E9301A	MY41495644	Jul. 01, 2021	Jun. 30, 2022
☒	Agilent	Power sensor	E9301A	US39212148	Jul. 01, 2021	Jun. 30, 2022
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Jul. 17, 2020	Jul. 16, 2023

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/Bluetooth power measurement, use engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/Bluetooth output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful for multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scans to calculate the SAR value of the combined measurement as it is defined in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.


4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

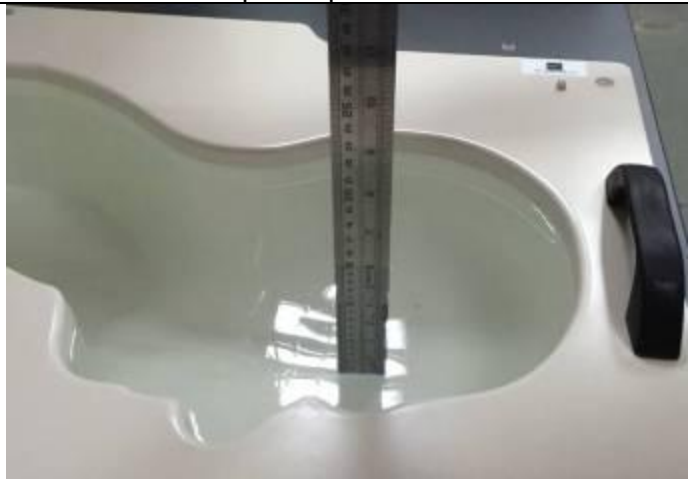Photo of Liquid depth for Head Position	Photo of Liquid depth for Body Position
	

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		$\epsilon_r (\pm 5\%)$	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Head 750	750	41.96 (39.86~44.06)	0.89 (0.85~0.93)	41.47	0.89	21.5 °C	Aug. 09, 2021
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	42.68	0.91	21.5 °C	Aug. 02, 2021
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.61	1.37	21.7 °C	Aug. 12, 2021
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.08	1.44	21.5 °C	Aug. 03, 2021
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	40.71	1.84	21.5 °C	Aug. 24, 2021
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	39.86	2.01	21.4 °C	Aug. 06, 2021
Head 5200	5200	36.00 (34.20~37.80)	4.66 (4.43~4.89)	36.90	4.80	21.5 °C	Aug. 08, 2021
Head 5600	5600	35.50 (33.73~37.28)	5.07 (4.82~5.32)	36.66	4.99	21.6 °C	Aug. 19, 2021
Head 5800	5800	35.30 (33.54~37.07)	5.27 (5.01~5.53)	36.22	5.21	21.9 °C	Aug. 28, 2021

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

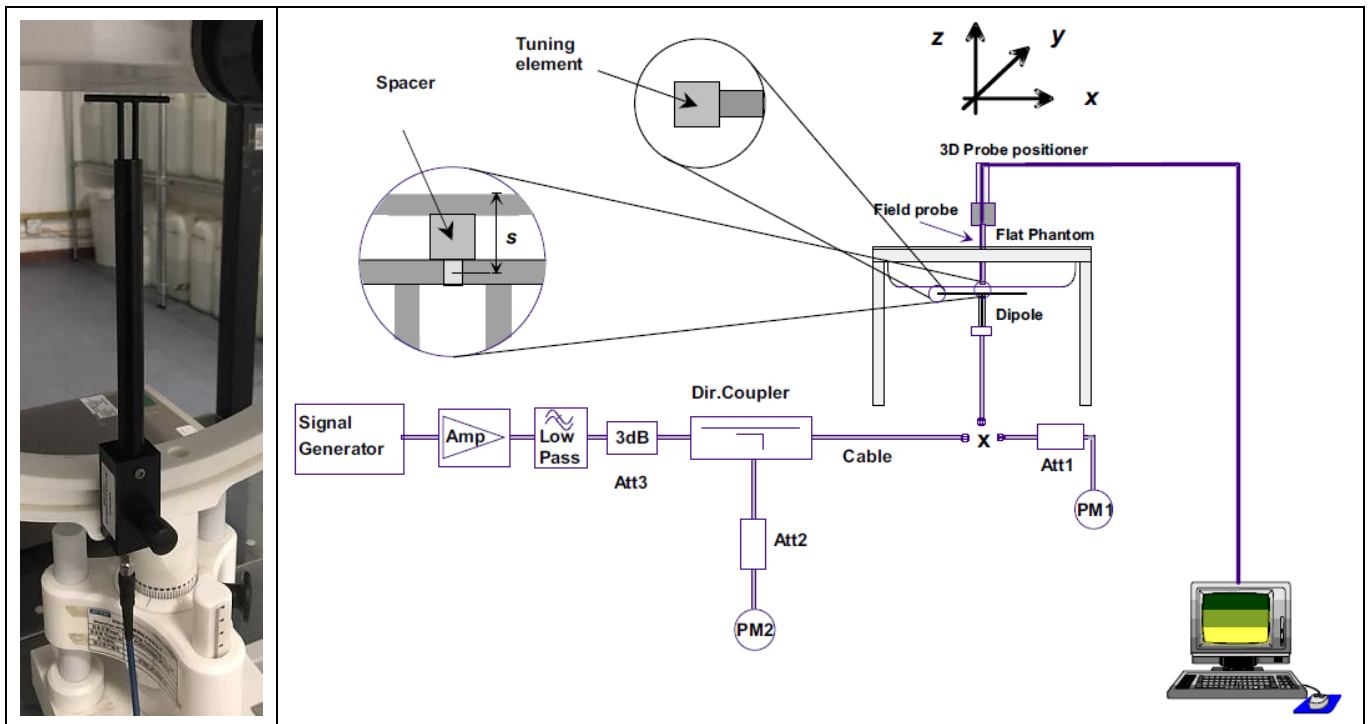

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) ($\pm 10\%$)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
750MHz	8.53 (7.68~9.38)	5.56 (5.01~6.11)	9.05	5.70	21.5 °C	Aug. 09, 2021
835MHz	9.84 (8.86~10.82)	6.22 (5.60~6.84)	9.68	6.13	21.5 °C	Aug. 02, 2021
1800MHz	37.96 (34.17~41.75)	19.81 (17.83~21.79)	38.51	20.17	21.7 °C	Aug. 12, 2021
1900MHz	40.37 (36.34~44.40)	20.48 (18.44~22.52)	39.18	21.04	21.5 °C	Aug. 03, 2021
2450MHz	53.69 (48.33~59.05)	23.94 (21.55~26.33)	54.51	24.42	21.5 °C	Aug. 24, 2021
2600MHz	55.83 (50.25~61.41)	24.19 (21.78~26.60)	55.06	25.08	21.4 °C	Aug. 06, 2021
5200MHz	162.34 (146.11~178.57)	55.42 (49.88~60.96)	172.53	56.34	21.5 °C	Aug. 08, 2021
5600MHz	174.92 (157.43~192.41)	58.63 (52.77~64.49)	178.55	57.48	21.6 °C	Aug. 19, 2021
5800MHz	178.89 (161.01~196.77)	59.32 (53.39~65.25)	187.86	64.54	21.9 °C	Aug. 28, 2021

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.



Fig 6.1.1 Front, back, and side views of SAM phantom

6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.

6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

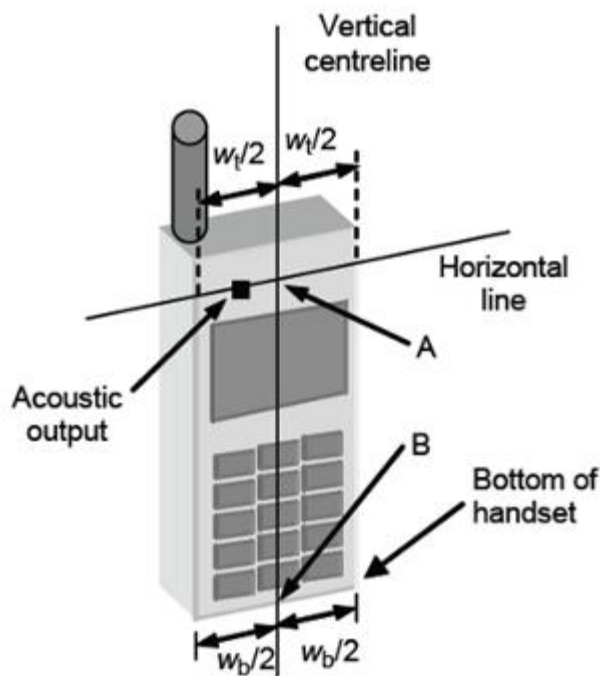


Fig 6.2.1 Handset vertical and horizontal reference lines—"fixed case"

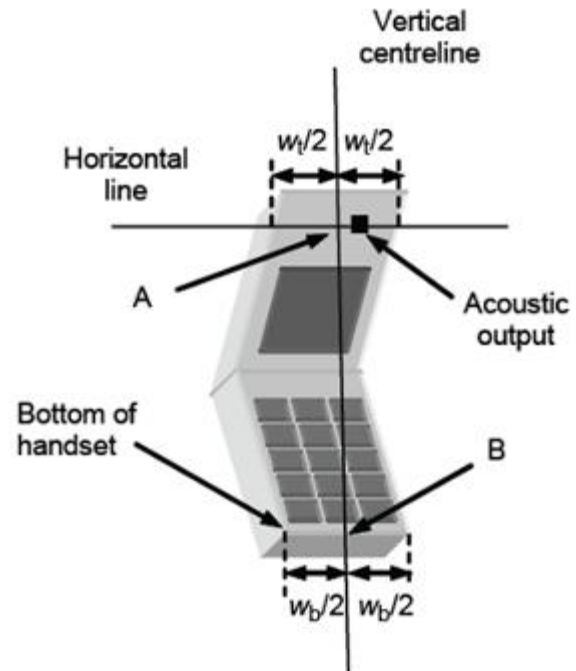


Fig 6.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

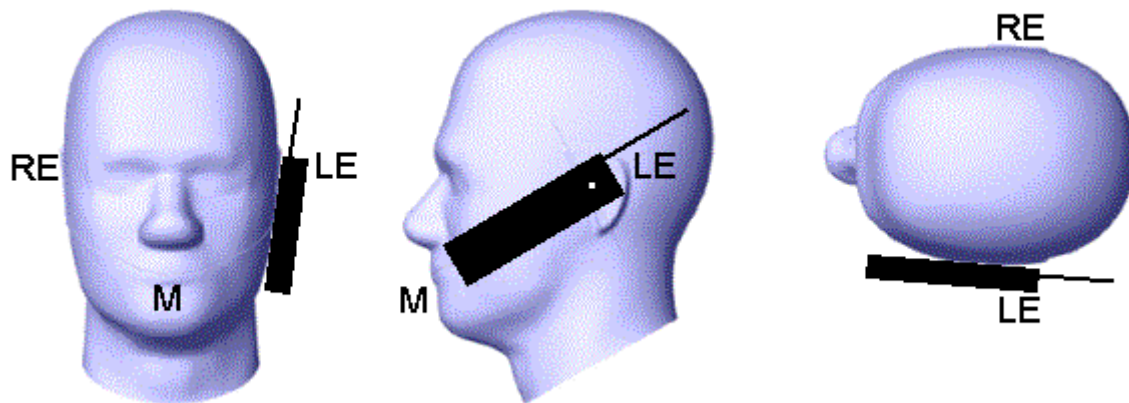


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

6.3. Definition of the tilt position

1. While maintaining the orientation of the handset, retract the handset parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15 degree.
2. Rotate the Handset around the horizontal line by 15 degree (see Figure 6.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.

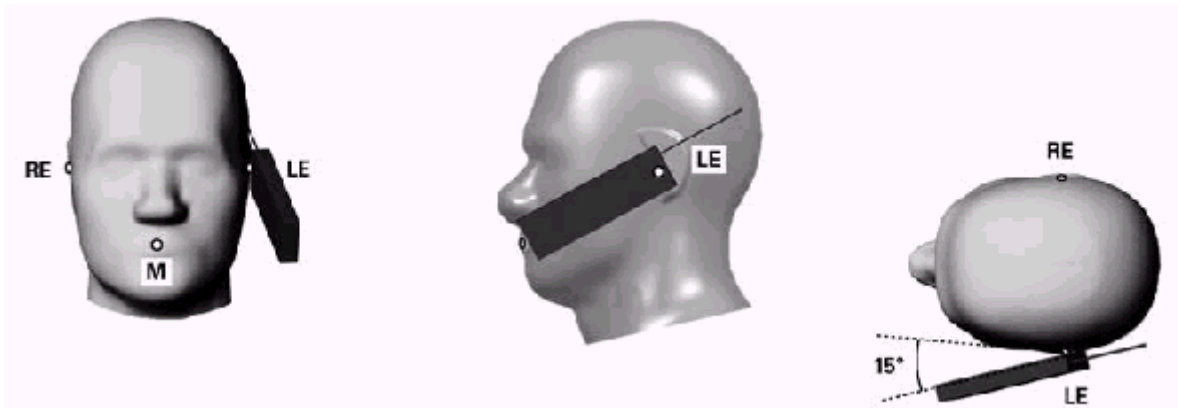


Figure 6.3.1 – Tilt position of the wireless device on the left side of SAM

6.4. Body Worn Accessory

1. Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4.1). Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.
2. Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest

spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

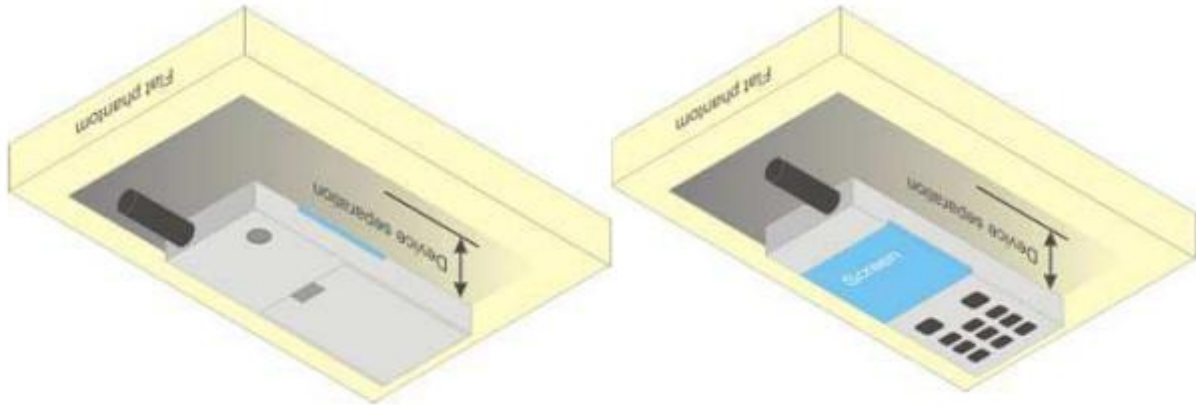


Figure 6.4.1 – Test positions for body-worn devices

6.5. Wireless Router Devices

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WLAN simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WLAN transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WLAN transmitter according to FCC KDB Publication 447498 D01 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

7. RF Output Power

7.1. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8
GSM (GMSK)	33.00	32.45	32.57	32.55	23.97	23.42	23.54	23.52
GPRS(GMSK,1 Tx slot)	33.00	32.37	32.52	32.49	23.97	23.34	23.49	23.46
GPRS(GMSK,2 Tx slot)	32.00	31.63	31.73	31.70	25.98	25.61	25.71	25.68
GPRS(GMSK,3 Tx slot)	30.00	29.86	29.98	29.96	25.74	25.60	25.72	25.70
GPRS(GMSK,4 Tx slot)	29.00	28.71	28.84	28.81	25.99	25.70	25.83	25.80
EGPRS(8PSK,1 Tx slot)	26.50	25.89	25.53	26.05	17.47	16.86	16.50	17.02
EGPRS(8PSK,2 Tx slot)	25.00	24.76	24.36	24.77	18.98	18.74	18.34	18.75
EGPRS(8PSK,3 Tx slot)	23.00	22.59	22.53	22.32	18.74	18.33	18.27	18.06
EGPRS(8PSK,4 Tx slot)	21.50	21.02	21.17	20.92	18.49	18.01	18.16	17.91
Band GSM1900	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	661	810	Tune-up	512	661	810
Frequency (MHz)	(dBm)	1850.2	1880.0	1909.8	(dBm)	1850.2	1880.0	1909.8
GSM (GMSK)	30.00	29.63	29.64	29.51	20.97	20.60	20.61	20.48
GPRS(GMSK,1 Tx slot)	30.00	29.54	29.57	29.46	20.97	20.51	20.54	20.43
GPRS(GMSK,2 Tx slot)	29.00	28.80	28.79	28.70	22.98	22.78	22.77	22.68
GPRS(GMSK,3 Tx slot)	27.50	27.06	27.05	26.95	23.24	22.80	22.79	22.69
GPRS(GMSK,4 Tx slot)	26.00	25.93	25.94	25.86	22.99	22.92	22.93	22.85
EGPRS(8PSK,1 Tx slot)	26.00	25.64	25.94	25.70	16.97	16.61	16.91	16.67
EGPRS(8PSK,2 Tx slot)	25.50	24.80	25.28	24.81	19.48	18.78	19.26	18.79
EGPRS(8PSK,3 Tx slot)	23.50	23.07	23.39	23.00	19.24	18.81	19.13	18.74
EGPRS(8PSK,4 Tx slot)	22.50	21.73	22.28	21.80	19.49	18.72	19.27	18.79

Note: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 TS) - 9.03 dB

Frame-averaged power = Maximum burst averaged power (2 TS) - 6.02 dB

Frame-averaged power = Maximum burst averaged power (3 TS) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 TS) - 3.01 dB

7.2. WCDMA Conducted Power

Band	WCDMA Band 2			
Tx Channel	Tune-up	9262	9400	9538
Frequency (MHz)		1852.4	1880	1907.6
RMC 12.2Kbps	24.00	23.99	23.98	23.82
HSDPA Subtest-1	23.50	23.03	23.03	22.89
HSDPA Subtest-2	23.00	22.61	22.66	22.48
HSDPA Subtest-3	21.50	21.48	21.23	21.44
HSDPA Subtest-4	22.00	21.70	21.61	21.11
HSUPA Subtest-1	23.00	21.64	22.83	22.73
HSUPA Subtest-2	23.00	22.87	22.85	22.80
HSUPA Subtest-3	22.00	21.31	21.57	21.52
HSUPA Subtest-4	23.50	23.03	23.02	22.89
HSUPA Subtest-5	22.50	21.63	22.43	22.01
Band	WCDMA Band 4			
Tx Channel	Tune-up	1312	1413	1513
Frequency (MHz)		1712.4	1732.6	1752.6
RMC12.2K	24.00	23.98	23.74	23.80
HSDPA Sub 1	23.50	23.02	22.77	22.86
HSDPA Sub 2	23.00	22.53	22.34	22.41
HSDPA Sub 3	22.00	21.60	21.31	21.22
HSDPA Sub 4	22.00	21.71	21.37	21.40
HSUPA Sub 1	23.00	21.66	22.64	22.68
HSUPA Sub 2	23.00	22.90	22.71	22.72
HSUPA Sub 3	22.00	21.22	21.57	21.42
HSUPA Sub 4	23.50	23.03	22.80	22.84
HSUPA Sub 5	22.50	21.65	21.98	22.09
Band	WCDMA Band 5			
Tx Channel	Tune-up	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC12.2K	24.00	23.53	23.47	23.56
HSDPA Sub 1	23.00	22.53	22.49	22.54
HSDPA Sub 2	22.50	22.18	21.93	22.21
HSDPA Sub 3	21.50	20.86	20.92	21.07
HSDPA Sub 4	21.50	21.28	20.98	20.78
HSUPA Sub 1	22.50	21.67	22.28	22.34
HSUPA Sub 2	22.50	22.45	22.43	22.46
HSUPA Sub 3	21.50	20.63	21.27	21.19

HSUPA Sub 4	23.00	22.53	22.48	22.54
HSUPA Sub 5	22.00	21.12	21.84	21.89

7.3. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band 2	1.4MHz	QPSK	1	0	24.00	22.35	23.29	23.27
			1	2	24.00	23.28	23.37	23.32
			1	5	24.00	23.22	23.30	23.26
			3	0	24.00	23.25	23.43	23.30
			3	1	24.00	23.32	23.50	23.36
			3	2	24.00	23.28	23.42	23.28
		16QAM	6	0	22.50	22.38	22.49	22.38
			1	0	23.00	22.36	22.51	22.08
			1	2	23.00	22.44	22.56	22.16
			1	5	23.00	22.40	22.51	22.09
			3	0	23.00	22.48	22.64	22.44
			3	1	23.00	22.52	22.69	22.46
			3	2	23.00	22.46	22.65	22.45
			6	0	22.00	21.57	21.66	21.55
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band 2	3MHz	QPSK	1	0	24.00	23.07	23.24	23.12
			1	7	24.00	23.15	23.34	23.19
			1	14	24.00	23.14	23.28	23.05
			8	0	22.50	22.23	22.38	22.28
			8	4	22.50	22.31	22.48	22.31
			8	7	22.50	22.27	22.38	22.27
			15	0	22.50	22.27	22.41	22.25
		16QAM	1	0	23.00	22.22	22.12	22.50
			1	7	23.00	22.34	22.15	22.56
			1	14	23.00	22.27	22.08	22.46
			8	0	21.50	21.27	21.35	21.32
			8	4	21.50	21.31	21.45	21.35
			8	7	21.50	21.26	21.36	21.27

			15	0	21.50	21.24	21.48	21.32
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE Band 2	5MHz	QPSK	1	0	24.00	23.22	23.46	23.36
			1	12	24.00	23.39	23.54	23.43
			1	24	24.00	23.29	23.43	23.37
			12	0	22.50	22.29	22.41	22.33
			12	6	22.50	22.36	22.49	22.41
			12	11	22.50	22.33	22.43	22.31
			25	0	22.50	22.34	22.47	22.32
		16QAM	1	0	23.50	22.63	22.98	22.67
			1	12	23.50	22.79	23.06	22.70
			1	24	23.50	22.66	22.98	22.63
			12	0	22.00	21.34	21.43	21.30
			12	6	22.00	21.41	21.51	21.35
			12	11	22.00	21.39	21.46	21.24
			25	0	21.50	21.31	21.45	21.36
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
LTE Band 2	10MHz	QPSK	1	0	24.00	23.40	23.56	23.50
			1	24	24.00	23.48	23.56	23.44
			1	49	24.00	23.60	23.51	23.37
			25	0	23.00	22.34	22.40	22.30
			25	12	23.00	22.43	22.53	22.43
			25	24	23.00	22.42	22.46	22.34
			50	0	22.50	22.41	22.46	22.34
		16QAM	1	0	23.00	22.55	22.42	22.88
			1	24	23.00	22.63	22.41	22.84
			1	49	23.00	22.73	22.37	22.78
			25	0	22.00	21.40	21.39	21.33
			25	12	22.00	21.47	21.50	21.44
			25	24	22.00	21.48	21.46	21.38
			50	0	21.50	21.47	21.40	21.30
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB	RB		18675/1857.5	18900/1880	19125/1902.5

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band 2	15MHz	QPSK	1	0	24.00	23.30	23.50	23.36
			1	37	24.00	23.48	23.50	23.39
			1	74	24.00	23.48	23.38	23.22
			36	0	23.00	22.45	22.42	22.39
			36	18	23.00	22.48	22.47	22.34
			36	37	23.00	22.50	22.43	22.36
			75	0	22.50	22.48	22.46	22.40
		16QAM	1	0	23.00	22.74	22.67	22.51
			1	37	23.00	22.91	22.63	22.54
			1	74	23.00	22.88	22.56	22.37
			36	0	22.00	21.44	21.43	21.35
			36	18	22.00	21.49	21.53	21.34
			36	37	22.00	21.53	21.51	21.31
			75	0	21.50	21.45	21.41	21.35
LTE Band 2	20MHz	QPSK	1	0	24.00	23.25	23.40	23.36
			1	49	24.00	23.55	23.51	23.47
			1	99	24.00	23.48	23.36	23.25
			50	0	23.00	22.37	22.35	22.46
			50	24	23.00	22.47	22.48	22.43
			50	49	23.00	22.55	22.40	22.41
			100	0	22.50	22.44	22.35	22.42
		16QAM	1	0	23.00	22.43	22.71	22.57
			1	49	23.00	22.75	22.82	22.72
			1	99	23.00	22.66	22.64	22.40
			50	0	22.00	21.39	21.38	21.45
			50	24	22.00	21.49	21.51	21.38
			50	49	22.00	21.56	21.45	21.36
			100	0	21.50	21.42	21.34	21.36

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band	1.4MHz	QPSK	1	0	24.00	22.40	23.15	23.20
			1	2	24.00	23.37	23.21	23.27

4			1	5	24.00	23.30	23.15	23.21
			3	0	23.50	23.38	23.28	23.30
			3	1	23.50	23.42	23.30	23.31
			3	2	23.50	23.35	23.28	23.25
			6	0	22.50	22.40	22.30	22.35
		16QAM	1	0	23.00	22.43	22.33	22.05
			1	2	23.00	22.51	22.37	22.11
			1	5	23.00	22.44	22.34	22.04
			3	0	23.00	22.57	22.49	22.41
			3	1	23.00	22.58	22.51	22.43
			3	2	23.00	22.55	22.47	22.44
			6	0	22.00	21.62	21.47	21.52
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5
LTE Band 4	3MHz	QPSK	1	0	24.00	23.20	23.01	23.00
			1	7	24.00	23.28	23.12	23.15
			1	14	24.00	23.17	23.01	23.06
			8	0	22.50	22.34	22.21	22.21
			8	4	22.50	22.41	22.26	22.32
			8	7	22.50	22.40	22.24	22.31
			15	0	22.50	22.38	22.23	22.23
		16QAM	1	0	23.00	22.07	22.43	22.20
			1	7	23.00	22.13	22.50	22.31
			1	14	23.00	21.99	22.42	22.23
			8	0	21.50	21.28	21.25	21.27
			8	4	21.50	21.37	21.33	21.27
			8	7	21.50	21.37	21.28	21.24
			15	0	21.50	21.43	21.24	21.20
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5
LTE Band 4	5MHz	QPSK	1	0	24.00	23.38	23.24	23.29
			1	12	24.00	23.48	23.40	23.38
			1	24	24.00	23.43	23.29	23.31
			12	0	23.00	22.46	22.31	22.32
			12	6	23.00	22.48	22.39	22.39
			12	11	23.00	22.50	22.30	22.27

			25	0	22.50	22.44	22.30	22.32
		16QAM	1	0	23.50	22.91	22.59	22.58
			1	12	23.50	23.02	22.68	22.67
			1	24	23.50	22.96	22.57	22.58
			12	0	22.00	21.40	21.24	21.36
			12	6	22.00	21.50	21.32	21.39
			12	11	22.00	21.47	21.23	21.33
			25	0	21.50	21.43	21.35	21.30
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750
LTE Band 4	10MHz	QPSK	1	0	24.00	23.53	23.34	23.42
			1	24	24.00	23.52	23.45	23.46
			1	49	24.00	23.41	23.39	23.41
			25	0	23.00	22.37	22.26	22.35
			25	12	23.00	22.51	22.37	22.39
			25	24	23.00	22.42	22.30	22.33
			50	0	22.50	22.40	22.34	22.34
		16QAM	1	0	23.00	22.87	22.49	22.25
			1	24	23.00	22.93	22.53	22.27
			1	49	23.00	22.85	22.53	22.23
			25	0	22.00	21.42	21.27	21.39
			25	12	22.00	21.52	21.39	21.39
			25	24	22.00	21.50	21.31	21.32
			50	0	21.50	21.47	21.35	21.32
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
LTE Band 4	15MHz	QPSK	1	0	24.00	23.44	23.26	23.31
			1	37	24.00	23.52	23.37	23.47
			1	74	24.00	23.36	23.30	23.36
			36	0	22.50	22.39	22.33	22.39
			36	18	22.50	22.47	22.40	22.45
			36	37	22.50	22.40	22.38	22.36
			75	0	22.50	22.44	22.40	22.43
		16QAM	1	0	23.00	22.58	22.41	22.69
			1	37	23.00	22.65	22.49	22.83
			1	74	23.00	22.50	22.45	22.75

			36	0	22.00	21.51	21.27	21.42
			36	18	22.00	21.53	21.37	21.48
			36	37	22.00	21.48	21.34	21.40
			75	0	21.50	21.42	21.39	21.38
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745
LTE Band 4	20MHz	QPSK	1	0	24.00	23.39	23.25	23.28
			1	49	24.00	23.51	23.48	23.54
			1	99	24.00	23.34	23.35	23.35
			50	0	22.50	22.42	22.28	22.41
			50	24	22.50	22.45	22.43	22.44
			50	49	22.50	22.46	22.38	22.37
			100	0	22.50	22.40	22.32	22.37
		16QAM	1	0	23.00	22.63	22.55	22.44
			1	49	23.00	22.68	22.76	22.72
			1	99	23.00	22.55	22.63	22.54
			50	0	22.00	21.45	21.34	21.37
			50	24	22.00	21.49	21.45	21.43
			50	49	22.00	21.51	21.41	21.33
			100	0	21.50	21.44	21.35	21.35

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band 5	1.4MHz	QPSK	1	0	23.50	22.25	23.18	23.23
			1	2	23.50	23.25	23.26	23.24
			1	5	23.50	23.21	23.19	23.18
			3	0	23.50	23.24	23.33	23.31
			3	1	23.50	23.23	23.38	23.39
			3	2	23.50	23.20	23.28	23.38
			6	0	22.50	22.25	22.32	22.36
		16QAM	1	0	22.50	22.01	22.39	22.40
			1	2	22.50	22.11	22.45	22.42
			1	5	22.50	22.03	22.38	22.39
			3	0	23.00	22.36	22.50	22.54
			3	1	23.00	22.44	22.52	22.57
			3	2	23.00	22.40	22.44	22.53

			6	0	22.00	21.49	21.55	21.52
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band 5	3MHz	QPSK	1	0	23.50	23.00	23.08	22.98
			1	7	23.50	23.08	23.16	23.10
			1	14	23.50	23.03	23.08	23.06
			8	0	22.50	22.16	22.21	22.20
			8	4	22.50	22.20	22.30	22.32
			8	7	22.50	22.21	22.24	22.28
			15	0	22.50	22.17	22.26	22.25
		16QAM	1	0	23.00	22.17	21.96	22.41
			1	7	23.00	22.31	22.05	22.53
			1	14	23.00	22.18	21.89	22.48
			8	0	21.50	21.20	21.16	21.25
			8	4	21.50	21.24	21.30	21.35
			8	7	21.50	21.22	21.27	21.26
			15	0	21.50	21.14	21.34	21.31
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band 5	5MHz	QPSK	1	0	23.50	23.22	23.31	23.22
			1	12	23.50	23.31	23.37	23.33
			1	24	23.50	23.26	23.29	23.32
			12	0	22.50	22.32	22.26	22.31
			12	6	22.50	22.30	22.41	22.33
			12	11	22.50	22.22	22.36	22.29
			25	0	22.50	22.33	22.30	22.34
		16QAM	1	0	23.00	22.82	22.69	22.54
			1	12	23.00	22.91	22.73	22.66
			1	24	23.00	22.89	22.62	22.59
			12	0	21.50	21.29	21.24	21.40
			12	6	21.50	21.39	21.33	21.44
			12	11	21.50	21.27	21.26	21.35
			25	0	21.50	21.29	21.38	21.34
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB	RB		20450/829	20525/836.5	20600/844

			Size	Offset				
LTE Band 5	10MHz	QPSK	1	0	23.50	23.31	23.41	23.36
			1	24	23.50	23.41	23.48	23.37
			1	49	23.50	23.44	23.39	23.42
			25	0	22.50	22.34	22.27	22.27
			25	12	22.50	22.36	22.35	22.35
			25	24	22.50	22.39	22.32	22.22
			50	0	22.50	22.41	22.30	22.28
		16QAM	1	0	23.00	22.46	22.29	22.74
			1	24	23.00	22.58	22.32	22.74
			1	49	23.00	22.55	22.22	22.81
			25	0	21.50	21.36	21.31	21.31
			25	12	21.50	21.41	21.45	21.39
			25	24	21.50	21.42	21.35	21.24
			50	0	21.50	21.44	21.31	21.32

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band 7	5MHz	QPSK	1	0	24.00	23.59	23.60	23.52
			1	12	24.00	23.70	23.75	23.60
			1	24	24.00	23.68	23.65	23.50
			12	0	23.00	22.61	22.68	22.56
			12	6	23.00	22.71	22.73	22.59
			12	11	23.00	22.73	22.69	22.57
			25	0	23.00	22.70	22.68	22.59
		16QAM	1	0	23.50	23.12	22.95	22.87
			1	12	23.50	23.24	23.02	22.92
			1	24	23.50	23.20	22.98	22.80
			12	0	22.00	21.64	21.60	21.60
			12	6	22.00	21.74	21.66	21.66
			12	11	22.00	21.71	21.63	21.56
			25	0	22.00	21.69	21.71	21.59
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20800/2505	21100/2535	21400/2565
LTE Band	10MHz	QPSK	1	0	24.00	23.72	23.71	23.68
			1	24	24.00	23.81	23.75	23.69

7			1	49	24.00	23.84	23.75	23.66
			25	0	23.00	22.64	22.68	22.66
			25	12	23.00	22.74	22.75	22.67
			25	24	23.00	22.80	22.73	22.61
			50	0	23.00	22.76	22.75	22.68
		16QAM	1	0	23.50	23.09	22.91	22.55
			1	24	23.50	23.15	22.96	22.57
			1	49	23.50	23.19	22.90	22.53
			25	0	22.00	21.71	21.73	21.69
			25	12	22.00	21.81	21.80	21.71
			25	24	22.00	21.87	21.76	21.66
			50	0	22.00	21.79	21.77	21.66
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
LTE Band 7	15MHz	QPSK	1	0	24.00	23.67	23.71	23.61
			1	37	24.00	23.78	23.76	23.71
			1	74	24.00	23.74	23.70	23.37
			36	0	23.00	22.68	22.70	22.54
			36	18	23.00	22.78	22.76	22.64
			36	37	23.00	22.76	22.73	22.56
			75	0	23.00	22.80	22.79	22.47
		16QAM	1	0	23.50	22.75	23.10	22.39
			1	37	23.50	22.87	23.20	22.50
			1	74	23.50	22.84	23.12	22.42
			36	0	22.00	21.63	21.76	21.20
			36	18	22.00	21.73	21.78	21.24
			36	37	22.00	21.71	21.72	21.29
			75	0	22.00	21.79	21.78	21.16
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20850/2510	21100/2535	21350/2560
LTE Band 7	20MHz	QPSK	1	0	24.00	23.58	23.37	23.08
			1	49	24.00	23.84	23.54	23.30
			1	99	24.00	23.67	23.47	23.07
			50	0	23.00	22.64	22.29	22.17
			50	24	23.00	22.81	22.49	22.22
			50	49	23.00	22.78	22.33	22.14

			100	0	23.00	22.69	22.34	22.15
		16QAM	1	0	23.50	22.82	22.41	22.36
			1	49	23.50	23.07	22.60	22.57
			1	99	23.50	22.91	22.48	22.39
			50	0	22.00	21.47	21.29	21.22
			50	24	22.00	21.65	21.34	21.30
			50	49	22.00	21.64	21.33	21.18
			100	0	22.00	21.63	21.36	21.16

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23017/699.7	23095/707.5	23173/715.3
LTE Band 12	1.4MHz	QPSK	1	0	24.00	22.31	23.22	23.25
			1	2	24.00	23.28	23.31	23.30
			1	5	24.00	23.29	23.21	23.26
			3	0	23.50	23.39	23.43	23.41
			3	1	23.50	23.41	23.45	23.45
			3	2	23.50	23.42	23.41	23.37
			6	0	22.50	22.34	22.37	22.42
		16QAM	1	0	23.00	22.37	22.48	22.08
			1	2	23.00	22.46	22.51	22.18
			1	5	23.00	22.48	22.44	22.07
			3	0	23.00	22.56	22.64	22.51
			3	1	23.00	22.56	22.72	22.53
			3	2	23.00	22.56	22.65	22.49
			6	0	22.00	21.67	21.67	21.65

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23025/700.5	23095/707.5	23165/714.5
LTE Band 12	3MHz	QPSK	1	0	24.00	23.17	23.19	23.17
			1	7	24.00	23.22	23.25	23.28
			1	14	24.00	23.15	23.17	23.22
			8	0	22.50	22.36	22.37	22.35
			8	4	22.50	22.43	22.44	22.45
			8	7	22.50	22.40	22.41	22.38
			15	0	22.50	22.35	22.39	22.38
		16QAM	1	0	23.00	22.53	22.40	22.10
			1	7	23.00	22.68	22.51	22.12

			1	14	23.00	22.62	22.37	21.99
			8	0	22.00	21.50	21.51	21.48
			8	4	22.00	21.58	21.60	21.50
			8	7	22.00	21.51	21.49	21.50
			15	0	22.00	21.54	21.48	21.57
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23035/701.5	23095/707.5	23155/713.5
LTE Band 12	5MHz	QPSK	1	0	24.00	23.39	23.43	23.44
			1	12	24.00	23.54	23.48	23.53
			1	24	24.00	23.47	23.38	23.42
			12	0	23.00	22.59	22.33	22.58
			12	6	23.00	22.56	22.57	22.54
			12	11	23.00	22.52	22.49	22.56
			25	0	23.00	22.53	22.46	22.56
		16QAM	1	0	23.50	22.74	22.77	22.99
			1	12	23.50	22.94	22.87	23.07
			1	24	23.50	22.87	22.76	22.90
			12	0	22.00	21.64	21.47	21.67
			12	6	22.00	21.62	21.68	21.63
			12	11	22.00	21.60	21.61	21.65
			25	0	22.00	21.70	21.53	21.65
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23060/704	23095/707.5	23130/711
LTE Band 12	10MHz	QPSK	1	0	24.00	23.44	23.53	23.57
			1	24	24.00	23.57	23.59	23.61
			1	49	24.00	23.57	23.50	23.56
			25	0	23.00	22.52	22.31	22.51
			25	12	23.00	22.56	22.54	22.56
			25	24	23.00	22.71	22.34	22.49
			50	0	23.00	22.63	22.40	22.52
		16QAM	1	0	23.50	22.87	22.74	22.48
			1	24	23.50	23.05	22.76	22.44
			1	49	23.50	22.98	22.75	22.36
			25	0	22.00	21.70	21.45	21.66
			25	12	22.00	21.76	21.63	21.66
			25	24	22.00	21.82	21.46	21.61

			50	0	22.00	21.76	21.51	21.62
--	--	--	----	---	-------	-------	-------	-------

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23755/706.5	23790/710	23825/713.5
LTE Band 17	5MHz	QPSK	1	0	24.00	23.37	23.38	23.29
			1	12	24.00	23.43	23.40	23.34
			1	24	24.00	23.39	23.36	23.23
			12	0	22.50	22.29	22.38	22.45
			12	6	22.50	22.46	22.46	22.38
			12	11	22.50	22.47	22.27	22.44
			25	0	22.50	22.39	22.31	22.44
		16QAM	1	0	23.50	22.98	22.74	22.65
			1	12	23.50	23.01	22.77	22.72
			1	24	23.50	22.92	22.67	22.56
			12	0	22.00	21.41	21.41	21.53
			12	6	22.00	21.57	21.47	21.53
			12	11	22.00	21.54	21.26	21.55
			25	0	22.00	21.46	21.50	21.51
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23780/709	23790/710	23800/711
LTE Band 17	10MHz	QPSK	1	0	24.00	23.48	23.47	23.46
			1	24	24.00	23.50	23.46	23.46
			1	49	24.00	23.45	23.38	23.39
			25	0	22.50	22.21	22.29	22.43
			25	12	22.50	22.43	22.42	22.49
			25	24	22.50	22.21	22.21	22.35
			50	0	22.50	22.24	22.31	22.45
		16QAM	1	0	23.00	22.36	22.90	22.62
			1	24	23.00	22.34	22.92	22.65
			1	49	23.00	22.30	22.82	22.56
			25	0	22.00	21.35	21.45	21.56
			25	12	22.00	21.56	21.55	21.59
			25	24	22.00	21.32	21.37	21.46
			50	0	22.00	21.31	21.41	21.58

Band	Band Width	Modulation	RB Configuration	Tune-up	Channel/Frequency(MHz)
------	------------	------------	------------------	---------	------------------------

			RB Size	RB Offset		131979/1710.7	132322/1745	132665/1779.3
LTE Band 66	1.4MHz	QPSK	1	0	24.00	22.31	23.07	23.31
			1	2	24.00	23.28	23.14	23.41
			1	5	24.00	23.23	23.06	23.34
			3	0	23.50	23.30	23.18	23.37
			3	1	23.50	23.32	23.22	23.41
			3	2	23.50	23.27	23.19	23.36
			6	0	23.00	22.34	22.24	22.54
		16QAM	1	0	22.50	22.35	22.22	22.10
			1	2	22.50	22.41	22.28	22.16
			1	5	22.50	22.35	22.25	22.08
			3	0	23.00	22.46	22.37	22.43
			3	1	23.00	22.48	22.44	22.50
			3	2	23.00	22.42	22.41	22.46
			6	0	22.00	21.54	21.36	21.62
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		131987/1711.5	132322/1745	132657/1778.5
LTE Band 66	3MHz	QPSK	1	0	24.00	23.04	22.98	23.18
			1	7	24.00	23.17	23.10	23.22
			1	14	24.00	23.51	23.00	23.14
			8	0	22.50	22.24	22.17	22.35
			8	4	22.50	22.29	22.22	22.40
			8	7	22.50	22.31	22.15	22.42
			15	0	22.50	22.28	22.13	22.29
		16QAM	1	0	23.00	22.25	21.85	22.47
			1	7	23.00	22.32	21.89	22.55
			1	14	23.00	22.24	21.74	22.47
			8	0	21.50	21.25	21.08	21.33
			8	4	21.50	21.30	21.17	21.42
			8	7	21.50	21.25	21.14	21.32
			15	0	21.50	21.22	21.20	21.35
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		131997/1712.5	132322/1745	132647/1777.5
LTE Band	5MHz	QPSK	1	0	24.00	23.27	23.21	23.35
			1	12	24.00	23.32	23.32	23.49

66			1	24	24.00	23.21	23.25	23.42
			12	0	22.50	22.30	22.17	22.44
			12	6	22.50	22.36	22.28	22.46
			12	11	22.50	22.35	22.20	22.36
			25	0	22.50	22.34	22.20	22.40
		16QAM	1	0	23.00	22.61	22.68	22.59
			1	12	23.00	22.68	22.79	22.71
			1	24	23.00	22.60	22.73	22.65
			12	0	21.50	21.30	21.22	21.33
			12	6	21.50	21.42	21.28	21.36
			12	11	21.50	21.36	21.21	21.30
			25	0	21.50	21.31	21.22	21.40
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		132022/1715	132322/1745	132622/1775
LTE Band 66	10MHz	QPSK	1	0	24.00	23.38	23.27	23.36
			1	24	24.00	23.41	23.35	23.49
			1	49	24.00	23.37	23.34	23.51
			25	0	22.50	22.22	22.19	22.33
			25	12	22.50	22.36	22.28	22.42
			25	24	22.50	22.31	22.21	22.38
			50	0	22.50	22.31	22.24	22.37
		16QAM	1	0	23.00	22.52	22.08	22.70
			1	24	23.00	22.55	22.19	22.76
			1	49	23.00	22.47	22.15	22.81
			25	0	21.50	21.28	21.20	21.38
			25	12	21.50	21.33	21.27	21.41
			25	24	21.50	21.35	21.23	21.37
			50	0	21.50	21.38	21.22	21.39
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		132047/1717.5	132322/1745	132597/1772.5
LTE Band 66	15MHz	QPSK	1	0	24.00	23.32	23.21	23.28
			1	37	24.00	23.37	23.35	23.44
			1	74	24.00	23.24	23.23	23.46
			36	0	22.50	22.27	22.26	22.33
			36	18	22.50	22.34	22.31	22.42
			36	37	22.50	22.34	22.28	22.46

			75	0	22.50	22.37	22.32	22.43
		16QAM	1	0	23.00	22.42	22.55	22.43
			1	37	23.00	22.42	22.67	22.53
			1	74	23.00	22.30	22.62	22.53
			36	0	22.00	21.26	21.30	21.39
			36	18	22.00	21.30	21.33	21.50
			36	37	22.00	21.27	21.29	21.49
			75	0	21.50	21.38	21.26	21.37
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		132072/1720	132322/1745	132572/1770
LTE Band 66	20MHz	QPSK	1	0	24.00	23.26	23.14	23.11
			1	49	24.00	23.35	23.36	23.43
			1	99	24.00	23.19	23.18	23.50
			50	0	22.50	22.25	22.24	22.27
			50	24	22.50	22.31	22.30	22.38
			50	49	22.50	22.37	22.28	22.33
			100	0	22.50	22.30	22.25	22.30
		16QAM	1	0	23.00	22.56	22.34	22.39
			1	49	23.00	22.66	22.57	22.62
			1	99	23.00	22.48	22.41	22.56
			50	0	21.50	21.29	21.24	21.29
			50	24	21.50	21.40	21.30	21.41
			50	49	21.50	21.42	21.20	21.29
			100	0	21.50	21.32	21.23	21.29

7.4. WLAN & Bluetooth Output Power

7.4.1. Output Power Results Of WLAN

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11b	1	2412	13.50	12.39
	6	2437	13.50	13.35
	11	2462	13.50	12.75
802.11g	1	2412	11.50	10.99
	6	2437	11.50	11.33
	11	2462	11.50	11.34
802.11n HT20	1	2412	11.50	10.96

802.11n HT40	6	2437	11.50	11.38
	11	2462	11.50	11.28
	3	2422	11.50	11.31
	6	2437	11.50	10.43
	9	2452	11.50	10.64

NOTE: Power measurement results of WLAN 2.4G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	36	5180	12.00	10.96
	40	5200	12.00	12.00
	48	5240	12.00	11.07
802.11n HT20	36	5180	12.00	10.70
	40	5200	12.00	11.52
	48	5240	12.00	10.84
802.11n HT40	38	5190	9.50	9.24
	46	5230	9.50	8.98
802.11ac VHT20	36	5180	12.00	10.64
	40	5200	12.00	11.57
	48	5240	12.00	10.63
802.11ac VHT40	38	5190	9.50	9.30
	46	5230	9.50	8.96
802.11ac VHT80	42	5210	9.50	9.43

NOTE: Power measurement results of WLAN 5.2G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	52	5260	12.00	11.18
	56	5280	12.00	11.76
	64	5320	12.00	10.56
802.11n HT20	52	5260	11.50	11.46
	56	5280	11.50	10.02
	64	5320	11.50	9.71
802.11n HT40	54	5270	9.50	8.72
	62	5310	9.50	9.28
802.11ac VHT20	52	5260	10.00	9.24
	56	5280	10.00	9.87
	64	5320	10.00	9.80
802.11ac VHT40	54	5270	9.00	8.65
	62	5310	9.00	7.09

802.11ac VHT80

58

5290

8.50

8.05

NOTE: Power measurement results of WLAN 5.3G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	100	5500	10.50	9.19
	120	5600	10.50	9.87
	140	5700	10.50	10.06
802.11n	100	5500	10.00	9.00
	120	5600	10.00	9.63
	140	5700	10.00	9.83
802.11n	102	5510	9.50	9.32
	118	5590	9.50	7.78
	134	5670	9.50	9.45
802.11ac (VHT20)	100	5500	10.00	8.94
	120	5600	10.00	9.65
	140	5700	10.00	9.78
802.11ac (VHT40)	102	5510	9.50	8.61
	118	5590	9.50	7.74
	134	5670	9.50	9.36
802.11ac (VHT80)	106	5530	8.00	7.87
	122	5610	8.00	7.28

NOTE: Power measurement results of WLAN 5.6G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	149	5745	8.50	8.23
	157	5785	8.50	7.89
	165	5825	8.50	8.14
802.11n HT20	149	5745	8.50	8.07
	157	5785	8.50	7.65
	165	5825	8.50	8.07
802.11n HT40	151	5755	8.00	7.69
	159	5795	8.00	7.84
802.11ac VHT20	149	5745	8.50	8.06
	157	5785	8.50	7.66
	165	5825	8.50	8.14
802.11ac VHT40	151	5755	8.00	7.79
	159	5795	8.00	7.82

802.11ac VHT80	155	5775	7.00	6.74
----------------	-----	------	------	------


NOTE: Power measurement results of WLAN 5.8G.

7.4.2. Output Power Results Of Bluetooth

BR+EDR	Output Power (dBm)				
	Channel	Tune-up	Data Rates		
			1M	2M	3M
	1M	6.700	6.679	5.403	4.941
	2M	6.000	4.389	4.850	5.183
	3M	6.000	4.359	4.820	5.167

BLE	Channel	Tune - up	Output Power (dBm)	Tune - up	Output Power (dBm)
		Data Rates 1M		Data Rates 2M	
	0CH	-5.500	-5.686	-5.500	-5.763
	19CH	-6.000	-6.098	-5.500	-5.751
	39CH	-7.500	-7.513	-7.000	-7.491

8. Antenna Location

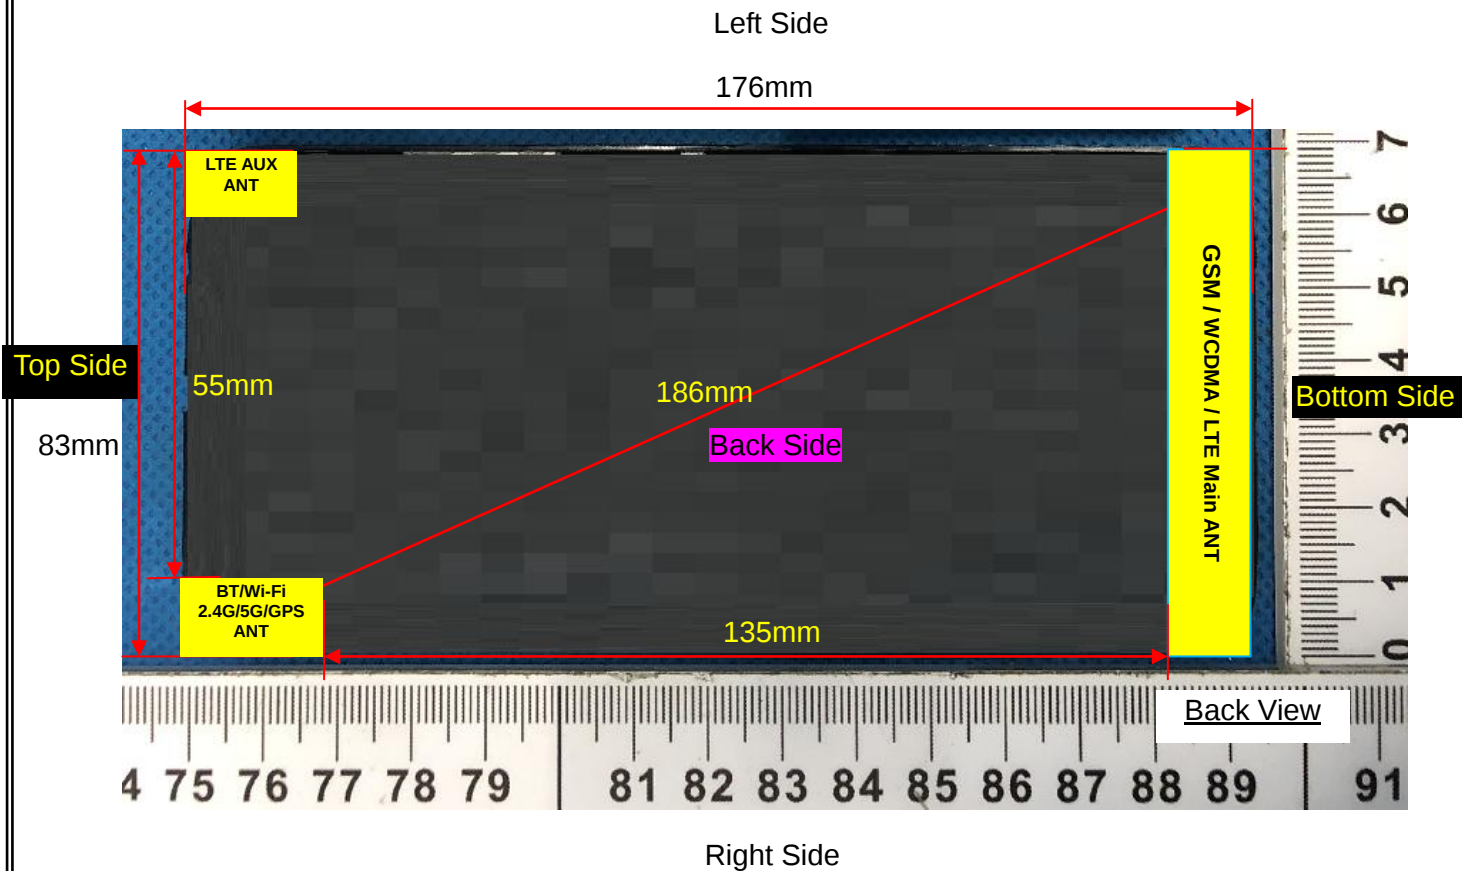

Right Side

Note: Since the confidentiality request of EUT, the antenna location example diagram see as above.

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm
WLAN & Bluetooth	≤ 25mm	≤ 25mm	> 25mm	≤25mm	≤ 25mm	>25mm
Positions for SAR tests						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main	Yes	Yes	Yes	Yes	NO	Yes
WLAN & Bluetooth	Yes	Yes	NO	Yes	Yes	NO

9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	P _{max} (dBm)	P _{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	6.70	4.68	5	2.480	1.47	3	Yes

NOTE: Standalone SAR test exclusion for Bluetooth.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}/x] \text{ W/kg}$ for test separation distances $\leq 50\text{mm}$, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P _{max} (dBm)	P _{max} (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Head	6.70	4.68	5	2.48	7.5	0.196
Bluetooth	Body	6.70	4.68	10	2.48	7.5	0.098
Bluetooth	Hotspot	6.70	4.68	10	2.48	7.5	0.098

NOTE: Estimated SAR calculation for Bluetooth

10. SAR Results

10.1. SAR measurement results

10.1.1. SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	189/836.4	GPRS(GMSK 4TS)	0.193	0.155	0.40	28.84	29.00	0.200	2021/8/02
Left Tilt 15	189/836.4	GPRS(GMSK 4TS)	0.107	0.082	-3.98	28.84	29.00	0.111	2021/8/02

Degree									
Right Cheek	189/836.4	GPRS(GMSK 4TS)	0.178	0.139	-3.34	28.84	29.00	0.185	2021/8/02
Right Tilt 15 Degree	189/836.4	GPRS(GMSK 4TS)	0.085	0.066	-3.19	28.84	29.00	0.088	2021/8/02

NOTE: Head SAR test results of GSM850.

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	189/836.4	GPRS(GMSK 4TS)	0.396	0.218	-1.51	28.84	29.00	0.411	2021/8/02
Back Side	189/836.4	GPRS(GMSK 4TS)	0.623	0.358	-2.94	28.84	29.00	0.646	2021/8/02

NOTE: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	189/836.4	GPRS(GMSK 4TS)	0.396	0.218	-1.51	28.84	29.00	0.411	2021/8/02
Back Side	189/836.4	GPRS(GMSK 4TS)	0.623	0.358	-2.94	28.84	29.00	0.646	2021/8/02
Left Side	189/836.4	GPRS(GMSK 4TS)	0.189	0.104	-3.18	28.84	29.00	0.196	2021/8/02
Right Side	189/836.4	GPRS(GMSK 4TS)	0.198	0.114	-3.81	28.84	29.00	0.205	2021/8/02
Bottom Side	189/836.4	GPRS(GMSK 4TS)	0.315	0.174	2.43	28.84	29.00	0.327	2021/8/02

NOTE: Hotspot SAR test results of GSM850

10.1.2. SAR measurement Result of GSM1900

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	661/1880	GPRS(GMSK 3TS)	0.183	0.096	2.14	27.05	27.50	0.203	2021/8/03
Left Tilt 15 Degree	661/1880	GPRS(GMSK 3TS)	0.095	0.047	-2.30	27.05	27.50	0.105	2021/8/03
Right Cheek	661/1880	GPRS(GMSK 3TS)	0.163	0.086	2.90	27.05	27.50	0.181	2021/8/03
Right Tilt 15 Degree	661/1880	GPRS(GMSK 3TS)	0.090	0.045	-2.61	27.05	27.50	0.100	2021/8/03

NOTE: Head SAR test results of GSM1900

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	661/1880	GPRS(GMSK 3TS)	0.174	0.081	2.78	27.05	27.50	0.193	2021/8/03
Back Side	661/1880	GPRS(GMSK 3TS)	0.289	0.141	-0.32	27.05	27.50	0.321	2021/8/03

NOTE: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	661/1880	GPRS(GMSK 3TS)	0.174	0.081	2.78	27.05	27.50	0.193	2021/8/03
Back Side	661/1880	GPRS(GMSK 3TS)	0.289	0.141	-0.32	27.05	27.50	0.321	2021/8/03
Left Side	661/1880	GPRS(GMSK 3TS)	0.090	0.044	-3.36	27.05	27.50	0.100	2021/8/03
Right Side	661/1880	GPRS(GMSK 3TS)	0.087	0.040	2.55	27.05	27.50	0.096	2021/8/03
Bottom Side	661/1880	GPRS(GMSK 3TS)	0.145	0.069	-0.10	27.05	27.50	0.161	2021/8/03

NOTE: Hotspot SAR test results of GSM1900

10.1.3. SAR measurement Result of WCDMA Band 2

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	9400/1880	RMC12.2K	0.421	0.250	1.70	23.98	24.00	0.423	2021/8/03
Left Tilt 15 Degree	9400/1880	RMC12.2K	0.252	0.150	-1.28	23.98	24.00	0.253	2021/8/03
Right Cheek	9400/1880	RMC12.2K	0.365	0.215	0.62	23.98	24.00	0.367	2021/8/03
Right Tilt 15 Degree	9400/1880	RMC12.2K	0.194	0.111	-4.92	23.98	24.00	0.195	2021/8/03

NOTE: Head SAR test results of WCDMA Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g	Date
			1g	10g					

								(W/Kg)	
Front Side	9400/1880	RMC12.2K	0.342	0.187	3.32	23.98	24.00	0.344	2021/8/03
Back Side	9400/1880	RMC12.2K	0.542	0.309	-1.43	23.98	24.00	0.545	2021/8/03

NOTE: Body-Worn SAR test results of WCDMA Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	9400/1880	RMC12.2K	0.342	0.187	3.32	23.98	24.00	0.344	2021/8/03
Back Side	9400/1880	RMC12.2K	0.542	0.309	-1.43	23.98	24.00	0.545	2021/8/03
Left Side	9400/1880	RMC12.2K	0.177	0.096	3.69	23.98	24.00	0.178	2021/8/03
Right Side	9400/1880	RMC12.2K	0.168	0.092	-0.77	23.98	24.00	0.169	2021/8/03
Bottom Side	9400/1880	RMC12.2K	0.295	0.161	0.45	23.98	24.00	0.296	2021/8/03

NOTE: Hotspot SAR test results of WCDMA Band 2

10.1.4. SAR measurement Result of WCDMA Band 4

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	1413/1732.6	RMC12.2K	0.360	0.231	1.00	23.74	24.00	0.382	2021/8/12
Left Tilt 15 Degree	1413/1732.6	RMC12.2K	0.186	0.117	-3.56	23.74	24.00	0.197	2021/8/12
Right Cheek	1413/1732.6	RMC12.2K	0.322	0.207	-2.62	23.74	24.00	0.342	2021/8/12
Right Tilt 15 Degree	1413/1732.6	RMC12.2K	0.146	0.092	-0.67	23.74	24.00	0.155	2021/8/12

NOTE: Head SAR test results of WCDMA Band 4

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	1413/1732.6	RMC12.2K	0.456	0.247	3.43	23.74	24.00	0.484	2021/8/12
Back Side	1413/1732.6	RMC12.2K	0.729	0.415	-0.82	23.74	24.00	0.774	2021/8/12

NOTE: Body-Worn SAR test results of WCDMA Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	1413/1732.6	RMC12.2K	0.456	0.247	3.43	23.74	24.00	0.484	2021/8/12
Back Side	1413/1732.6	RMC12.2K	0.729	0.415	-0.82	23.74	24.00	0.774	2021/8/12
Left Side	1413/1732.6	RMC12.2K	0.219	0.121	1.11	23.74	24.00	0.233	2021/8/12
Right Side	1413/1732.6	RMC12.2K	0.228	0.123	-2.62	23.74	24.00	0.242	2021/8/12
Bottom Side	1413/1732.6	RMC12.2K	0.365	0.197	-1.70	23.74	24.00	0.388	2021/8/12

NOTE: Hotspot SAR test results of WCDMA Band 4

10.1.5. SAR measurement Result of WCDMA Band 5

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	4182/836.4	RMC12.2K	0.132	0.107	-1.33	23.47	24.00	0.149	2021/8/02
Left Tilt 15 Degree	4182/836.4	RMC12.2K	0.071	0.055	-2.78	23.47	24.00	0.080	2021/8/02
Right Cheek	4182/836.4	RMC12.2K	0.115	0.091	-0.04	23.47	24.00	0.130	2021/8/02
Right Tilt 15 Degree	4182/836.4	RMC12.2K	0.056	0.044	3.01	23.47	24.00	0.063	2021/8/02

NOTE: Head SAR test results of WCDMA Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	4182/836.4	RMC12.2K	0.234	0.138	-2.38	23.47	24.00	0.264	2021/8/02
Back Side	4182/836.4	RMC12.2K	0.384	0.227	0.09	23.47	24.00	0.434	2021/8/02

NOTE: Body-Worn SAR test results of WCDMA Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	4182/836.4	RMC12.2K	0.234	0.138	-2.38	23.47	24.00	0.264	2021/8/02

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									

Front Side	18900/1880	20M QPSK(1,49)	0.318	0.177	-0.48	23.51	24.00	0.356	2021/8/03
Back Side	18900/1880	20M QPSK(1,49)	0.500	0.281	-0.59	23.51	24.00	0.560	2021/8/03
50%RB									
Front Side	18900/1880	20M QPSK(50,49)	0.162	0.096	-3.77	22.40	23.00	0.186	2021/8/03
Back Side	18900/1880	20M QPSK(50,49)	0.265	0.141	-2.42	22.40	23.00	0.304	2021/8/03

NOTE: Body-Worn SAR test results of LTE Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	18900/1880	20M QPSK(1,49)	0.318	0.177	-0.48	23.51	24.00	0.356	2021/8/03
Back Side	18900/1880	20M QPSK(1,49)	0.500	0.281	-0.59	23.51	24.00	0.560	2021/8/03
Left Side	18900/1880	20M QPSK(1,49)	0.156	0.085	-3.15	23.51	24.00	0.175	2021/8/03
Right Side	18900/1880	20M QPSK(1,49)	0.156	0.084	1.75	23.51	24.00	0.175	2021/8/03
Bottom Side	18900/1880	20M QPSK(1,49)	0.265	0.146	-3.37	23.51	24.00	0.297	2021/8/03
50%RB									
Front Side	18900/1880	20M QPSK(50,49)	0.162	0.096	-3.77	22.40	23.00	0.186	2021/8/03
Back Side	18900/1880	20M QPSK(50,49)	0.265	0.141	-2.42	22.40	23.00	0.304	2021/8/03
Left Side	18900/1880	20M QPSK(50,49)	0.085	0.051	2.50	22.40	23.00	0.098	2021/8/03
Right Side	18900/1880	20M QPSK(50,49)	0.092	0.042	0.78	22.40	23.00	0.106	2021/8/03
Bottom Side	18900/1880	20M QPSK(50,49)	0.157	0.083	1.39	22.40	23.00	0.180	2021/8/03

NOTE: Hotspot SAR test results of LTE Band 2

10.1.7. SAR measurement Result of LTE Band 4

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	20175/1732.5	20M QPSK(1,49)	0.338	0.217	1.39	23.48	24.00	0.381	2021/8/12
Left Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.192	0.117	2.92	23.48	24.00	0.216	2021/8/12
Right Cheek	20175/1732.5	20M QPSK(1,49)	0.318	0.194	-3.00	23.48	24.00	0.358	2021/8/12
Right Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.166	0.103	-0.46	23.48	24.00	0.187	2021/8/12
50%RB									
Left Cheek	20175/1732.5	20M QPSK(50,49)	0.192	0.109	-0.65	22.38	22.50	0.197	2021/8/12
Left Tilt 15 Degree	20175/1732.5	20M QPSK(50,49)	0.112	0.062	-3.73	22.38	22.50	0.115	2021/8/12
Right Cheek	20175/1732.5	20M QPSK(50,49)	0.163	0.105	4.18	22.38	22.50	0.168	2021/8/12
Right Tilt 15 Degree	20175/1732.5	20M QPSK(50,49)	0.085	0.059	2.73	22.38	22.50	0.087	2021/8/12

NOTE: Head SAR test results of LTE Band 4

Test Position of Body-Wor n with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20175/1732.5	20M QPSK(1,49)	0.450	0.253	-0.39	23.48	24.00	0.507	2021/8/12
Back	20175/1732.5	20M	0.700	0.405	-0.69	23.48	24.00	0.789	2021/8/12

Side		QPSK(1,49)							
50%RB									
Front Side	20175/1732.5	20M QPSK(50,49)	0.266	0.144	2.70	22.38	22.50	0.273	2021/8/12
Back Side	20175/1732.5	20M QPSK(50,49)	0.409	0.231	2.64	22.38	22.50	0.420	2021/8/12

NOTE: Body-Worn SAR test results of LTE Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20175/1732.5	20M QPSK(1,49)	0.450	0.253	-0.39	23.48	24.00	0.507	2021/8/12
Back Side	20175/1732.5	20M QPSK(1,49)	0.700	0.405	-0.69	23.48	24.00	0.789	2021/8/12
Left Side	20175/1732.5	20M QPSK(1,49)	0.225	0.129	2.62	23.48	24.00	0.254	2021/8/12
Right Side	20175/1732.5	20M QPSK(1,49)	0.216	0.125	-0.15	23.48	24.00	0.243	2021/8/12
Bottom Side	20175/1732.5	20M QPSK(1,49)	0.360	0.206	3.80	23.48	24.00	0.406	2021/8/12
50%RB									
Front Side	20175/1732.5	20M QPSK(50,49)	0.266	0.144	2.70	22.38	22.50	0.273	2021/8/12
Back Side	20175/1732.5	20M QPSK(50,49)	0.409	0.231	2.64	22.38	22.50	0.420	2021/8/12
Left Side	20175/1732.5	20M QPSK(50,49)	0.130	0.077	4.00	22.38	22.50	0.134	2021/8/12
Right Side	20175/1732.5	20M QPSK(50,49)	0.121	0.067	4.22	22.38	22.50	0.124	2021/8/12
Bottom Side	20175/1732.5	20M QPSK(50,49)	0.212	0.123	3.45	22.38	22.50	0.218	2021/8/12

NOTE: Hotspot SAR test results of LTE Band 4

10.1.8. SAR measurement Result of LTE Band 5

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	20525/836.5	10M QPSK(1,24)	0.128	0.103	1.45	23.48	23.50	0.129	2021/8/02
Left Tilt 15 Degree	20525/836.5	10M QPSK(1,24)	0.072	0.058	-1.16	23.48	23.50	0.072	2021/8/02
Right Cheek	20525/836.5	10M QPSK(1,24)	0.115	0.090	2.71	23.48	23.50	0.116	2021/8/02
Right Tilt 15 Degree	20525/836.5	10M QPSK(1,24)	0.057	0.044	3.45	23.48	23.50	0.057	2021/8/02
50%RB									
Left Cheek	20525/836.5	10M QPSK(25,24)	0.068	0.060	0.81	22.32	22.50	0.071	2021/8/02
Left Tilt 15 Degree	20525/836.5	10M QPSK(25,24)	0.040	0.033	0.18	22.32	22.50	0.042	2021/8/02
Right Cheek	20525/836.5	10M QPSK(25,24)	0.065	0.053	3.00	22.32	22.50	0.068	2021/8/02
Right Tilt 15 Degree	20525/836.5	10M QPSK(25,24)	0.030	0.023	-0.15	22.32	22.50	0.031	2021/8/02

NOTE: Head SAR test results of LTE Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20525/836.5	10M QPSK(1,24)	0.258	0.148	2.16	23.48	23.50	0.259	2021/8/02
Back Side	20525/836.5	10M QPSK(1,24)	0.410	0.238	-0.19	23.48	23.50	0.412	2021/8/02
50%RB									
Front Side	20525/836.5	10M	0.140	0.077	0.99	22.32	22.50	0.146	2021/8/02

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									

Left Cheek	21100/2535	20M QPSK(1,49)	0.021	0.017	2.56	23.54	24.00	0.023	2021/8/06
Left Tilt 15 Degree	21100/2535	20M QPSK(1,49)	0.015	0.013	3.58	23.54	24.00	0.017	2021/8/06
Right Cheek	21100/2535	20M QPSK(1,49)	0.018	0.016	4.29	23.54	24.00	0.020	2021/8/06
Right Tilt 15 Degree	21100/2535	20M QPSK(1,49)	0.013	0.010	-3.98	23.54	24.00	0.014	2021/8/06
50%RB									
Left Cheek	21100/2535	20M QPSK(50,24)	0.020	0.015	-1.49	22.49	23.00	0.022	2021/8/06
Left Tilt 15 Degree	21100/2535	20M QPSK(50,24)	0.014	0.012	1.90	22.49	23.00	0.016	2021/8/06
Right Cheek	21100/2535	20M QPSK(50,24)	0.016	0.014	-0.20	22.49	23.00	0.018	2021/8/06
Right Tilt 15 Degree	21100/2535	20M QPSK(50,24)	0.011	0.010	-3.93	22.49	23.00	0.012	2021/8/06

NOTE: Head SAR test results of LTE Band 7

Test Position of Body-Worn with 10mm		Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
				1g	10g					
1RB										
Front Side	21100/2535	20M QPSK(1,49)	0.300	0.145	-1.82	23.54	24.00	0.334	2021/8/06	
Back Side	21100/2535	20M QPSK(1,49)	0.489	0.248	-1.33	23.54	24.00	0.544	2021/8/06	
50%RB										
Front Side	21100/2535	20M QPSK(50,24)	0.171	0.077	-3.05	22.49	23.00	0.192	2021/8/06	
Back Side	21100/2535	20M QPSK(50,24)	0.245	0.143	-3.74	22.49	23.00	0.276	2021/8/06	

NOTE: Body-Worn SAR test results of LTE Band 7

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	21100/2535	20M QPSK(1,49)	0.300	0.145	-1.82	23.54	24.00	0.334	2021/8/06
Back Side	21100/2535	20M QPSK(1,49)	0.489	0.248	-1.33	23.54	24.00	0.544	2021/8/06
Left Side	21100/2535	20M QPSK(1,49)	0.153	0.076	-2.33	23.54	24.00	0.170	2021/8/06
Right Side	21100/2535	20M QPSK(1,49)	0.147	0.072	1.96	23.54	24.00	0.163	2021/8/06
Bottom Side	21100/2535	20M QPSK(1,49)	0.255	0.127	-3.68	23.54	24.00	0.283	2021/8/06
50%RB									
Front Side	21100/2535	20M QPSK(50,24)	0.171	0.077	-3.05	22.49	23.00	0.192	2021/8/06
Back Side	21100/2535	20M QPSK(50,24)	0.245	0.143	-3.74	22.49	23.00	0.276	2021/8/06
Left Side	21100/2535	20M QPSK(50,24)	0.091	0.042	-0.83	22.49	23.00	0.102	2021/8/06
Right Side	21100/2535	20M QPSK(50,24)	0.085	0.038	-2.84	22.49	23.00	0.096	2021/8/06
Bottom Side	21100/2535	20M QPSK(50,24)	0.148	0.074	-4.85	22.49	23.00	0.166	2021/8/06

NOTE: Hotspot SAR test results of LTE Band 7

10.1.10. SAR measurement Result of LTE Band 12

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	23095/707.5	10M QPSK(1,24)	0.135	0.114	0.66	23.59	24.00	0.148	2021/8/09
Left Tilt 15	23095/707.5	10M QPSK(1,24)	0.080	0.066	4.63	23.59	24.00	0.088	2021/8/09

Degree									
Right Cheek	23095/707.5	10M QPSK(1,24)	0.119	0.097	-1.08	23.59	24.00	0.131	2021/8/09
Right Tilt 15 Degree	23095/707.5	10M QPSK(1,24)	0.056	0.045	-3.49	23.59	24.00	0.062	2021/8/09
50%RB									
Left Cheek	23095/707.5	10M QPSK(25,24)	0.068	0.063	3.75	22.34	23.00	0.079	2021/8/09
Left Tilt 15 Degree	23095/707.5	10M QPSK(25,24)	0.042	0.035	2.21	22.34	23.00	0.049	2021/8/09
Right Cheek	23095/707.5	10M QPSK(25,24)	0.067	0.057	3.88	22.34	23.00	0.078	2021/8/09
Right Tilt 15 Degree	23095/707.5	10M QPSK(25,24)	0.030	0.025	1.99	22.34	23.00	0.035	2021/8/09

NOTE: Head SAR test results of LTE Band 12

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23095/707.5	10M QPSK(1,24)	0.168	0.126	2.72	23.59	24.00	0.185	2021/8/09
Back Side	23095/707.5	10M QPSK(1,24)	0.245	0.194	0.46	23.59	24.00	0.269	2021/8/09
50%RB									
Front Side	23095/707.5	10M QPSK(25,24)	0.090	0.074	-1.02	22.34	23.00	0.105	2021/8/09
Back Side	23095/707.5	10M QPSK(25,24)	0.124	0.098	-2.85	22.34	23.00	0.144	2021/8/09

NOTE: Body-Worn SAR test results of LTE Band 12

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					

1RB									
Front Side	23095/707.5	10M QPSK(1,24)	0.168	0.126	2.72	23.59	24.00	0.185	2021/8/09
Back Side	23095/707.5	10M QPSK(1,24)	0.245	0.194	0.46	23.59	24.00	0.269	2021/8/09
Left Side	23095/707.5	10M QPSK(1,24)	0.078	0.061	0.84	23.59	24.00	0.086	2021/8/09
Right Side	23095/707.5	10M QPSK(1,24)	0.078	0.060	2.34	23.59	24.00	0.086	2021/8/09
Bottom Side	23095/707.5	10M QPSK(1,24)	0.135	0.106	-2.98	23.59	24.00	0.148	2021/8/09
50%RB									
Front Side	23095/707.5	10M QPSK(25,24)	0.090	0.074	-1.02	22.34	23.00	0.105	2021/8/09
Back Side	23095/707.5	10M QPSK(25,24)	0.124	0.098	-2.85	22.34	23.00	0.144	2021/8/09
Left Side	23095/707.5	10M QPSK(25,24)	0.041	0.037	-4.02	22.34	23.00	0.048	2021/8/09
Right Side	23095/707.5	10M QPSK(25,24)	0.042	0.033	1.42	22.34	23.00	0.049	2021/8/09
Bottom Side	23095/707.5	10M QPSK(25,24)	0.068	0.062	-0.32	22.34	23.00	0.079	2021/8/09

NOTE: Hotspot SAR test results of LTE Band 12

10.1.11. SAR measurement Result of LTE Band 17

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	23790/710	10M QPSK(1,24)	0.108	0.091	0.17	23.46	24.00	0.122	2021/8/09
Left Tilt 15 Degree	23790/710	10M QPSK(1,24)	0.063	0.051	5.24	23.46	24.00	0.071	2021/8/09
Right Cheek	23790/710	10M QPSK(1,24)	0.101	0.083	-3.46	23.46	24.00	0.114	2021/8/09
Right Tilt 15	23790/710	10M QPSK(1,24)	0.046	0.038	0.96	23.46	24.00	0.052	2021/8/09

Degree									
50%RB									
Left Cheek	23790/710	10M QPSK(25,12)	0.063	0.051	-1.86	22.42	22.50	0.064	2021/8/09
Left Tilt 15 Degree	23790/710	10M QPSK(25,12)	0.036	0.030	3.83	22.42	22.50	0.037	2021/8/09
Right Cheek	23790/710	10M QPSK(25,12)	0.054	0.044	4.29	22.42	22.50	0.055	2021/8/09
Right Tilt 15 Degree	23790/710	10M QPSK(25,12)	0.025	0.022	0.87	22.42	22.50	0.025	2021/8/09

NOTE: Head SAR test results of LTE Band17

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23790/710	10M QPSK(1,24)	0.132	0.103	-0.23	23.46	24.00	0.149	2021/8/09
Back Side	23790/710	10M QPSK(1,24)	0.180	0.144	0.66	23.46	24.00	0.204	2021/8/09
50%RB									
Front Side	23790/710	10M QPSK(25,12)	0.070	0.057	1.31	22.42	22.50	0.071	2021/8/09
Back Side	23790/710	10M QPSK(25,12)	0.100	0.085	-4.57	22.42	22.50	0.102	2021/8/09

NOTE: Body-Worn SAR test results of LTE Band 17

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	23790/710	10M QPSK(1,24)	0.132	0.103	-0.23	23.46	24.00	0.149	2021/8/09
Back Side	23790/710	10M QPSK(1,24)	0.180	0.144	0.66	23.46	24.00	0.204	2021/8/09

Left Side	23790/710	10M QPSK(1,24)	0.060	0.047	-0.08	23.46	24.00	0.068	2021/8/09
Right Side	23790/710	10M QPSK(1,24)	0.054	0.041	0.77	23.46	24.00	0.061	2021/8/09
Bottom Side	23790/710	10M QPSK(1,24)	0.090	0.071	-3.87	23.46	24.00	0.102	2021/8/09
50%RB									
Front Side	23790/710	10M QPSK(25,12)	0.070	0.057	1.31	22.42	22.50	0.071	2021/8/09
Back Side	23790/710	10M QPSK(25,12)	0.100	0.085	-4.57	22.42	22.50	0.102	2021/8/09
Left Side	23790/710	10M QPSK(25,12)	0.035	0.028	4.34	22.42	22.50	0.036	2021/8/09
Right Side	23790/710	10M QPSK(25,12)	0.029	0.024	3.91	22.42	22.50	0.030	2021/8/09
Bottom Side	23790/710	10M QPSK(25,12)	0.049	0.040	-1.55	22.42	22.50	0.050	2021/8/09

NOTE: Hotspot SAR test results of LTE Band 17

10.1.12. SAR measurement Result of LTE Band 66

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	132322/1745	20M QPSK(1,99)	0.314	0.199	2.73	23.18	24.00	0.379	2021/8/12
Left Tilt 15 Degree	132322/1745	20M QPSK(1,99)	0.186	0.116	0.65	23.18	24.00	0.225	2021/8/12
Right Cheek	132322/1745	20M QPSK(1,99)	0.270	0.171	4.76	23.18	24.00	0.326	2021/8/12
Right Tilt 15 Degree	132322/1745	20M QPSK(1,99)	0.125	0.076	3.53	23.18	24.00	0.151	2021/8/12
50%RB									
Left Cheek	132322/1745	20M QPSK(50,24)	0.174	0.109	4.52	22.30	22.50	0.182	2021/8/12
Left Tilt 15	132322/1745	20M QPSK(50,24)	0.109	0.063	-2.66	22.30	22.50	0.114	2021/8/12

Degree									
Right Cheek	132322/1745	20M QPSK(50,24)	0.153	0.090	-0.94	22.30	22.50	0.160	2021/8/12
Right Tilt 15 Degree	132322/1745	20M QPSK(50,24)	0.066	0.039	3.25	22.30	22.50	0.069	2021/8/12

NOTE: Head SAR test results of LTE Band66

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	132322/1745	20M QPSK(1,99)	0.390	0.217	0.02	23.18	24.00	0.471	2021/8/12
Back Side	132322/1745	20M QPSK(1,99)	0.640	0.371	-0.63	23.18	24.00	0.773	2021/8/12
50%RB									
Front Side	132322/1745	20M QPSK(50,24)	0.208	0.116	-4.85	22.30	22.50	0.218	2021/8/12
Back Side	132322/1745	20M QPSK(50,24)	0.361	0.209	-2.12	22.30	22.50	0.378	2021/8/12

NOTE: Body-Worn SAR test results of LTE Band 66

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	132322/1745	20M QPSK(1,99)	0.390	0.217	0.02	23.18	24.00	0.471	2021/8/12
Back Side	132322/1745	20M QPSK(1,99)	0.640	0.371	-0.63	23.18	24.00	0.773	2021/8/12
Left Side	132322/1745	20M QPSK(1,99)	0.198	0.109	2.26	23.18	24.00	0.239	2021/8/12
Right Side	132322/1745	20M QPSK(1,99)	0.207	0.120	1.14	23.18	24.00	0.250	2021/8/12
Bottom Side	132322/1745	20M QPSK(1,99)	0.325	0.187	-0.58	23.18	24.00	0.393	2021/8/12

50%RB									
Front Side	132322/1745	20M QPSK(50,24)	0.208	0.116	-4.85	22.30	22.50	0.218	2021/8/12
Back Side	132322/1745	20M QPSK(50,24)	0.361	0.209	-2.12	22.30	22.50	0.378	2021/8/12
Left Side	132322/1745	20M QPSK(50,24)	0.106	0.056	0.25	22.30	22.50	0.111	2021/8/12
Right Side	132322/1745	20M QPSK(50,24)	0.108	0.065	-2.40	22.30	22.50	0.113	2021/8/12
Bottom Side	132322/1745	20M QPSK(50,24)	0.194	0.110	2.57	22.30	22.50	0.203	2021/8/12

NOTE: Hotspot SAR test results of LTE Band 66

10.1.13. SAR measurement Result of WLAN 2.4G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	6/2437	802.11b	0.274	0.143	-1.82	13.35	13.50	0.284	2021/8/24
Left Tilt 15 Degree	6/2437	802.11b	0.146	0.074	-2.53	13.35	13.50	0.151	2021/8/24
Right Cheek	6/2437	802.11b	0.253	0.129	-3.76	13.35	13.50	0.262	2021/8/24
Right Tilt 15 Degree	6/2437	802.11b	0.124	0.063	4.56	13.35	13.50	0.128	2021/8/24

NOTE: Head SAR test results of WLAN 2.4G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	6/2437	802.11b	0.084	0.047	3.12	13.35	13.50	0.087	2021/8/24
Back Side	6/2437	802.11b	0.113	0.065	-2.01	13.35	13.50	0.117	2021/8/24

NOTE: Body-Worn SAR test results of WLAN 2.4G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	6/2437	802.11b	0.084	0.047	3.12	13.35	13.50	0.087	2021/8/24
Back Side	6/2437	802.11b	0.113	0.065	-2.01	13.35	13.50	0.117	2021/8/24
Right Side	6/2437	802.11b	0.048	0.027	-0.47	13.35	13.50	0.050	2021/8/24

Top Side	6/2437	802.11b	0.042	0.024	-2.86	13.35	13.50	0.043	2021/8/24
----------	--------	---------	-------	-------	-------	-------	-------	-------	-----------

NOTE: Hotspot SAR test results of WLAN 2.4G

10.1.14. SAR measurement Result of WLAN 5.2G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	40/5200	802.11a	0.368	0.137	1.46	12.00	12.00	0.368	2021/8/08
Left Tilt 15 Degree	40/5200	802.11a	0.218	0.077	1.97	12.00	12.00	0.218	2021/8/08
Right Cheek	40/5200	802.11a	0.327	0.119	1.23	12.00	12.00	0.327	2021/8/08
Right Tilt 15 Degree	40/5200	802.11a	0.172	0.063	-0.95	12.00	12.00	0.172	2021/8/08

NOTE: Head SAR test results of WLAN 5.2G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	40/5200	802.11a	0.114	0.067	2.22	12.00	12.00	0.114	2021/8/08
Back Side	40/5200	802.11a	0.152	0.093	-0.70	12.00	12.00	0.152	2021/8/08

NOTE: Body-Worn SAR test results of WLAN 5.2G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	40/5200	802.11a	0.114	0.067	2.22	12.00	12.00	0.114	2021/8/08
Back Side	40/5200	802.11a	0.152	0.093	-0.70	12.00	12.00	0.152	2021/8/08
Right Side	40/5200	802.11a	0.051	0.031	-1.16	12.00	12.00	0.051	2021/8/08
Top Side	40/5200	802.11a	0.051	0.031	-3.69	12.00	12.00	0.051	2021/8/08

NOTE: Hotspot SAR test results of WLAN 5.2G

10.1.15. SAR measurement Result of WLAN 5.3G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	56/5280	802.11a	0.564	0.189	-1.05	11.76	12.00	0.596	2021/8/08

Left Tilt 15 Degree	56/5280	802.11a	0.334	0.112	5.84	11.76	12.00	0.353	2021/8/08
Right Cheek	56/5280	802.11a	0.513	0.168	-1.52	11.76	12.00	0.542	2021/8/08
Right Tilt 15 Degree	56/5280	802.11a	0.281	0.092	1.47	11.76	12.00	0.297	2021/8/08

NOTE: Head SAR test results of WLAN 5.3G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	56/5280	802.11a	0.252	0.117	-1.13	11.76	12.00	0.266	2021/8/08
Back Side	56/5280	802.11a	0.377	0.179	0.18	11.76	12.00	0.398	2021/8/08

NOTE: Body-Worn SAR test results of WLAN 5.3G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	56/5280	802.11a	0.252	0.117	-1.13	11.76	12.00	0.266	2021/8/08
Back Side	56/5280	802.11a	0.377	0.179	0.18	11.76	12.00	0.398	2021/8/08
Right Side	56/5280	802.11a	0.126	0.059	0.74	11.76	12.00	0.133	2021/8/08
Top Side	56/5280	802.11a	0.117	0.054	-1.28	11.76	12.00	0.124	2021/8/08

NOTE: Hotspot SAR test results of WLAN 5.3G

10.1.16. SAR measurement Result of WLAN 5.6G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	120/5600	802.11a	0.436	0.201	-0.90	9.87	10.50	0.504	2021/8/19
Left Tilt 15 Degree	120/5600	802.11a	0.258	0.113	4.92	9.87	10.50	0.298	2021/8/19
Right Cheek	120/5600	802.11a	0.412	0.188	-2.58	9.87	10.50	0.476	2021/8/19
Right Tilt 15 Degree	120/5600	802.11a	0.188	0.086	3.32	9.87	10.50	0.217	2021/8/19

NOTE: Head SAR test results of WLAN 5.6G

Test Position of Body-Worn	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g	Date
			1g	10g					

with 10mm								(W/Kg)	
Front Side	120/5600	802.11a	0.228	0.104	2.15	9.87	10.50	0.264	2021/8/19
Back Side	120/5600	802.11a	0.369	0.169	-0.03	9.87	10.50	0.427	2021/8/19

NOTE: Body-Worn SAR test results of WLAN 5.6G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	120/5600	802.11a	0.228	0.104	2.15	9.87	10.50	0.264	2021/8/19
Back Side	120/5600	802.11a	0.369	0.169	-0.03	9.87	10.50	0.427	2021/8/19
Right Side	120/5600	802.11a	0.123	0.054	2.68	9.87	10.50	0.142	2021/8/19
Top Side	120/5600	802.11a	0.120	0.054	0.25	9.87	10.50	0.139	2021/8/19

NOTE: Hotspot SAR test results of WLAN 5.6G

10.1.17. SAR measurement Result of WLAN 5.8G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	157/5785	802.11a	0.410	0.175	-1.15	7.89	8.50	0.472	2021/8/28
Left Tilt 15 Degree	157/5785	802.11a	0.241	0.099	-2.97	7.89	8.50	0.277	2021/8/28
Right Cheek	157/5785	802.11a	0.376	0.159	-1.46	7.89	8.50	0.433	2021/8/28
Right Tilt 15 Degree	157/5785	802.11a	0.182	0.075	3.18	7.89	8.50	0.209	2021/8/28

NOTE: Head SAR test results of WLAN 5.8G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	157/5785	802.11a	0.210	0.101	2.30	7.89	8.50	0.242	2021/8/28
Back Side	157/5785	802.11a	0.304	0.150	-2.81	7.89	8.50	0.350	2021/8/28

NOTE: Body-Worn SAR test results of WLAN 5.8G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	157/5785	802.11a	0.210	0.101	2.30	7.89	8.50	0.242	2021/8/28

Back Side	157/5785	802.11a	0.304	0.150	-2.81	7.89	8.50	0.350	2021/8/28
Right Side	157/5785	802.11a	0.099	0.048	-3.35	7.89	8.50	0.114	2021/8/28
Top Side	157/5785	802.11a	0.093	0.045	0.31	7.89	8.50	0.107	2021/8/28

NOTE: Hotspot SAR test results of WLAN 5.8G

10.2. SAR Summation Scenario

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- Scalar SAR summation $< 1.6\text{W/kg}$.
- $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR _{MAX}		$\Sigma 1\text{-g SAR}$ (W/Kg)	SPLSR	Remark
		WWAN	DTS			
Head	Left Cheek	0.423	0.284	0.707	N/A	N/A
	Left Tilt 15 Degree	0.253	0.151	0.404	N/A	N/A
	Right Cheek	0.367	0.262	0.629	N/A	N/A
	Right Tilt 15 Degree	0.195	0.128	0.323	N/A	N/A
Body-Worn	Front Side	0.507	0.087	0.594	N/A	N/A
	Back Side	0.789	0.117	0.906	N/A	N/A
Hotspot	Front Side	0.507	0.087	0.594	N/A	N/A
	Back Side	0.789	0.117	0.906	N/A	N/A
	Left Side	0.254	N/A	0.254	N/A	N/A
	Right Side	0.250	0.05	0.300	N/A	N/A
	Top Side	N/A	0.043	0.043	N/A	N/A
	Bottom Side	0.406	N/A	0.406	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WWAN and DTS.

Test Position		Scaled SAR _{MAX}		$\Sigma 1\text{-g SAR}$ (W/Kg)	SPLSR	Remark
		WWAN	NII			
Head	Left Cheek	0.423	0.596	1.019	N/A	N/A
	Left Tilt 15 Degree	0.253	0.353	0.606	N/A	N/A

	Right Cheek	0.367	0.542	0.909	N/A	N/A
	Right Tilt 15 Degree	0.195	0.297	0.492	N/A	N/A
Body-Worn	Front Side	0.507	0.266	0.773	N/A	N/A
	Back Side	0.789	0.427	1.216	N/A	N/A
Hotspot	Front Side	0.507	0.266	0.773	N/A	N/A
	Back Side	0.789	0.427	1.216	N/A	N/A
	Left Side	0.254	N/A	0.254	N/A	N/A
	Right Side	0.250	0.142	0.392	N/A	N/A
	Top Side	N/A	0.139	0.139	N/A	N/A
	Bottom Side	0.406	N/A	0.406	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WWAN and NII.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DSS			
Head	Left Cheek	0.423	0.196	0.619	N/A	N/A
	Left Tilt 15 Degree	0.253	0.196	0.449	N/A	N/A
	Right Cheek	0.367	0.196	0.563	N/A	N/A
	Right Tilt 15 Degree	0.195	0.196	0.391	N/A	N/A
Body-Worn	Front Side	0.507	0.098	0.605	N/A	N/A
	Back Side	0.789	0.098	0.887	N/A	N/A
Hotspot	Front Side	0.507	0.098	0.605	N/A	N/A
	Back Side	0.789	0.098	0.887	N/A	N/A
	Left Side	0.254	N/A	0.254	N/A	N/A
	Right Side	0.250	0.098	0.348	N/A	N/A
	Top Side	N/A	0.098	0.098	N/A	N/A
	Bottom Side	0.406	N/A	0.406	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WWAN and DSS.

11. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

12. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - 750MHz
MEASUREMENT 2 System Performance Check - 835MHz
MEASUREMENT 3 System Performance Check - 1800MHz
MEASUREMENT 4 System Performance Check - 1900MHz
MEASUREMENT 5 System Performance Check - 2450MHz
MEASUREMENT 6 System Performance Check - 2600MHz
MEASUREMENT 7 System Performance Check - 5200MHz
MEASUREMENT 8 System Performance Check - 5600MHz
MEASUREMENT 9 System Performance Check - 5800MHz

MEASUREMENT 1

Date of measurement: 9/8/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW750</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative permittivity (real part)	41.471256
Relative permittivity (imaginary part)	21.359836
Conductivity (S/m)	0.889993
Variation (%)	-3.810000

SURFACE SAR

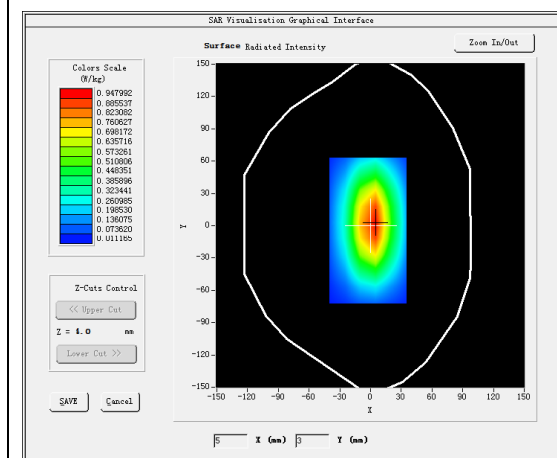



VOLUME SAR

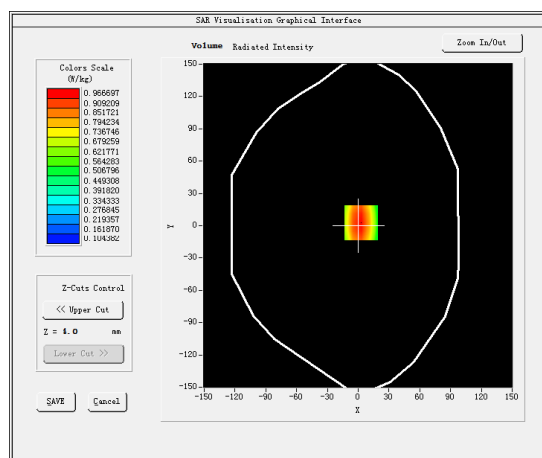

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.570218
SAR 1g (W/Kg)	0.905362

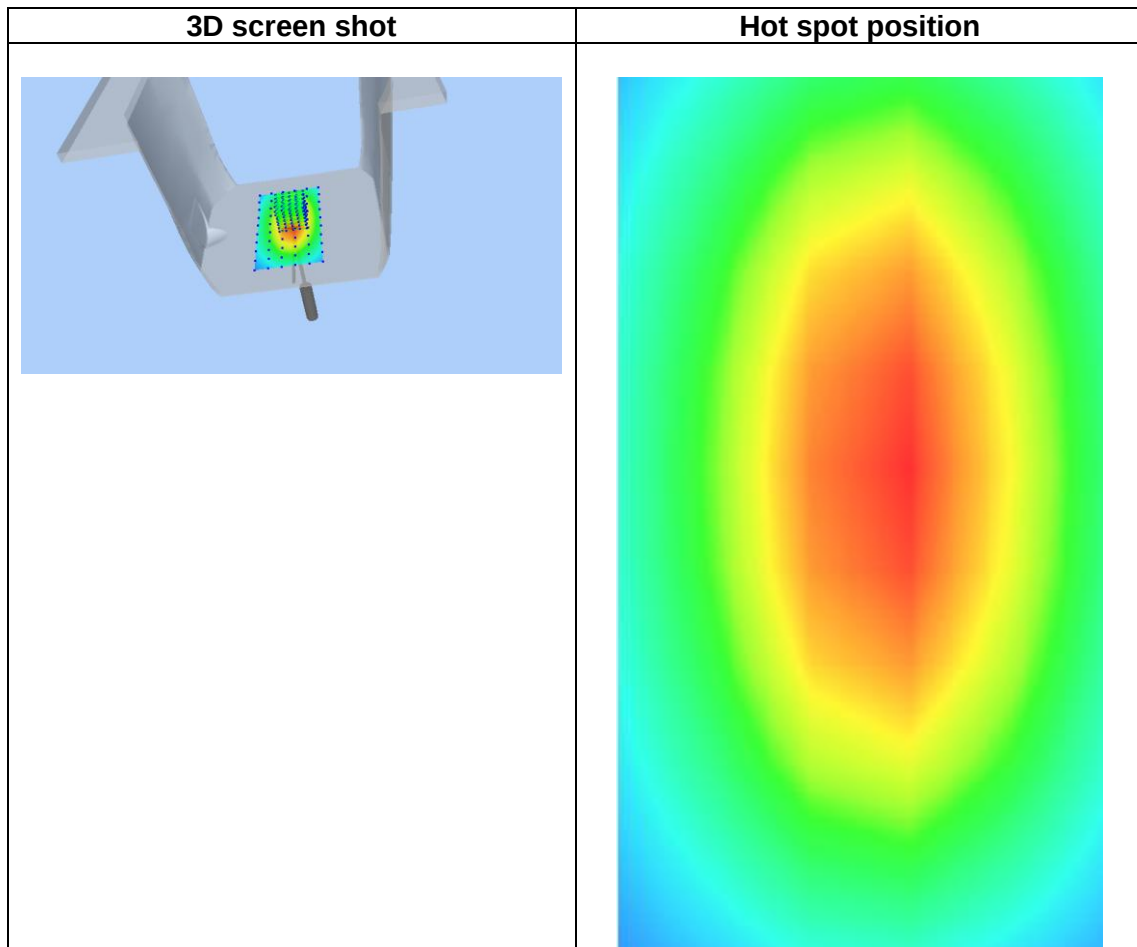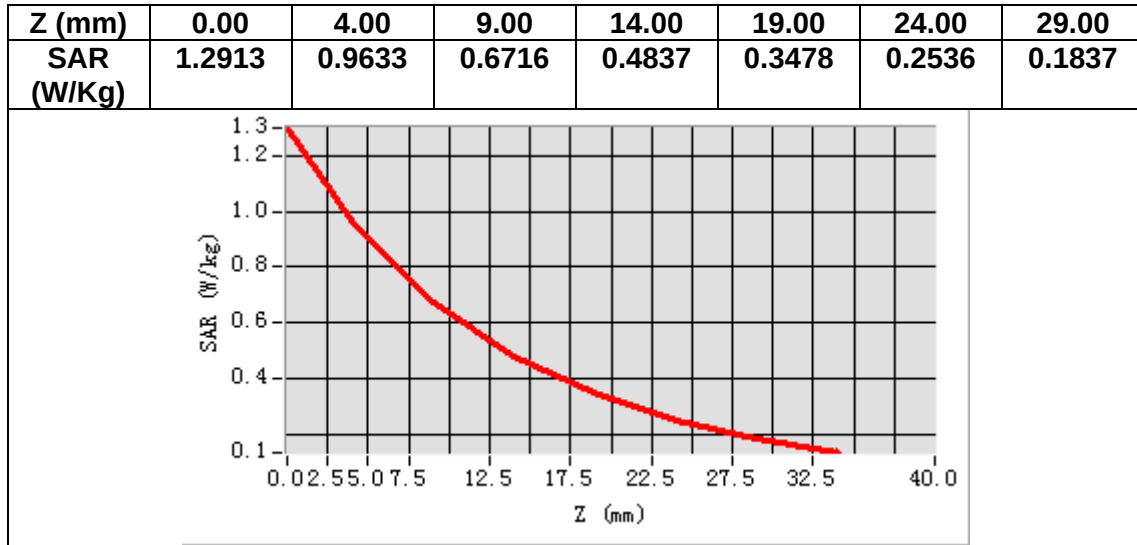

MEASUREMENT 2


Date of measurement: 2/8/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	835.000000
Relative permittivity (real part)	42.677765
Relative permittivity (imaginary part)	19.718125
Conductivity (S/m)	0.914702
Variation (%)	1.870000

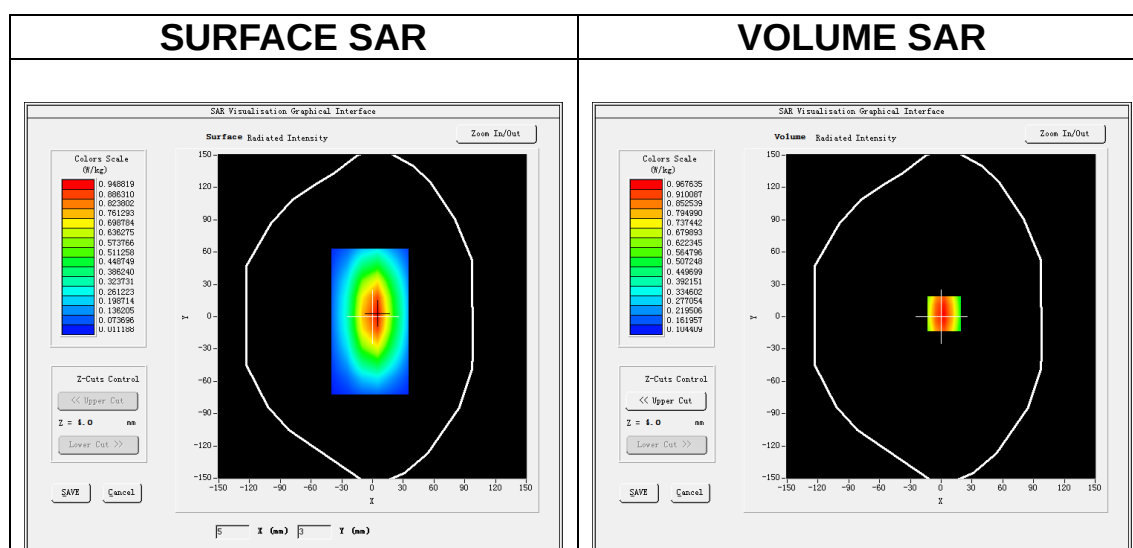

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.613255
SAR 1g (W/Kg)	0.968035

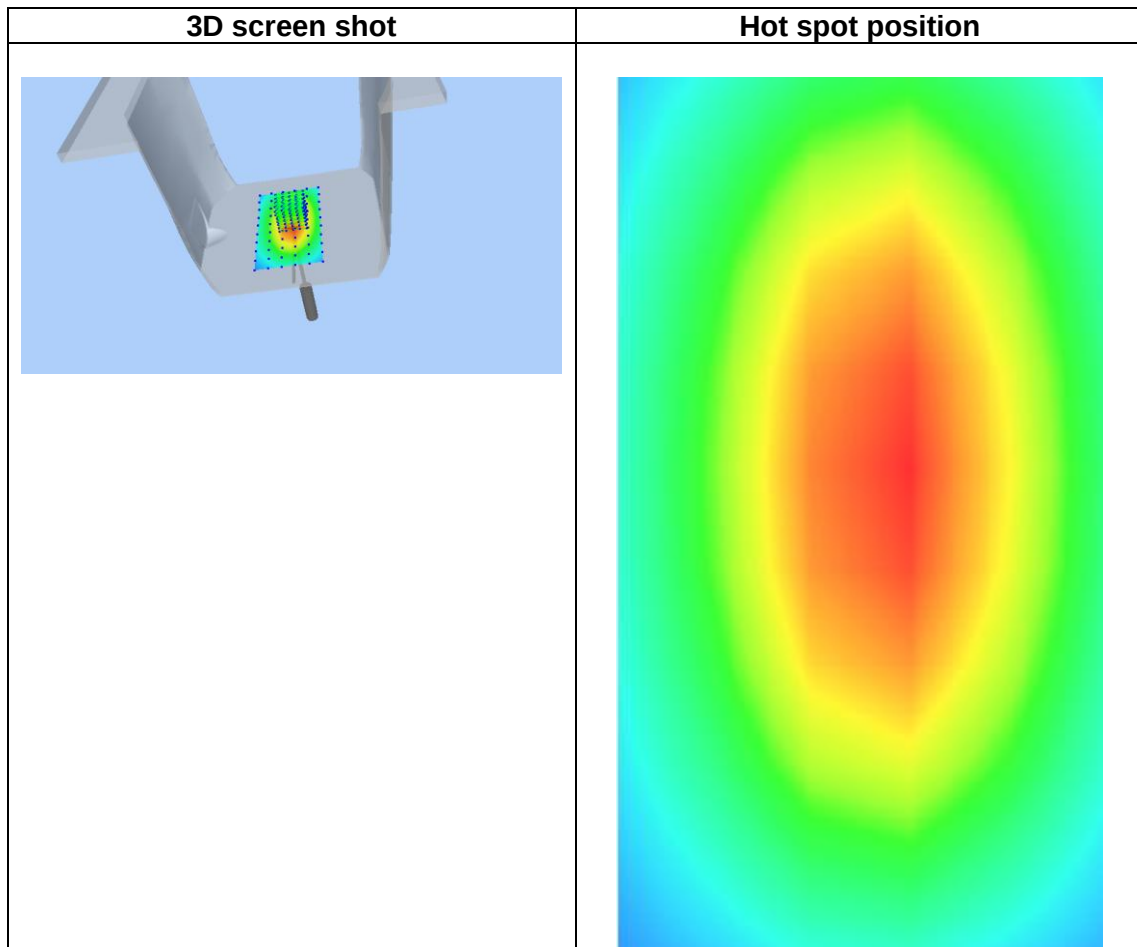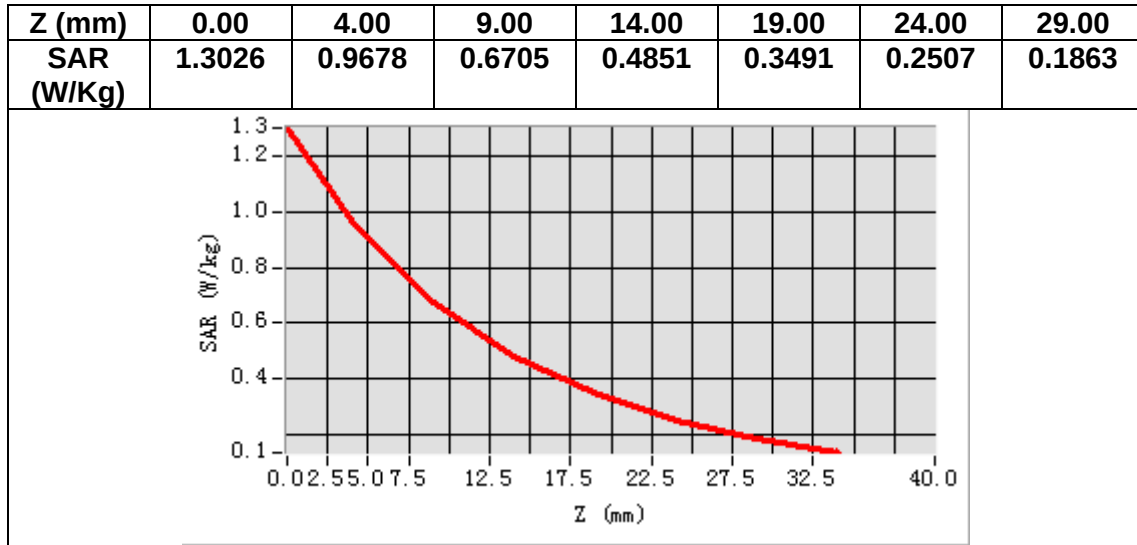

MEASUREMENT 3

Date of measurement: 12/8/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative permittivity (real part)	39.606403
Relative permittivity (imaginary part)	13.724688
Conductivity (S/m)	1.372469
Variation (%)	-2.11000

SURFACE SAR

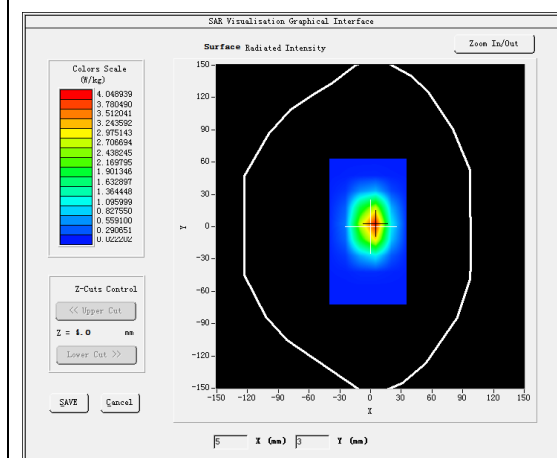


VOLUME SAR

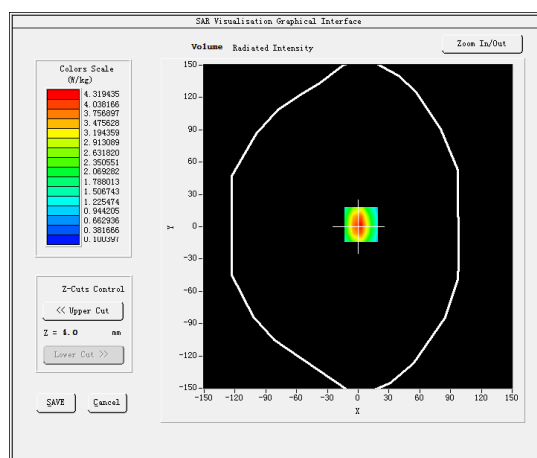


Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg


SAR 10g (W/Kg)	2.017385
SAR 1g (W/Kg)	3.851220

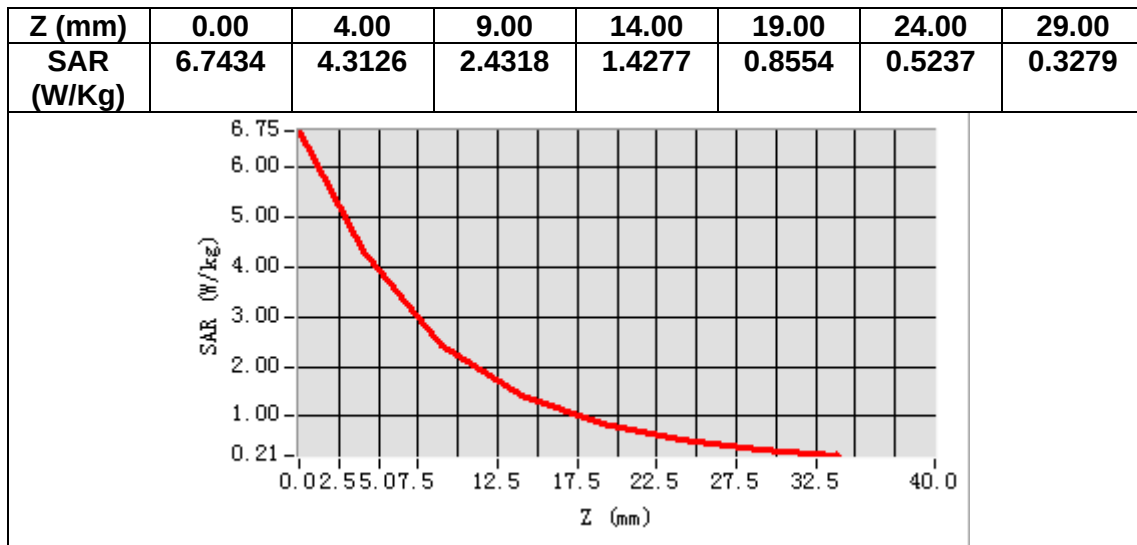

3D screen shot

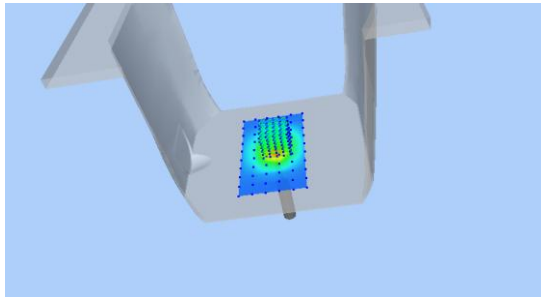

Hot spot position

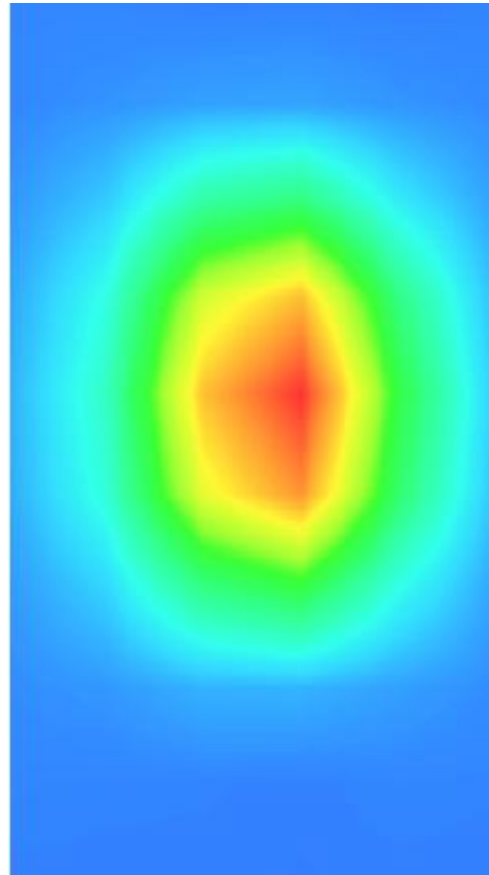

MEASUREMENT 4

Date of measurement: 3/8/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	38.081140
Relative permittivity (imaginary part)	13.606432
Conductivity (S/m)	1.436234
Variation (%)	-1.430000

SURFACE SAR

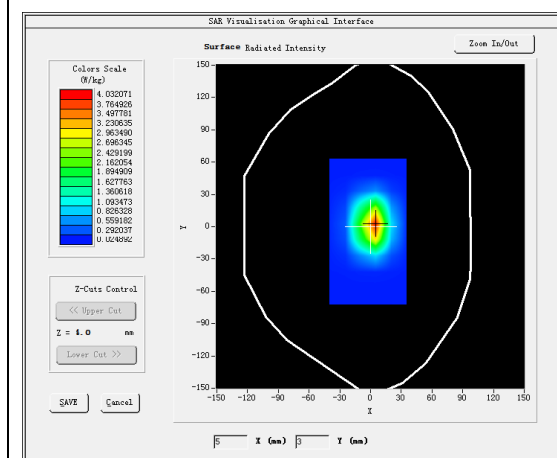



VOLUME SAR

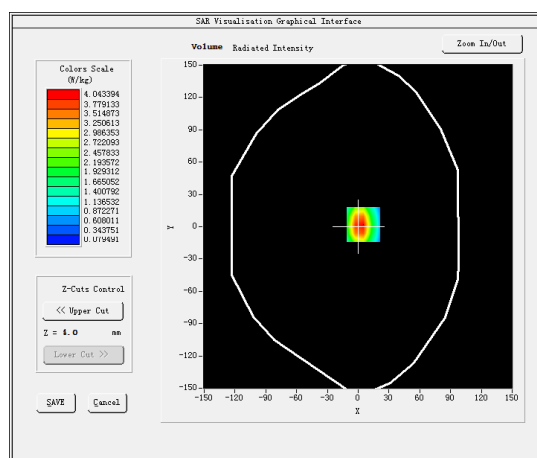

Maximum location: X=5.00, Y=2.00

SAR Peak: 6.70 W/kg

SAR 10g (W/Kg)	2.104336
SAR 1g (W/Kg)	3.918054

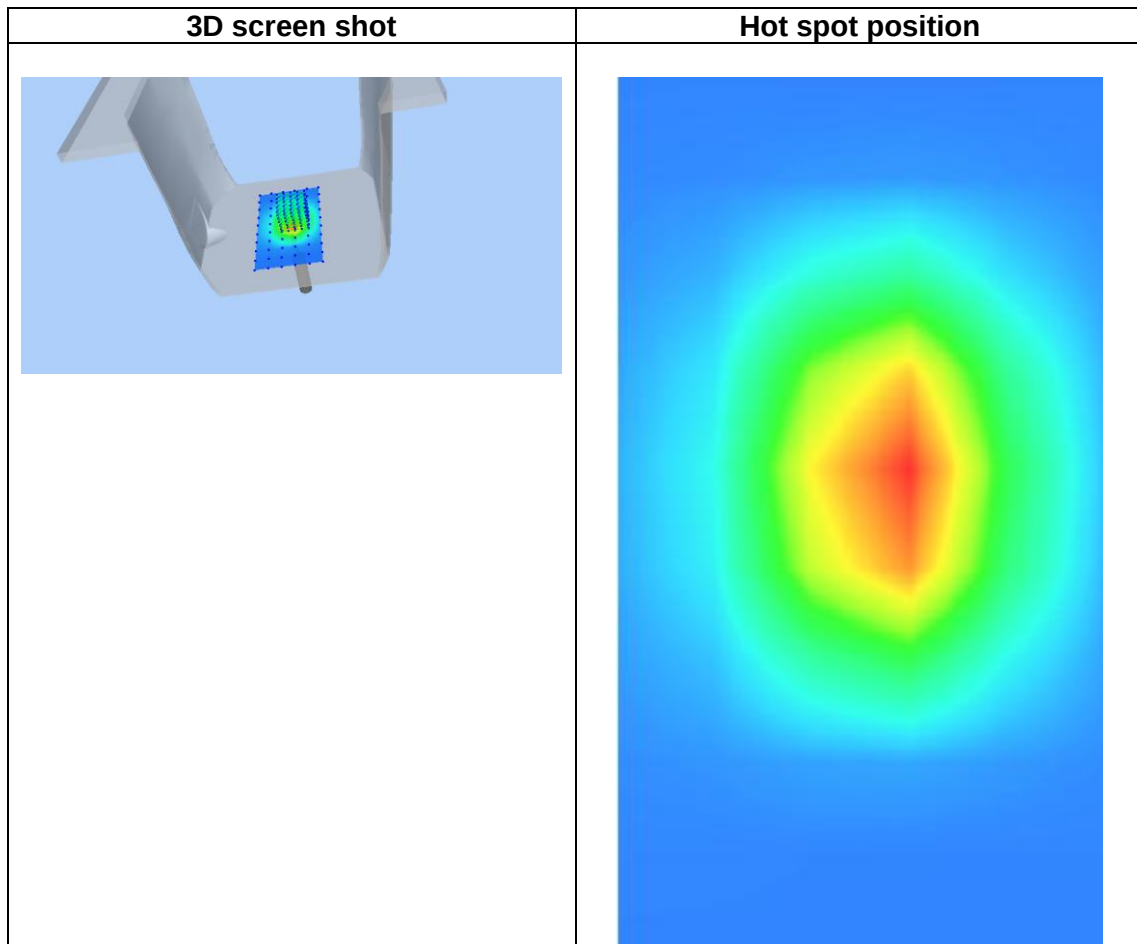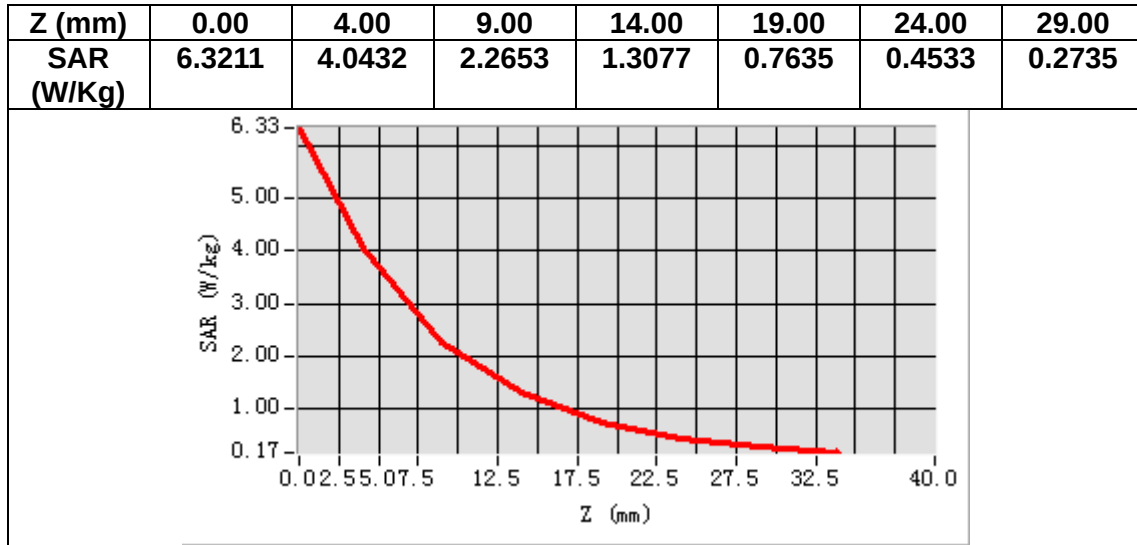

MEASUREMENT 5

Date of measurement: 24/8/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	40.708511
Relative permittivity (imaginary part)	13.528417
Conductivity (S/m)	1.841368
Variation (%)	-3.350000

SURFACE SAR

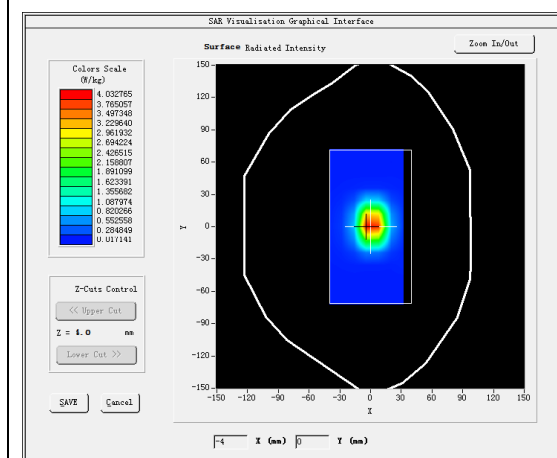



VOLUME SAR

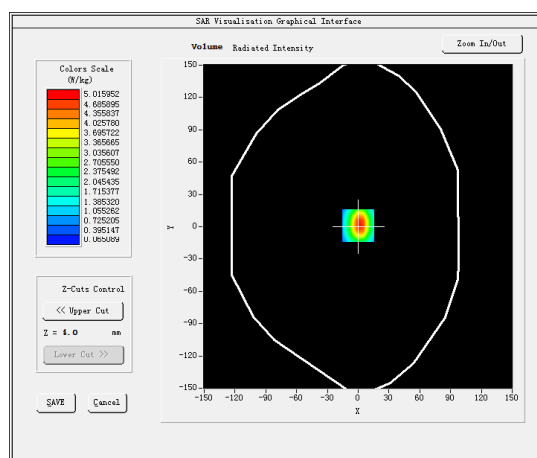

Maximum location: X=0.00, Y=1.00

SAR Peak: 8.14 W/kg

SAR 10g (W/Kg)	2.442375
SAR 1g (W/Kg)	5.451435

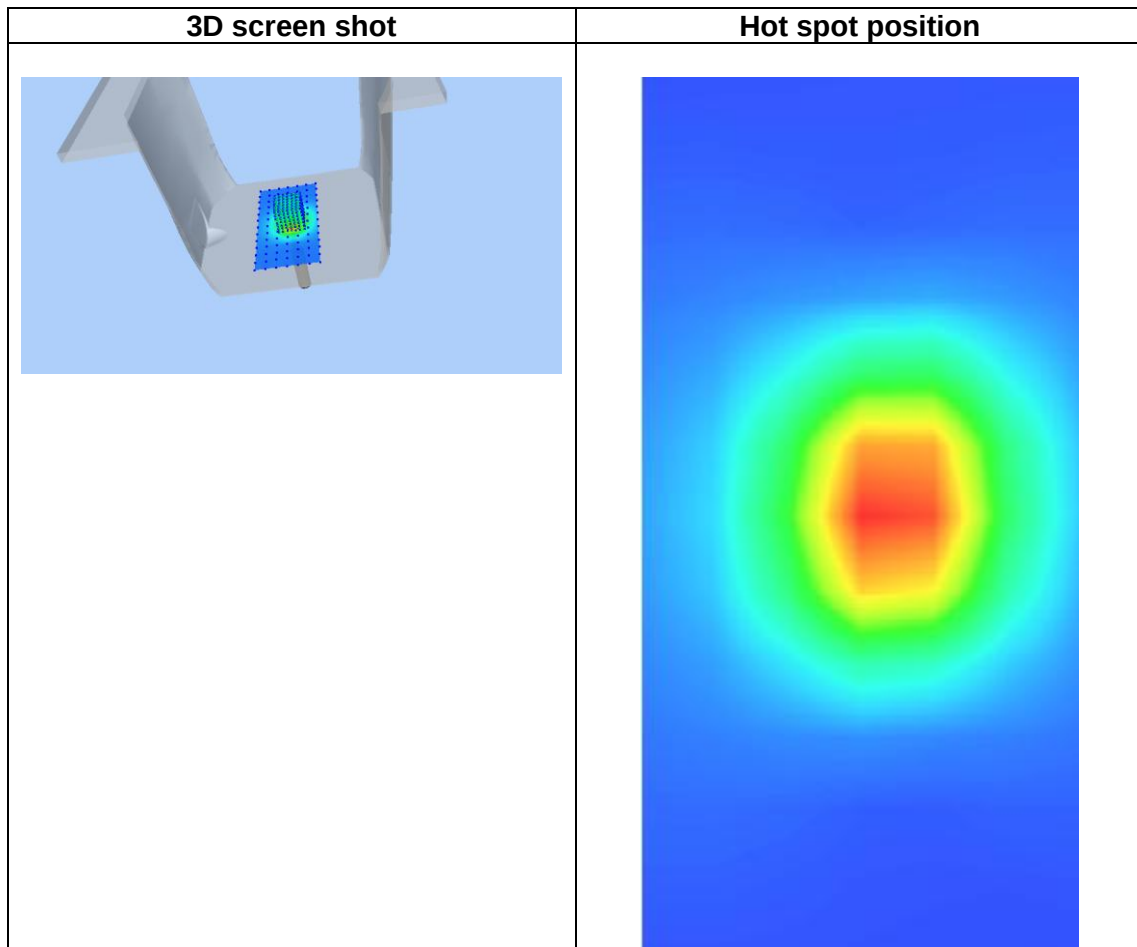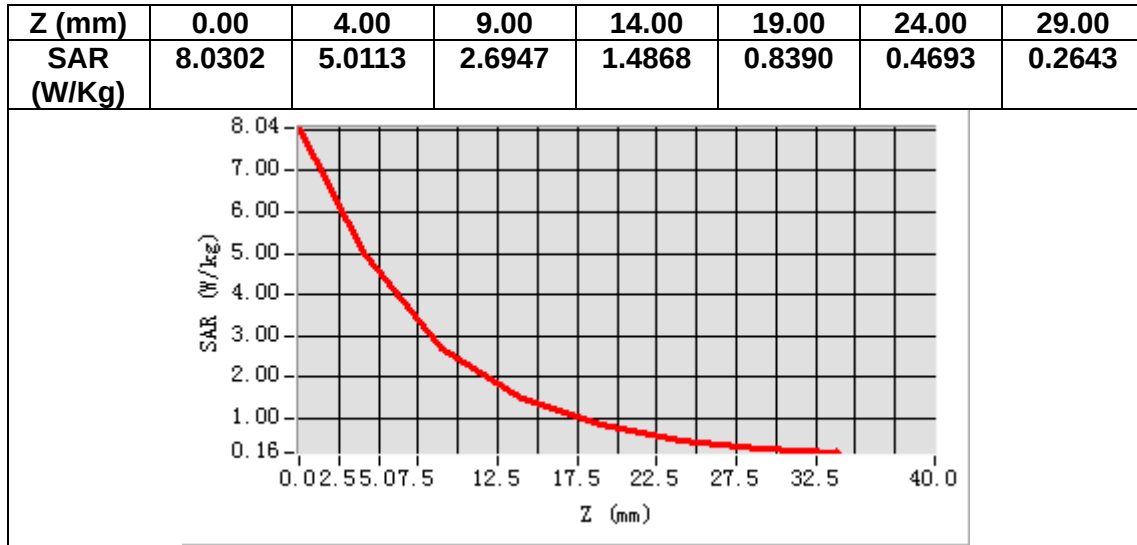

MEASUREMENT 6

Date of measurement: 6/8/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative permittivity (real part)	39.864513
Relative permittivity (imaginary part)	13.915151
Conductivity (S/m)	2.009966
Variation (%)	-0.040000

SURFACE SAR

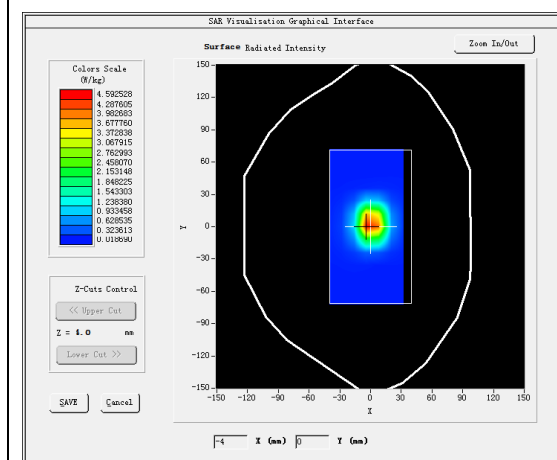


VOLUME SAR

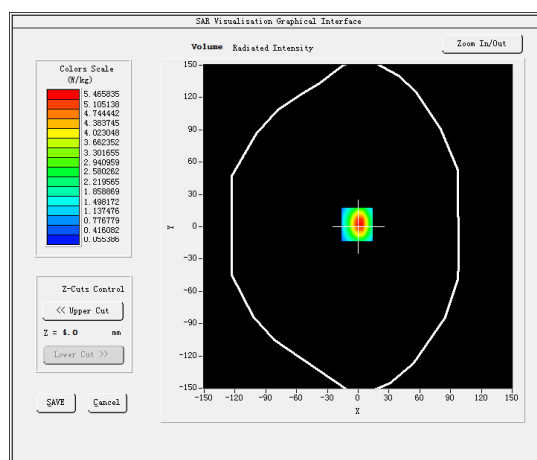


Maximum location: X=-1.00, Y=2.00

SAR Peak: 9.07 W/kg


SAR 10g (W/Kg)	2.508009
SAR 1g (W/Kg)	5.506123

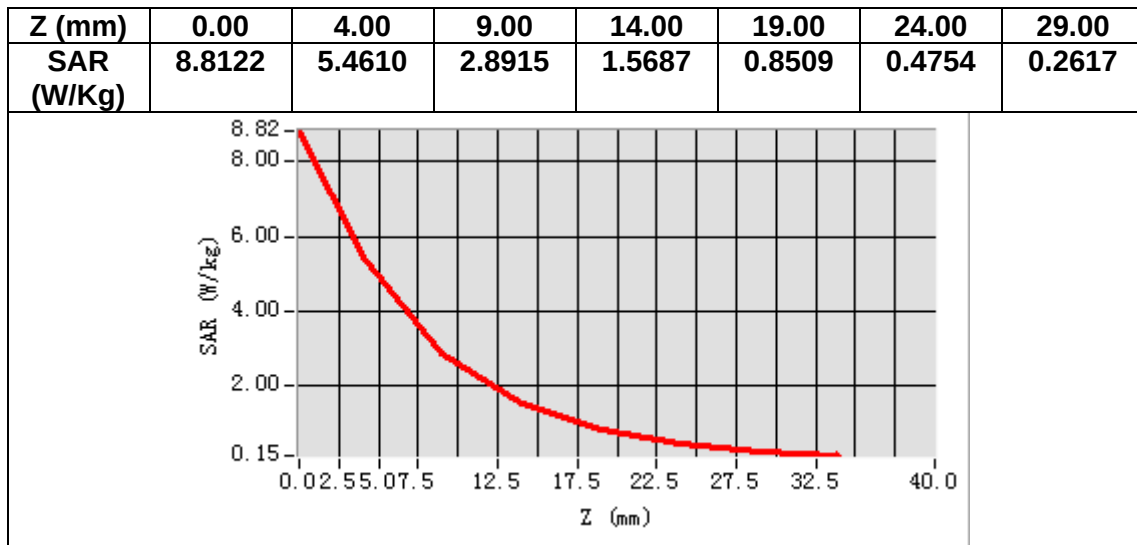

3D screen shot

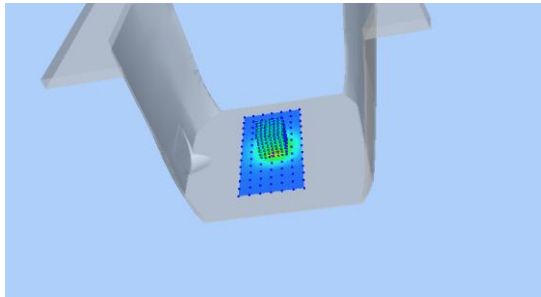

Hot spot position

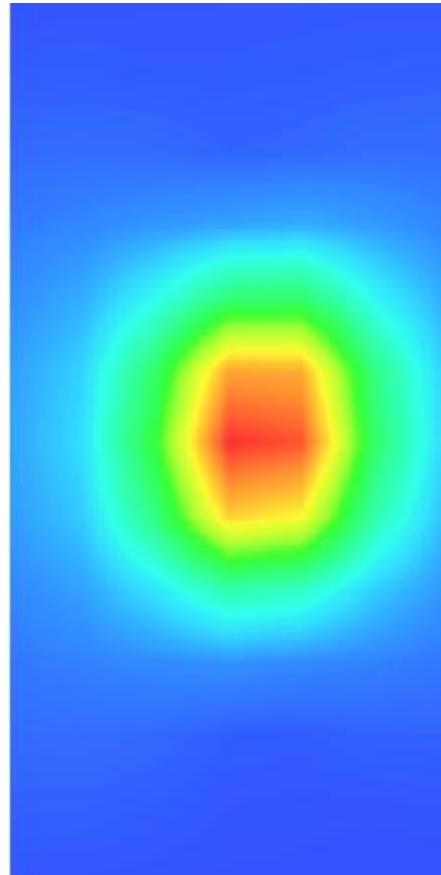

MEASUREMENT 7


Date of measurement: 8/8/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	36.901843
Relative permittivity (imaginary part)	16.598326
Conductivity (S/m)	4.795072
Variation (%)	1.660000

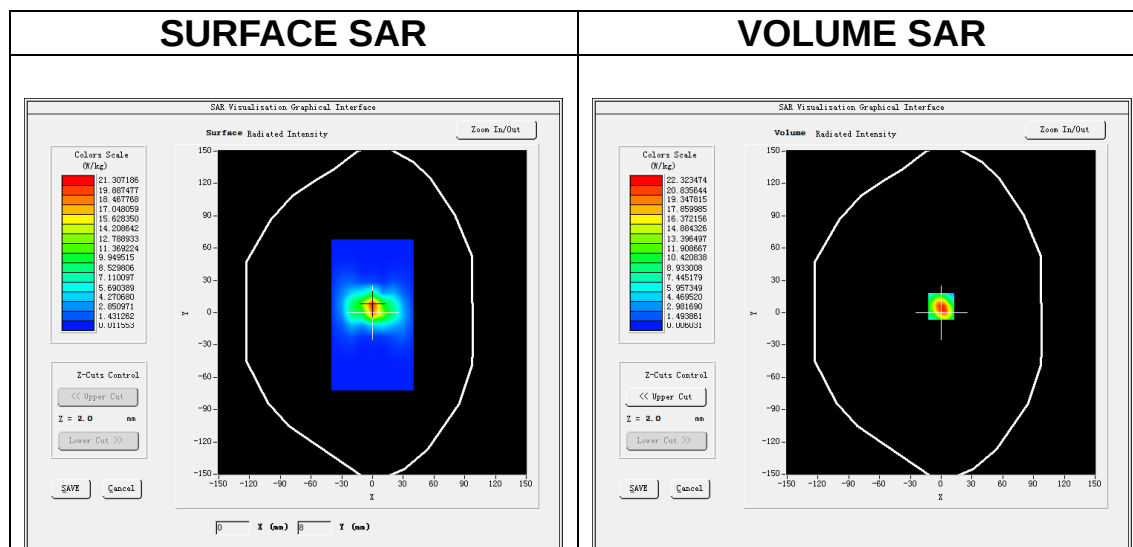


Maximum location: X=0.00, Y=6.00


SAR Peak: 40.06 W/kg

SAR 10g (W/Kg)	5.634221
SAR 1g (W/Kg)	17.253165


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SAR (W/ Kg)	37.8 356	22.3 278	11.3 730	5.66 18	2.82 55	1.40 93	0.71 24	0.36 60	0.18 08	0.10 12	0.05 13	0.03 23

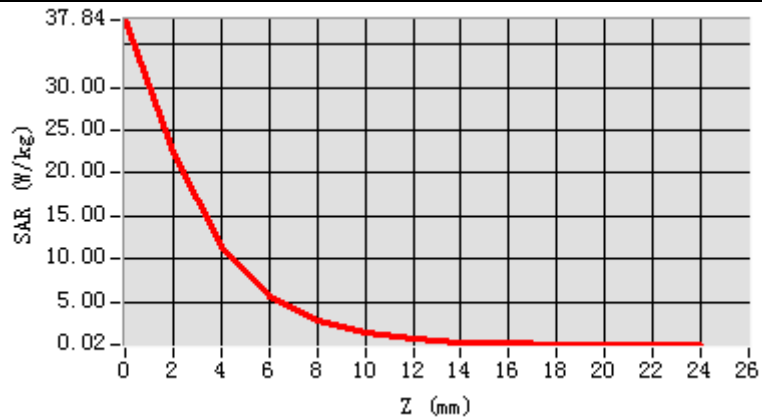

3D screen shot

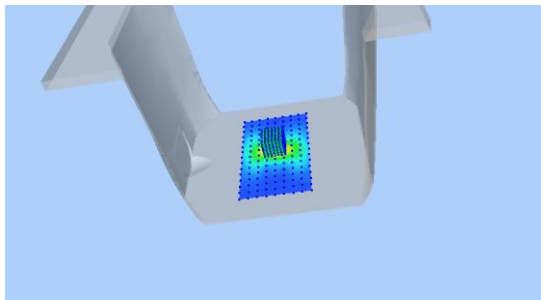

Hot spot position

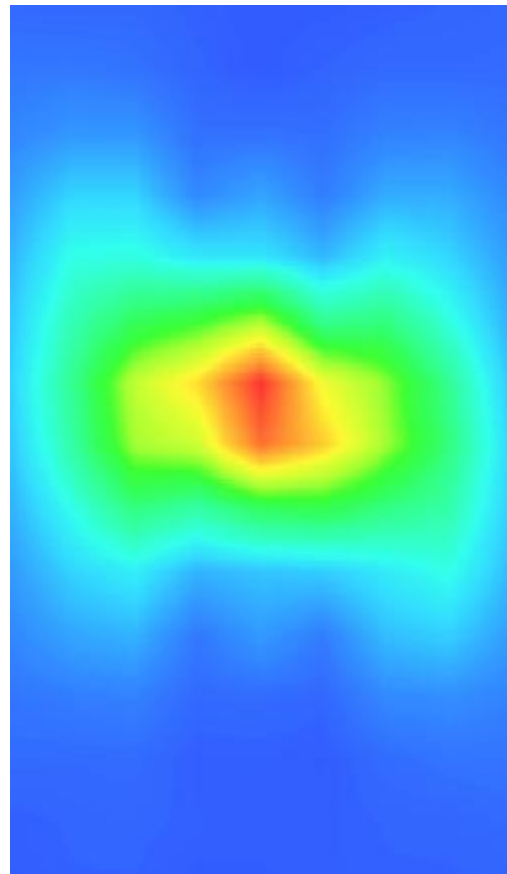

MEASUREMENT 8


Date of measurement: 19/8/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5600.000000
Relative permittivity (real part)	36.660832
Relative permittivity (imaginary part)	16.037251
Conductivity (S/m)	4.989367
Variation (%)	0.134270

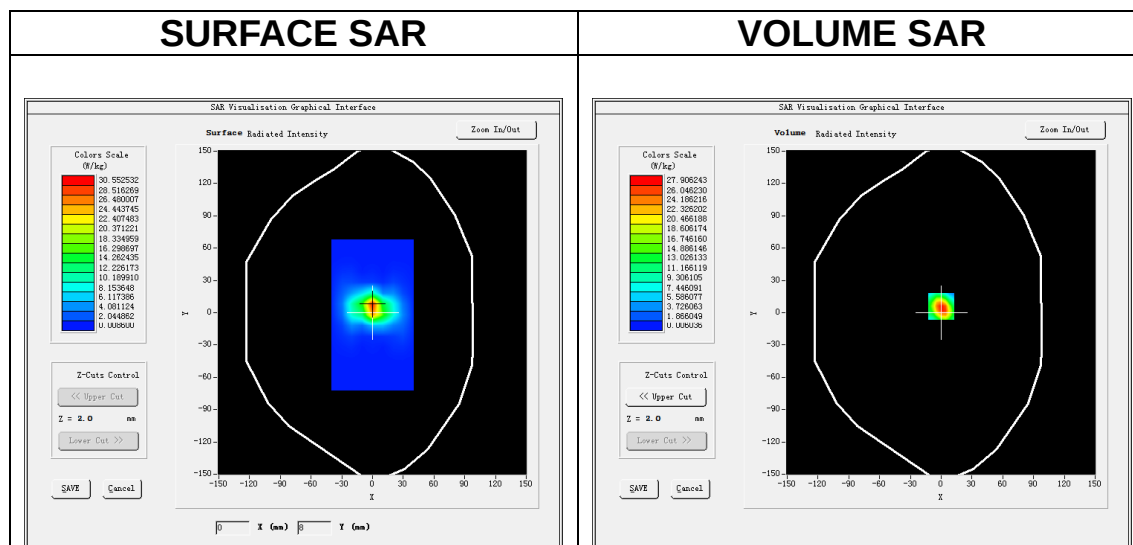


Maximum location: X=0.00, Y=6.00


SAR Peak: 51.23 W/kg

SAR 10g (W/Kg)	5.748051
SAR 1g (W/Kg)	17.855450


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SAR (W/ Kg)	54.1 388	31.9 062	16.3 510	8.17 83	4.08 24	3.81 66	1.03 45	0.46 87	0.27 29	0.13 26	0.07 55	0.05 02

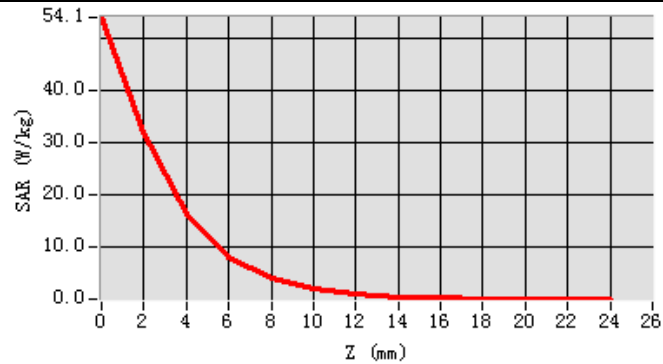

3D screen shot

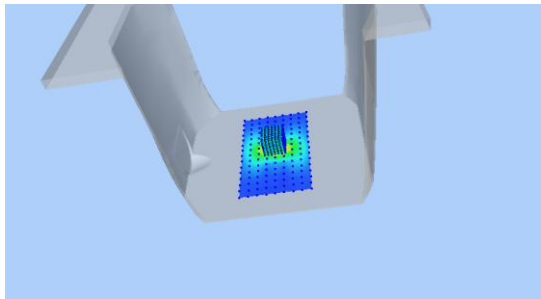

Hot spot position

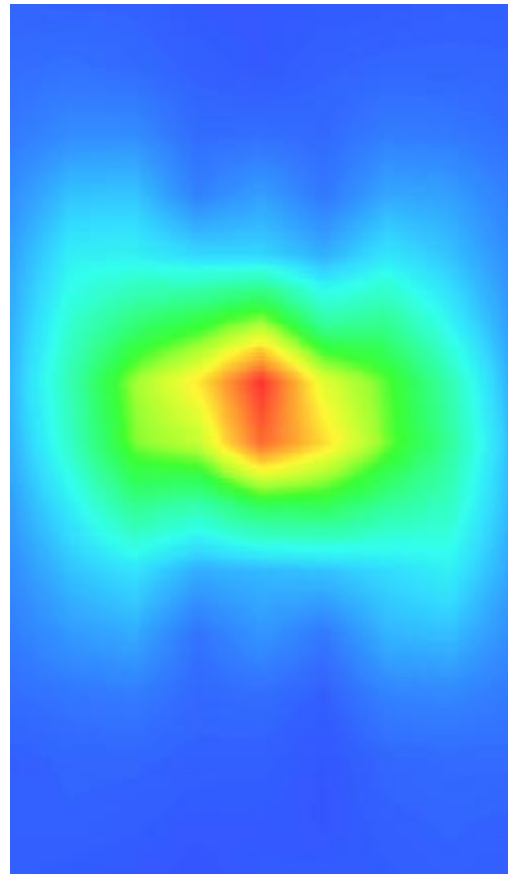

MEASUREMENT 9

Date of measurement: 28/8/2020


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5800.000000
Relative permittivity (real part)	36.223982
Relative permittivity (imaginary part)	16.181454
Conductivity (S/m)	5.214024
Variation (%)	-1.880000

SURFACE SAR

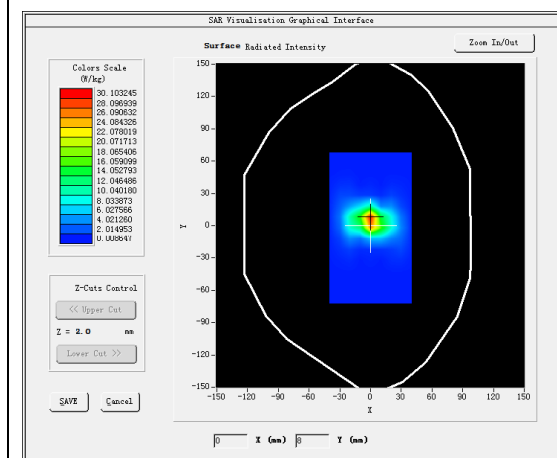

VOLUME SAR

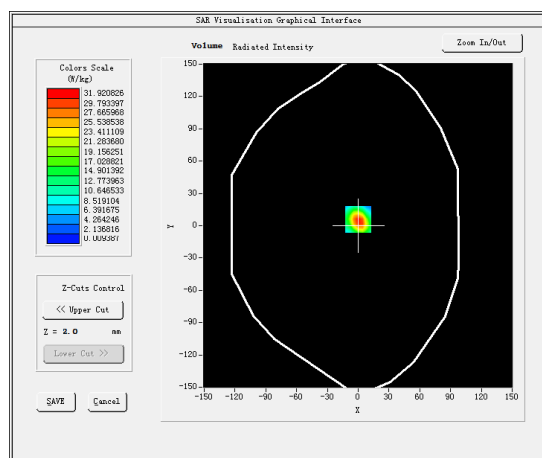


Maximum location: X=0.00, Y=6.00


SAR Peak: 57.37 W/kg

SAR 10g (W/Kg)	6.454095
SAR 1g (W/Kg)	18.786093


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SAR (W/ Kg)	54.0 311	31.9 215	16.1 720	8.17 01	4.08 84	2.05 12	1.03 08	0.51 81	0.27 50	0.15 53	0.07 40	0.04 39

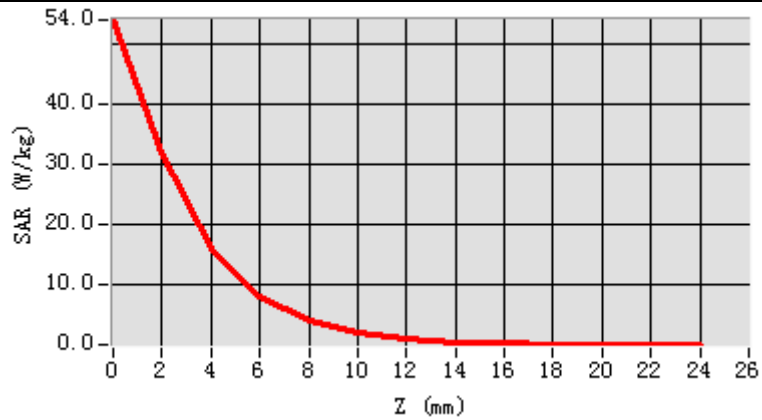

3D screen shot

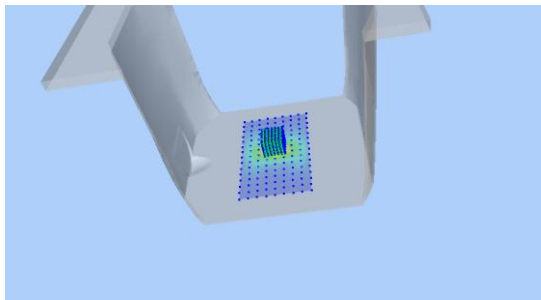

Hot spot position

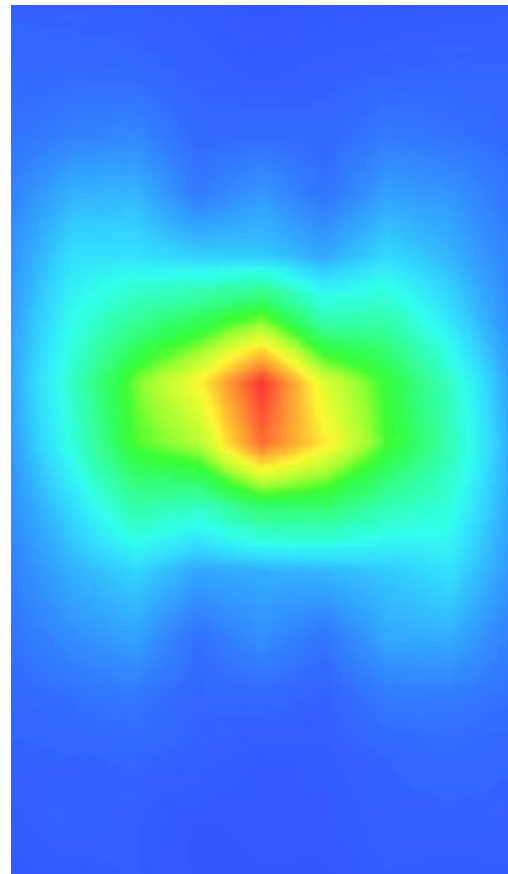

13. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1 GSM 850 Head
MEASUREMENT 2 GSM 850 Body
MEASUREMENT 3 GSM 1900 Head
MEASUREMENT 4 GSM 1900 Body
MEASUREMENT 5 WCDMA Band 2 Head
MEASUREMENT 6 WCDMA Band 2 Body
MEASUREMENT 7 WCDMA Band 4 Head
MEASUREMENT 8 WCDMA Band 4 Body
MEASUREMENT 9 WCDMA Band 5 Head
MEASUREMENT 10 WCDMA Band 5 Body
MEASUREMENT 11 WLAN 5.2G Head
MEASUREMENT 12 WLAN 5.2G Body
MEASUREMENT 13 WLAN 5.3G Head
MEASUREMENT 14 WLAN 5.3G Body
MEASUREMENT 15 WLAN 5.6G Head
MEASUREMENT 16 WLAN 5.6G Body
MEASUREMENT 17 WLAN 5.8G Head
MEASUREMENT 18 WLAN 5.8G Body
MEASUREMENT 19 WLAN 2.4G Head
MEASUREMENT 20 WLAN 2.4G Body
MEASUREMENT 21 LTE Band 2 Head
MEASUREMENT 22 LTE Band 2 Body
MEASUREMENT 23 LTE Band 4 Head
MEASUREMENT 24 LTE Band 4 Body
MEASUREMENT 25 LTE Band 5 Head
MEASUREMENT 26 LTE Band 5 Body
MEASUREMENT 27 LTE Band 7 Head
MEASUREMENT 28 LTE Band 7 Body
MEASUREMENT 29 LTE Band 12 Head
MEASUREMENT 30 LTE Band 12 Body
MEASUREMENT 31 LTE Band 17 Head
MEASUREMENT 32 LTE Band 17 Body
MEASUREMENT 33 LTE Band 66 Head
MEASUREMENT 34 LTE Band 66 Body

MEASUREMENT 1


Date of measurement: 2/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>

B. SAR Measurement Results



Frequency (MHz)	836.400000
Relative permittivity (real part)	42.593426
Relative permittivity (imaginary part)	19.743965
Conductivity (S/m)	0.917436
Variation (%)	0.400000

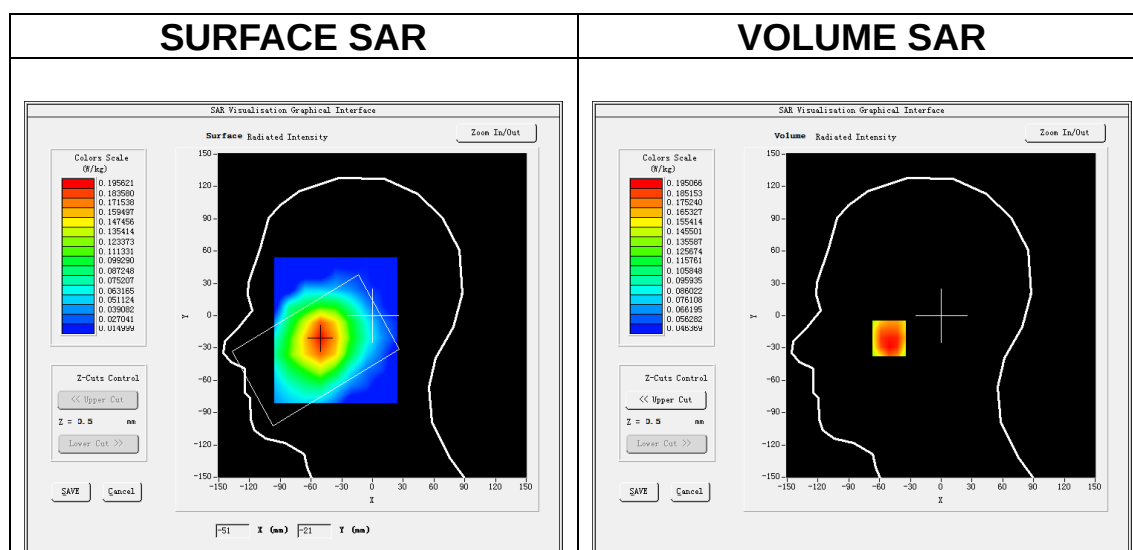

Maximum location: X=-51.00, Y=-21.00

SAR Peak: 0.24 W/kg

SAR 10g (W/Kg)	0.154836
SAR 1g (W/Kg)	0.192851

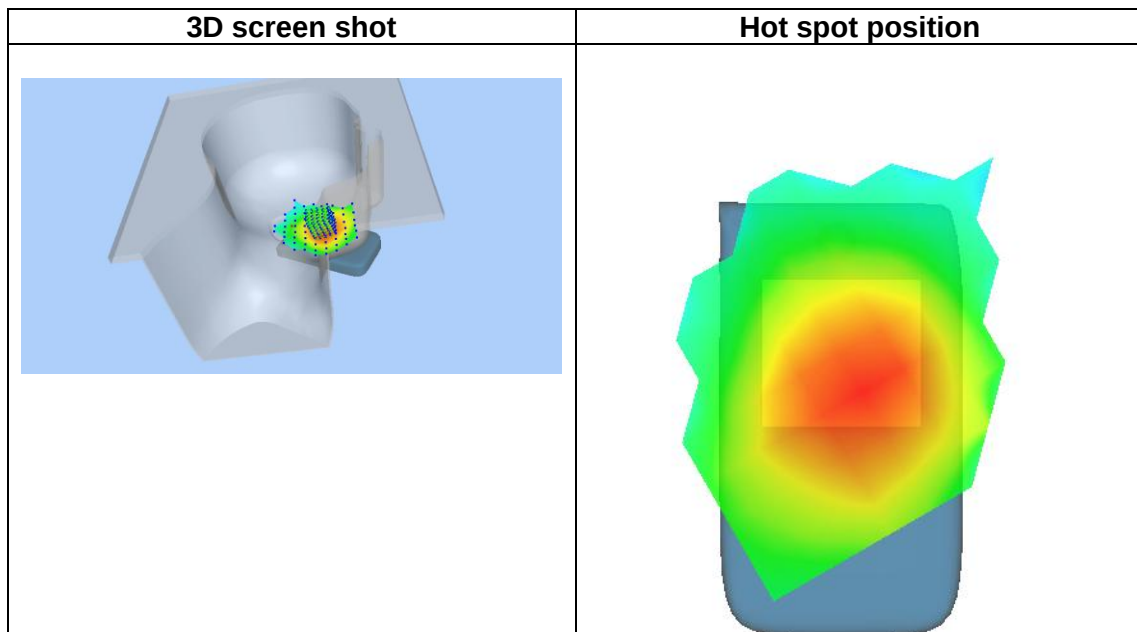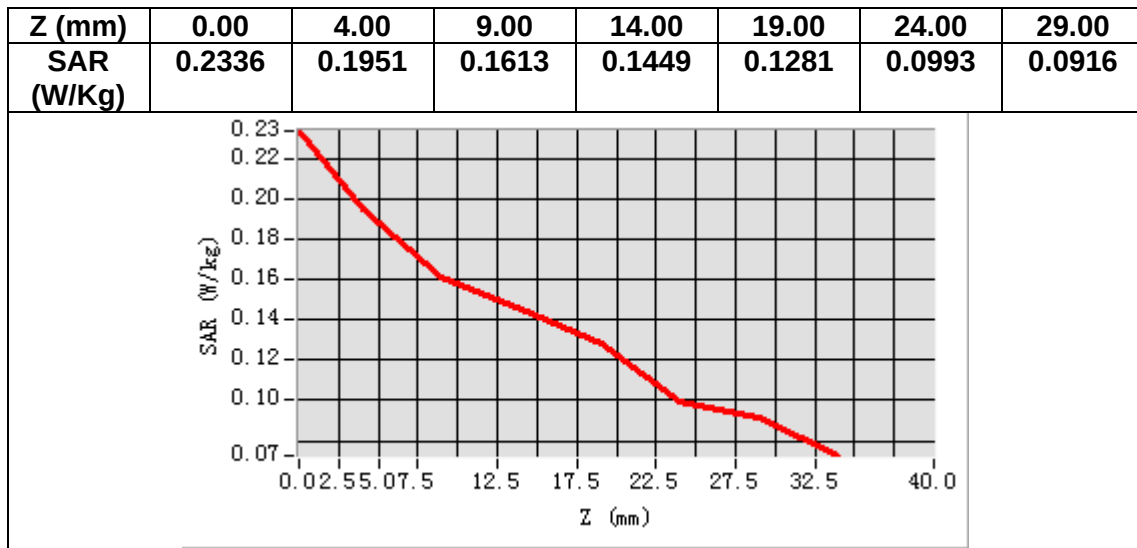

MEASUREMENT 2


Date of measurement: 2/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>

B. SAR Measurement Results


Frequency (MHz)	836.400000
Relative permittivity (real part)	42.593426
Relative permittivity (imaginary part)	19.743965
Conductivity (S/m)	0.917436
Variation (%)	-2.940000

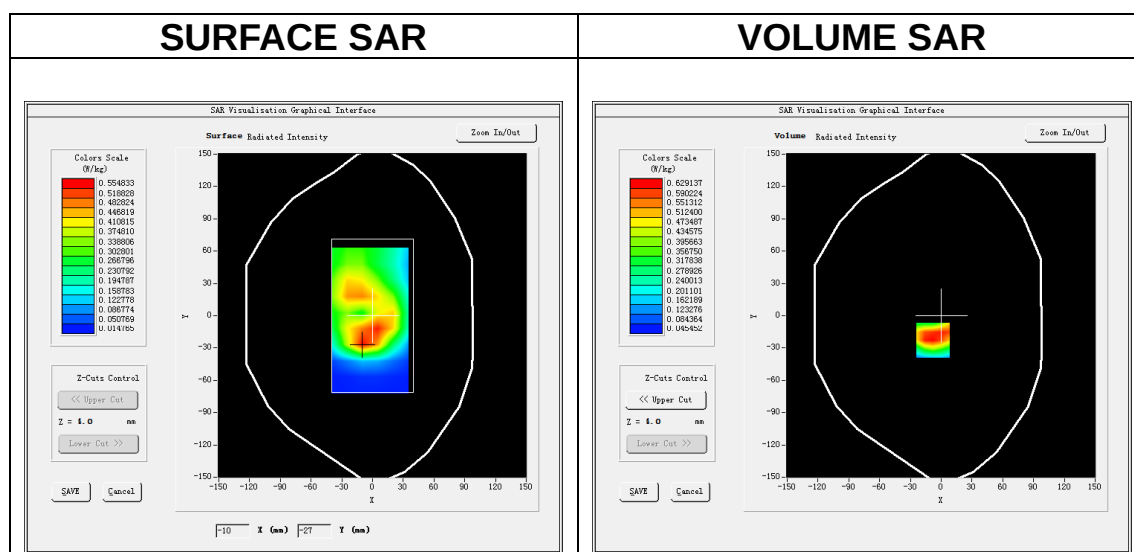


Maximum location: X=-8.00, Y=-23.00

SAR Peak: 0.97 W/kg


SAR 10g (W/Kg)	0.358111
SAR 1g (W/Kg)	0.623398

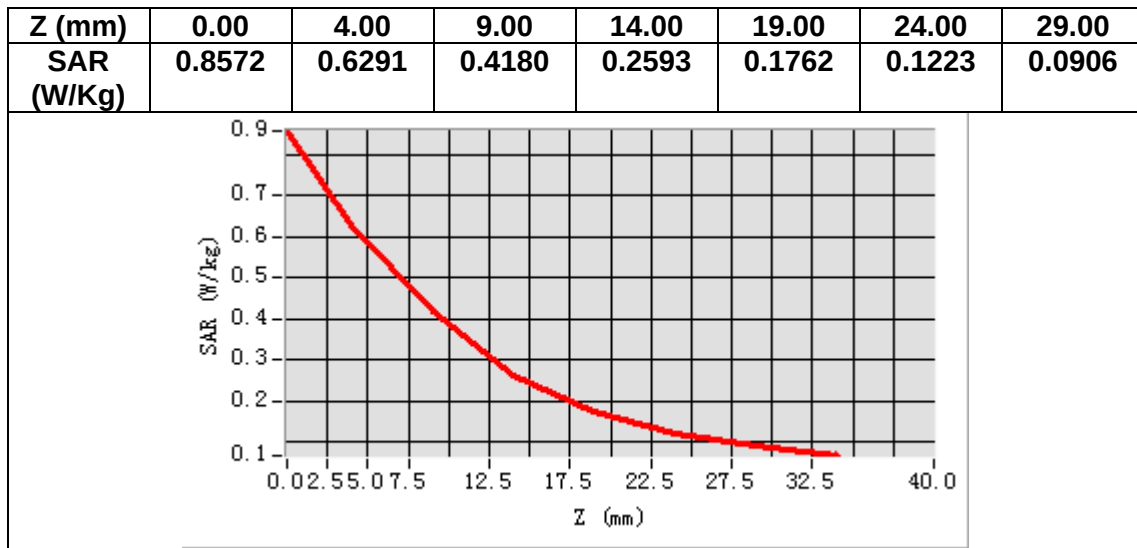

3D screen shot

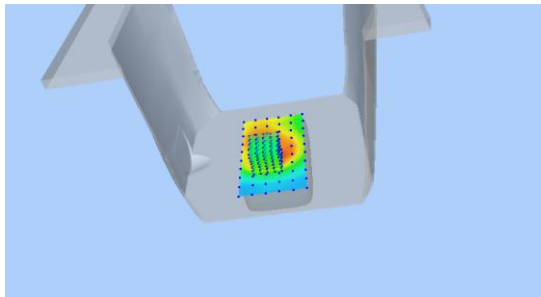

Hot spot position

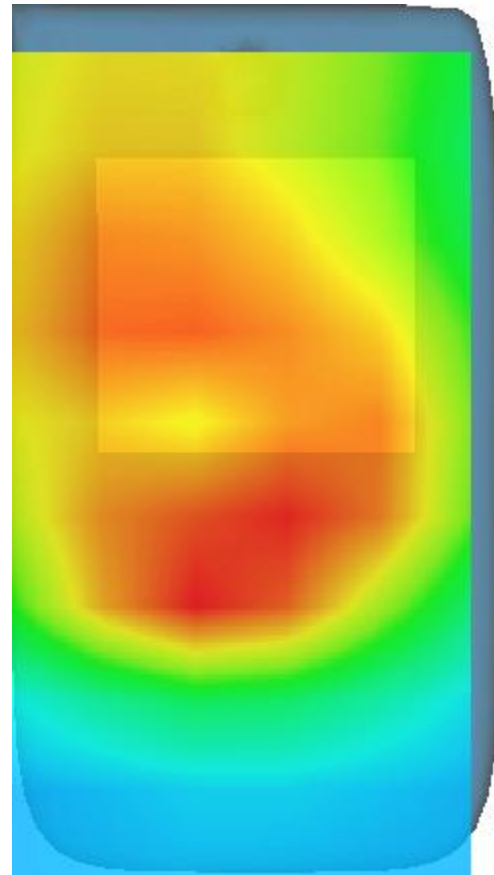

MEASUREMENT 3


Date of measurement: 3/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.7)</u>

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.167542
Relative permittivity (imaginary part)	13.624232
Conductivity (S/m)	1.422975
Variation (%)	2.140000

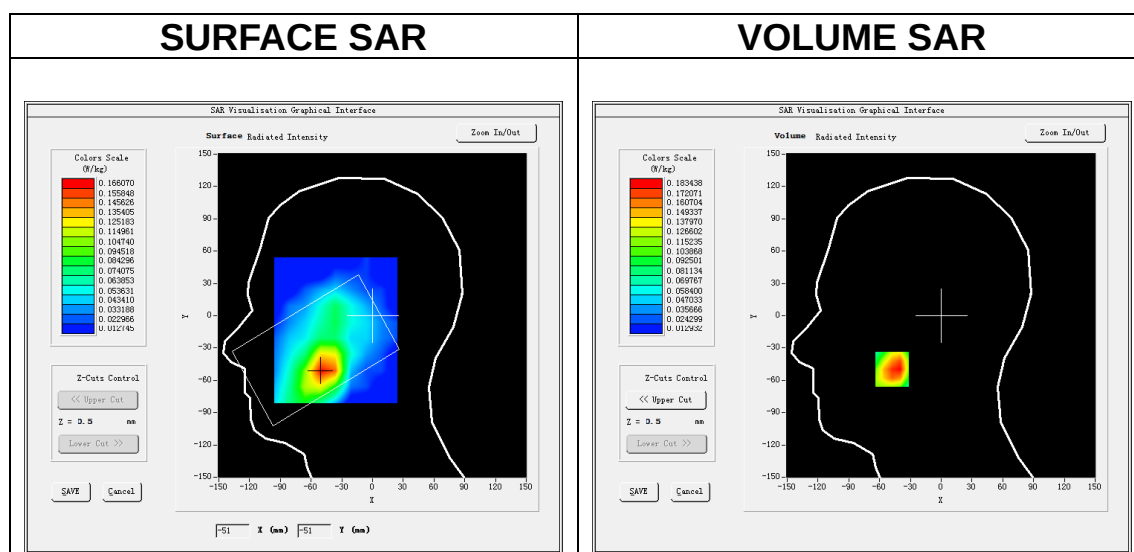

Maximum location: X=-48.00, Y=-50.00

SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.096127
SAR 1g (W/Kg)	0.182902

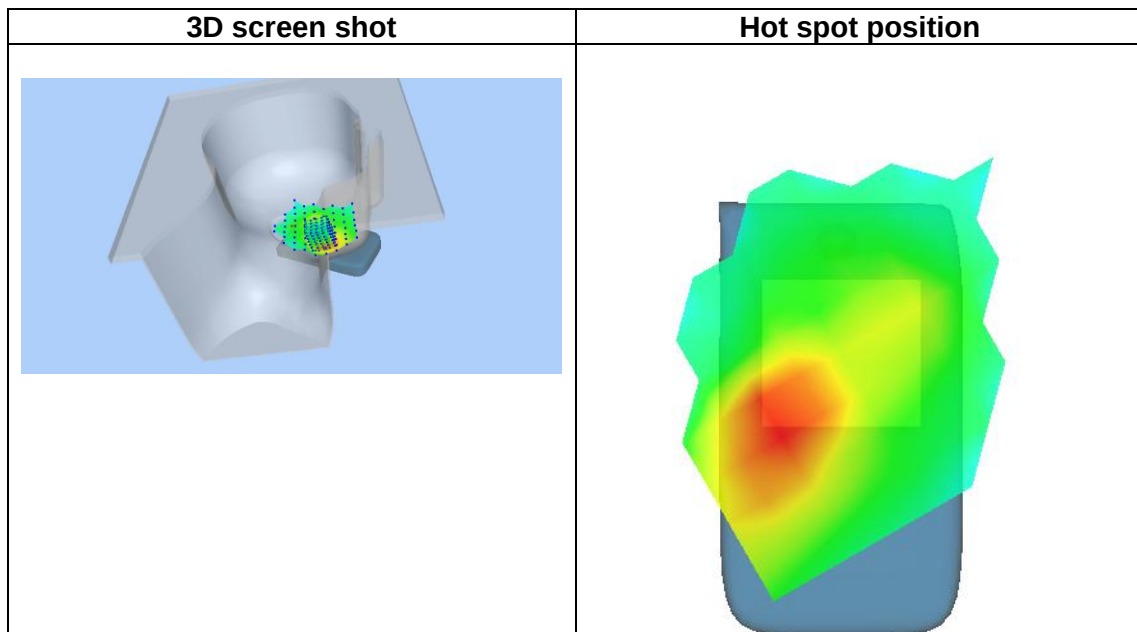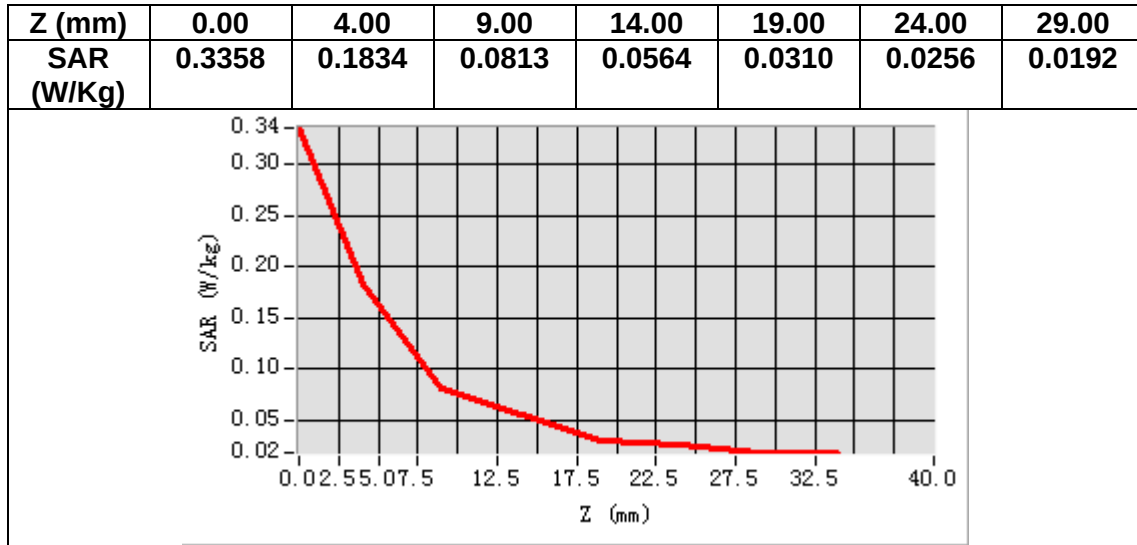

MEASUREMENT 4


Date of measurement: 3/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.7)</u>

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.167542
Relative permittivity (imaginary part)	13.624232
Conductivity (S/m)	1.422975
Variation (%)	-0.320000

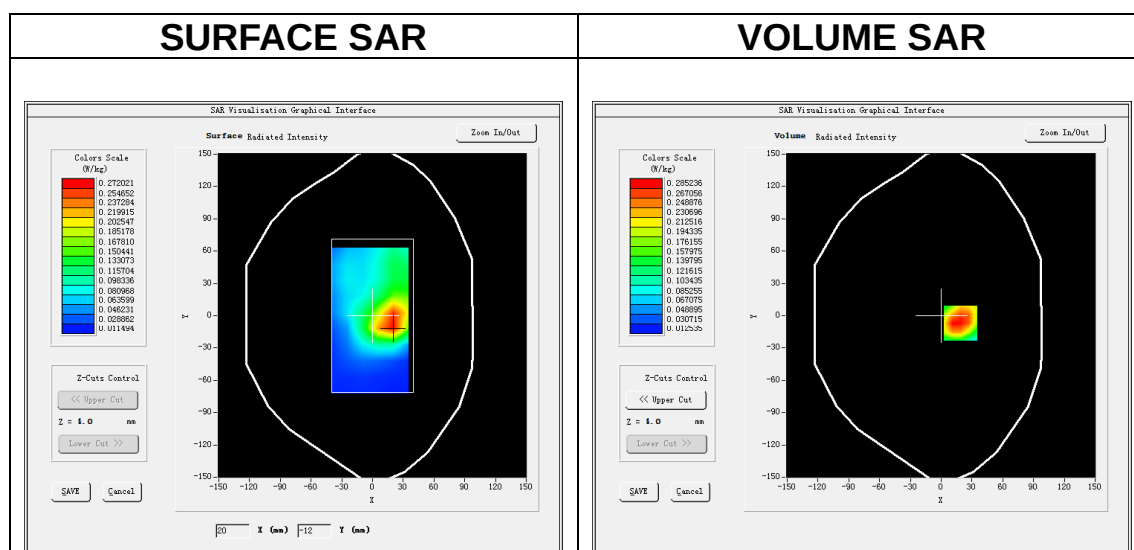

Maximum location: X=19.00, Y=-7.00

SAR Peak: 0.53 W/kg

SAR 10g (W/Kg)	0.140913
SAR 1g (W/Kg)	0.289343

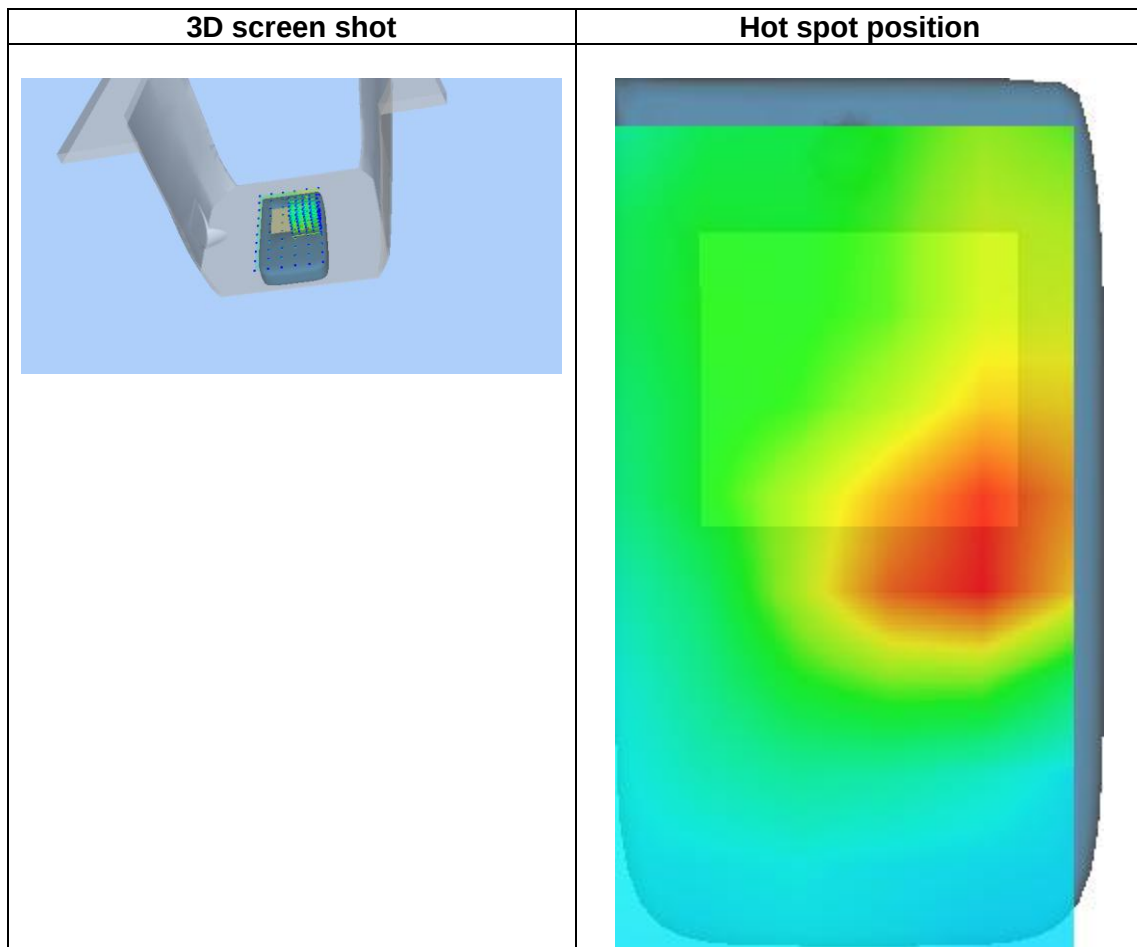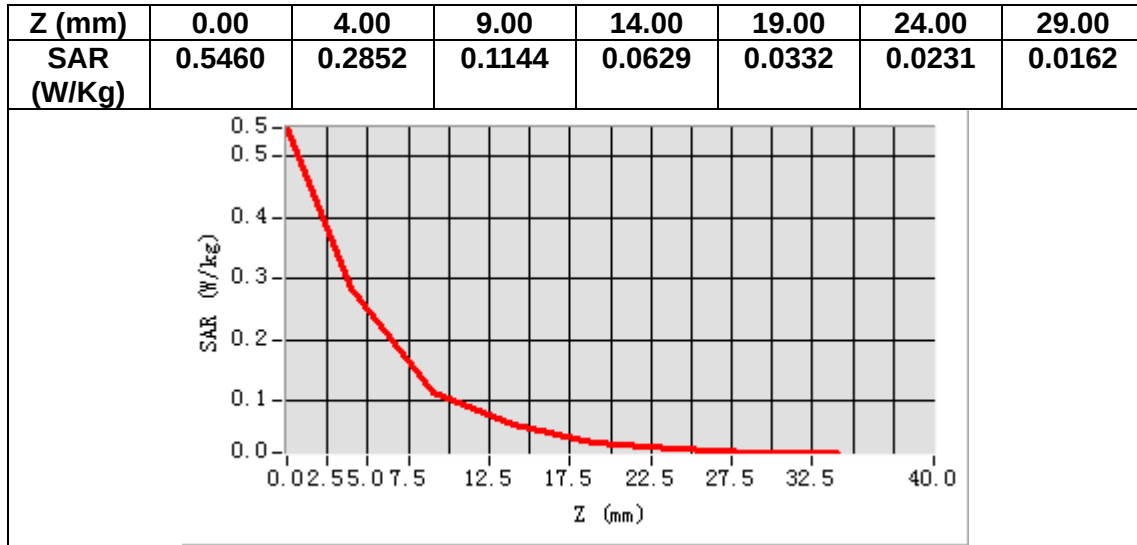

MEASUREMENT 5


Date of measurement: 3/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.167542
Relative permittivity (imaginary part)	13.624232
Conductivity (S/m)	1.422975
Variation (%)	1.700000

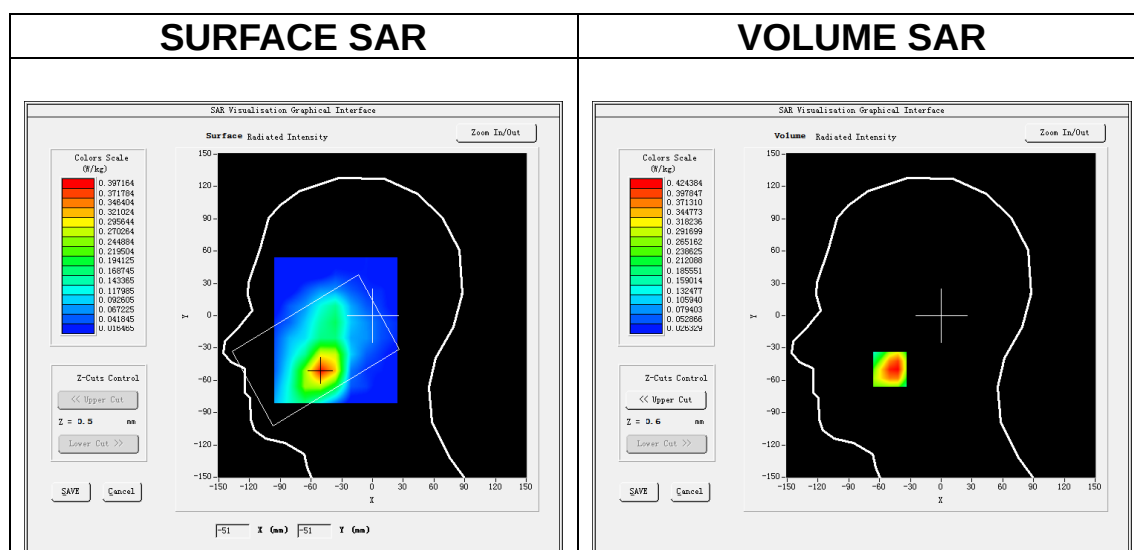

Maximum location: X=-50.00, Y=-50.00

SAR Peak: 0.62 W/kg

SAR 10g (W/Kg)	0.250468
SAR 1g (W/Kg)	0.421479

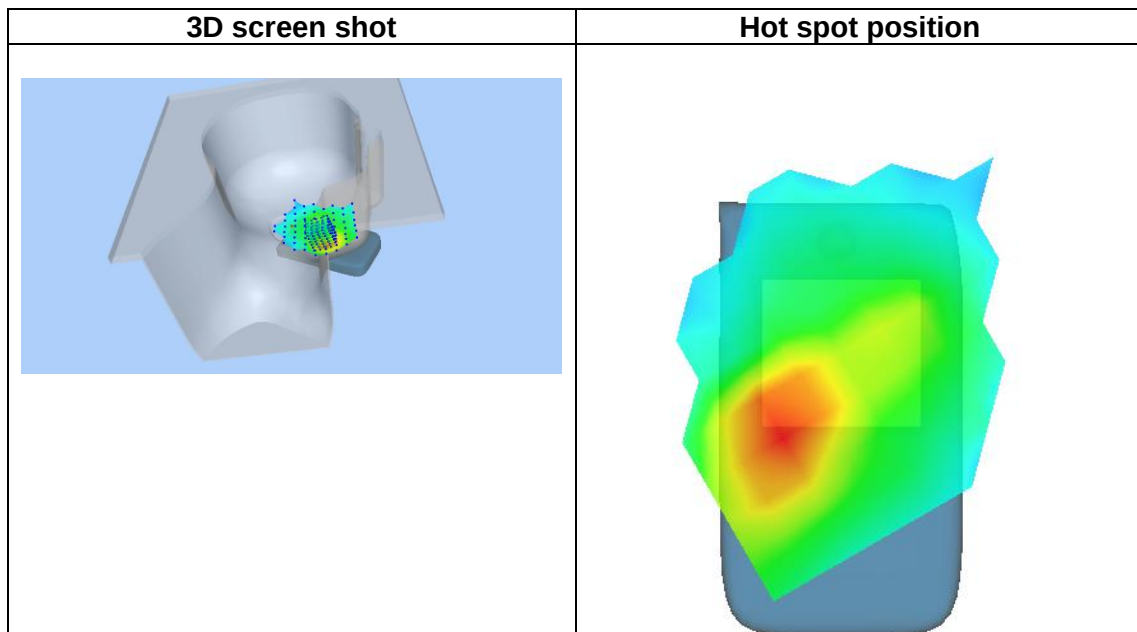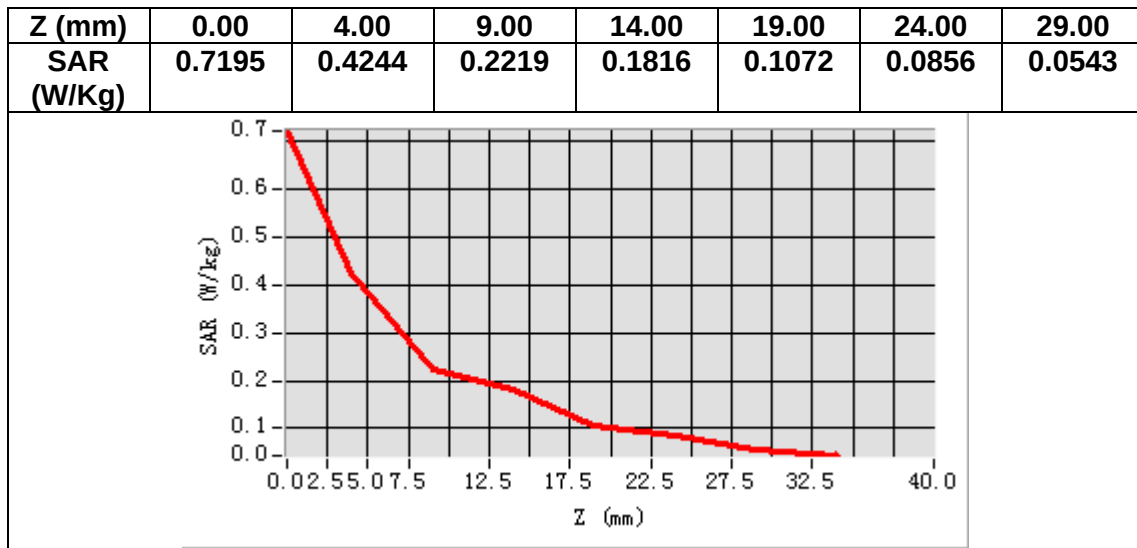

MEASUREMENT 6


Date of measurement: 3/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>

B. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.167542
Relative permittivity (imaginary part)	13.624232
Conductivity (S/m)	1.422975
Variation (%)	-1.430000

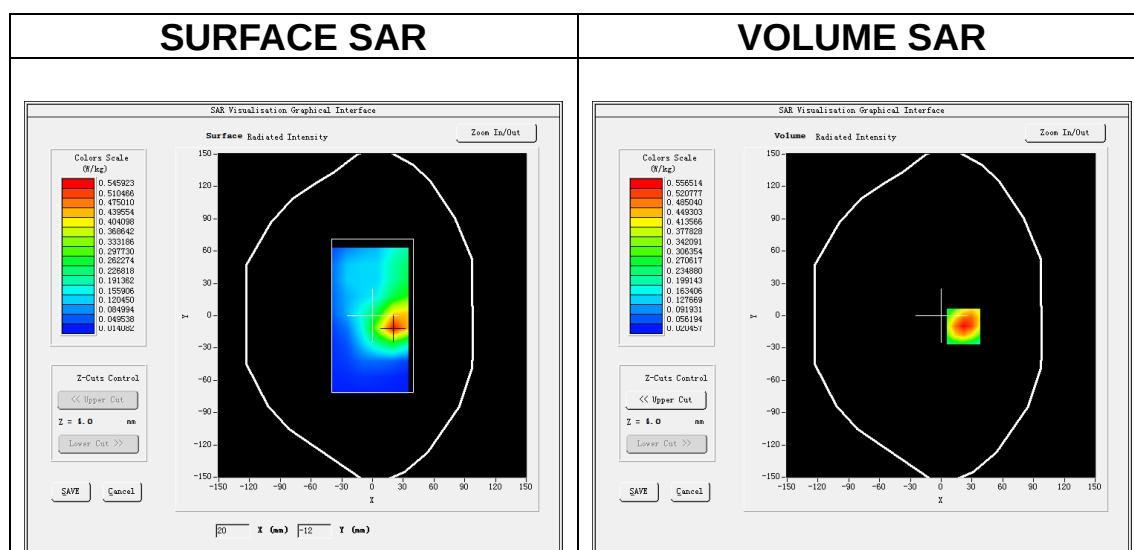


Maximum location: X=22.00, Y=-10.00

SAR Peak: 0.84 W/kg


SAR 10g (W/Kg)	0.308810
SAR 1g (W/Kg)	0.542211

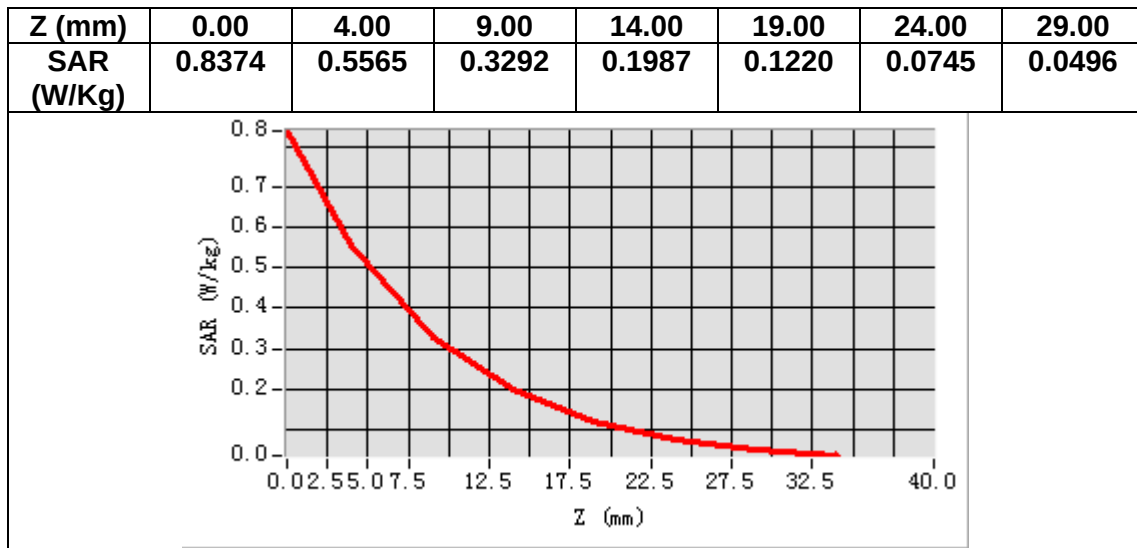

3D screen shot

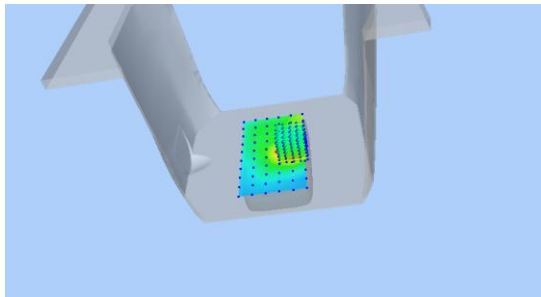

Hot spot position

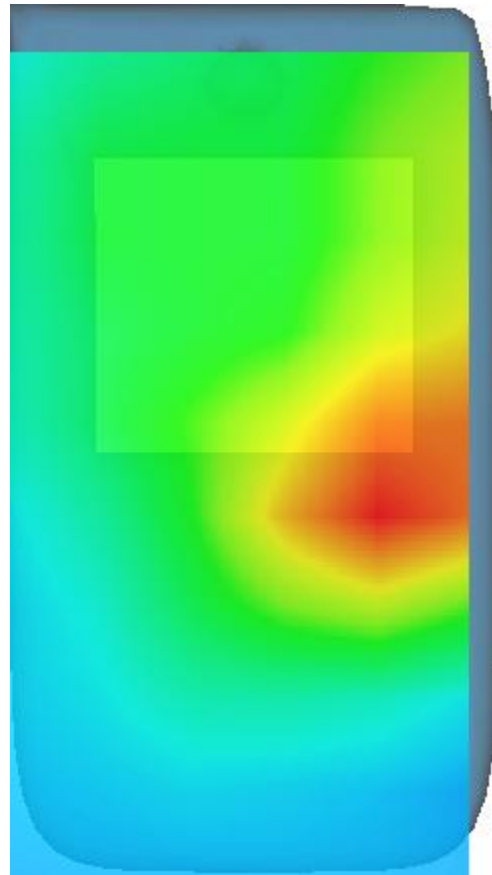

MEASUREMENT 7


Date of measurement: 12/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band4 WCDMA1700</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1732.600000
Relative permittivity (real part)	40.066105
Relative permittivity (imaginary part)	13.676988
Conductivity (S/m)	1.316030
Variation (%)	1.000000

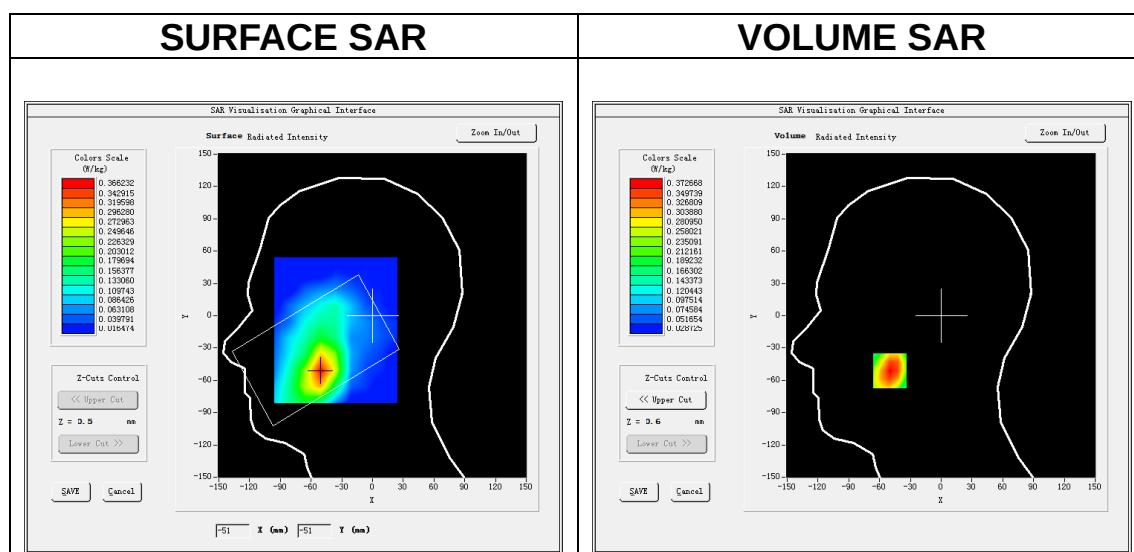

Maximum location: X=-50.00, Y=-51.00

SAR Peak: 0.51 W/kg

SAR 10g (W/Kg)	0.231256
SAR 1g (W/Kg)	0.359893

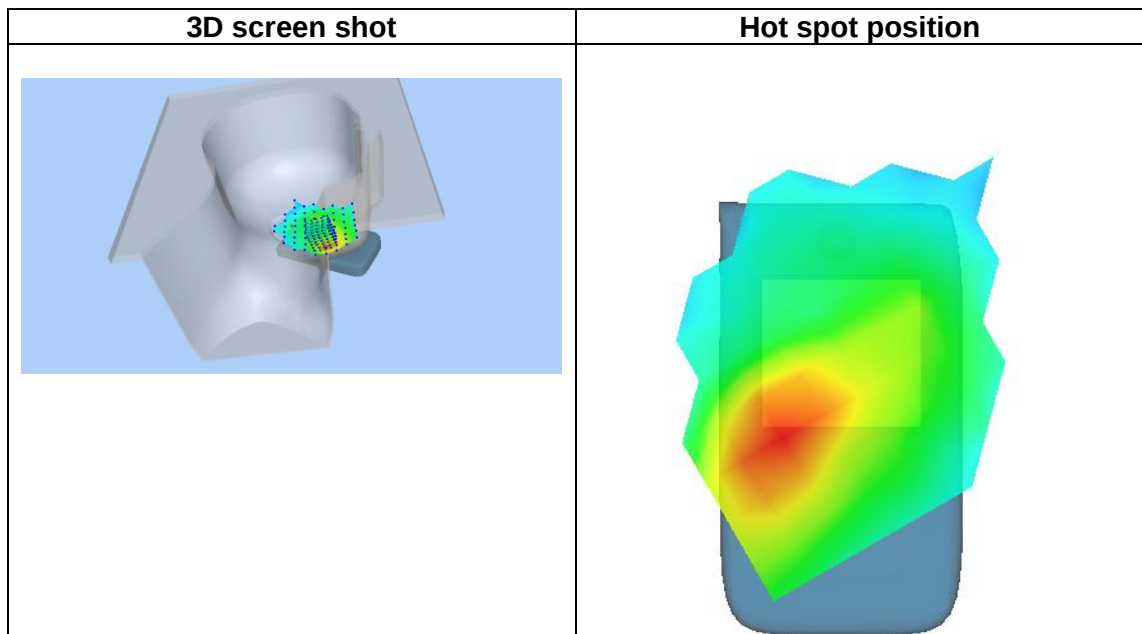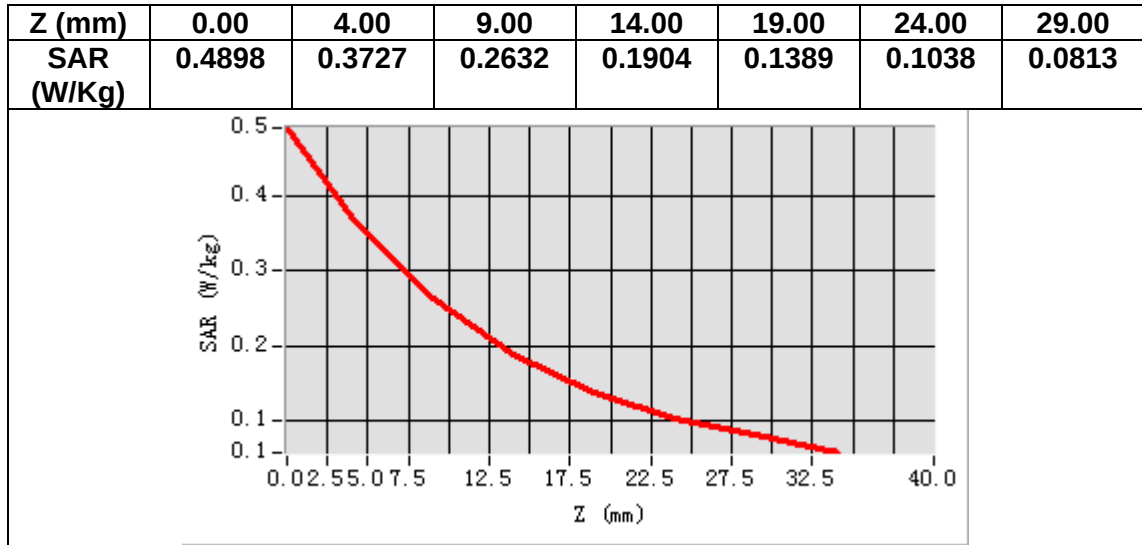

MEASUREMENT 8


Date of measurement: 12/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band4 WCDMA1700</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>

B. SAR Measurement Results


Frequency (MHz)	1732.600000
Relative permittivity (real part)	40.066105
Relative permittivity (imaginary part)	13.676988
Conductivity (S/m)	1.316030
Variation (%)	-0.820000

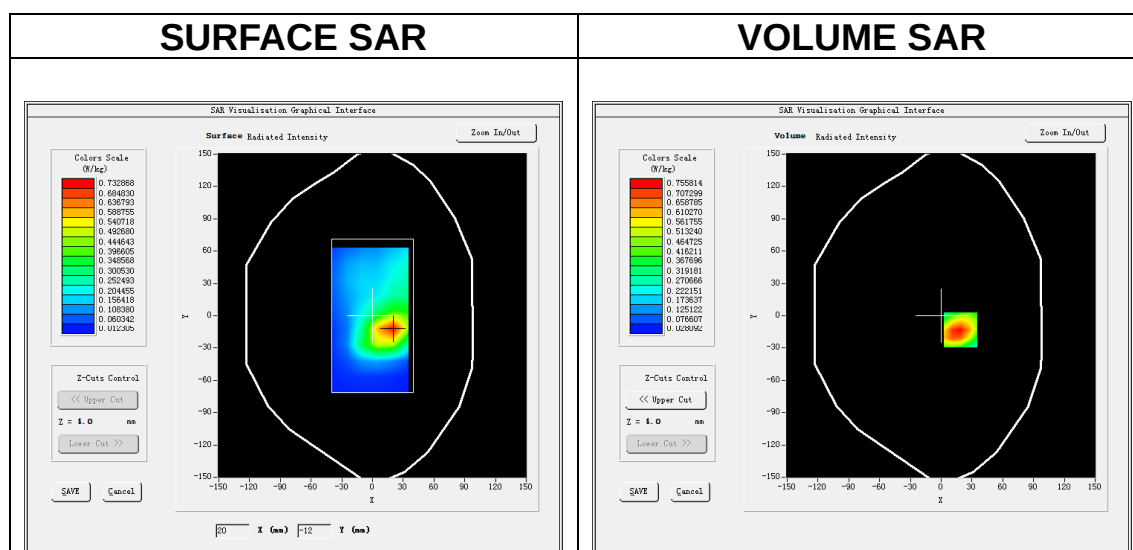


Maximum location: X=19.00, Y=-13.00

SAR Peak: 1.13 W/kg


SAR 10g (W/Kg)	0.414764
SAR 1g (W/Kg)	0.728521

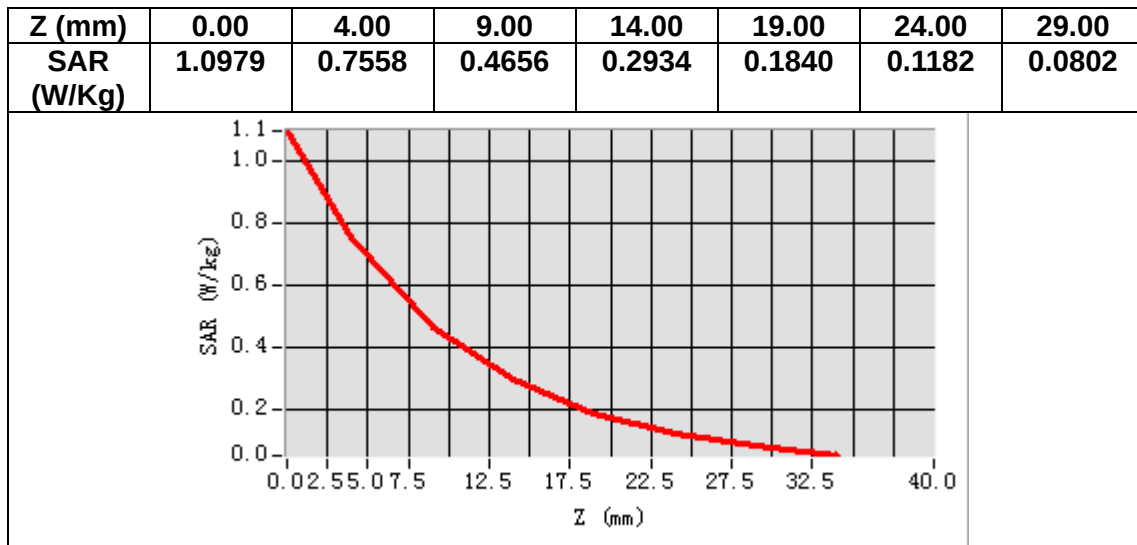

3D screen shot

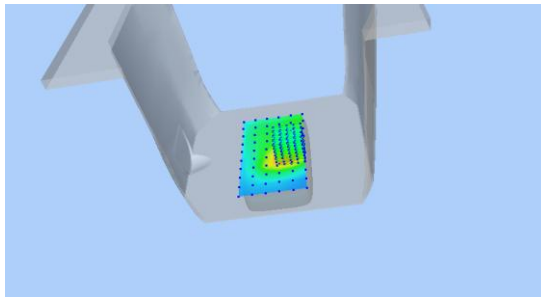

Hot spot position

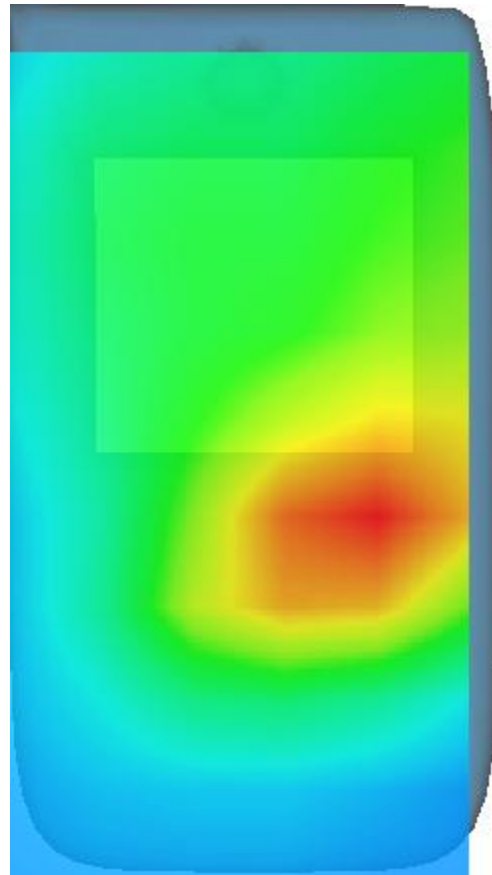

MEASUREMENT 9


Date of measurement: 2/8/2021

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>Band5 WCDMA850</u>
Channels	<u>Middle</u>
Signal	<u>WCDMA (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	836.400000
Relative permittivity (real part)	42.593426
Relative permittivity (imaginary part)	19.743965
Conductivity (S/m)	0.917436
Variation (%)	-1.330000

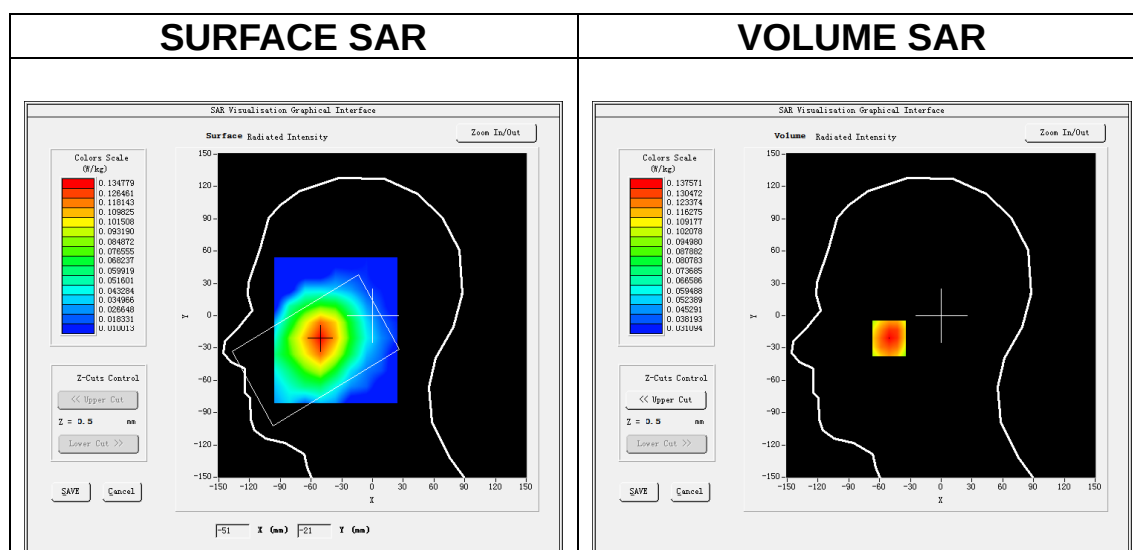

Maximum location: X=-51.00, Y=-21.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.106915
SAR 1g (W/Kg)	0.131929

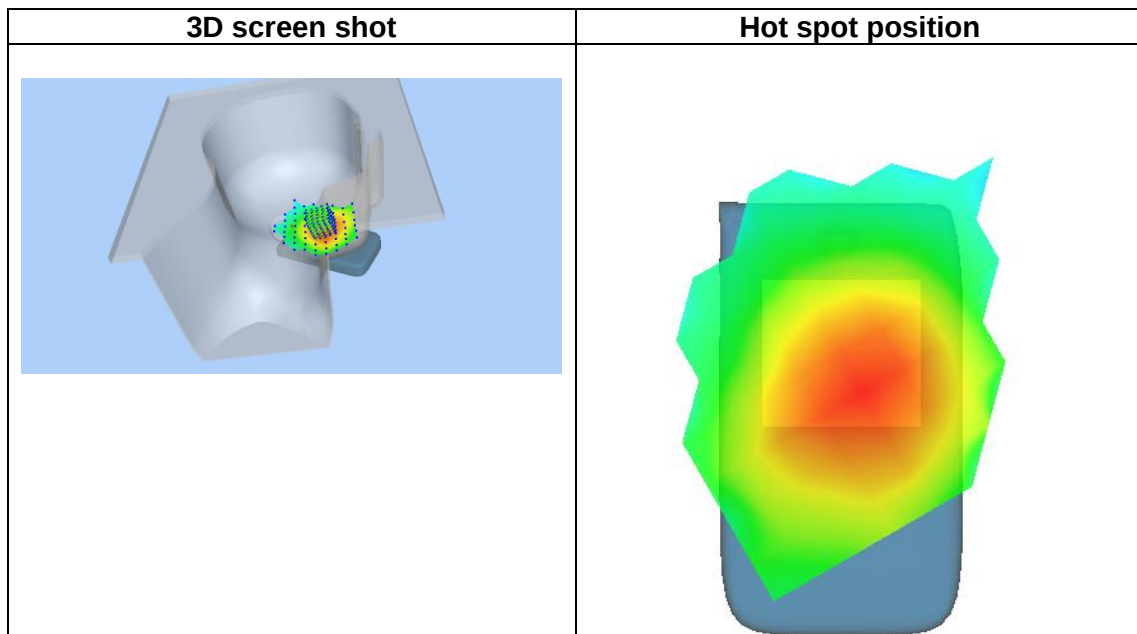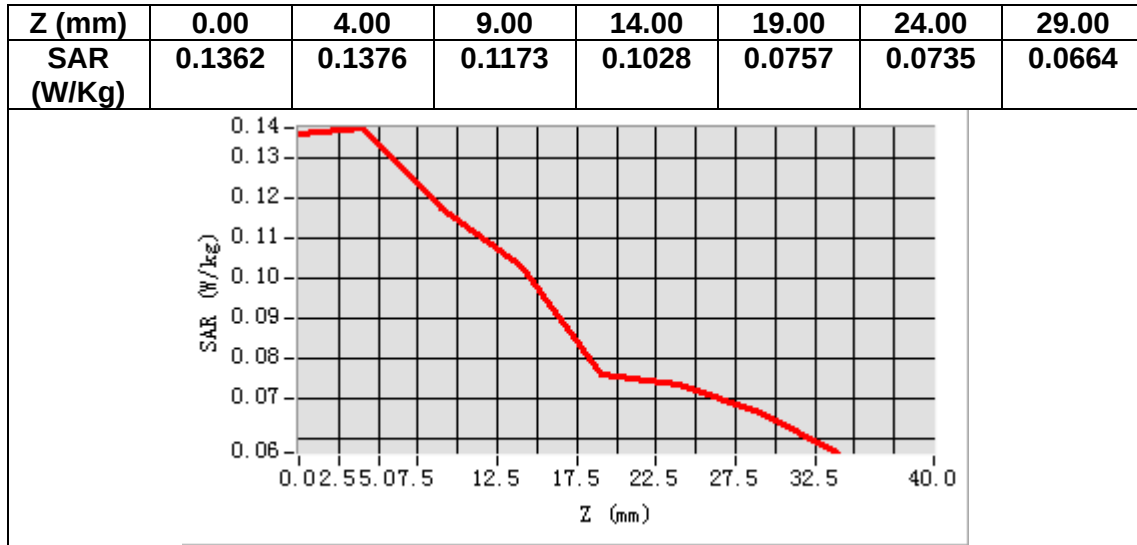

MEASUREMENT 10


Date of measurement: 2/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	836.400000
Relative permittivity (real part)	42.593426
Relative permittivity (imaginary part)	19.743965
Conductivity (S/m)	0.917436
Variation (%)	0.090000

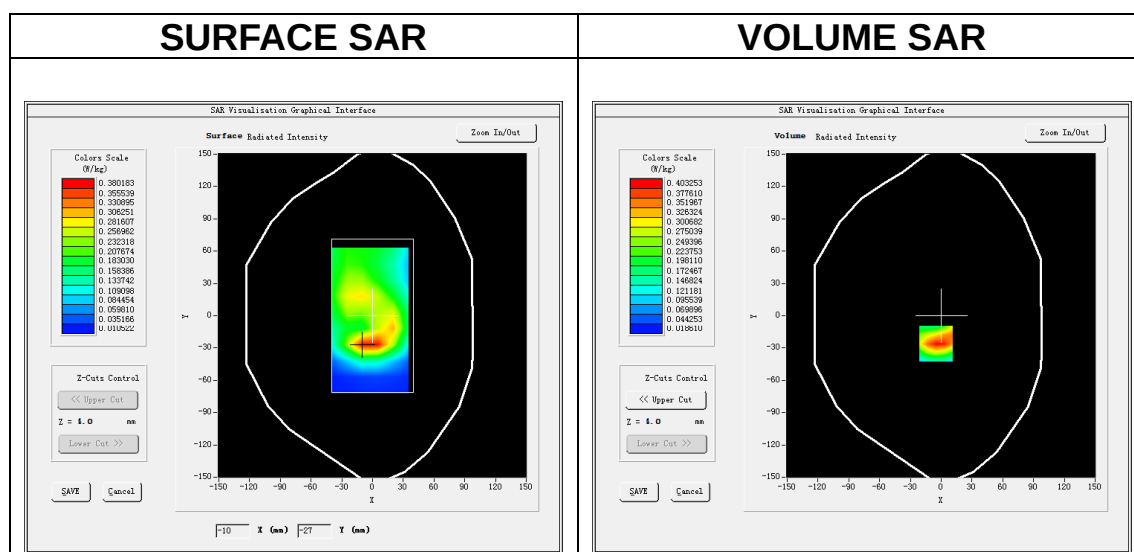


Maximum location: X=-5.00, Y=-26.00

SAR Peak: 0.59 W/kg


SAR 10g (W/Kg)	0.227139
SAR 1g (W/Kg)	0.383695

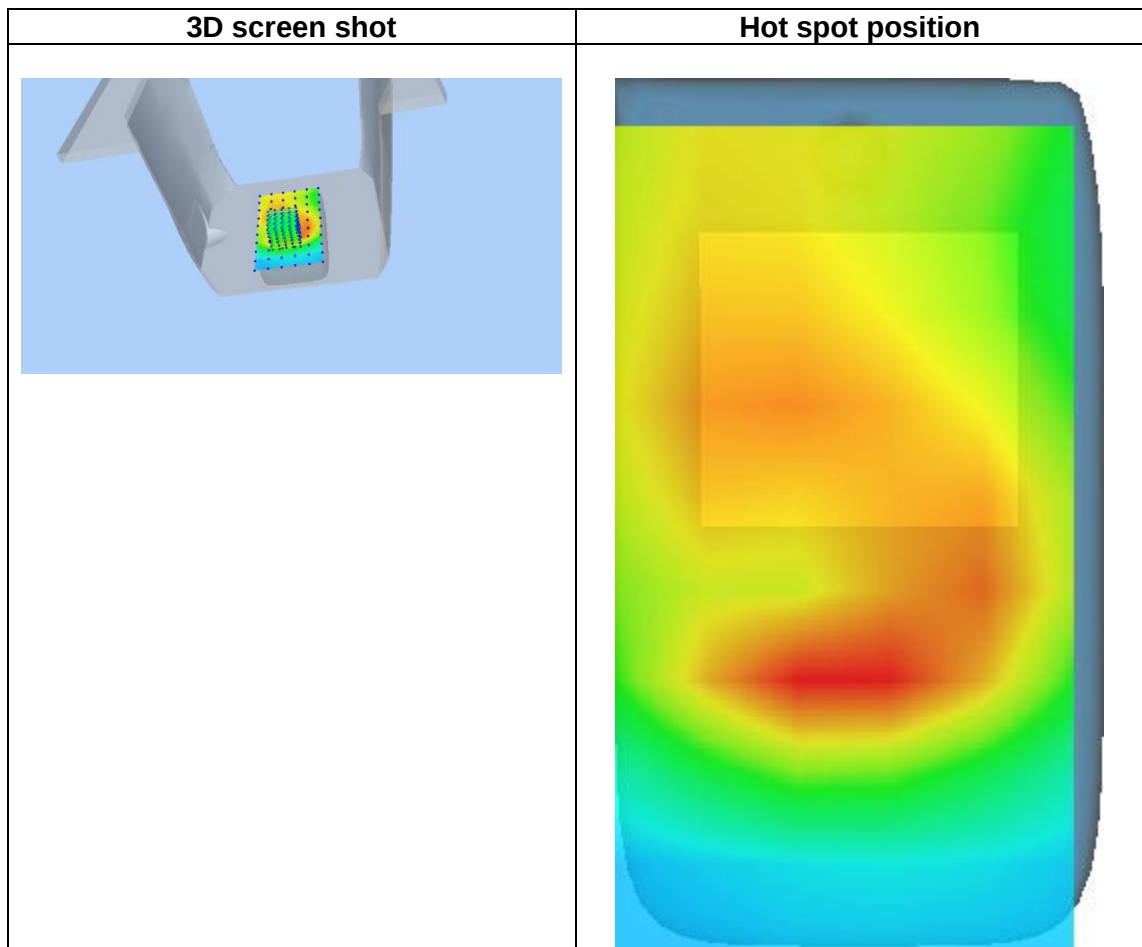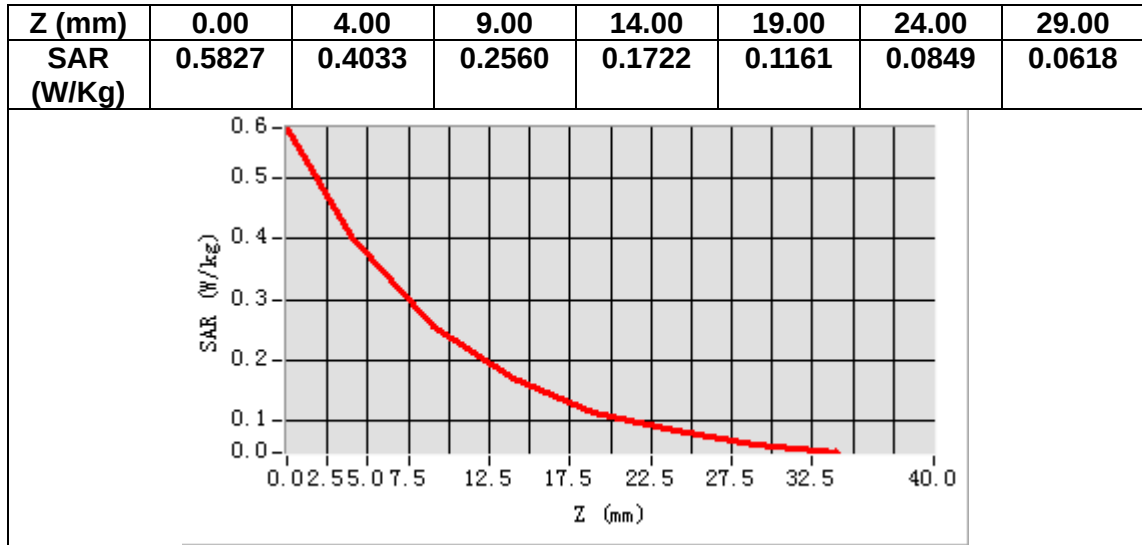


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SAR (W/ Kg)	0.71 89	0.42 16	0.12 89	0.14 02	0.06 59	0.07 29	0.05 02	0.05 43	0.04 49	0.04 54	0.04 64	0.05 02

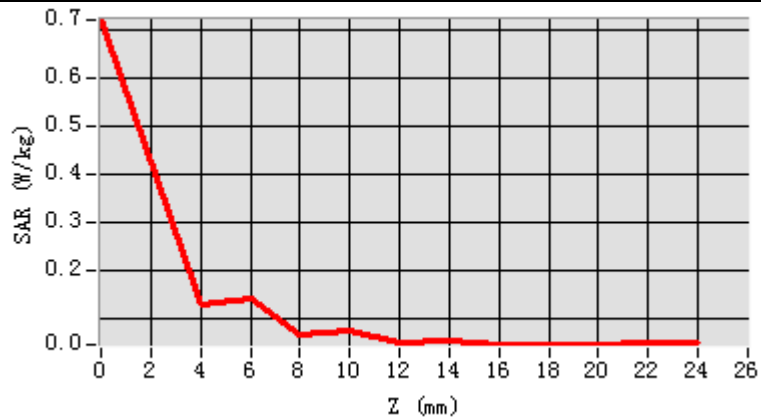

3D screen shot

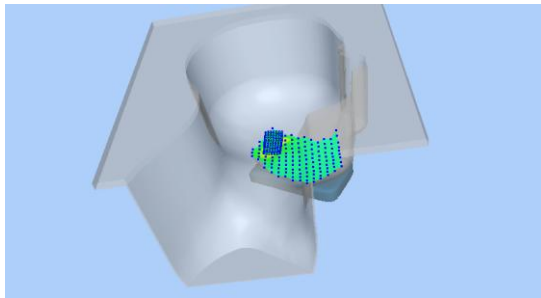

Hot spot position

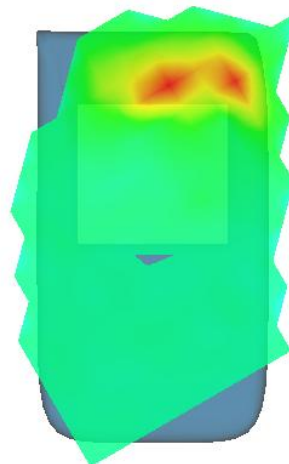

MEASUREMENT 12


Date of measurement: 8/8/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	5200.000000
Relative permittivity (real part)	36.901843
Relative permittivity (imaginary part)	16.598326
Conductivity (S/m)	4.795072
Variation (%)	-0.700000

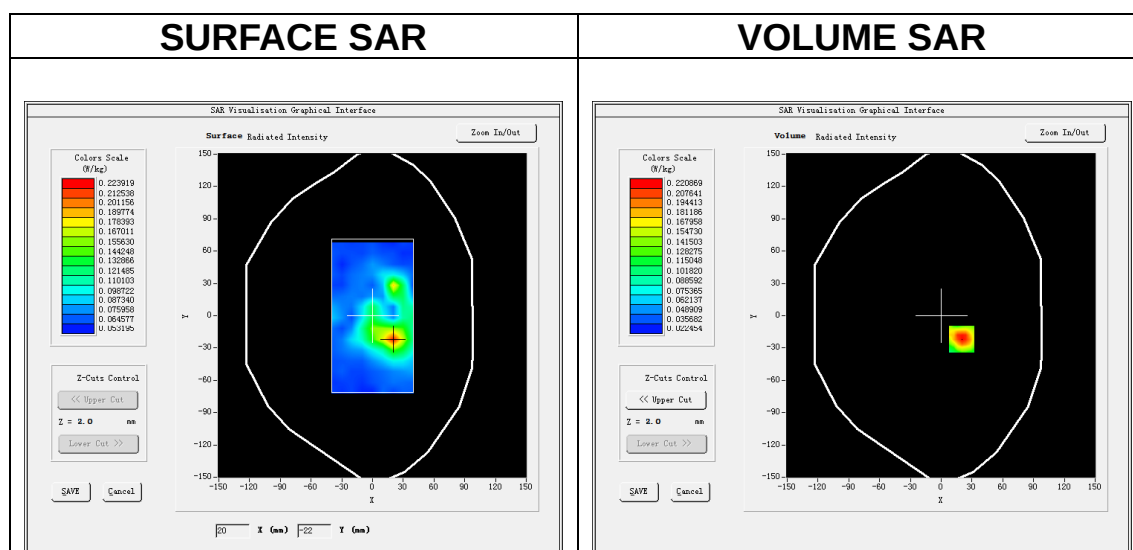

Maximum location: X=20.00, Y=-22.00

SAR Peak: 0.34 W/kg

SAR 10g (W/Kg)	0.093447
SAR 1g (W/Kg)	0.152473

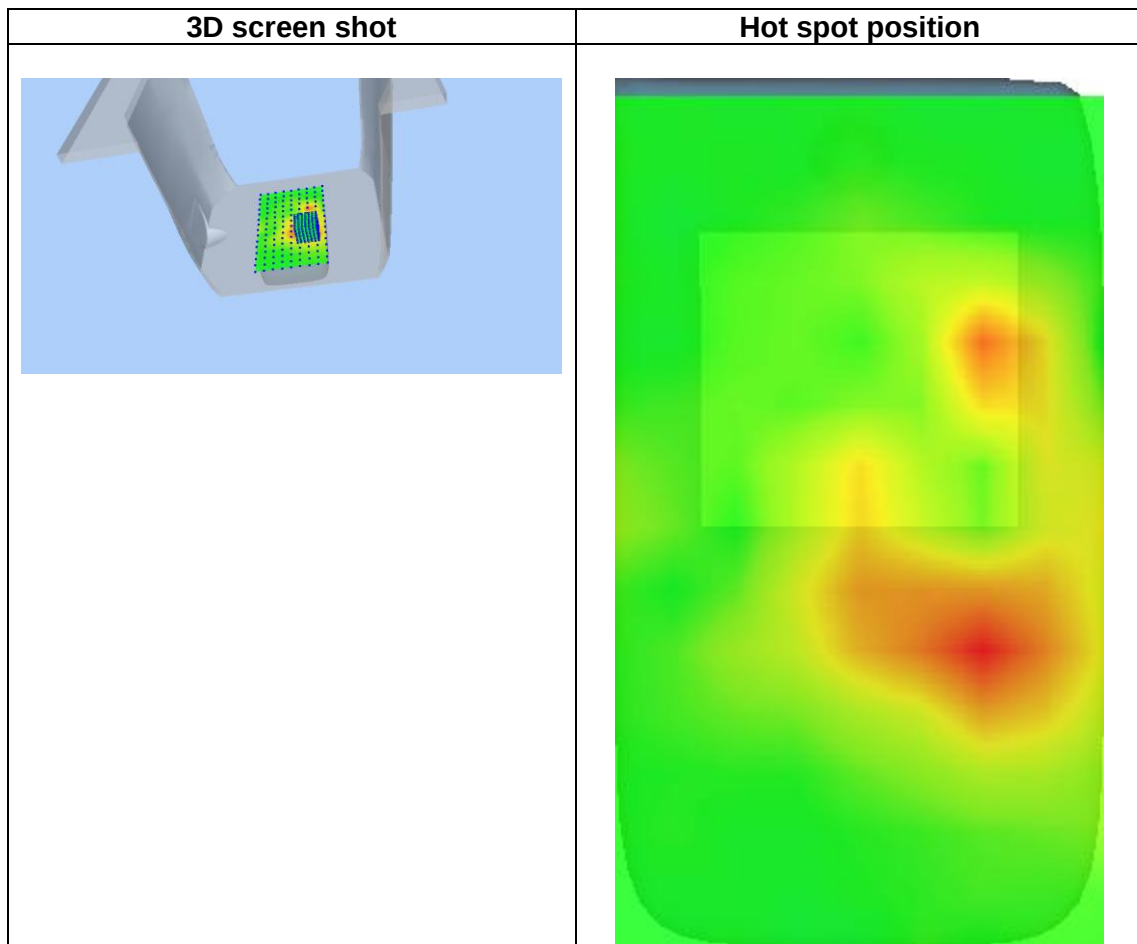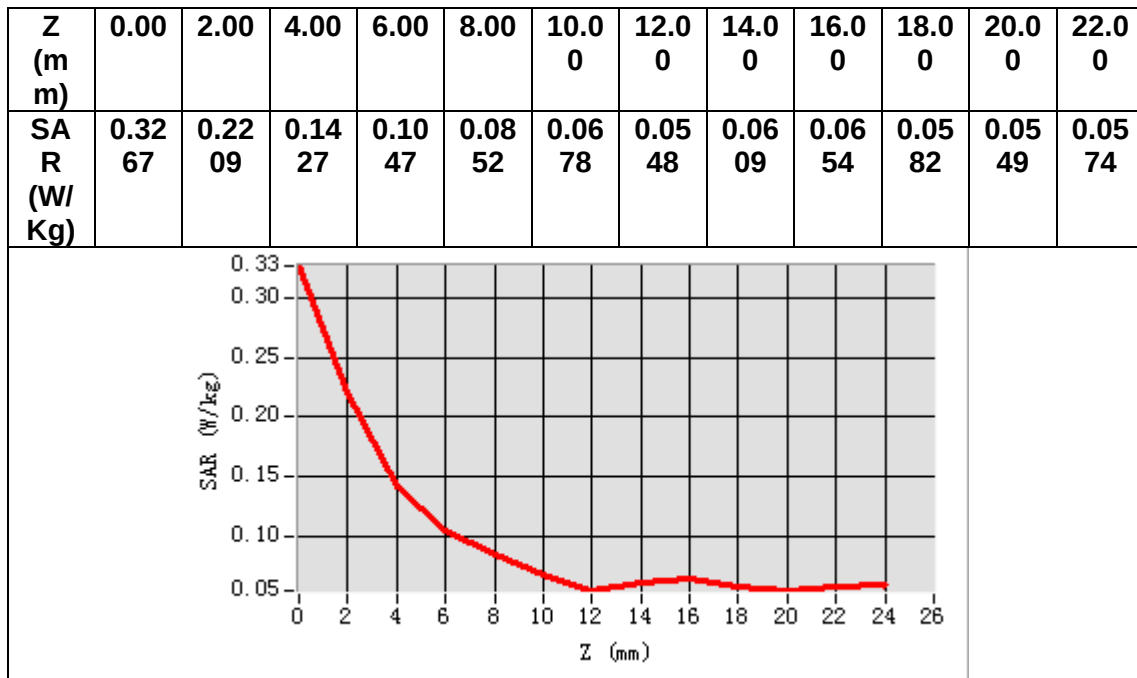

MEASUREMENT 13


Date of measurement: 8/8/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5280.000000
Relative permittivity (real part)	36.792648
Relative permittivity (imaginary part)	16.683485
Conductivity (S/m)	4.893822
Variation (%)	-1.050000

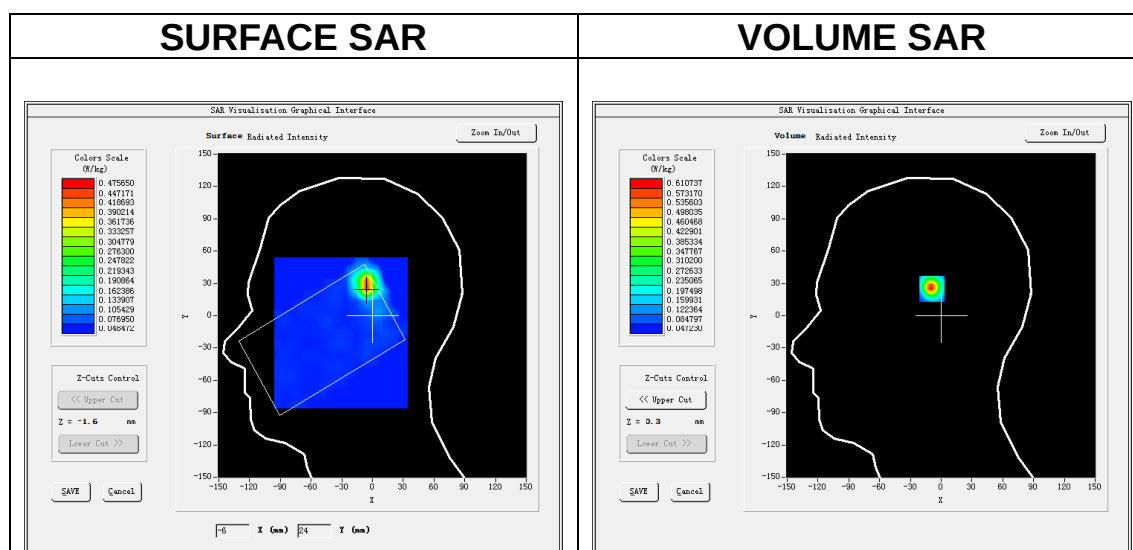


Maximum location: X=-6.00, Y=27.00


SAR Peak: 1.66 W/kg

SAR 10g (W/Kg)	0.188654
SAR 1g (W/Kg)	0.563877


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SAR (W/ Kg)	1.02 83	0.61 07	0.30 29	0.17 47	0.11 46	0.08 01	0.07 01	0.05 60	0.05 87	0.05 28	0.05 23	0.05 42

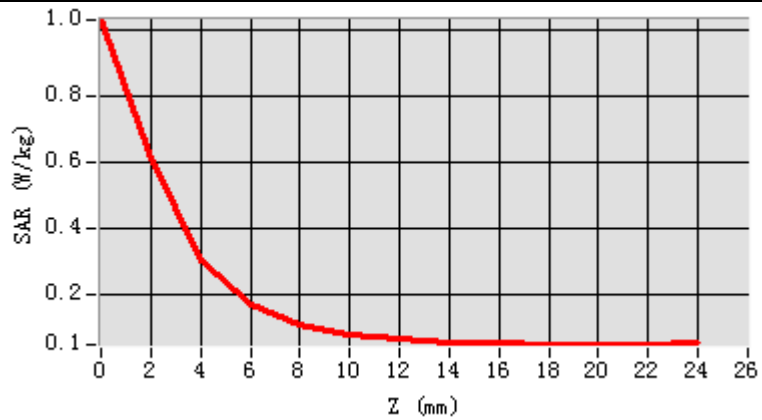

3D screen shot

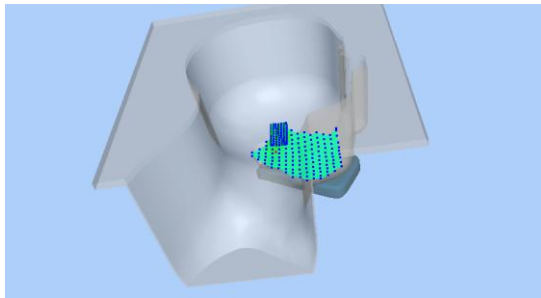

Hot spot position

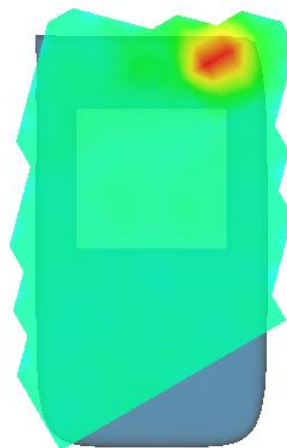

MEASUREMENT 14


Date of measurement: 8/8/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5280.000000
Relative permittivity (real part)	36.792648
Relative permittivity (imaginary part)	16.683485
Conductivity (S/m)	4.893822
Variation (%)	0.180000

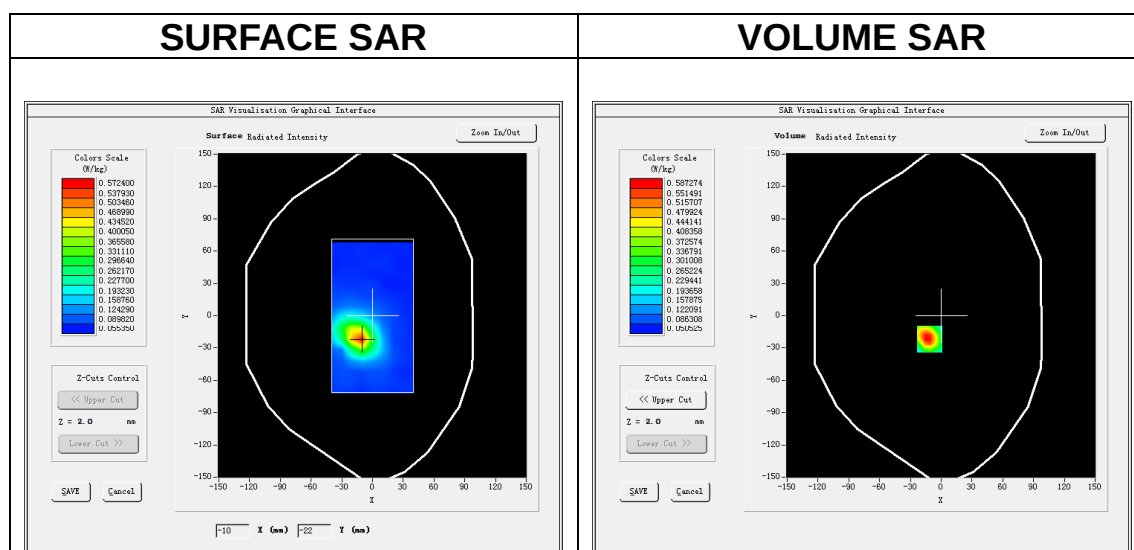


Maximum location: X=-11.00, Y=-22.00


SAR Peak: 0.98 W/kg

SAR 10g (W/Kg)	0.179011
SAR 1g (W/Kg)	0.376889


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SAR (W/ Kg)	0.92 91	0.58 73	0.31 58	0.21 70	0.13 80	0.10 93	0.08 33	0.07 74	0.06 59	0.06 24	0.05 72	0.06 79

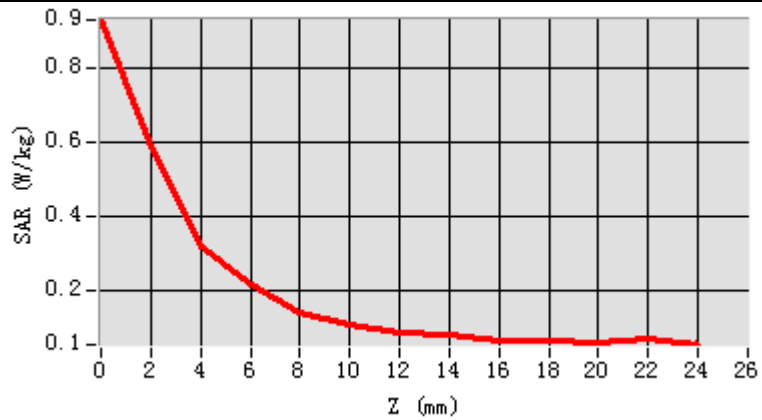

3D screen shot

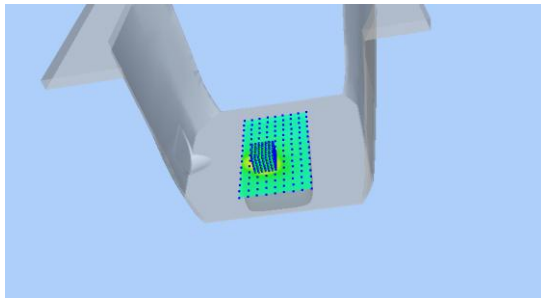

Hot spot position

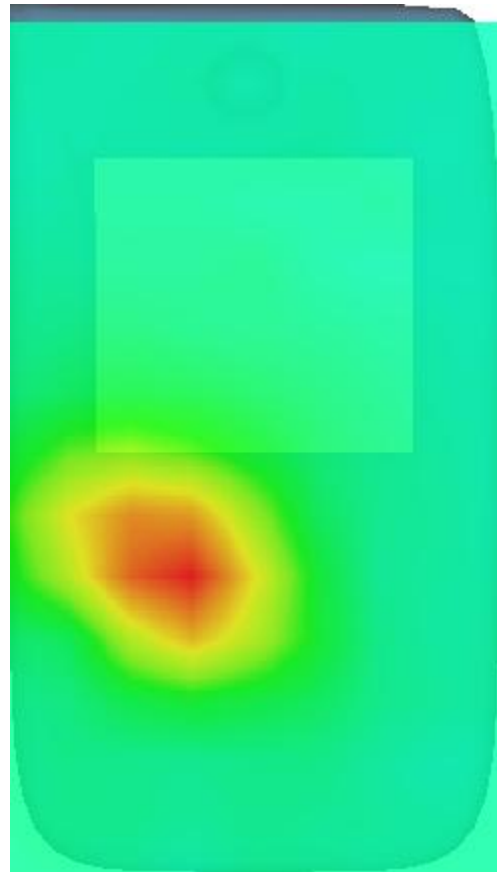

MEASUREMENT 15


Date of measurement: 19/8/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	5600.000000
Relative permittivity (real part)	36.660832
Relative permittivity (imaginary part)	16.037251
Conductivity (S/m)	4.989367
Variation (%)	-0.900000

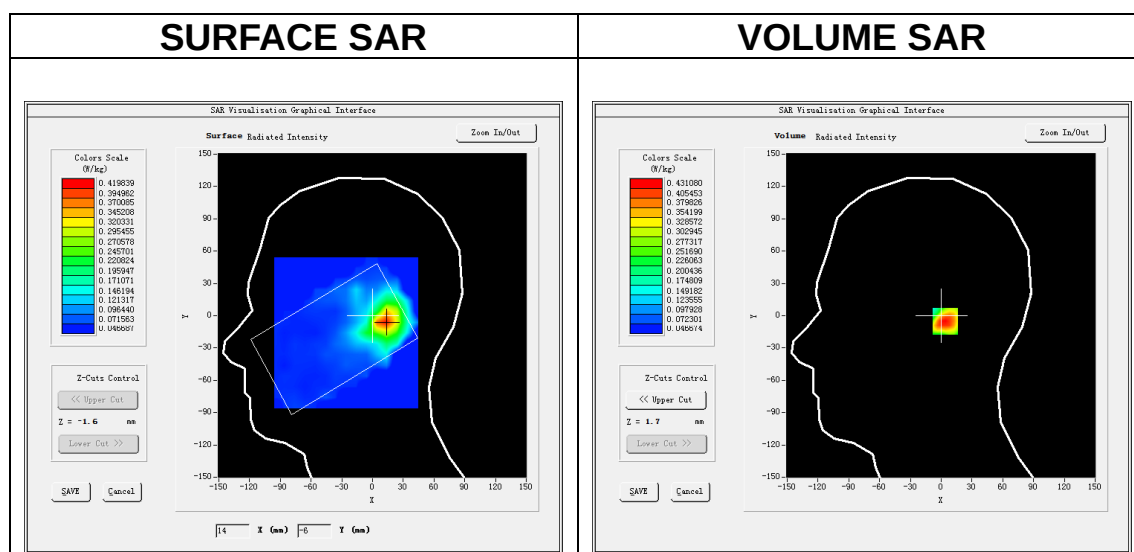

Maximum location: X=12.00, Y=-5.00

SAR Peak: 1.08 W/kg

SAR 10g (W/Kg)	0.200645
SAR 1g (W/Kg)	0.435591

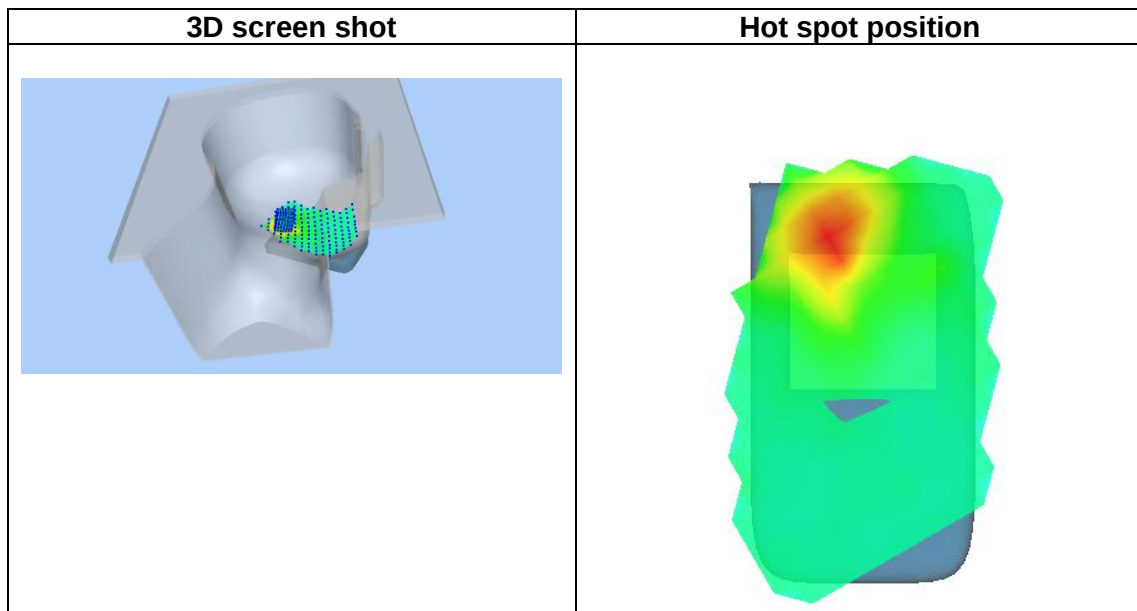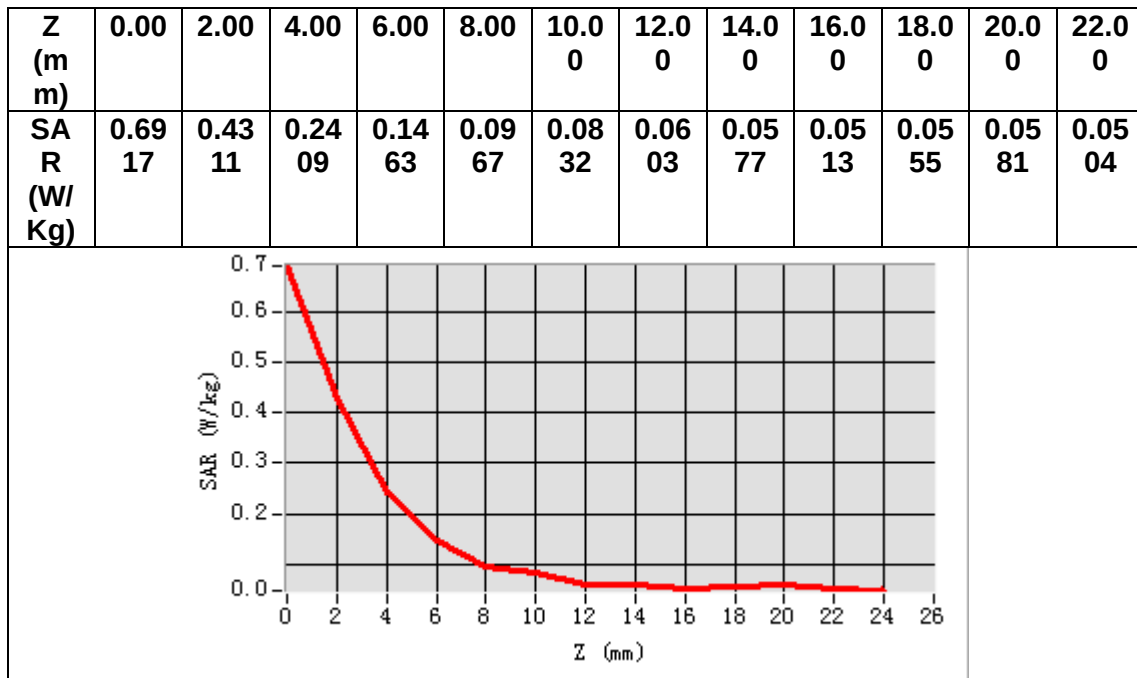

MEASUREMENT 16


Date of measurement: 19/8/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5600.000000
Relative permittivity (real part)	36.660832
Relative permittivity (imaginary part)	16.037251
Conductivity (S/m)	4.989367
Variation (%)	-0.030000

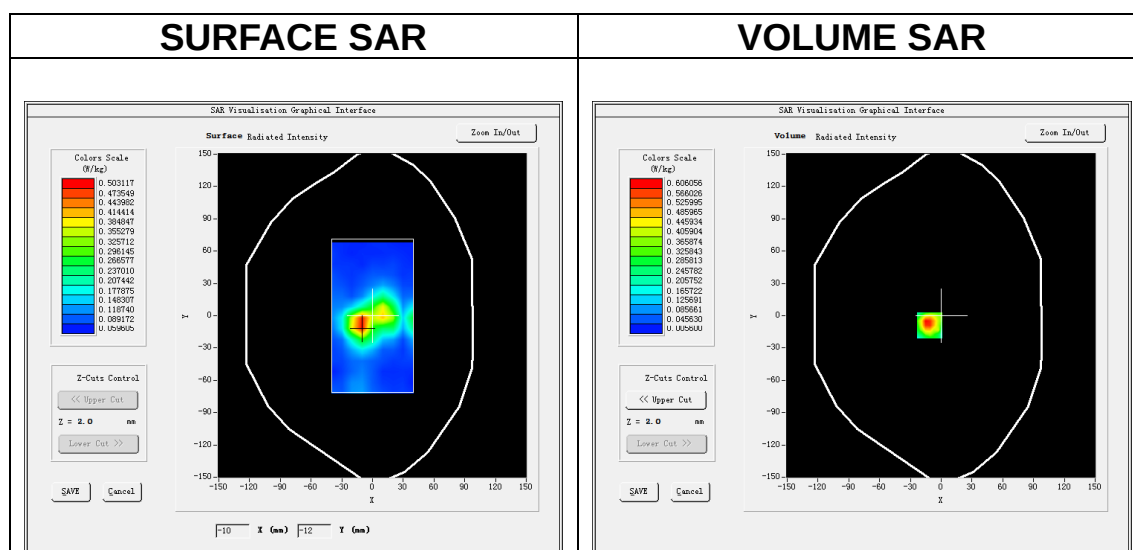


Maximum location: X=-11.00, Y=-9.00


SAR Peak: 1.08 W/kg

SAR 10g (W/Kg)	0.168509
SAR 1g (W/Kg)	0.368824


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SAR (W/ Kg)	1.01 65	0.60 61	0.25 59	0.19 79	0.11 19	0.09 05	0.07 59	0.07 68	0.07 14	0.06 33	0.06 01	0.06 54

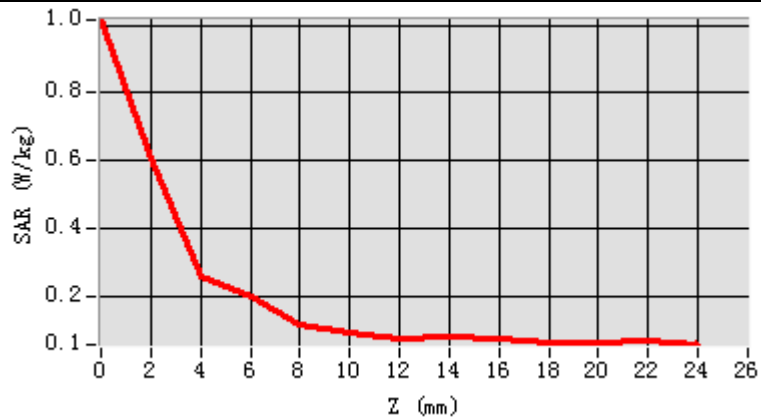

3D screen shot

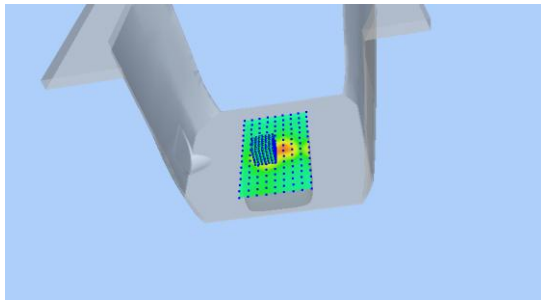

Hot spot position

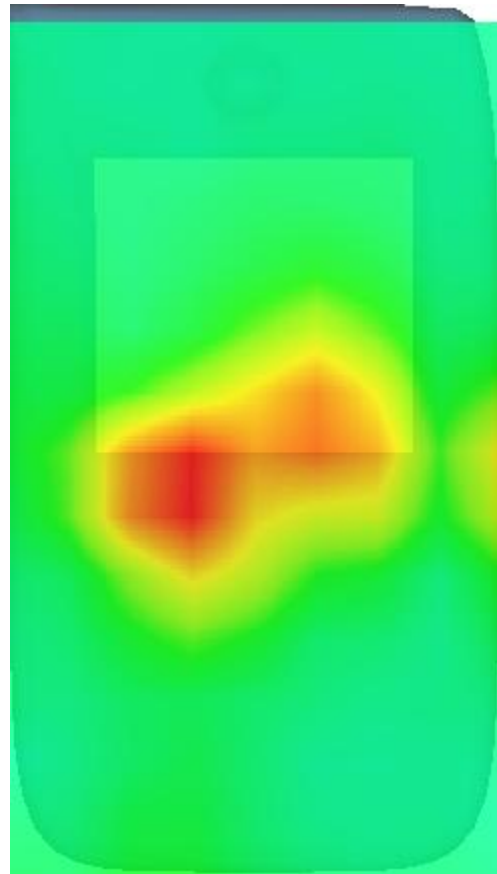

MEASUREMENT 17


Date of measurement: 28/8/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5785.000000
Relative permittivity (real part)	36.299933
Relative permittivity (imaginary part)	16.057011
Conductivity (S/m)	5.160545
Variation (%)	-1.150000

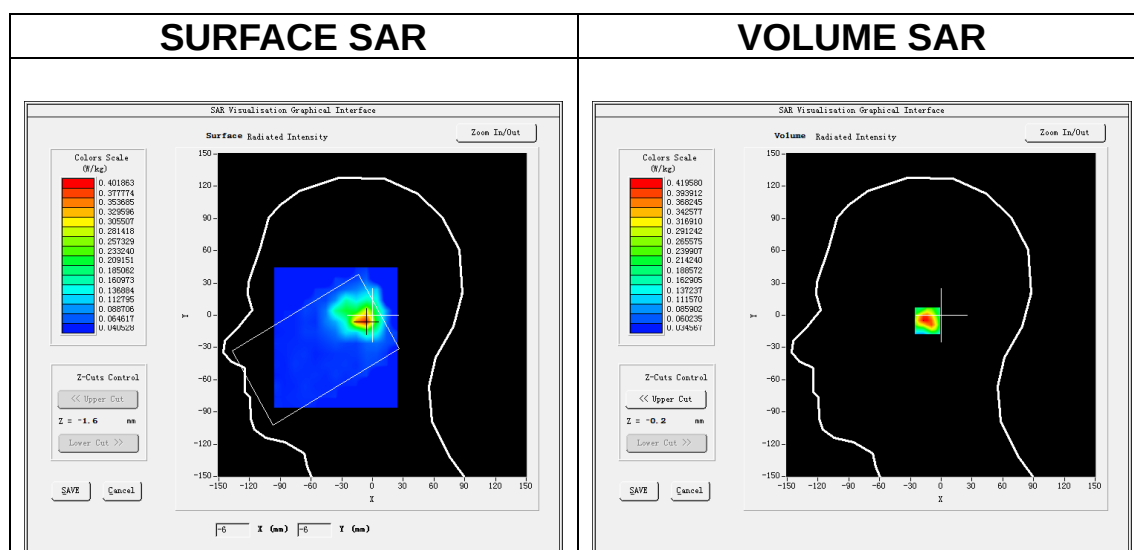


Maximum location: X=-8.00, Y=-5.00


SAR Peak: 1.07 W/kg

SAR 10g (W/Kg)	0.174950
SAR 1g (W/Kg)	0.409985


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SAR (W/ Kg)	0.67 66	0.41 96	0.21 04	0.14 36	0.09 92	0.05 30	0.06 38	0.04 61	0.04 83	0.04 30	0.04 94	0.04 97

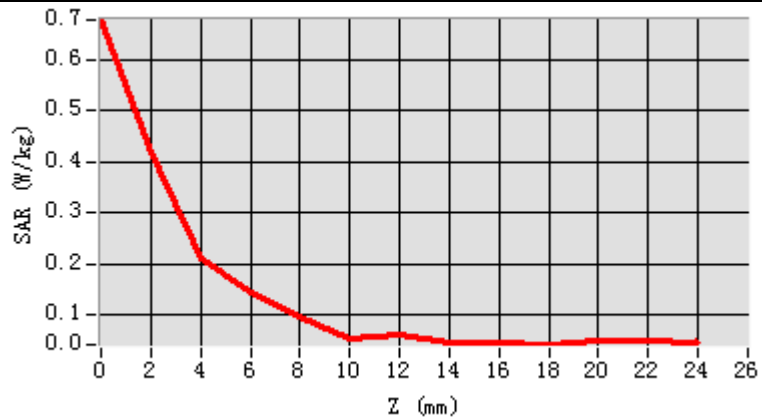

3D screen shot

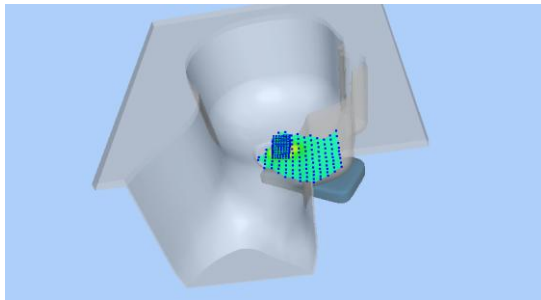

Hot spot position

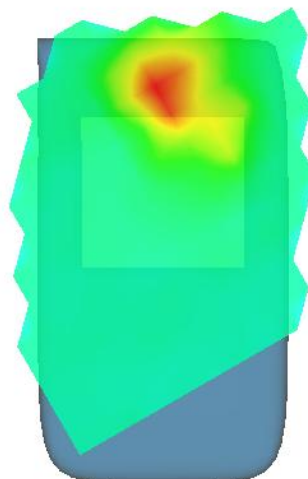

MEASUREMENT 18


Date of measurement: 28/8/2020

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5785.000000
Relative permittivity (real part)	36.299933
Relative permittivity (imaginary part)	16.057011
Conductivity (S/m)	5.160545
Variation (%)	-2.810000

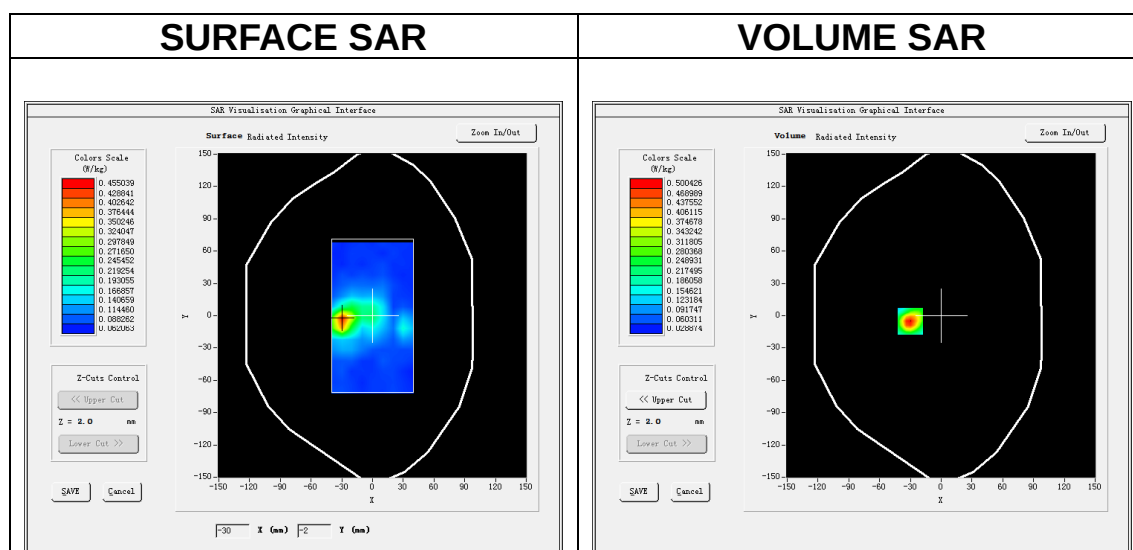


Maximum location: X=-30.00, Y=-5.00


SAR Peak: 0.86 W/kg

SAR 10g (W/Kg)	0.149898
SAR 1g (W/Kg)	0.304019


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SAR (W/ Kg)	0.81 03	0.50 04	0.28 04	0.17 81	0.11 85	0.09 14	0.08 72	0.08 04	0.06 90	0.07 10	0.06 80	0.06 94

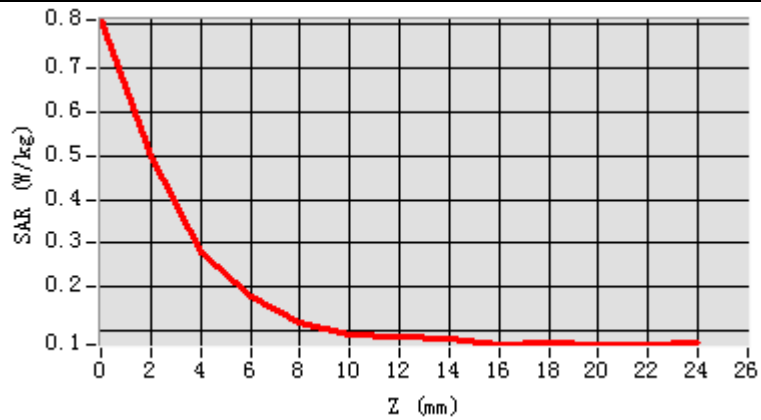

3D screen shot

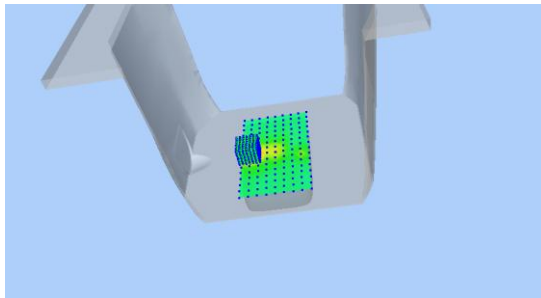

Hot spot position

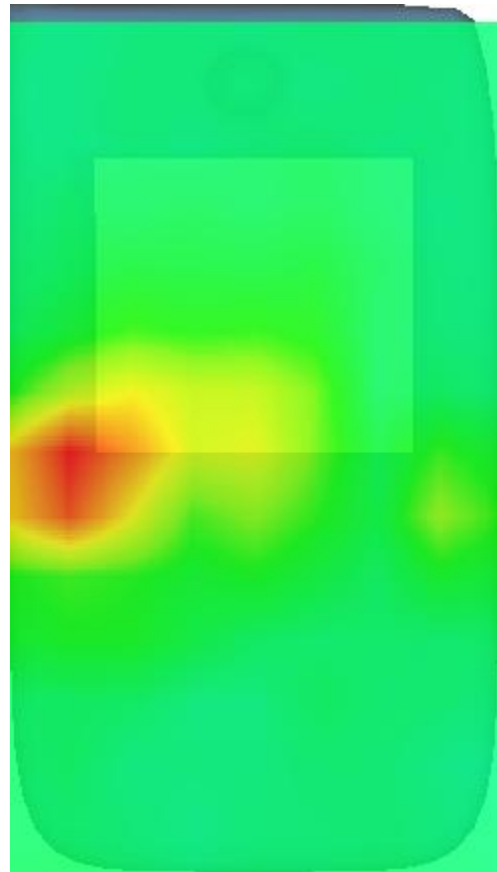

MEASUREMENT 19


Date of measurement: 24/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	2437.000000
Relative permittivity (real part)	40.760612
Relative permittivity (imaginary part)	13.446917
Conductivity (S/m)	1.820563
Variation (%)	-1.820000

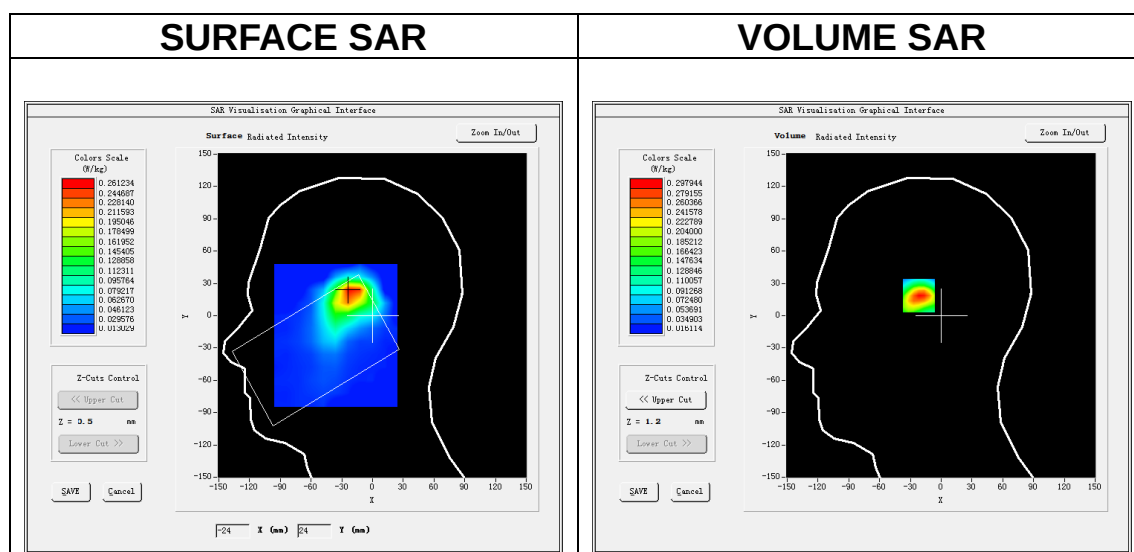

Maximum location: X=-21.00, Y=21.00

SAR Peak: 0.49 W/kg

SAR 10g (W/Kg)	0.143001
SAR 1g (W/Kg)	0.274491

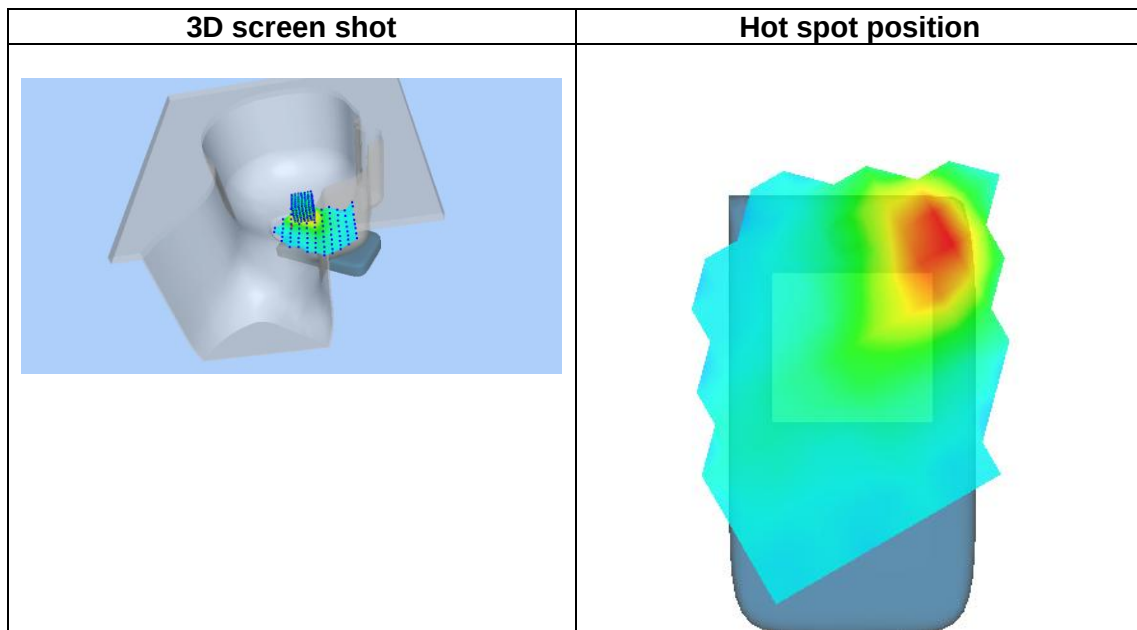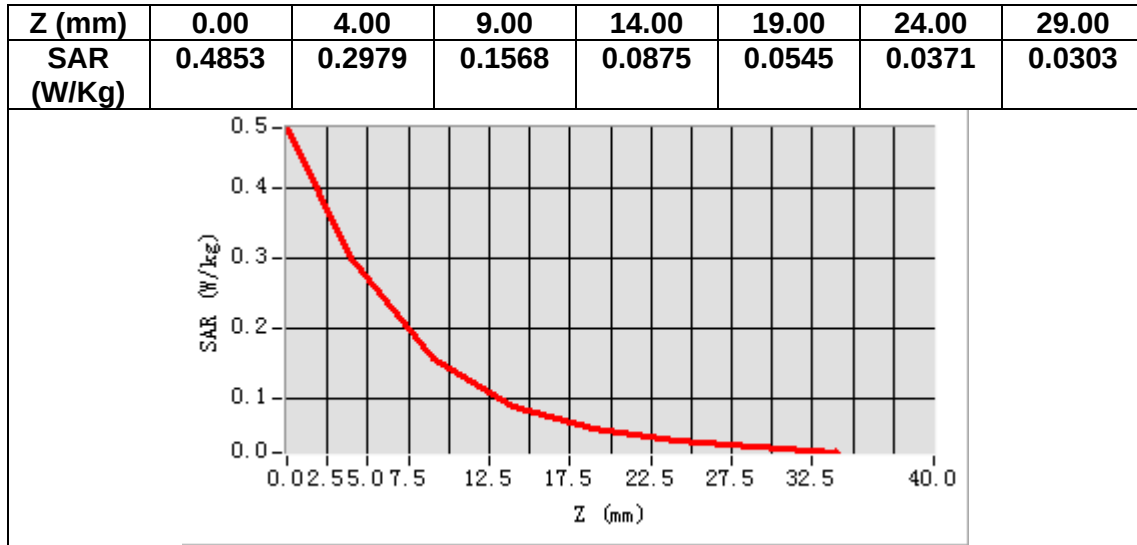

MEASUREMENT 20


Date of measurement: 24/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>

B. SAR Measurement Results


Frequency (MHz)	2437.000000
Relative permittivity (real part)	40.760612
Relative permittivity (imaginary part)	13.446917
Conductivity (S/m)	1.820563
Variation (%)	-2.010000

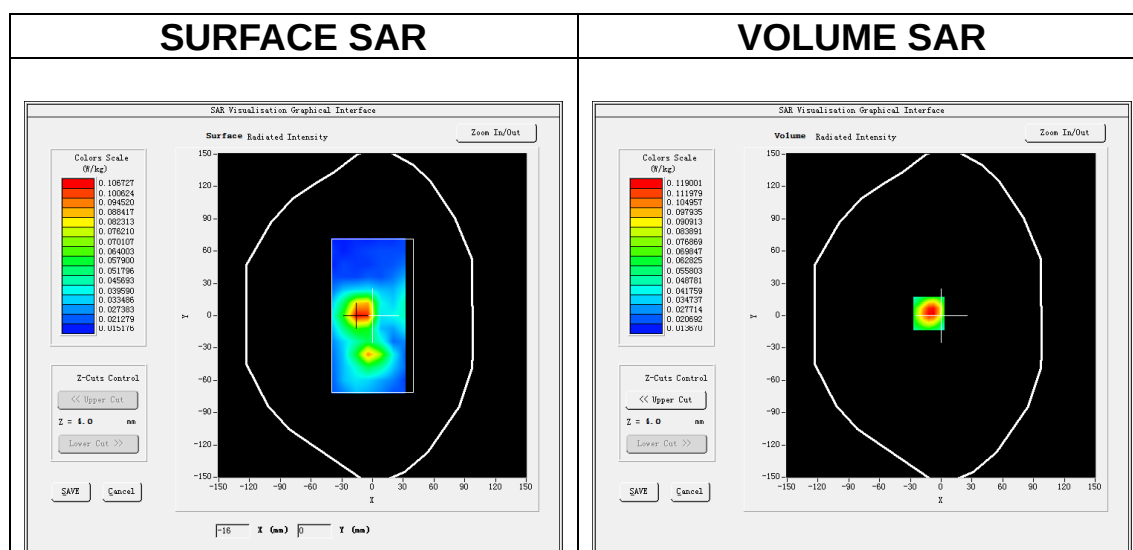


Maximum location: X=-12.00, Y=2.00

SAR Peak: 0.18 W/kg


SAR 10g (W/Kg)	0.064985
SAR 1g (W/Kg)	0.112550

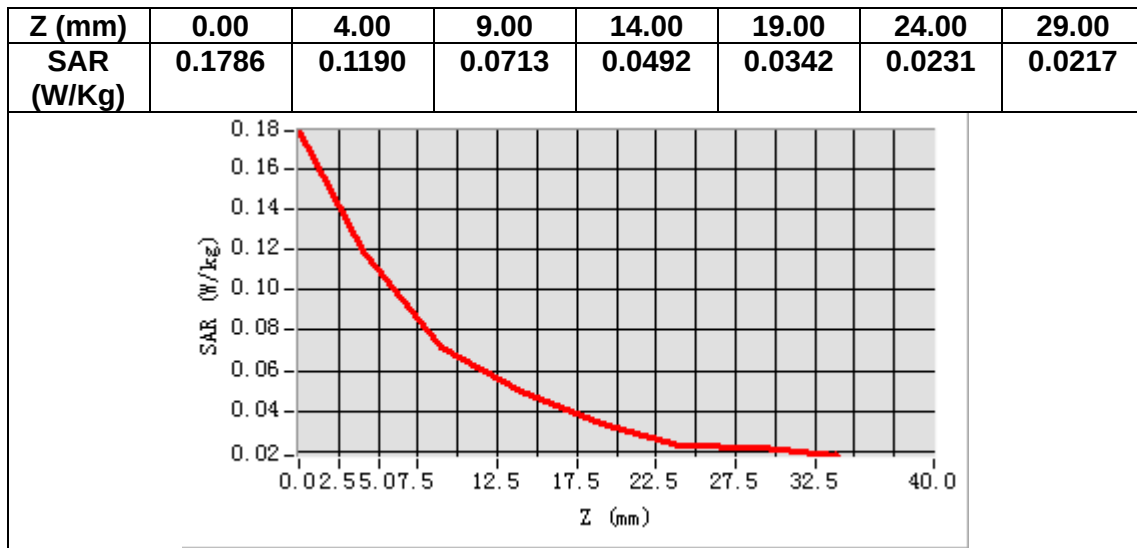

3D screen shot

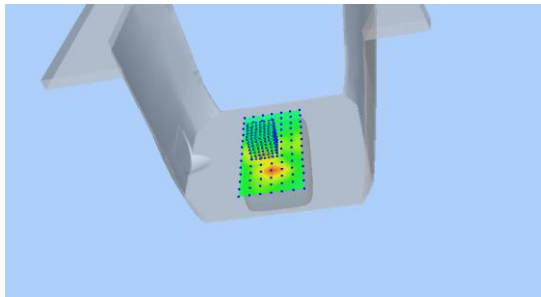

Hot spot position

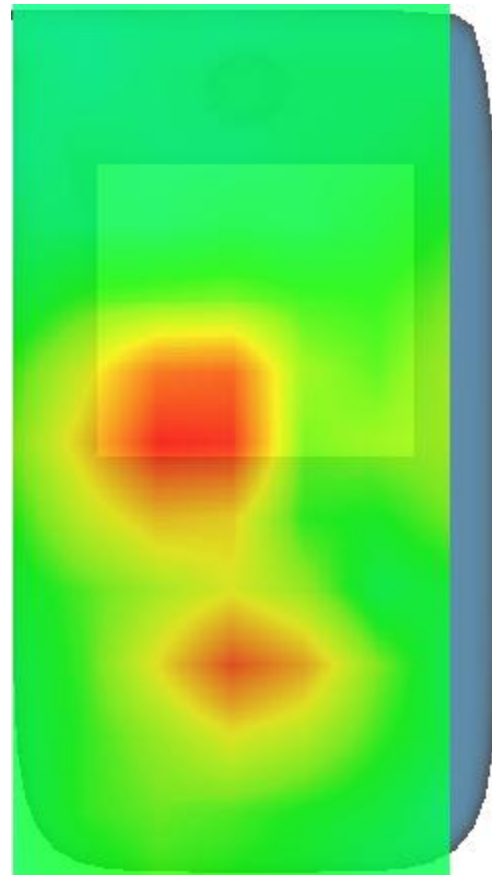

MEASUREMENT 21


Date of measurement: 3/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.167542
Relative permittivity (imaginary part)	13.624232
Conductivity (S/m)	1.422975
Variation (%)	-2.680000

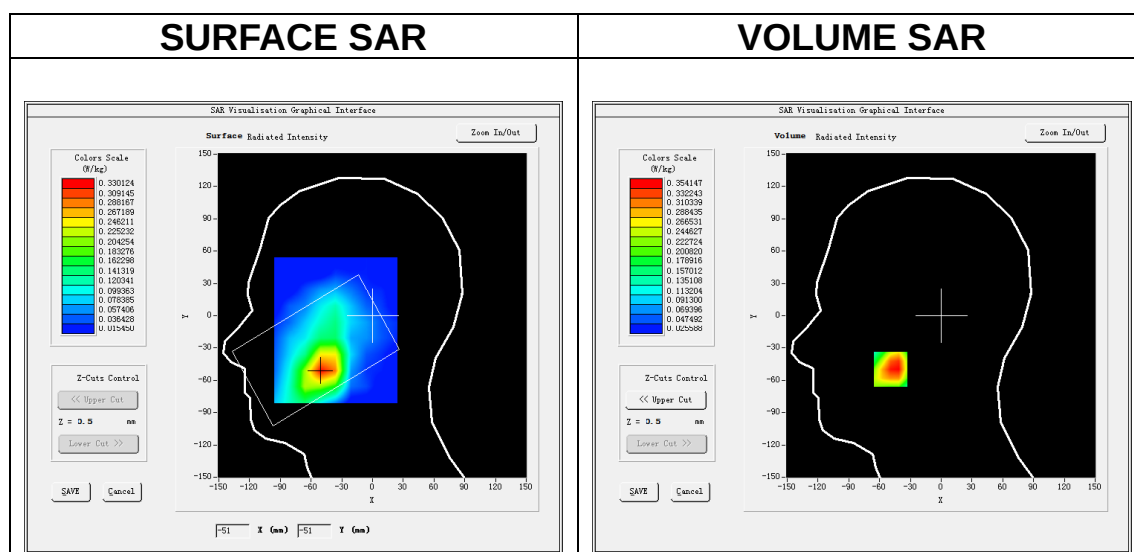

Maximum location: X=-49.00, Y=-50.00

SAR Peak: 0.52 W/kg

SAR 10g (W/Kg)	0.212709
SAR 1g (W/Kg)	0.355033

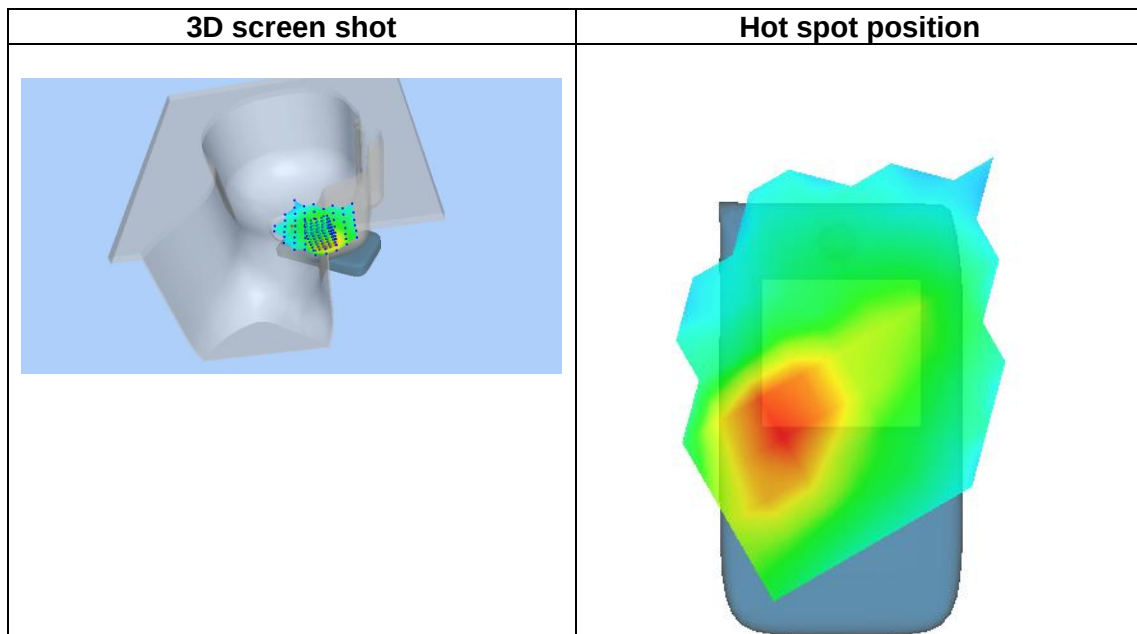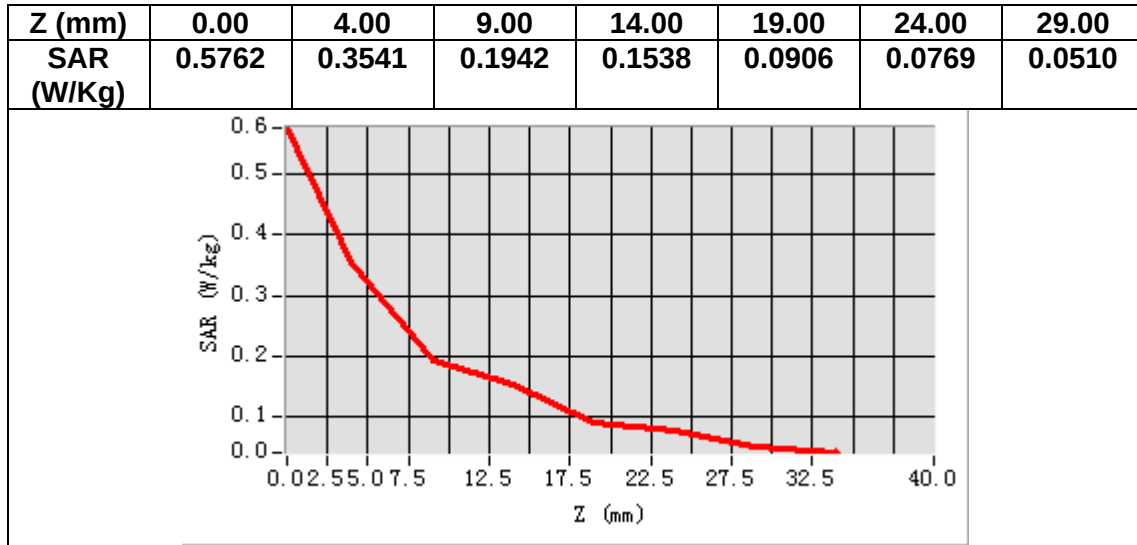

MEASUREMENT 22


Date of measurement: 3/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.167542
Relative permittivity (imaginary part)	13.624232
Conductivity (S/m)	1.422975
Variation (%)	-0.590000

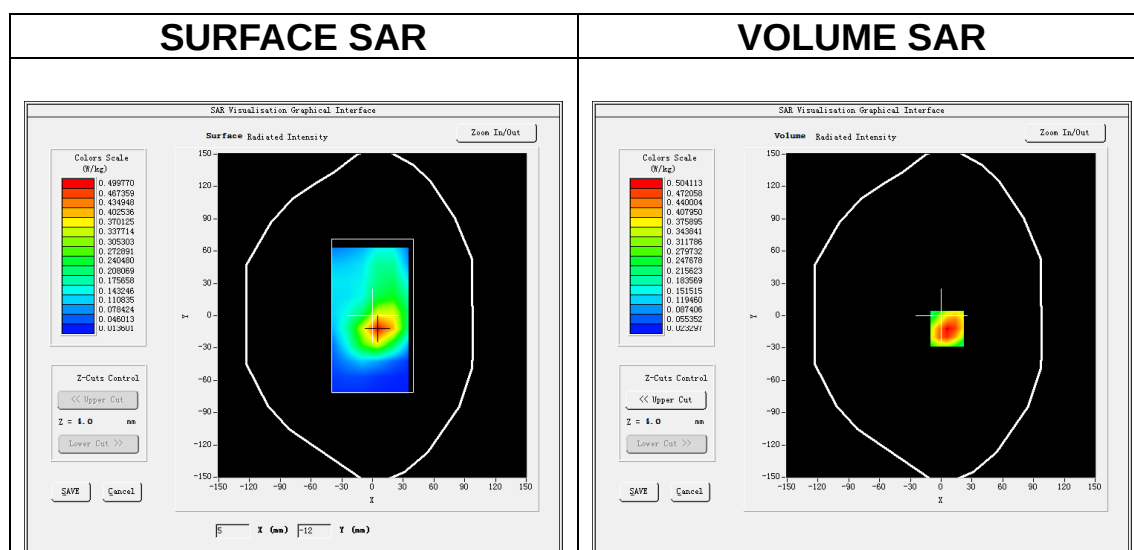


Maximum location: X=6.00, Y=-12.00

SAR Peak: 0.77 W/kg


SAR 10g (W/Kg)	0.281150
SAR 1g (W/Kg)	0.499843

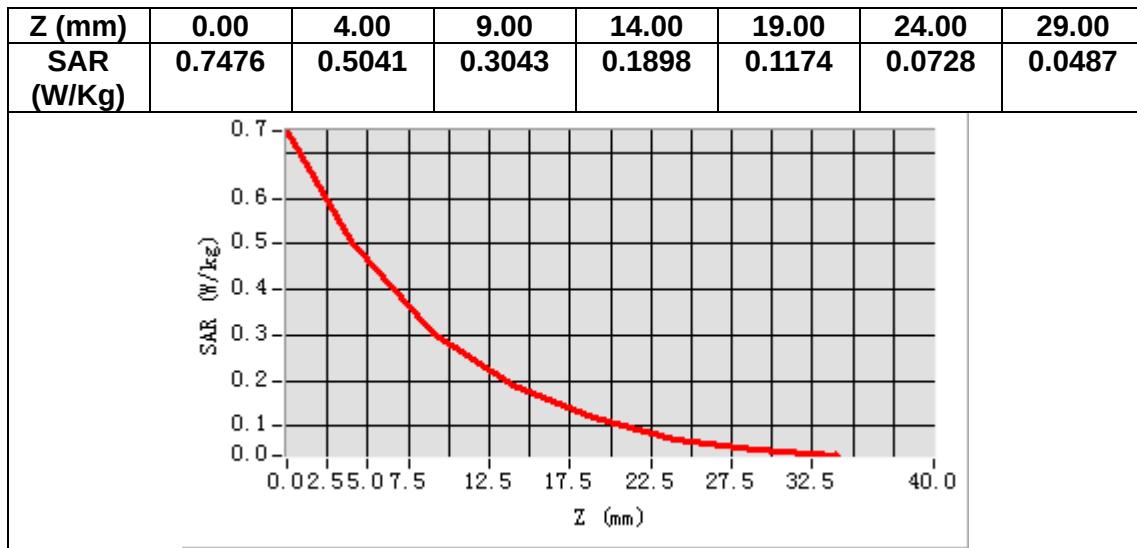

3D screen shot

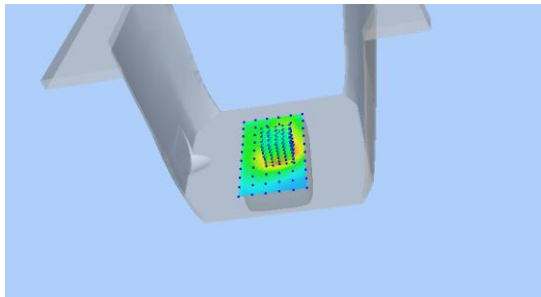

Hot spot position

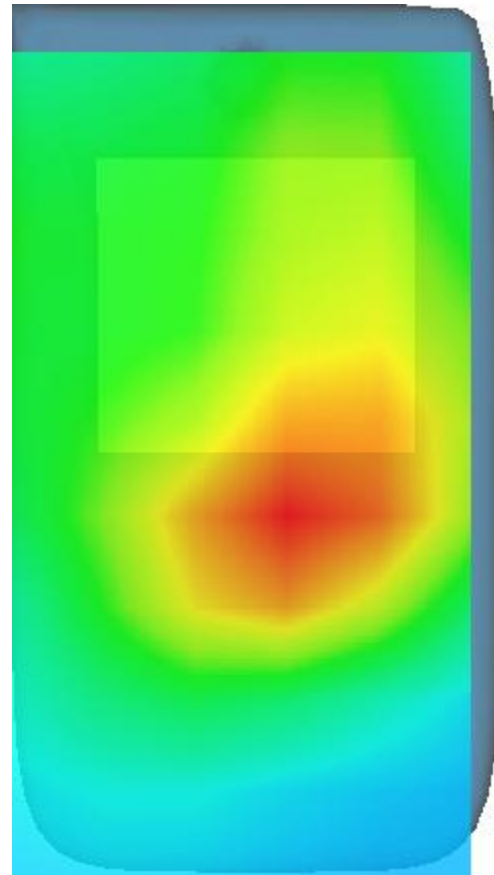

MEASUREMENT 23


Date of measurement: 12/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1732.500000
Relative permittivity (real part)	40.074001
Relative permittivity (imaginary part)	13.661838
Conductivity (S/m)	1.314952
Variation (%)	1.390000

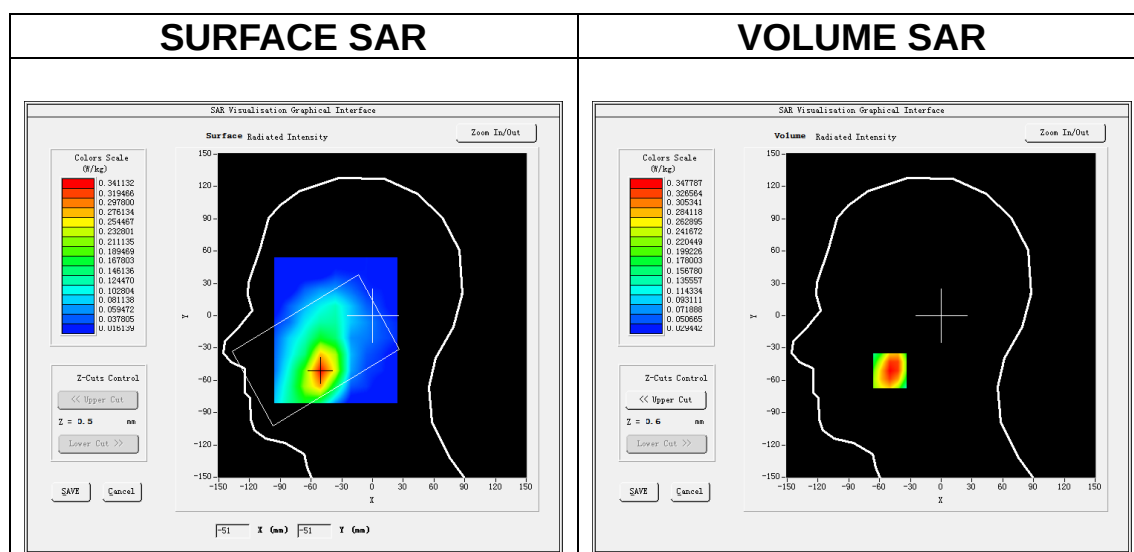

Maximum location: X=-50.00, Y=-51.00

SAR Peak: 0.49 W/kg

SAR 10g (W/Kg)	0.216845
SAR 1g (W/Kg)	0.338494

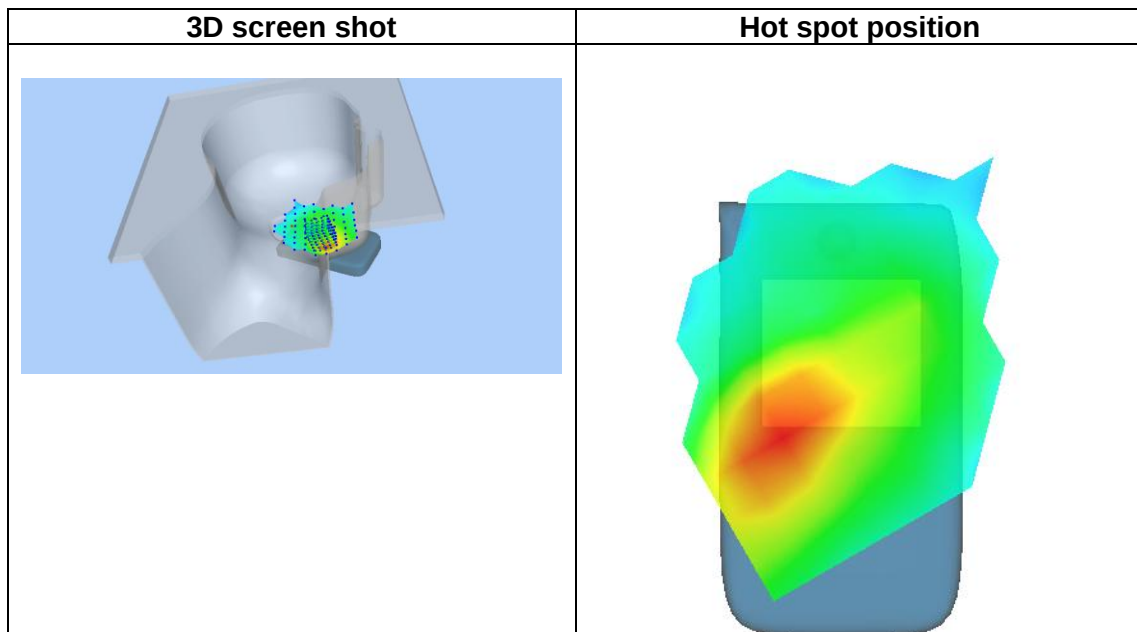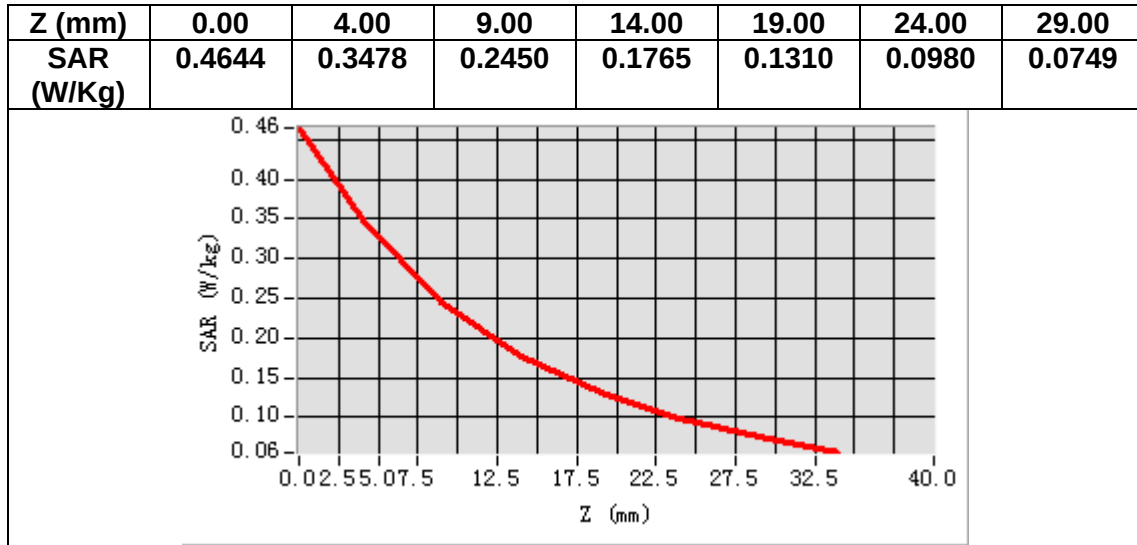

MEASUREMENT 24


Date of measurement: 12/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results


Frequency (MHz)	1732.500000
Relative permittivity (real part)	40.074001
Relative permittivity (imaginary part)	13.661838
Conductivity (S/m)	1.314952
Variation (%)	-0.690000

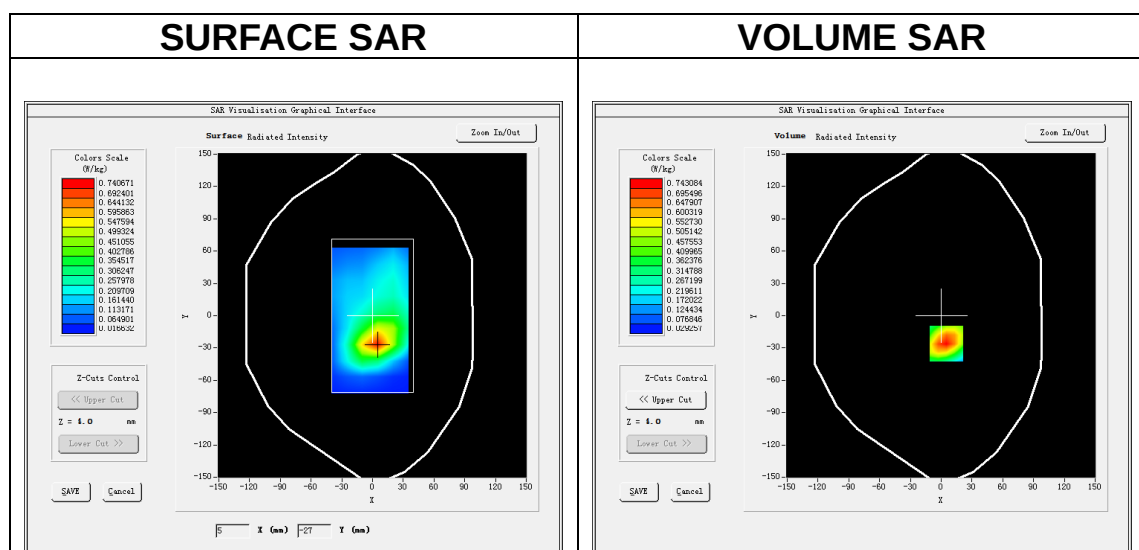


Maximum location: X=5.00, Y=-26.00

SAR Peak: 1.08 W/kg


SAR 10g (W/Kg)	0.405026
SAR 1g (W/Kg)	0.700310

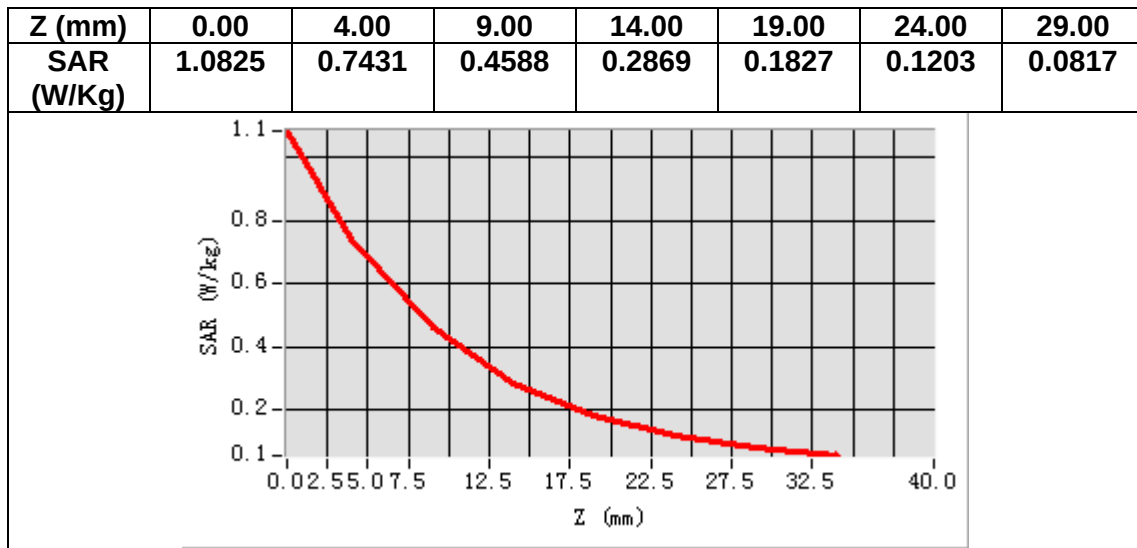

3D screen shot

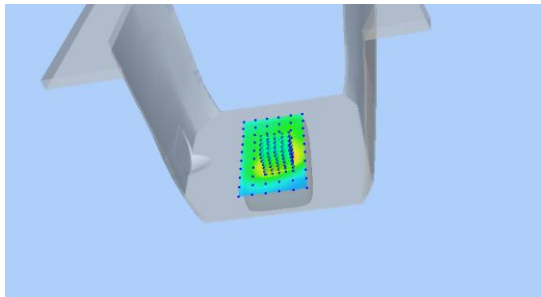

Hot spot position

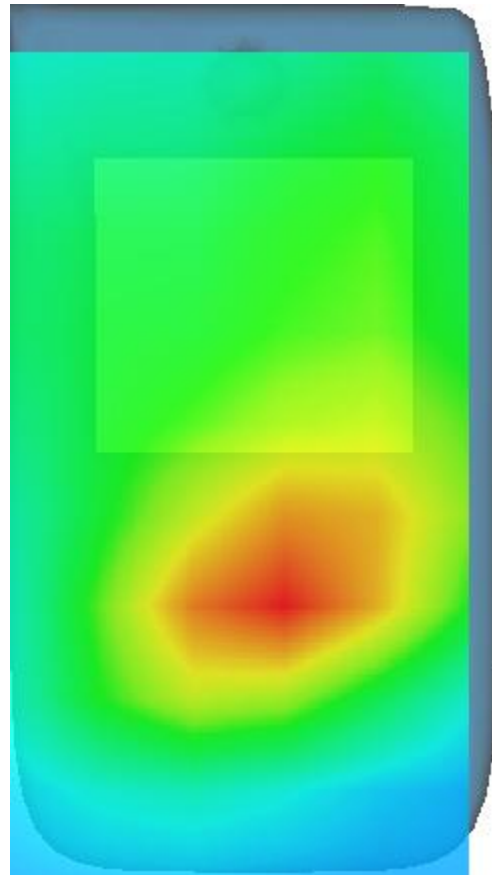

MEASUREMENT 25


Date of measurement: 2/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	836.500000
Relative permittivity (real part)	42.596016
Relative permittivity (imaginary part)	19.742624
Conductivity (S/m)	0.917484
Variation (%)	1.450000

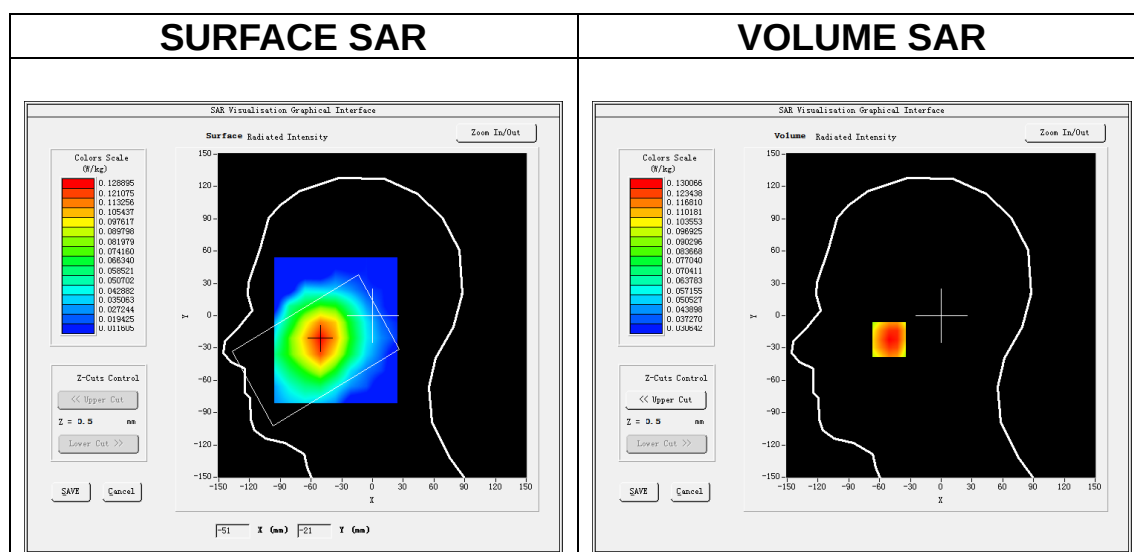

Maximum location: X=-51.00, Y=-22.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.103445
SAR 1g (W/Kg)	0.127587

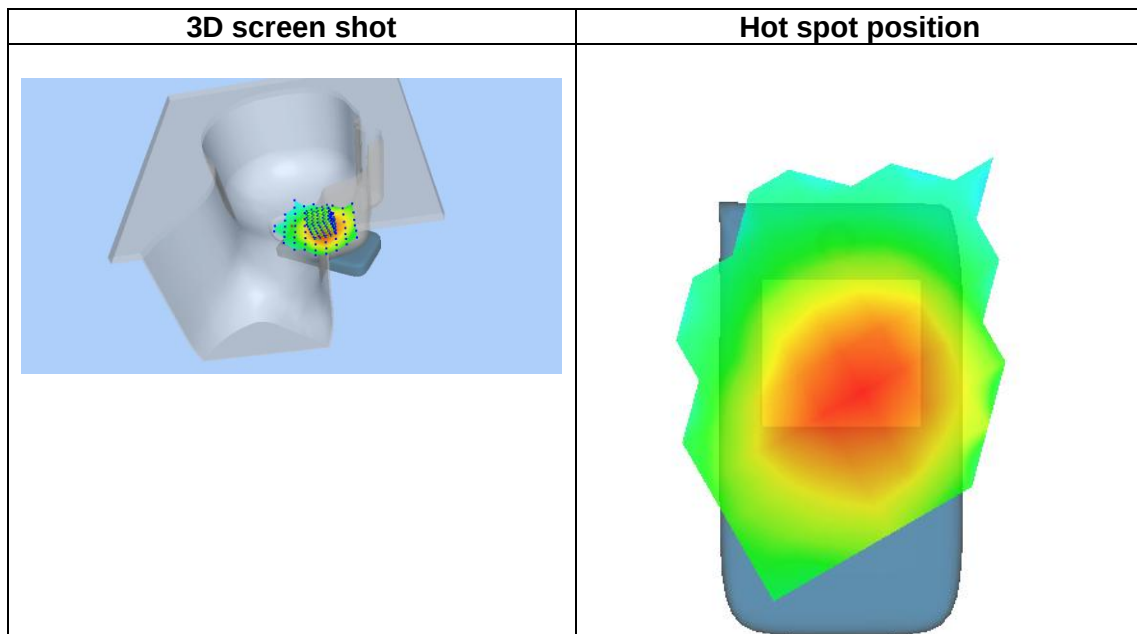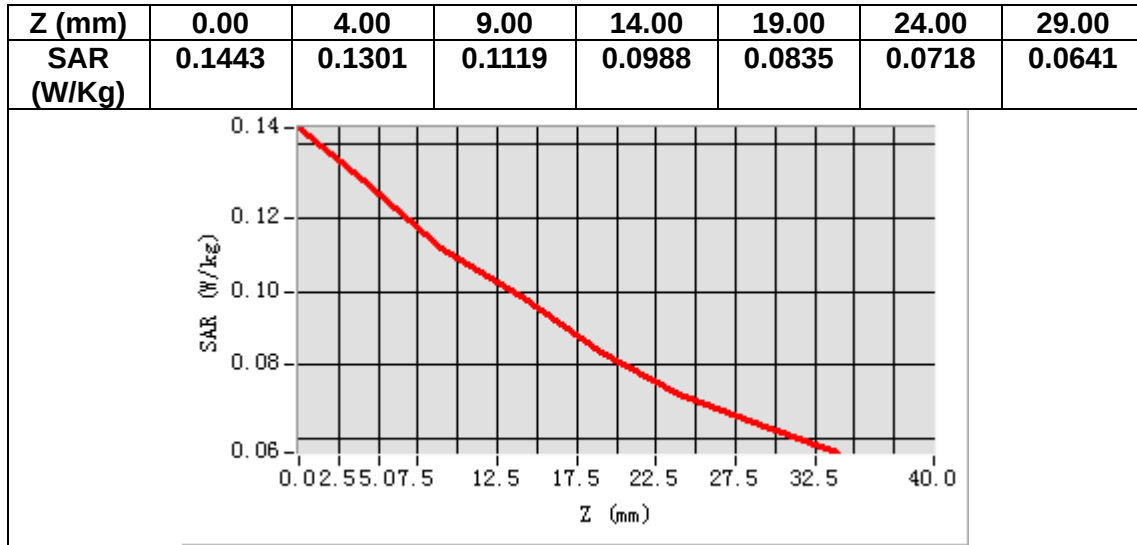

MEASUREMENT 26


Date of measurement: 2/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results


Frequency (MHz)	836.500000
Relative permittivity (real part)	42.596016
Relative permittivity (imaginary part)	19.742624
Conductivity (S/m)	0.917484
Variation (%)	-0.190000

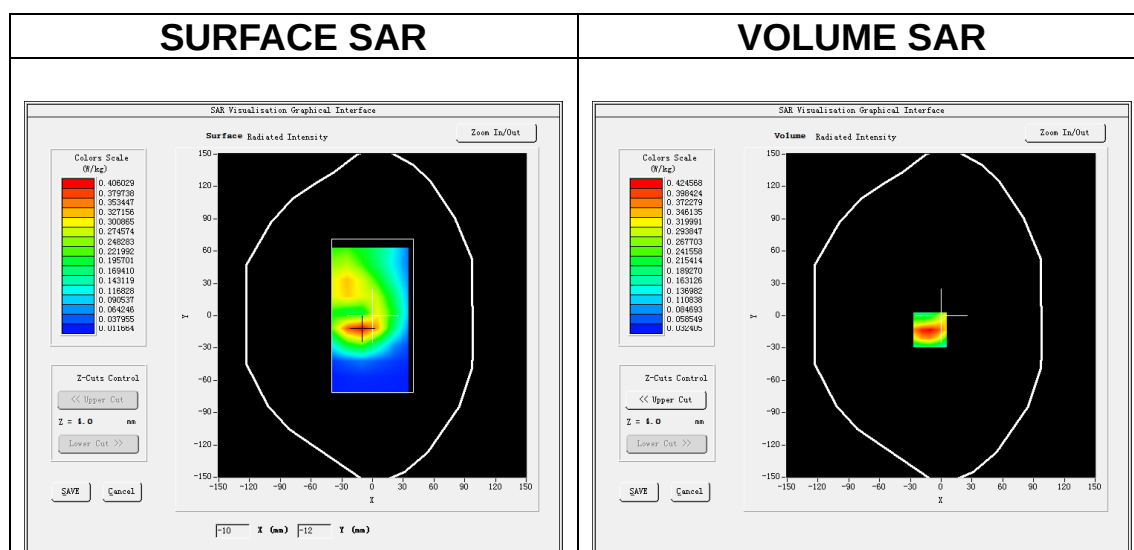


Maximum location: X=-11.00, Y=-13.00

SAR Peak: 0.64 W/kg


SAR 10g (W/Kg)	0.237778
SAR 1g (W/Kg)	0.410167

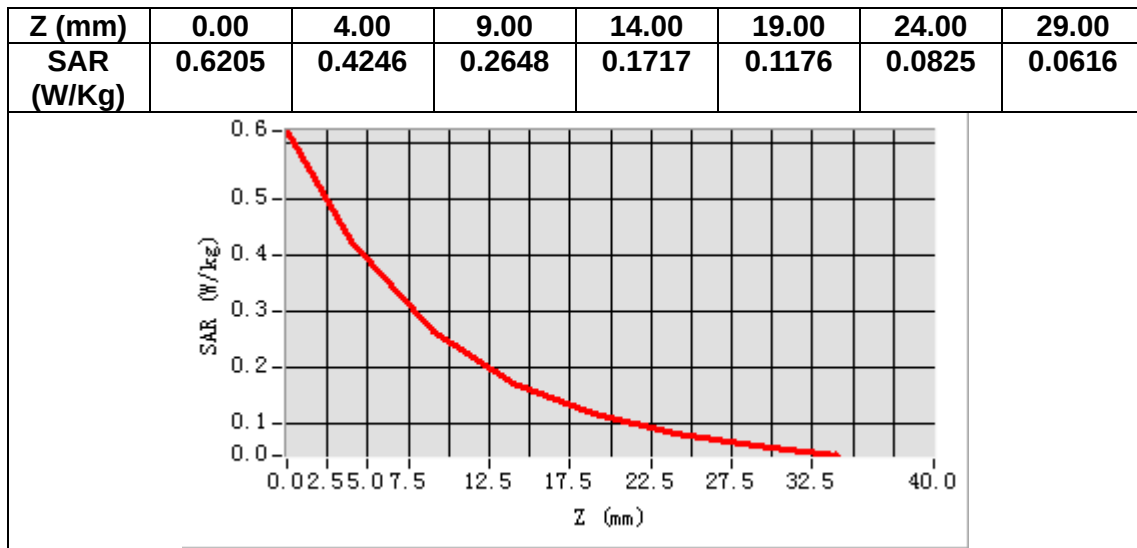

3D screen shot

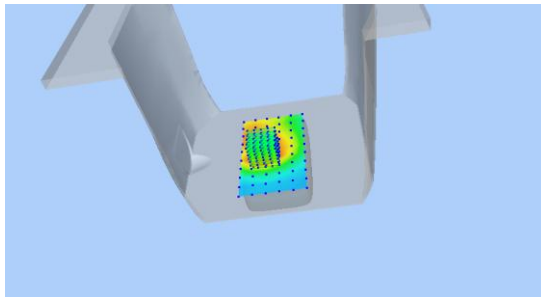

Hot spot position

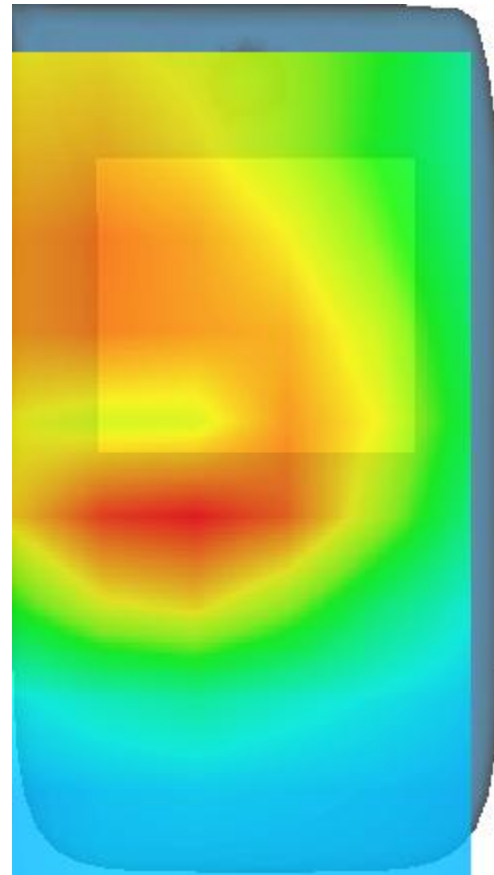

MEASUREMENT 27


Date of measurement: 6/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	2535.000000
Relative permittivity (real part)	40.199814
Relative permittivity (imaginary part)	13.783051
Conductivity (S/m)	1.941113
Variation (%)	2.560000

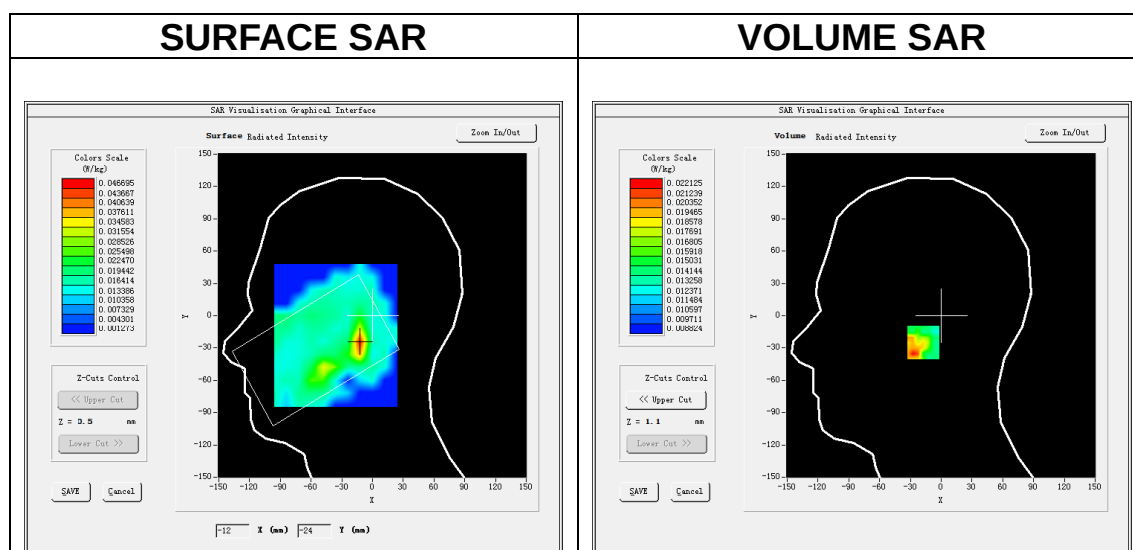

Maximum location: X=-12.00, Y=-25.00

SAR Peak: 0.03 W/kg

SAR 10g (W/Kg)	0.016609
SAR 1g (W/Kg)	0.021094

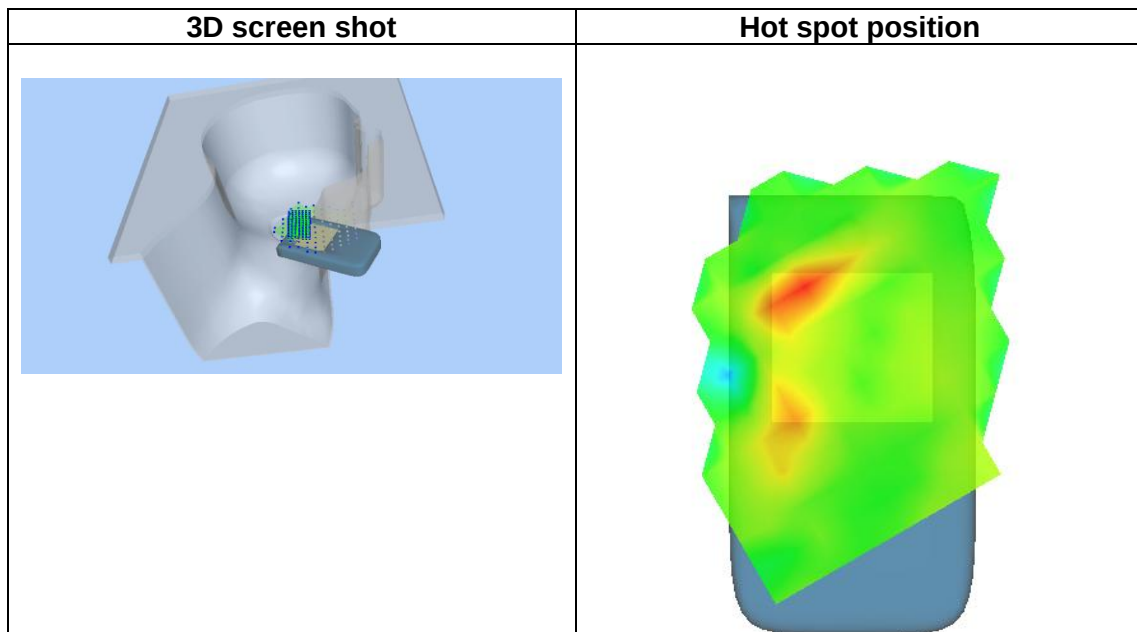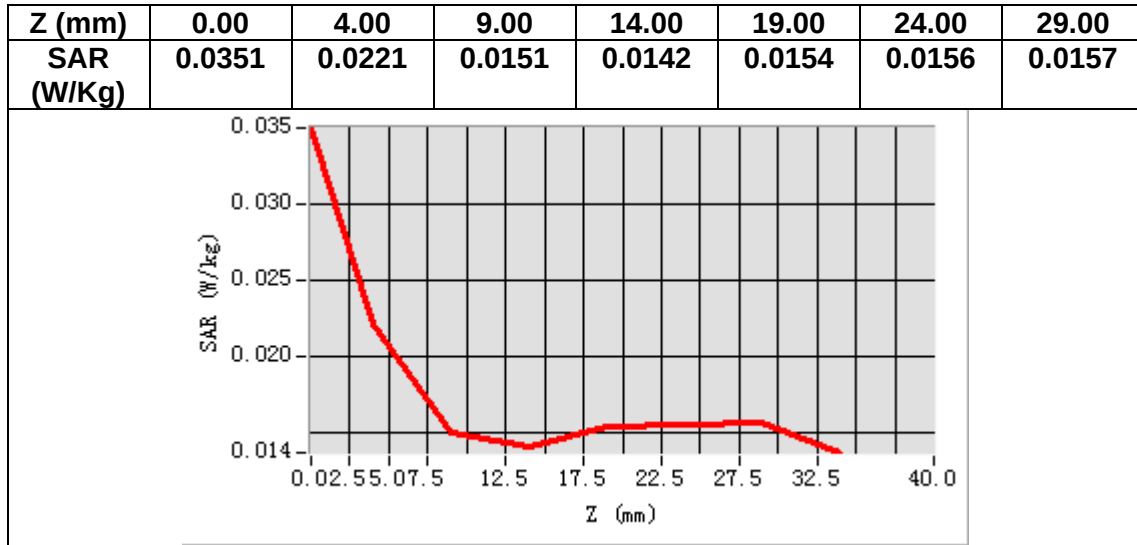

MEASUREMENT 28


Date of measurement: 6/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	2535.000000
Relative permittivity (real part)	40.199814
Relative permittivity (imaginary part)	13.783051
Conductivity (S/m)	1.941113
Variation (%)	-1.330000

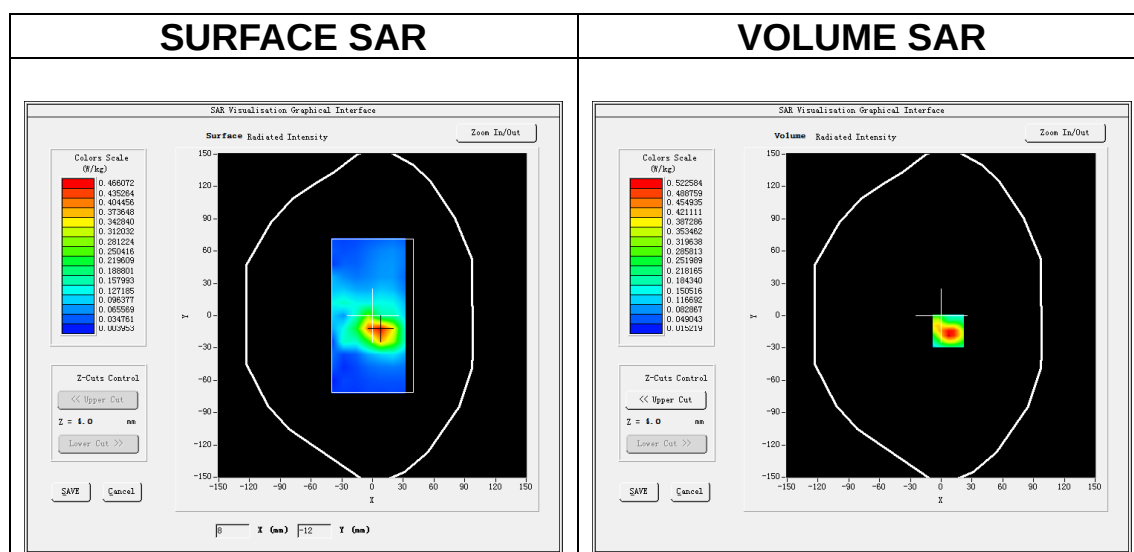

Maximum location: X=7.00, Y=-14.00

SAR Peak: 0.81 W/kg

SAR 10g (W/Kg)	0.247525
SAR 1g (W/Kg)	0.489152

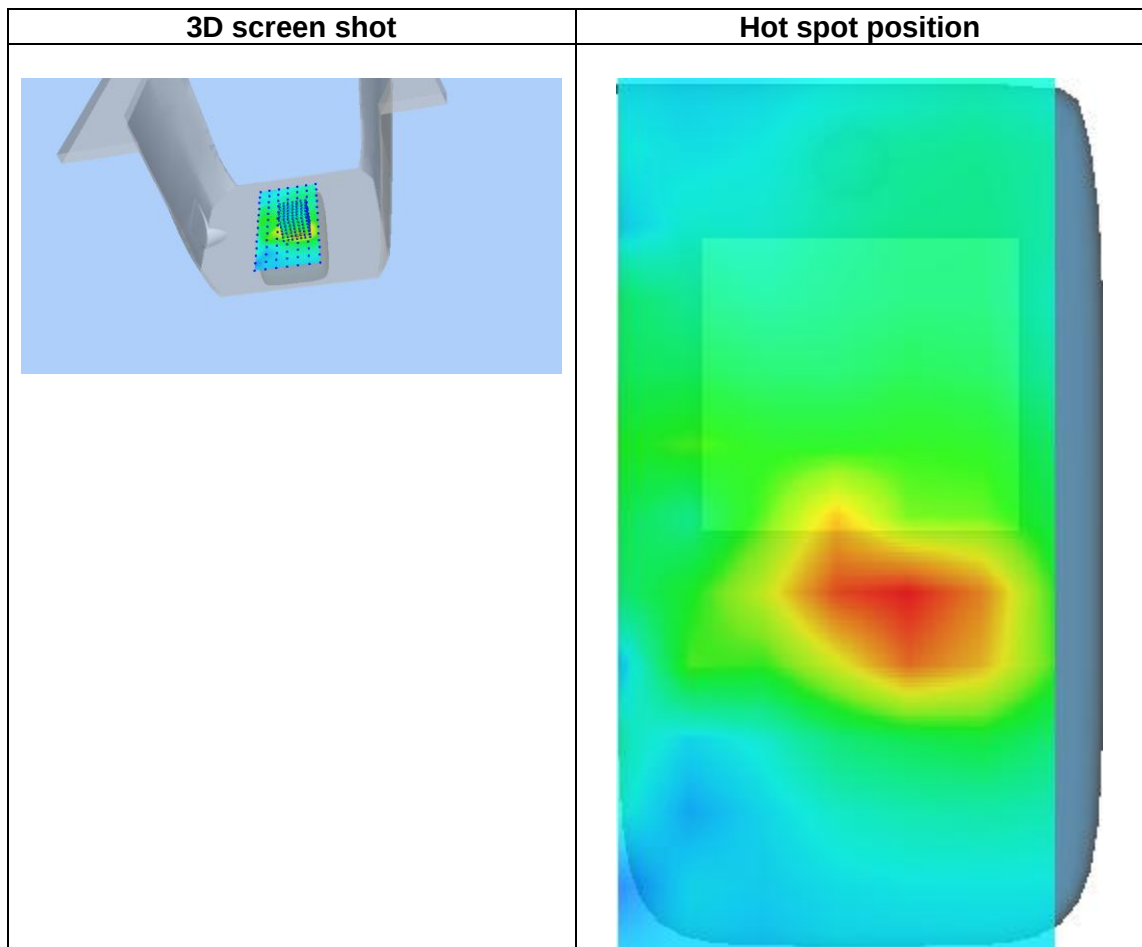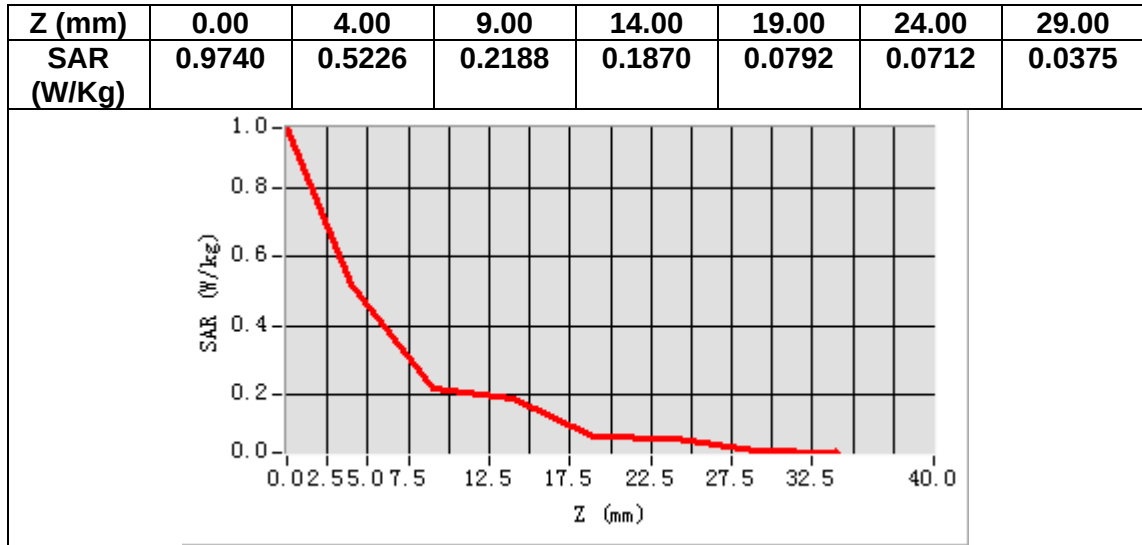

MEASUREMENT 29


Date of measurement: 9/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	707.500000
Relative permittivity (real part)	42.013905
Relative permittivity (imaginary part)	21.671585
Conductivity (S/m)	0.851814
Variation (%)	0.660000

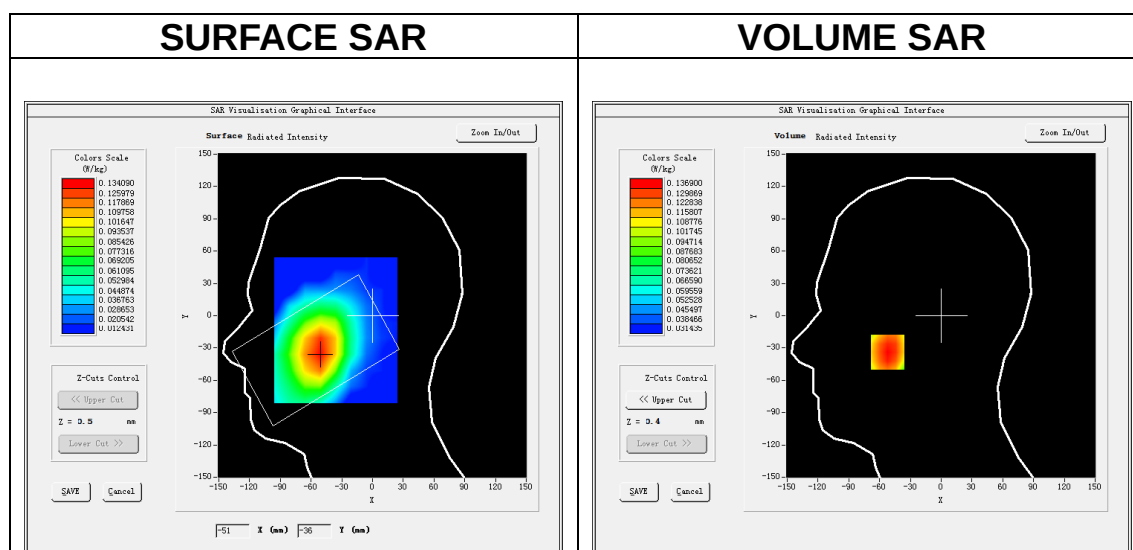

Maximum location: X=-52.00, Y=-34.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.113877
SAR 1g (W/Kg)	0.134692

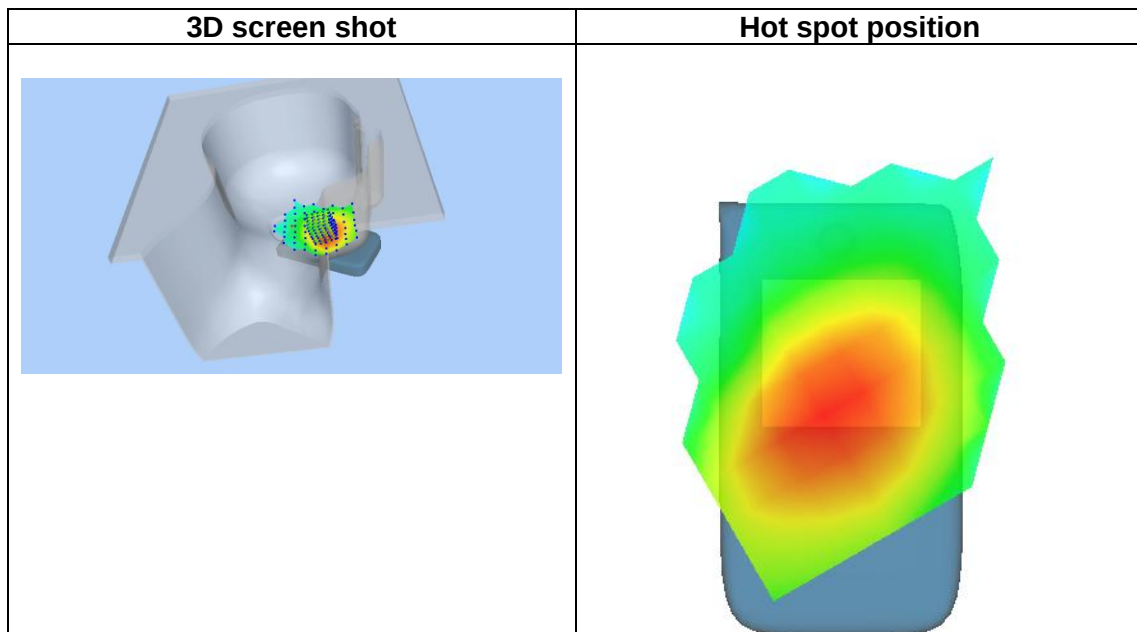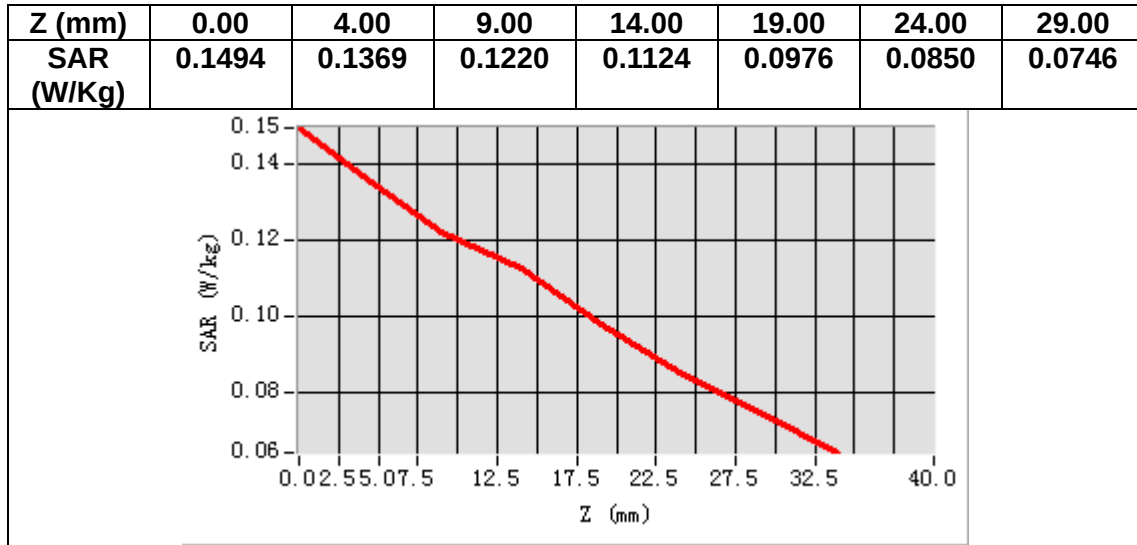

MEASUREMENT 30


Date of measurement: 9/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	707.500000
Relative permittivity (real part)	42.013905
Relative permittivity (imaginary part)	21.671585
Conductivity (S/m)	0.851814
Variation (%)	0.460000

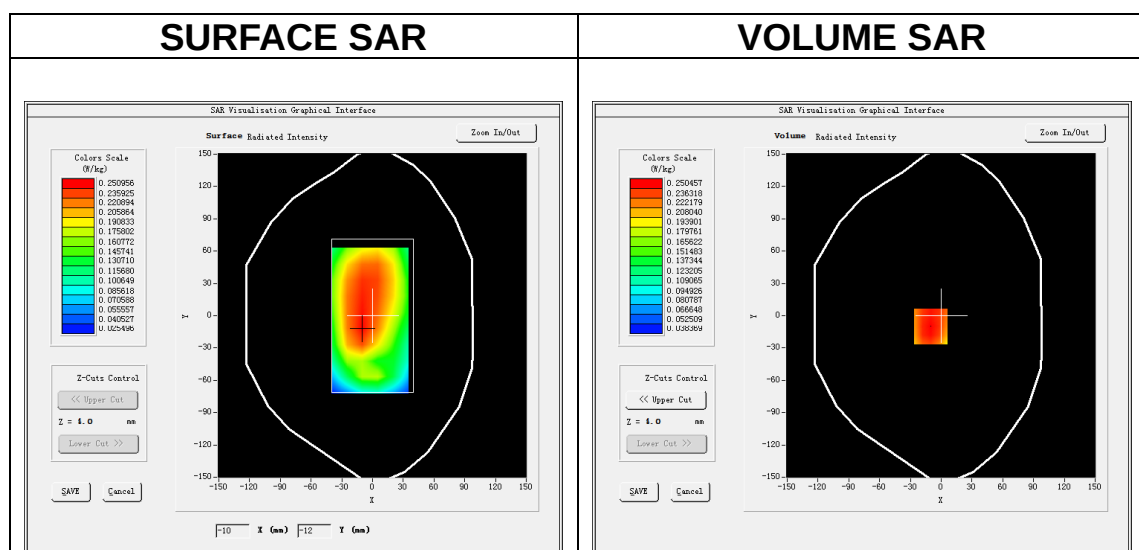

Maximum location: X=-10.00, Y=-10.00

SAR Peak: 0.30 W/kg

SAR 10g (W/Kg)	0.194267
SAR 1g (W/Kg)	0.245161

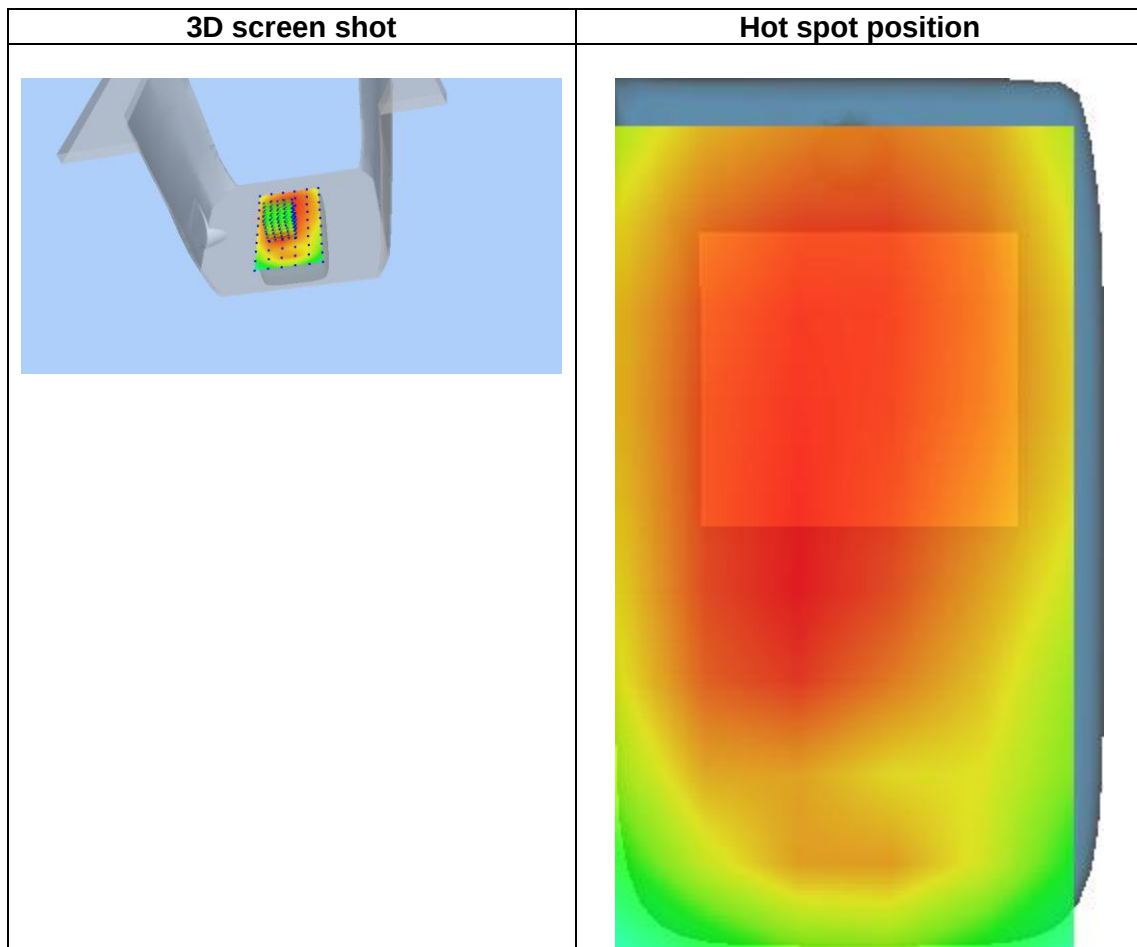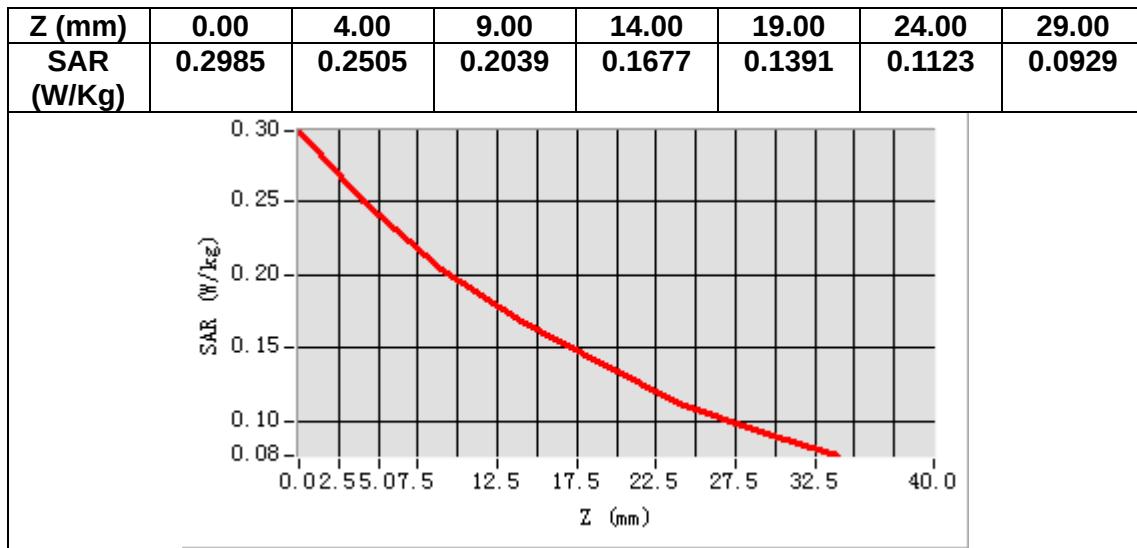

MEASUREMENT 31


Date of measurement: 9/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	710.000000
Relative permittivity (real part)	41.998554
Relative permittivity (imaginary part)	21.612036
Conductivity (S/m)	0.852475
Variation (%)	0.170000

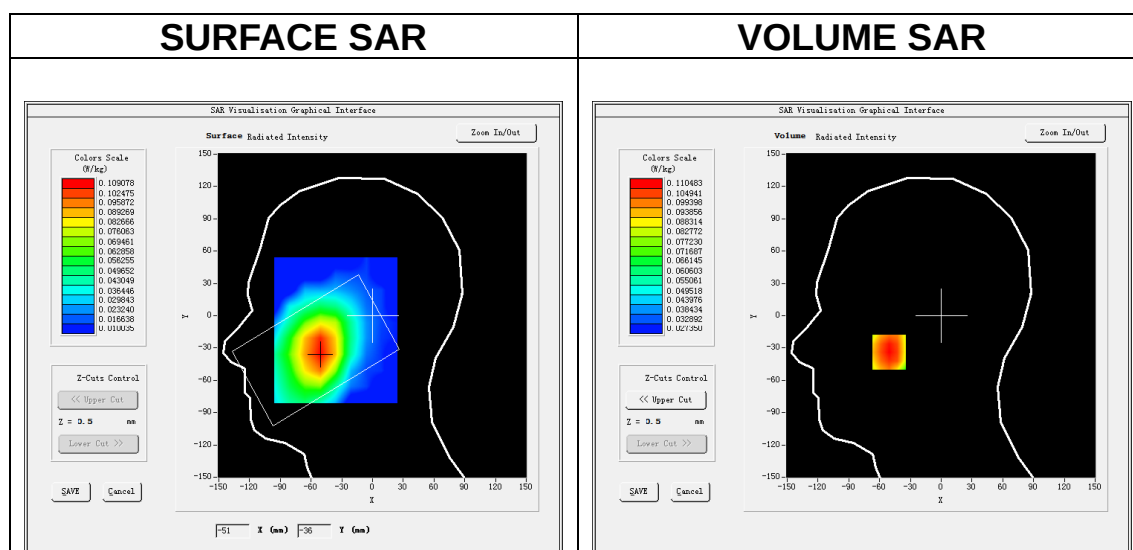

Maximum location: X=-51.00, Y=-34.00

SAR Peak: 0.13 W/kg

SAR 10g (W/Kg)	0.091373
SAR 1g (W/Kg)	0.108446

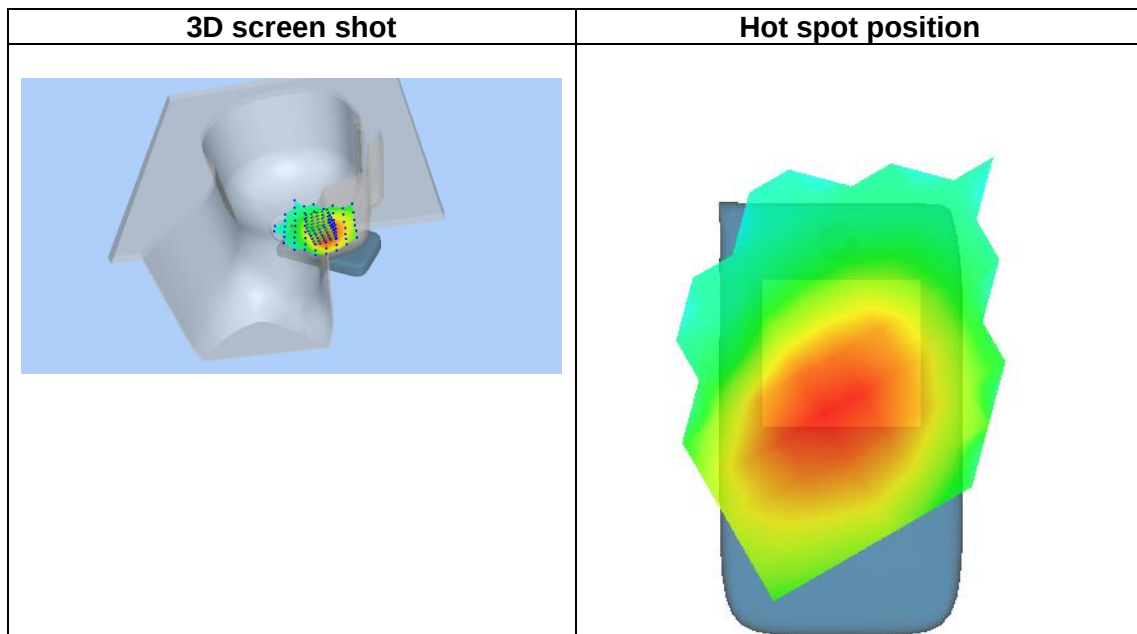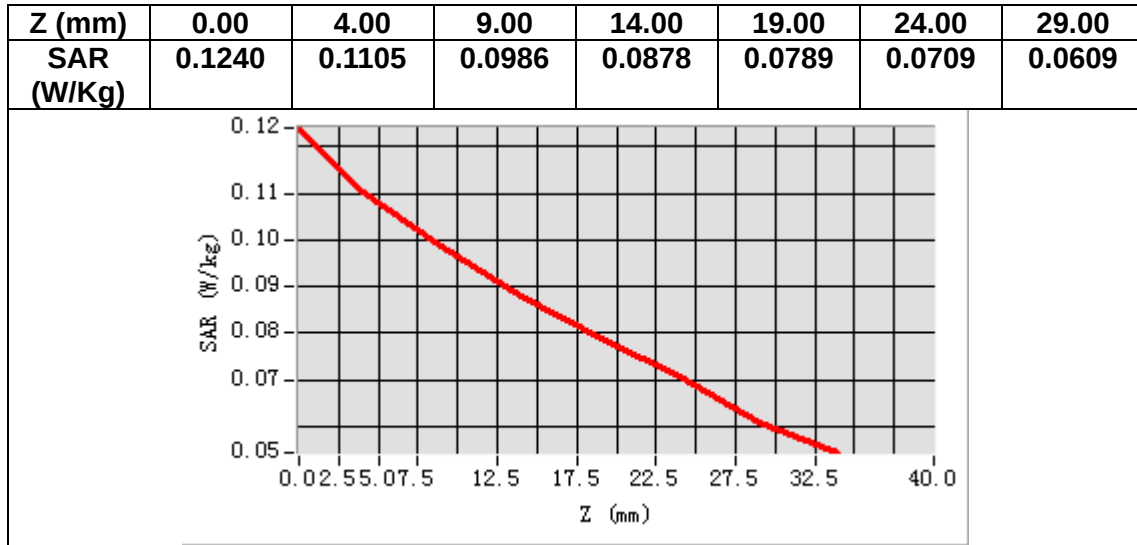

MEASUREMENT 32


Date of measurement: 9/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	710.000000
Relative permittivity (real part)	41.998554
Relative permittivity (imaginary part)	21.612036
Conductivity (S/m)	0.852475
Variation (%)	0.660000

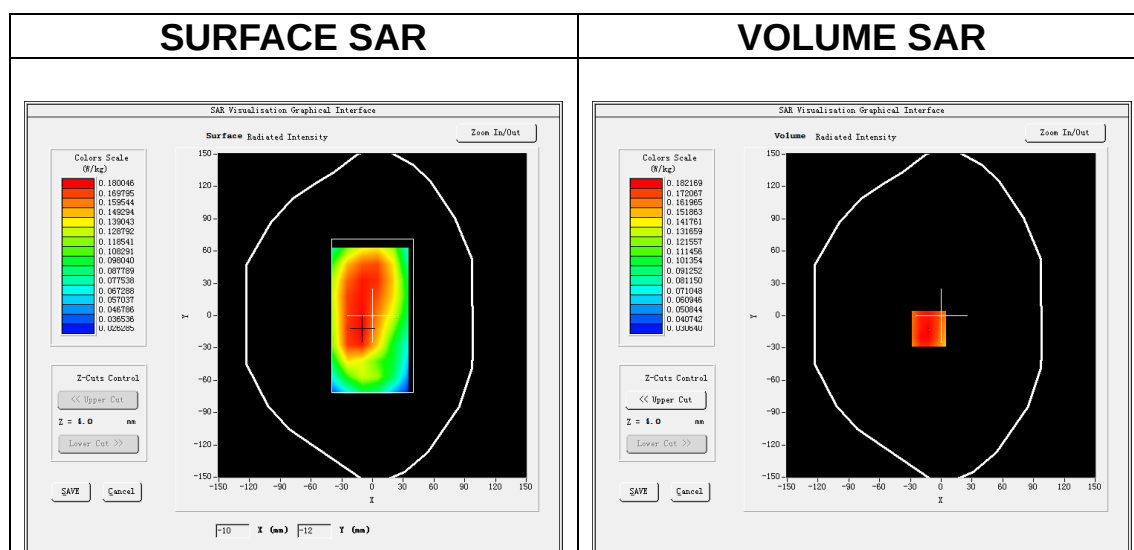

Maximum location: X=-12.00, Y=-12.00

SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.143519
SAR 1g (W/Kg)	0.180425

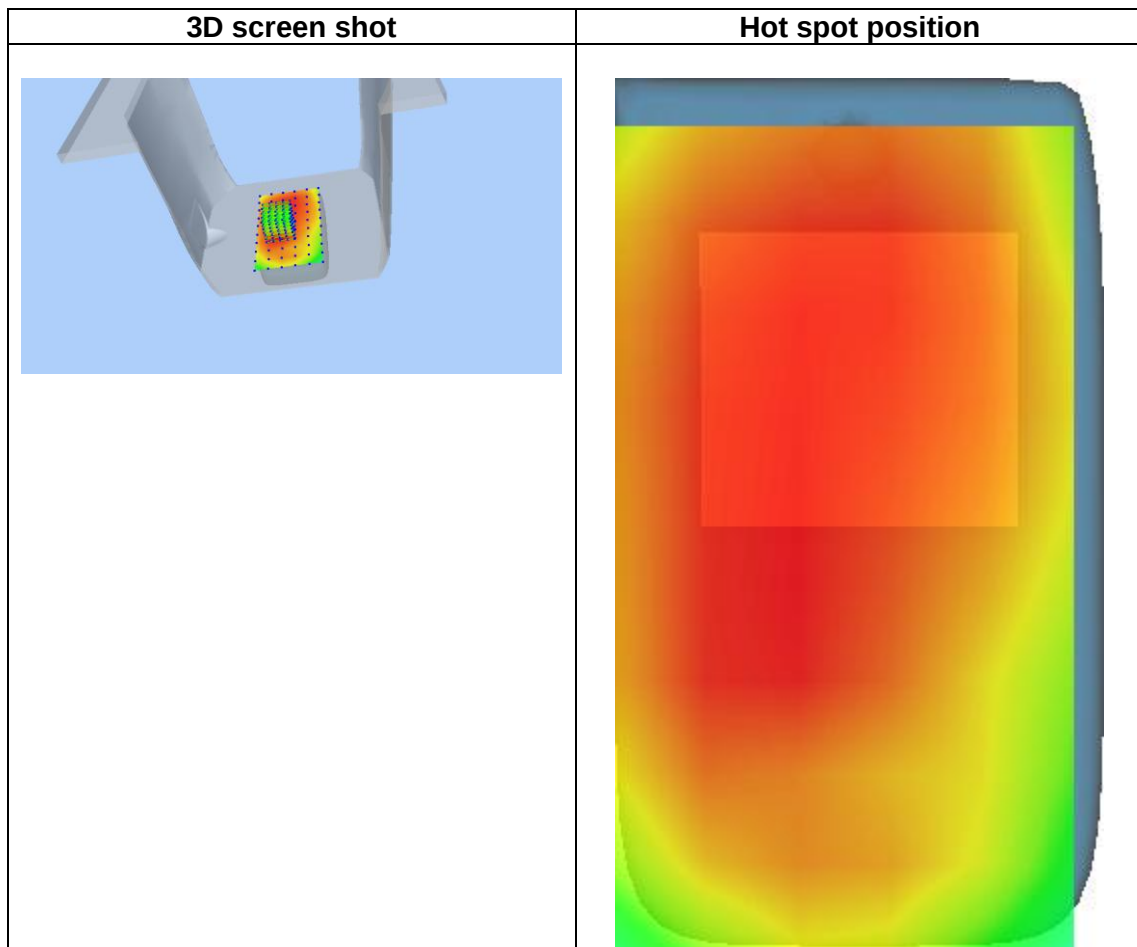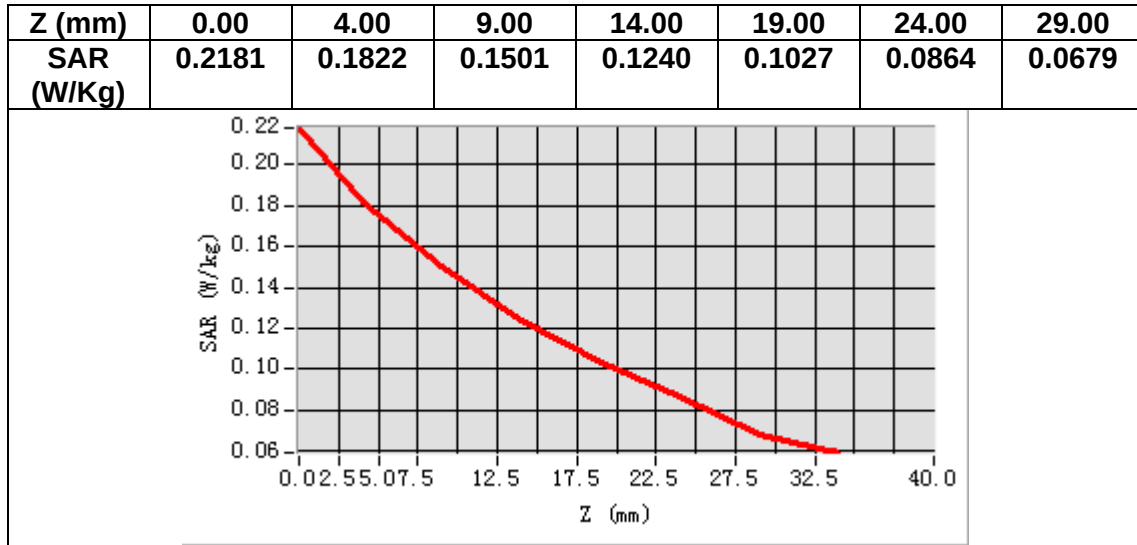

MEASUREMENT 33


Date of measurement: 12/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 66</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1745.000000
Relative permittivity (real part)	40.002205
Relative permittivity (imaginary part)	13.659388
Conductivity (S/m)	1.324202
Variation (%)	2.730000

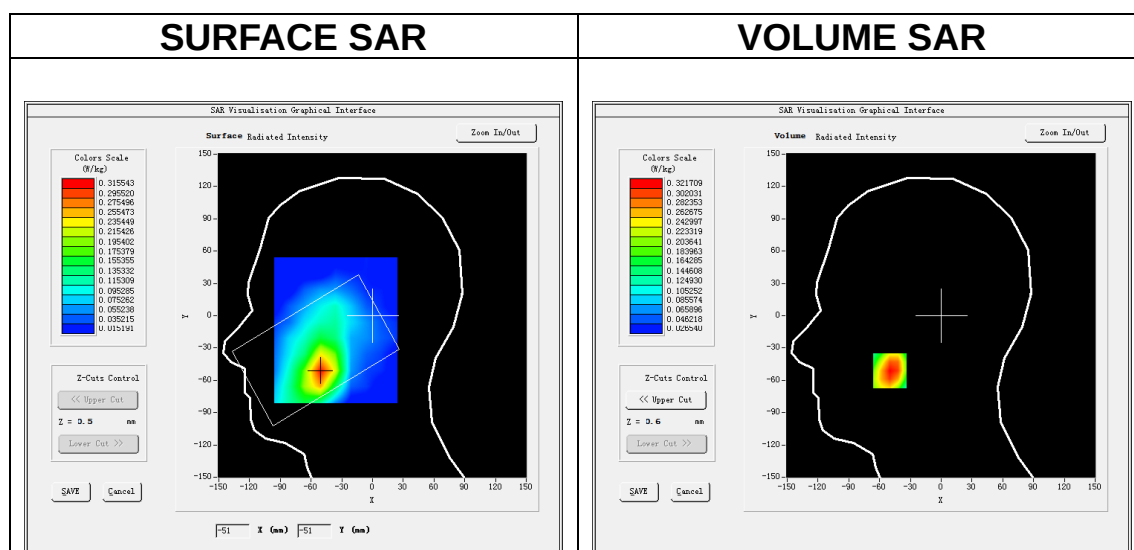

Maximum location: X=-50.00, Y=-51.00

SAR Peak: 0.46 W/kg

SAR 10g (W/Kg)	0.199399
SAR 1g (W/Kg)	0.313534

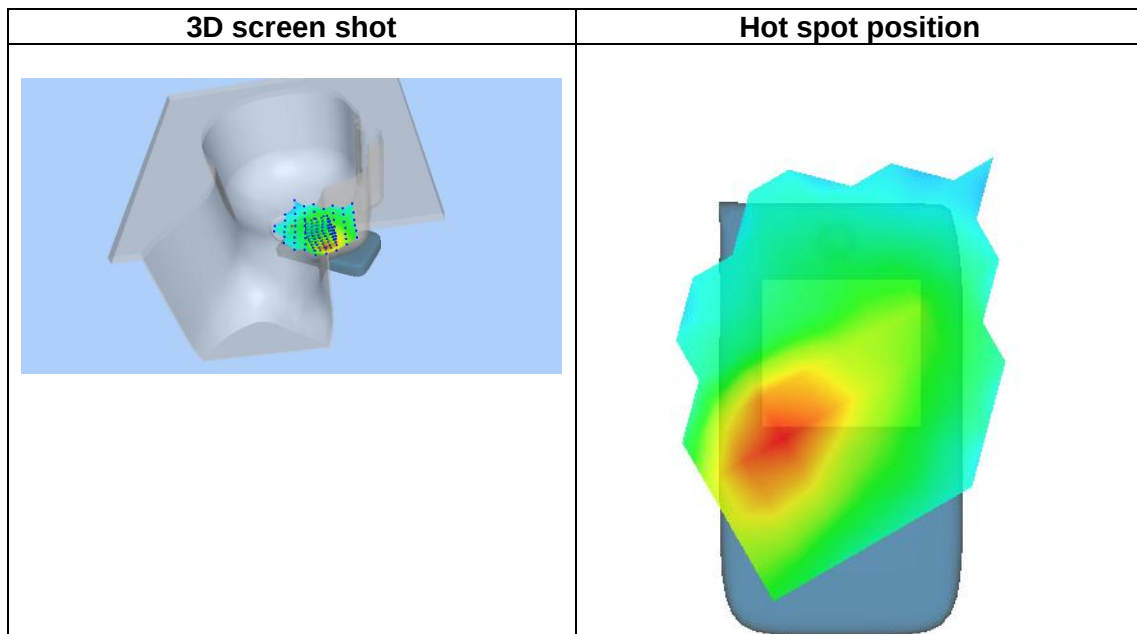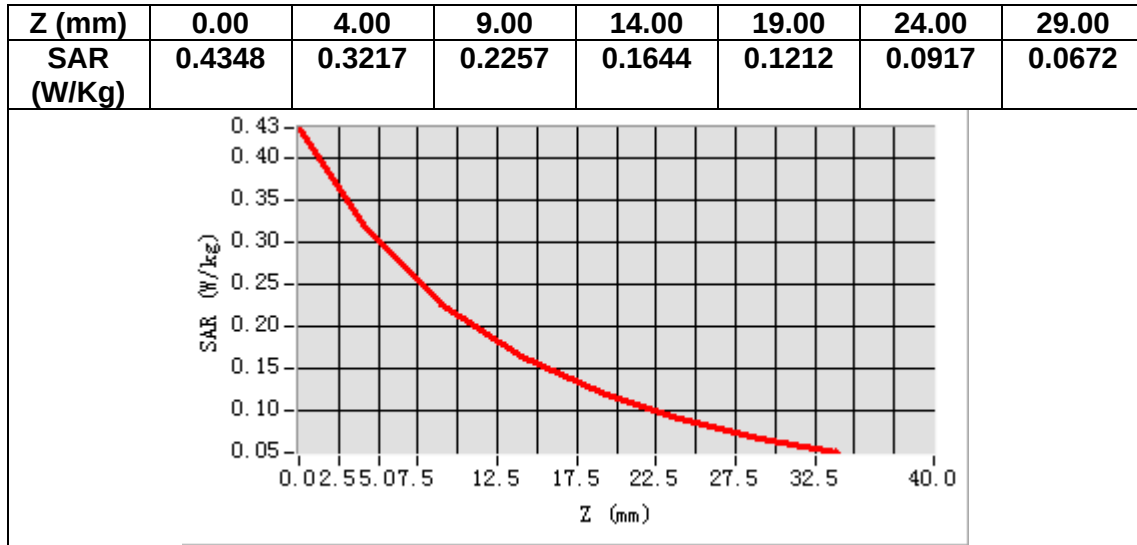

MEASUREMENT 34


Date of measurement: 12/8/2021

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 66</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	1745.000000
Relative permittivity (real part)	40.002205
Relative permittivity (imaginary part)	13.659388
Conductivity (S/m)	1.324202
Variation (%)	-0.630000

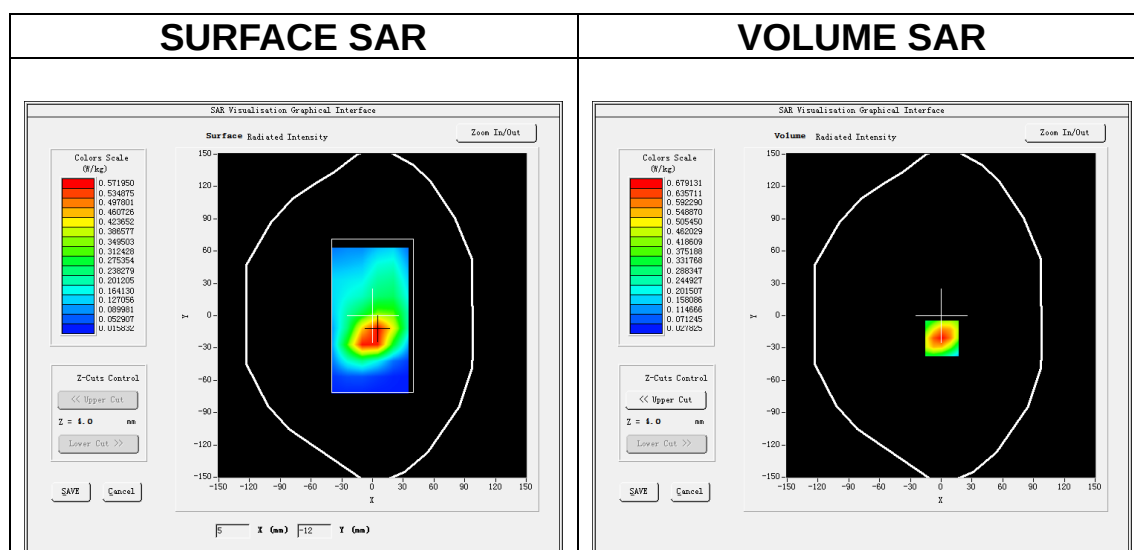

Maximum location: X=1.00, Y=-21.00

SAR Peak: 0.99 W/kg

SAR 10g (W/Kg)	0.370882
SAR 1g (W/Kg)	0.639797

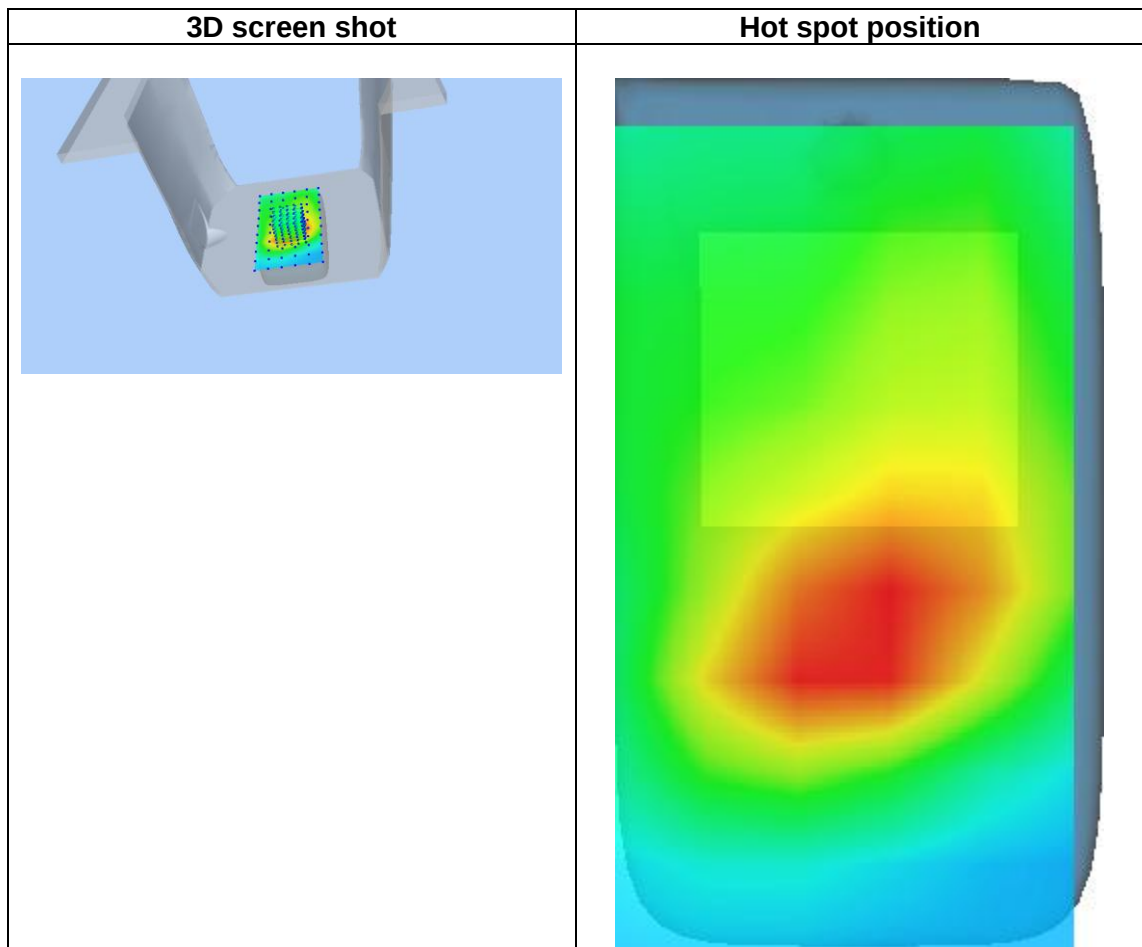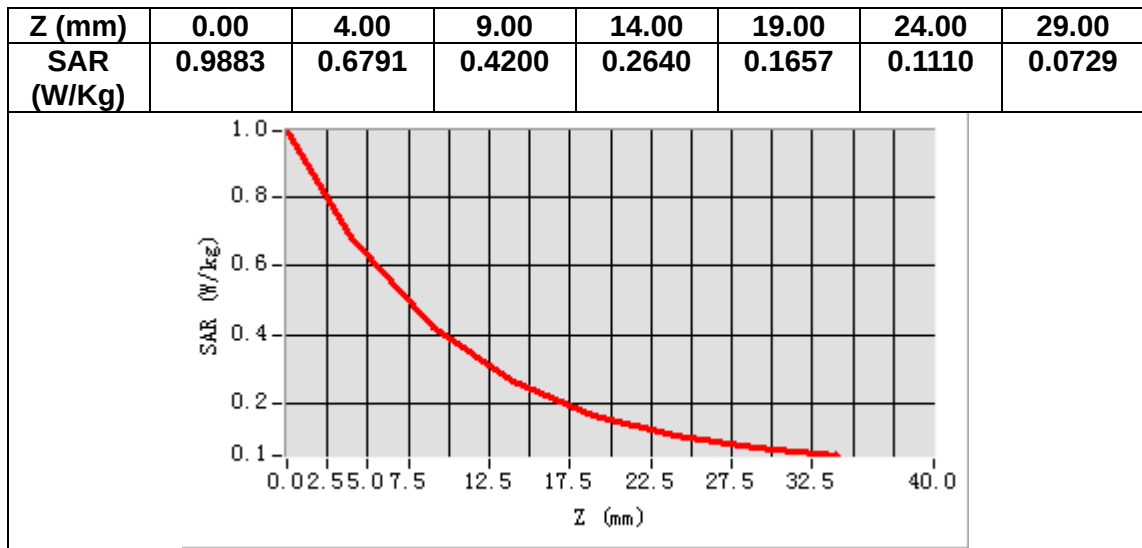

14. Appendix D. Calibration Certificate

Table of contents
E Field Probe - SN 08/16 EPGO287
750 MHz Dipole - SN 03/15 DIP 0G750-355
835 MHz Dipole - SN 03/15 DIP 0G835-347
1800 MHz Dipole - SN 03/15 DIP 1G800-349
1900 MHz Dipole - SN 03/15 DIP 1G900-350
2450 MHz Dipole - SN 03/15 DIP 2G450-352
2600 MHz Dipole - SN 03/15 DIP 2G600-356
5000-6000 MHz Dipole - SN 13/14 WGA 33



COMOSAR E-Field Probe Calibration Report

Ref : ACR.60.1.21.MVGB.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: SN 08/16 EPGO287

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 03/01/2021



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr

Summary:

This document presents the method and results from an accredited COMOSAR E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

	Name	Function	Date	Signature
Prepared by :	Jérôme Luc	Technical Manager	3/1/2021	
Checked by :	Jérôme Luc	Technical Manager	3/1/2021	
Approved by :	Yann Toutain	Laboratory Director	3/1/2021	

2021.03.0
 1 13:07:12
 +01'00'
 PHILIPS

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Jérôme Luc	3/1/2021	Initial release