



Intertek Testing Services
ETL SEMKO

Specific Absorption Rate (SAR) Test Report
for
Symbol Technologies, Inc.
on the
NETVISION
Model Number: NP-4046 with Primary Antenna

Test Report: 20363691B
Date of Report: January 31, 2001

Job #: J20036369B
Date of Test: January 8 to 12, 2001 and January 30 to 31, 2001

Total No. Of Pages Contained in this Report: 25 + Data Sheets



NVLAP Laboratory Code 200201-0
Accredited for testing to FCC Parts 15

Tested by: <u>[Signature]</u> <u>01/31/01</u>	Suresh Kondapalli
Reviewed by: <u>David Chernomordik</u>	EMC Site Manager

Review Date: 01/31/01

All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services, NA Inc. This report must not be used to claim product endorsement by NVLAP, NIST nor any other agency of the U.S. Government.



Intertek Testing Services NA, Inc.

1365 Adams Court, Menlo Park, CA 94025

Telephone 650-463-2900 Fax 650-463-2910 Home Page www.etlsemko.com





Table of Contents

1.0	Job description	2
1.1	Client Information	2
1.2	Equipment under test (EUT)	2
1.3	Test plan reference.....	2
1.4	System test configuration.....	3
1.4.1	System block diagram & Support equipment	3
1.4.2	Test Position	4
1.4.3	Test Condition.....	5
1.5	Modifications required for compliance.....	5
1.6	Additions, deviations and exclusions from standards.....	5
2.0	SAR EVALUATION.....	6
2.1	SAR Limits	6
2.2	Configuration Photographs	7
2.3	System Verification	14
2.4	Evaluation Procedures	14
2.5	Test Results	15
3.0	TEST EQUIPMENT.....	18
3.1	Equipment List	18
3.2	Muscle Tissue Simulating Liquid.....	19
3.3	E-Field Probe Calibration	19
3.4	Measurement Uncertainty	20
3.5	Measurement Tractability	20
4.0	WARNING LABEL INFORMATION - USA.....	21
5.0	REFERENCES.....	22
	APPENDIX A - SAR Evaluation Data	23
	APPENDIX B - E-Field Probe Calibration Data	24
6.0	DOCUMENT HISTORY	25



Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

1.0 Job description

1.1 Client Information

The NP-4046 with Primary Antenna has been tested at the request of:

Company: Symbol Technologies, Inc.
6480 Via Del Oro
San Jose, CA 95119-1208
USA

Name of contact: Mr. Norm Nelson

Telephone: (408) 528-2649

Fax: 408 528-2740

1.2 Equipment under test (EUT)

Product Descriptions:

Equipment	NETVISION		
Trade Name	Symbol Technologies, Inc.	Model No:	NP-4046 with Primary Antenna
FCC ID	Not Labeled	S/N No.	Not Labeled
Category	Portable	RF Exposure	Uncontrolled Environment
Frequency Band (uplink)	2402-2480 MHz	System	DSS

EUT Antenna Description			
Type	Dipole	Configuration	Fixed, 360° Rotation
Dimensions	23.5mm	Gain	0 dBi
Location	Left Top		

Use of Product : Spectrum 24Hr Netvision Data Phone

Manufacturer: SAME as above.

Production is planned: [X] Yes, [] No

EUT receive date: January 7, 2001

EUT received condition: Good working condition prototype

Test start date: January 8

Test end date: January 31, 2001

1.3 Test plan reference

Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna


Date of Test: January 8 to 12, & 30 to 31, 2001

FCC rule part 2.1093, FCC Docket 96-326 & Supplement C to OET Bulletin 65

1.4 System test configuration

1.4.1 System block diagram & Support equipment

The diagram shown below details test configuration of the equipment under test.

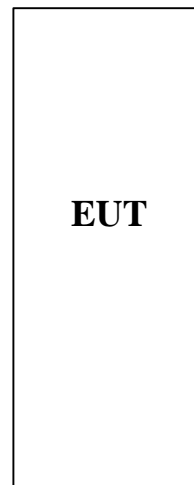

1.4.2 Test Position

The NP-4046 with Primary Antenna was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in C95.1 (1992) and Supplement C of OET 65 (1998). The NP-4046 with Primary Antenna was placed in the intended use position, i.e. CENELEC 80° position. This position is defined by a reference plane and a line. The reference plane of the head is given by three points, the auditory canal opening of both ears and center of the closed mouth. The reference line of the NP-4046 with Primary Antenna is defined by the line, which connects the center of the ear piece with the center of the bottom of the case and lies on the surface of the case facing the phantom. The reference line of the NP-4046 with Primary Antenna lies in the reference plane of the head. The center of the ear-piece of the NP-4046 with Primary Antenna is placed at the entry of the auditory canal. The angle between the reference line of the phone and the line connecting both auditory canal openings is 80°. Please refer to figure 1 below for the position details:

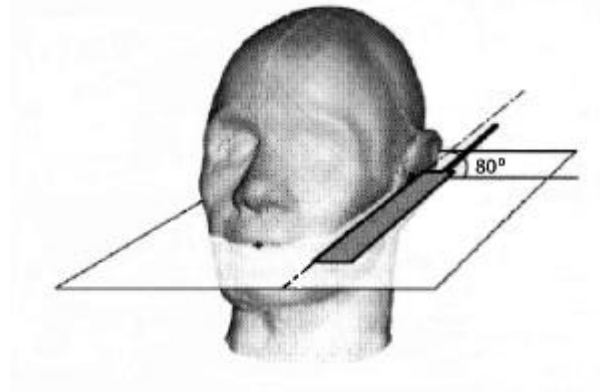


Figure 1: Intended use position

Additionally, the NP-4046 with Primary Antenna was tested in a second position from the normal 80° angle between the reference line of the phone and the line connecting both auditory canal openings. The center of the ear piece of the NP-4046 with Primary Antenna is placed at the entry of the auditory canal. The angle between the reference line of the phone and the line connecting both auditory canal openings was adjusted from 80° to the angle where two points of the phone were in contact with the phantom (ear hole and cheek).

Data pages indicate the position of the NP-4046 with Primary Antenna during testing. The first position of 80° has data pages labeled '1 point touch'. The second position has data pages labeled '2 point touch'.

The left hand and right hand sections of the phantom were used for measuring the low, middle, and high channels in the 1 point touch and 2 point touch positions.



Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

1.4.3 Test Condition

During tests, the worst case data (max. RF coupling) was determined with following conditions:

EUT Antenna	Fixed length	Orientation	N/A
Usage	Left Hand & Right Hand	Distance between antenna axis at the joint and the liquid surface:	8mm
Simulating human Body/hand	Brain & Muscles	EUT Battery	Fully charged
Power output	21.7 dBm (Maximum power at antenna port)		

The spatial peak SAR values were accessed for lowest, middle and highest operating channels defined by the manufacturer.

Antenna port power measurement was performed, by the manufacturer.

1.5 Modifications required for compliance

No modifications were implemented by Intertek Testing Services.

1.6 Additions, deviations and exclusions from standards

No additions, deviations or exclusions have been made from standard.

Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

2.0 SAR EVALUATION

2.1 SAR Limits

The following FCC limits for SAR apply to devices operate in General Population/Uncontrolled Exposure environment:

EXPOSURE (General Population/Uncontrolled Exposure environment)	SAR (W/kg)
Average over the whole body	0.08
Spatial Peak (1g)	1.60
Spatial Peak for hands, wrists, feet and ankles (10g)	4.00

Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

2.2 Configuration Photographs

SAR measurement Test Setup



Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

2.2 Configuration Photographs (Continued)

SAR measurement Test Setup



Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

2.2 Configuration Photographs (Continued)

SAR measurement Test Setup



Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

2.2 Configuration Photographs (Continued)

EUT FRONT



Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

2.2 Configuration Photographs (Continued)

EUT BACK SIDE



Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

2.2 Configuration Photographs (Continued)

EUT SIDE WITH HOLDER & CLIP



Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

2.2 Configuration Photographs (Continued)

EUT WITH HOLDER & CLIP



Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

2.3 System Verification

Prior to the assessment, the system was verified to the $\pm 5\%$ of the specifications by using the system validation kit. The validation was performed at 1800 MHz.

Validation kit	Targeted SAR _{1g} (mW/g)	Measured SAR _{1g} (mW/g)
D900V2, S/N #: 0013	4.03	3.9

2.4 Evaluation Procedures

The SAR evaluation was performed with the following procedures:

- a. SAR was measured at a fixed location above the reference point and used as a reference value for the assessing the power drop.
- b. The SAR distribution at the exposed side of the flat Phantom was measured at a distance of 30 mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20 mm x 20 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.
- c. Around this point, a volume of 32 mm x 32 mm x 34 mm was assessed by measuring 5 x 5 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure:
 - i) The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measurement point is 1.6 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in Z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - ii) The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum, the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3-D spline interpolation algorithm. The 3-D spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y and z directions). The volume was integrated with the trapezoidal algorithm. 1000 points (10 x 10 x 10) were interpolated to calculate the average.
 - iii) All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
- d. Re-measurement of the SAR value at the same location as in step a. above. If the value changed by more than 5 %, the evaluation was repeated.



2.5 Test Results

The results on the following page(s) were obtained when the device was tested in the condition described in this report. Detail measurement data and plots, which reveal information about the location of the maximum SAR with respect to the device, are reported in Appendix A.



Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

Measurement Results

Trade Name:	Symbol Technologies, Inc.	Model No.:	NP-4046 with Primary Antenna
Serial No.:	Not Labeled	Test Engineer:	Suresh Kondapalli

TEST CONDITIONS

Ambient Temperature	21 °C	Relative Humidity	40 %
Test Signal Source	Test Mode	Signal Modulation	CW
Output Power Before SAR Test	21.7 dBm	Output Power After SAR Test	21.7 dBm
Test Duration	23 Min.	Number of Battery Change	Battery changed for every measurement

EUT Position: Left Hand; 80 Deg

Channel MHz	Operating Mode	Duty Cycle ratio	Measured SAR _{1g} (mW/g)	Plot Number
2402	CW	1	0.879	1
2440	CW	1	0.764	2
2480	CW	1	0.985	3

EUT Position: Left Hand; Two Points Touching Phantom

Channel MHz	Operating Mode	Duty Cycle ratio	Measured SAR _{1g} (mW/g)	Plot Number
2402	CW	1	0.710	4
2440	CW	1	0.690	5
2480	CW	1	0.764	6

EUT Position: Right Hand; 80 Deg

Channel MHz	Operating Mode	Duty Cycle ratio	Measured SAR _{1g} (mW/g)	Plot Number
2402	CW	1	1.030	7
2440	CW	1	1.060	8
2480	CW	1	1.110	9



Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

EUT Position: Right Hand; Two Points Touching Phantom				
Channel MHz	Operating Mode	Duty Cycle ratio	Measured SAR _{lg} (mW/g)	Plot Number
2402	CW	1	0.802	10
2440	CW	1	0.753	11
2480	CW	1	0.403	12

Body Worn

EUT Position: Middle of Phantom, Face down, with holder and clip Touching Phantom*				
Channel MHz	Operating Mode	Duty Cycle ratio	Measured SAR _{lg} (mW/g)	Plot Number
2402	CW	1	0.129	13
2440	CW	1	0.163	14
2480	CW	1	0.259	15

Note: a) Worst case data were reported
b) Duty cycle factor included in the measured SAR data
c) Uncertainty of the system is not included
d) * clip thickness 18.7mm

Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

3.0 TEST EQUIPMENT

3.1 Equipment List

The Specific Absorption Rate (SAR) tests were performed with the SPEAG model DASY 3 automated near-field scanning system which is package optimized for dosimetric evaluation of mobile radios [3].

The following major equipment/components were used for the SAR evaluations:

SAR Measurement System			
EQUIPMENT	SPECIFICATIONS	S/N #	CAL. DATE
Robot	Stäubi RX60L Repeatability: $\pm 0.025\text{mm}$ Accuracy: 0.806×10^{-3} degree Number of Axes: 6	597412-01	N/A
E-Field Probe	ET3DV5 Frequency Range: 10 MHz to 6 GHz Linearity: ± 0.2 dB Directivity: ± 0.1 dB in brain tissue	1334	4/10/00
Data Acquisition	DAE3 Measurement Range: $1\mu\text{V}$ to $>200\text{mV}$ Input offset Voltage: $< 1\mu\text{V}$ (with auto zero) Input Resistance: 200 M	317	N/A
Phantom	Generic Twin V3.0 Type: Generic Twin, Homogenous Shell Material: Fiberglass Thickness: 2 ± 0.1 mm Capacity: 20 liter Ear spacer: 4 mm (between EUT ear piece and tissue simulating liquid)	N/A	N/A
Simulated Tissue	Mixture Please see section 6.2 for details	N/A	1/08/01
Power Meter	HP 8900D w/ 84811A sensor Frequency Range: 100kHz to 18 GHz Power Range: $300\mu\text{W}$ to 3W	3607U00673	8/1/00

Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

3.2 Tissue Simulating Liquid

Brain	
Ingredient	Frequency (2400 - 2500 MHz)
Water	53.93 %
Sugar	44.97 %
Salt	0 %
HEC	1.0 %
Bactericide	0.1 %

The dielectric parameters were verified prior to assessment using the HP 85070A dielectric probe kit and the HP 8753C network Analyzer. The dielectric parameters were:

Frequency (MHz)	ϵ_r *	*(mho/m)	**(kg/m ³)
2400	39.0 \pm 5%	2.3 \pm 10%	1000

* worst case uncertainty of the HP 85070A dielectric probe kit

** worst case assumption

Muscle	
Ingredient	Frequency (2400 - 2500 MHz)
Water	55.5 %
Sugar	43.4 %
Salt	0 %
HEC	1.0 %
Bactericide	0.1 %

The dielectric parameters were verified prior to assessment using the HP 85070A dielectric probe kit and the HP 8753C network Analyzer. The dielectric parameters were:

Frequency (MHz)	ϵ_r *	*(mho/m)	**(kg/m ³)
2440	35.7 \pm 5%	2.36 \pm 10%	1000

* worst case uncertainty of the HP 85070A dielectric probe kit

** worst case assumption

Note: The amount of each ingredient specified in the tables are not the exact amounts of the final test solution. The final test solution was adjusted by adding small amounts of either water, sugar, and/or salt to calibrate the solution to meet the proper dielectric parameters.

3.3 E-Field Probe Calibration

Probes were calibrated by the manufacturer in the TEM cell ifi 110. To ensure consistency, a strict

Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

protocol was followed. The conversion factor (ConF) between this calibration and the measurement in the tissue simulation solution was performed by comparison with temperature measurement and computer simulations. Probe calibration factors are included in Appendix C.

3.4 Measurement Uncertainty

The uncertainty budget has been determined for the DASY3 measurement system according to the NIS81 [5] and the NIST 1297 [6] documents and is given in the following table. The extended uncertainty (K=2) was assessed to be 23.5 %

UNCERTAINTY BUDGET				
Uncertainty Description	Error	Distrib.	Weight	Std.Dev.
Probe Uncertainty				
Axial isotropy	±0.2 dB	U-shape	0.5	±2.4 %
Spherical isotropy	±0.4 dB	U-shape	0.5	±4.8 %
Isotropy from gradient	±0.5 dB	U-shape	0	
Spatial resolution	±0.5 %	Normal	1	±0.5 %
Linearity error	±0.2 dB	Rectang.	1	±2.7 %
Calibration error	±3.3 %	Normal	1	±3.3 %
SAR Evaluation Uncertainty				
Data acquisition error	±1 %	Rectang.	1	±0.6 %
ELF and RF disturbances	±0.25 %	Normal	1	±0.25 %
Conductivity assessment	±10 %	Rectang.	1	±5.8 %
Spatial Peak SAR Evaluation Uncertainty				
Extrapol boundary effect	±3 %	Normal	1	±3 %
Probe positioning error	±0.1 mm	Normal	1	±1 %
Integrat. and cube orient	±3 %	Normal	1	±3 %
Cube shape inaccuracies	±2 %	Rectang.	1	±1.2 %
Device positioning	±6 %	Normal	1	±6 %
Combined Uncertainties				±11.7 %

3.5 Measurement Tractability

All measurements described in this report are traceable to National Institute of Standards and Technology (NIST) standards or appropriate national standards.



4.0 WARNING LABEL INFORMATION - USA

See Users Manual.

5.0 REFERENCES

- [1] ANSI, *ANSI/IEEE C95.1-1991: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz*, The Institute of electrical and Electronics Engineers, Inc., New York, NY 10017, 1992
- [2] Federal Communications Commission, “Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields”, OET Bulletin 65, FCC, Washington, D.C. 20554, 1997
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, “Automated E-field scanning system for dosimetric assessments”, *IEEE Transaction on Microwave Theory and Techniques*, vol. 44, pp. 105-113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, “Dosimetric evaluation of mobile communications equipment with know precision”, *IEICE Transactions on Communications*, vol. E80-B, no. 5, pp.645-652, May 1997.
- [5] NIS81, NAMAS, “The treatment of uncertainty in EMC measurement”, Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddinton, Middlesex, England, 1994.
- [6] Barry N. Taylor and Chris E. Kuyatt, “Guidelines for evaluating and expressing the uncertainty of NIST measurement results”, Tech. Rep., National Institute of Standards and Technology, 1994.



APPENDIX A - SAR Evaluation Data

See attached Plots.



APPENDIX B - E-Field Probe Calibration Data

See attached.

Calibration Certificate

Dosimetric E-Field Probe

Type:

ET3DV5

Serial Number:

1333

Place of Calibration:

Zurich

Date of Calibration:

April 10, 2000

Calibration Interval:

12 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

Juliane Kötter

Approved by:

C. E. R.

Probe ET3DV5

SN:1333

Manufactured:	December 20, 1997
Last calibration:	March 18, 1999
Recalibrated:	April 10, 2000

Calibrated for System DASY3

DASY3 - Parameters of Probe: ET3DV5 SN:1333**Sensitivity in Free Space****Diode Compression**

NormX	2.39 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	100 mV
NormY	2.36 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	100 mV
NormZ	2.34 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	100 mV

Sensitivity in Tissue Simulating Liquid


Brain	450 MHz	$\epsilon_r = 48 \pm 5\%$	$\sigma = 0.50 \pm 10\%$ mho/m
ConvF X	6.03 extrapolated	Boundary effect:	
ConvF Y	6.03 extrapolated	Alpha	0.13
ConvF Z	6.03 extrapolated	Depth	3.57
Brain	900 MHz	$\epsilon_r = 42.5 \pm 5\%$	$\sigma = 0.86 \pm 10\%$ mho/m
ConvF X	5.70 $\pm 7\%$ (k=2)	Boundary effect:	
ConvF Y	5.70 $\pm 7\%$ (k=2)	Alpha	0.34
ConvF Z	5.70 $\pm 7\%$ (k=2)	Depth	3.00
Brain	1500 MHz	$\epsilon_r = 41 \pm 5\%$	$\sigma = 1.32 \pm 10\%$ mho/m
ConvF X	5.25 interpolated	Boundary effect:	
ConvF Y	5.25 interpolated	Alpha	0.61
ConvF Z	5.25 interpolated	Depth	2.23
Brain	1800 MHz	$\epsilon_r = 41 \pm 5\%$	$\sigma = 1.69 \pm 10\%$ mho/m
ConvF X	5.03 $\pm 7\%$ (k=2)	Boundary effect:	
ConvF Y	5.03 $\pm 7\%$ (k=2)	Alpha	0.74
ConvF Z	5.03 $\pm 7\%$ (k=2)	Depth	1.35

Sensor Offset


Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	1.9 \pm 0.2	mm

Receiving Pattern (ϕ), $\theta = 0^\circ$


$f = 30 \text{ MHz}$, TEM cell if110

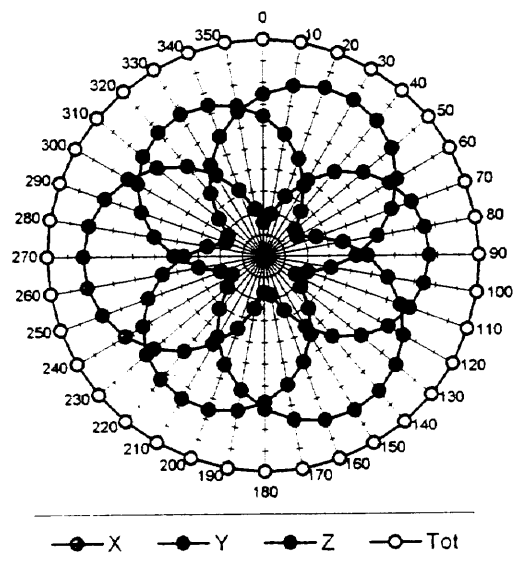


$f = 100 \text{ MHz}$, TEM cell if110

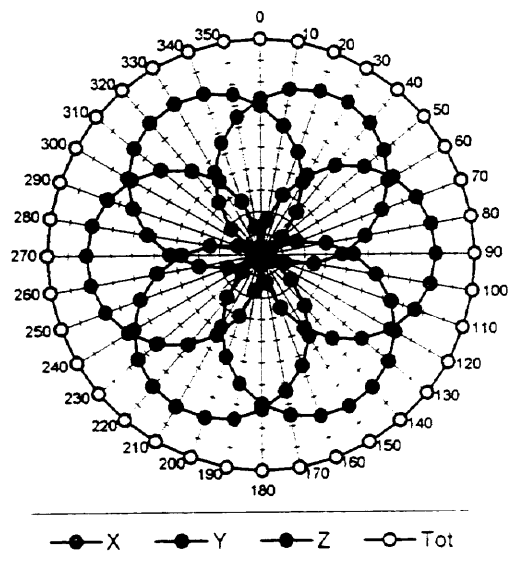


$f = 300 \text{ MHz}$, TEM cell if110

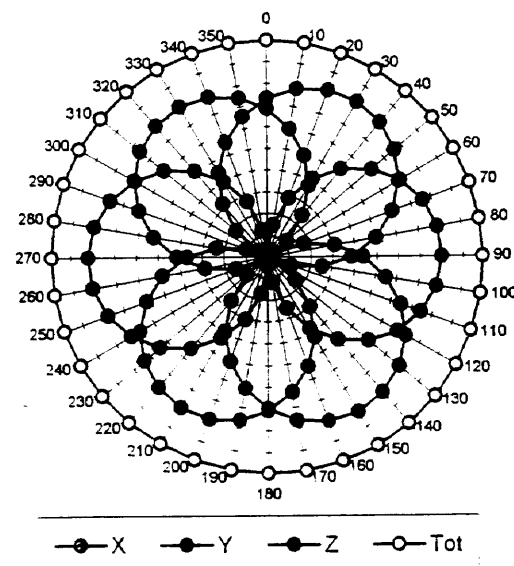


$f = 900 \text{ MHz}$, TEM cell if110

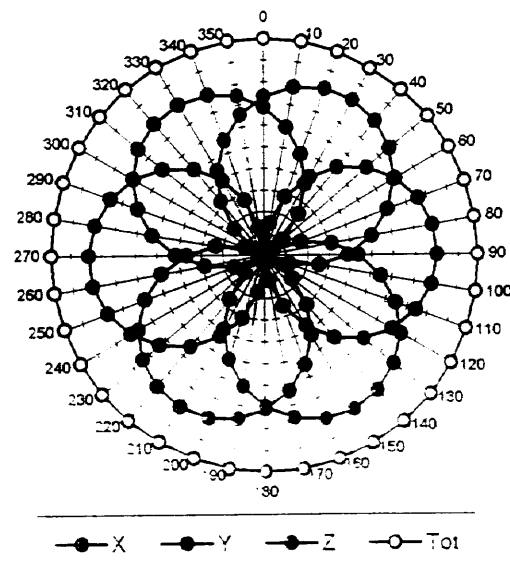


$f = 1800 \text{ MHz, WG R22}$

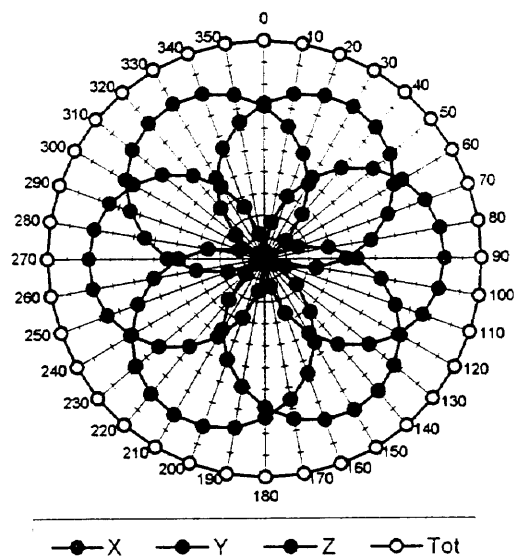

$f = 2500 \text{ MHz, WG R26}$

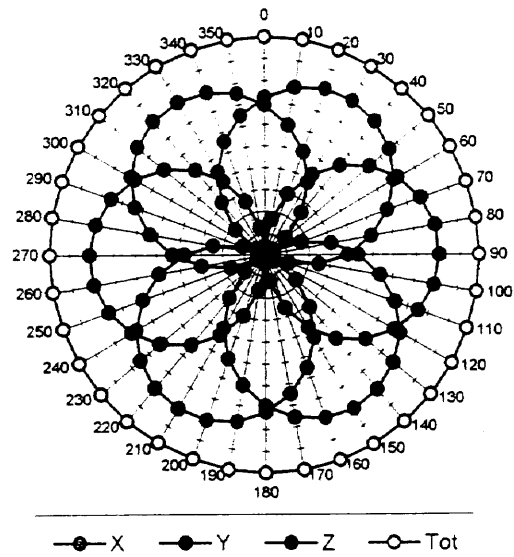


Isotropy Error (ϕ), $\theta = 0^\circ$


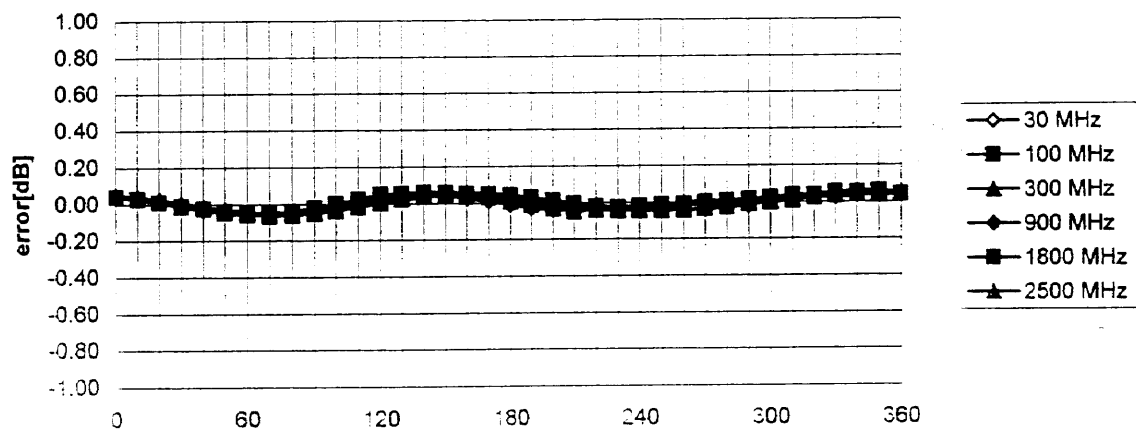


Frequency Response of E-Field


(TEM-Cell:ifi110, Waveguide R22, R26)

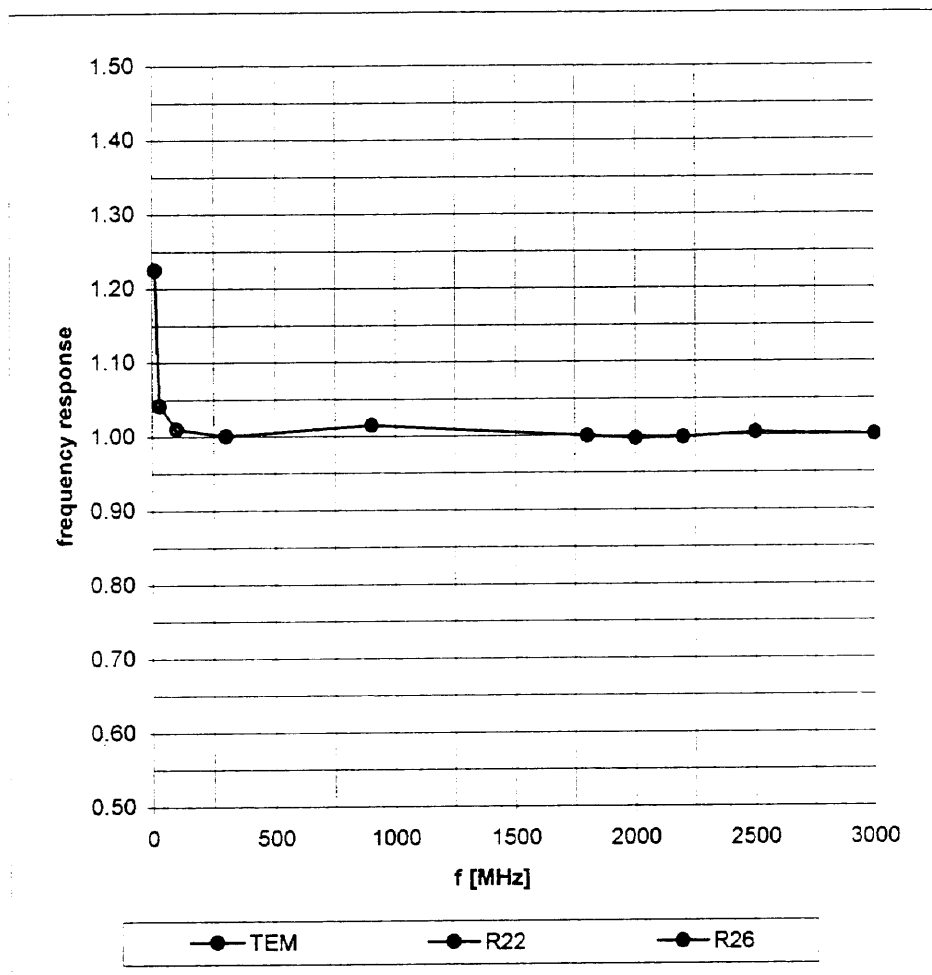

Dynamic Range $f(\text{SAR}_{\text{brain}})$ (TEM-Cell:ifi1110)

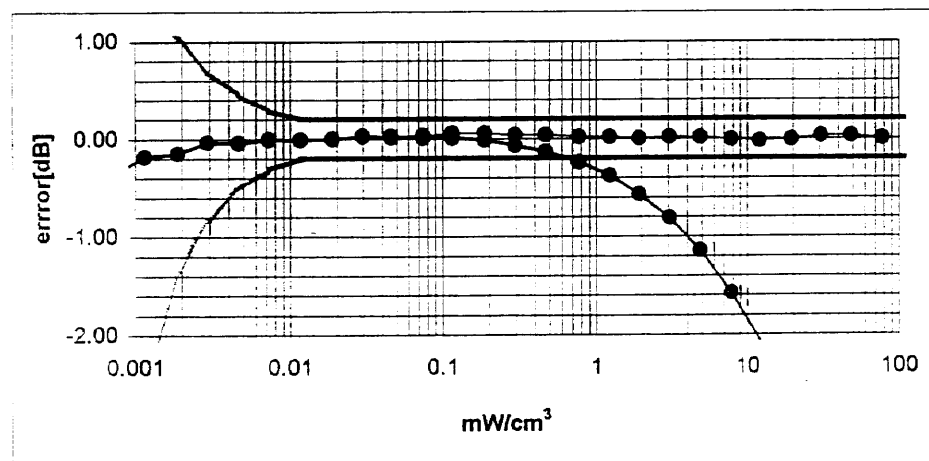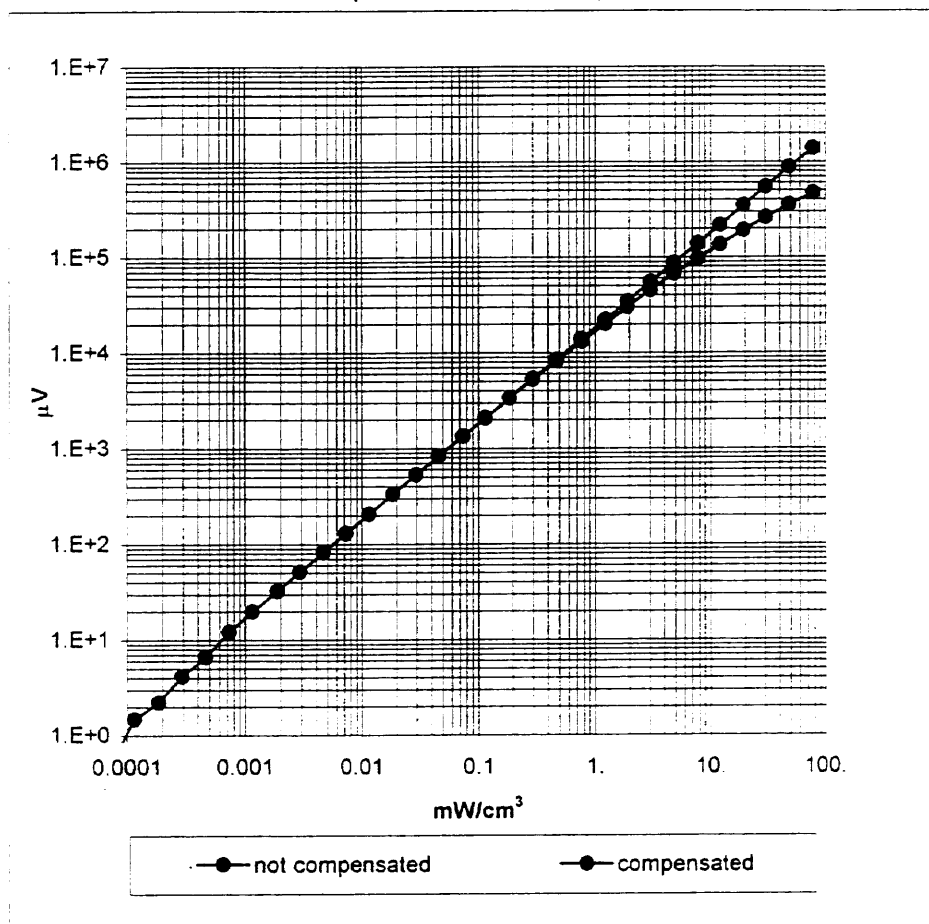


Conversion Factor Assessment

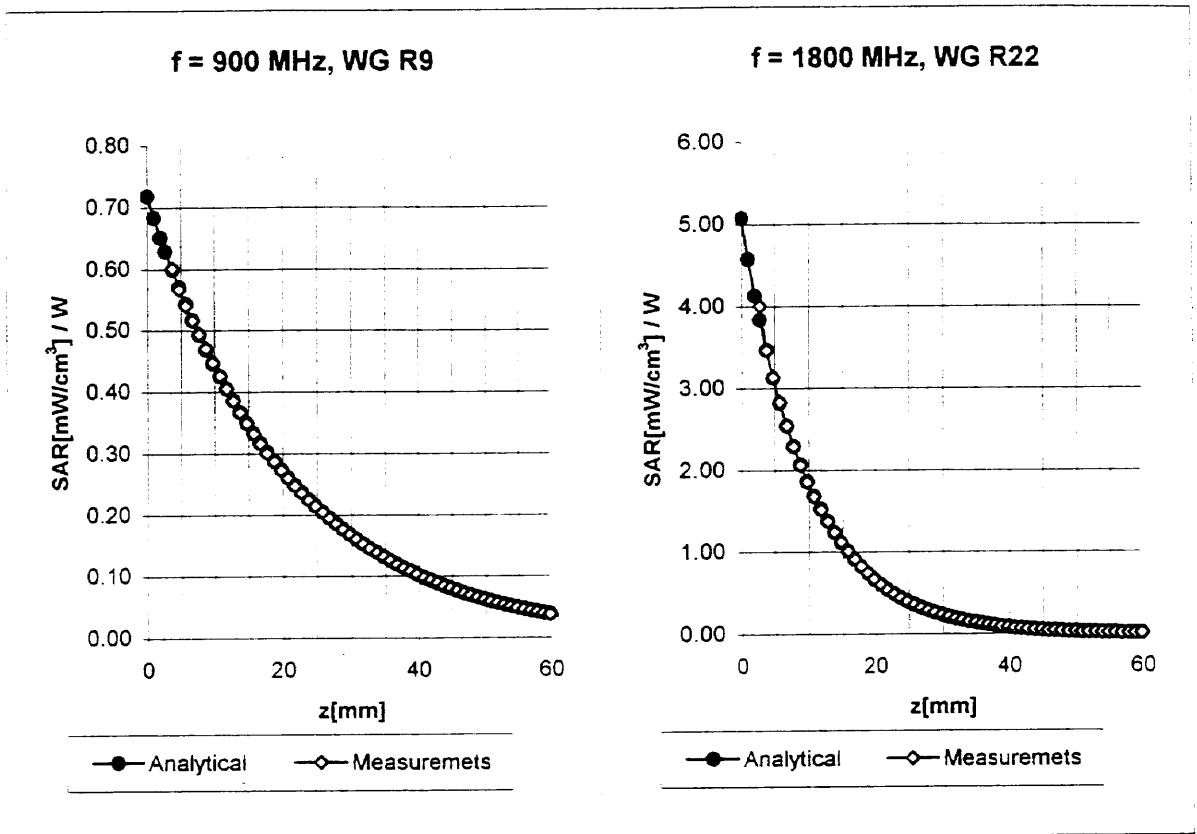

Receiving Pattern (ϕ)

(in brain tissue, $z = 5 \text{ mm}$)

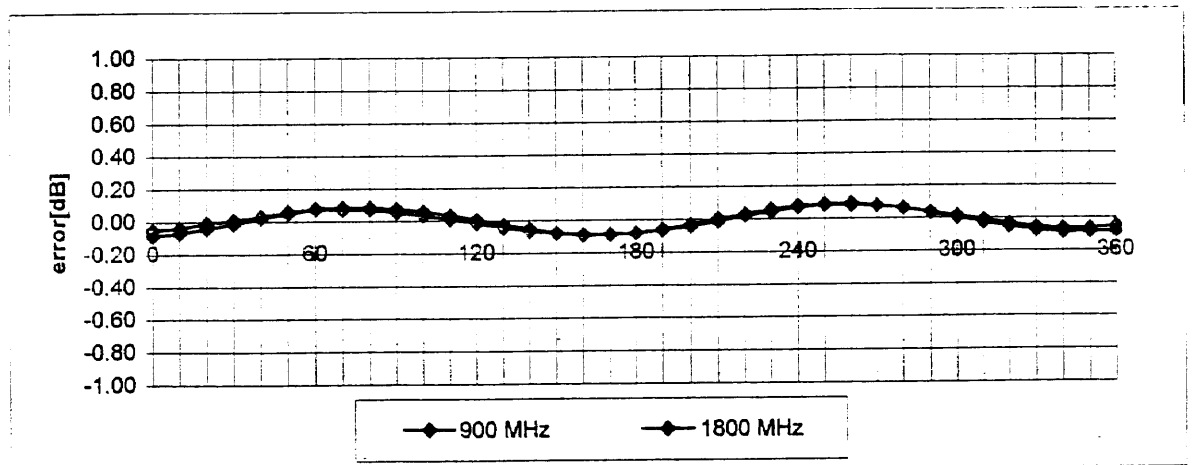

Symbol Technologies, Inc., Model No: NP-4046 with Primary Antenna

Date of Test: January 8 to 12, & 30 to 31, 2001

6.0 DOCUMENT HISTORY

Revision/ Job Number	Writer Initials	Date	Change
1.0 / J20036369B	SS	January 31, 2001	Original document