



FCC ID: 2AAOV-GGI13



Page: 1 / 47
Rev.: 00

FCC TEST REPORT

For

Speech Generating Device

Trade Name: Tobii Dynavox

Model: I-13

Issued to

Tobii Dynavox LLC

2100 Wharton Street, Suite 400, Pittsburgh PA 15203

Issued by

Compliance Certification Services Inc.(Wugu LAB)

No.11, Wugong 6th Rd., Wugu Dist.,

New Taipei City 24891,

Taiwan. (R.O.C.)

<http://www.ccsrf.com>

service@ccsrf.com

Issued Date: 2019/08/15



Statements of Conformity

Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Note: This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T190503D05-A-SF

Page 2 / 47
Rev. 00

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	2019/08/15	Initial Issue	ALL	Stella Chang

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Table of Contents

1	CERTIFICATE OF COMPLIANCE (SAR EVALUATION)	5
2	DESCRIPTION OF EQUIPMENT UNDER TEST	6
2.1	SUMMARY OF HIGHEST SAR VALUES	7
3	REQUIREMENTS FOR COMPLIANCE TESTING DEFINED	8
3.1	REQUIREMENTS FOR COMPLIANCE TESTING DEFINED BY THE FCC	8
4	DOSIMETRIC ASSESSMENT SYSTEM	9
4.1	MEASUREMENT SYSTEM DIAGRAM	10
4.2	SYSTEM COMPONENTS	11
5	EVALUATION PROCEDURES	14
6	SAR MEASUREMENT PROCEDURES	16
6.1	NORMAL SAR TEST PROCEDURE	16
7	MEASUREMENT UNCERTAINTY	18
8	DEVICE UNDER TEST	19
8.1	WIRELESS TECHNOLOGIES	19
8.2	MAXIMUM TUNE-UP POWER	20
8.3	SIMULTANEOUS TRANSMISSION	23
9	RF OUTPUT POWER MEASUREMENT	24
9.1	WI-FI (2.4GHZ BAND)	24
9.2	WI-FI (5GHZ BAND)	25
9.3	BLUETOOTH	28
10	ANTENNA LOCATION	29
11	SUMMARY OF SAR TEST EXCLUSION CONFIGURATIONS	30
11.1	STANDALONE SAR TEST EXCLUSION CALCULATIONS	30
11.1.1	SAR EXCLUSION CALCULATIONS FOR WI FI ANTENNA < 50MM FROM THE USER	31
11.1.2	SAR EXCLUSION CALCULATIONS FOR WI-FI ANTENNA > 50MM FROM THE USER	32
11.1.3	ESTIMATE SAR	32
11.1.4	SAR REQUIRED TEST CONFIGURATION	33
12	EXPOSURE LIMIT	34
13	TISSUE DIELECTRIC PROPERTIES	35
13.1	TEST LIQUID CONFIRMATION	35
13.2	TYPICAL COMPOSITION OF INGREDIENTS FOR LIQUID TISSUE PHANTOMS	36
13.3	SIMULATING LIQUIDS PARAMETER CHECK RESULTS	37
14	MEASUREMENT UNCERTAINTY	38

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190503D05-A-SF

15	SYSTEM PERFORMANCE CHECK.....	39
15.1	SYSTEM PERFORMANCE CHECK RESULTS	40
16	SAR MEASUREMENTS RESULTS	41
17	SIMULTANEOUS TRANSMISSION SAR ANALYSIS	44
17.1	SUM OF THE SAR FOR SIMULTANEOUS TRANSMISSION ANALYSIS	44
17.1.1	SUM OF THE SAR FOR WLAN.....	44
18	EQUIPMENT LIST & CALIBRATION STATUS	45
19	FACILITIES.....	46
20	REFERENCE	46
21	ATTACHMENTS	47

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

1 Certificate of Compliance (SAR Evaluation)

Applicant Tobii Dynavox LLC
2100 Wharton Street, Suite 400, Pittsburgh PA 15203

Equipment Under Test: Speech Generating Device

Trade Name: Tobii Dynavox

Model Number: I-13

Date of Test: Jul 12 ~ Jul 18, 2019

Receive EUT Date: May 6, 2019

Device Category: Portable Devices

Exposure Category: General Population/Uncontrolled Exposure

Applicable Standards	
FCC	<ul style="list-style-type: none">● IEEE 1528 2013● KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04● KDB 865664 D02 RF Exposure Reporting v01r02● KDB 447498 D01 General RF Exposure Guidance v06● KDB 616217 D04 SAR for laptop and tablets v01r02● KDB 248227 D01 SAR Measurement Guidance for 802.11 Transmitters v02r02
Limit	
1.6 W/kg	
Test Result	
Pass	

The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:



Kevin Tsai
Section Manager
Compliance Certification Services Inc.

Tested by:



Ryan Lee
SAR Engineer
Compliance Certification Services Inc.

2 Description of Equipment Under Test

Product	Speech Generating Device	
Trade Name	Tobii Dynavox	
Model Number	I-13	
Collocated	Wi-Fi & Bluetooth	
Collocated Transmitter Modulation Technique	Bluetooth:GFSK for 1Mbps; $\pi/4$ -DQPSK for 2Mbps;8DPSK for 3Mbps	
	BLE : GFSK for 1Mbps	
	802.11a: Orthogonal Frequency Division Multiplexing (OFDM)	
	802.11b: Direct Sequence Spread Spectrum(DSSS)	
	802.11g: Orthogonal Frequency Division Multiplexing (OFDM)	
	802.11ac: Orthogonal Frequency Division Multiplexing (OFDM)	
	802.11n: Orthogonal Frequency Division Multiplexing (OFDM)	
WLAN Antenna Specification	Brand name	SINBON
	Parts Number	Chain 0 : A9704170
	Type	PIFA
	Brand name	SINBON
	Parts Number	Chain 1 : A9704596
	Type	PIFA
Rechargeable Li-polymer Battery–alternate	Brand : Tobii Dynavox Model : TDGG1 Rating : 14.4V/95.04Wh	

Note:

- The sample selected for test was prototype that representative to production product and was provided by manufacturer.

2.1 Summary of Highest SAR Values

Results for highest reported SAR values for each frequency band and mode

Technology/Band	Test configuration	Mode	Highest Reported 1g-SAR (W/kg)
Wi-Fi 2.4 GHz Chain 0	Edge 1	802.11b	0.032
Wi-Fi 2.4 GHz Chain 1	Edge 1	802.11b	0.073
Wi-Fi 5.3 GHz (U-NII 2A) Chain 0	Edge 1	IEEE 802.11ac 80MHz	0.773
Wi-Fi 5.3 GHz (U-NII 2A) Chain 1	Edge 1	IEEE 802.11ac 80MHz	0.395
Wi-Fi 5.5 GHz (U-NII 2C) Chain 0	Edge 1	IEEE 802.11ac 80MHz	0.686
Wi-Fi 5.5 GHz (U-NII 2C) Chain 1	Edge 1	IEEE 802.11ac 80MHz	0.167
Wi-Fi 5.8 GHz (U-NII 3) Chain 0	Edge 1	IEEE 802.11ac 80MHz	0.448
Wi-Fi 5.8 GHz (U-NII 3) Chain 1	Edge 1	IEEE 802.11ac 80MHz	0.180

Result for highest Simultaneous Transmission SAR values

Technology/Band	Test configuration	Mode	Sum of Highest Reported 1g-SAR (W/kg)
WiFi 5.3 GHz+WiFi 5.3 GHz	Edge 1	IEEE 802.11ac 80MHz	1.168

3 Requirements for Compliance Testing Defined

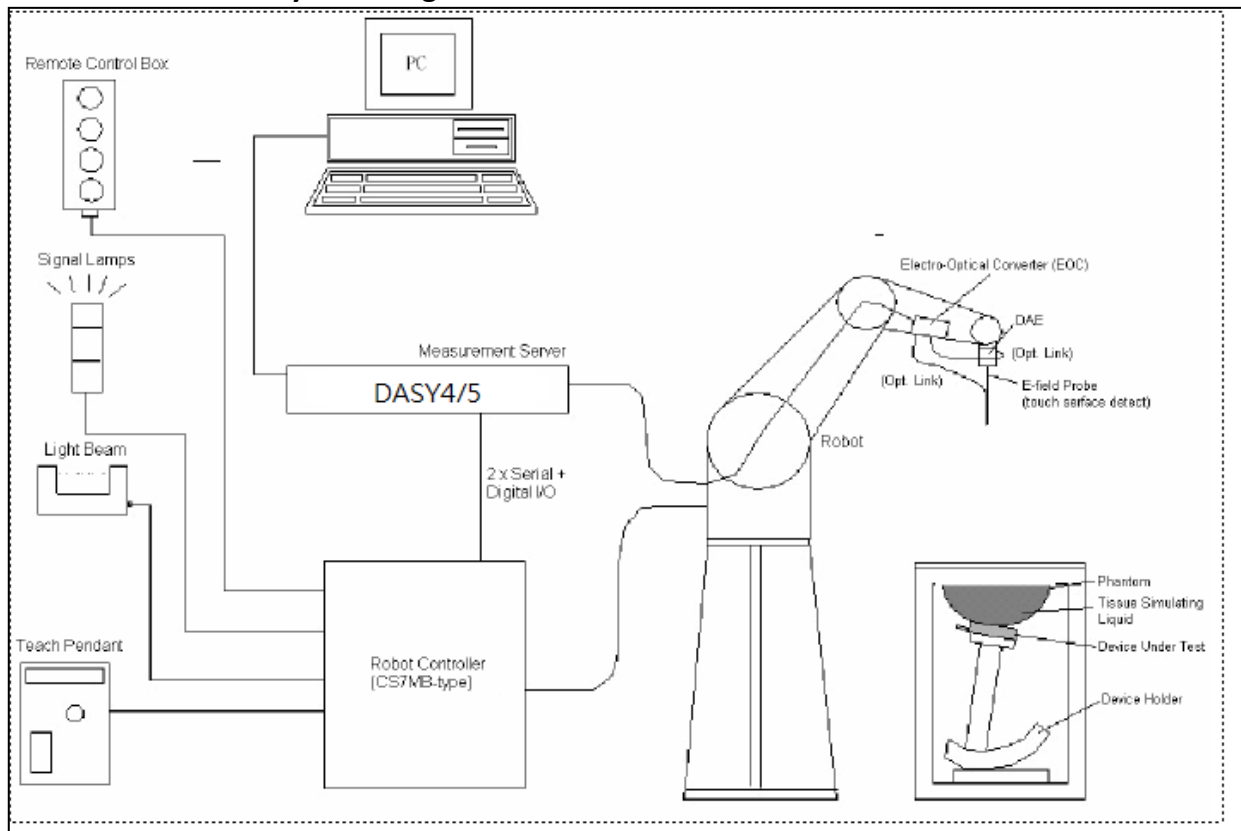
3.1 Requirements for Compliance Testing Defined by the FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996 [1]. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 W/kg for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the FCC 47 CFR §2.1093 and IEEE Std 1528-2013.

4 Dosimetric Assessment System

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m) which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetric probe EX3DV4-SN: 3938 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure and found to be better than ± 0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE 1528 2013.

Report No.: T190503D05-A-SF

4.1 Measurement System Diagram

The DASY4/5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7 or Windows XP.
- DASY4 software version: 4.7, Build 80. DASY5 software version: 52.8.8.1222.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190503D05-A-SF

4.2 System Components**DASY4/DASY5 Measurement Server**

The DASY4/DASY5 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4/DASY5 I/O-board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.



The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.

Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

Report No.: T190503D05-A-SF

EX3DV4 Isotropic E-Field Probe for Dosimetric Measurements

Construction: Symmetrical design with triangular core
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration: Basic Broad Band Calibration in air: 10-3000 MHz.
Conversion Factors (CF) for HSL 900 and HSL 1800
CF-Calibration for other liquids and frequencies upon request.

Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Directivity: ± 0.3 dB in HSL (rotation around probe axis)
 ± 0.5 dB in HSL (rotation normal to probe axis)

Dynamic Range: 10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
(noise: typically < 1 μ W/g)



Dimensions: Overall length: 330 mm (Tip: 20 mm)
Tip diameter: 2.5 mm (Body: 12 mm)
Distance from probe tip to dipole centers: 1 mm

Application: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

SAM Phantom (V4.0)

Construction: The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 2013, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness: 2 ± 0.2 mm**Filling Volume:** Approx. 25 liters**Dimensions:** Height: 810mm; Length: 1000mm; Width: 500mm**SAM Phantom (ELI4)**

Construction: Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4/DASY5 and higher and is compatible with all SPEAG dosimetric probes and dipoles

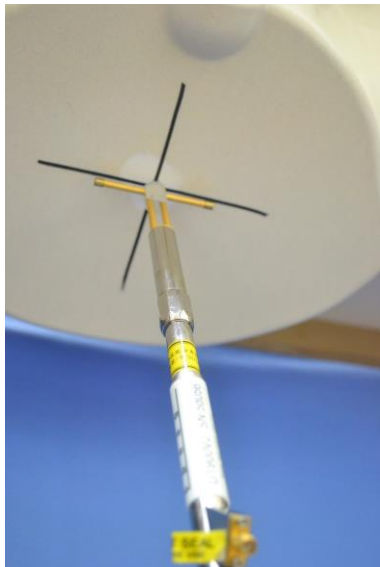
Shell Thickness: 2.0 ± 0.2 mm (sagging: <1%)**Filling Volume:** Approx. 25 liters**Dimensions:** Major ellipse axis: 600 mm**Minor axis:** 400 mm 500mm

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190503D05-A-SF

Device Holder for SAM Twin Phantom

Construction: In combination with the Twin SAM Phantom V4.0 or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).

System Validation Kits for SAM Phantom (V4.0)

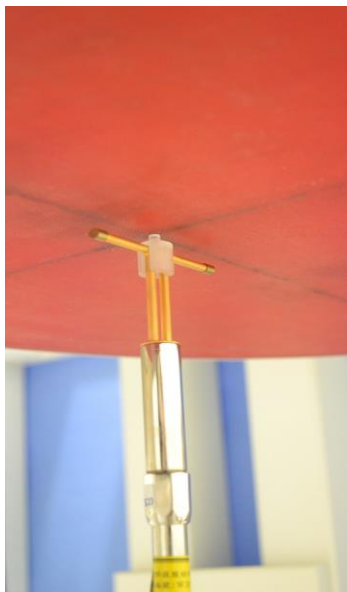
Construction: Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

Frequency: 750, 835, 1750, 1900, 2450 MHz

Return loss: > 20 dB at specified validation position

Power capability: > 100 W ($f < 1\text{GHz}$); > 40 W ($f > 1\text{GHz}$)

Dimensions:
D750V3: dipole length: 178 mm; overall height: 330 mm
D1750V2: dipole length: 75.2 mm; overall height: 301.5 mm
D2450V2: dipole length: 51.5 mm; overall height: 290 mm
D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm

System Validation Kits for ELI4 phantom

Construction: Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

Frequency: 750 1750, 2450, 5300, 5600, 5800 MHz

Return loss: > 20 dB at specified validation position

Power capability: > 100 W ($f < 1\text{GHz}$); > 40 W ($f > 1\text{GHz}$)

Dimensions:
D750V3: dipole length: 178 mm; overall height: 330 mm
D1750V2: dipole length: 72.5 mm; overall height: 300 mm
D2450V2: dipole length: 51.5 mm; overall height: 290 mm
D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

5 Evaluation Procedures

Data Evaluation

The DASY4/DASY5 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	dcp_i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with	V_i	= Compensated signal of channel i	(i = x, y, z)
	U_i	= Input signal of channel i	(i = x, y, z)
	cf	= Crest factor of exciting field	(DASY parameter)
	dcp_i	= Diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H-field probes:

$$H_i = \sqrt{V_i} \cdot \frac{a_{i10} + a_{i11}f + a_{i12}f^2}{f}$$

with	V_i	= Compensated signal of channel i	(i = x, y, z)
	$Norm_i$	= Sensor sensitivity of channel i	(i = x, y, z)

$\mu V/(V/m)^2$ for E0field Probes

$ConvF$	= Sensitivity enhancement in solution
a_{ij}	= Sensor sensitivity factors for H-field probes
f	= Carrier frequency (GHz)
E_i	= Electric field strength of channel i in V/m
H_i	= Magnetic field strength of channel i in A/m

Report No.: T190503D05-A-SF

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with

- SAR = local specific absorption rate in W/kg
- E_{tot} = total field strength in V/m
- σ = conductivity in [mho/m] or [Siemens/m]
- ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{377} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with

- P_{pwe} = Equivalent power density of a plane wave in mW/cm²
- E_{tot} = total electric field strength in V/m
- H_{tot} = total magnetic field strength in A/m

6 SAR Measurement Procedures

6.1 Normal SAR Test Procedure

- Power Reference Measurement

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4/DASY5 software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, the grid resolution has to less than 15 mm by 15 mm at frequency $\leq 2\text{GHz}$; the grid resolution has to less than 12mm by 12 mm at frequency between 2GHz to 4GHz; grid resolution has to less than 10 mm by 10 mm at frequency between 4GHz to 6GHz.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

	$\leq 3\text{ GHz}$	$> 3\text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1\text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5\text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$	$\leq 2\text{ GHz: } \leq 15\text{ mm}$ $2 - 3\text{ GHz: } \leq 12\text{ mm}$	$3 - 4\text{ GHz: } \leq 12\text{ mm}$ $4 - 6\text{ GHz: } \leq 10\text{ mm}$
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Report No.: T190503D05-A-SF

• Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures points in accordance with the frequency can be divided into three parts. (1)The zoom scan volume was set to 5x5x7 points at frequency ≤ 2 GHz. (2) The zoom scan volume was set to 7x7x7 points at frequency between 2GHz to 4GHz (3) The zoom scan volume was set to 7x7x12 points at frequency between 4GHz to 6GHz. The measures points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm	3 – 4 GHz: ≤ 5 mm 4 – 6 GHz: ≤ 4 mm
Maximum zoom scan spatial resolution, normal to phantom surface	Uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$:between 1 st two points losest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Maximum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	

• Power Drift Measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have DASY4/DASY5 software stop the measurements if this limit is exceeded.

• Z-Scan

The Z Scan job measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. A user can anchor the grid to the current probe location. As with any other grids, the local Z-axis of the anchor location establishes the Z-axis of the grid.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

7 Measurement Uncertainty

According to KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz section 2.8.2, SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is ≥ 1.5 W/kg for 1-g SAR, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

8 Device Under Test

8.1 Wireless Technologies

Wireless technologies	Tx Frequency Bands	Operating mode	Duty Cycle used for testing
Wi-Fi	2.4GHz Band	802.11b 802.11g 802.11n(HT20)	100%
Wi-Fi	5GHz Band	802.11a 802.11a(HT20) 802.11a (HT40) 802.11a (VHT80)	802.11a (VHT80): 98%
Bluetooth	2.4GHz	2.1 4.0 LE	N/A

8.2 Maximum Tune-up Power

Band (GHz)	Antenna	Mode	RF Output Power (dBm)
			Max. tune-up power
2.4	Chain 0	802.11b	12.50
		802.11b (Channel 1)	10.50
		802.11g	14.50
		802.11n HT20	15.50
2.4	Chain 1	802.11b	13.50
		802.11g	14.50
		802.11n HT20	15.50
2.4	Chain 0+1	802.11b	16.00
		802.11g	17.50
		802.11n HT20	18.50
Band (GHz)	Antenna	Mode	RF Output Power (dBm)
			Max. tune-up power
5.2 (UNII-1)	Chain 0	802.11a	10.00
		802.11a (Channel 36)	8.00
		802.11n HT20	8.00
		802.11n HT40	12.00
		802.11ac VHT80	12.00
5.3 (UNII-2A)	Chain 0	802.11a	9.50
		802.11n HT20	9.50
		802.11n HT40	10.00
		802.11ac VHT80	12.50
5.5 (UNII-2C)	Chain 0	802.11a	7.50
		802.11n HT20	8.50
		802.11n HT40	9.00
		802.11ac VHT80	10.00
5.8 (UNII-3)	Chain 0	802.11a	6.00
		802.11n HT20	7.50
		802.11n HT40	6.50
		802.11ac VHT80	9.50

Band (GHz)	Antenna	Mode	RF Output Power (dBm)
			Max. tune-up power
5.2 (UNII-1)	Chain 1	802.11a	10.00
		802.11n HT20	9.50
		802.11n HT40	11.00
		802.11ac VHT80	10.00
5.3 (UNII-2A)	Chain 1	802.11a	10.50
		802.11n HT20	10.00
		802.11n HT40	10.50
		802.11ac VHT80	13.50
5.5 (UNII-2C)	Chain 1	802.11a	7.50
		802.11a (Channel 140)	5.00
		802.11n HT20	8.50
		802.11n HT40	9.00
		802.11n HT40 (Channel 134)	7.00
		802.11ac VHT80	10.00
5.8 (UNII-3)	Chain 1	802.11a	5.50
		802.11n HT20	7.00
		802.11n HT40	6.50
		802.11ac VHT80	10.00
Mode			Max. tune-up power(dBm)
Bluetooth 2.1 1Mbps			5.5
Bluetooth 2.1 1Mbps (Channel 0)			3.0
Bluetooth EDR 3Mbps			0.5
Bluetooth EDR 3Mbps (Channel 78)			2.0
Bluetooth LE			5.5

Band (GHz)	Antenna	Mode	RF Output Power(dBm)
			Max. tune-up power
5.2 (UNII-1)	Chain 0+1	802.11a	13.00
		802.11a (Channel 36)	11.00
		802.11n HT20	11.50
		802.11n HT40	14.50
		802.11ac VHT80	13.50
5.3 (UNII-2A)	Chain 0+1	802.11a	13.00
		802.11n HT20	12.50
		802.11n HT40	13.50
		802.11ac VHT80	16.00
5.5 (UNII-2C)	Chain 0+1	802.11a	10.50
		802.11n HT20	11.50
		802.11n HT40	12.00
		802.11ac VHT80	13.00
5.8 (UNII-3)	Chain 0+1	802.11a	8.50
		802.11n HT20	10.50
		802.11n HT40	9.50
		802.11ac VHT80	12.50

8.3 Simultaneous Transmission

RF Exposure Condition	Transmit Configurations
Wi-Fi +BT	Wi-Fi / BT 2.4GHz (Chain 0) + 2.4GHz (Chain 1) 5GHz (Chain 0) +5GHz (Chain 1) 2.4GHz (Chain 0) + 2.4GHz (Chain 1) + BT 5GHz (Chain 0) +5GHz (Chain 1) + BT Wi-Fi 2.4GHz (Chain 0) 2.4GHz (Chain 1) 5GHz (Chain 0) 5GHz (Chain 1) BT BT (Chain 0)

Note(s):

1. For BT mode only Chain 0 can be used as transmitting.
2. WLAN 2.4 GHz and WLAN 5GHz can't transmit at same time.
3. WLAN and Bluetooth technology can transmit at same time.

9 RF Output Power Measurement

According to KDB248227 D01 802.11 Wi-Fi SAR v02r02 section 4, the default power measurement procedures are:

- 1) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.
- 2) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.
 - a) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
 - b) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.
- 3) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

9.1 Wi-Fi (2.4GHz Band)

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Avg. Pwr (dBm)			Maximum Tune-up Pwr (dBm)			SAR Test (Yes/No)	Note
					Chain 0	Chain 1	MIMO	Chain 0	Chain 1	MIMO		
2.4	802.11b	1	1	2412	10.08	11.88		10.50	13.50		Yes	
			6	2437	12.01	13.27		12.50	13.50			
			11	2462	11.95	13.24		12.50	13.50			
	802.11g	6	1	2412	No Required			14.50	14.50		No	1
			6	2437				14.50	14.50			
			11	2462				14.50	14.50			
	802.11n HT20	MCS0	1	2412	No Required			15.50	15.50		No	1
			6	2437				15.50	15.50			
			11	2462				15.50	15.50			

1. Output Power and SAR is not required for 802.11 g/n HT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

9.2 Wi-Fi (5GHz Band)

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Avg. Pwr (dBm)			Maximum Tune-up Pwr (dBm)			SAR Test (Yes/No)	Note
					Chain 0	Chain 1	MIMO	Chain 0	Chain 1	MIMO		
5.2 (U-NII 1)	802.11a	6	44-48	5220-5240	Not Required			10.00	10.00		No	1
	802.11a	6	36	5180				8.00	10.00		No	1
	802.11n (HT20)	MCS0	36-48	5180-5240				8.00	9.50		No	1
	802.11n (HT40)	MCS0	38-46	5190-5230				12.00	11.00		No	1
	802.11ac (VHT80)	VHT0	42	5210				12.00	10.00		No	1
5.3 (U-NII 2A)	802.11a	6	36-48	5260	Not Required			9.50	10.50		No	2
	802.11n (HT20)	MCS0	52-64	5260-5320				9.50	10.00		No	2
	802.11n (HT40)	MCS0	54-62	5270-5310				10.00	10.50		No	2
	802.11ac (VHT80)	VHT0	58	5290	12.14	13.20		12.50	13.50		Yes	

Note(s):

- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I.
 - > 1.2 W/kg, both bands should be tested independently for SAR.
- Output Power and SAR measurement is not required for 802.11a / 802.11n HT20/n HT40 channels when the specified maximum tune-up powers are less or same with 802.11ac.

Report No.: T190503D05-A-SF

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Avg. Pwr (dBm)			Maximum Tune-up Pwr (dBm)			SAR Test (Yes/No)	Note
					Chain 0	Chain 1	MIMO	Chain 0	Chain 1	MIMO		
5.5 (U-NII-2C)	802.11a	6	100-116	5500-5580	Not Required			7.50	7.50		No	1
	802.11a	6	140	5700				7.50	5.00		No	1
	802.11n (HT20)	MCS0	100-140	5500-5700				8.50	8.50		No	1
	802.11n (HT40)	MCS0	102-110	5510-5550				9.00	9.00		No	1
	802.11n (HT40)	MCS0	134	5670				9.00	7.00		No	1
	802.11ac (VHT80)	VHT0	106	5530	9.92	9.96		10.00	10.00		Yes	

Note(s):

- Output Power and SAR measurement is not required for / 802.11a /802.11n HT20/n HT40 channels when the specified maximum tune-up powers are less or same with 802.11 ac.

Report No.: T190503D05-A-SF

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Avg. Pwr (dBm)			Maximum Tune-up Pwr (dBm)			SAR Test (Yes/No)	Note
					Chain 0	Chain 1	MIMO	Chain 0	Chain 1	MIMO		
5.8 (U-NII-3)	802.11a	6	149-165	5745-5825	Not Required			6.00	5.50		No	1
	802.11n (HT20)	MCS0	149-165	5745-5825				7.50	7.00		No	1
	802.11n (HT40)	MCS0	151-159	5755-5795				6.50	6.50		No	1
	802.11ac (VHT80)	VHT0	155	5775	9.14	9.74		9.50	10.00		Yes	

Note(s):

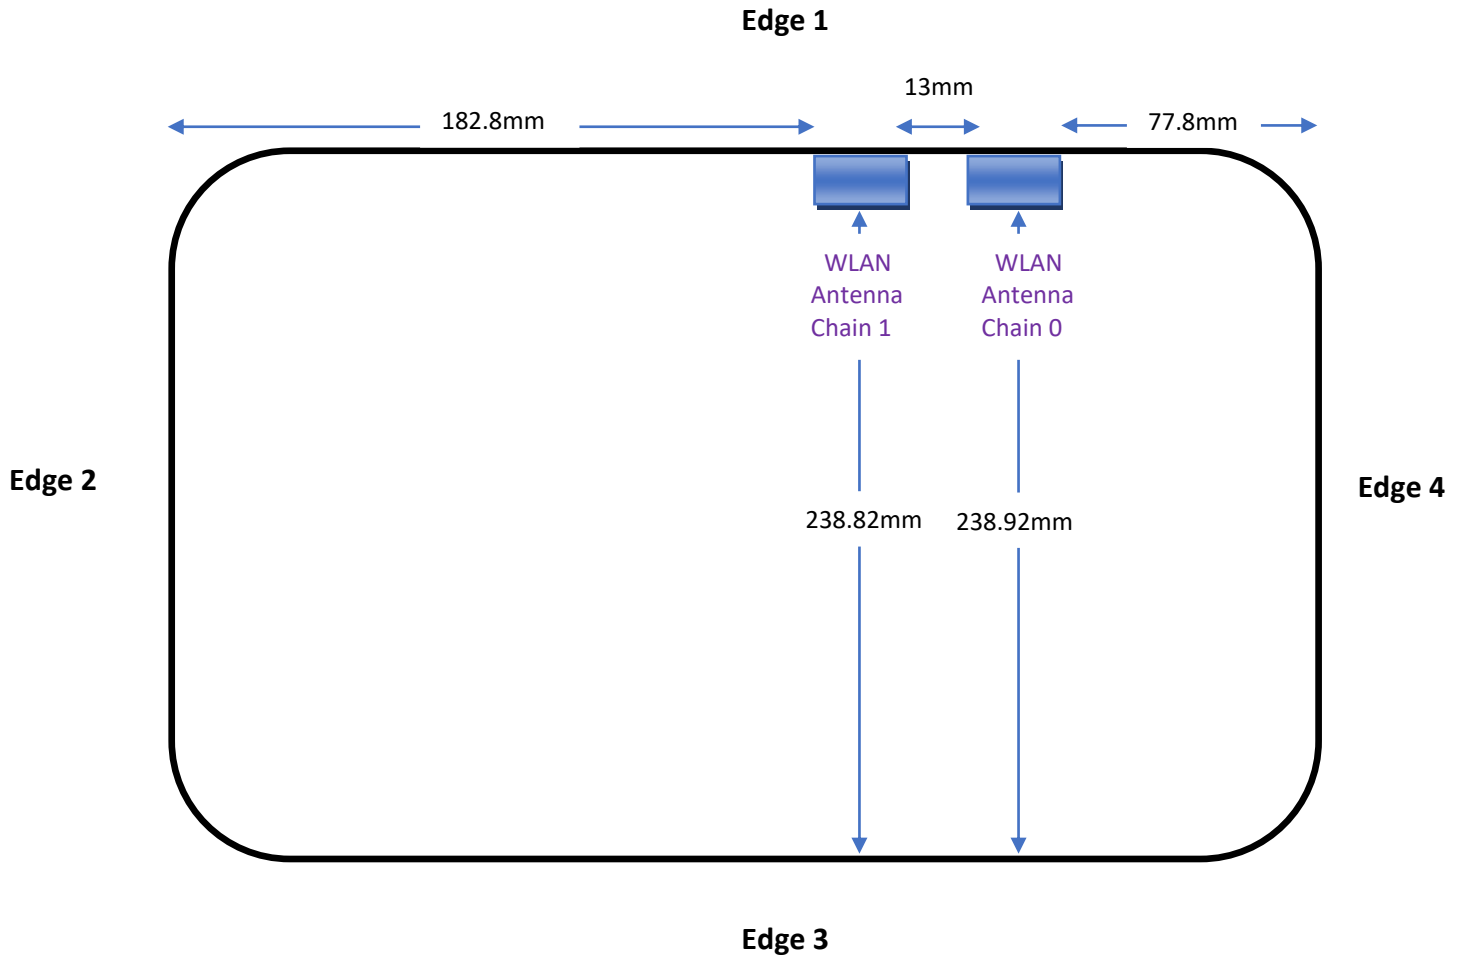
- Output Power and SAR measurement is not required for 802.11a / 802.11n HT20/n HT40 channels when the specified maximum tune-up powers are less or same with 802.11 ac.

9.3 Bluetooth

Modulation	Channel No.	Frequency(MHz)	Avg. power(dBm)
DH5	Low	2402	2.92
	Middle	2441	4.08
	High	2480	5.04
3DH5	Low	2402	-0.93
	Middle	2441	0.35
	High	2480	1.36
BLE	Low	2402	3.56
	Middle	2440	3.86
	High	2480	5.13

Per exclusion calculations in Section 10, SAR testing for Bluetooth is not required.

10 Antenna Location



Back View

11 Summary of SAR Test Exclusion Configurations

11.1 Standalone SAR Test Exclusion Calculations

Since the Dedicated Host Approach is applied, the standalone SAR test exclusion procedure in KDB 447498 section 4.3.1 is applied in conjunction with KDB 616217 section 4.3 to determine the minimum test separation distance:

1. According to KDB 447498 Section 4.1 5) if the antenna is at close proximity to user then the outer surface of the DUT should be treated as the radiating surface. The test separation distance is then determined by the smallest distance between the outer surface of the device and the user. For the purposes of this report close proximity has been defined as closer than 50 mm. For antennas <50 mm from the rear or edge the separation distance used for the estimated SAR calculations is 0 mm.
2. When the minimum test separation distance is < 5mm, a distance of 5mm is applied to determine SAR test exclusion.
3. When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.
4. If the antenna to DUT adjacent edge or bottom separation distance >50mm the actual antenna to user separation distance is used to determine SAR exclusion and estimated SAR value.

Refer to Appendix for the specific details on the antenna-to-antenna and antenna-to-edge distances used for test exclusion calculations.

11.1.1 SAR Exclusion Calculations for Wi Fi Antenna < 50mm from the User

According to KDB 447498 v06 r02 in section 4.3.1, if the calculated threshold value is > 3 then SAR testing is required.

For WLAN

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Back	Edge1	Edge2	Edge3	Edge4	Back	Edge1	Edge2	Edge3	Edge4
Wi-Fi Chain 0	2.4GHz	2462	15.5	35	17.92	5.00	227.80	238.92	77.80	3.06	10.98	>50mm	>50mm	>50mm
Wi-Fi Chain 0	5.3GHz U-NII-2A	5290	12.5	18	17.92	5.00	227.80	238.92	77.80	2.31	8.28	>50mm	>50mm	>50mm
Wi-Fi Chain 0	5.5GHz U-NII-2C	5530	10.0	10	17.92	5.00	227.80	238.92	77.80	1.31	4.70	>50mm	>50mm	>50mm
Wi-Fi Chain 0	5.8GHz U-NII-3	5775	9.5	9	17.92	5.00	227.80	238.92	77.80	1.21	4.33	>50mm	>50mm	>50mm
Wi-Fi Chain 0	BLE	2480	0.0	1	17.92	5.00	227.80	238.92	77.80	0.09	0.31	>50mm	>50mm	>50mm

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Back	Edge1	Edge2	Edge3	Edge4	Back	Edge1	Edge2	Edge3	Edge4
Wi-Fi Chain 1	2.4GHz	2462	15.5	35	17.92	5.00	182.80	238.82	122.80	3.06	10.98	>50mm	>50mm	>50mm
Wi-Fi Chain 1	5.3GHz U-NII-2A	5290	13.5	22	17.92	5.00	182.80	238.82	122.80	2.82	10.12	>50mm	>50mm	>50mm
Wi-Fi Chain 1	5.5GHz U-NII-2C	5530	10.0	10	17.92	5.00	182.80	238.82	122.80	1.31	4.70	>50mm	>50mm	>50mm
Wi-Fi Chain 1	5.8GHz U-NII-3	5775	10.0	10	17.92	5.00	182.80	238.82	122.80	1.34	4.81	>50mm	>50mm	>50mm

Note: Bluetooth Calculated Threshold Value not > 3, then SAR testing not required.

11.1.2 SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User

According to KDB 447498 v06 r02, if the calculated Power threshold is less than the output power then SAR testing is required.

For WLAN

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Back	Edge1	Edge2	Edge3	Edge4	Back	Edge1	Edge2	Edge3	Edge4
Wi-Fi Chain 0	2.4GHz	2462	15.5	35	17.92	5	227.8	238.92	77.80	<50mm	<50mm	1873.60	1984.80	373.60
Wi-Fi Chain 0	5.3GHz U-NII-2A	5320	12.5	18	17.92	5	227.8	238.92	77.80	<50mm	<50mm	1843.22	1954.23	343.03
Wi-Fi Chain 0	5.5GHz U-NII-2C	5500	10.0	10	17.92	5	227.8	238.92	77.80	<50mm	<50mm	1841.79	1953.16	341.96
Wi-Fi Chain 0	5.8GHz U-NII-3	5785	9.5	9	17.92	5	227.8	238.92	77.80	<50mm	<50mm	1840.42	1951.56	340.36
Wi-Fi Chain 0	BLE	2480	0.0	1	17.92	5	227.8	238.92	77.80	<50mm	<50mm	1873.25	1984.45	373.25

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Back	Edge1	Edge2	Edge3	Edge4	Back	Edge1	Edge2	Edge3	Edge4
Wi-Fi Chain 1	2.4GHz	2462	15.5	35	17.92	5	182.8	238.82	122.80	<50mm	<50mm	1423.60	1983.80	823.60
Wi-Fi Chain 1	5.3GHz U-NII-2A	5290	13.5	22	17.92	5	182.8	238.82	122.80	<50mm	<50mm	1393.22	1953.42	793.22
Wi-Fi Chain 1	5.5GHz U-NII-2C	5530	10.0	10	17.92	5	182.8	238.82	122.80	<50mm	<50mm	1391.79	1951.99	791.79
Wi-Fi Chain 1	5.8GHz U-NII-3	5775	10.0	10	17.92	5	182.8	238.82	122.80	<50mm	<50mm	1390.42	1950.62	790.42

Note. Bluetooth Calculated Threshold Value not > 3, then SAR testing not required.

11.1.3 Estimate SAR

According to KDB 447498 D01 v06, The simultaneously transmission analysis for Bluetooth estimated SAR based on the formula below

Band	Max Power (dBm)	Separation distance (mm)	Frequency (GHz)	Estimated SAR
Bluetooth	5.5	5	2.48	0.17

11.1.4 SAR Required Test Configuration For Wi-Fi and Bluetooth

Test Configurations	Back	Edge1	Edge2	Edge3	Edge4
Wi-Fi 2.4GHz Chain 0	Yes	Yes	No	No	No
Wi-Fi 5.3GHz Chain 0	No	Yes	No	No	No
Wi-Fi 5.5GHz Chain 0	No	Yes	No	No	No
Wi-Fi 5.8GHz Chain 0	No	Yes	No	No	No
Bluetooth Chain 0	No	No	No	No	No

Test Configurations	Back	Edge1	Edge2	Edge3	Edge4
Wi-Fi 2.4GHz Chain 1	Yes	Yes	No	No	No
Wi-Fi 5.3GHz Chain 1	No	Yes	No	No	No
Wi-Fi 5.5GHz Chain 1	No	Yes	No	No	No
Wi-Fi 5.8GHz Chain 1	No	Yes	No	No	No

Note(s):

1. Yes = SAR is required.
2. No = SAR is not required.

12 Exposure Limit

(A). Limits for Occupational/Controlled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.4	8.0	2.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

<p style="text-align: center;">NOTE</p> <p style="text-align: center;">GENERAL POPULATION/UNCONTROLLED EXPOSURE</p> <p style="text-align: center;">PARTIAL BODY LIMIT</p> <p style="text-align: center;">1.6 W/kg</p>

13 Tissue Dielectric Properties

13.1 Test Liquid Confirmation

Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below. 5% may not be easily achieved at certain frequencies.

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE 1528 2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE 1528 2013 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE 1528 2013

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190503D05-A-SF

13.2 Typical Composition of Ingredients for Liquid Tissue Phantoms

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

alt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ⁺ resistivity

HEC: Hydroxy thyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra-pure): Polyethylene glycol mono [4-(1, 1, 3, 3-tetramethylbutyl)phenyl]ether

Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

13.3 Simulating Liquids Parameter Check Results

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	% dev ϵ_r	% dev σ
Body	Jul, 18. 2019	2412	52.751	1.914	52.091	1.897	-1.25%	-0.87%
		2437	52.717	1.938	52.021	1.921	-1.32%	-0.86%
		2450	52.700	1.950	51.999	1.934	-1.33%	-0.82%
		2462	52.685	1.967	51.976	1.950	-1.35%	-0.87%
	Jul, 12. 2019	5270	48.919	5.381	48.768	5.359	-0.31%	-0.41%
		5290	48.892	5.404	48.726	5.384	-0.34%	-0.38%
		5300	48.879	5.416	48.670	5.397	-0.43%	-0.35%
		5310	48.865	5.428	48.699	5.405	-0.34%	-0.42%
	Jul, 15. 2019	5510	48.594	5.661	48.501	5.634	-0.19%	-0.48%
		5530	48.566	5.685	48.469	5.659	-0.20%	-0.45%
		5550	48.539	5.708	48.428	5.677	-0.23%	-0.54%
		5600	48.471	5.766	48.399	5.736	-0.15%	-0.53%
		5670	48.376	5.848	48.265	5.822	-0.23%	-0.45%
	Jul, 17. 2019	5745	48.275	5.936	48.168	5.903	-0.22%	-0.55%
		5775	48.234	5.971	48.142	5.942	-0.19%	-0.48%
		5785	48.220	5.982	48.100	5.953	-0.25%	-0.49%
		5800	48.200	6.000	48.080	5.969	-0.25%	-0.52%
		5825	48.166	6.029	48.060	5.999	-0.22%	-0.50%

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

14 Measurement Uncertainty

According to KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz section 2.8.2, SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is ≥ 1.5 W/kg for 1-g SAR, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

15 System Performance Check

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications. The system performance check results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm
- The DASY5 system with an E-field probe EX3DV4 SN: 3938 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15 mm (below 1 GHz) and 10 mm (above 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 10mm was aligned with the dipole.
- Special 7x7x7 fine cube was chosen for cube integration ($dx=dy=5$ mm, $dz=5$ mm).
- Distance between probe sensors and phantom surface was set to 3.0 mm.
- The dipole input power (forward power) was $100\text{ mW} \pm 3\%$.
- The results are normalized to 1 W input power.

Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D2450V2	835	2019/06/27	2450	1g	53.1	51.0
				10g	24.9	24.2
D5GHzV2	1040	2019/06/24	5300	1g	82.4	72.9
				10g	23.5	20.5
D5GHzV2	1040	2019/06/24	5600	1g	84.8	80.5
				10g	24.2	22.6
D5GHzV2	1040	2019/06/24	5800	1g	80.0	75.5
				10g	22.7	21.0

15.1 System Performance Check Results

Date	System Dipole			Parameters	Target[W/kg]	Measured [W/kg]	Deviation [%]	Limited [%]
	Type	Serial No.	Liquid					
2019/7/18	D2450V2	835	Body	1g SAR:	51.00	51.60	1.18	± 10
				10g SAR:	24.20	24.44	0.99	± 10
2019/7/12	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	72.90	72.20	-0.96	± 10
				10g SAR:	20.50	20.10	-1.95	± 10
2019/7/15	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	80.50	81.80	1.61	± 10
				10g SAR:	22.60	22.80	0.88	± 10
2019/7/17	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	75.50	77.40	2.52	± 10
				10g SAR:	21.00	21.40	1.90	± 10

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

16 SAR Measurements Results

According to KDB248227D01 802.11 Wi-Fi SAR v02r02, the SAR test reduction procedures are:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。



Report No.: T190503D05-A-SF
Wi-Fi (2.4GHz Band):

Page 42 / 47
Rev. 00

Test Mode	Band (GHz)	Mode	Dist. (mm)	Test Position	Ch#	Freq. (MHz)	Chain	Power (dBm)		Duty Cycle (%)	Area Scan 1g SAR (W/kg)	Zoom Scan 1g SAR (W/kg)	Reported SAR (W/kg)	Note	Plot No.
								Tune up limit	Meas.						
FCC	2.4G	IEEE 802.11b 1Mbps	0	Back	6	2437	chain0	12.50	12.01	100	0.004	0.003	0.003		
			0	Edge 1	6	2437	chain0	12.50	12.01	100	0.025	0.029	0.032		1
			0	Back	6	2437	chain1	13.50	13.27	100	0.010	0.009	0.010		
			0	Edge 1	6	2437	chain1	13.50	13.27	100	0.052	0.069	0.073		2

Note(s):

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190503D05-A-SF
Wi-Fi (5GHz Band):

Page 43 / 47
 Rev. 00

Test Mode	Band (GHz)	Mode	Dist. (mm)	Test Position	Ch#	Freq. (MHz)	Chain	Power (dBm)		Duty Cycle (%)	Area Scan 1g SAR (W/kg)	Zoom Scan 1g SAR (W/kg)	Reported SAR (W/kg)	Note	Plot No.
								Tune up limit	Meas.						
FCC	5.3G	IEEE 802.11ac 80MHz VHTO	0	Edge 1	58	5290	chain0	12.50	12.14	98	0.595	0.698	0.773		3
			0	Edge 1	58	5290	chain1	13.50	13.20	98	0.322	0.361	0.395		4
	5.6G	IEEE 802.11ac 80MHz VHTO	0	Edge 1	106	5530	chain0	10.00	9.92	98	0.560	0.660	0.686		5
			0	Edge 1	106	5530	chain1	10.00	9.96	98	0.152	0.162	0.167		6
	5.8G	IEEE 802.11ac 80MHz VHTO	0	Edge 1	155	5775	chain0	9.50	9.14	98	0.353	0.404	0.448		7
			0	Edge 1	155	5775	chain1	10.00	9.74	98	0.149	0.166	0.180		8

Note(s):

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

17 Simultaneous Transmission SAR Analysis

17.1 Sum of the SAR for Simultaneous Transmission Analysis

17.1.1 Sum of the SAR for WLAN

2.4G Band Chain 0 + 2.4G Band Chain 1

Test Position	Simultaneous Transmission Scenario		1+2 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2		
	Wi-Fi Chain 0 2.4 GHz Band	Wi-Fi Chain 1 2.4 GHz Band		
Edge 1	0.032	0.073	0.105	No

Note(s):

As the Sum of the SAR is less than 1.6W/Kg, so SPLSR is not required.

2.4G Band Chain 0 + 2.4G Band Chain 1 + BT

Test Position	Simultaneous Transmission Scenario			1+2+3 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2	3		
	Wi-Fi Chain 0 2.4 GHz Band	Wi-Fi Chain 1 2.4 GHz Band	Bluetooth		
Edge 1	0.032	0.073	0.042	0.147	No

Note(s):

As the Sum of the SAR is less than 1.6W/Kg, so SPLSR is not required.

5G Band Chain 0 + 5G Band Chain 1

Test Position	Simultaneous Transmission Scenario		1+2 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2		
	Wi-Fi Chain 0 5 GHz Band	Wi-Fi Chain 1 5 GHz Band		
Edge 1	0.773	0.395	1.168	No

Note(s):

As the Sum of the SAR is less than 1.6W/Kg, so SPLSR is not required.

5G Band Chain 0 + 5G Band Chain 1 + BT

Test Position	Simultaneous Transmission Scenario			1+2+3 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2	3		
	Wi-Fi Chain 0 5 GHz Band	Wi-Fi Chain 1 5 GHz Band	Bluetooth		
Edge 1	0.773	0.395	0.042	1.210	No

Note(s):

As the Sum of the SAR is less than 1.6W/Kg, so SPLSR is not required.

18 Equipment List & Calibration Status

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Cycle(year)	Calibration Due
Dielectric parameter probes	Speag	DAKS-3.5	1053	1	2020/01/28
Power Meter	Agilent	E4416A	GB41291611	1	2019/08/19
Power Sensor	Agilent	8481H	MY41091956	1	2019/08/19
Data Acquisition Electronics (DAE)	SPEAG	DAE4	877	1	2020/03/21
Dosimetric E-Field Probe	SPEAG	EX3DV4	3938	1	2019/10/23
2450 MHz System Validation Dipole	SPEAG	D2450V2	835	1	2020/07/26
5000 MHz System Validation Dipole	SPEAG	D5GHzV2	1040	1	2020/07/23
Robot	Staubli	RX90L	F02/5T69A1/A/01	N/A	N/A
Amplifier	Mini-Circuit	ZVE-8G	665500309	N/A	N/A
Amplifier	Mini-Circuit	ZHL-1724HLN	D072602#2	N/A	N/A
Thermometer	Comet	S3120	12932714	1	2020/02/27
Signal Grenerator	Aglient	83630B	3844A01022	1	2020/05/27
Directional Couplers	Aglient	87301D	MY44350252	1	2019/07/23

Report No.: T190503D05-A-SF

19 Facilities

All measurement facilities used to collect the measurement data are located at

- ☐ No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C.
- ☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
- ☐ No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

20 Reference

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environ-mental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commision, O_ce of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-_eld scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz - 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 2005.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-_eld probes in tissue simulating liquids at mobile communications frequencies", in ICECOM _ 97, Dubrovnik, October 15{17, 1997, pp. 120{124.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-_eld probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172{175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865{1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992..Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

21 Attachments

Exhibit	Content
1	System Performance Check Plots
2	SAR Test Data Plots
3	SAR Equipment calibration report-1
4	SAR Equipment calibration report-2
5	T190115W01-SF PHOTOS

END OF REPORT