



MEASUREMENT REPORT

FCC Part 15B

FCC ID: H8N-BLT2010
APPLICANT: ASKEY COMPUTER CORP

Application Type: Certification
Product: Bluetooth Module
Model No.: BLT2010(RoHS)
FCC Classification: FCC Class B Digital Device (JBP)
FCC Rule Part(s): FCC Part 15 Subpart B
Test Procedure(s): ANSI C63.4: 2014
Test Date: January 10 ~ 13, 2016

Reviewed By : Robin Wu
(Robin Wu)
Approved By : Marlin Chen
(Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date
1507RSU00815	Rev. 01	Initial report	01-21-2016

CONTENTS

Description	Page
§2.1033 General Information	4
1. INTRODUCTION	5
1.1. Scope	5
1.2. MRT Test Location	5
2. PRODUCT INFORMATION	6
2.1. Equipment Description.....	6
2.2. Device Capabilities	6
2.3. Test Configuration	7
2.4. Test System Details.....	7
2.5. Test Software	7
2.6. EMI Suppression Device(s)/Modifications	7
2.7. Labeling Requirements	8
3. DESCRIPTION OF TEST	9
3.1. Evaluation Procedure	9
3.2. AC Line Conducted Emissions.....	9
3.3. Radiated Emissions	10
4. TEST EQUIPMENT CALIBRATION DATE	11
5. MEASUREMENT UNCERTAINTY	12
6. TEST RESULT	13
6.1. Summary	13
6.2. Conducted Emission Measurement	14
6.2.1. Test Limit	14
6.2.2. Test Setup.....	14
6.2.3. Test Result of Conducted Emissions	15
6.3. Radiated Emission Measurement	17
6.3.1. Test Limit	17
6.3.2. Test Setup.....	17
6.3.3. Test Result of Radiated Emissions	19
7. CONCLUSION.....	23

§2.1033 General Information

Applicant:	ASKEY COMPUTER CORP
Applicant Address:	10F, No.119, JIANKANG RD., ZHONGHE DIST., NEW TAIPEI CITY 23585, TAIWAN, R.O.C.
Manufacturer:	ASKEY COMPUTER CORP
Manufacturer Address:	10F, No.119, JIANKANG RD., ZHONGHE DIST., NEW TAIPEI CITY 23585, TAIWAN, R.O.C.
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT FCC Registration No.:	809388
Model No.:	BLT2010(RoHS)
FCC ID:	H8N-BLT2010
Test Device Serial No.:	N/A ☐ Production ☒ Pre-Production ☐ Engineering
FCC Classification:	FCC Class B Digital Device (JBP)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Bluetooth Module
Model No.	BLT2010(RoHS)
Bluetooth Frequency	2402~2480MHz
Bluetooth Version	v3.0 + HS, v4.0
Type of modulation	FHSS
Data Rate	1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps (8DPSK)
Antenna Type	Internal
Antenna Gain	1dBi

2.2. Device Capabilities


This device contains the following capabilities:

Bluetooth (v3.0 + HS, v4.0)

2.3. Test Configuration

The **Bluetooth Module FCC ID: H8N-BLT2010** was tested per the guidance FCC Part 15 Subpart B: 2013 and ANSI C63.4: 2014 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

Connection Diagram

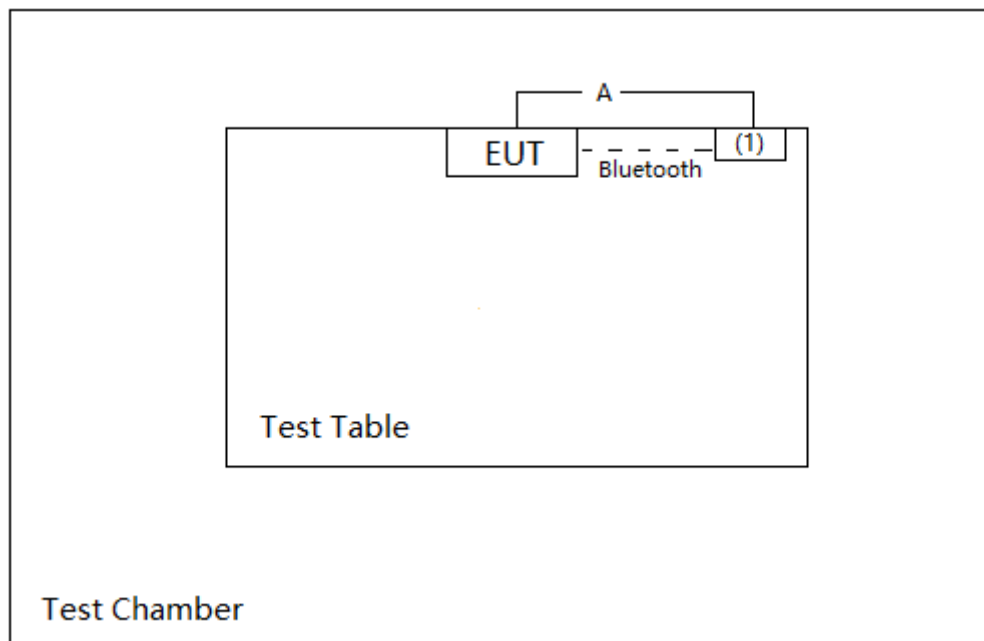

Signal Cable Type		Signal Cable Description
A	USB Cable	Shielding, 2m

2.4. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Lenovo	E430c	MP-4CFX213/10	Non-Shielded, 1.8m

2.5. Test Software

Not applicable.

2.6. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.7. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical Equipment in the Range of 9kHz to 18GHz (ANSI C63.4-2014) was used in the measurement of the **Bluetooth Module FCC ID: H8N-BLT2010**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150 kHz to 30 MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. Line conducted emissions test results are shown in Section 6.2.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30 MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30 MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB beam-width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2016/11/03
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2016/11/03
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2016/11/03
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06114	1 year	2016/11/20

Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	E4447A	MRTSUE06028	1 year	2016/06/23
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2016/11/03
Preamplifier	Agilent	83017A	MRTSUE06020	1 year	2016/03/29
TRILOG Antenna	Schwarzbeck	VULB9168	MRTSUE06172	1 year	2016/12/11
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2016/11/07
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06115	1 year	2016/11/20

Software	Version	Function
e3	V8.3.5	EMI Test Software

5. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement – SR2	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
150kHz~30MHz: 3.5dB	
Radiated Emission Measurement – AC1	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
Horizontal: 30MHz~1GHz: 4.07dB	
1GHz~18GHz: 4.16 dB	
Vertical: 30MHz~1GHz: 4.18 dB	
1GHz~18GHz: 4.76 dB	

6. TEST RESULT

6.1. Summary

Product Name: Bluetooth Module
FCC ID: H8N-BLT2010
FCC Classification: FCC Class B Digital Device (JBP)
Test Mode: Communication with Notebook

FCC Part Section(s)	Test Description	Test Result
15.107	Conducted Emissions	Pass
15.109	Radiated Emissions	Pass

6.2. Conducted Emission Measurement


6.2.1. Test Limit

FCC Part 15.107 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.2.2. Test Setup

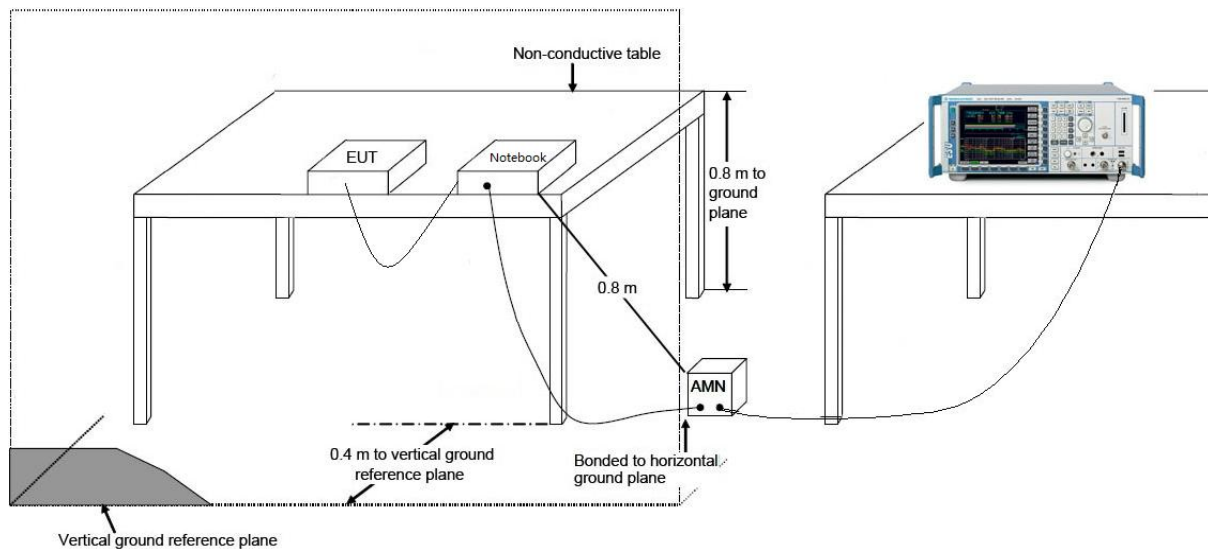

6.2.3. Test Result of Conducted Emissions

Site: SR2	Time: 2016/01/13 - 10:40
Limit: FCC_Part15.107_CE_AC Power_ClassB	Engineer: Vince Yu
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Bluetooth Module	Power: AC 120V/60Hz
Test Mode: Communication with Notebook	

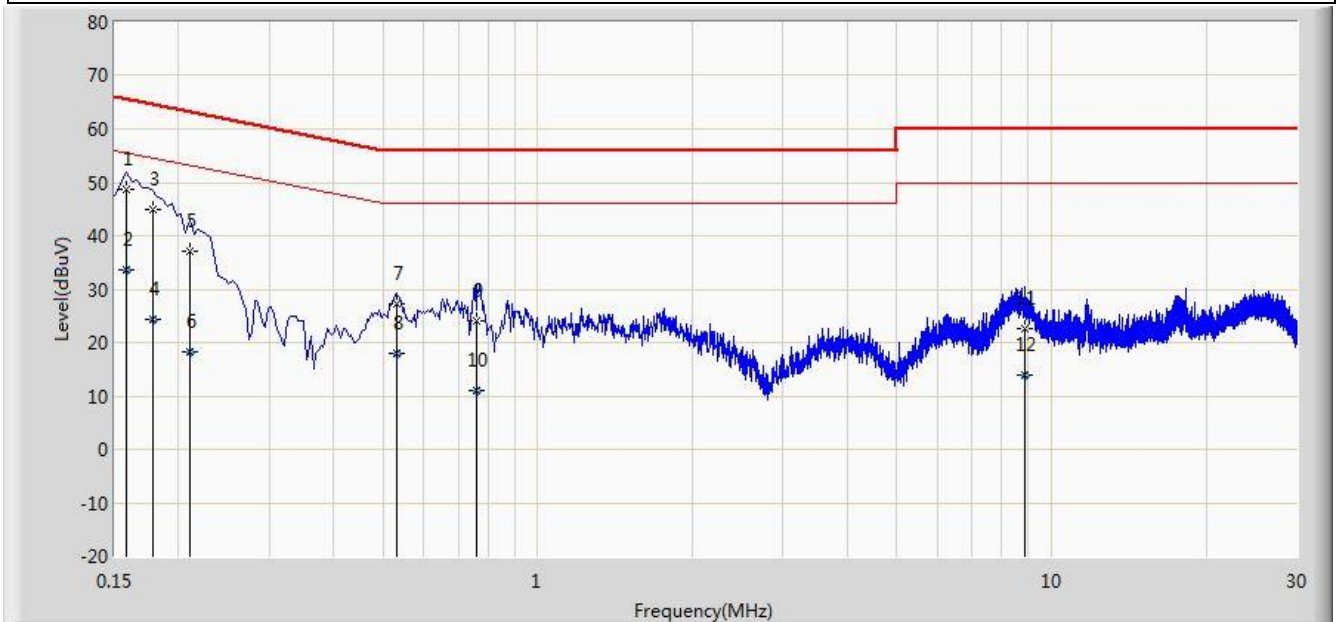


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Over Limit (dB)	Limit (dBμV)	Factor (dB)	Type
1		*	0.158	48.820	38.509	-16.748	65.568	10.311	QP
2			0.158	33.695	23.384	-21.873	55.568	10.311	AV
3			0.178	44.958	34.900	-19.620	64.578	10.058	QP
4			0.178	24.339	14.281	-30.240	54.578	10.058	AV
5			0.210	37.107	27.138	-26.099	63.205	9.969	QP
6			0.210	18.176	8.207	-35.029	53.205	9.969	AV
7			0.530	27.228	17.077	-28.772	56.000	10.151	QP
8			0.530	18.082	7.931	-27.918	46.000	10.151	AV
9			0.762	24.034	14.003	-31.966	56.000	10.031	QP
10			0.762	11.066	1.035	-34.934	46.000	10.031	AV
11			8.886	22.499	12.346	-37.501	60.000	10.153	QP
12			8.886	13.893	3.740	-36.107	50.000	10.153	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SR2	Time: 2016/01/13 - 10:47
Limit: FCC_Part15.107_CE_AC Power_ClassB	Engineer: Vince Yu
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Bluetooth Module	Power: AC 120V/60Hz
Test Mode: Communication with Notebook	

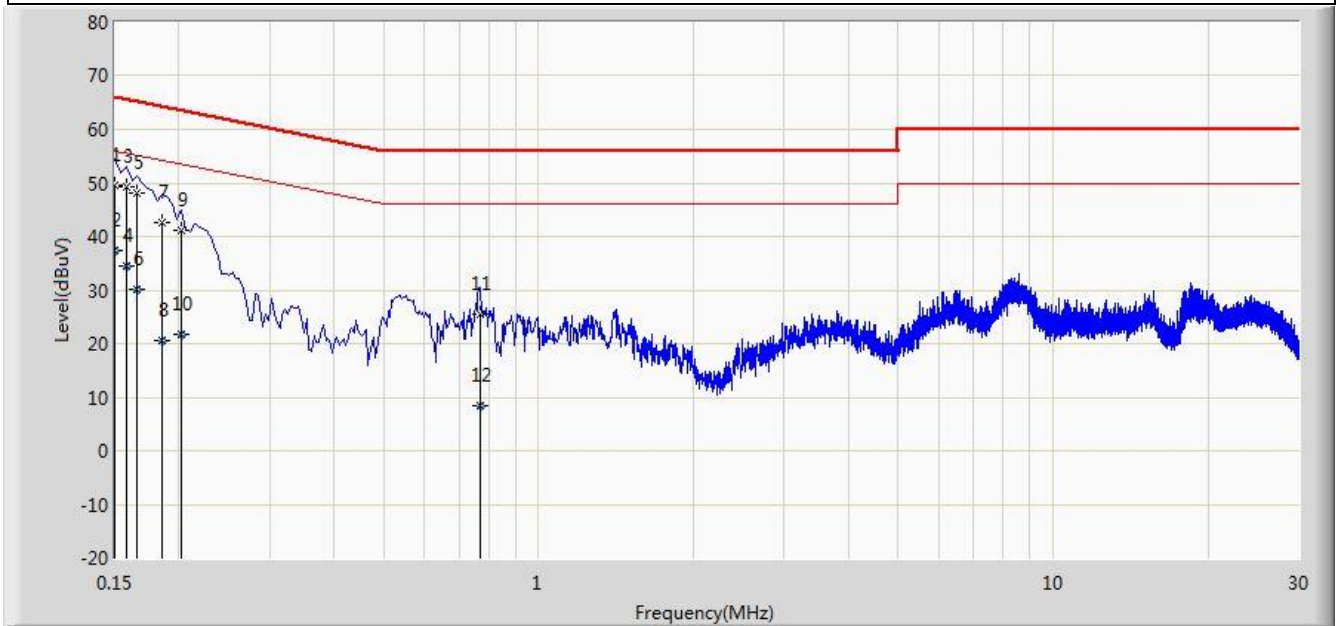

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	49.578	38.436	-16.422	66.000	11.142	QP
2			0.150	37.536	26.394	-18.464	56.000	11.142	AV
3		*	0.158	49.309	39.019	-16.259	65.568	10.290	QP
4			0.158	34.376	24.086	-21.193	55.568	10.290	AV
5			0.166	48.051	37.980	-17.107	65.158	10.071	QP
6			0.166	30.171	20.100	-24.987	55.158	10.071	AV
7			0.186	42.678	32.643	-21.536	64.213	10.035	QP
8			0.186	20.471	10.436	-33.742	54.213	10.035	AV
9			0.202	41.145	31.137	-22.383	63.528	10.008	QP
10			0.202	21.801	11.793	-31.727	53.528	10.008	AV
11			0.770	25.633	15.596	-30.367	56.000	10.036	QP
12			0.770	8.434	-1.603	-37.566	46.000	10.036	AV

Note: Measure Level (dBuV) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

6.3. Radiated Emission Measurement

6.3.1. Test Limit

FCC Part 15.109 Limits		
Frequency (MHz)	Distance (m)	Level (dB μ V/m)
30 - 88	3	40
88 - 216	3	43.5
216 - 960	3	46
Above 960	3	54


Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.


Note 3: E field strength (dB μ V/m) = 20 log E field strength (μ V/m)

6.3.2. Test Setup

30MHz ~ 1GHz Test Setup:

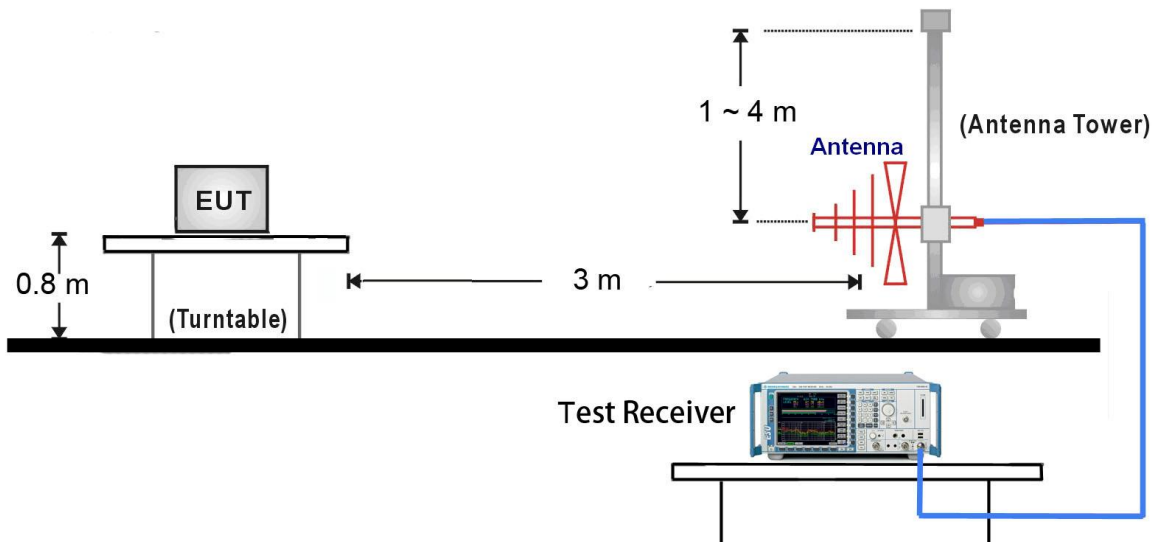


1GHz ~18GHz Test Setup:

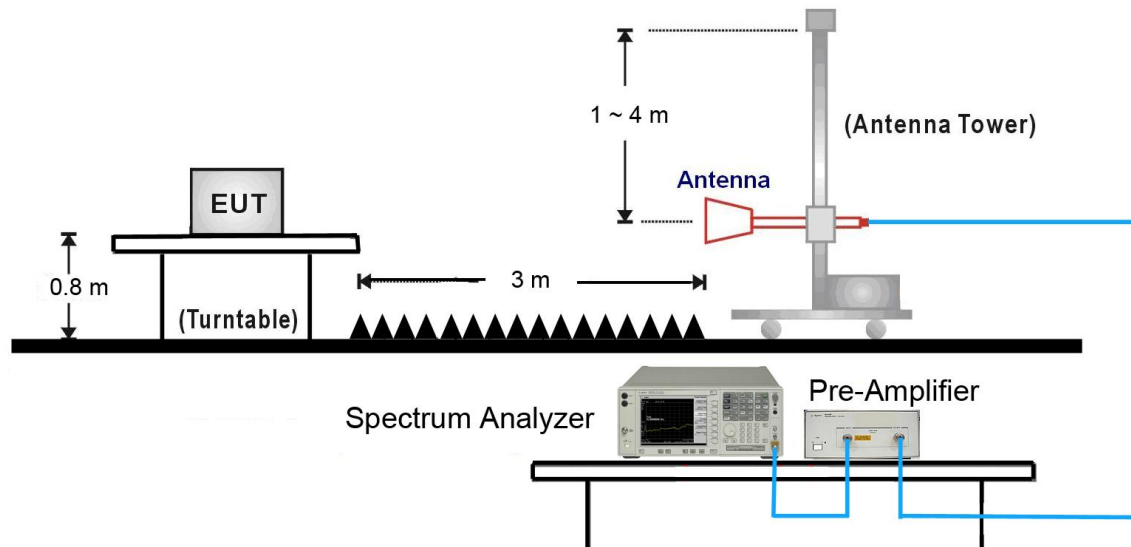

6.3.3. Test Result of Radiated Emissions

Site: AC 1	Time: 2016/01/12 - 09:21
Limit: FCC_Part15.109_RE(3m)_Class B	Engineer: Milo Li
Probe: VULB 9168 _20-2000MHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: AC 120V/60Hz
Test Mode: Communication with Notebook	

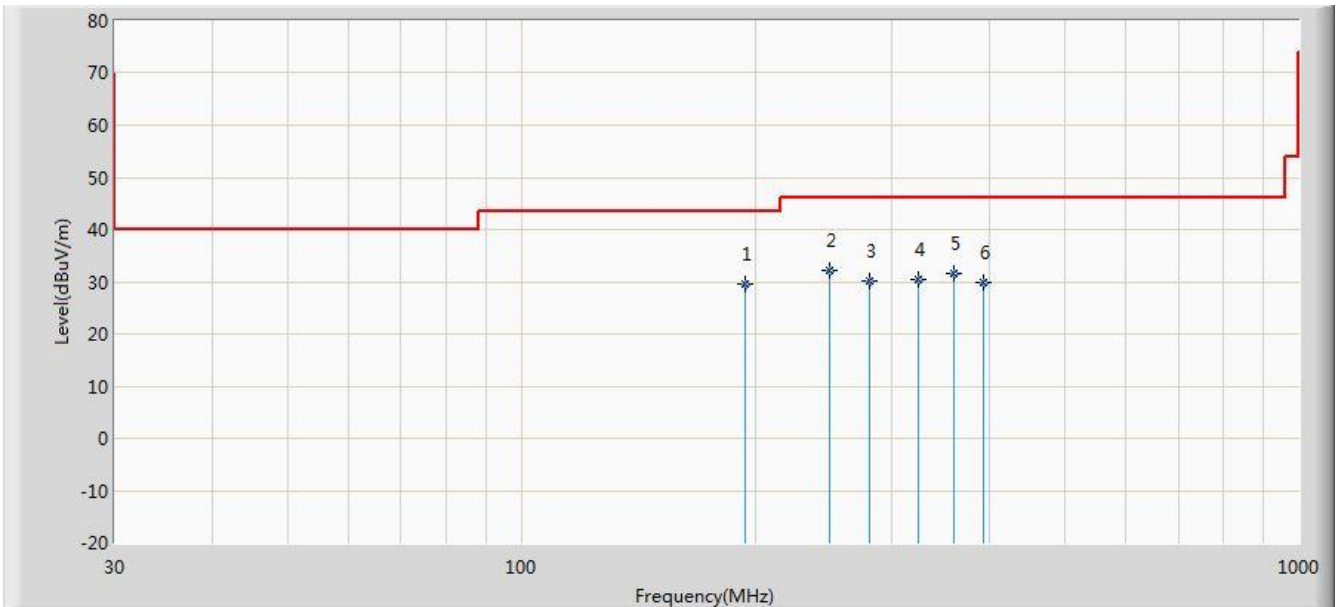


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			194.415	29.532	17.511	-13.968	43.500	12.021	QP
2		*	249.220	32.297	18.658	-13.703	46.000	13.639	QP
3			280.260	30.192	16.001	-15.808	46.000	14.191	QP
4			324.395	30.319	15.122	-15.681	46.000	15.196	QP
5			360.770	31.605	15.600	-14.395	46.000	16.005	QP
6			392.780	29.874	13.291	-16.126	46.000	16.583	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC 1	Time: 2016/01/12 - 09:21
Limit: FCC_Part15.109_RE(3m)_Class B	Engineer: Milo Li
Probe: VULB 9168 _20-2000MHz	Polarity: Vertical
EUT: Bluetooth Module	Power: AC 120V/60Hz
Test Mode: Communication with Notebook	

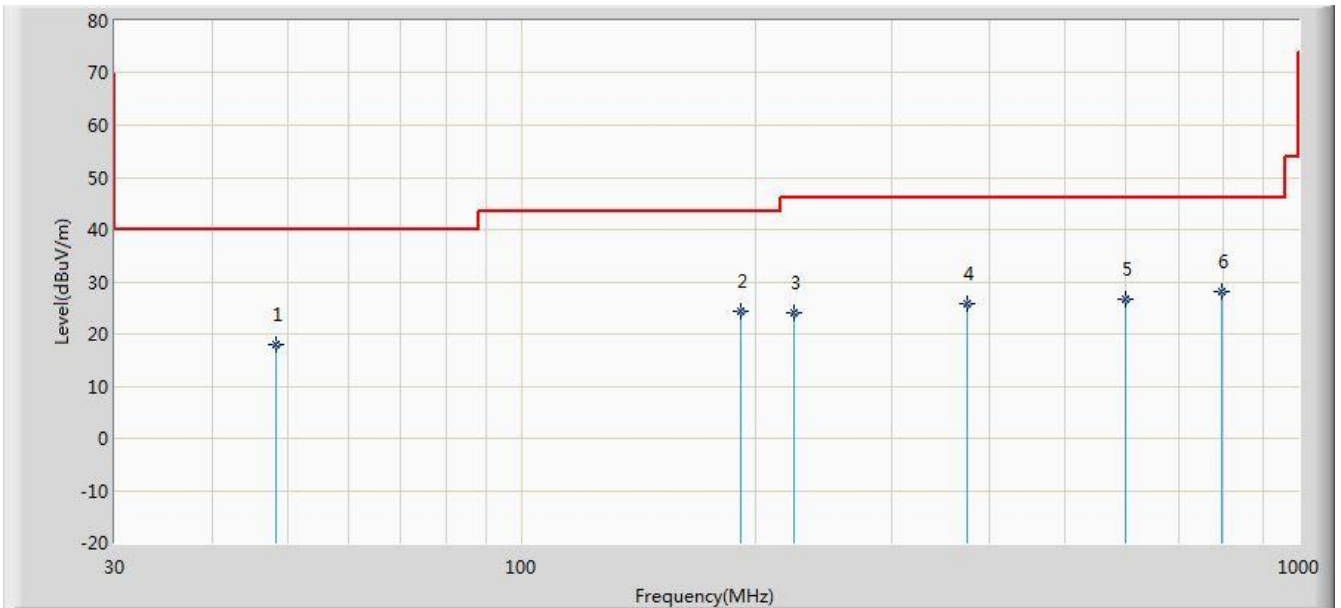


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			48.430	18.074	3.197	-21.926	40.000	14.877	QP
2			191.505	24.323	12.483	-19.177	43.500	11.840	QP
3			224.000	24.040	11.264	-21.960	46.000	12.776	QP
4			375.320	25.672	9.452	-20.328	46.000	16.220	QP
5			597.935	26.682	6.624	-19.318	46.000	20.058	QP
6		*	796.785	28.246	5.412	-17.754	46.000	22.834	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC 1	Time: 2016/01/12 - 09:21
Limit: FCC_Part15.109_RE(3m)_Class B	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: AC 120V/60Hz
Test Mode: Communication with Notebook	

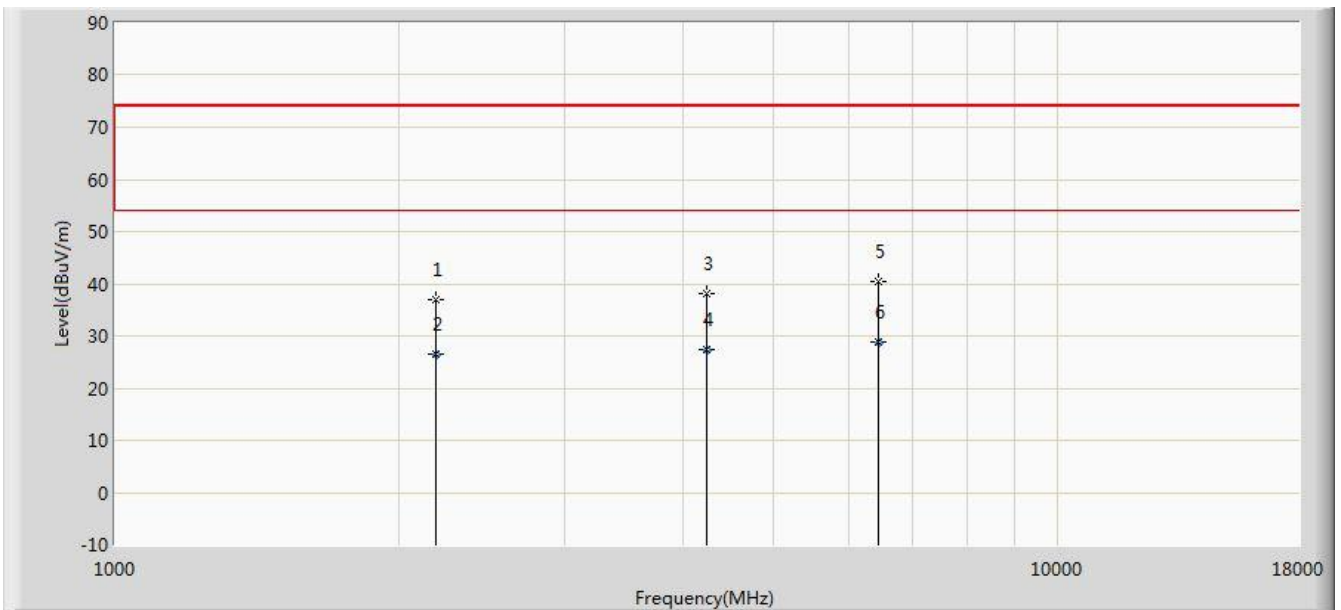


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2190.000	37.097	40.817	-36.903	74.000	-3.720	PK
2			2190.265	26.537	30.254	-27.463	54.000	-3.718	AV
3			4247.000	37.990	37.051	-36.010	74.000	0.939	PK
4			4247.024	27.293	26.354	-26.707	54.000	0.939	AV
5			6457.000	40.521	34.753	-33.479	74.000	5.768	PK
6		*	6457.024	28.822	23.054	-25.178	54.000	5.768	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC 1	Time: 2016/01/12 - 09:21
Limit: FCC_Part15.109_RE(3m)_Class B	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Module	Power: AC 120V/60Hz
Test Mode: Communication with Notebook	

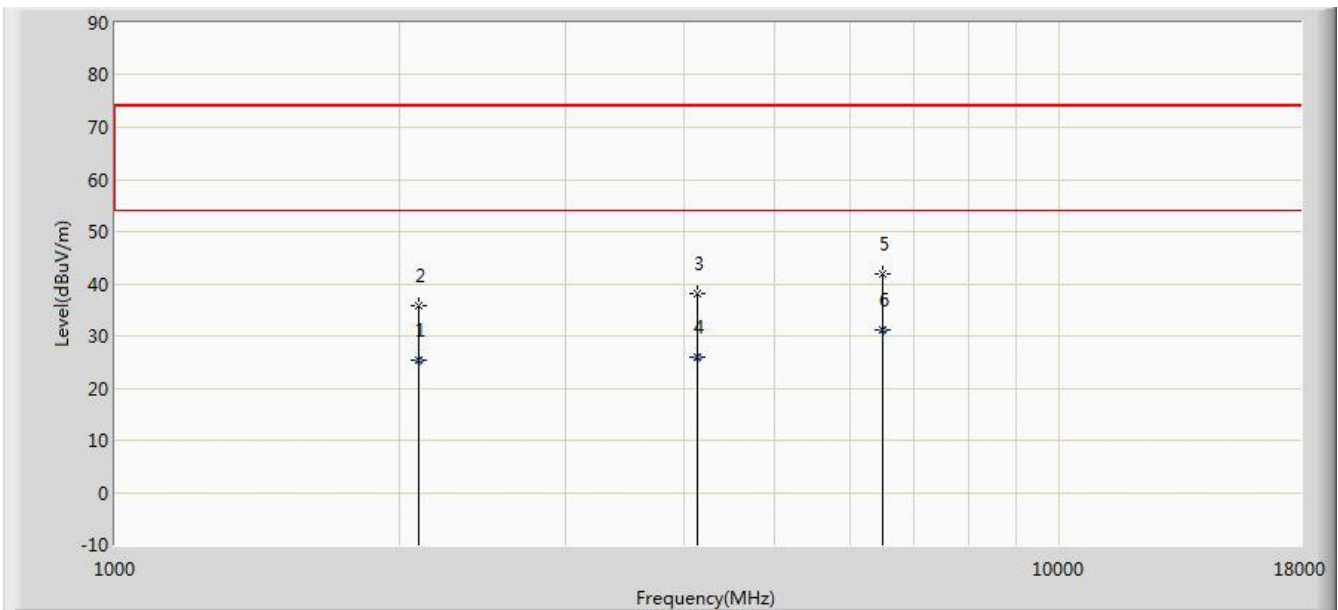

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2096.025	25.484	30.245	-28.516	54.000	-4.761	AV
2			2096.500	35.890	40.645	-38.110	74.000	-4.755	PK
3			4136.500	38.013	37.277	-35.987	74.000	0.736	PK
4			4136.524	25.976	25.240	-28.024	54.000	0.736	AV
5			6508.000	41.799	35.828	-32.201	74.000	5.971	PK
6		*	6508.540	31.094	25.124	-22.906	54.000	5.971	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

7. CONCLUSION

The data collected relate only the item(s) tested and show that the **Bluetooth Module FCC ID: H8N-BLT2010** has been tested to comply with the requirements specified in §15.107 and §15.109 of the FCC Rules.