



Test Report Serial Number:

45461624 R2.0

Test Report Date:

11 February 2021

Project Number:

1511

EMC Test Report - New Certification

Applicant:



Garmin International Inc.
1200 East 151 St
Olathe, KS, 66062
USA

FCC ID:

IPH-03947

Product Model Number / HVIN

A03947

IC Registration Number

1792A-03947

Product Marketing Name / PMN

A03947

In Accordance With:

CFR Title 47, Part 15 Subpart C (§15.247), Part 15 Subpart B

Digital Transmission System (DTS)

RSS-Gen, RSS-247 Issue 2

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

Approved By:

Ben Hewson, President

Celltech Labs Inc.
21-364 Lougheed Rd.
Kelowna, BC, V1X 7R8
Canada



Test Lab Certificate: 2470.01



Industry
Canada

IC Registration 3874A-1



FCC Registration: CA3874

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

© 2021 Celltech Labs Inc.

Table of Contents

1.0 DOCUMENT CONTROL.....	5
2.0 CLIENT AND DUT INFORMATION	6
3.0 SCOPE.....	7
4.0 TEST SUMMARY.....	8
5.0 NORMATIVE REFERENCES	10
6.0 FACILITIES AND ACCREDITATIONS	11
7.0 OCCUPIED BANDWIDTH	12
8.0 DTS BANDWIDTH	15
9.0 DUTY CYCLE AND TRANSMISSION DURATION	28
10.0 ANTENNA PORT CONDUCTED POWER, (DTS)	34
12.0 ANTENNA PORT CONDUCTED POWER, (DSS)	37
12.0 POWER SPECTRAL DENSITY.....	39
13.0 FHSS NUMBER OF HOPPING CHANNELS.....	42
14.0 FHSS CHANNEL SEPARATION	48
15.0 FHSS TIME OF OCCUPANCY.....	54
16.0 CONDUCTED SPURIOUS EMISSIONS -BAND EDGE.....	58
17.0 CONDUCTED SPURIOUS EMISSIONS	62
18.0 RADIATED TX SPURIOUS EMISSIONS, RESTRICTED BAND	65
19.0 RADIATED RX SPURIOUS EMISSIONS	68
20.0 POWER LINE CONDUCTED EMISSIONS	71
APPENDIX A – TEST SETUP DRAWINGS	76
APPENDIX B – EQUIPMENT LIST AND CALIBRATION.....	81
APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY.....	82
END OF REPORT.....	82
APPENDIX D – OCCUPIED BANDWIDTH MEASUREMENT PLOTS	83
APPENDIX E – ANTENNA PORT CONDUCTED POWER MEASUREMENT PLOTS	83
APPENDIX F – POWER SPECTRAL DENSITY MEASUREMENT PLOTS	83
APPENDIX G – CONDUCTED SPURIOUS EMISSIONS, BAND EDGE MEASUREMENT PLOTS.....	83
APPENDIX H – RADIATED TX SPURIOUS EMISSIONS, RESTRICTED BAND MEASUREMENT PLOTS	83
APPENDIX I – RADIATED RX SPURIOUS EMISSIONS MEASUREMENT PLOTS.....	83

Table of Figures

Figure A.1 – Test Setup – Conducted Measurements.....	76
Figure A.2 – Test Setup Radiated Measurements 9kHzMHz – 30MHz	77
Figure A.3 – Test Setup Radiated Measurements 30MHz – 1GHz	78
Figure A.4 – Test Setup Radiated Measurements 30MHz – 1GHz, Signal Substitution	78
Figure A.5 – Test Setup Radiated Measurements 1 – 18GHz,	79
Figure A.6 – Test Setup Radiated Measurements 18 – 26.5GHz,	79
Figure A.7 – Test Setup Conducted Emissions Measurements	80

Table of Plots

Plot 8.1 – 6dB DTS Bandwidth 802.11b	16
Plot 8.2 – 6dB DTS Bandwidth 802.11b	17
Plot 8.3 – 6dB DTS Bandwidth 802.11g	18
Plot 8.4 – 6dB DTS Bandwidth 802.11n	19
Plot 8.5 – 6dB DTS Bandwidth BT EDR 2MB, 2402MHz	21
Plot 8.6 – 6dB DTS Bandwidth BT EDR 2MB, 2442MHz	22
Plot 8.7 – 6dB DTS Bandwidth BT EDR 2MB, 2480MHz	23
Plot 8.8 – 6dB DTS Bandwidth BT EDR 3MB, 2402MHz	24
Plot 8.9 – 6dB DTS Bandwidth BT EDR 3MB, 2442MHz	25
Plot 8.10 – 6dB DTS Bandwidth BT EDR 3MB, 2480MHz	26
Plot 9.1 – Duty Cycle – WiFi - DSSS	28
Plot 9.2 – Duty Cycle – WiFi - OFDM	29
Plot 9.3 – Duty Cycle – WiFi – MCS0	30
Plot 9.4 – Duty Cycle – BT – EDR 2MB	31
Plot 9.5 – Duty Cycle – BT – EDR 3MB	32
Plot 13.1 – Number of Hopping Channels, EDR 2MB, 2400-2441MHz	43
Plot 13.2 – Number of Hopping Channels, EDR 2MB, 2441-2485MHz	44
Plot 13.3 – Number of Hopping Channels, EDR 3MB, 2400 - 2441MHz	45
Plot 13.4 – Number of Hopping Channels, EDR 3MB, 2441 - 2485MHz	46
Plot 14.1 – Channel Separation, BT EDR 2MB, 2403MHz	49
Plot 14.2 – BT ERD 2MB 20dB BW	50
Plot 14.3 – Channel Separation, BT EDR 3MB, 2403MHz	51
Plot 14.4 – BT EDR 3MB 20dB BW	52
Plot 15.1 – Time of Occupancy, BT EDR 2MB	55
Plot 15.2 – Time of Occupancy, BT EDR 3MB	56
Plot 20.1 – Power Line Conducted Emissions, Line 1	72
Plot 20.2 – Power Line Conducted Emissions, Line 2	73

Table of Tables

Table 7.1 – Summary of Occupied Bandwidth Measurements (DTS)	13
Table 7.2 – Summary of Occupied Bandwidth Measurements (DSS)	14
Table 8.1 – Summary of 6dB DTS Bandwidth Measurements, (WiFi)	20
Table 8.2 – Summary of 6dB DTS Bandwidth Measurements, (BlueTooth)	27
Table 9.2 – Summary Duty Cycle Measurement - WiFi	33
Table 10.1 – Summary of Conducted Power Measurements, (DTS)	35
Table 10.1 – Summary of Conducted Power Measurements, (DTS) Cont	36
Table 11.1 – Summary of Conducted Power Measurements, (DSS)	38
Table 12.1 – Summary of Power Spectral Density Measurements, (DTS)	40
Table 12.2 – Summary of Power Spectral Density Measurements, (DSS)	41
Table 13.2 – Summary of FHSS Number of Hopping Channels	47
Table 14.1 – Summary of FHSS Channel Separation	53
Table 15.1 – Summary of FHSS Time of Occupancy	57
Table 16.1 – Summary of Reference Level Measurements, (DTS)	59
Table 16.2 – Summary of Spurious Emission Measurements – Band Edge, (DTS)	59
Table 16.3 – Summary of Reference Level Measurements, BT EDR 2MB	60
Table 16.4 – Summary of Spurious Emission Measurements – Band Edge, BT EDR 2MB	60
Table 16.5 – Summary of Reference Level Measurements, BT EDR 3MB	61
Table 16.6 – Summary of Spurious Emission Measurements – Band Edge, BT EDR 3MB	61
Table 17.1 – Summary of Conducted Spurious Emissions, (DTS)	63
Table 17.2 – Summary of Conducted Spurious Emissions, BT EDR 2MB	63
Table 17.3 – Summary of Conducted Spurious Emissions, BT EDR 3MB	64
Table 18.1 – Summary of Radiated Tx Spurious Emissions, Restricted Band, (DTS)	66
Table 18.2 – Summary of Radiated Tx Spurious Emissions, Restricted Band, (BlueTooth)	67
Table 19.1 – Summary of Radiated Rx Spurious Emissions (DTS)	69
Table 19.2 – Summary of Radiated Rx Spurious Emissions (DSS)	70
Table 20.1 – Summary of Power Line Conducted Emissions	74
Table 20.1 – Summary of Power Line Conducted Emissions (Cont)	75
Table A.1 – Conducted Measurement Setup	76
Table A.2 – Radiated Emissions Measurement Equipment	77
Table A.3 – Setup – Conducted Emissions Equipment List	80

1.0 DOCUMENT CONTROL

Revision History					
Samples Tested By:		Art Voss, P.Eng.	Date(s) of Evaluation:		18 Nov - 4 Dec, 2020
Report Prepared By:		Art Voss, P.Eng.	Report Reviewed By:		Ben Hewson
Report Revision	Description of Revision		Revised Section	Revised By	Revision Date
0.1	Initial Draft Release		n/a	Art Voss	4 December 2020
0.2	Corrected Table 7.1, Plot 8.10		7.0, 8.0	Art Voss	21 December 2020
1.0	Initial Release		n/a	Art Voss	10 February 2021
2.0	Revised Section 20.0		20	Art Voss	11 February 2021

2.0 CLIENT AND DUT INFORMATION

Client Information	
Applicant Name	Garmin International Inc.
Applicant Address	1200 East 151 St
	Olathe, KS, 66062
	USA
DUT Information	
Device Identifier(s):	FCC ID: IPH-03947
	ISED ID: 1792A-03947
Device Model(s) / HVIN:	A03947
Test Sample Serial No.:	3326988634 - Conducted, 3326988670 - OTA/SAR
Device Type:	Extremity Worn Digital Transceiver
FCC Equipment Class:	WiFi - Digital Transmission System (DTS)
	BlueTooth - Spread Spectrum Transmitter (DSS)
	BlueTooth LE/ANT - Low Power Communication Device Transmitter (DXX)
	NFC - Low Power Communication Device Transmitter (DXX)
ISED Equipment Class:	WiFi: Wi-Fi Device
	BlueTooth: Spread Spectrum/Digital Device (2400-2483.5MHz)
	BlueTooth LE/ANT - Low Power Device (2400-2483.5MHz)
	NFC - RFID Device
Transmit Frequency Range:	WiFi (DTS): 2412-2462MHz
	BT/BLE/ANT: 2402-2480MHz
	NFC: 13.56MHz
Manuf. Max. Rated Output Power:	WiFi - Digital Transmission System (DTS): 17.52dBm
	BlueTooth - Spread Spectrum Transmitter (DSS): 9.42dBm
	BLE/ANT - Low Power Communication Device Transmitter (DXX): 4dBm
	NFC - Low Power Communication Device Transmitter (DXX): -36dBm
Antenna Type and Gain:	0.6dBi Max*
Modulation:	WiFi: DSSS, OFDM, CCK, MCS0-7
Modulation:	BT BR: GFSK
Modulation:	BT EDR 2Mb: Pi/4-DQPSK, BT EDR 3Mb: 8-DPSK
Modulation:	BLE: GMSK
Modulation:	ANT: GFSK
Modulation:	NFC:
DUT Power Source:	3VDC Rechargeable Li-Ion
DUT Dimensions [LxWxH]	H x W x D: 50mm x 45mm x 18mm
Deviation(s) from standard/procedure:	None
Modification of DUT:	None

* Information regarding antenna type and gain provided by applicant.

3.0 SCOPE

Preface:

This Certification Report was prepared on behalf of:

Garmin International Inc.

, (the '*Applicant*'), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 and Innovation, Scientific and Economic Development (ISED) Canada rules parts and regulations (the '*Rules*'). The scope of this investigation was limited to only the equipment, devices and accessories (the '*Equipment*') supplied by the *Applicant*. The tests and measurements performed on this *Equipment* were only those set forth in the applicable *Rules* and/or the Test and Measurement Standards they reference. The *Rules* applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable *Rules* were applied to the measurement results obtained during this evaluation and, unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the *Equipment* tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

Device:

The Garmin Model/HVIN: A03947 is an extremity worn digital transceiver device consisting of a WiFi, BlueTooth (BT), BlueTooth Low Energy (BLE), Adaptive Network Topology (ANT) and Near Field Communication (NFC) transceivers. The WiFi and BT/BLE/ANT transceivers share the same antenna and cannot simultaneously transmit.

Requirement:

The transceivers of this *equipment* are subject to emissions evaluation in accordance with FCC: 47 CFR 2, 15C, ISED: RSS-Gen, RSS-210 and RSS-247. As per FCC 47 CFR §2.1093 and Health Canada Safety Code 6, an RF Exposure (SAR) evaluation is required for this *Equipment* and the results of the RF Exposure (SAR) evaluation appear in a separate report.

Application:

This is an application for a New Certification.

Scope:

The scope of this investigation is limited to the evaluation and reporting of the wanted and spurious emissions in accordance with the rule parts cited in Normative References section of this report.

4.0 TEST SUMMARY

TEST SUMMARY						
Section	Description of Test	Procedure Reference	Applicable Rule Part(s) FCC	Applicable Rule Part(s) ISED	Test Date	Result
7.0	Occupied Bandwidth	ANSI C63.10-2013 KDB 558074 D01v05	§2.1049	RSS-Gen (6.7)	18 Nov 2020	Pass
8.0	DTS Bandwidth	ANSI C63.10-2013 KDB 558074 D01v05	§15.247(a)(2)	RSS-Gen (6.7) RSS-247 (5.2)(a)	19 Nov 2020	Pass
9.0	Duty Cycle and Transmission Duration	ANSI C63.10-2013 KDB 558074 D01v05	n/a	n/a	19, 30 Nov 2020	n/a
10.0	Conducted Power (Fundamental)	ANSI C63.10-2013 KDB 558074 D01v05	§2.1046 §15.247(b)(3)	RSS-Gen (6.12) RSS-247 (5.4)(d)	19 Nov 2020	Pass
11.0	Conducted Power (Fundamental)	ANSI C63.10-2013 KDB 558074 D01v05	§2.1046 §15.247(b)(1)	RSS-Gen (6.12) RSS-247 (5.4)(b)	30 Nov 2020	Pass
12.0	Power Spectral Density	ANSI C63.10-2013 KDB 558074 D01v05	§15.247(e)	RSS-247 (5.2)(b)	19, 30 Nov 2020	Pass
13.0	FHSS Hopping Channels	ANSI C63.4-2014 KDB 558074 D01v05	§15.247(a)(1)(iii)	RSS-247 (5.1)(d)	1 Dec 2020	Pass
14.0	FHSS Channel Separation	ANSI C63.4-2014 KDB 558074 D01v05	§15.247(a)(1)	RSS-247 (5.1)(b)	1 Dec 2020	Pass
15.0	FHSS Time of Occupancy	ANSI C63.4-2014 KDB 558074 D01v05	§15.247(a)(1)(iii)	RSS-247 (5.1)(d)	1 Dec 2020	Pass
16.0	Conducted Tx Spurious Emissions Band Edge	ANSI C63.10-2013 KDB 558074 D01v05	§2.1051 §15.247(d)	RSS-Gen (6.13) RSS-247 (5.5)	19, 30 Nov 2020	Pass
17.0	Conducted Tx Spurious Emissions	ANSI C63.10-2013 KDB 558074 D01v05	§2.1051 §15.247(d)	RSS-Gen (6.13) RSS-247 (5.5)	19, 30 Nov 2020	Pass
18.0	Radiated Tx Spurious Emissions And Restricted Band	ANSI C63.4-2014 KDB 558074 D01v05	§15.109 §15.247(d)	RSS-Gen (6.13)	20, 23 Nov 2020	Pass
19.0	Radiated Rx Spurious Emissions	ANSI C63.4-2014 KDB 558074 D01v05	§15.109	RSS-Gen (7.4) ICES-003(6.2)	20, 23 Nov 2020	Pass
20.0	Power Line Conducted Emissions	ANSI C63.4-2014	§15.107	ICES-003(6.1)	3 Feb 2021	Pass

Test Station Day Log					
Date	Ambient Temp (°C)	Relative Humidity (%)	Barometric Pressure (kPa)	Test Station	Tests Performed Section(s)
18 Nov 2020	24.0	15	100.3	EMC	7
19 Nov 2020	22.5	16	101.8	EMC	8,9,10,12,16,17
20 Nov 2020	4.0	75	103.0	OATS	18,19
23 Nov 2020	2.0	87	101.5	OATS	18,19
30 Nov 2020	23.0	16	101.6	EMC	11,16,17
1 Dec 2020	23.0	16	103.9	EMC	13,14,15
3 Dec 2020	24.0	15	103.1	EMC	17
3 Feb 2021	20.2	15	102.4	LISN	20

EMC - EMC Test Bench

OATS - Open Area Test Site

LISN - LISN Test Area

IMM - Immunity Test Area

SAC - Semi-Anechoic Chamber

TC - Temperature Chamber

ESD - ESD Test Bench

RI - Radiated Immunity Chamber

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Art Voss, P.Eng.
Technical Manager
Celltech Labs Inc.

10 February 2021
Date




5.0 NORMATIVE REFERENCES

Normative References	
ISO/IEC 17025:2017	General requirements for the competence of testing and calibration laboratories
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
CFR	Code of Federal Regulations Title 47: Telecommunication Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
CFR	Code of Federal Regulations Title 47: Telecommunication Part 15: Radio Frequency Devices Sub Part C (15.247) Intentional Radiators
CFR	Code of Federal Regulations Title 47: Telecommunication Part 15: Radio Frequency Devices Subpart B: Unintentional Radiators
FCC KDB 558074 D01v05r02	OET Major Guidance Publications, Knowledge Data Base Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under Section 15.247
ISED RSS-Gen Issue 5: Amendment 1: March 2019	Innovation, Science and Economic Development Canada Spectrum Management and Telecommunications Radio Standards Specification General Requirements and Information for the Certification of Radiocommunication Equipment
ISED RSS-247 Issue 2: February 2017	Innovation, Science and Economic Development Canada Spectrum Management and Telecommunications Radio Standards Specification Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licensed-Exempt Local Area Network (LE_LAN) Devices

6.0 FACILITIES AND ACCREDITATIONS

Facility and Accreditation:

The facilities used to evaluate this device outlined in this report are located at 21-364 Lougheed Road, Kelowna, British Columbia, Canada V1X 7R8. The radiated emissions site (OATS) conforms to the requirements set forth in ANSI C63.4 and is filed and listed with the FCC under Test Firm Registration Number CA3874 and Innovation, Science and Economic Development Canada under Test Site File Number ISED 3874A-1. Celltech is accredited to ISO 17025, through accrediting body A2LA and with certificate 2470.01.

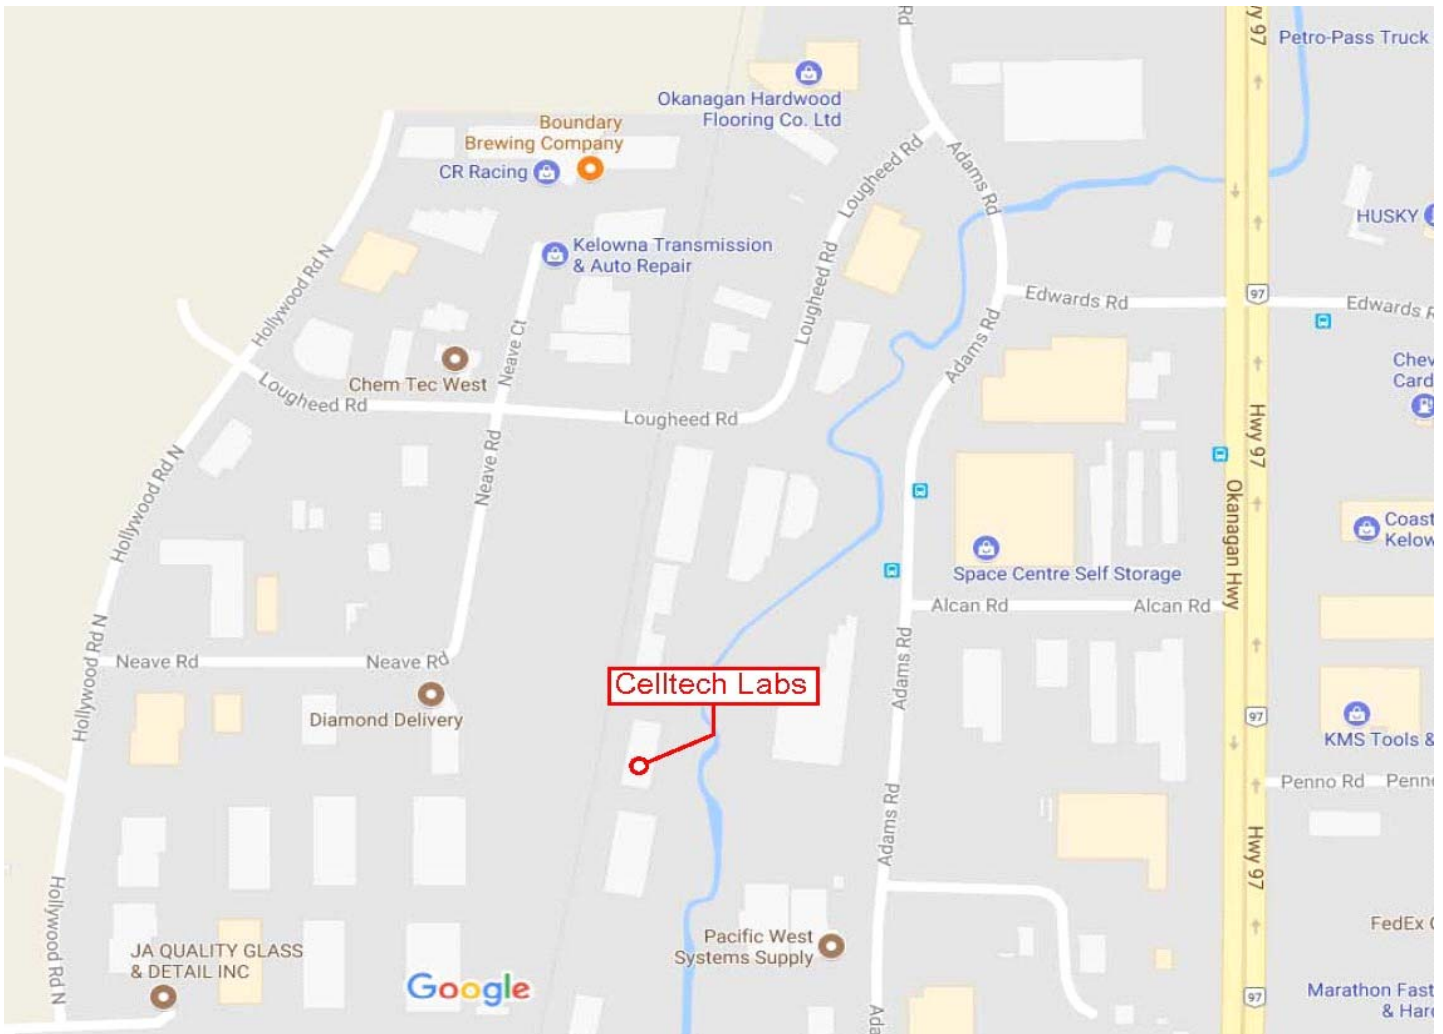

7.0 OCCUPIED BANDWIDTH

Test Procedure

Normative	FCC 47 CFR §2.1046, §15.247(b)(3), RSS-Gen (6.1.2), RSS-247 (5.4)(d),
Reference	KDB 558074 (8.3.2.1), ANSI C63.10 (6.9.3)

General Procedure

KDB 558074 (8.3.2.1)	<p>8.3.2.1 General</p> <p>Section 15.247 permits the maximum conducted (average) output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth.</p>
C63.10 (6.9.3)	<p>6.9.3 Occupied bandwidth—power bandwidth (99%) measurement procedure</p> <p>The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:</p> <ol style="list-style-type: none"> The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2. Step a) through step c) might require iteration to adjust within the specified range. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used. Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

Test Setup

Appendix A - Figure A.1

Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as described above using the 99% Occupied Bandwidth function. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at its maximum Duty Cycle. The 99% Occupied Bandwidth was measured and recorded and used for the basis for measuring the Conducted Output Power (See Section 10.0) and Power Spectral Density (See Section 11.0).

Table 7.1 – Summary of Occupied Bandwidth Measurements (DTS)

See Appendix D for Measurement Plots

Occupied Bandwidth Measurement Results (DTS)						
Frequency (MHz)	Modulation	Data Rate (Mbps)	Measured Occupied Bandwidth (MHz)	Minimum Authorized Bandwidth (MHz)	Margin (MHz)	Emission Designator
2412	CCK	1	14.0	0.5	13.5	14M0D1D
2417	CCK	1	14.2		13.7	14M2D1D
2437	CCK	1	14.2		13.7	14M2D1D
2457	CCK	1	14.2		13.7	14M2D1D
2462	CCK	1	14.0		13.5	14M0D1D
2417	CCK	2	14.2		13.7	14M2D1D
2437	CCK	2	14.2		13.7	14M2D1D
2457	CCK	2	14.2		13.7	14M2D1D
2417	DSSS	5.5	13.8		13.3	13M8D1D
2437	DSSS	5.5	13.8		13.3	13M8D1D
2457	DSSS	5.5	13.8		13.3	13M8D1D
2417	DSSS	11	13.9		13.4	13M9D1D
2437	DSSS	11	13.9		13.4	13M9D1D
2457	DSSS	11	13.9		13.4	13M9D1D
2417	OFDM	6	16.6		16.1	16M6D1D
2437	OFDM	6	16.6		16.1	16M6D1D
2457	OFDM	6	16.6		16.1	16M6D1D
2417	OFDM	9	16.7		16.2	16M7D1D
2437	OFDM	9	16.6		16.1	16M6D1D
2457	OFDM	9	16.6		16.1	16M6D1D
2437	OFDM	12	16.6		16.1	16M6D1D
2437	OFDM	18	16.6		16.1	16M6D1D
2437	OFDM	24	16.6		16.1	16M6D1D
2437	OFDM	36	16.6		16.1	16M6D1D
2437	OFDM	48	16.6		16.1	16M6D1D
2417	MCS0	-	17.8		17.3	17M8D1D
2437	MCS0	-	17.8		17.3	17M8D1D
2457	MCS0	-	17.8		17.3	17M8D1D
2437	MCS1	-	17.8		17.3	17M8D1D
2437	MCS3	-	17.8		17.3	17M8D1D
2437	MCS7	-	17.8		17.3	17M8D1D
						Complies

Margin = Measured BW - Minimum Authorized BW

Table 7.2 – Summary of Occupied Bandwidth Measurements (DSS)

See Appendix D for Measurement Plots

Occupied Bandwidth Measurement Results (DSS)						
Frequency (MHz)	Modulation	Data Rate (Mbps)	Measured Occupied Bandwidth (MHz)	Minimum Authorized Bandwidth (MHz)	Margin (kHz)	Emission Designator
2402	Pi/4-DQPSK	2	1.2	0.5	0.7	1M24D1D
2442	Pi/4-DQPSK	2	1.3		0.8	1M26D1D
2480	Pi/4-DQPSK	2	1.2		0.7	1M24D1D
2402	8-DPSK	3	1.3		0.8	1M28D1D
2442	8-DPSK	3	1.3		0.8	1M27D1D
2480	8-DPSK	3	1.2		0.7	1M24D1D
						Complies

Margin = Measured BW - Minimum Authorized BW

8.0 DTS BANDWIDTH

Test Procedure

Normative Reference	FCC 47 CFR §2.1049, §15.247(a)(2), RSS-Gen (6.7), RSS-247 (5.2)(a), KDB 558074 (8.2), ANSI C63.10 (11.8.2)
----------------------------	---

Limits


47 CFR §15.247(a)(2)	(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions: (2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
RSS-247 (5.2)(a)	5.2 Digital transmission systems DTSs include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400 - 2483.5 MHz: a) The minimum 6 dB bandwidth shall be 500 kHz.
KDB 558074 (8.2) C63.10 (11.8.2)	8.2 Option 2 The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW ≥ 3 X RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

Test Setup	Appendix A Figure A.1
-------------------	-------------------------------------


Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as above using the Automatic 6dB Cursor Bandwidth measurement. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at 100% Duty Cycle.


Plot 8.1 – 6dB DTS Bandwidth 802.11b

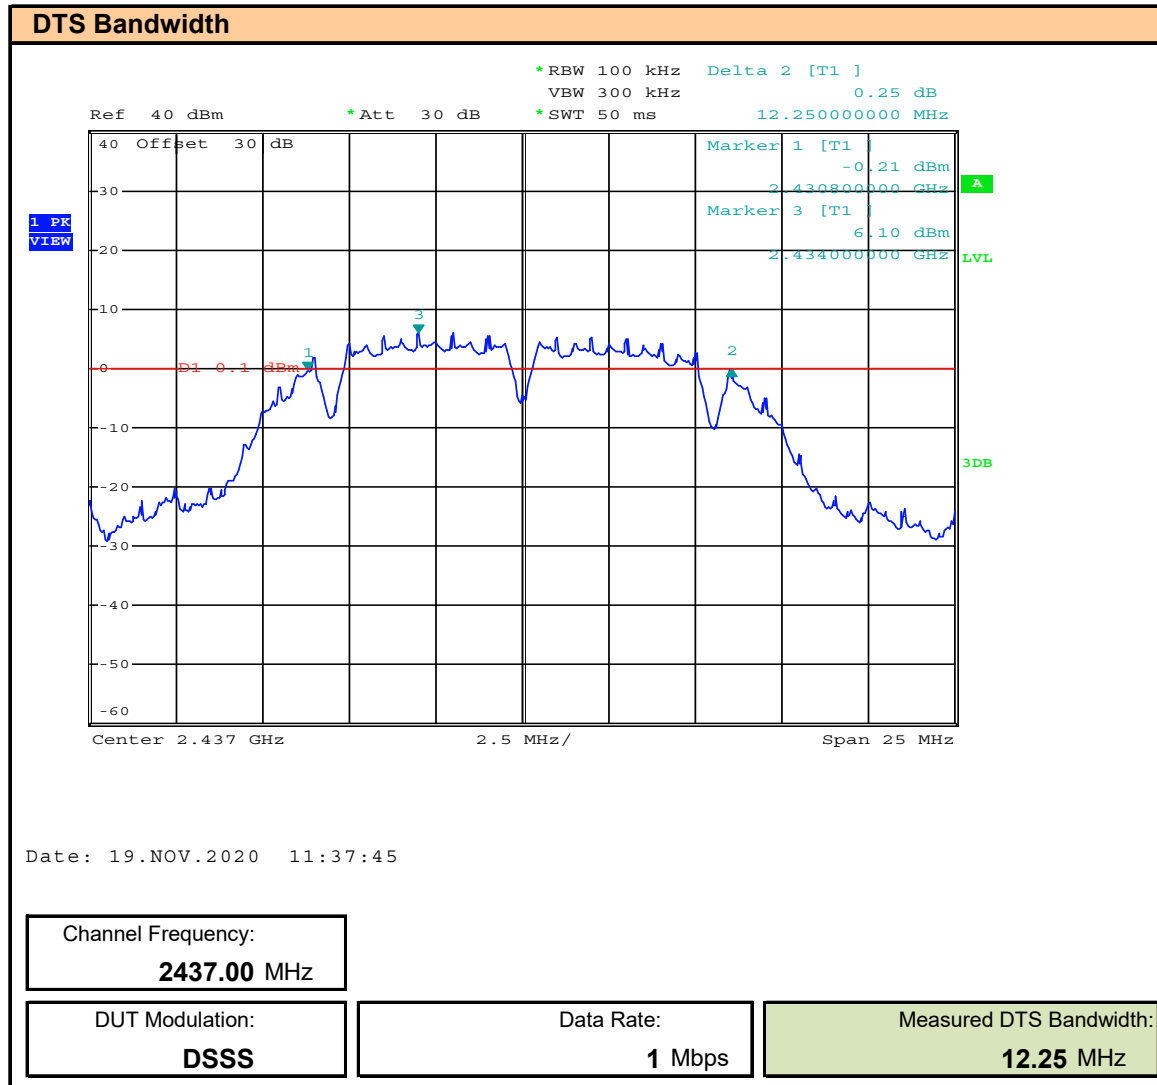

Plot 8.2 – 6dB DTS Bandwidth 802.11b

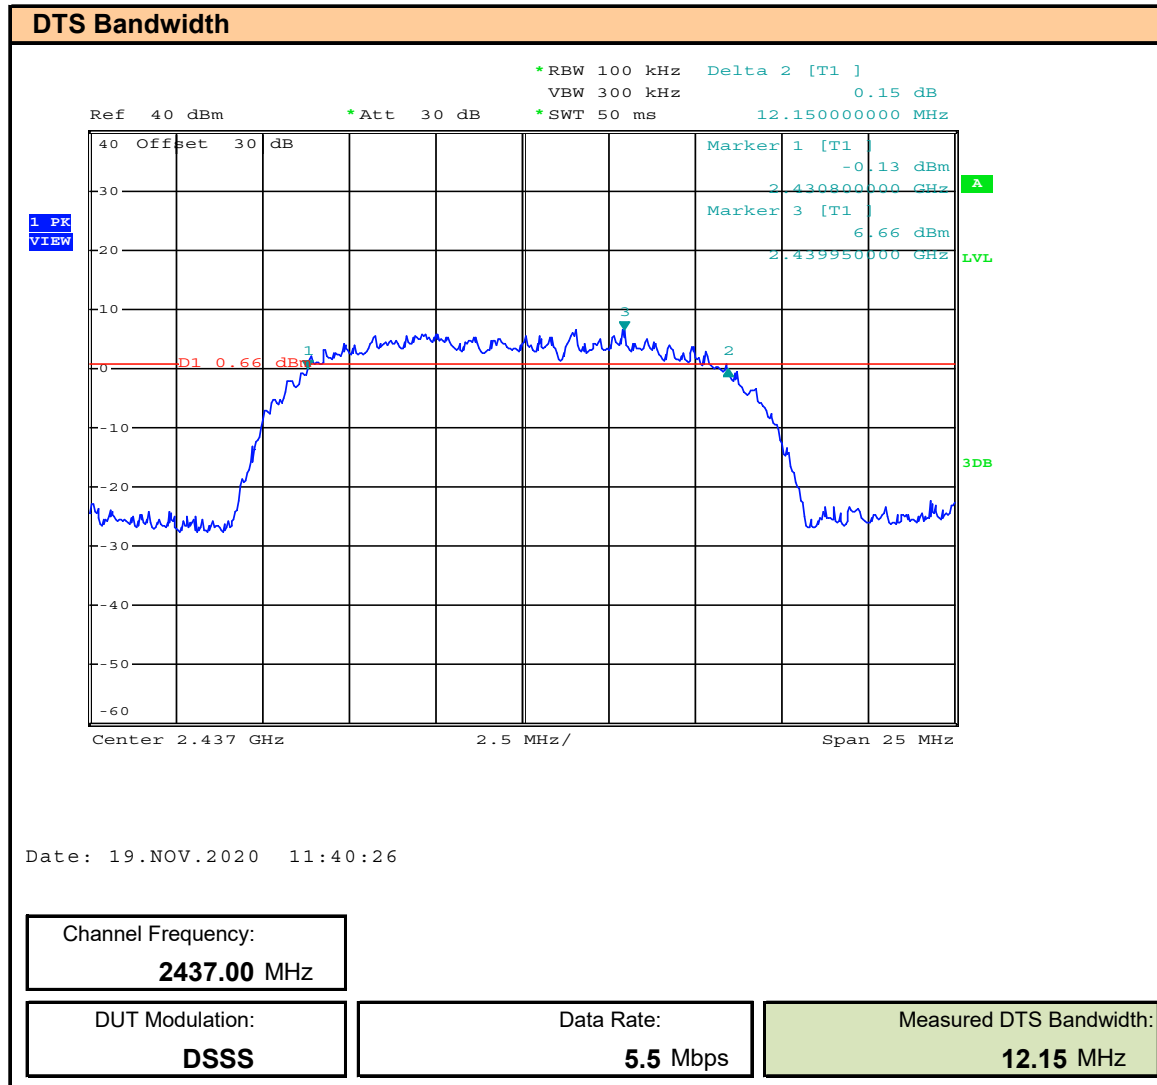

Plot 8.3 – 6dB DTS Bandwidth 802.11g

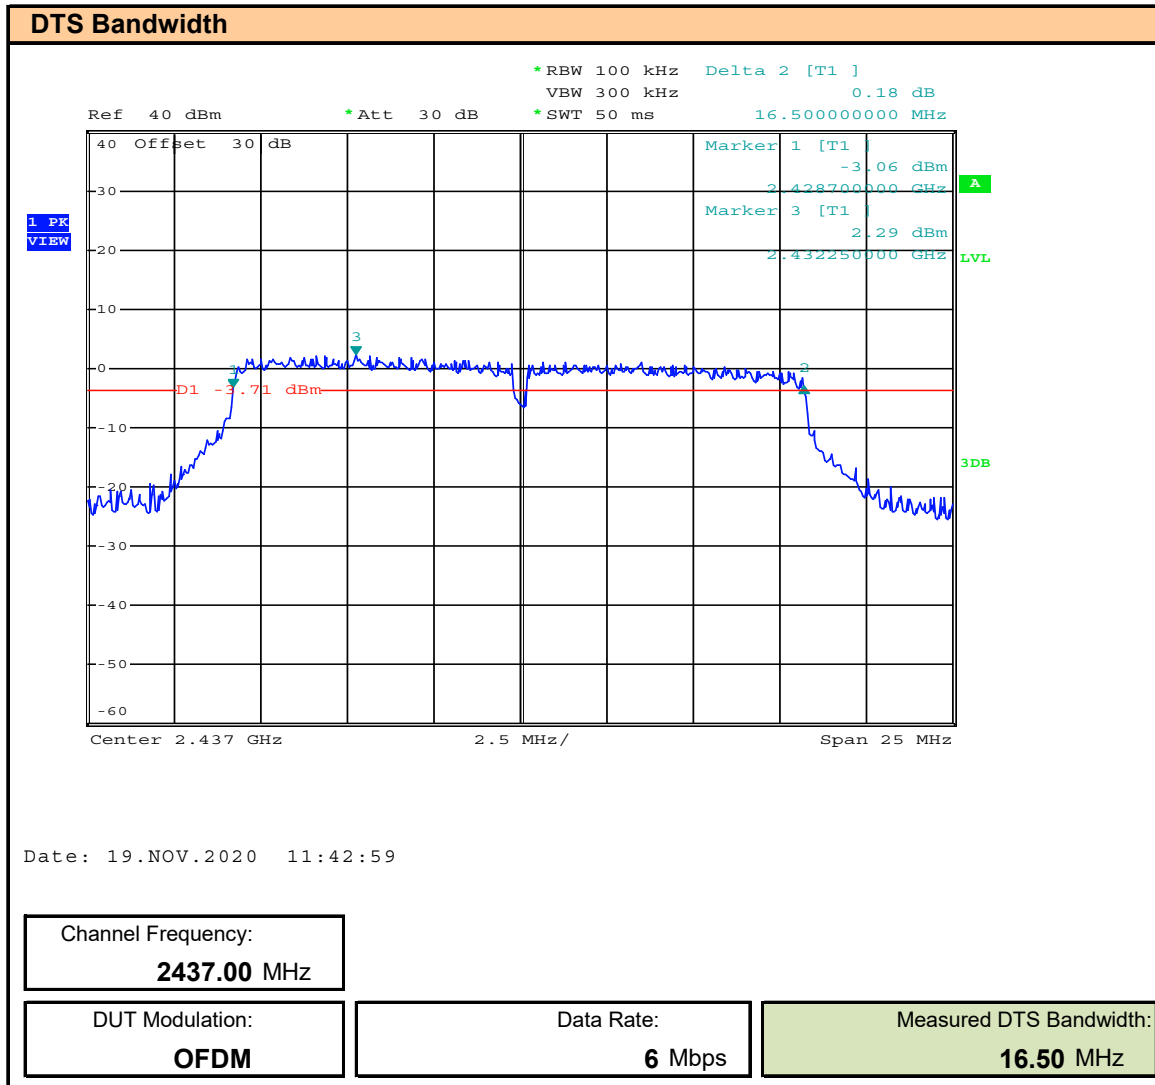

Plot 8.4 – 6dB DTS Bandwidth 802.11n


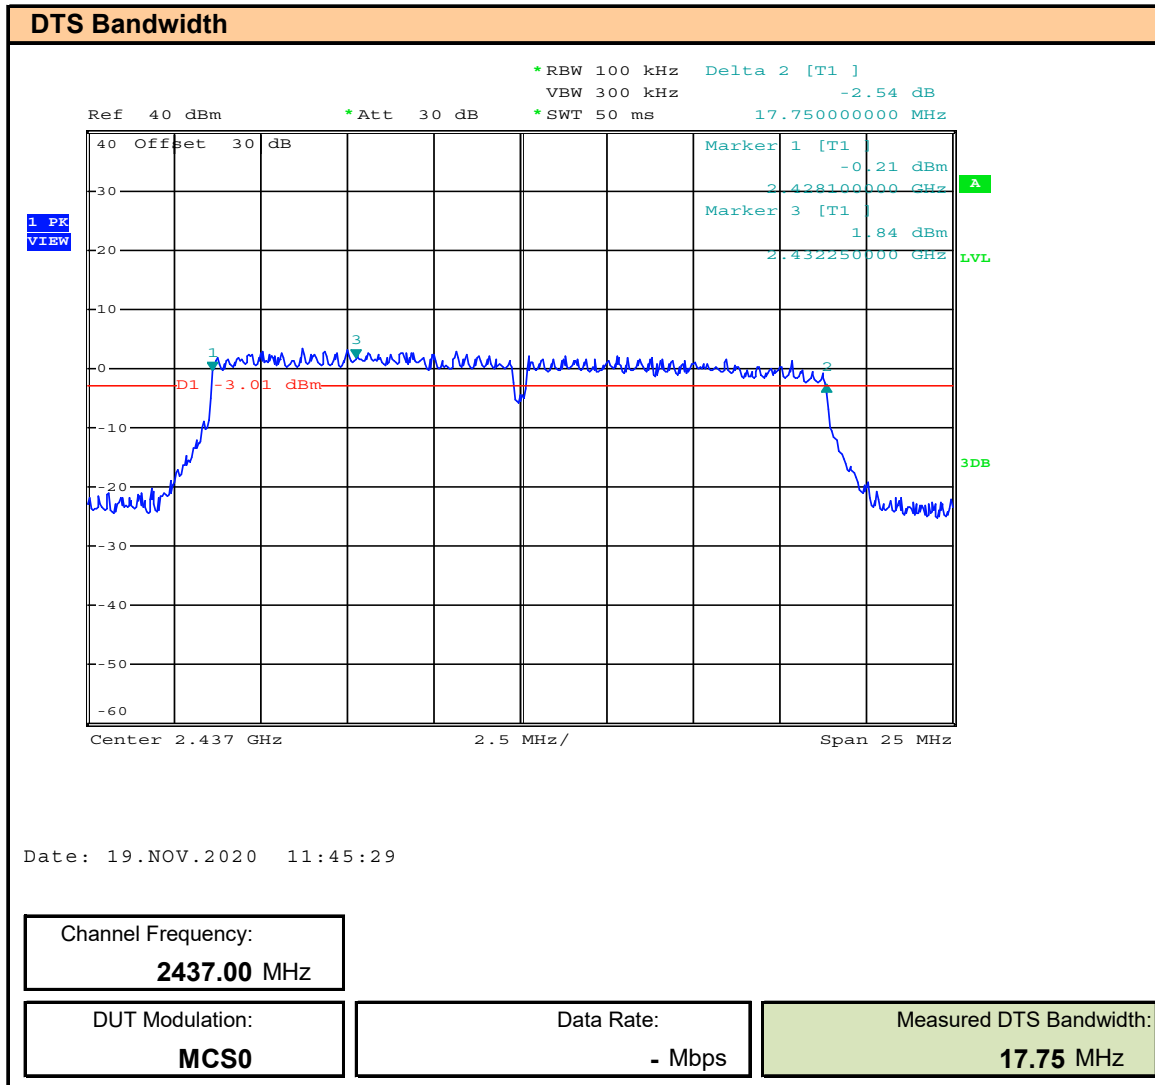



Table 8.1 – Summary of 6dB DTS Bandwidth Measurements, (WiFi)

DTS Bandwidth Measurement Results (DTS)			
Frequency (MHz)	Modulation	Data Rate (Mbps)	Measured Occupied Bandwidth (MHz)
2437	DSSS	1	12.3
2437	DSSS	5.5	12.2
2437	OFDM	6	16.5
2437	MCS0	-	17.8
			Complies


Plot 8.5 – 6dB DTS Bandwidth BT EDR 2MB, 2402MHz

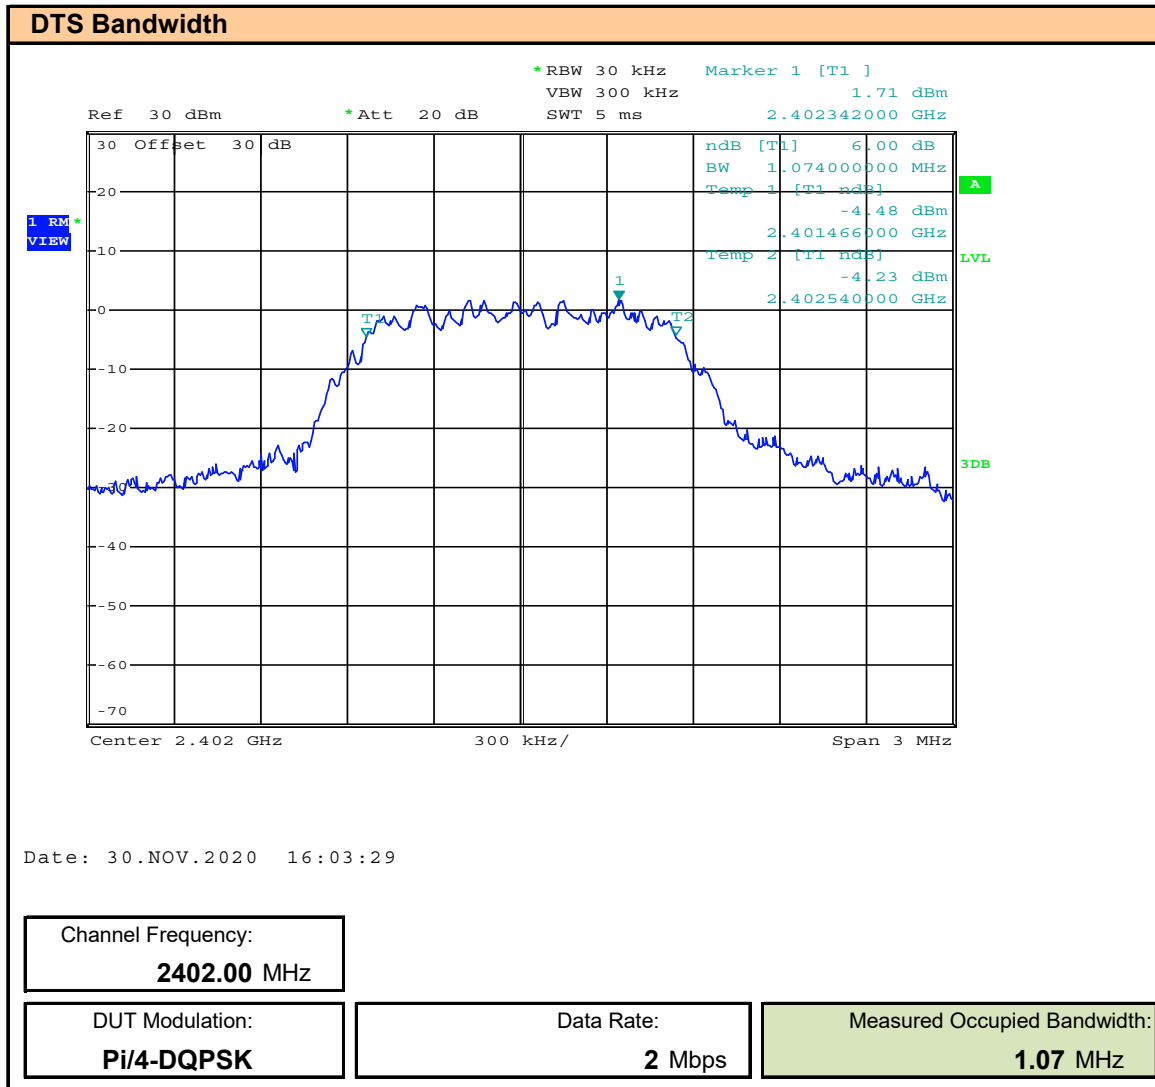


Plot 8.6 – 6dB DTS Bandwidth BT EDR 2MB, 2442MHz

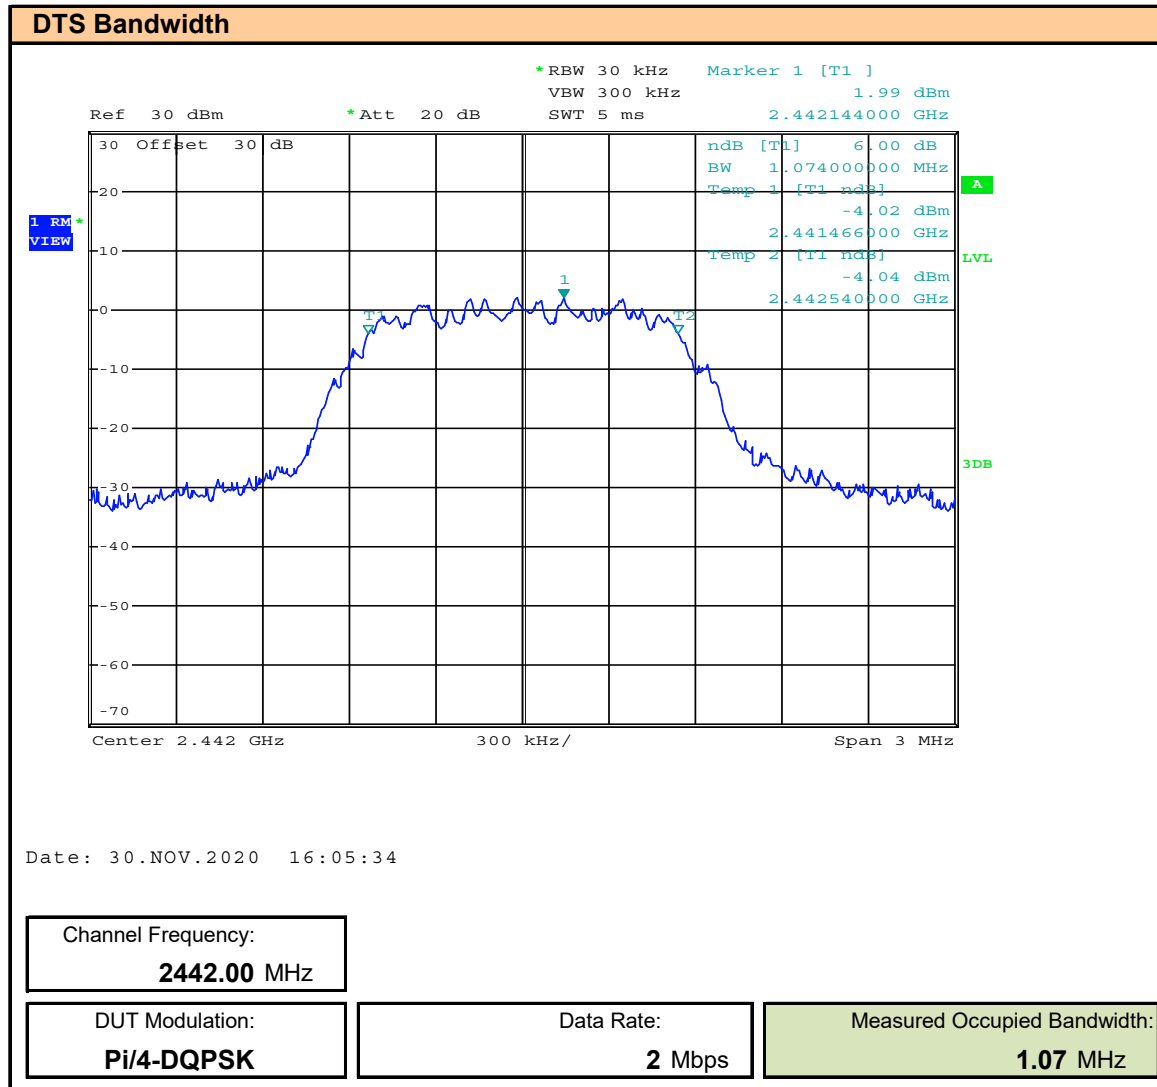


Plot 8.7 – 6dB DTS Bandwidth BT EDR 2MB, 2480MHz

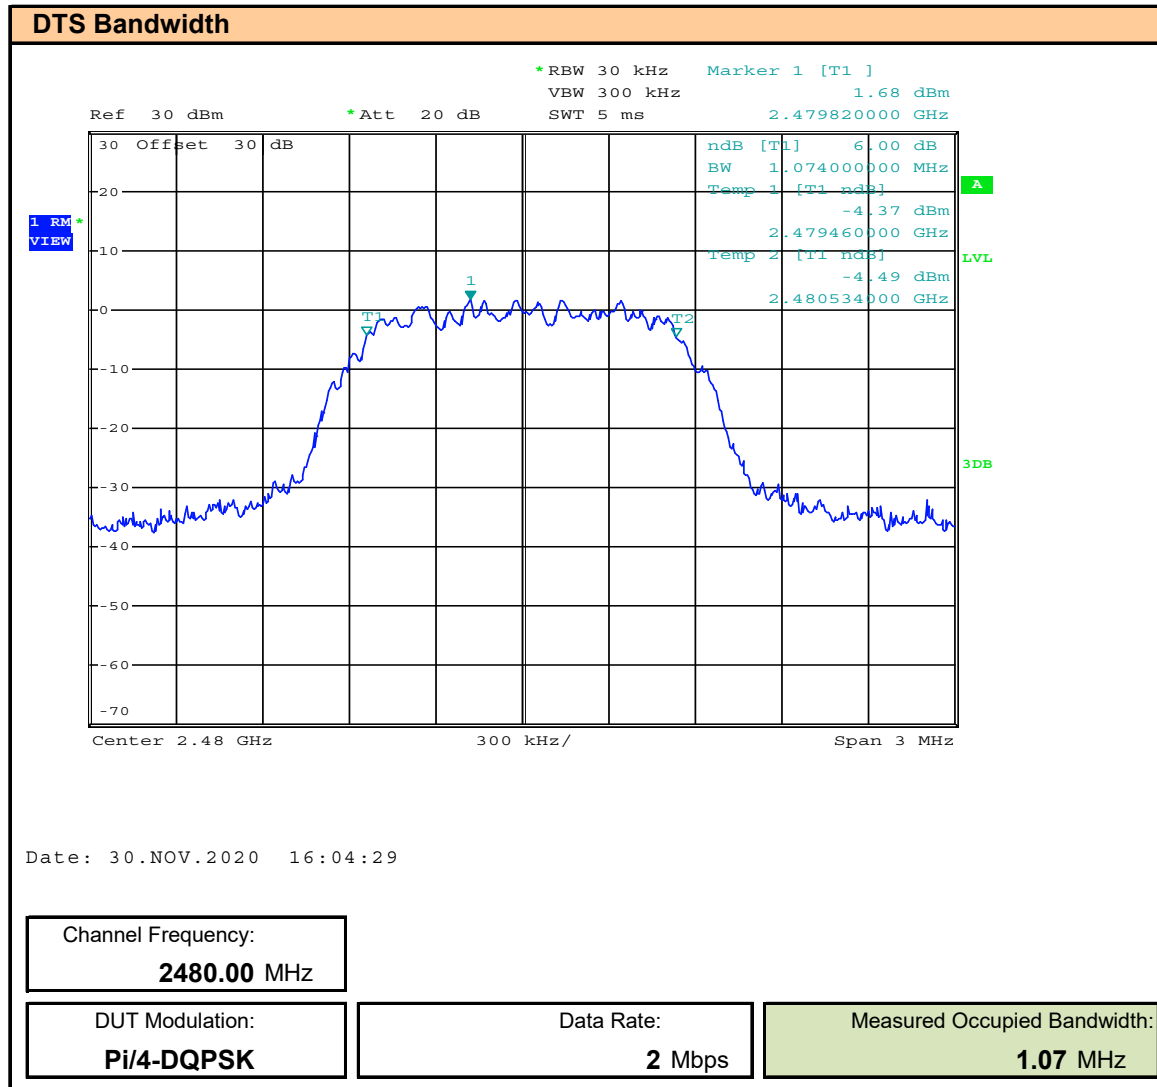

Plot 8.8 – 6dB DTS Bandwidth BT EDR 3MB, 2402MHz

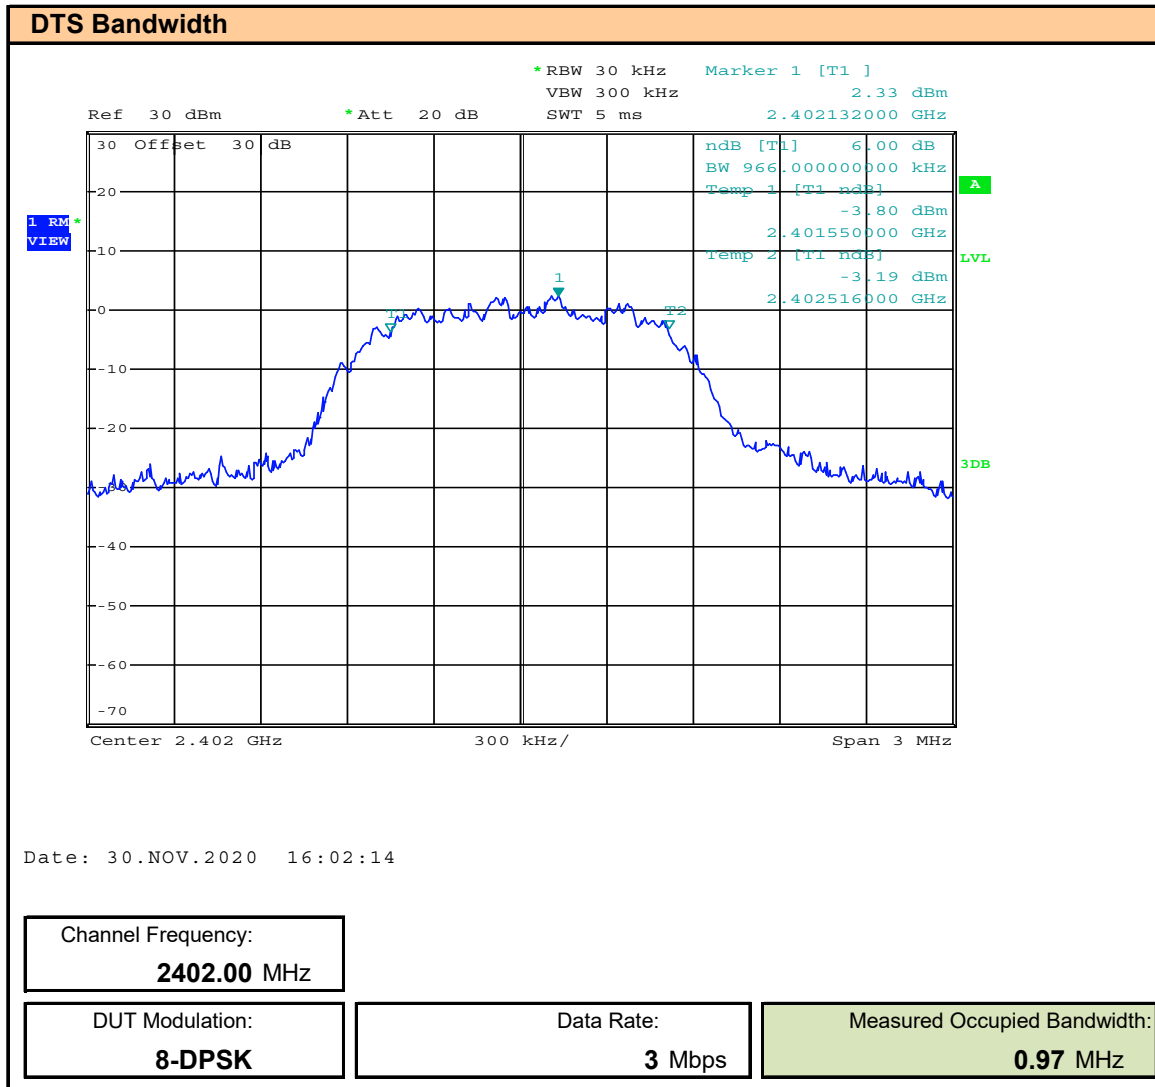

Plot 8.9 – 6dB DTS Bandwidth BT EDR 3MB, 2442MHz

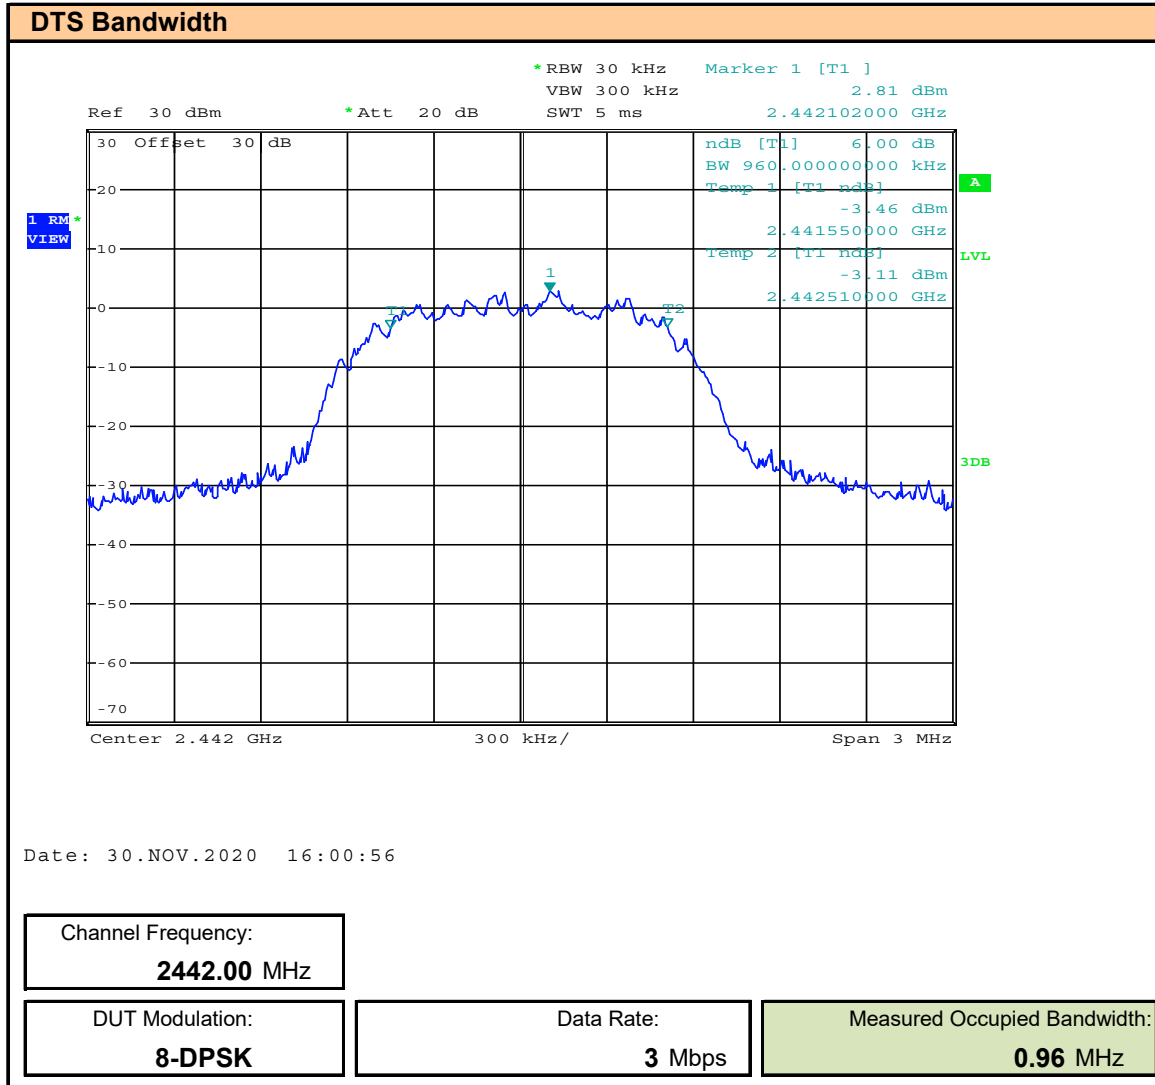

Plot 8.10 – 6dB DTS Bandwidth BT EDR 3MB, 2480MHz


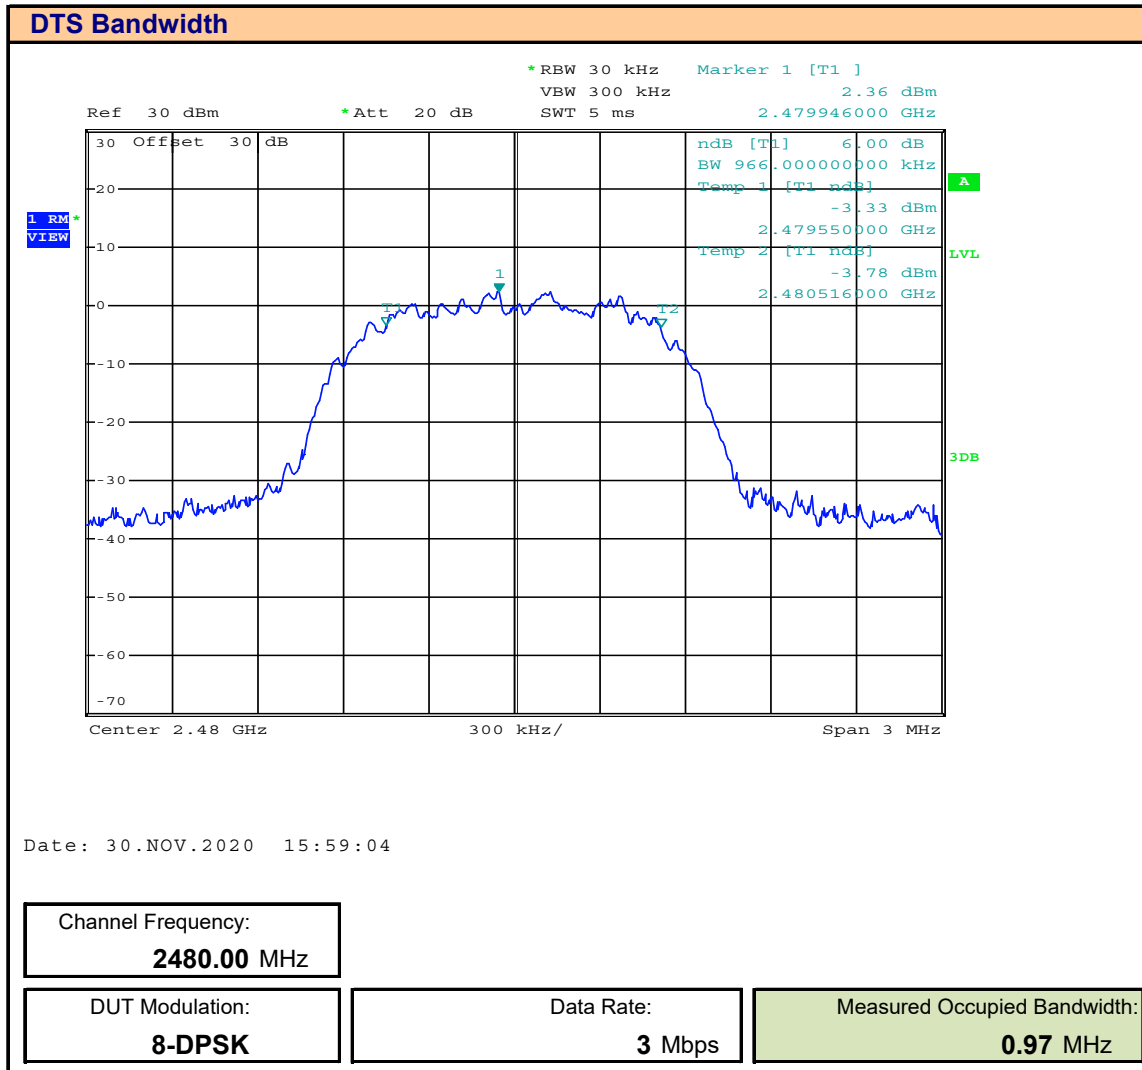


Table 8.2 – Summary of 6dB DTS Bandwidth Measurements, (BlueTooth)


DTS Bandwidth Measurement Results (DSS)			
Frequency (MHz)	Modulation	Data Rate (Mbps)	Measured DTS Bandwidth (MHz)
2402	Pi/4-DQPSK	2	1.07
2442	Pi/4-DQPSK	2	1.07
2480	Pi/4-DQPSK	2	1.07
2402	8-DPSK	3	0.97
2442	8-DPSK	3	0.96
2480	8-DPSK	3	0.97
			Complies

9.0 DUTY CYCLE AND TRANSMISSION DURATION


Plot 9.1 – Duty Cycle – WiFi - DSSS

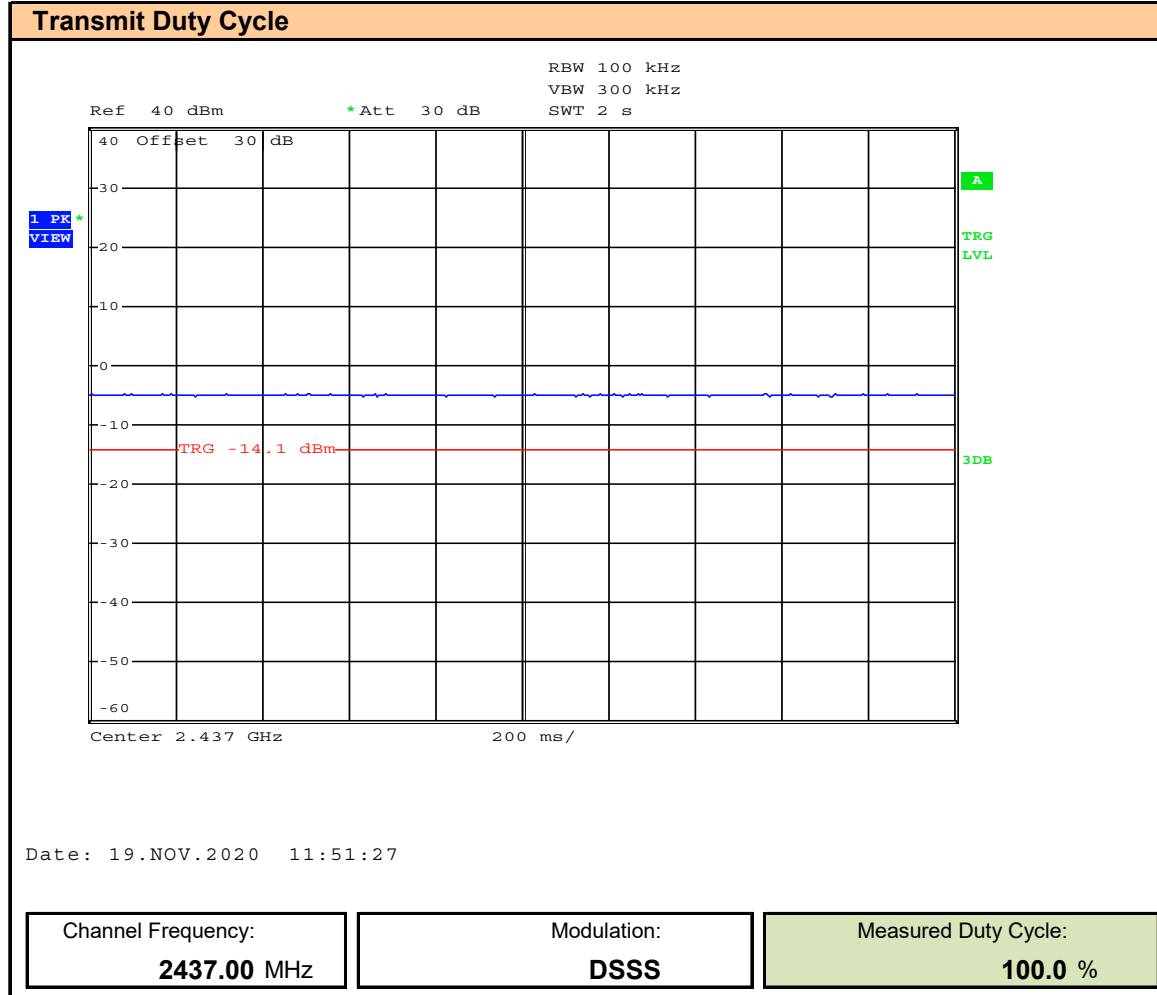


Plot 9.2 – Duty Cycle – WiFi - OFDM

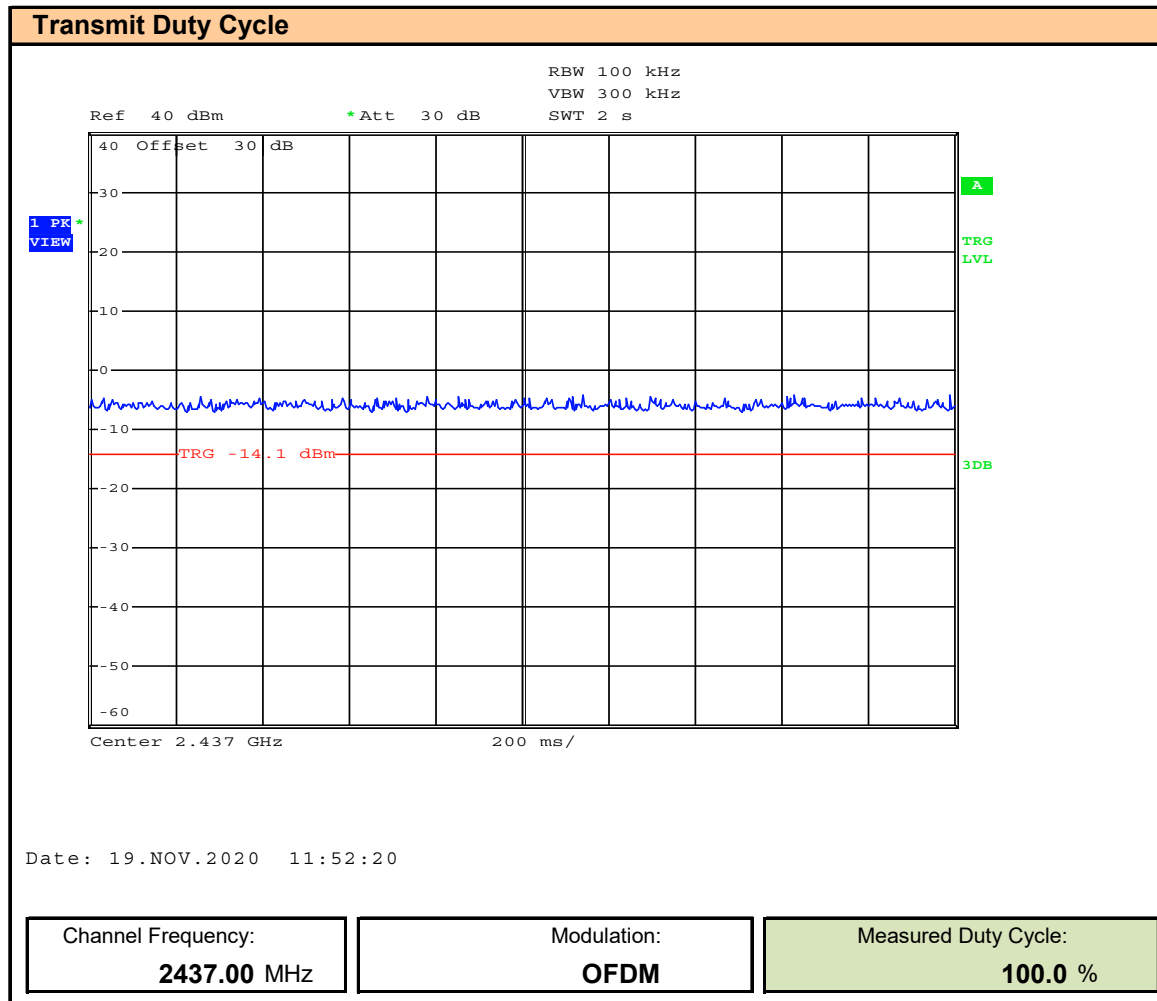

Plot 9.3 – Duty Cycle – WiFi – MCS0

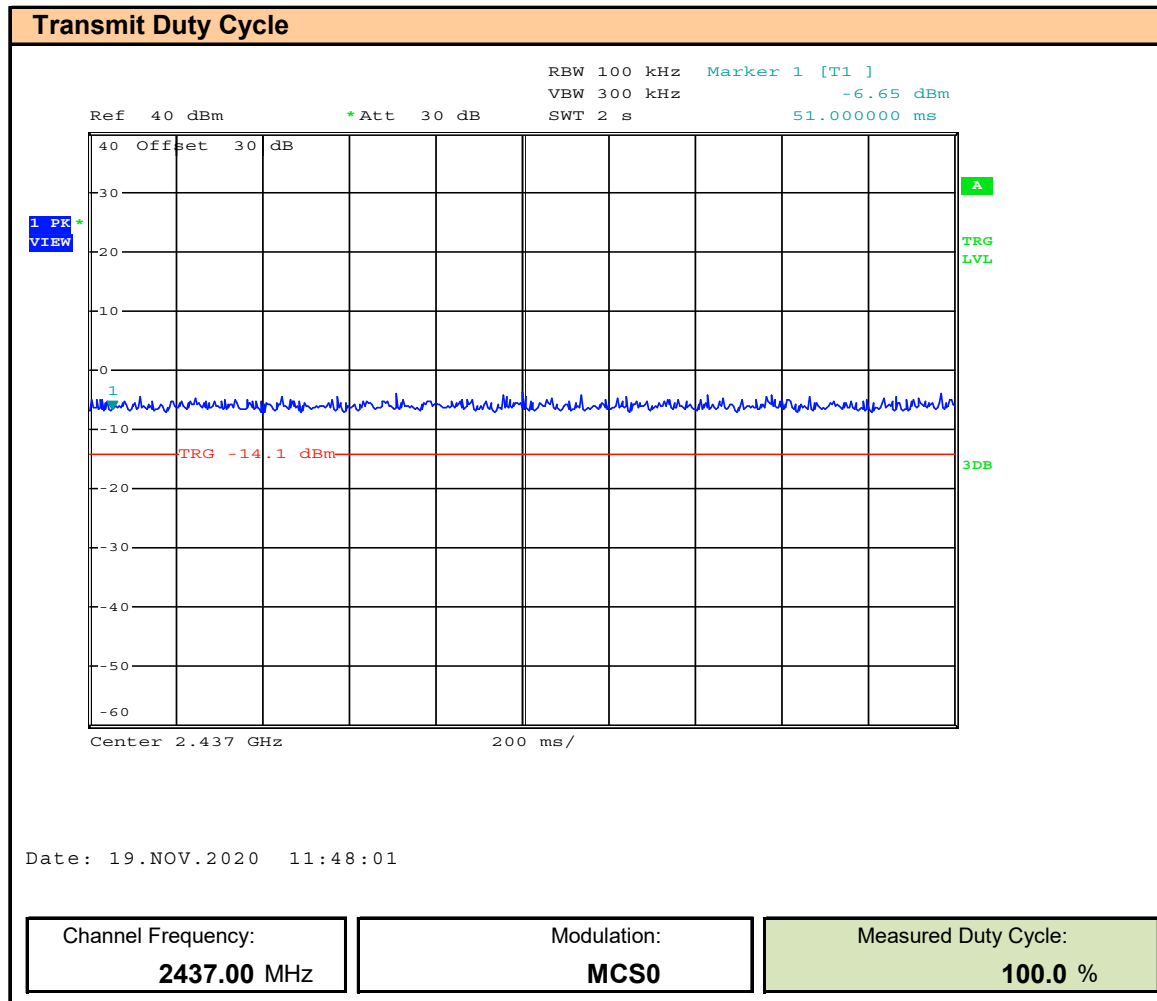

Plot 9.4 – Duty Cycle – BT – EDR 2MB

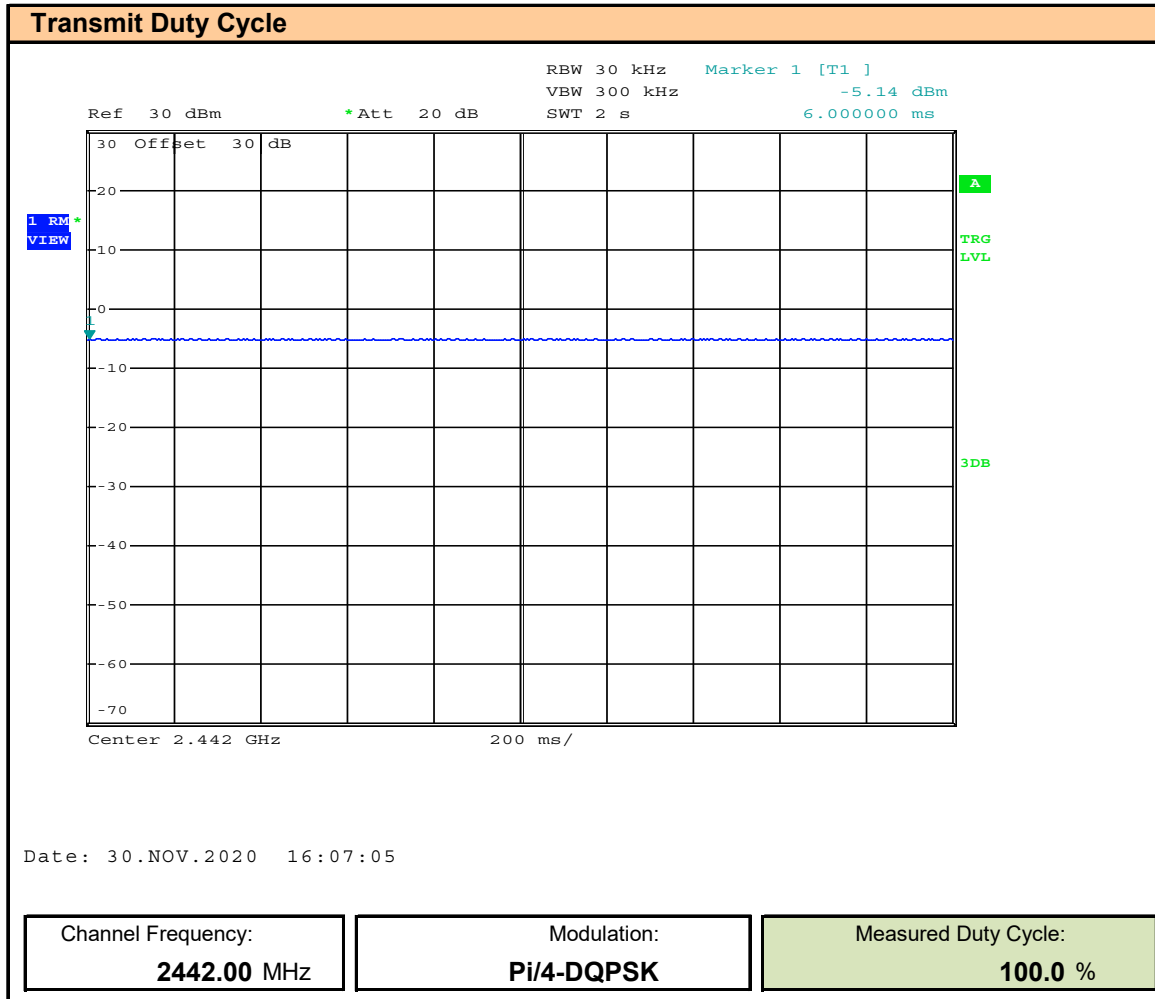

Plot 9.5 – Duty Cycle – BT – EDR 3MB

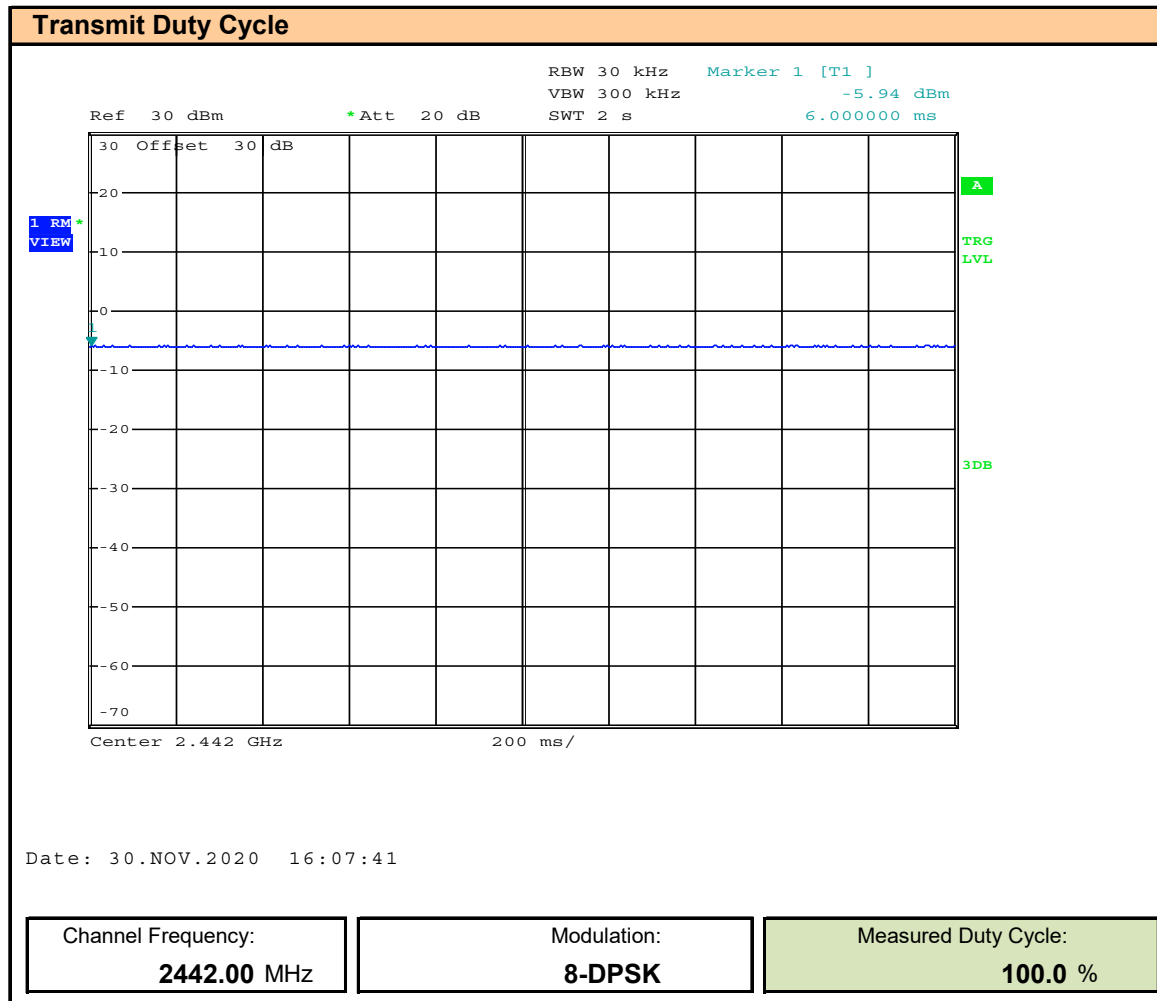


Table 9.2 – Summary Duty Cycle Measurement - WiFi

Transmit Duty Cycle Results DTS		
Frequency (MHz)	Modulation	Measured Duty Cycle Cycle (%)
2437.00	DSSS	100.0
2437.00	OFDM	100.0
2437.00	MCS0	100.0

Transmit Duty Cycle = 100%. Duty Cycle Correction not Required

Transmit Duty Cycle Results DSS		
Frequency (MHz)	Modulation	Measured Duty Cycle Cycle (%)
2442.00	Pi/4-DQPSK	100.0
2442.00	8-DPSK	100.0

Transmit Duty Cycle = 100%. Duty Cycle Correction not Required

10.0 ANTENNA PORT CONDUCTED POWER, (DTS)

Test Procedure

Normative Reference	FCC 47 CFR §2.1046, §15.247(b)(3), RSS-Gen (6.1.2), RSS-247 (5.4)(d), KDB 558074 (8.3.2), ANSI C63.10 (11.9.2.2.2)
----------------------------	--

Limits

47 CFR §15.247(b)(3)	(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.
RSS-247 (5.4)(d)	5.4 Transmitter output power and equivalent isotropically radiated power (e.i.r.p.) Devices shall comply with the following requirements, where applicable: d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e). As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power.

Table 10.1 – Summary of Conducted Power Measurements, (DTS)

See Appendix E for Measurement Plots

Conducted Power Measurement Results - DTS										
Frequency (MHz)	Modulation	Bit Rate (Mbps)	Measured Power [P_{Meas}] (dBm)	Conducted Limit [P_{Lim}] (dBm)	Conducted Margin (dB)	Antenna Gain* (dBi)	EIRP [E_{Meas}] (dBm)	EIRP Limit [E_{Lim}] (dBm)	EIRP Margin (dB)	Result
2412.00	CCK	1.0	13.98	30	16.020	0.6	14.58	36	21.420	Complies
2417.00	CCK	1.0	16.64	30	13.360	0.6	17.24	36	18.760	Complies
2437.00	CCK	1.0	16.41	30	13.590	0.6	17.01	36	18.990	Complies
2457.00	CCK	1.0	16.03	30	13.970	0.6	16.63	36	19.370	Complies
2462.00	CCK	1.0	13.57	30	16.430	0.6	14.17	36	21.830	Complies
2417.00	CCK	2.0	16.78	30	13.220	0.6	17.38	36	18.620	Complies
2437.00	CCK	2.0	16.53	30	13.470	0.6	17.13	36	18.870	Complies
2457.00	CCK	2.0	16.20	30	13.800	0.6	16.80	36	19.200	Complies
2417.00	DSSS	5.5	17.05	30	12.950	0.6	17.65	36	18.350	Complies
2437.00	DSSS	5.5	16.86	30	13.140	0.6	17.46	36	18.540	Complies
2457.00	DSSS	5.5	16.45	30	13.550	0.6	17.05	36	18.950	Complies
2417.00	DSSS	11.0	17.12	30	12.880	0.6	17.72	36	18.280	Complies
2437.00	DSSS	11.0	16.91	30	13.090	0.6	17.51	36	18.490	Complies

Table 10.1 – Summary of Conducted Power Measurements, (DTS) Cont.

See Appendix E for Measurement Plots

Conducted Power Measurement Results - DTS										
Frequency (MHz)	Modulation	Bit Rate (Mbps)	Measured Power [P_{Meas}] (dBm)	Conducted Limit [P_{Lim}] (dBm)	Conducted Margin (dB)	Antenna Gain* (dBi)	EIRP [E_{Meas}] (dBm)	EIRP Limit [E_{Lim}] (dBm)	EIRP Margin (dB)	Result
2417.00	OFDM	6.0	15.19	30	14.810	0.6	15.79	36	20.210	Complies
2437.00	OFDM	6.0	15.06	30	14.940	0.6	15.66	36	20.340	Complies
2457.00	OFDM	6.0	14.70	30	15.300	0.6	15.30	36	20.700	Complies
2417.00	OFDM	12.0	15.27	30	14.730	0.6	15.87	36	20.130	Complies
2417.00	OFDM	18.0	15.25	30	14.750	0.6	15.85	36	20.150	Complies
2417.00	OFDM	24.0	15.29	30	14.710	0.6	15.89	36	20.110	Complies
2417.00	OFDM	36.0	15.27	30	14.730	0.6	15.87	36	20.130	Complies
2417.00	OFDM	48.0	15.31	30	14.690	0.6	15.91	36	20.090	Complies
2417.00	OFDM	54.0	15.31	30	14.690	0.6	15.91	36	20.090	Complies
2417.00	MCS0	-	15.34	30	14.660	0.6	15.94	36	20.060	Complies
2417.00	MCS3	-	15.30	30	14.700	0.6	15.90	36	20.100	Complies
2417.00	MCS7	-	15.28	30	14.720	0.6	15.88	36	20.120	Complies

$$\text{Conducted Margin} = P_{\text{Limit}} - P_{\text{Meas}}$$

$$\text{EIRP Margin} = E_{\text{Limit}} - E_{\text{Meas}}$$

* Antenna Gain information provided by applicant.

12.0 ANTENNA PORT CONDUCTED POWER, (DSS)

Test Procedure

Normative Reference	FCC 47 CFR §2.1046, §15.247(b)(3), RSS-Gen (6.1.2), RSS-247 (5.4)(d), KDB 558074 (8.3.2), ANSI C63.10 (11.9.2.2.2)
----------------------------	--

Limits

47 CFR §15.247(b)(3)	(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.
RSS-247 (5.4)(d)	5.4 Transmitter output power and equivalent isotropically radiated power (e.i.r.p.) Devices shall comply with the following requirements, where applicable: d) For DTSS employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e). As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power.

Table 11.1 – Summary of Conducted Power Measurements, (DSS)

See Appendix F for Measurement Plots

Conducted Power Measurement Results - DSS										
Frequency (MHz)	Modulation	Bit Rate (Mbps)	Measured Power [P_{Meas}] (dBm)	Conducted Limit [P_{Lim}] (dBm)	Conducted Margin (dB)	Antenna Gain* (dBi)	EIRP [E_{Meas}] (dBm)	EIRP Limit [E_{Lim}] (dBm)	EIRP Margin (dB)	Result
2402.00	P1/4-DQPSK	2.0	6.82	30	23.180	0.6	7.42	36	28.580	Complies
2442.00	P1/4-DQPSK	2.0	6.98	30	23.020	0.6	7.58	36	28.420	Complies
2480.00	P1/4-DQPSK	2.0	6.74	30	23.260	0.6	7.34	36	28.660	Complies
2402.00	8-DPSK	3.0	6.68	30	23.320	0.6	7.28	36	28.720	Complies
2442.00	8-DPSK	3.0	6.85	30	23.150	0.6	7.45	36	28.550	Complies
2480.00	8-DPSK	3.0	6.58	30	23.420	0.6	7.18	36	28.820	Complies

$$\text{Conducted Margin} = P_{\text{Limit}} - P_{\text{Meas}}$$

$$\text{EIRP Margin} = E_{\text{Limit}} - E_{\text{Meas}}$$

* Antenna Gain information provided by applicant.

12.0 POWER SPECTRAL DENSITY

Test Procedure

Normative Reference	FCC 47 CFR §15.247(e), RSS-247 (5.2)(b), KDB 558074 (10.3), ANSI C63.10 (11.10.3)
----------------------------	--

Limits

47 CFR §15.247(e)	(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
RSS-247 (5.2)(b)	b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).
KDB 558074 (10.3) C63.10 (11.10.3)	<p>Method AVGPS-1 (trace averaging with EUT transmitting at full power throughout each sweep)</p> <p>This procedure may be used when the maximum (average) conducted output power was used to demonstrate compliance to the output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has an RMS power averaging detector, it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously (duty cycle $\geq 98\%$); otherwise sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter off time is to be considered).</p> <ul style="list-style-type: none"> a) Set instrument center frequency to DTS channel center frequency. b) Set span to at least $1.5 \times \text{OBW}$. c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. d) Set VBW $\geq 3 \times \text{RBW}$. e) Detector = RMS f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$. g) Sweep time = auto couple. h) Employ trace averaging (RMS) mode over a minimum of 100 traces. i) Use the peak marker function to determine the maximum amplitude level. j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

Test Setup

Appendix A Figure A.1

Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as described above. Number of Sweep Points $\geq 2 \times \text{Span} / \text{RBW} = 2 \times (1.5\text{MHz} / 3\text{kHz}) = 1000$, the SA was configured for 1001 Points. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at 100% Duty Cycle. The Power Spectral Density was measured and recorded.

Table 12.1 – Summary of Power Spectral Density Measurements, (DTS)

See Appendix G for Power Density Measurement Plots

Power Spectral Density Measurement Results - DTS					
Frequency (MHz)	Modulation	Bit Rate (Mbps)	Measured PSD [P _{Meas}] (dBm)	PSD Limit [P _{Lim}] (dBm)	Margin (dB)
2417.00	CCK	2.0	-1.41	8	9.410
2417.00	DSSS	5.5	-1.40	8	9.400
2417.00	DSSS	11.0	-1.97	8	9.970
2417.00	OFDM	6.0	-4.56	8	12.560
2417.00	MCS0	-	-4.82	8	12.820
RESULT:					Complies

$$\text{Margin} = P_{\text{Limit}} - P_{\text{Meas}}$$

Table 12.2 – Summary of Power Spectral Density Measurements, (DSS)

See Appendix G for Power Density Measurement Plots

Power Spectral Density Measurement Results - DSS					
Frequency (MHz)	Modulation	Bit Rate (Mbps)	Measured PSD [P_{Meas}] (dBm)	PSD Limit [P_{Lim}] (dBm)	Margin (dB)
2402.00	Pi/4-DQPSK	2.0	-1.61	8	9.610
2442.00	Pi/4-DQPSK	2.0	-1.15	8	9.150
2480.00	Pi/4-DQPSK	2.0	-1.50	8	9.500
2402.00	8-DPSK	3.0	-1.75	8	9.750
2442.00	8-DPSK	3.0	-1.48	8	9.480
2480.00	8-DPSK	3.0	-1.66	8	9.660
				Result:	Complies

$$\text{Margin} = P_{\text{Limit}} - P_{\text{Meas}}$$

13.0 FHSS NUMBER OF HOPPING CHANNELS


Test Procedure

Normative	FCC 47 CFR §15.247, RSS-247
Reference	KDB 558074, ANSI C63.10


Limits

47 CFR §15.247(a)(1)	(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
RSS-247 (5.1)(d)	5.1 Frequency hopping systems (FHS) The following applies to FHSs in each of the three bands: FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.


Plot 13.1 – Number of Hopping Channels, EDR 2MB, 2400-2441MHz

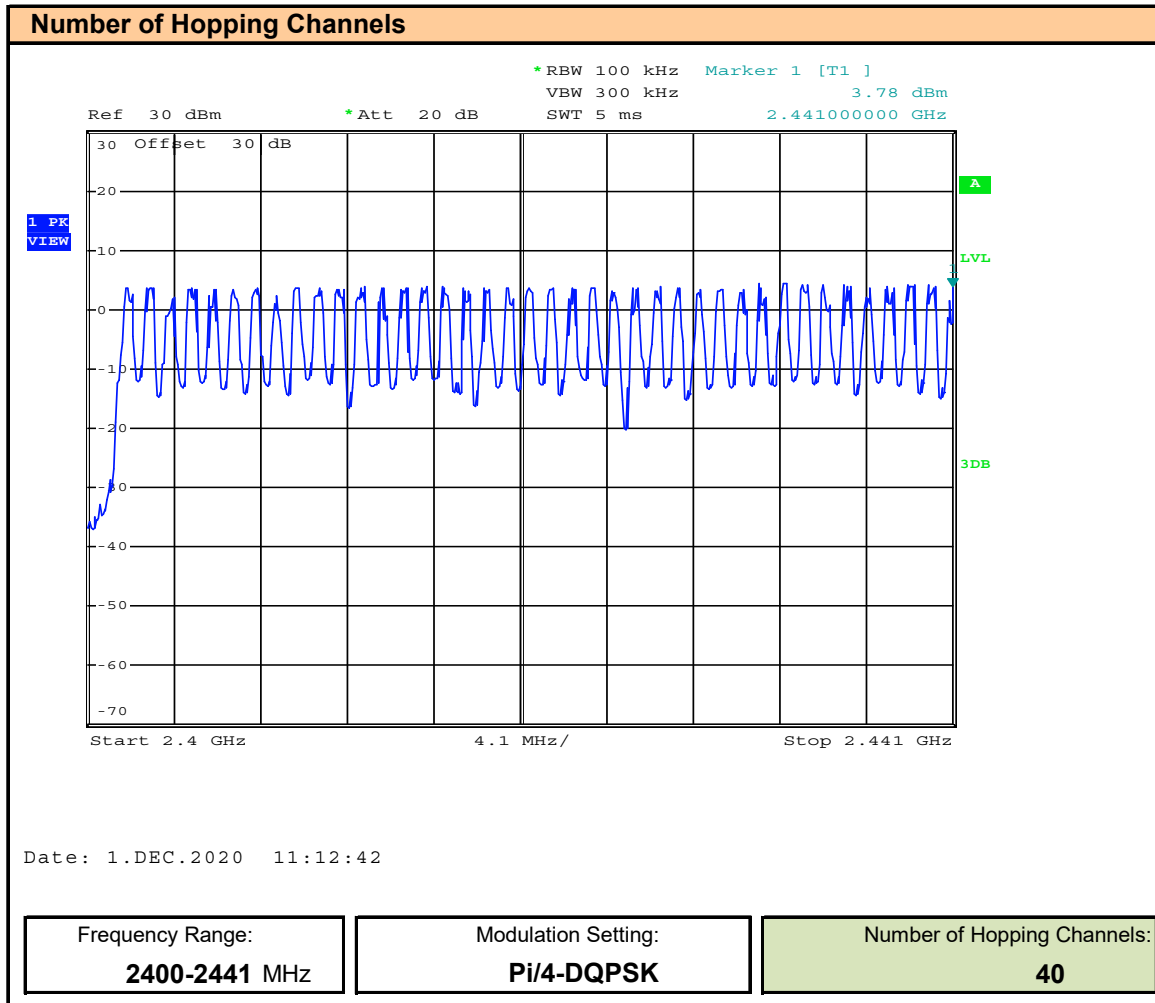

Plot 13.2 – Number of Hopping Channels, EDR 2MB, 2441-2485MHz

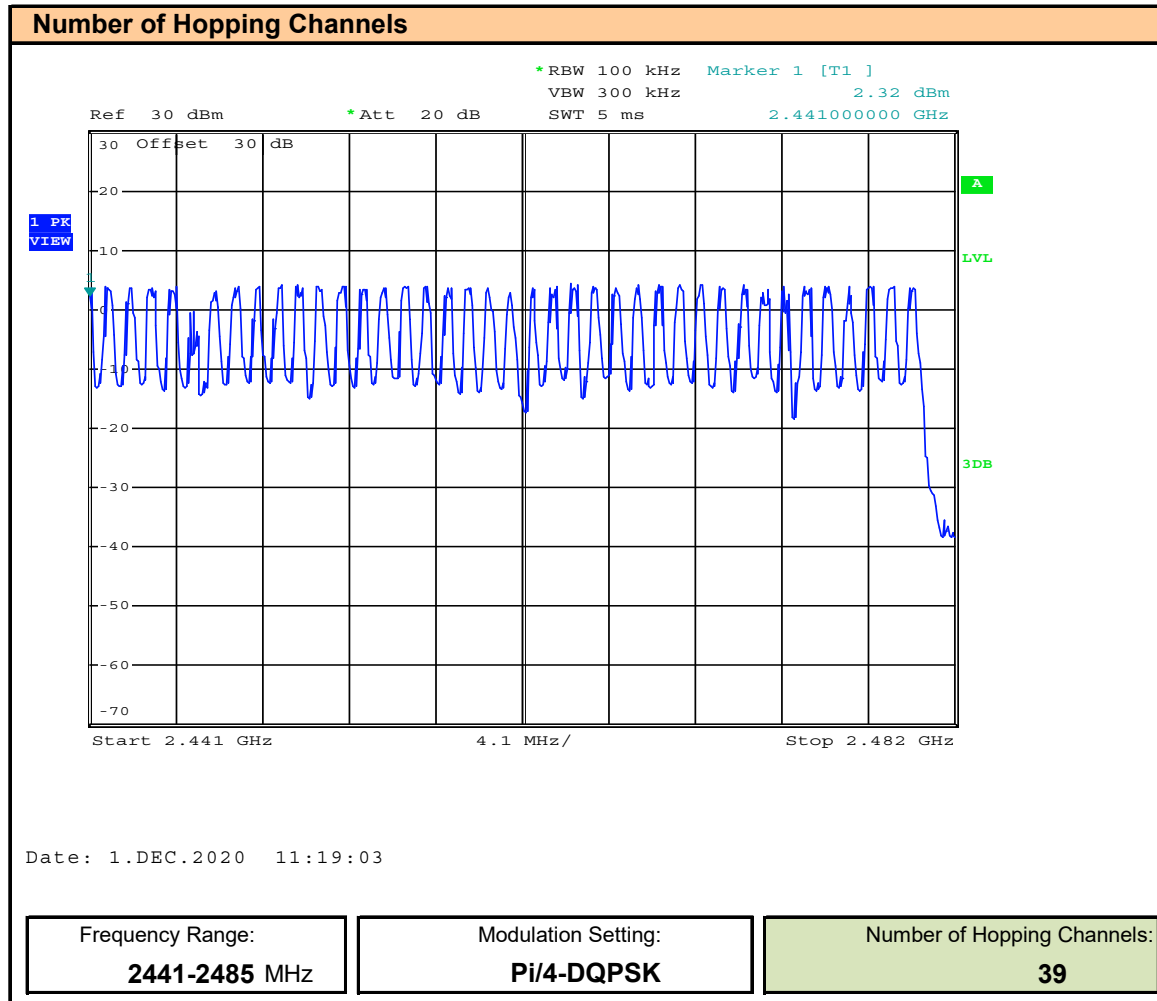

Plot 13.3 – Number of Hopping Channels, EDR 3MB, 2400 - 2441MHz

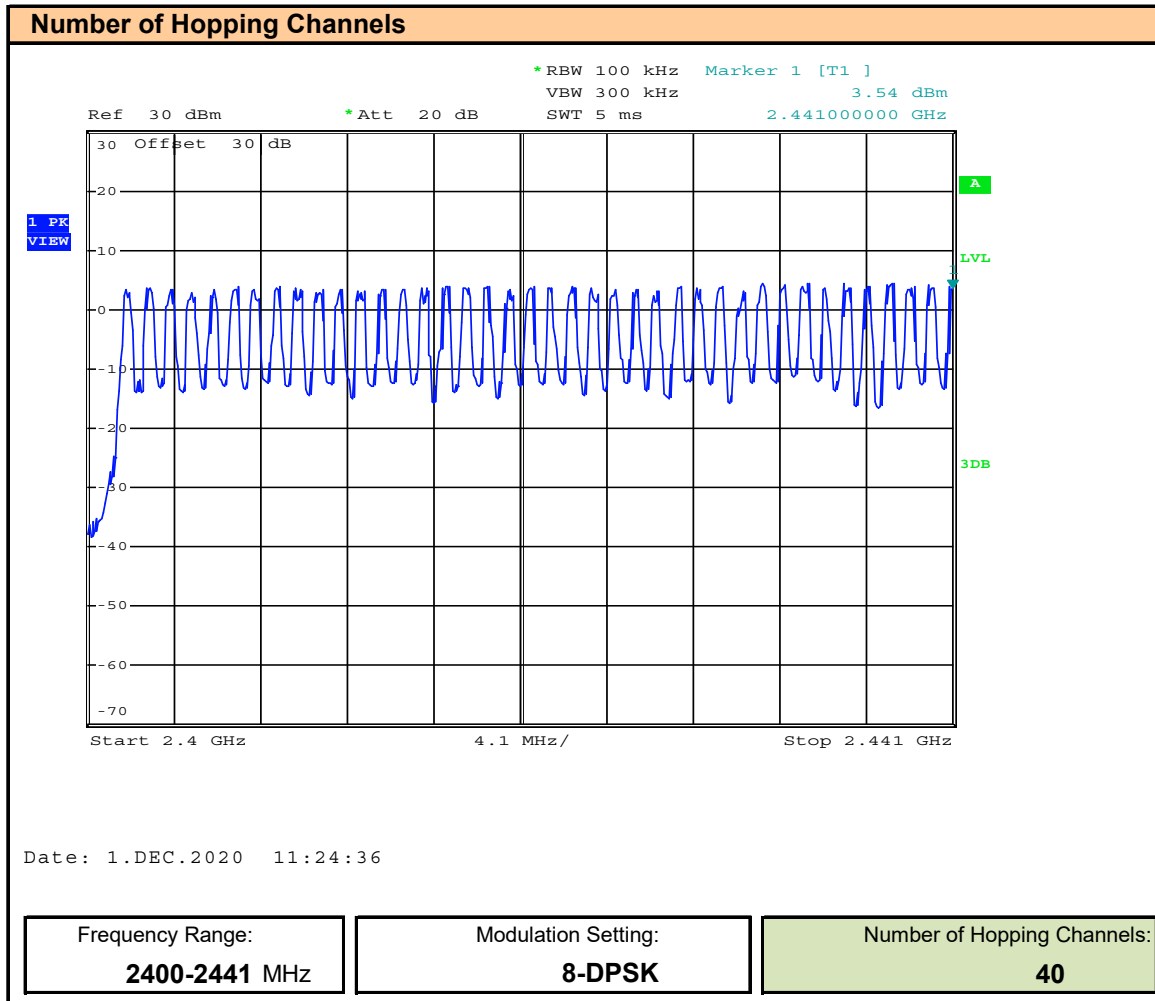

Plot 13.4 – Number of Hopping Channels, EDR 3MB, 2441 - 2485MHz

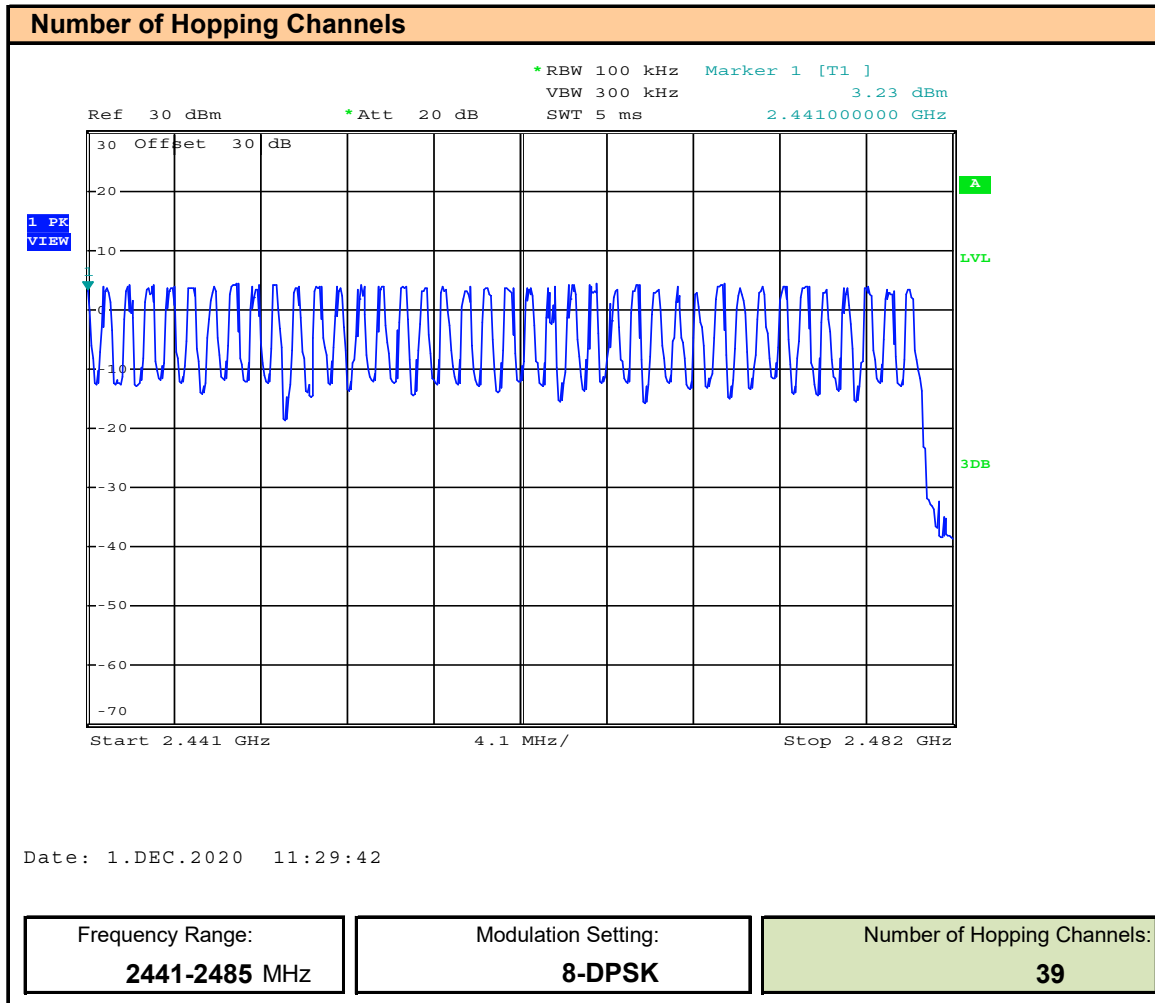


Table 13.2 – Summary of FHSS Number of Hopping Channels

Hopping Channel Results DSS		
Frequency Range (MHz)	Modulation	Number of Hopping Channels
2400-2441	Pi/4-DQPSK	40
2441-2485	Pi/4-DQPSK	39
Total:		79
2400-2441	8-DPSK	40
2441-2485	8-DPSK	39
Total:		79
Result:		Complies

14.0 FHSS CHANNEL SEPARATION


Test Procedure

Normative	FCC 47 CFR §15.247, RSS-247
Reference	KDB 558074, ANSI C63.10


Limits

47 CFR §15.247(a)(1)	(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400- 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
RSS-247 (5.1)(db)	5.1 Frequency hopping systems (FHS) The following applies to FHSs in each of the three bands: FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.


Plot 14.1 – Channel Separation, BT EDR 2MB, 2403MHz

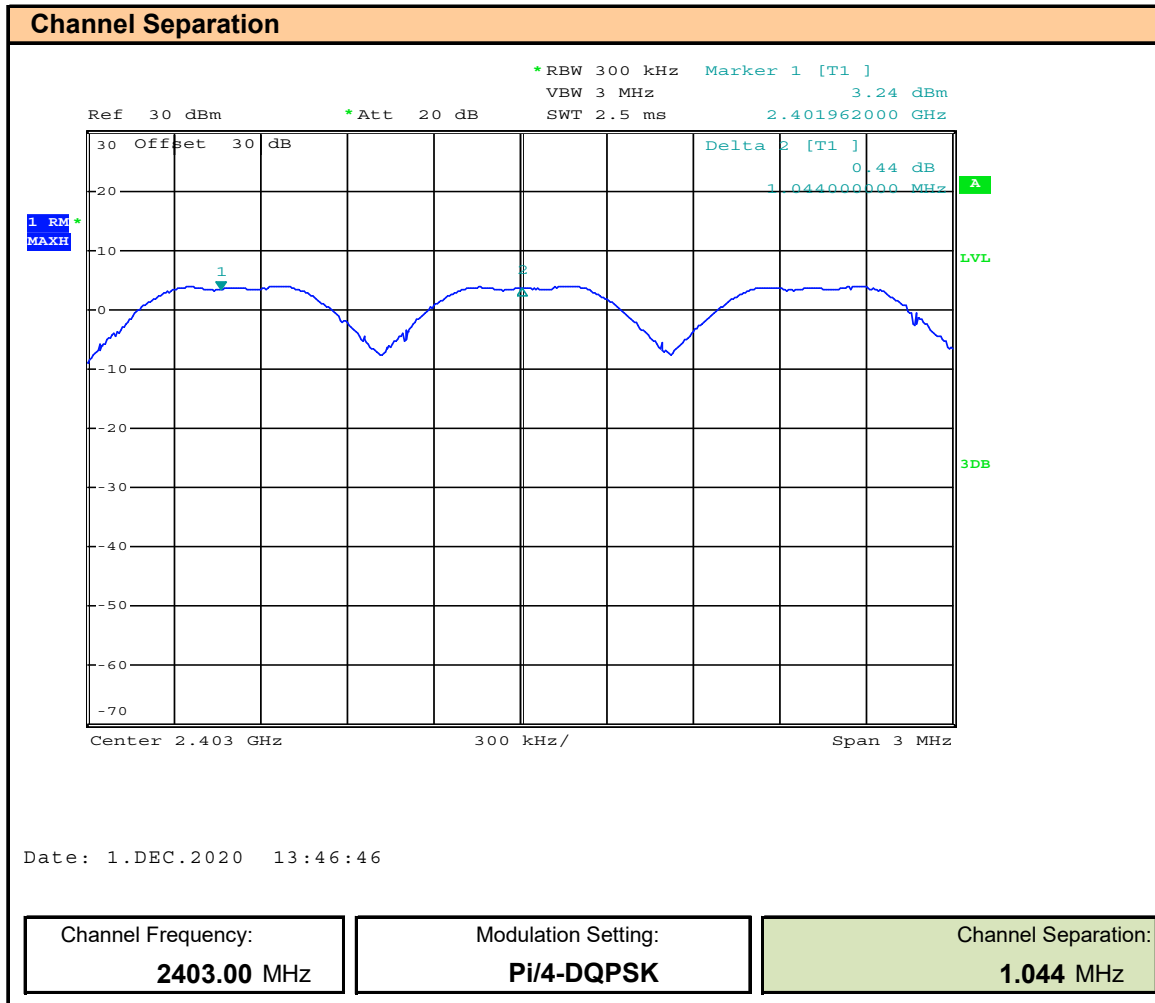

Plot 14.2 – BT ERD 2MB 20dB BW

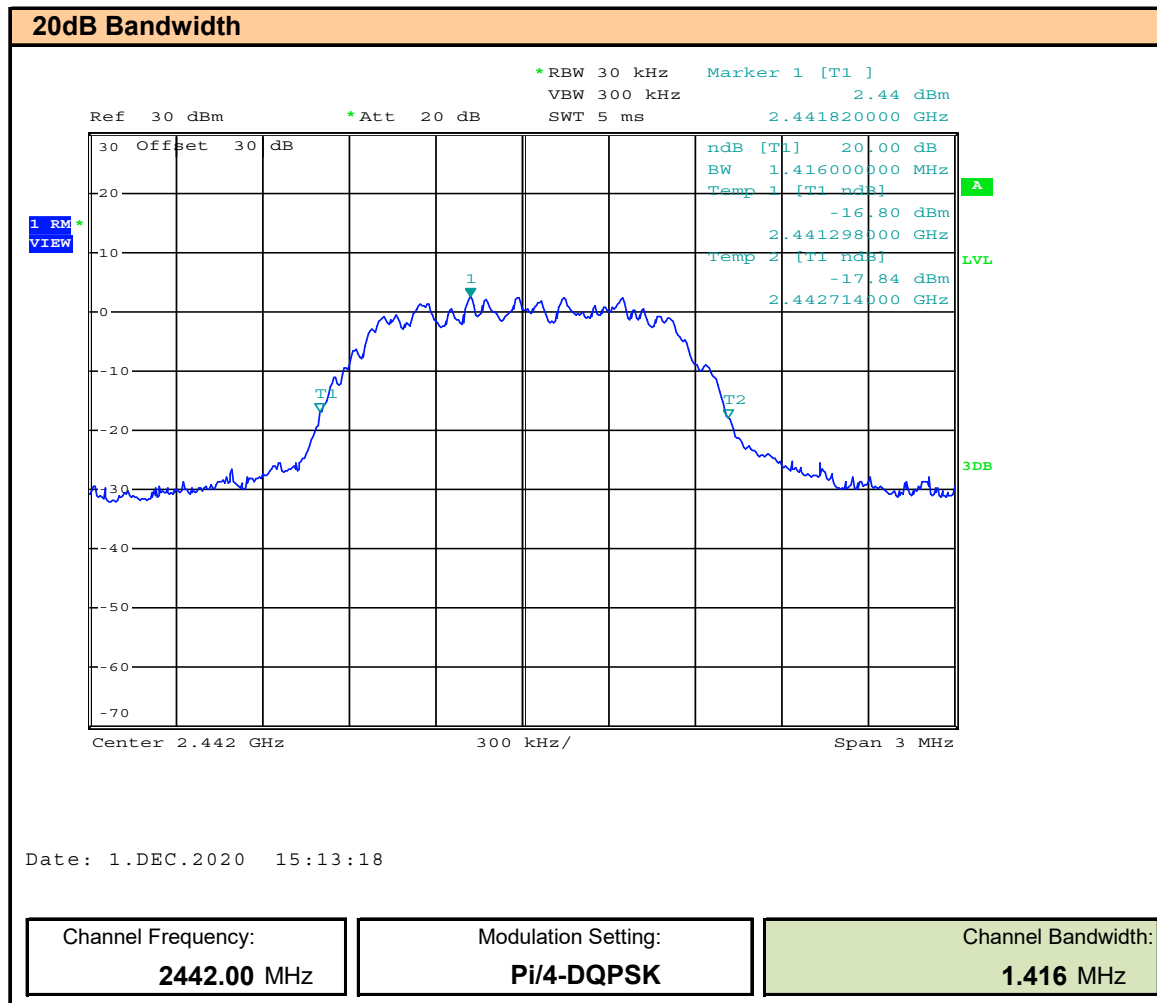

Plot 14.3 – Channel Separation, BT EDR 3MB, 2403MHz

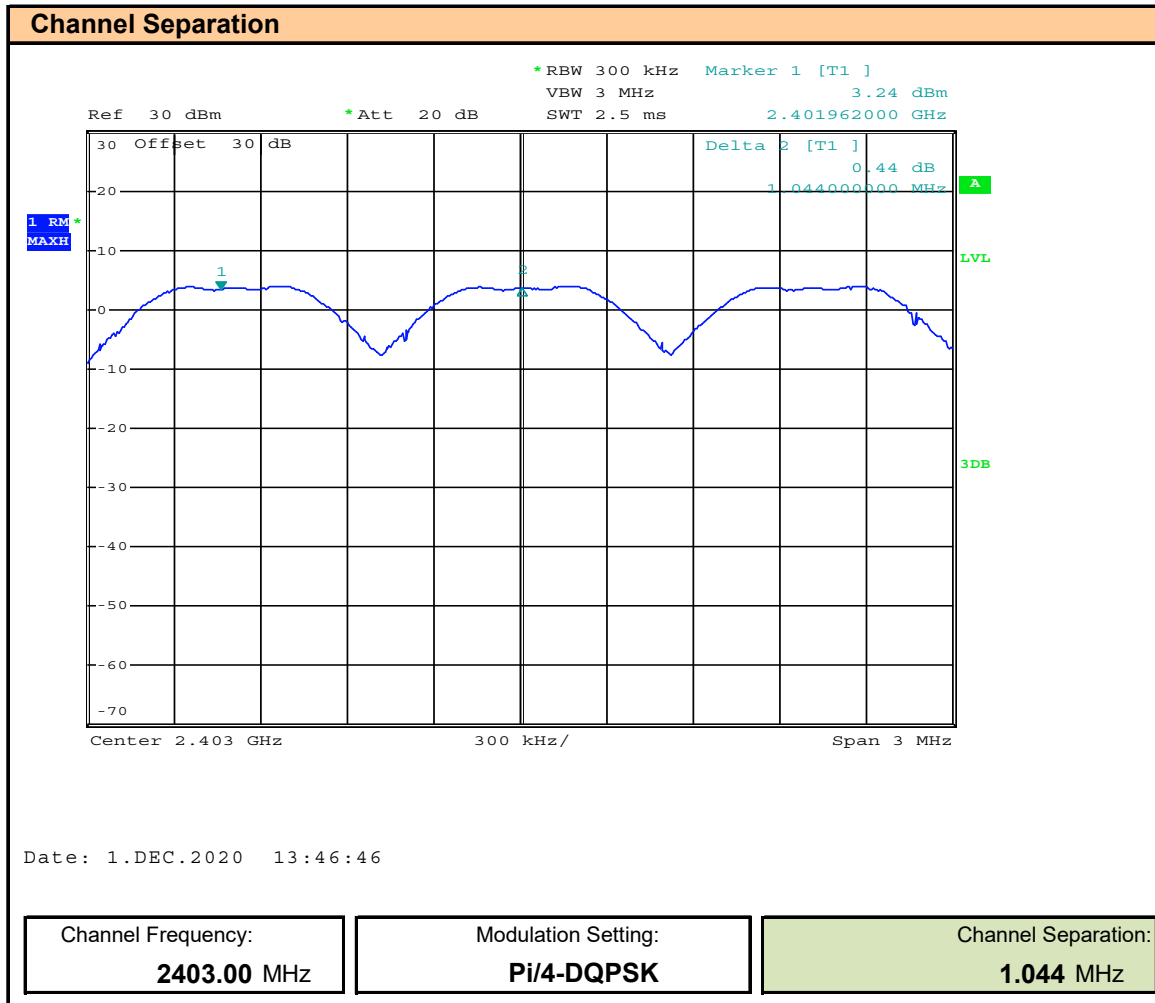

Plot 14.4 – BT EDR 3MB 20dB BW

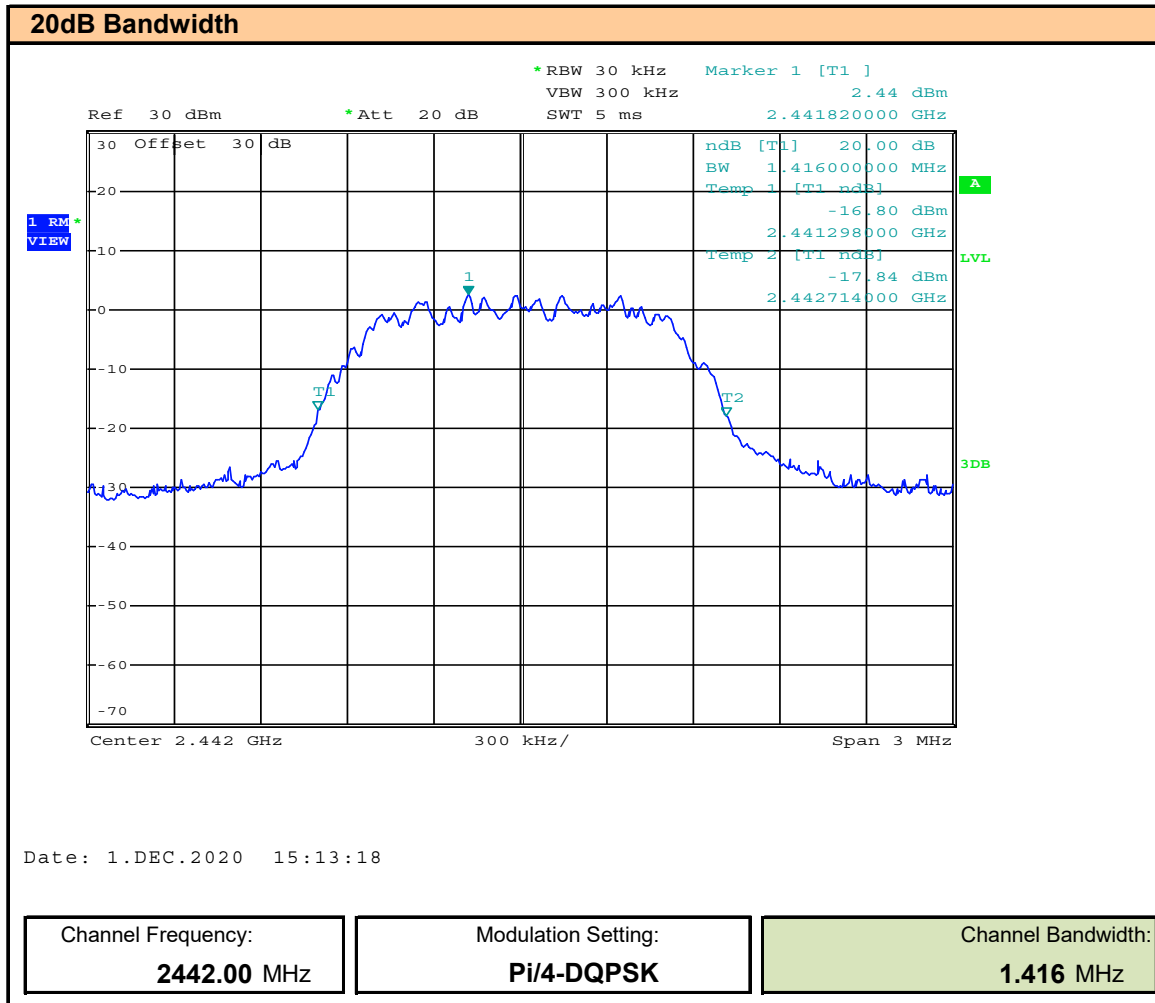


Table 14.1 – Summary of FHSS Channel Separation

Hopping Channel Separation Results DSS					
Channel Frequency (MHz)	Modulation	Channel Separation (MHz)	20dB BW (MHz)	Minimum Bandwidth (MHz)	Margin (MHz)
2403.00	Pi/4-DQPSK	1.044	1.416	0.944	0.100
2403.00	8-DPSK	1.044	1.398	0.932	0.112
Result:					Complies

Minimum Bandwidth = 20dB BW X 2/3

Margin = Channel Separation - Minimum Bandwidth

15.0 FHSS TIME OF OCCUPANCY


Test Procedure

Normative	FCC 47 CFR §15.247, RSS-247
Reference	KDB 558074, ANSI C63.10

Limits

47 CFR §15.247(a)(1)	(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
RSS-247 (5.1)(d)	5.1 Frequency hopping systems (FHS) FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Plot 15.1 – Time of Occupancy, BT EDR 2MB

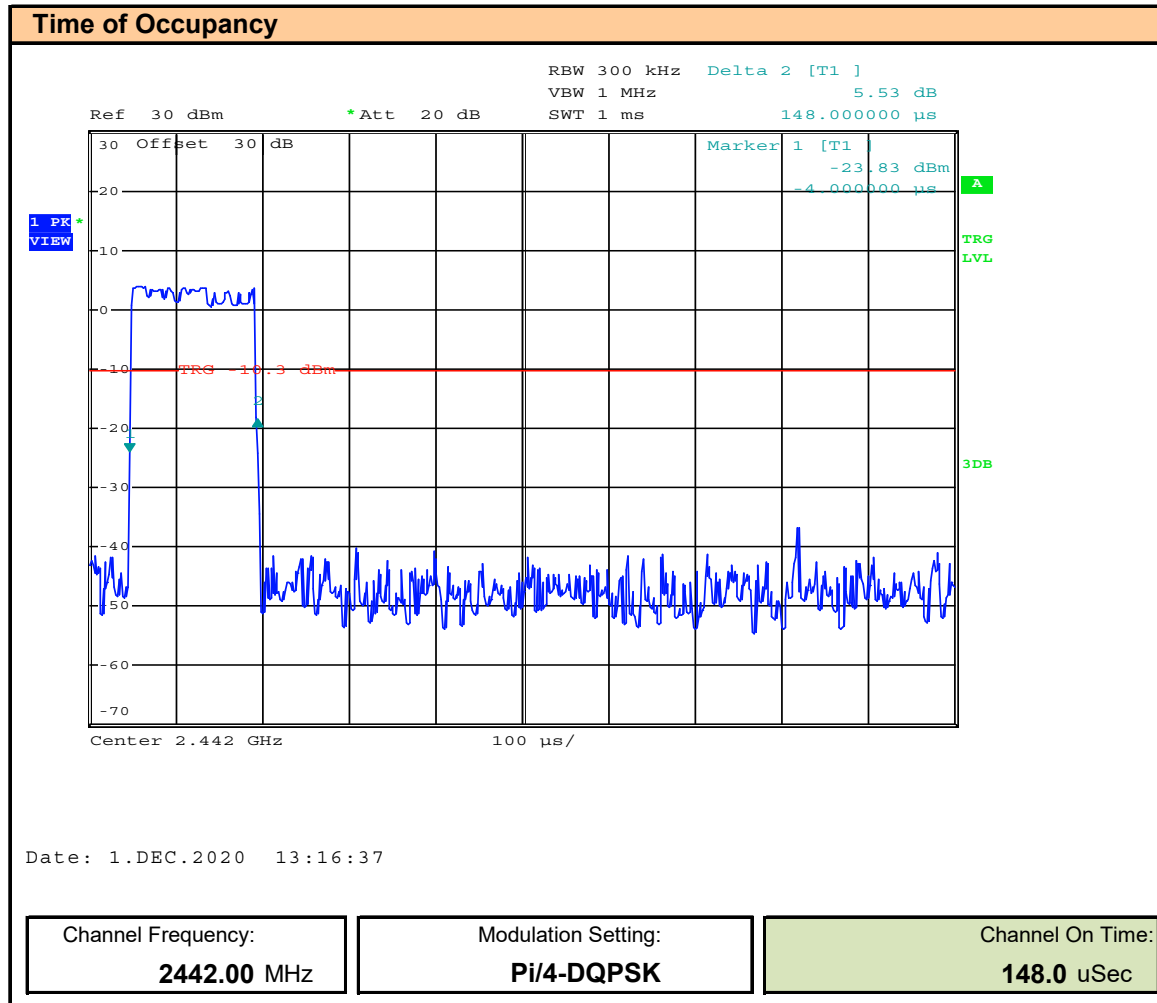

Plot 15.2 – Time of Occupancy, BT EDR 3MB

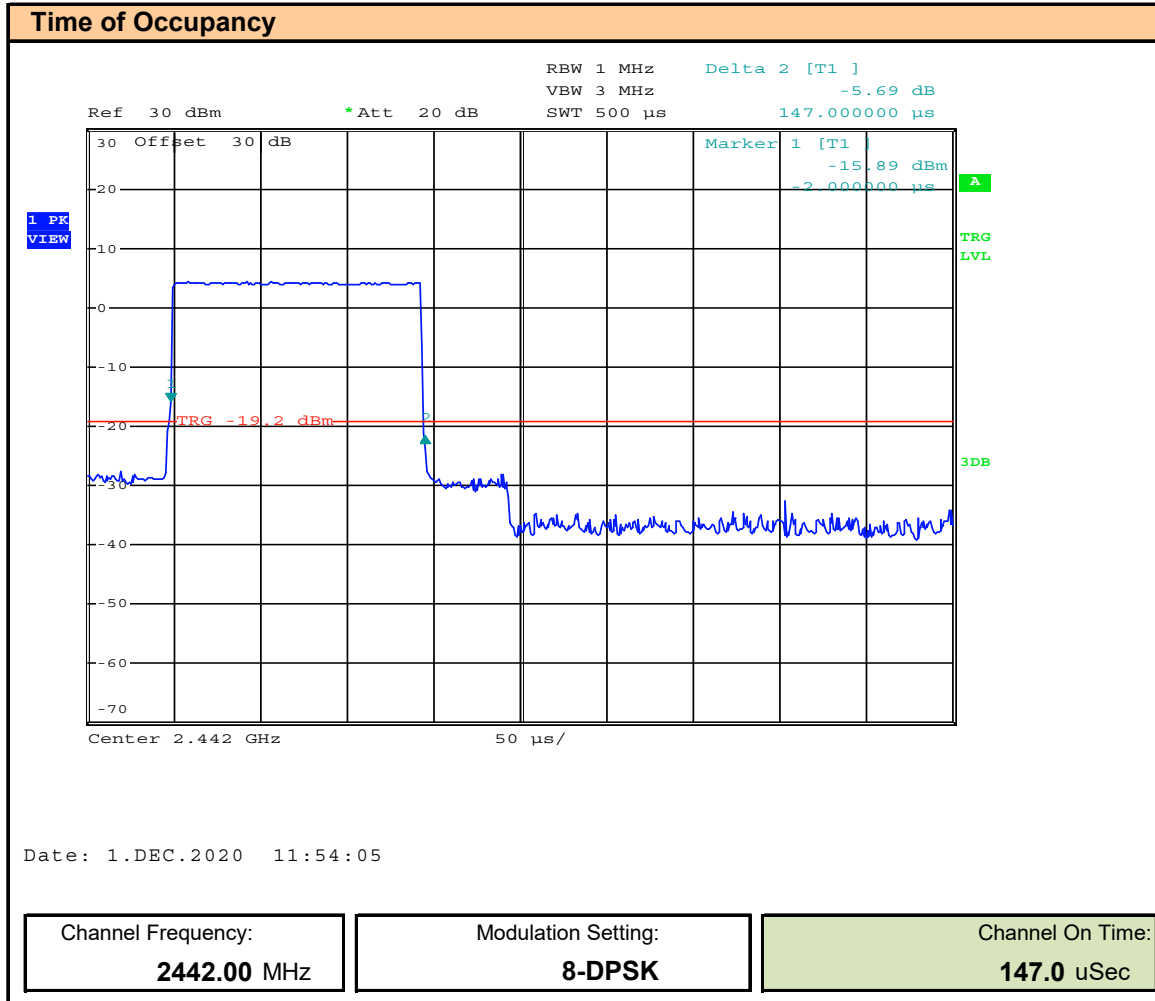


Table 15.1 – Summary of FHSS Time of Occupancy

Hopping Channel Time of Occupancy DSS								
Channel Frequency (MHz)	Modulation	Channel On Time [t_{on}] (uSec)	Average Number Occupancy [N_{Occ}]	Total Num of Hopping Channels [N_{Tot}]	Total Period [T_{Period}] (Sec)	Total Time of Occupancy [T_{Occ}] (Sec)	Limit [Limit] (Sec)	Margin (Sec)
2442.00	Pi/4-DQPSK	148.0	1000	79	32	0.148	0.4	0.252
2442.00	8-DPSK	147.0	1000	79	32	0.147	0.4	0.253
Result:								Complies

$$T_{Period} = N_{Tot} \times 0.4Sec$$

$$T_{Occ} = T_{on} \times N_{Occ}$$

$$Margin = Limit - T_{Occ}$$

Where:

- Total Period = 0.4 Seconds X Total Number of Hopping Channels (From Section 13.0)
- Average Number of Occupancy = the observed number times the transmitter occupied the channel within the Total Period
- Total Time of Occupancy = Channel On Time X Average Number of Occupancy

16.0 CONDUCTED SPURIOUS EMISSIONS -BAND EDGE

Test Procedure

Normative Reference	FCC 47 CFR §2.1051, §15.247(d), RSS-Gen (6.13), RSS-247 (5.5), KDB 558074 (11.3), ANSI C63.10 (11.11.3)
----------------------------	--

Limits

47 CFR §15.247(d)	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.
RSS-247 (5.5)	<p>5.5 Unwanted emissions</p> <p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.</p> <p>d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).</p> <p>As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power.</p>
KDB 558074 (11.3) C63.10 (11.11.3)	<p>11.1 General</p> <p>The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:</p> <p>b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).</p> <p>11.2 Reference level measurement</p> <p>a) Set instrument center frequency to DTS channel center frequency.</p> <p>b) Set the span to $\geq 1.5 \times \text{DTS bandwidth}$.</p> <p>c) Set the RBW = 100 kHz.</p> <p>d) Set the VBW $\geq 3 \times \text{RBW}$.</p> <p>e) Detector = peak.</p> <p>f) Sweep time = auto couple.</p> <p>g) Trace mode = max hold.</p> <p>h) Allow trace to fully stabilize.</p> <p>i) Use the peak marker function to determine the maximum PSD level.</p> <p>Note that the channel found to contain the maximum PSD level can be used to establish the reference</p>

Table 16.1 – Summary of Reference Level Measurements, (DTS)

See Appendix H for Measurement Plots

Conducted Spurious Emissions - Reference Measurement					
Frequency (MHz)	Modulation	Bit Rate (Mbps)	Measured PSD [P_{Meas}] (dBm)	Required Attenuation [A_R] (dB)	Limit Line [A_L] (dBm)
2417.00	DSSS	11	6.52	30	-23.480
2417.00	OFDM	54	3.70	30	-26.300
2417.00	MCS0	-	2.97	30	-27.030

Limit Line = Measured PSD - Required Attenuation

Table 16.2 – Summary of Spurious Emission Measurements – Band Edge, (DTS)

Emission Level Measurement - Band Edge						
Channel Frequency (MHz)	Modulation	Bit Rate (mbps)	Measured Emission [E_{Meas}] (dBm)	Emission Frequency (MHz)	Limit Line [A_L] (dBm)	Margin (dB)
2412	DSSS	1	-31.23	2.399	-23.48	7.75
2412	DSSS	11	-28.35	2.399		4.87
2412	OFDM	54	-29.33	2.399		5.85
2412	MCS0	-	-29.80	2.399		6.32
2462	DSSS	1	-31.72	2.483		8.24
2462	DSSS	11	-34.38	2.483		10.90
2462	OFDM	54	-31.91	2.483		8.43
2462	MCS0	-	-31.34	2.483		7.86
Results:					Complies	

Margin = A_L - E_{MEAS}

Limit Line = Measured PSD - Required Attenuation

Table 16.3 – Summary of Reference Level Measurements, BT EDR 2MB

See Appendix H for Measurement Plots

Conducted Spurious Emissions - Reference Measurement					
Frequency (MHz)	Modulation	Bit Rate (Mbps)	Measured PSD [P _{Meas}] (dBm)	Required Attenuation [A _R] (dB)	Limit Line [A _L] (dBm)
2402.00	Pi/4-DQPSK	2	7.21	30	-22.79
2442.00			7.04	30	-22.96
2480.00			7.01	30	-22.99

Limit Line = Measured PSD - Required Attenuation

Table 16.4 – Summary of Spurious Emission Measurements – Band Edge, BT EDR 2MB

Emission Level Measurement - Band Edge						
Channel Frequency (MHz)	Modulation	Bit Rate (mbps)	Measured Emission [E _{Meas}] (dBm)	Emission Frequency (MHz)	Limit Line [A _L] (dBm)	Margin (dB)
2402	Pi/4-DQPSK	2	-26.96	2.399	-22.79	4.17
2480	Pi/4-DQPSK	2	-36.70	2.483		13.91
Results:					Complies	

Margin = A_L - E_{MEAS}

Table 16.5 – Summary of Reference Level Measurements, BT EDR 3MB

See Appendix H for Measurement Plots

Conducted Spurious Emissions - Reference Measurement					
Frequency (MHz)	Modulation	Bit Rate (Mbps)	Measured PSD [P _{Meas}] (dBm)	Required Attenuation [A _R] (dB)	Limit Line [A _L] (dBm)
2402.00	8-DPSK	3	7.09	30	-22.91
2442.00			7.51	30	-22.49
2480.00			7.07	30	-22.93

Limit Line = Measured PSD - Required Attenuation

Table 16.6 – Summary of Spurious Emission Measurements – Band Edge, BT EDR 3MB

Emission Level Measurement - Band Edge						
Channel Frequency (MHz)	Modulation	Bit Rate (mbps)	Measured Emission [E _{Meas}] (dBm)	Emission Frequency (MHz)	Limit Line [A _L] (dBm)	Margin (dB)
2402	8-DPSK	3	-27.28	2.399	-22.49	4.79
2480	8-DPSK	3	-37.10	2.483		14.61
Results:					Complies	

Margin = A_L - E_{MEAS}

17.0 CONDUCTED SPURIOUS EMISSIONS

Test Procedure	
Normative Reference	FCC 47 CFR §2.1051, §15.247(d), RSS-Gen (6.13), RSS-247 (5.5), KDB 558074 (11.3), ANSI C63.10 (11.11.3)
Limits	
47 CFR §15.247(d)	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.
RSS-247 (5.5)	<p>5.5 Unwanted emissions</p> <p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.</p> <p>d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).</p> <p>As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power.</p>
KDB 558074 (11.3) C63.10 (11.11.3)	<p>11.1 General</p> <p>The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:</p> <p>b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).</p> <p>11.2 Reference level measurement</p> <p>a) Set instrument center frequency to DTS channel center frequency.</p> <p>b) Set the span to $\geq 1.5 \times \text{DTS bandwidth}$.</p> <p>c) Set the RBW = 100 kHz.</p> <p>d) Set the VBW $\geq 3 \times \text{RBW}$.</p> <p>e) Detector = peak.</p> <p>f) Sweep time = auto couple.</p> <p>g) Trace mode = max hold.</p> <p>h) Allow trace to fully stabilize.</p> <p>i) Use the peak marker function to determine the maximum PSD level.</p> <p>Note that the channel found to contain the maximum PSD level can be used to establish the reference</p>

Table 17.1 – Summary of Conducted Spurious Emissions, (DTS)

See Appendix I for Band Edge Measurement Plots
Reference Section 16.0 for Reference Level Measurement

Emission Level Measurement					
Frequency Range (GHz)	Bit Rate (mbps)	Modulation	Measured Emission [E _{Meas}] (dBm)	Limit Line [A _L] (dBm)	Margin (dB)
to 3GHz	11	DSSS	-32.03	-23.48	8.55
3-10			-36.93		13.45
10-13.6			-36.91		13.43
13.6-18			-32.84		9.36
18-25			-32.37		8.89
Results:				Complies	

$$\text{Margin} = A_L - E_{\text{MEAS}}$$

Table 17.2 – Summary of Conducted Spurious Emissions, BT EDR 2MB

See Appendix I for Band Edge Measurement Plots
Reference Section 16.0 for Reference Level Measurement

Emission Level Measurement					
Frequency Range (GHz)	Bit Rate (mbps)	Modulation	Measured Emission [E _{Meas}] (dBm)	Limit Line [A _L] (dBm)	Margin (dB)
to 3GHz	2	Pi/4-DQPSK	-37.03	-22.79	14.24
3-13.6			-33.39		10.60
13.6-25			-23.20		0.41
Results:				Complies	

$$\text{Margin} = A_L - E_{\text{MEAS}}$$

Table 17.3 – Summary of Conducted Spurious Emissions, BT EDR 3MB

See Appendix I for Band Edge Measurement Plots
Reference Section 16.0 for Reference Level Measurement

Emission Level Measurement					
Frequency	Bit	Modulation	Measured	Limit	Margin
Range	Rate		Emission	Line	
(GHz)	(mbps)		[E _{Meas.}]	[A _L]	
			(dBm)	(dBm)	
to 3GHz	2	Pi/4-DQPSK	-37.03	-22.79	14.24
3-13.6			-32.84		10.05
13.6-25			-23.49		0.70
Results:				Complies	

$$\text{Margin} = A_L - E_{\text{MEAS}}$$

18.0 RADIATED TX SPURIOUS EMISSIONS, RESTRICTED BAND

Test Procedure

Normative Reference	FCC 47 CFR §2.1051, §15.247(d), §15.205(a), §15.205(c), §15.209(a)
	KDB 558074 (8.6), ANSI C63.10 (11.12)

Limits

47 CFR §15.247(d)	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).																
47 CFR §15.209(a)	<p>§15.209 Radiated emission limits; general requirements.</p> <p>(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:</p> <table> <tr> <th>Frequency (MHz)</th><th>Field Strength (microvolts/meter)</th></tr> <tr> <td>0.009 - 0.490</td><td>2400/F (kHz) @300m</td></tr> <tr> <td>0.490 - 1.705</td><td>24000/F (kHz) @30m</td></tr> <tr> <td>1.705 - 30</td><td>30 @ 30m</td></tr> <tr> <td>30 - 88</td><td>100 @3m</td></tr> <tr> <td>88 - 216</td><td>150 @3m</td></tr> <tr> <td>216 - 960</td><td>200 @3m</td></tr> <tr> <td>Above 960</td><td>500 @3m</td></tr> </table>	Frequency (MHz)	Field Strength (microvolts/meter)	0.009 - 0.490	2400/F (kHz) @300m	0.490 - 1.705	24000/F (kHz) @30m	1.705 - 30	30 @ 30m	30 - 88	100 @3m	88 - 216	150 @3m	216 - 960	200 @3m	Above 960	500 @3m
Frequency (MHz)	Field Strength (microvolts/meter)																
0.009 - 0.490	2400/F (kHz) @300m																
0.490 - 1.705	24000/F (kHz) @30m																
1.705 - 30	30 @ 30m																
30 - 88	100 @3m																
88 - 216	150 @3m																
216 - 960	200 @3m																
Above 960	500 @3m																

Table 18.1 – Summary of Radiated Tx Spurious Emissions, Restricted Band, (DTS)

See Appendix J Radiated Tx Spurious Measurement Plots

Summary of Radiated Tx Emissions (Restricted Band)										
Measured Frequency Range (MHz)	Channel Frequency	Antenna Polarization	Emission Frequency	Measured Emission [E _{Meas}] (dBuV)	Antenna ACF [ACF] (dB)	Cable Loss [L _c] (dB)	Amplifier Gain [G _A] (dB)	Corrected Emission [E _{Corr}] (dBuV/m)	Limit (dBuV)	Margin (dB)
9kHz - 30MHz	2412.0	Front	ND	ND (1)	0.00	0.00	0.00 (3)	ND (2)	n/a	n/a
9kHz - 30MHz	2412.0	Side	ND	ND (1)	0.00	0.00	0.00 (3)	ND (2)	n/a	n/a
30-1000MHz	2412.0	Horizontal	867.7MHz	40.88	0.00	0.00	0.00 (3)	40.9 (2)	46.0	5.1
30-1000MHz	2412.0	Vertical	171.5MHz	25.65	0.00	0.00	0.00 (3)	25.7 (2)	43.5	17.9
1 - 3GHz	2412.0	Horizontal	ND	ND (1)	27.40	4.58	0.00 (3)	ND	54.0	n/a
1 - 3GHz	2412.0	Vertical	ND	ND (1)	27.40	4.58	0.00 (3)	ND	54.0	n/a
3-13GHz	2412.0	Horizontal	ND	ND (1)	36.76	9.86	0.00 (3)	ND	54.0	n/a
3-13GHz	2412.0	Vertical	ND	ND (1)	36.76	9.86	0.00 (3)	ND	54.0	n/a
13-18GHz	2412.0	Horizontal	ND	ND (1)	38.75	16.54	0.00 (3)	ND	54.0	n/a
13-18GHz	2412.0	Vertical	ND	ND (1)	38.75	16.54	0.00 (3)	ND	54.0	n/a
18-26GHz	2412.0	Horizontal	ND	ND (1)	43.50	21.86	26.00	ND	54.0	n/a
18-26GHz	2412.0	Vertical	ND	ND (1)	43.50	21.86	26.00	ND	54.0	n/a
Results:									Complies	

(1) No Emissions detected above ambient or within 20dB of the limit

(2) Antenna ACF, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{\text{Corr}} = E_{\text{Meas}} + \text{ACF} + L_c - G_A$$

Table 18.2 – Summary of Radiated Tx Spurious Emissions, Restricted Band, (BlueTooth)

See Appendix J Radiated Tx Spurious Measurement Plots

Summary of Radiated Tx Emissions (Restricted Band)										
Measured Frequency Range (MHz)	Channel Frequency	Antenna Polarization	Emission Frequency	Measured Emission [E _{Meas}] (dBuV)	Antenna ACF [ACF] (dB)	Cable Loss [L _c] (dB)	Amplifier Gain [G _A] (dB)	Corrected Emission [E _{Corr}] (dBuV/m)	Limit (dBuV)	Margin (dB)
9kHz - 30MHz	2442.0	Front	ND	ND (1)	0.00	0.00	0.00 (3)	ND (2)	n/a	n/a
9kHz - 30MHz	2442.0	Side	ND	ND (1)	0.00	0.00	0.00 (3)	ND (2)	n/a	n/a
30-1000MHz	2442.0	Horizontal	755.7MHz	39.10	0.00	0.00	0.00 (3)	39.1 (2)	46.0	6.9
30-1000MHz	2442.0	Vertical	750.1MHz	39.69	0.00	0.00	0.00 (3)	39.7 (2)	46.0	6.3
1 - 3GHz	2442.0	Horizontal	ND	ND (1)	27.40	4.58	0.00 (3)	ND	54.0	n/a
1 - 3GHz	2442.0	Vertical	ND	ND (1)	27.40	4.58	0.00 (3)	ND	54.0	n/a
3-13GHz	2442.0	Horizontal	ND	ND (1)	36.76	9.86	0.00 (3)	ND	54.0	n/a
3-13GHz	2442.0	Vertical	ND	ND (1)	36.76	9.86	0.00 (3)	ND	54.0	n/a
13-18GHz	2442.0	Horizontal	ND	ND (1)	38.75	16.54	0.00 (3)	ND	54.0	n/a
13-18GHz	2442.0	Vertical	ND	ND (1)	38.75	16.54	0.00 (3)	ND	54.0	n/a
18-26GHz	2442.0	Horizontal	ND	ND (1)	43.50	21.86	26.00	ND	54.0	n/a
18-26GHz	2442.0	Vertical	ND	ND (1)	43.50	21.86	26.00	ND	54.0	n/a
Results:									Complies	

(1) No Emissions detected above ambient or within 20dB of the limit

(2) Antenna ACF, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{\text{Corr}} = E_{\text{Meas}} + \text{ACF} + L_c - G_A$$

19.0 RADIATED RX SPURIOUS EMISSIONS

Test Procedure

Normative Reference	FCC 47 CFR §15.109, ICES-003(6.2) ANSI C63.4:2014
----------------------------	--

Limits

47 CFR §15.109	(a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values: 30-88MHz: 40dBuV/m 88-216MHz: 43.5dBuV/m 216-960MHz: 46dBuV/m > 960MHz: 54dBuV/m
ICES-003(6.2.1)	6.2.1 - Radiated Emissions Limits Below 1 GHz Class B: ITE that does not meet the conditions for Class A operation shall comply with the Class B radiated limits set out in Table 5 determined at a distance of 3 metres. 30-88MHz: 40dBuV/m 88-216MHz: 43.5dBuV/m 216-960MHz: 46dBuV/m > 960MHz: 54dBuV/m

Test Setup	Appendix A Figure A.2
-------------------	-------------------------------------

Measurement Procedure

The DUT was set up as per ANSI C63.4:2014. Emissions were scanned between 30MHz and 1000MHz. The turntable was rotated 360 degrees and the antenna was elevated to 4m to optimize the measured emissions.

Table 19.1 – Summary of Radiated Rx Spurious Emissions (DTS)

See Appendix K Radiated Rx Spurious Measurement Plots

Measurement Results								
Frequency Range	Antenna Polarization	Bit Rate (Mbps)	Modulation	Power Setting ⁽¹⁾ (dBm)	Transmit Duty Cycle (%)	Measured Emission [E _{Meas}] (dBm)	Worst Case Limit ⁽⁴⁾ [A _L] (dBuV @ 3m)	Margin (dB)
9kHz - 30MHz	Front	n/a	n/a	n/a	n/a	ND	69.5	n/a
30-1000MHz	Horizontal					ND	40.0	n/a
1 - 3GHz						ND	54.0	n/a
3 - 13.6GHz						ND	54.0	n/a
13.6 - 18GHz						ND	54.0	n/a
9kHz - 30MHz	Side					ND	69.5	n/a
30-1000MHz	Vertical					ND	40.0	n/a
1 - 3GHz						ND	54.0	n/a
3 - 13.6GHz						ND	54.0	n/a
13.6 - 18GHz						ND	54.0	n/a
Results:							Complies	

Table 19.2 – Summary of Radiated Rx Spurious Emissions (DSS)

See Appendix K Radiated Rx Spurious Measurement Plots

Measurement Results								
Frequency Range	Antenna Polarization	Bit Rate (Mbps)	Modulation	Power Setting ⁽¹⁾ (dBm)	Transmit Duty Cycle (%)	Measured Emission [E _{Meas}] (dBm)	Worst Case Limit ⁽⁴⁾ [A _L] (dBuV @ 3m)	Margin (dB)
9kHz - 30MHz	Front	n/a	n/a	n/a	n/a	ND	69.5	n/a
30-1000MHz	Horizontal					ND	40.0	n/a
1 - 3GHz						ND	54.0	n/a
3 - 13.6GHz						ND	54.0	n/a
13.6 - 18GHz						ND	54.0	n/a
9kHz - 30MHz	Side					ND	69.5	n/a
30-1000MHz	Vertical					ND	40.0	n/a
1 - 3GHz						ND	54.0	n/a
3 - 13.6GHz						ND	54.0	n/a
13.6 - 18GHz						ND	54.0	n/a
Results:							Complies	

20.0 POWER LINE CONDUCTED EMISSIONS

Test Procedure

Normative Reference

FCC 47 CFR §15.107, ICES-003(6.1)
ANSI C63.4-2014

Limits

47 CFR §15.107

(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

0.15-0.5MHz: 66-56 dBuV Quasi Peak, 56-46 dBuV Average, Decreases with the logarithm of the frequency

0.5 - 5.0 MHz: 56 dBuV Quasi Peak, 46 dBuV Average

5.0 - 30.0 MHz: 60 dBuV Quasi Peak, 50 dBuV Average

ICES-003(6.1)

6.1 - AC Power Line Conducted Emissions Limits

Class B: ITE that does not meet the conditions for Class A operation shall comply with the Class B radiated limits set out in Table 2.

0.15-0.5MHz: 66-56 dBuV Quasi Peak, 56-46 dBuV Average, Decreases with the logarithm of the

0.5 - 5.0 MHz: 56 dBuV Quasi Peak, 46 dBuV Average


5.0 - 30.0 MHz: 60 dBuV Quasi Peak, 50 dBuV Average

Test Setup

Appendix A

Figure A.7

Plot 20.1 – Power Line Conducted Emissions, Line 1

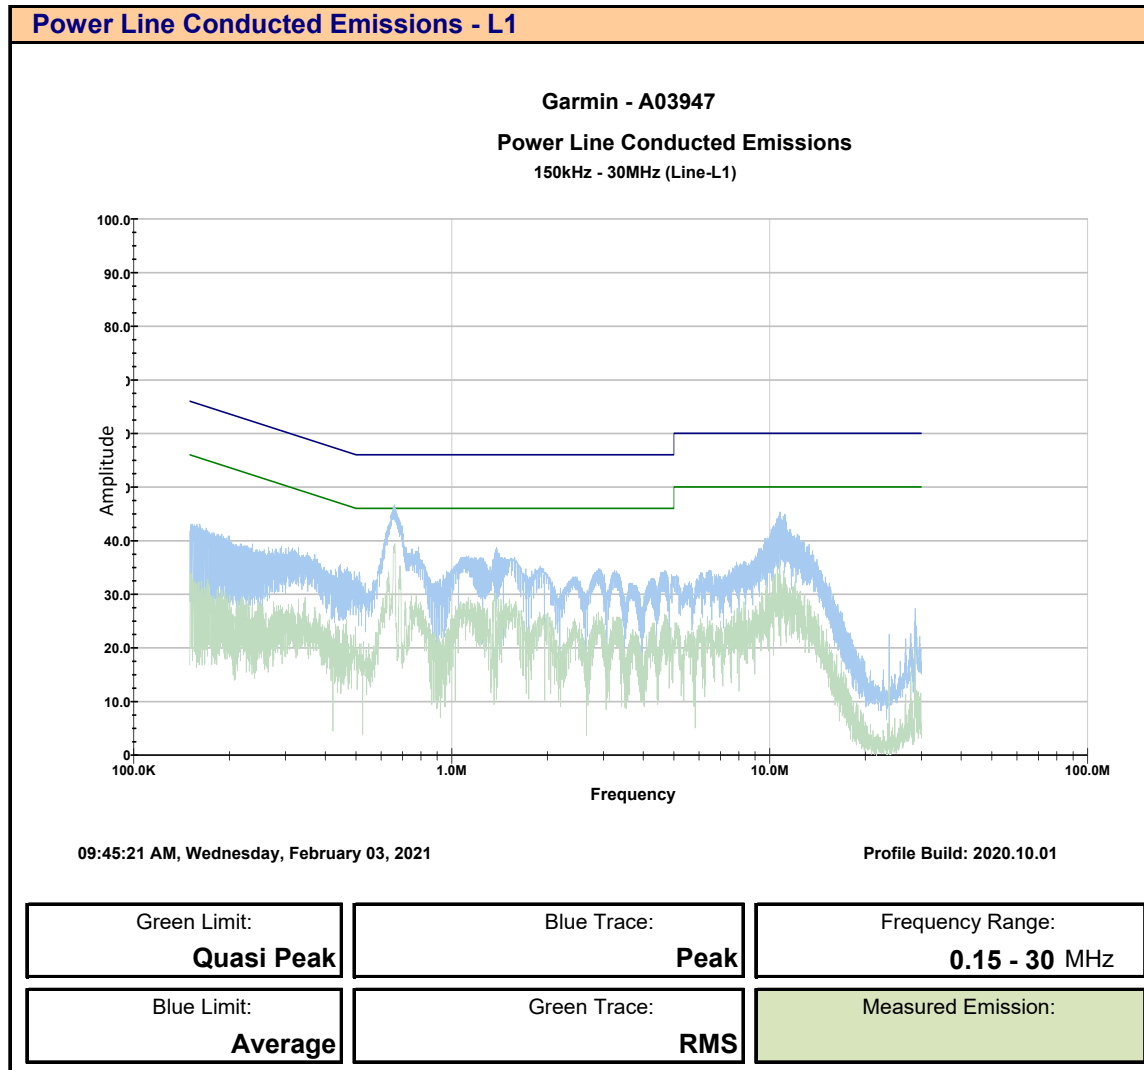

Plot 20.2 – Power Line Conducted Emissions, Line 2

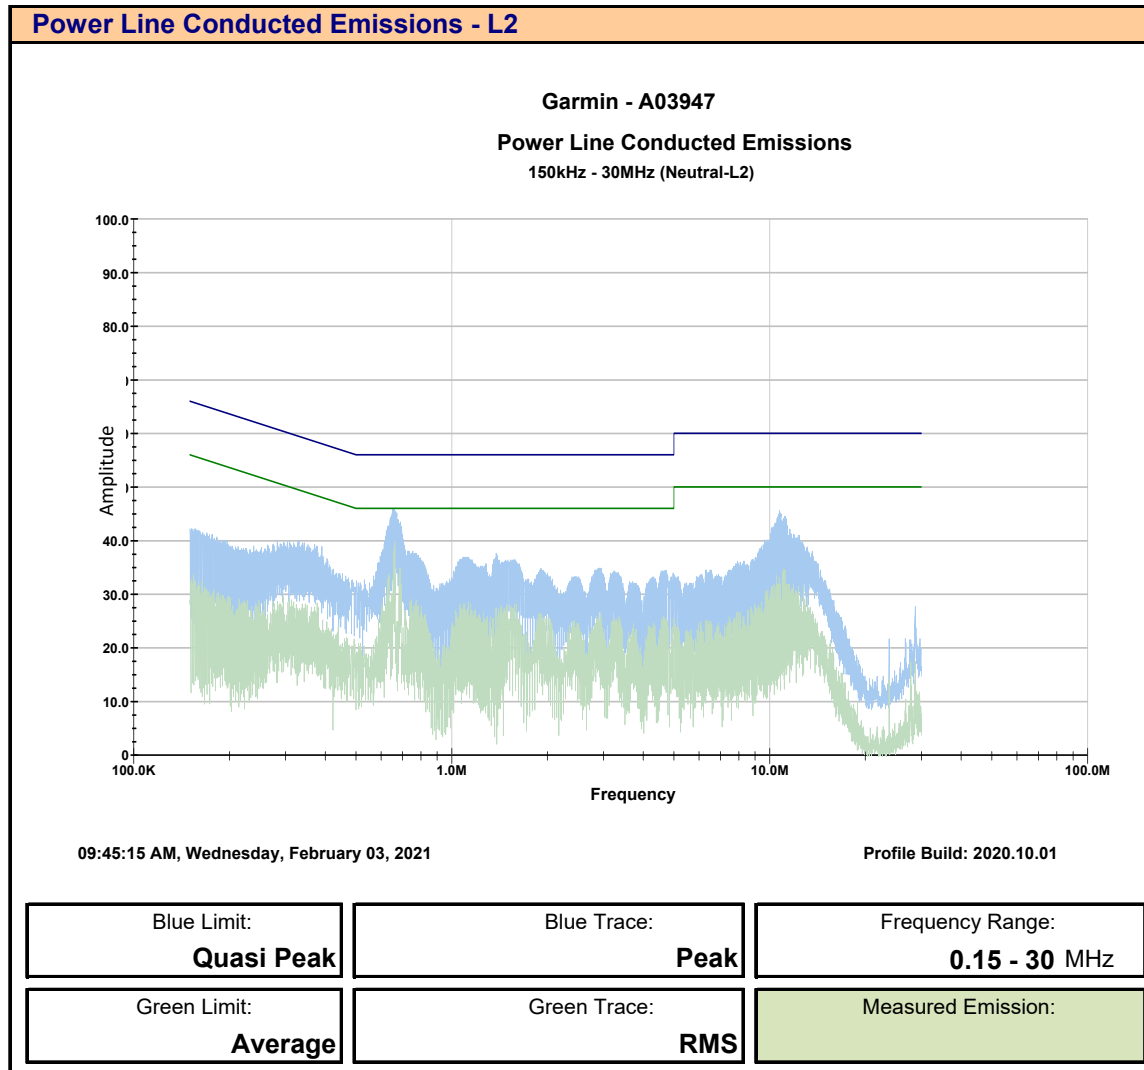


Table 20.1 – Summary of Power Line Conducted Emissions

Summary of Power Line Conducted Tx Emissions													
Measured Frequency Range (MHz)	Channel Frequency (MHz)	LISN Port	Emission Frequency [f _{Emm}]		Measured Emission [E _{Meas}] (dBuV)	Detector*	Insertion Loss [L _{LISN}] (dB)	Cable Loss [L _C] (dB)	Amplifier Gain [G _A] (dB)	Corrected Emission [E _{Corr}] (dBuV)		Limit (dBuV)	Margin (dB)
150kHz - 30MHz	2442.0	L1	672.30	kHz	46.40	Peak	0.40	0.25	0.00 (3)	47.1	(2)	56.0	9.0
			1.29	MHz	37.06		0.30	0.26		37.6	(2)	56.0	18.4
			10.88	MHz	43.53		0.30	0.26		44.1	(2)	60.0	15.9
			11.07	MHz	44.32		0.30	0.27		44.9	(2)	60.0	15.1
			637.40	kHz	34.67	Average	0.40	0.25		35.3	(2)	46.0	10.7
			665.10	MHz	39.99		0.30	0.26		40.6	(2)	46.0	5.5
			1.47	MHz	27.96		0.30	0.26		28.5	(2)	46.0	17.5
			1.60	MHz	28.05		0.30	0.27		28.6	(2)	46.0	17.4
			10.83	MHz	33.61		0.30	0.28		34.2	(2)	50.0	15.8
			11.25	MHz	33.11		0.30	0.28		33.7	(2)	50.0	16.3
Results:											Complies		

* In accordance with FCC §15.35 and ANSI C63.4, a Peak detector may be used to demonstrate compliance to Quasi-Peak limits provided the Resolution Bandwidth (RBW) is equal to or greater than Quasi-Peak bandwidth. The Detector RBW employed was ≥ 9kHz.

(2) LISN Insertion Loss, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{\text{Corr}} = E_{\text{Meas}} + L_{\text{LISN}} + L_{\text{c}} - G_{\text{A}}$$

Class B QP Limit = 56 - 20Log (f_{Emm}/500) for f_{Emm} = 150kHz to 500kHz

Class B Avg Limit = 46 - 20Log (f_{Emm}/500) for f_{Emm} = 150kHz to 500kHz

Class A QP Limit = 79dBuV for f_{Emm} = 150kHz to 500kHz

Class A Avg Limit = 66dBuV for f_{Emm} = 150kHz to 500kHz

Margin = Limit - E_{corr}

Table 20.1 – Summary of Power Line Conducted Emissions (Cont)

Summary of Power Line Conducted Tx Emissions												
Measured Frequency Range (MHz)	Channel Frequency (MHz)	LISN Port	Emission Frequency [f _{Emm}]	Measured Emission [E _{Meas}] (dBuV)	Detector*	Insertion Loss [L _{LISN}] (dB)	Cable Loss [L _C] (dB)	Amplifier Gain [G _A] (dB)	Corrected Emission [E _{Corr}] (dBuV)	Limit (dBuV)	Margin (dB)	
150kHz - 30MHz	2442.0	L2	666.10 kHz	46.50	Peak	0.30	0.25	0.00 (3)	47.1 (2)	56.0	9.0	
			1.37 MHz	37.06		0.60	0.26		37.9 (2)	56.0	18.1	
			10.97 MHz	44.63		0.30	0.26		45.2 (2)	60.0	14.8	
			664.10 kHz	39.89	Average	0.30	0.25		40.4 (2)	46.0	5.6	
			1.14 MHz	27.25		0.60	0.26		28.1 (2)	46.0	17.9	
			10.85 MHz	34.43		0.30	0.26		35.0 (2)	50.0	15.0	
			11.01 MHz	34.02		0.30	0.27		34.6 (2)	50.0	15.4	
Results:									Complies			

* In accordance with FCC §15.35 and ANSI C63.4, a Peak detector may be used to demonstrate compliance to Quasi-Peak limits provided the Resolution Bandwidth (RBW) is equal to or greater than Quasi-Peak bandwidth. The Detector RBW employed was ≥ 9kHz.

(2) LISN Insertion Loss, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{Corr} = E_{Meas} + L_{LISN} + L_C - G_A$$

Class B QP Limit = 56 - 20Log (f_{Emm}/500) for f_{Emm} = 150kHz to 500kHz

Class B Avg Limit = 46 - 20Log (f_{Emm}/500) for f_{Emm} = 150kHz to 500kHz

Class A QP Limit = 79dBuV for f_{Emm} = 150kHz to 500kHz

Class A Avg Limit = 66dBuV for f_{Emm} = 150kHz to 500kHz

Margin = Limit - E_{corr}

APPENDIX A – TEST SETUP DRAWINGS

Table A.1 – Conducted Measurement Setup

Equipment List				
Asset Number	Manufacturer	Model Number	Serial Number	Description
00241	R&S	FSU40	100500	Spectrum Analyzer
00263	Koaxis	KP10-1.00M-TD	263	1m Armoured Cable

Figure A.1 – Test Setup – Conducted Measurements

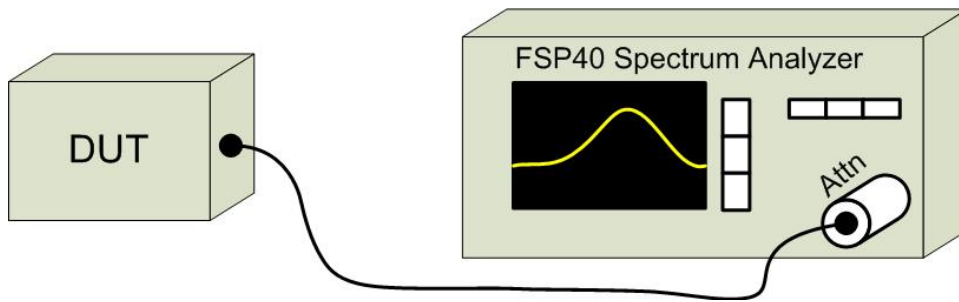


Table A.2 – Radiated Emissions Measurement Equipment

Equipment List				
Asset Number	Manufacturer	Model Number	Serial Number	Description
00050	Chase	CBL-6111A	1607	Bilog Antenna
00034	ETS	3115	6267	Double Ridged Guide Horn
00035	ETS	3115	6276	Double Ridged Guide Horn
00085	EMCO	6502	9203-2724	Loop Antenna
00161	Waveline Inc.	889		Standard Gain Horn 18-26GHz
00162	Waveline Inc.	889		Standard Gain Horn 18-26GHz
00165	Waveline Inc.	801-KF		Waveguide Adapter 18-26GHz
00166	Waveline Inc.	801-KF		Waveguide Adapter 18-26GHz
00333	HP	85685A	3010A01095	RF Preselector
00049	HP	85650A	2043A00162	Quasi-peak Adapter
00051	HP	8566B	2747A05510	Spectrum Analyzer
00241	R&S	FSU40	100500	Spectrum Analyzer
00265	Miteq	JS32-00104000-58-5P	1939850	Microwave L/N Amplifier
00071	EMCO	2090	9912-1484	Multi-Device Controller
00072	EMCO	2075	0001-2277	Mini-mast
00073	EMCO	2080	0002-1002	Turn Table
00263	Koaxis	KP10-1.00M-TD	263	1m Armoured Cable
00263B	Koaxis	KP10-1.00M-TD	263B	1m Armoured Cable
00275	TMS	LMR400	n/a	25m Cable
00278	TILE	34G3	n/a	TILE Test Software

Figure A.2 – Test Setup Radiated Measurements 9kHzMHz – 30MHz

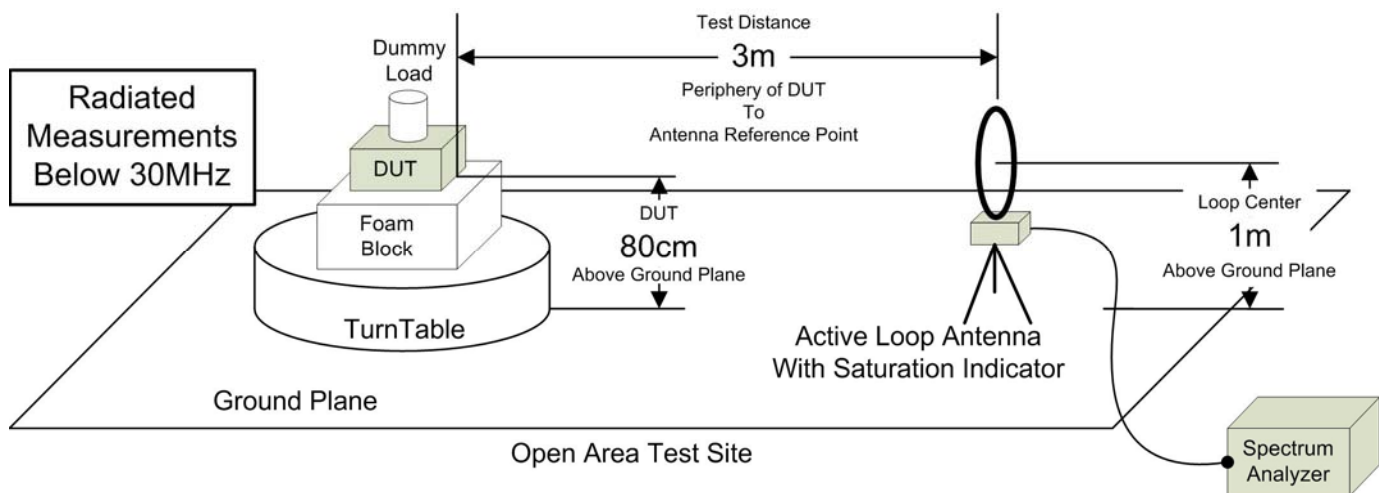


Figure A.3 – Test Setup Radiated Measurements 30MHz – 1GHz

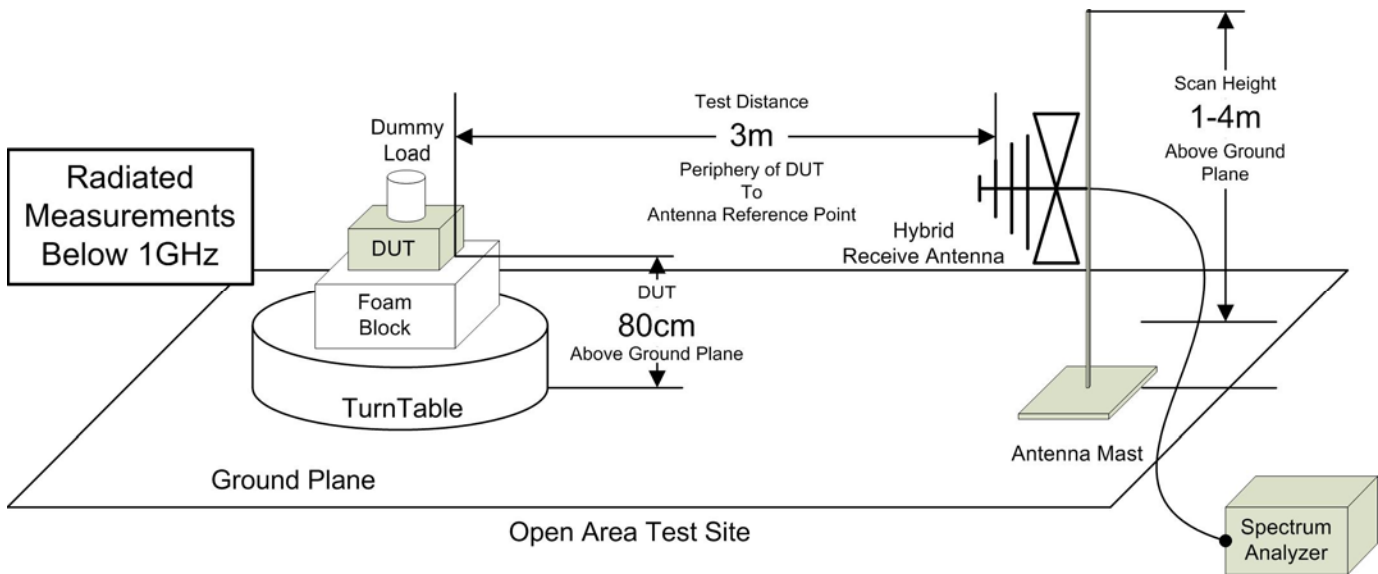


Figure A.4 – Test Setup Radiated Measurements 30MHz – 1GHz, Signal Substitution

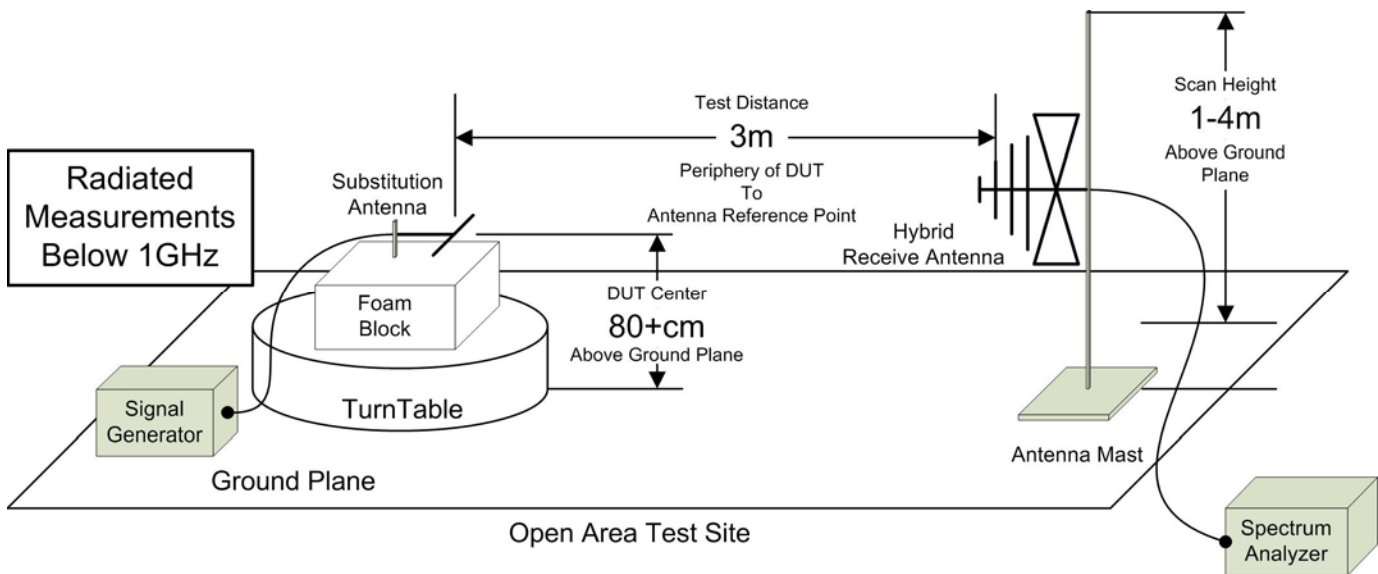


Figure A.5 – Test Setup Radiated Measurements 1 – 18GHz,

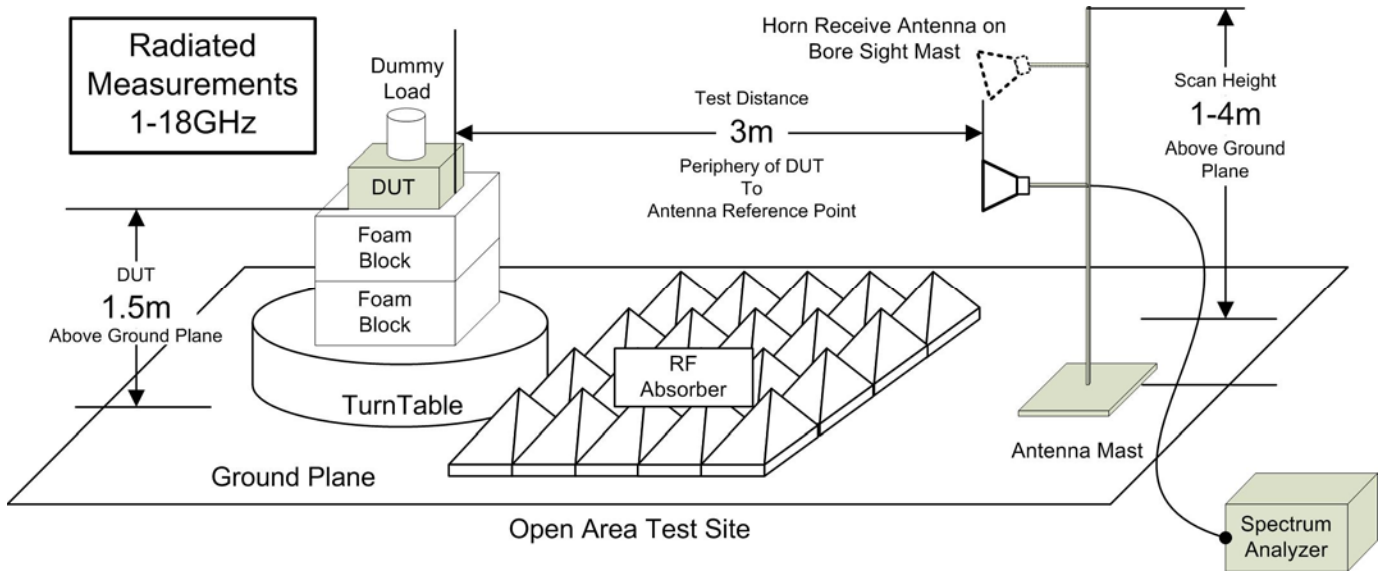


Figure A.6 – Test Setup Radiated Measurements 18 – 26.5GHz,

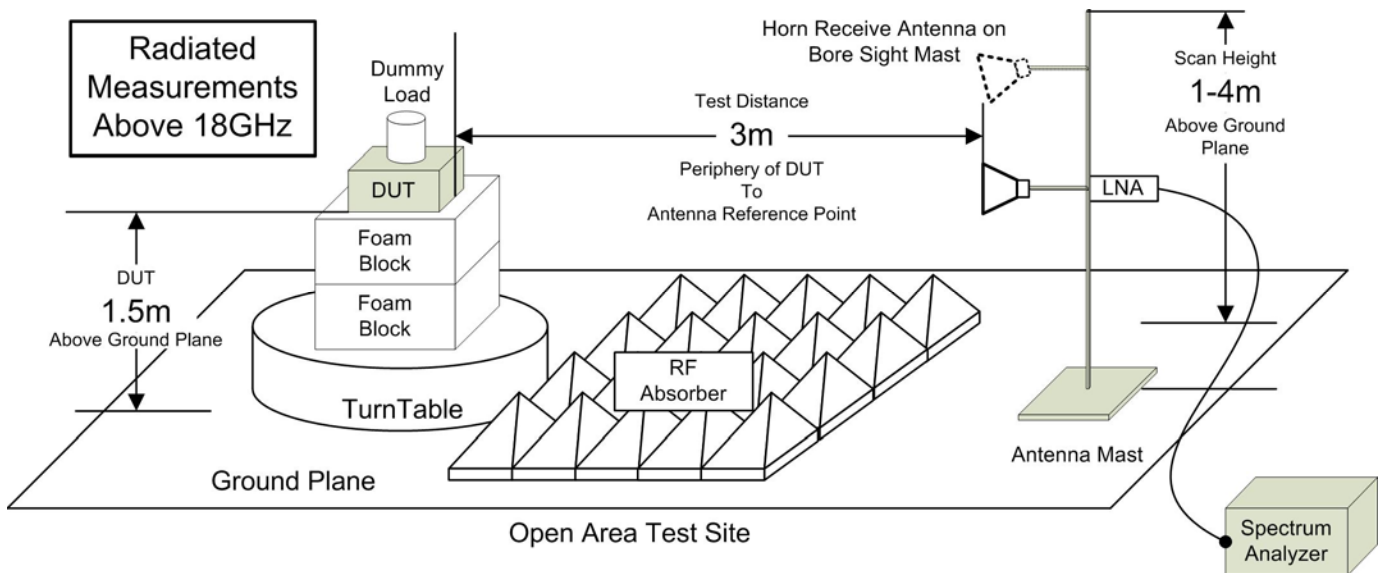


Table A.3 – Setup – Conducted Emissions Equipment List

Equipment List				
Asset Number	Manufacturer	Model Number	Serial Number	Description
00333	HP	85685A	3010A01095	RF Preselector
00049	HP	85650A	2043A00162	Quasi-peak Adapter
00051	HP	8566B	2747A05510	Spectrum Analyzer
00223	HP	8901A	3749A07154	Modulation Analyzer
00257	Com-Power	LI-215A	191934	LISN
00276	TMS	LMR400	n/a	4m Cable

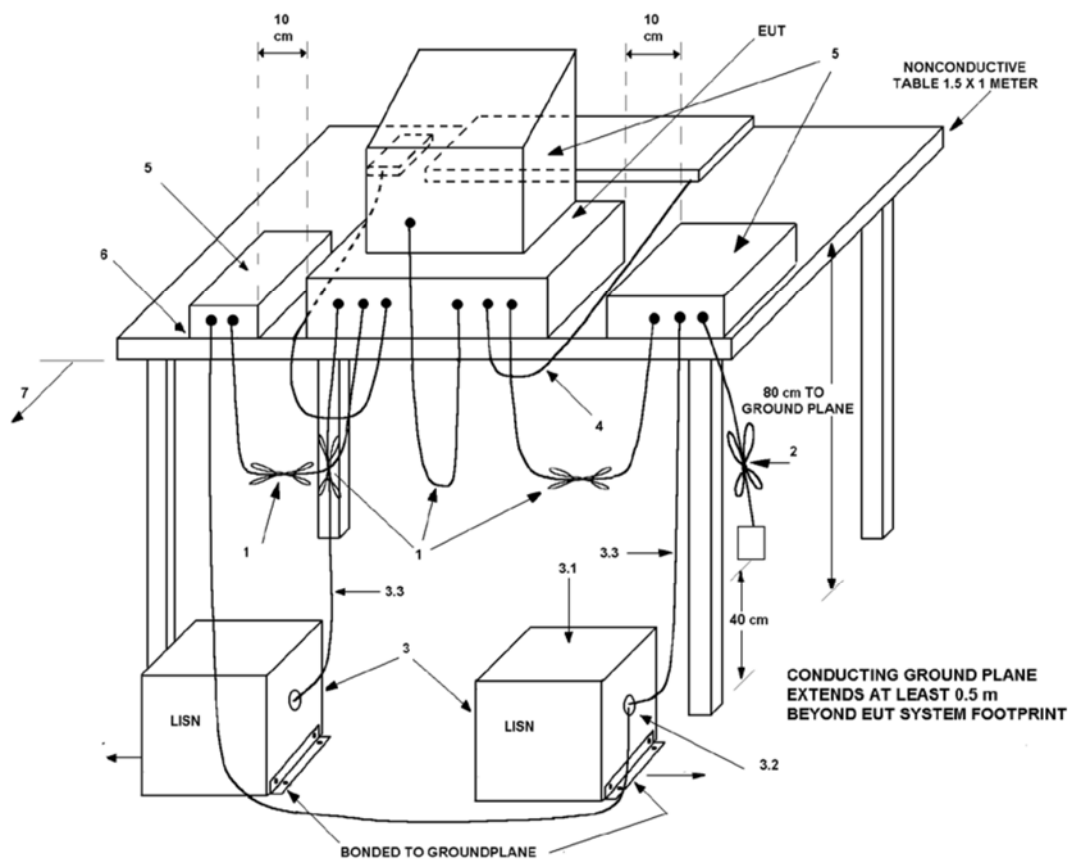


Figure A.7 – Test Setup Conducted Emissions Measurements

APPENDIX B – EQUIPMENT LIST AND CALIBRATION

Equipment List							
Asset Number	Manufacturer	Model Number	Serial Number	Description	Last Calibrated	Calibration Interval	Calibration Due
00050	Chase	CBL-6111A	1607	Bilog Antenna	3 Jan 2019	Triennial	3 Jan 2022
00034	ETS	3115	6267	Double Ridged Guide Horn	26 Nov 2018	Triennial	26 Nov 2021
00035	ETS	3115	6276	Double Ridged Guide Horn	22 Mar 2019	Triennial	21 Mar 2022
00085	EMCO	6502	9203-2724	Loop Antenna	11 Jun 2019	Triennial	11 Jun 2022
00161	Waveline Inc.	889		Standard Gain Horn 18-26GHz	NCR	n/a	NCR
00162	Waveline Inc.	889		Standard Gain Horn 18-26GHz	NCR	n/a	NCR
00165	Waveline Inc.	801-KF		Waveguide Adapter 18-26GHz	NCR	n/a	NCR
00166	Waveline Inc.	801-KF		Waveguide Adapter 18-26GHz	NCR	n/a	NCR
00333	HP	85685A	3010A01095	RF Preselector	23 Jun 2020	Triennial	30 Jun 2023
00049	HP	85650A	2043A00162	Quasi-peak Adapter	23 Jun 2020	Triennial	23 Jun 2023
00051	HP	8566B	2747A05510	Spectrum Analyzer	23 Jun 2020	Triennial	23 Jun 2023
00241	R&S	FSU40	100500	Spectrum Analyzer	15 May 2018	Triennial	15 May 2021
00005	HP	8648D	3847A00611	Signal Generator	23 Jun 2020	Triennial	23 Jun 2023
00006	R&S	SMR20	100104	Signal Generator	29 May 2017	Triennial	29 May 2020
00257	Com-Power	LI-215A	191934	LISN	5 Jan 2018	Triennial	5 Mar 2021
00071	EMCO	2090	9912-1484	Multi-Device Controller	n/a	n/a	n/a
00072	EMCO	2075	0001-2277	Mini-mast	n/a	n/a	n/a
00073	EMCO	2080	0002-1002	Turn Table	n/a	n/a	n/a
00081	ESPEC	ECT-2	0510154-B	Environmental Chamber	NCR	n/a	CNR
00234	VWR	61161-378	140320430	Temp/Humidity Meter	New	Triennial	New
00263	Koaxis	KP10-1.00M-TD	263	1m Armoured Cable	COU	n/a	COU
00263B	Koaxis	KP10-1.00M-TD	263B	1m Armoured Cable	COU	n/a	COU
00275	TMS	LMR400	n/a	25m Cable	COU	n/a	COU
00278	TILE	34G3	n/a	TILE Test Software	NCR	n/a	NCR

NCR: No Calibration Required

COU: Calibrate On Use

APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY

CISPR 16-4 Measurement Uncertainty (U_{LAB})

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence interval using a coverage factor of $k=2$

30MHz - 200MHz

$$U_{LAB} = 5.14\text{dB} \quad U_{CISPR} = 6.3\text{dB}$$

200MHz - 1000MHz

$$U_{LAB} = 5.90\text{dB} \quad U_{CISPR} = 6.3\text{dB}$$

1GHz - 6GHz

$$U_{LAB} = 4.80\text{dB} \quad U_{CISPR} = 5.2\text{dB}$$

6GHz - 18GHz

$$U_{LAB} = 5.1\text{dB} \quad U_{CISPR} = 5.5\text{dB}$$

If the calculated uncertainty U_{lab} is **less** than U_{CISPR} then:

- | | |
|---|---|
| 1 | Compliance is deemed to occur if NO measured disturbance exceeds the disturbance limit |
| 2 | Non-Compliance is deemed to occur if ANY measured disturbance EXCEEDS the disturbance limit |

If the calculated uncertainty U_{lab} is **greater** than U_{CISPR} then:

- | | |
|---|--|
| 3 | Compliance is deemed to occur if NO measured disturbance, increased by ($U_{lab} - U_{CISPR}$), exceeds the disturbance limit |
| 4 | Non-Compliance is deemed to occur if ANY measured disturbance, increased by ($U_{lab} - U_{CISPR}$), EXCEEDS the disturbance limit |

END OF REPORT

APPENDIX D – OCCUPIED BANDWIDTH MEASUREMENT PLOTS

APPENDIX E – ANTENNA PORT CONDUCTED POWER MEASUREMENT PLOTS

APPENDIX F – POWER SPECTRAL DENSITY MEASUREMENT PLOTS

APPENDIX G – CONDUCTED SPURIOUS EMISSIONS, BAND EDGE MEASUREMENT PLOTS

APPENDIX H – RADIATED TX SPURIOUS EMISSIONS, RESTRICTED BAND MEASUREMENT PLOTS

APPENDIX I – RADIATED RX SPURIOUS EMISSIONS MEASUREMENT PLOTS