

SPECIFICATION

Shenzhen Strongpower Communication Co., Ltd

ShenzhenStrongpowerCommunicationCo., Ltd.

330S Bluetooth Aatenna

SPECIFICATION

Customer	TRANSSION	Frequency Band	2402MHz-2480MHz
Model	330S		
Serial No		Color	
RF designer	Zou Lijun	Structural engineer	Zhou Jun
Technical director	Fu Yicheng	Date	2024/03/9

Confirm by customer:

INDEXES

1. The equipment of Active&Passive test.....	3-4
2. Passive test..	5-6
2.1 S Parameters..	5
2.2 Passive Efficiency and Gain	5
2.3 Passive pattern.....	6
3.Active test..	6-8
3.1 TRP&TIS test.....	6
3.2 Active pattern.....	7-8
4.Matching Circuit.....	9

Confidentiality requirements


Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.

1. The Equipment of Active&Passive Test


chamber




Satimo

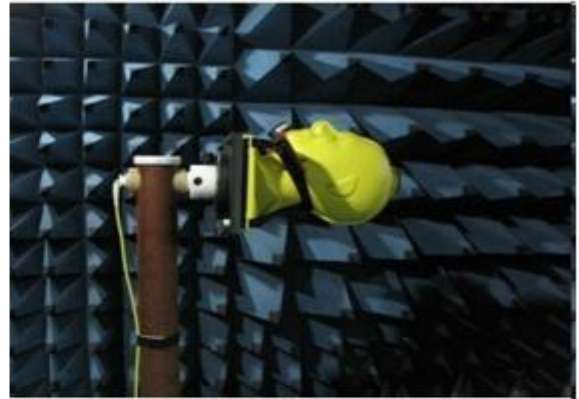

Airlink

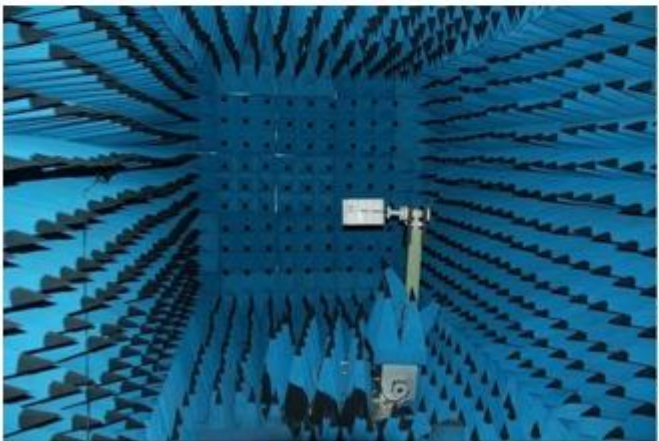

Guang Ping

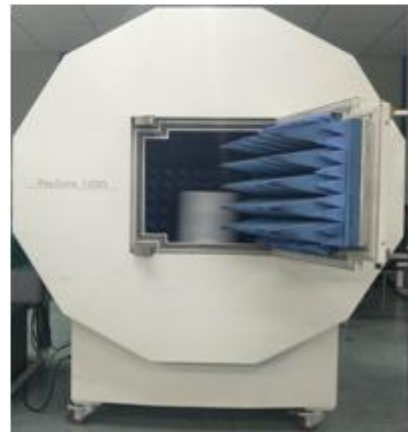

GTS


Confidentiality requirements

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.

equipment



R&S
CMW500

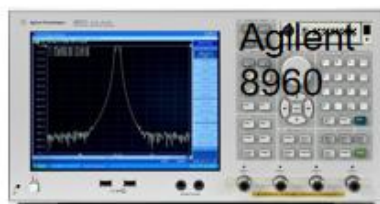

Agilent
8960



Anritsu
MT8820C



Agilent
N4010A



Agilent
E4438C
Signal
Generator



Agilent
E5071C




Confidentiality requirements

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.

2. Passive Test

2.1 S Parameters, VSWR, Return loss, Smith Chart

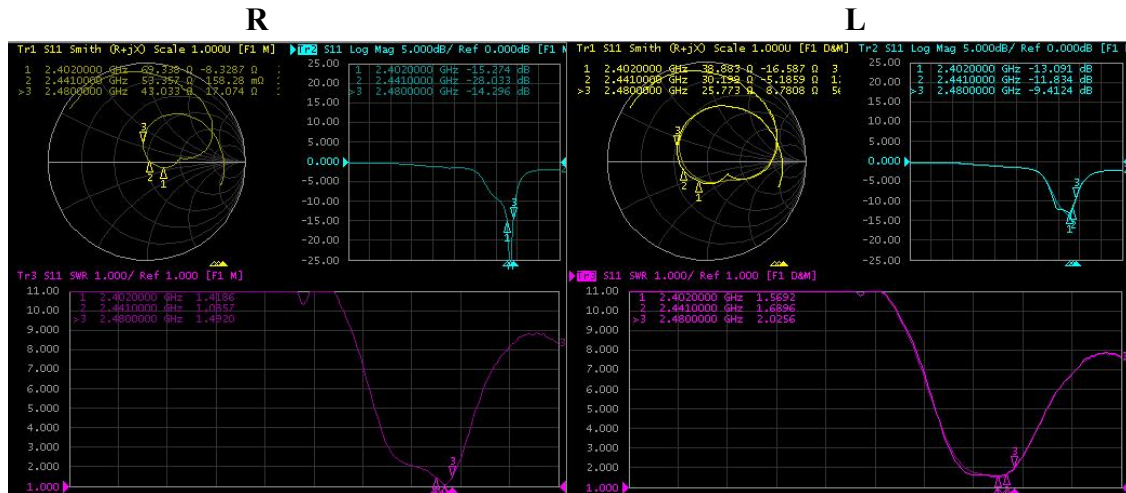

2.2 Passive Efficiency and Gain

R

Frequency (MHz)	Efficiency%	Efficiency (dB)	Gain (dBi)
2400	45.81%	-3.39	0.99
2410	45.94%	-3.38	1.03
2420	44.78%	-3.49	0.95
2430	43.58%	-3.61	0.85
2440	41.60%	-3.81	0.67
2450	40.29%	-3.95	0.58
2460	38.41%	-4.16	0.42
2470	35.39%	-4.51	0.09
2480	32.88%	-4.83	-0.18

L

Frequency (MHz)	Efficiency %	Efficiency (dB)	Gain (dBi)
2400	33.81%	-4.71	-0.18
2410	33.23%	-4.78	-0.22
2420	31.51%	-5.02	-0.42
2430	30.18%	-5.20	-0.58
2440	28.46%	-5.46	-0.77
2450	26.98%	-5.69	-0.91

Confidentiality requirements

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.


Confidential Information

2460	25.26%	-5.98	-1.09
2470	23.19%	-6.35	-1.39
2480	21.44%	-6.69	-1.63

2.3 Passive pattern

R

L

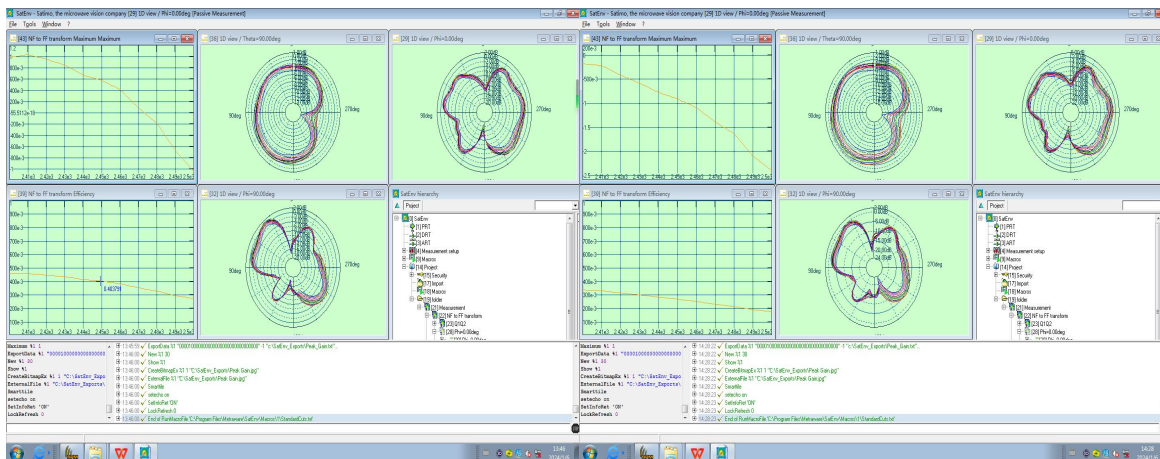

Theta=90

Phi=0°

Phi=90°

3.Active test

3.1 TRP&TIS

FS-R

信道 CH	TRP (dBm)	TIS (dBm)
0	7.06	-89.19
39	6.6	-88.86
78	6.72	-88.96

HR

信道 CH	TRP (dBm)	TIS (dBm)
0	-2.14	-81.68
39	-2.43	-81.37
78	-2.87	-80.79

FS-L

信道	TRP	TIS
----	-----	-----

Confidentiality requirements

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.

Confidential Information


CH	(dBm)	(dBm)
0	6.9	-89.79
39	7.25	-88.74
78	7.64	-88.38

HL


信道 CH	TRP (dBm)	TIS (dBm)
0	-2.55	-82.48
39	-2.36	-81.97
78	-2.04	-81.66

3.2 Active pattern Left

FS-L

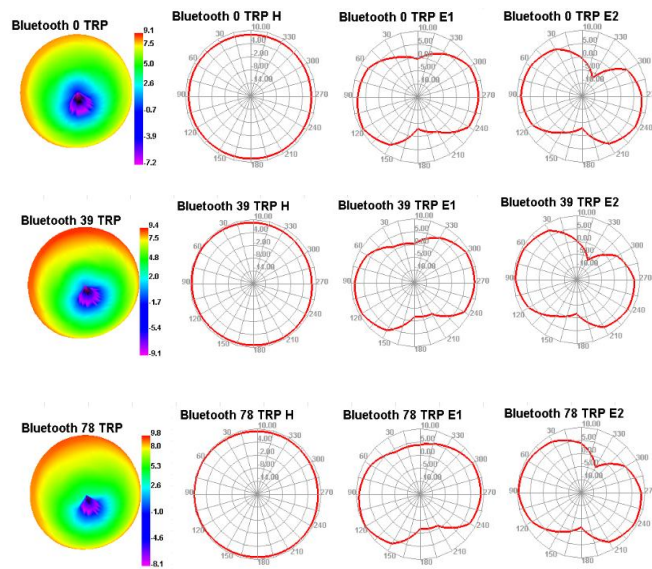


HL

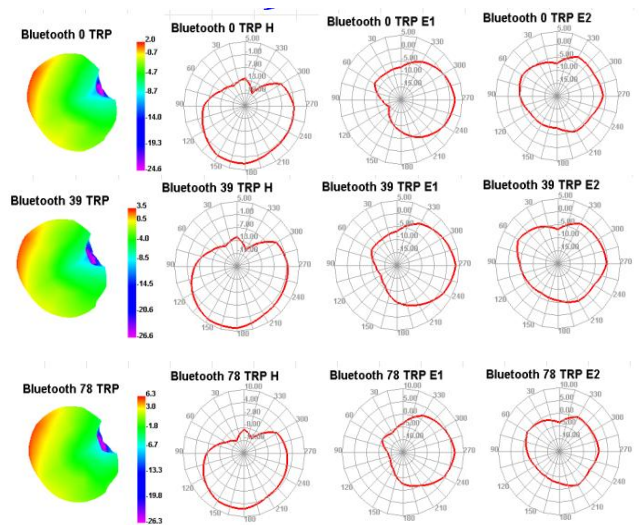


Confidentiality requirements

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written TRP consent of Strongpower Communication Technology Co., Ltd.

FS-R

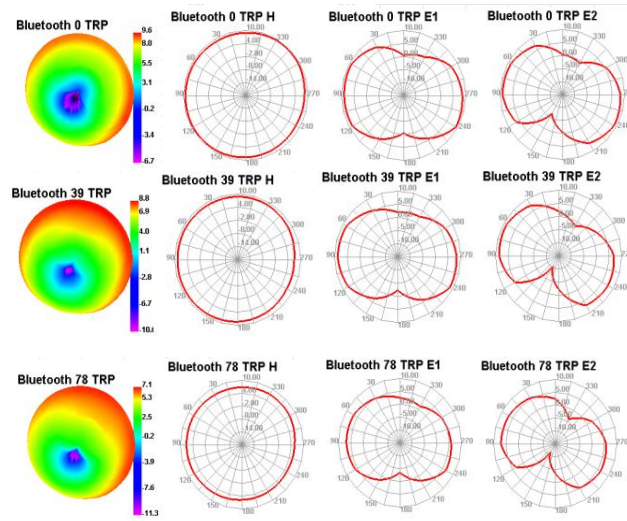

HR

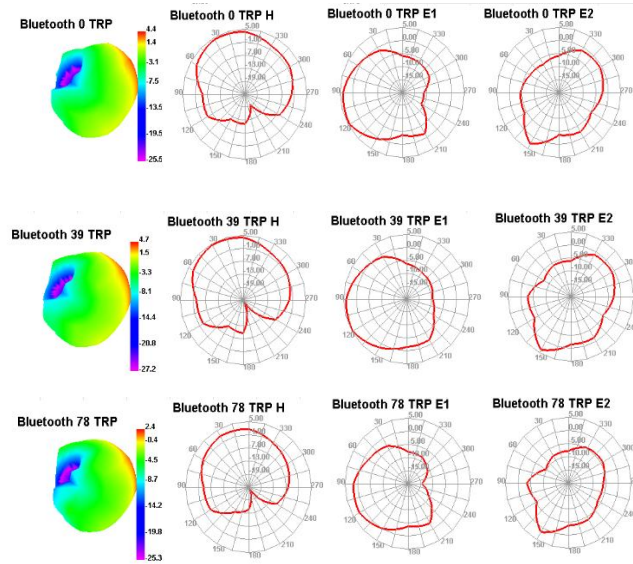


Confidentiality requirements

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.

4. Matching Circuit

Left&Right are the same

Element	E1	E2	E3
Value	NC	0 Ω	NC

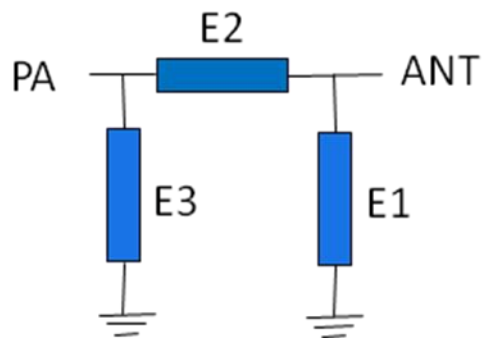

Confidentiality requirements

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.