



FCC TEST REPORT

Application No: ZR/2021/80006

Applicant: Fibocom Wireless Inc.

Address of Applicant: 1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China

Manufacturer: Fibocom Wireless Inc.

Address of Manufacturer: 1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China

EUT Description: 5G module

Model No.: FG360-NA

Trade Mark: Fibocom

FCC ID: ZMOFG360NA03

Standards: 47 CFR Part 2
47 CFR Part 24
47 CFR Part 27

Test Method: FCC KDB 971168 D01 Power Meas License Digital Systems V03r01 C63.26 (2015)

Date of Receipt: 2021/5/7

Date of Test: 2021/5/7 to 2021/8/10

Date of Issue: 2021/8/10

Test Result:	PASS *
---------------------	---------------

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derek Yang

Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2021/8/10		Original

Authorized for issue by:		
Prepared By		 (Dee Zheng) / Engineer
Checked By		 (Jim Huang) / Reviewer



Content

1	VERSION	2
2	TEST SUMMARY	5
2.1	NR BAND N41(ENDC DC_66A-N41A/DC_41A-N41A/DC_2A-N41A)/CA_N25A-N41A/ CA_N41A-N66A/ CA_N41A-N71A	5
2.2	NR BAND N66(ENDC DC_12A-N66A)/CA_N41A-N66A/CA_N66A-N71A	6
2.3	NR BAND N25(ENDC DC_12A-N25A)/CA_N25A-N71A/CA_N25A-N41A	6
2.4	NR BAND N71(ENDC DC_2A-N71A/DC_66A-N71A)/CA_N41A-N71A/CA_N25A-N71A/CA_N66A-N71A) 7	
3	GENERAL INFORMATION	9
3.1	CLIENT INFORMATION	9
3.2	TEST LOCATION	9
3.3	TEST FACILITY	10
3.4	GENERAL DESCRIPTION OF EUT	11
3.5	TEST MODE	11
3.6	TEST ENVIRONMENT	11
3.7	TECHNICAL SPECIFICATION	11
3.8	TEST FREQUENCIES	14
3.8.1	Reference test frequencies for NR operating band n25	14
3.8.2	Reference test frequencies for NR operating band n41	16
3.8.3	Reference test frequencies for NR operating band n66	18
3.8.4	Reference test frequencies for NR operating band n71	20
4	DESCRIPTION OF TESTS	22
4.1	CONDUCTED OUTPUT POWER	22
4.2	EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER	22
4.3	OCCUPIED BANDWIDTH	22
4.4	BAND EDGE AT ANTENNA TERMINALS	23
4.5	SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	24
4.6	PEAK-AVERAGE RATIO	25
4.7	FIELD STRENGTH OF SPURIOUS RADIATION	26
4.8	FREQUENCY STABILITY / TEMPERATURE VARIATION	28



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4.9	TEST SETUPS	29
4.9.1	Test Setup 1	29
4.9.2	Test Setup 2	29
4.9.3	Test Setup 3	30
4.9.4	Test Setup 4	30
4.10	TEST CONDITIONS	31
5	MAIN TEST INSTRUMENTS	33
6	MEASUREMENT UNCERTAINTY	35
7	APPENDIXES	36



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Center - CCC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

2.1 NR Band N41(ENDC DC_66A-N41A/DC_41A-N41A/DC_2A-N41A)/CA_N25A-N41A/ CA_N41A-N66A/ CA_N41A-N71A

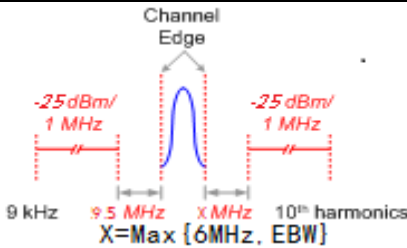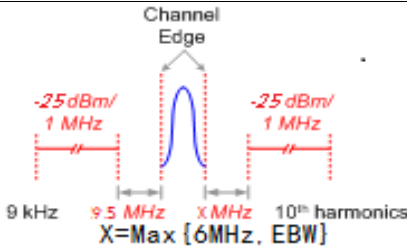Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)	EIRP $\leq$ 2W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§27.50(a)	$\leq$ 13 dB	Section 2 of Appendix B	Pass	A
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)		Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(m)		Section 7 of Appendix B	Pass	B
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B	Pass	A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (FCC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057
中国·深圳·科技园中区M-10栋一号厂房

t (86-755) 26012053 f (86-755) 26710594
t (86-755) 26012053 f (86-755) 26710594

www.sgs.com
sgs.china@sgs.com



Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".					

2.2 NR Band N66(ENDC DC_12A-N66A)/CA_N41A-N66A/CA_N66A-N71A

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)	$EIRP \leq 1\text{ W}$	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§2.1046, §27.50(d)	Limit $\leq 13\text{ dB}$	Section 2 of Appendix B	Pass	A
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.53(h)	$\leq -13\text{ dBm}/1\%*EBW$, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	B
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	$\leq -13\text{ dBm}/1\text{ MHz}$, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	$\leq -13\text{ dBm}/1\text{ MHz}$.	Section 7 of Appendix B	Pass	B
Frequency Stability	§2.1055, §27.54	$\leq \pm 2.5\text{ ppm}$.	Section 8 of Appendix B	Pass	A

Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

2.3 NR Band N25(ENDC DC_12A-N25A)/CA_N25A-N71A/CA_N25A-N41A

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	$EIRP \leq 2\text{ W}$	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§2.1046, §24.232	Limit $\leq 13\text{ dB}$	Section 2 of Appendix B	Pass	A
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §24.238	$\leq -13\text{ dBm}/1\%*EBW$, in 1 MHz bands immediately outside and	Section 5 of Appendix B	Pass	B



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



		adjacent to the frequency block.			
Spurious Emission at Antenna Terminals	§2.1051, §24.238	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §24.238	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass	B
Frequency Stability	§2.1055, §24.235	$\leq \pm 2.5$ ppm.	Section 8 of Appendix B	Pass	A
Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".					

2.4 NR Band N71(ENDC DC_2A-N71A/DC_66A-N71A)/CA_N41A-N71A/CA_N25A-N71A/CA_N66A-N71A)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(c)	EIRP ≤ 3 W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§2.1046,	Limit ≤ 13 dB	Section 2 of Appendix B	Pass	A
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	B
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass	B
Frequency Stability	§2.1055, §27.54	within the authorized bands of operation.	Section 8 of Appendix B	Pass	A
Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".					

Remark1:

Because the product is a multi-TX antenna, the antenna with the max conducted power is selected for conducted testing. EIRP and RSE require all antennas to be tested.

Remark2: All test were performed by Lab A and B.

Lab A SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Lab B SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.

Remark3: According to the customer's statement of difference, the power and RSE intermediate channel will be re-tested, and the rest of the data will use SAR/2021/4000902



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (2010) China CCC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3 General Information

3.1 Client Information

Applicant:	Fibocom Wireless Inc.
Address of Applicant:	1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China
Manufacturer:	Fibocom Wireless Inc.
Address of Manufacturer:	1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China

3.2 Test Location

Lab A:

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057
Test engineer:	Dee Zheng, Swing Hu, Habit Zeng

Lab B:

Company:	SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.
Address:	1/F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, Xi'an, Shaanxi China
Post code:	710086
Test engineer:	Leah Chen, Ken Liu, Andy Yao



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Testing Center) - CSTC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

• **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

Lab B:

A2LA (Certificate No. 4854.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

FCC-Designation Number: CN1271.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3.4 General Description of EUT

EUT Description::	5G module
Model No.:	FG360-NA
Trade Mark:	Fibocom
Hardware Version:	V1.0
Software Version:	81103.7000.30.03.01.17.1
Sample Type:	☐ Portable Device, ☒ Module
Antenna Type:	☒ External, ☐ Integrated
Antenna Gain:	N25: 1.93dBi (Ant0); 1.93dBi (Ant1); 1.93dBi (Ant2); 1.93dBi (Ant3); 1.93dBi (Ant4); N41: 2.45dBi (Ant0); 2.45dBi (Ant1); 2.45dBi (Ant2); 2.45dBi (Ant3); 2.45dBi (Ant4); N66: 3.76dBi (Ant0); 3.76dBi (Ant1); 3.76dBi (Ant2); 3.76dBi (Ant3); 3.76dBi (Ant4); N71: 1.39dBi (Ant0); 1.39dBi (Ant1); 1.39dBi (Ant2); 1.39dBi (Ant3); 1.39dBi (Ant4);

Remark: Conduction Power & EIRP of all antennas are tested, and only the worst data is presented

3.5 Test Mode

Test Mode	Test Modes Description
NR/TM1	NR system, DFT-s-QPSK modulation
NR/TM2	NR system, DFT-s-16QAM modulation
NR/TM3	NR system, DFT-s-64QAM modulation
NR/TM4	NR system, DFT-s-256QAM modulation
NR/TM5	NR system, CP-QPSK modulation
NR/TM6	NR system, CP-16QAM modulation
NR/TM7	NR system, CP-64QAM modulation
NR/TM8	NR system, CP-256QAM modulation

Remark: The test mode(s) are selected according to relevant radio technology specifications.

3.6 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	49%	
Atmospheric Pressure:	102.46 KPa	
Temperature	NT	25 °C
Voltage:	LV	3.3V
	NV	3.8V
	HV	4.4V

Remark: LV= lower extreme test voltage; NV= nominal voltage
HV= upper extreme test voltage; NT= normal temperature

3.7 Technical Specification



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (CMAA) Calibration Laboratory

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Characteristics	Description		
Radio System Type	☒ SA ☒ NSA		
UL MIMO	NR Band N41		
Supported Frequency Range	Band	TX	RX
	NR Band N25	1850 to 1915MHz	1930 to 1995 MHz
	NR Band N41	2496 to 2690 MHz	2496 to 2690 MHz
	NR Band N66	1710 to 1780 MHz	2110 to 2180 MHz
	NR Band N71	663 to 698 MHz	617 to 652 MHz
Supported Channel Bandwidth	NR Band N25	SCK 15k: ☒ 5 MHz; ☒ 10 MHz; ☒ 15 MHz; ☒ 20 MHz; ☒ 25 MHz; ☒ 30 MHz; ☒ 40 MHz;	
		SCK 30k: ☒ 10 MHz; ☒ 15 MHz; ☒ 20 MHz; ☒ 25 MHz; ☒ 30 MHz; ☒ 40 MHz;	
	NR Band N41	SCK 15k: ☒ 10 MHz; ☒ 15 MHz; ☒ 20 MHz; ☒ 30 MHz; ☒ 40 MHz; ☒ 50 MHz;	
		SCK 30k: ☒ 10 MHz; ☒ 15 MHz; ☒ 20 MHz; ☒ 30 MHz; ☒ 40 MHz; ☒ 50 MHz; ☒ 60 MHz; ☒ 70 MHz; ☒ 80 MHz; ☒ 90 MHz; ☒ 100 MHz	
	NR Band N66	SCK 15k: ☒ 5 MHz; ☒ 10 MHz; ☒ 15 MHz; ☒ 20 MHz; ☒ 25 MHz; ☒ 30 MHz; ☒ 40 MHz	
		SCK 30k: ☒ 10 MHz; ☒ 15 MHz; ☒ 20 MHz; ☒ 25 MHz; ☒ 30 MHz; ☒ 40 MHz	
	NR Band N71	SCK 15k: ☒ 5 MHz; ☒ 10 MHz; ☒ 15 MHz; ☒ 20 MHz;	
		SCK 30k: ☒ 10 MHz; ☒ 15 MHz; ☒ 20 MHz;	
	NR Band N25	SCK 15k: 4M47G7D;4M46W7D; 8M91G7D;8M98W7D; 13M4G7D;14M2W7D 17M9G7D;17M9W7D 38M4G7D;38M6W7D	
		SCK 30k: 8M58G7D;8M59W7D; 12M8G7D;12M9W7D 17M8G7D;18M2W7D 26M8G7D;27M8W7D 35M7G7D;37M9W7D 45M7G7D;47M5W7D 58M0G7D;57M7W7D 64M5G7D;67M5W7D 77M3G7D;77M3W7D 85M9G7D;87M8W7D 96M7G7D;97M9W7D	
Designation of Emissions (Remark: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	NR Band N41	SCK 15k: 4M48G7D;4M48W7D; 8M95G7D;9M30W7D; 13M3G7D;13M3W7D	
		SCK 30k: 4M48G7D;4M48W7D; 8M95G7D;9M30W7D; 13M3G7D;13M3W7D	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (CMAA) Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



		17M8G7D;19M0W7D 38M6G7D;38M5W7D
	NR Band N71	SCK 15k: 4M50G7D;4M48W7D; 8M93G7D;8M94W7D; 13M1G7D;14M1W7D 17M9G7D;17M9W7D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3.8 Test Frequencies

3.8.1 Reference test frequencies for NR operating band n25

3.8.1.1 Test frequencies for NR operating band n25 and SCS 15 kHz

CBW [MHz]	carrier Bandwidth [PRBs]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	point A [MHz]	absolute Frequency Point A [ARFCN]	offsetT oCarrier [Carrier PRBs]	SS block SCS [kHz]	GSCN	absolute Frequency SSB [ARFCN]
5	25	Downlink	Low	1932.5	386500	1930.25	386050	0	15	4829	386410
			Mid	1962.5	392500	1941.89	388378	102		4904	392410
			High	1992.5	398500	1899.53	379906	504		4979	398410
		Uplink	Low	1852.5	370500	1850.25	370050	0	-	-	-
			Mid	1882.5	376500	1789.53	357906	504		-	-
			High	1912.5	382500	1909.17	381834	6		-	-
10	52	Downlink	Low	1935	387000	1930.32	386064	0	15	4830	386430
			Mid	1962.5	392500	1939.46	387892	102		4898	391930
			High	1990	398000	1894.6	378920	504		4969	397490
		Uplink	Low	1855	371000	1850.32	370064	0	-	-	-
			Mid	1882.5	376500	1787.1	357420	504		-	-
			High	1910	382000	1904.24	380848	6		-	-
15	79	Downlink	Low	1937.5	387500	1930.39	386078	0	15	4831	386450
			Mid	1962.5	392500	1937.03	387406	102		4892	391450
			High	1987.5	397500	1889.67	377934	504		4956	396510
		Uplink	Low	1857.5	371500	1850.39	370078	0	-	-	-
			Mid	1882.5	376500	1784.67	356934	504		-	-
			High	1907.5	381500	1899.31	379862	6		-	-
20	106	Downlink	Low	1940	388000	1930.46	386092	0	15	4832	386650
			Mid	1962.5	392500	1934.6	386920	102		4886	390970
			High	1985	397000	1884.74	376948	504		4943	395530
		Uplink	Low	1860	372000	1850.46	370092	0	-	-	-
			Mid	1882.5	376500	1782.24	356448	504		-	-
			High	1905	381000	1894.38	378876	6		-	-



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3.8.1.2 Test frequencies for NR operating band n25 and SCS 30 kHz

CBW [MHz]	carrier Bandwidth [PRBs]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	point A [MHz]	absolute Frequency Point A [ARFCN]	offsetTo Carrier [Carrier PRBs]	SS block SCS [kHz]	GSCN	absolute FrequencySSB [ARFCN]
10	24	Downlink	Low	1935	387000	1930.68	386136	0	15	4836	386910
			Mid	1962.5	392500	1921.46	384292	102		4904	392410
			High	1990	398000	1804.24	360848	504		4975	397970
		Uplink	Low	1855	371000	1850.68	370136	0	-	-	-
			Mid	1882.5	376500	1696.74	339348	504		-	-
			High	1910	382000	1903.52	380704	6		-	-
15	38	Downlink	Low	1937.5	387500	1930.66	386132	0	15	4837	386930
			Mid	1962.5	392500	1918.94	383788	102		4898	391930
			High	1987.5	397500	1799.22	359844	504		4962	396990
		Uplink	Low	1857.5	371500	1850.66	370132	0	-	-	-
			Mid	1882.5	376500	1694.22	338844	504		-	-
			High	1907.5	381500	1898.5	379700	6		-	-
20	51	Downlink	Low	1940	388000	1930.82	386164	0	15	4835	386890
			Mid	1962.5	392500	1916.6	383320	102		4892	391450
			High	1985	397000	1794.38	358876	504		4949	396010
		Uplink	Low	1860	372000	1850.82	370164	0	-	-	-
			Mid	1882.5	376500	1691.88	338376	504		-	-
			High	1905	381000	1893.66	378732	6		-	-



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (CCC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3.8.2 Reference test frequencies for NR operating band n41

3.8.2.1 Test frequencies for NR operating band n41 and SCS 15 kHz

CBW [MHz]	carrier Bandw idth [PRBs]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	point A [MHz]	absolute Frequen cyPoint A [ARFCN]	offsetTo Carrier [Carrier PRBs]	SS block SCS [kHz]	GSCN	absolute Frequen cySSB [ARFCN]
10	52	Downlink & Uplink	Low	2501.01	500202	2496.33	499266	0	15	6246	499710
			Mid	2593.005	518601	2569.965	513993	102		6477	518190
			High	2685	537000	2589.6	517920	504		6705	536430
15	79	Downlink & Uplink	Low	2503.5	500700	2496.39	499278	0	15	6246	499710
			Mid	2593.005	518601	2567.535	513507	102		6471	517710
			High	2682.495	536499	2584.665	516933	504		6693	535470
20	106	Downlink & Uplink	Low	2506.005	501201	2496.465	499293	0	15	6246	499710
			Mid	2593.005	518601	2565.105	513021	102		6465	517230
			High	2679.99	535998	2579.73	515946	504		6681	534510
30	160	Downlink	Low	2511	502200	2496.6	499320	0	15	6246	499710
		&	Mid	2593.005	518601	2560.245	512049	102		6453	516270
		Uplink	High	2674.995	534999	2569.875	513975	504		6657	532590
40	216	Downlink & Uplink	Low	2516.01	503202	2496.57	499314	0	15	6246	499710
			Mid	2593.005	518601	2555.205	511041	102		6441	515310
			High	2670	534000	2559.84	511968	504		6633	530670
50	270	Downlink & Uplink	Low	2521.005	504201	2496.705	499341	0	15	6246	499710
			Mid	2593.005	518601	2550.345	510069	102		6426	514110
			High	2664.99	532998	2549.97	509994	504		6606	528510



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3.8.2.2 Test frequencies for NR operating band n41 and SCS 30 kHz

Band width [MHz]	carrier Bandwidth [PRBs]	Range	Carrier centre [MHz]	Carrier centre [ARFCN]	point A [MHz]	absolute Frequency PointA [ARFCN]	offsetTo Carrier [PRBs]	SS block SCS [kHz]	GSCN	absolute FrequencySSB [ARFCN]
10	24	Downlink & Uplink	Low	2501.01	500202	2496.69	499338	30	6252	500190
			Mid	2592.99	518598	2551.95	510390		6483	518670
			High	2685	537000	2499.24	499848		6711	536910
15	38	Downlink & Uplink	Low	2503.5	500700	2496.66	499332	30	6252	500190
			Mid	2592.99	518598	2549.43	509886		6474	517950
			High	2682.48	536496	2494.2	498840		6699	535950
20	51	Downlink & Uplink	Low	2506.02	501204	2496.84	499368	30	6252	500190
			Mid	2592.99	518598	2547.09	509418		6471	517710
			High	2670	534000	2469.48	493896		6636	530910
40	106	Downlink & Uplink	Low	2516.01	503202	2496.93	499386	30	6252	500190
			Mid	2592.99	518598	2537.19	507438		6444	515550
			High	2670	534000	2469.48	493896		6636	530910
50	133	Downlink & Uplink	Low	2521.02	504204	2497.08	499416	30	6252	500190
			Mid	2592.99	518598	2532.33	506466		6432	514590
			High	2664.99	532998	2459.61	491922		6612	528990
60	162	Downlink & Uplink	Low	2526	505200	2496.84	499368	30	6252	500190
			Mid	2592.99	518598	2527.11	505422		6420	513630
			High	2659.98	531996	2449.38	489876		6588	527070
80	217	Downlink & Uplink	Low	2536.02	507204	2496.96	499392	30	6252	500190
			Mid	2592.99	518598	2517.21	503442		6396	511710
			High	2649.99	529998	2429.49	485898		6537	522990
90	245	Downlink & Uplink	Low	2541	508200	2496.9	499380	30	6252	500190
			Mid	2592.99	518598	2512.17	502434		6381	510510
			High	2644.98	528996	2419.44	483888		6513	521070
100	273	Downlink & Uplink	Low	2546.01	509202	2496.87	499374	30	6252	500190
			Mid	2592.99	518598	2507.13	501426		6369	509550
			High	2640	528000	2409.42	481884		6486	518910



3.8.3 Reference test frequencies for NR operating band n66

3.8.3.1 Test frequencies for NR operating band n66 and SCS 15 kHz

Band width [MHz]	carrier Bandwidth [PRBs]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	point A [MHz]	absoluteFrequencyPointA [ARFCN]	offsetToCarrier [PRBs]	SS block SCS [kHz]	GSCN	absoluteFrequencySSB [ARFCN]
5	25	Downlink	Low	2112.5	422500	2110.25	422050	0	15	5279	422410
			Mid	2145	429000	2124.39	424878	102		5361	428910
			High	2177.5	435500	2084.53	416906	504		5443	435410
		Uplink	Low	1712.5	342500	1710.25	342050	0	-	-	-
			Mid	1745	349000	1652.03	330406	504		-	-
			High	1777.5	355500	1774.17	354834	6		-	-
10	52	Downlink	Low	2115	423000	2110.32	422064	0	15	5280	422430
			Mid	2145	429000	2121.96	424392	102		5355	428430
			High	2175	435000	2079.6	415920	504		5430	434430
		Uplink	Low	1715	343000	1710.32	342064	0	-	-	-
			Mid	1745	349000	1649.6	329920	504		-	-
			High	1775	355000	1769.24	353848	6		-	-
15	79	Downlink	Low	2117.5	423500	2110.39	422078	0	15	5281	422450
			Mid	2145	429000	2119.53	423906	102		5349	427950
			High	2172.5	434500	2074.67	414934	504		5417	433450
		Uplink	Low	1717.5	343500	1710.39	342078	0	-	-	-
			Mid	1745	349000	1647.17	329434	504		-	-
			High	1772.5	354500	1764.31	352862	6		-	-
20	106	Downlink	Low	2120	424000	2110.46	422092	0	15	5282	422650
			Mid	2145	429000	2117.1	423420	102		5343	427470
			High	2170	434000	2069.74	413948	504		5407	432530
		Uplink	Low	1720	344000	1710.46	342092	0	-	-	-
			Mid	1745	349000	1644.74	328948	504		-	-
			High	1770	354000	1759.38	351876	6		-	-
30	160	Downlink	Low	2125	425000	2110.6	422120	0	15	5284	422690
			Mid	2145	429000	2112.24	422448	102		5331	426510
			High	2165	433000	2059.88	411976	504		5381	430570
		Uplink	Low	1725	345000	1710.6	342120	0	-	-	-
			Mid	1745	349000	1639.88	327976	504		-	-
			High	1765	353000	1749.52	349904	6		-	-
40	216	Downlink	Low	2130	426000	2110.56	422112	0	15	5283	422670
			Mid	2145	429000	2107.2	421440	102		5319	425550
			High	2160	432000	2049.84	409968	504		5358	428670
		Uplink	Low	1730	346000	1710.56	342112	0	-	-	-
			Mid	1745	349000	1634.84	326968	504		-	-
			High	1760	352000	1739.48	347896	6		-	-



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (2019) China CCC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3.8.3.2 Test frequencies for NR operating band n66 and SCS 30 kHz

UL/DL Band width combination	carrierBandwidth [PRBs]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	point A [MHz]	absolute FrequencyPoint A [ARFCN]	offset ToCarrier [Carrier PRBs]	SS block SCS [kHz]	GSCN	absolute FrequencySSB [ARFCN]
10	24	Downlink	Low	2115	423000	2110.68	422136	0	15	5286	422910
			Mid	2145	429000	2103.96	420792	102		5361	428910
			High	2175	435000	1989.24	397848	504		5436	434910
	24	Uplink	Low	1715	343000	1710.68	342136	0	-	-	-
			Mid	1745	349000	1559.24	311848	504		-	-
			High	1775	355000	1768.52	353704	6		-	-
15	38	Downlink	Low	2117.5	423500	2110.66	422132	0	15	5287	422930
			Mid	2145	429000	2101.44	420288	102		5355	428430
			High	2172.5	434500	1984.22	396844	504		5423	433930
	38	Uplink	Low	1717.5	343500	1710.66	342132	0	-	-	-
			Mid	1745	349000	1556.72	311344	504		-	-
			High	1772.5	354500	1763.5	352700	6		-	-
20	51	Downlink	Low	2120	424000	2110.82	422164	0	15	5285	422890
			Mid	2145	429000	2099.1	419820	102		5349	427950
			High	2170	434000	1979.38	395876	504		5413	433010
	51	Uplink	Low	1720	344000	1710.82	342164	0	-	-	-
			Mid	1745	349000	1554.38	310876	504		-	-
			High	1770	354000	1758.66	351732	6		-	-
25	65	Downlink	Low	2122.5	424500	2110.8	422160	0	15	5286	422910
			Mid	2145	429000	2096.58	419316	102		5343	427470
			High	2167.5	433500	1974.36	394872	504		5400	432030
	65	Uplink	Low	1722.5	344500	1710.8	342160	0	-	-	-
			Mid	1745	349000	1551.86	310372	504		-	-
			High	1767.5	353500	1753.64	350728	6		-	-
30	78	Downlink	Low	2125	425000	2110.96	422192	0	15	5287	422930
			Mid	2145	429000	2094.24	418848	102		5337	426990
			High	2165	433000	1969.52	393904	504		5387	431050
	78	Uplink	Low	1725	345000	1710.96	342192	0	-	-	-
			Mid	1745	349000	1549.52	309904	504		-	-
			High	1765	353000	1748.8	349760	6		-	-
40	106	Downlink	Low	2130	426000	2110.92	422184	0	15	5286	422910
			Mid	2145	429000	2089.2	417840	102		5325	426030
			High	2160	432000	1959.48	391896	504		5361	428910
	106	Uplink	Low	1730	346000	1710.92	342184	0	-	-	-
			Mid	1745	349000	1544.48	308896	504		-	-
			High	1760	352000	1738.76	347752	6		-	-



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SGS-CSTC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3.8.4 Reference test frequencies for NR operating band n71

3.8.4.1 Test frequencies for NR operating band n71 and SCS 15 kHz

CBW [MHz]	carrier Bandwidth [PRBs]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	point A [MHz]	absolute Frequency Point A [ARFCN]	offsetTo Carrier [Carrier PRBs]	SS block SCS [kHz]	GSCN	absolute FrequencySSB [ARFCN]
5	25	Downlink	Low	619.5	123900	617.25	123450	0	15	1548	123870
			Mid	634.5	126900	613.89	122778	102		1587	126990
			High	649.5	129900	556.53	111306	504		1623	129870
		Uplink	Low	665.5	133100	663.25	132650	0	-	-	-
			Mid	680.5	136100	587.53	117506	504		-	-
			High	695.5	139100	692.17	138434	6		-	-
10	52	Downlink	Low	622	124400	617.32	123464	0	15	1549	123890
			Mid	634.5	126900	611.46	122292	102		1581	126510
			High	647	129400	551.6	110320	504		1610	128890
		Uplink	Low	668	133600	663.32	132664	0	-	-	-
			Mid	680.5	136100	585.1	117020	504		-	-
			High	693	138600	687.24	137448	6		-	-
15	79	Downlink	Low	624.5	124900	617.39	123478	0	15	1547	123850
			Mid	634.5	126900	609.03	121806	102		1575	126030
			High	644.5	128900	546.67	109334	504		1600	127970
		Uplink	Low	670.5	134100	663.39	132678	0	-	-	-
			Mid	680.5	136100	582.67	116534	504		-	-
			High	690.5	138100	682.31	136462	6		-	-
20	106	Downlink	Low	627	125400	617.46	123492	0	15	1548	123870
			Mid	634.5	126900	606.6	121320	102		1569	125550
			High	642	128400	541.74	108348	504		1587	126990
		Uplink	Low	673	134600	663.46	132692	0	-	-	-
			Mid	680.5	136100	580.24	116048	504		-	-
			High	688	137600	677.38	135476	6		-	-



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZ) Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3.8.4.2 Test frequencies for NR operating band n71 and SCS 30 kHz

CBW [MHz]	carrier Bandw idth [PRBs]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	point A [MHz]	absolute Frequen cyPoint A [ARFCN]	offsetTo Carrier [Carrier PRBs]	SS block SCS [kHz]	GSCN	absolute Frequen cySSB [ARFCN]
10	24	Downlink	Low	622	124400	617.68	123536	0	15	1555	124370
			Mid	634.5	126900	593.46	118692	102		1587	126990
			High	647	129400	461.24	92248	504		1616	129370
		Uplink	Low	668	133600	663.68	132736	0	-	-	-
			Mid	680.5	136100	494.74	98948	504		-	-
			High	693	138600	686.52	137304	6		-	-
15	38	Downlink	Low	624.5	124900	617.66	123532	0	15	1553	124330
			Mid	634.5	126900	590.94	118188	102		1578	126270
			High	644.5	128900	456.22	91244	504		1606	128450
		Uplink	Low	670.5	134100	663.66	132732	0	-	-	-
			Mid	680.5	136100	492.22	98444	504		-	-
			High	690.5	138100	681.5	136300	6		-	-
20	51	Downlink	Low	627	125400	617.82	123564	0	15	1554	124350
			Mid	634.5	126900	588.6	117720	102		1572	125790
			High	642	128400	451.38	90276	504		1593	127470
		Uplink	Low	673	134600	663.82	132764	0	-	-	-
			Mid	680.5	136100	489.88	97976	504		-	-
			High	688	137600	676.66	135332	6		-	-



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (CCC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 Description of Tests

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 ; C63.26 (2015)

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (FCC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel). in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

Remark: Reference test setup 1

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW $\geq 1\%$ of the emission bandwidth
4. VBW $\geq 3 \times$ RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times$ Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize



4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least $10 \times$ the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings



4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.1

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8) Calculate power in dBm by the following formula:

$$\text{ERP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

Where:

Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to Pg [dBm] – cable loss [dB]. The calculated Pd levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of 43 + 10log10(Power [Watts]).

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

$$\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

$$\text{EIRP} = \text{ERP} + 2.15\text{dB}$$

Where:

Pg is the generator output power into the substitution antenna.

3. Test the EUT in the lowest channel, the middle channel the Highest channel
4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
5. Repeat above procedures until all frequencies measured was complete.

Remark: Reference test setup 3

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 40GHz, The disturbance between 9kHz to 30MHz and 18GHz to 40GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

4) All modes have been tested, but only the worst case data displayed in this report.



4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)

. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:


1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 4



4.9 Test Setups

4.9.1 Test Setup 1

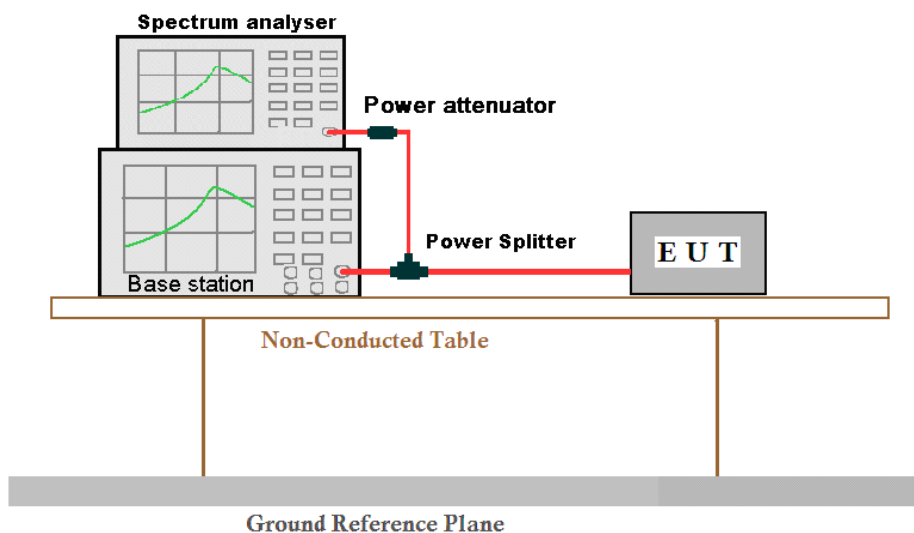

4.9.2 Test Setup 2

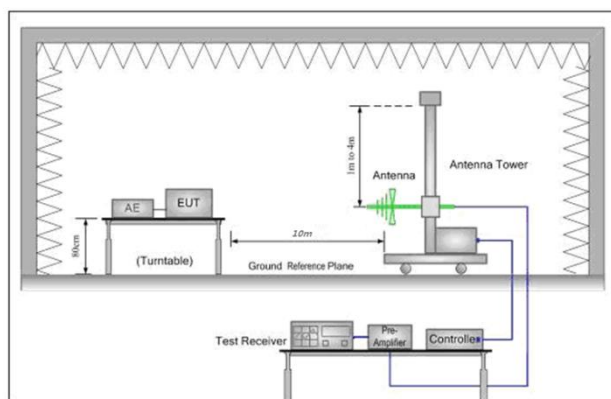


Figure 1. 30MHz to 1GHz

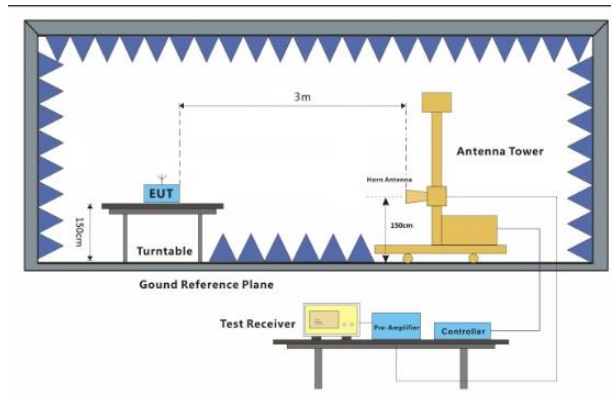


Figure 2. above 1GHz

4.9.3 Test Setup 3

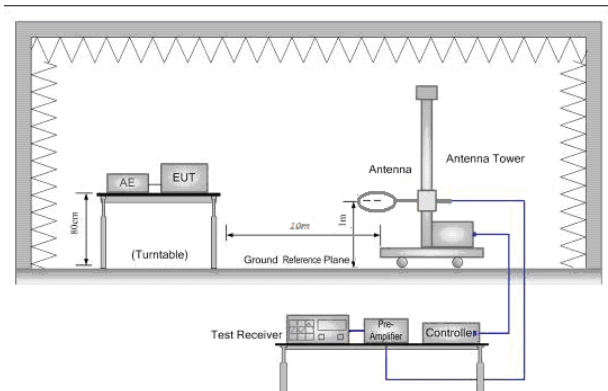


Figure 1. Below 30MHz

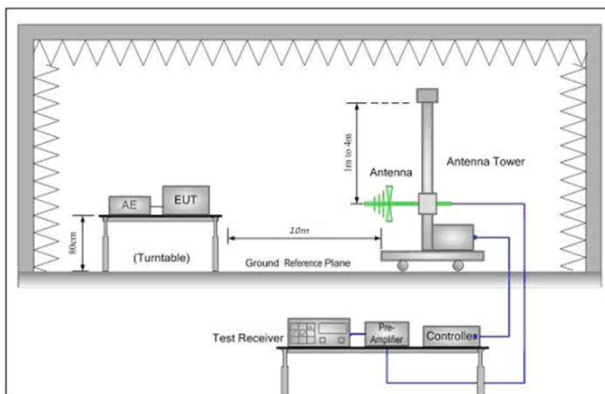


Figure 2. 30MHz to 1GHz


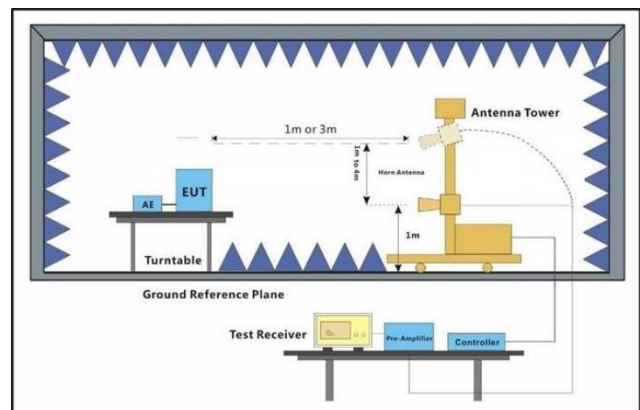


Figure 3. above 1GHz

4.9.4 Test Setup 4

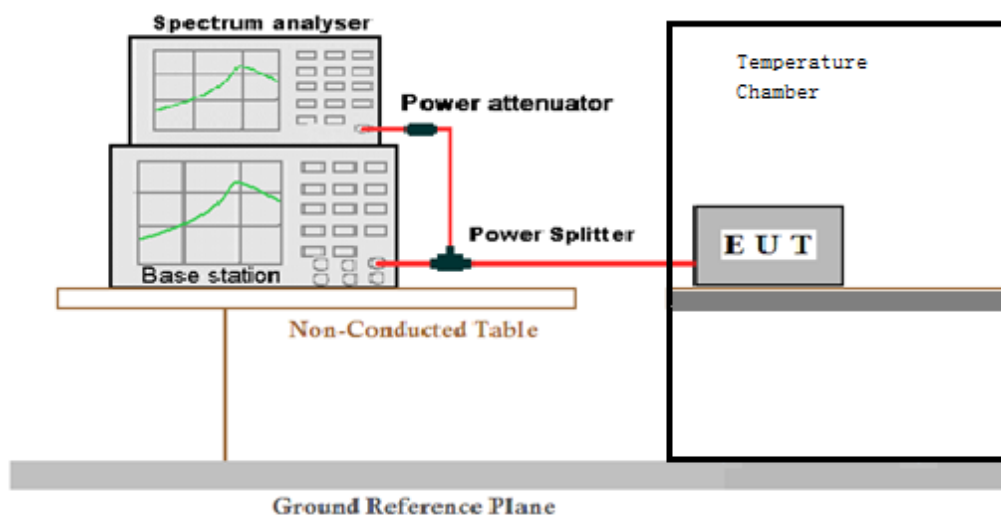

4.10 Test Conditions

Test Case		Test Conditions	
Transmit Output Power Data	Average Power, Total	Test Environment	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	NR/TM1;NR/TM2;NR/TM3;NR/TM4;NR/TM5;NR/TM6; NR/TM7;NR/TM8
	Average Power, Spectral Density (if required)	Test Environment	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	NR/TM1;NR/TM2;NR/TM3;NR/TM4;NR/TM5;NR/TM6; NR/TM7;NR/TM8
Peak-to-Average Ratio (if required)		Test Environment	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	M (M= middle channel)
		Test Mode	NR/TM1;NR/TM5
Modulation Characteristics		Test Environment	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	M (M= middle channel)
		Test Mode	NR/TM1;NR/TM5
Bandwidth	Occupied Bandwidth	Test Environment	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	NR/TM1;NR/TM2;NR/TM3;NR/TM4;NR/TM5;NR/TM6; NR/TM7;NR/TM8
	Emission Bandwidth (if required)	Test Environment	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	NR/TM1;NR/TM2;NR/TM3;NR/TM4;NR/TM5;NR/TM6; NR/TM7;NR/TM8
Band Edges Compliance		Test Environment	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, H (L= low channel, H= high channel)
		Test Mode	NR/TM1;NR/TM5
Spurious Emission at		Test Environment	Ambient Climate & Rated Voltage



Antenna Terminals	Test Setup	Test Setup 1
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
	Test Mode	NR/TM1
Field Strength of Spurious Radiation	Test Environment	Ambient Climate & Rated Voltage
	Test Setup	Test Setup 2
	Test Mode	NR/TM1 Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Frequency Stability	Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VN and VH of Rated Voltage at Ambient Climate.
	Test Setup	Test Setup 4
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
	Test Mode	NR/TM1;NR/TM5



5 Main Test Instruments

RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Due date
				(yyyy-mm-dd)	(yyyy-mm-dd)
UXM 5G Wireless Test Platform	KEYSIGHT	E7515B	W074-01	2020/9/4	2021/9/3
Signal Analyzer	KEYSIGHT	N9020A	W026-08	2020/6/11	2021/6/10
				2021/5/31	2022/5/30
MXG Vector Signal Generator	KEYSIGHT	N5182B	MY53051405	2021/4/14	2022/4/13
Signal Generator	Rohde & Schwarz	SMR 20	W010-19	2021/4/14	2022/4/13
DC Power Supply	Rohde & Schwarz	HMP2020	W009-08	2020/12/04	2021/12/03
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	W006-16	2021/4/15	2022/4/14
RF control Unit	Tonscend	JS0806-1	N/A	N/A	N/A
Band Reject Filter Group	Tonscend	JS0806-F	N/A	N/A	N/A
Test Software	Tonscend	JS1120-5 NR V2.2.03.06	NCR	NCR	NCR
Signal Analyzer	Rohde & Schwarz	FSV	101473	2021/05/20	2022/05/19

RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Due date
				(yyyy-mm-dd)	(yyyy-mm-dd)
Signal Analyzer	Rohde & Schwarz	FSU	XAW01-13-02	2020/10/26	2021/10/25
Radio communication Test Station	Anritsu	MT8000A	XAW01-03-12	2020/10/27	2021/10/26
Radio communication analyzer	Anritsu	MT8821C	XAW01-03-13	2020/10/26	2021/10/25
RF control Unit	Tonscend	JS0806-1	N/A	N/A	N/A
Band Reject Filter Group	Tonscend	JS0806-F	N/A	N/A	N/A
Humidity/ Temperature Indicator	MingGao	TH101B	XAW01-01-08	2021/4/30	2022/4/29



RSE Test System					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	XAW03-35-01	2019-09-11	2022-09-10
MXA signal analyzer	Keysight	N9020A	XAW01-06-01	2021-04-01	2022-03-31
Radio communication analyzer	ROHDE&SCHWARZ	CMW 500	XAW01-03-02	2021-04-01	2022-03-31
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2020-09-11	2021-09-10
Receiving antenna (30MHz-3GHz)	Schwarzbeck	VULB 9163	XAW01-09-01	2019-10-13	2021-10-12
Receiving antenna (1GHz~18GHz)	Schwarzbeck	BBHA 9120D	XAW01-09-02	2019-10-13	2021-10-12
Receiving antenna (15GHz~40GHz)	Schwarzbeck	BBHA 9170	XAW01-09-03	2019-10-13	2021-10-12
Directional antenna rack controller	Max-Full	MF-7802BS	XAW03-03-01	NCR	NCR
High-speed antenna rack controller	Max-Full	MF-7802	XAW03-04-01	NCR	NCR
Filter bank	Tonscend	JS0806-F	XAW03-05-01	NCR	NCR
Filter bank	Tonscend	JS0806s	XAW03-05-02	NCR	NCR
Amplifier	Tonscend	TAP00903040	XAW01-41-01	2020-10-26	2021-10-25
Amplifier	Tonscend	TAP01018048	XAW01-41-02	2020-10-26	2021-10-25
Amplifier	Tonscend	TAP18040048	XAW01-41-03	2020-10-27	2021-10-26
Amplifier	Shanghai Steed	YX28980930	XAW01-41-06	2020-10-26	2021-10-25
5G UXM	Keysight	E7515B	XAW01-04-01	2020-09-11	2021-09-10
Temperature and humidity meter	MingGao	TH101B	XAW01-01-01	2020-11-06	2021-11-05
Measurement Software	Tonscend	TS+ RSE V3.0.0.2	XAW02-05-01	NCR	NCR



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SGS-CSTC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Measurement Uncertainty

For a 95% confidence level ($k = 2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Lab A:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	$\pm 0.41\text{dB}$
2	RF power density, conducted	$\pm 1.96\text{dB}$
3	Spurious emissions, conducted	$\pm 0.41\text{dB}$
4	Radio Frequency	$\pm 7.10 \times 10^{-8}$
5	Duty Cycle	$\pm 0.49\%$
6	Occupied Bandwidth	$\pm 0.2\%$

Lab B:

No.	Item	Measurement Uncertainty
1	Radiated Emission	$\pm 4.8\text{dB}$ (Below 1GHz)
		$\pm 4.8\text{dB}$ (1GHz to 6GHz)
		$\pm 4.5\text{dB}$ (6GHz to 18GHz)
		$\pm 5.02\text{dB}$ (Above 18GHz)



7 Appendixes

Appendix A	Setup Photos
Appendix B.12	N25
Appendix B.13	N41
Appendix B.14	N66
Appendix B.15	N71
Appendix B.16	NR CA_N25A-N41A
Appendix B.17	NR CA_N25A-N71A
Appendix B.18	NR CA_N41A-N71A
Appendix B.19	NR CA_N66A-N41A
Appendix B.20	NR CA_N66A-N71A

The End

