

**IAL****INTERNATIONAL APPROVALS
LABORATORIES****EMC EMISSIONS - TEST REPORT (Full)**Test Report No. **BC300332-1** Issue Date: **Fri 19/Sep/2003**Model / Serial No. **3MB4 / SN: 1**Product Type **3M Headset intercom system**Client **Inovonics Wireless Corporation**Manufacturer **Inovonics Wireless Corporation**License holder **Inovonics Wireless Corporation**Address **315 CTC Boulevard****Louisville, CO 80027**Test Criteria Applied **FCC CFR47 Part 15 Class B**
Test Result**PASS**Test Project Number
References
Total Pages
Including
Appendices:**BC300332-1**

29

Title 47 CFR 15: RADIO FREQUENCY
DEVICES*Todd Seeley*

Reviewed By : Todd Seeley

Robert Cresswell

Approved By : Robert Cresswell

INTERNATIONAL APPROVALS LABORATORIES (IAL) reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. IAL have no liability for any deductions, inferences or generalizations drawn by the client or others from IAL issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval of IAL. This report shall not be used by the client to claim product endorsement by NVLAP (No. 200624-0) or any agency of the US government.

International Approval Laboratories and its professional staff hold government
and professional organization certifications and are members of
IEEE, NVLAP, and VCCI.



Lab Code: 200624-0

**Accredited**

DIRECTORY

Documentation	Page(s)
Test report	<u>1 - 29</u>
Directory	<u>2</u>
Test Regulations	<u>3</u>
General Remarks	<u>3-4</u>
Test-setup Photographs	<u>5 - 8</u>
Appendix A	
Test Data Sheets and Test Equipment Used	<u>9 - 23</u>
Appendix B	
Test Plan/Constructional Data Form	<u>24 - 24</u>
Appendix C	
Measurement Protocol/Test Procedures	<u>25 - 29</u>

STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The measurement uncertainty for Conducted Emissions in the frequency range of 150kHz – 30MHz is calculated to be $\pm 2.30\text{dB}$ and for Radiated Emissions is calculated to be $\pm 3.60\text{dB}$ in the frequency range of 30MHz – 200MHz and $\pm 3.38\text{dB}$ in the frequency range of 200MHz – 1000MHz.

EUT Received Date: 18-Aug-2003

Testing Start Date: 18-Aug-2003

Testing End Date: 26-Aug-2003

The tests were performed according to following regulations:

1. FCC CFR47 Part 15.207
2. FCC CFR47 Part 15.209
3. FCC CFR47 Part 15.249

Emission Test Results:

Conducted Emissions, Powerline - 15.207 PASS

Test Result

Minimum limit margin -2.10 dB at 0.450 MHz

Maximum limit exceeding _____ dB at _____ MHz

Remarks: _____

Conducted Emissions, Data I/O (Ethernet, RJ11, etc.) - (Not Applicable)

Test Result

Minimum limit margin _____ dB at _____ MHz

Maximum limit exceeding _____ dB at _____ MHz

Remarks: _____

Radiated Emissions (Electric Field) - 15.209 PASS

Test Result

Minimum limit margin -1.90 dB at 401.02 MHz

Maximum limit exceeding _____ dB at _____ MHz

Remarks: _____

Radiated Emissions (Electric Field) - 15.249(a) PASS

Test Result

Minimum limit margin -0.78 dB at 1842.98 MHz

Maximum limit exceeding _____ dB at _____ MHz

Remarks: _____

Radiated Emissions (Electric Field) - 15.249(c) PASS

Test Result

Minimum limit margin -0.10dB at 2923.37MHz

Maximum limit exceeding _____ dB at _____ MHz

Remarks: _____

Radiated Emissions (Electric Field) - 15.249(d) **PASS**

Test Result

Minimum limit margin _____ dB at _____ MHz

Maximum limit exceeding _____ dB at _____ MHz


Remarks: CW mode was selected for the fact that it gives the worst case measurement.

GENERAL REMARKS:

Modifications required to pass: Added 2 solder beads to RF Faraday cage over RF circuitry & modified 2 caps.

Test Specification Deviations: Additions to or Exclusions from : None

Test-setup photo(s):
Conducted Emissions

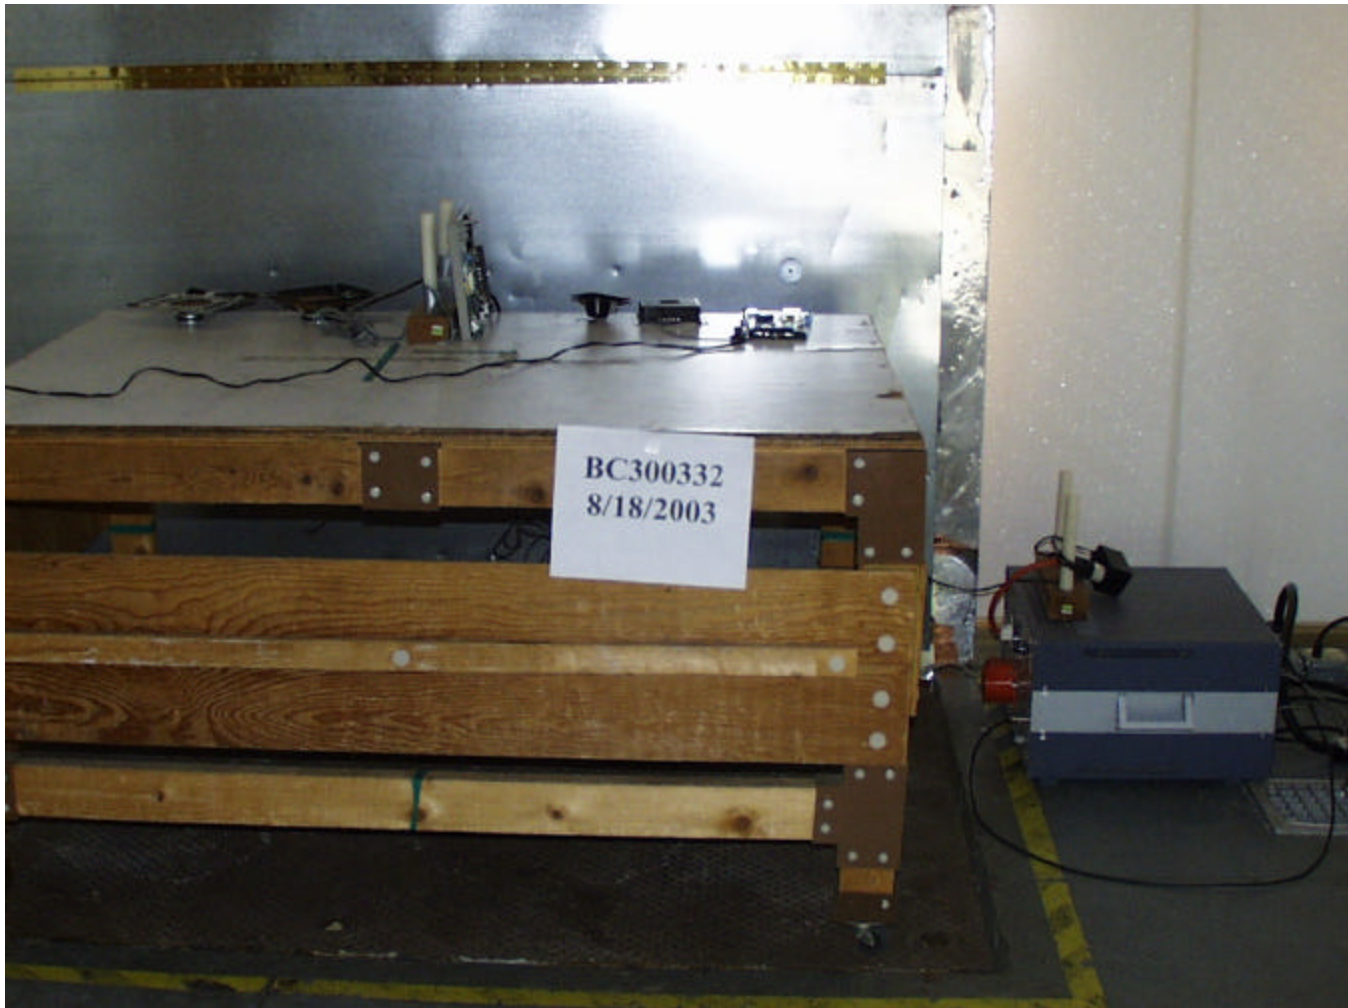

Test-setup photo(s):
Conducted Emissions



Test-setup photo(s):
Radiated Emissions



Test-setup photo(s):
Radiated Emissions



Appendix A

Test Data Sheets
and
Test Equipment Used

Conducted Electromagnetic Emissions

Test Report #: **BC300332 Run 01**
 Test Method: **FCC 15.207**
 EUT Model #: **3MB4**
 EUT Serial #: **1**
 Manufacturer: **Inovonics**
 EUT Description: **3M Headset intercom system**
 Notes: **3M base 4**

Test Area: **Pinewood Site 1 Cond**
 Test Date: **18-Aug-2003**
 EUT Power: **120 VAC / 60 Hz**

Temperature: **23.1** °C
 Relative Humidity: **54** %
 Air Pressure: **81** kPa
 Page: **1** of **2**

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / LISN / ATTEN	FINAL	TEST POINT	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB)	(dBuV)		FCC B	N/A
0.450	35.8 Qp	0.1 / 0.0 / -10.0	45.9	Line 1	-2.1	N/A
0.500	34.6 Qp	0.1 / 0.0 / -10.0	44.7	Line 1	-3.3	N/A
1.00	20.1 Qp	0.2 / 0.0 / -10.0	30.3	Line 1	-17.7	N/A
10.00	1.1 Qp	0.7 / 0.5 / -10.0	12.3	Line 1	-35.7	N/A
30.00	2.6 Qp	1.2 / 2.2 / -10.0	16.0	Line 1	-32.0	N/A
0.150	43.7 Qp	0.1 / 0.0 / -10.0	53.8	Line 1	N/A	N/A
0.170	43.1 Qp	0.1 / 0.0 / -10.0	53.2	Line 1	N/A	N/A
0.170	7.8 Av	0.1 / 0.0 / -10.0	17.9	Line 1	N/A	N/A
0.150	8.9 Av	0.1 / 0.0 / -10.0	19.0	Line 1	N/A	N/A
0.150	9.0 Av	0.1 / 0.0 / -10.0	19.1	Neutral	N/A	N/A
0.150	43.7 Qp	0.1 / 0.0 / -10.0	53.8	Neutral	N/A	N/A
0.170	43.0 Qp	0.1 / 0.0 / -10.0	53.1	Neutral	N/A	N/A
0.170	8.0 Av	0.1 / 0.0 / -10.0	18.1	Neutral	N/A	N/A
0.450	35.2 Qp	0.1 / 0.0 / -10.0	45.3	Neutral	-2.7	N/A
0.500	34.2 Qp	0.1 / 0.0 / -10.0	44.3	Neutral	-3.7	N/A
1.00	21.1 Qp	0.2 / 0.0 / -10.0	31.3	Neutral	-16.7	N/A
10.00	1.1 Qp	0.7 / 0.5 / -10.0	12.3	Neutral	-35.7	N/A
30.00	2.5 Qp	1.2 / 2.2 / -10.0	15.9	Neutral	-32.1	N/A

Conducted Electromagnetic Emissions



Test Report #: **BC300332 Run 01**
 Test Method: **FCC 15.207**
 EUT Model #: **3MB4**
 EUT Serial #: **1**
 Manufacturer: **Inovonics**
 EUT Description: **3M Headset intercom system**
 Notes: **3M base 4**

Test Area: **Pinewood Site 1 Cond**
 Test Date: **18-Aug-2003**
 EUT Power: **120 VAC / 60 Hz**

Temperature: **23.1** °C
 Relative Humidity: **54** %
 Air Pressure: **81** kPa
 Page: **2** of **2**

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / LISN / ATTEN	FINAL	TEST POINT	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB)	(dBuV)		FCC B	N/A
***** Measurement Summary *****						
0.450	35.8 Qp	0.1 / 0.0 / -10.0	45.9	Line 1	-2.1	N/A
0.500	34.6 Qp	0.1 / 0.0 / -10.0	44.7	Line 1	-3.3	N/A
1.00	21.1 Qp	0.2 / 0.0 / -10.0	31.3	Neutral	-16.7	N/A
30.00	2.6 Qp	1.2 / 2.2 / -10.0	16.0	Line 1	-32.0	N/A
10.00	1.1 Qp	0.7 / 0.5 / -10.0	12.3	Neutral	-35.7	N/A
0.150	43.7 Qp	0.1 / 0.0 / -10.0	53.8	Neutral	N/A	N/A
0.170	8.0 Av	0.1 / 0.0 / -10.0	18.1	Neutral	N/A	N/A

Radiated Electromagnetic Emissions



Test Report #: **BC300332 Run 02**
 Test Method: FCC Part 15.209
 EUT Model #: 3MB4
 EUT Serial #: 1
 Manufacturer: Inovonics
 EUT Description: 3M Headset intercom system
 Notes: 3M base 4

Test Area: Pinewood Site 1 (3m)
 Test Date: 18-Aug-2003
 EUT Power: 120 VAC / 60 Hz

Temperature: 23.4 °C
 Relative Humidity: 56 %
 Air Pressure: 81 kPa
 Page: 1 of 7

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
Maximized.						
401.02	54.7 Qp	2.2 / 15.1 / 27.9	44.1	H / 1.0 / 163.0	-1.9	N/A
401.02	49.0 Qp	2.2 / 15.1 / 27.9	38.3	H / 1.5 / 163.0	-7.7	N/A
52.40	42.8 Qp	0.8 / 9.8 / 28.3	25.1	V / 1.0 / 0.0	-14.9	N/A
53.76	43.7 Qp	0.8 / 9.6 / 28.3	25.8	V / 1.0 / 0.0	-14.2	N/A
56.44	47.6 Qp	0.8 / 9.2 / 28.3	29.4	V / 1.0 / 0.0	-10.6	N/A
57.76	46.5 Qp	0.8 / 9.0 / 28.2	28.1	V / 1.0 / 0.0	-11.9	N/A
63.13	41.0 Qp	0.9 / 8.4 / 28.2	22.0	V / 1.0 / 0.0	-18.0	N/A
80.03	41.9 Qp	0.9 / 7.1 / 28.2	21.7	V / 1.0 / 0.0	-18.3	N/A
86.59	46.0 Qp	0.9 / 7.7 / 28.1	26.4	V / 1.0 / 0.0	-13.6	N/A
85.28	44.9 Qp	0.9 / 7.4 / 28.2	25.1	V / 1.0 / 0.0	-14.9	N/A
108.79	34.9 Qp	1.0 / 10.6 / 28.0	18.5	V / 1.0 / 0.0	-25.0	N/A
118.04	36.9 Qp	1.1 / 11.6 / 28.0	21.6	V / 1.0 / 0.0	-21.9	N/A
138.28	35.7 Qp	1.2 / 12.5 / 27.9	21.5	V / 1.0 / 0.0	-22.0	N/A
139.62	38.6 Qp	1.2 / 12.4 / 27.9	24.2	V / 1.0 / 0.0	-19.3	N/A
140.96	38.3 Qp	1.2 / 12.4 / 27.9	24.0	V / 1.0 / 0.0	-19.5	N/A
146.88	36.8 Qp	1.2 / 12.3 / 27.8	22.5	V / 1.0 / 0.0	-21.0	N/A
161.09	44.9 Qp	1.3 / 12.4 / 27.8	30.8	V / 1.0 / 0.0	-12.7	N/A
166.48	45.0 Qp	1.3 / 12.3 / 27.7	30.8	V / 1.0 / 0.0	-12.7	N/A
167.83	46.4 Qp	1.3 / 12.3 / 27.7	32.2	V / 1.0 / 0.0	-11.3	N/A
169.15	46.1 Qp	1.3 / 12.4 / 27.7	32.2	V / 1.0 / 0.0	-11.3	N/A
52.40	45.1 Qp	0.8 / 9.8 / 28.3	27.4	V / 1.0 / 90.0	-12.6	N/A
53.76	45.6 Qp	0.8 / 9.6 / 28.3	27.7	V / 1.0 / 90.0	-12.3	N/A
57.76	47.5 Qp	0.8 / 9.0 / 28.2	29.0	V / 1.0 / 90.0	-11.0	N/A
85.28	45.5 Qp	0.9 / 7.4 / 28.2	25.7	V / 1.0 / 90.0	-14.3	N/A
108.79	38.5 Qp	1.0 / 10.6 / 28.0	22.1	V / 1.0 / 90.0	-21.4	N/A
138.28	40.1 Qp	1.2 / 12.5 / 27.9	25.8	V / 1.0 / 90.0	-17.7	N/A
139.62	41.9 Qp	1.2 / 12.4 / 27.9	27.6	V / 1.0 / 90.0	-15.9	N/A
140.96	40.8 Qp	1.2 / 12.4 / 27.9	26.4	V / 1.0 / 90.0	-17.1	N/A
146.88	38.2 Qp	1.2 / 12.3 / 27.8	23.9	V / 1.0 / 90.0	-19.6	N/A
161.09	47.3 Qp	1.3 / 12.4 / 27.8	33.2	V / 1.0 / 90.0	-10.3	N/A
166.48	46.6 Qp	1.3 / 12.3 / 27.7	32.4	V / 1.0 / 90.0	-11.1	N/A
77.89	40.4 Qp	0.9 / 7.0 / 28.2	20.1	V / 1.0 / 90.0	-19.9	N/A
81.89	44.9 Qp	0.9 / 7.2 / 28.2	24.9	V / 1.0 / 90.0	-15.1	N/A

Radiated Electromagnetic Emissions



Test Report #: **BC300332 Run 02**
 Test Method: FCC Part 15.209
 EUT Model #: 3MB4
 EUT Serial #: 1
 Manufacturer: Inovonics
 EUT Description: 3M Headset intercom system
 Notes: 3M base 4

Test Area: Pinewood Site 1 (3m)
 Test Date: 18-Aug-2003
 EUT Power: 120 VAC / 60 Hz

Temperature: 23.4 °C
 Relative Humidity: 56 %
 Air Pressure: 81 kPa
 Page: 2 of 7

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
84.59	46.4 Qp	0.9 / 7.4 / 28.2	26.5	V / 1.0 / 90.0	-13.5	N/A
85.93	46.8 Qp	0.9 / 7.5 / 28.1	27.1	V / 1.0 / 90.0	-12.9	N/A
110.08	41.5 Qp	1.0 / 10.7 / 28.0	25.2	V / 1.0 / 90.0	-18.3	N/A
163.73	48.8 Qp	1.3 / 12.4 / 27.8	34.7	V / 1.0 / 90.0	-8.8	N/A
165.08	49.1 Qp	1.3 / 12.4 / 27.7	35.0	V / 1.0 / 90.0	-8.5	N/A
173.12	39.4 Qp	1.3 / 12.4 / 27.7	25.4	V / 1.0 / 90.0	-18.1	N/A
57.76	47.8 Qp	0.8 / 9.0 / 28.2	29.4	V / 1.0 / 180.0	-10.6	N/A
80.03	42.4 Qp	0.9 / 7.1 / 28.2	22.2	V / 1.0 / 180.0	-17.8	N/A
85.28	46.1 Qp	0.9 / 7.4 / 28.2	26.3	V / 1.0 / 180.0	-13.7	N/A
86.59	46.6 Qp	0.9 / 7.7 / 28.1	27.0	V / 1.0 / 180.0	-13.0	N/A
83.95	45.0 Qp	0.9 / 7.4 / 28.2	25.2	V / 1.0 / 180.0	-14.8	N/A
80.03	43.0 Qp	0.9 / 7.1 / 28.2	22.8	V / 1.0 / 270.0	-17.2	N/A
83.95	45.1 Qp	0.9 / 7.4 / 28.2	25.2	V / 1.0 / 270.0	-14.8	N/A
The following were maximized between 30 and 200 MHz.						
57.76	48.1 Qp	0.8 / 9.0 / 28.2	29.7	V / 1.0 / 217.0	-10.3	N/A
163.69	48.9 Qp	1.3 / 12.4 / 27.8	34.8	V / 1.0 / 217.0	-8.7	N/A
165.04	49.1 Qp	1.3 / 12.4 / 27.7	35.1	V / 1.0 / 217.0	-8.4	N/A
Cables were maximized.						
138.28	39.6 Qp	1.2 / 12.5 / 27.9	25.4	H / 1.0 / 0.0	-18.1	N/A
111.46	37.0 Qp	1.1 / 10.9 / 28.0	20.9	H / 1.6 / 0.0	-22.6	N/A
111.46	36.8 Qp	1.1 / 10.9 / 28.0	20.7	H / 1.6 / 90.0	-22.8	N/A
138.28	41.5 Qp	1.2 / 12.5 / 27.9	27.2	H / 1.6 / 90.0	-16.3	N/A
139.62	43.4 Qp	1.2 / 12.4 / 27.9	29.0	H / 1.6 / 90.0	-14.5	N/A
140.96	41.0 Qp	1.2 / 12.4 / 27.9	26.6	H / 1.6 / 90.0	-16.9	N/A
128.84	39.4 Qp	1.1 / 12.4 / 27.9	25.0	H / 1.0 / 90.0	-18.5	N/A
No higher emissions found: 180Deg, Horizontal.						

Radiated Electromagnetic Emissions



Test Report #: **BC300332 Run 02**
 Test Method: **FCC Part 15.209**
 EUT Model #: **3MB4**
 EUT Serial #: **1**
 Manufacturer: **Inovonics**
 EUT Description: **3M Headset intercom system**
 Notes: **3M base 4**

Test Area: **Pinewood Site 1 (3m)**
 Test Date: **18-Aug-2003**
 EUT Power: **120 VAC / 60 Hz**

Temperature: **23.4** °C
 Relative Humidity: **56** %
 Air Pressure: **81** kPa
 Page: **3** of **7**

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
No higher emissions found: 270Deg, Horizontal.						
The following were maximized between 30 and 200 MHz.						
139.53	45.4 Qp	1.2 / 12.4 / 27.9	31.0	H / 1.4 / 108.0	-12.5	N/A
226.79	30.8 Qp	1.6 / 10.7 / 27.4	15.7	V / 1.0 / 0.0	-30.3	N/A
229.19	31.4 Qp	1.6 / 10.8 / 27.3	16.5	V / 1.0 / 0.0	-29.5	N/A
286.47	33.2 Qp	1.9 / 13.5 / 27.1	21.5	V / 1.0 / 0.0	-24.5	N/A
315.11	31.2 Qp	2.0 / 15.6 / 27.2	21.6	V / 1.0 / 0.0	-24.4	N/A
329.43	32.1 Qp	2.0 / 14.4 / 27.3	21.2	V / 1.0 / 0.0	-24.8	N/A
343.75	44.1 Qp	2.0 / 14.6 / 27.4	33.4	V / 1.0 / 0.0	-12.6	N/A
358.08	31.9 Qp	2.1 / 14.4 / 27.5	20.9	V / 1.0 / 0.0	-25.1	N/A
372.39	36.2 Qp	2.1 / 14.7 / 27.6	25.4	V / 1.0 / 0.0	-20.6	N/A
401.04	40.1 Qp	2.2 / 15.1 / 27.9	29.5	V / 1.0 / 0.0	-16.5	N/A
458.31	41.9 Qp	2.3 / 16.5 / 28.3	32.4	V / 1.0 / 0.0	-13.6	N/A
472.63	33.2 Qp	2.3 / 17.1 / 28.3	24.3	V / 1.0 / 0.0	-21.7	N/A
515.60	42.6 Qp	2.4 / 18.1 / 28.4	34.6	V / 1.0 / 0.0	-11.4	N/A
544.25	38.6 Qp	2.4 / 18.0 / 28.5	30.5	V / 1.0 / 0.0	-15.5	N/A
558.56	38.5 Qp	2.4 / 17.9 / 28.5	30.3	V / 1.0 / 0.0	-15.7	N/A
572.87	47.7 Qp	2.4 / 18.2 / 28.4	39.8	V / 1.0 / 0.0	-6.2	N/A
587.19	40.5 Qp	2.4 / 18.0 / 28.4	32.5	V / 1.0 / 0.0	-13.5	N/A
601.50	42.1 Qp	2.4 / 18.4 / 28.5	34.4	V / 1.0 / 0.0	-11.6	N/A
615.83	33.9 Qp	2.4 / 18.4 / 28.5	26.2	V / 1.0 / 0.0	-19.8	N/A
630.15	41.5 Qp	2.4 / 19.4 / 28.3	34.9	V / 1.0 / 0.0	-11.1	N/A
644.46	36.7 Qp	2.4 / 20.1 / 28.2	30.9	V / 1.0 / 0.0	-15.1	N/A
701.76	32.4 Qp	2.4 / 21.2 / 28.1	27.8	V / 1.0 / 0.0	-18.2	N/A
974.98	40.0 Qp	2.5 / 23.4 / 27.7	38.2	V / 1.0 / 0.0	-15.8	N/A
226.79	32.9 Qp	1.6 / 10.7 / 27.4	17.8	V / 1.0 / 90.0	-28.2	N/A
229.19	34.0 Qp	1.6 / 10.8 / 27.3	19.1	V / 1.0 / 90.0	-26.9	N/A
343.75	44.4 Qp	2.0 / 14.6 / 27.4	33.7	V / 1.0 / 90.0	-12.3	N/A
358.08	36.2 Qp	2.1 / 14.4 / 27.5	25.3	V / 1.0 / 90.0	-20.7	N/A
372.39	36.9 Qp	2.1 / 14.7 / 27.6	26.1	V / 1.0 / 90.0	-19.9	N/A
544.25	40.8 Qp	2.4 / 18.0 / 28.5	32.7	V / 1.0 / 90.0	-13.3	N/A

Radiated Electromagnetic Emissions



Test Report #:	BC300332 Run 02	Test Area:	Pinewood Site 1 (3m)
Test Method:	FCC Part 15.209	Test Date:	18-Aug-2003
EUT Model #:	3MB4	EUT Power:	120 VAC / 60 Hz
EUT Serial #:	1		
Manufacturer:	Inovonics		
EUT Description:	3M Headset intercom system		
Notes:	3M base 4		

Temperature:	23.4	°C
Relative Humidity:	56	%
Air Pressure:	81	kPa
Page:	4	of 7

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
615.83	34.4 Qp	2.4 / 18.4 / 28.5	26.7	V / 1.0 / 90.0	-19.3	N/A
630.15	41.8 Qp	2.4 / 19.4 / 28.3	35.2	V / 1.0 / 90.0	-10.8	N/A
974.98	46.6 Qp	2.5 / 23.4 / 27.7	44.8	V / 1.0 / 90.0	-9.2	N/A
429.66	32.4 Qp	2.2 / 15.8 / 28.1	22.3	V / 1.0 / 90.0	-23.7	N/A
529.91	34.4 Qp	2.4 / 17.8 / 28.4	26.1	V / 1.0 / 90.0	-19.9	N/A
977.85	38.7 Qp	2.5 / 23.5 / 27.8	36.9	V / 1.0 / 90.0	-17.1	N/A
229.19	35.4 Qp	1.6 / 10.8 / 27.3	20.4	V / 1.0 / 180.0	-25.6	N/A
358.08	37.1 Qp	2.1 / 14.4 / 27.5	26.2	V / 1.0 / 180.0	-19.8	N/A
372.39	37.5 Qp	2.1 / 14.7 / 27.6	26.7	V / 1.0 / 180.0	-19.3	N/A
429.66	34.2 Qp	2.2 / 15.8 / 28.1	24.1	V / 1.0 / 180.0	-21.9	N/A
436.14	30.3 Qp	2.2 / 16.1 / 28.1	20.5	V / 1.0 / 180.0	-25.5	N/A
458.31	43.8 Qp	2.3 / 16.5 / 28.3	34.3	V / 1.0 / 270.0	-11.7	N/A
472.63	36.3 Qp	2.3 / 17.1 / 28.3	27.4	V / 1.0 / 270.0	-18.6	N/A
515.60	45.9 Qp	2.4 / 18.1 / 28.4	38.0	V / 1.0 / 270.0	-8.0	N/A
529.91	39.0 Qp	2.4 / 17.8 / 28.4	30.7	V / 1.0 / 270.0	-15.3	N/A
544.25	42.8 Qp	2.4 / 18.0 / 28.5	34.6	V / 1.0 / 270.0	-11.4	N/A
558.56	40.1 Qp	2.4 / 17.9 / 28.5	31.9	V / 1.0 / 270.0	-14.1	N/A
572.87	47.9 Qp	2.4 / 18.2 / 28.4	40.0	V / 1.0 / 270.0	-6.0	N/A
587.19	40.2 Qp	2.4 / 18.0 / 28.4	32.3	V / 1.0 / 270.0	-13.7	N/A
615.83	35.1 Qp	2.4 / 18.4 / 28.5	27.4	V / 1.0 / 270.0	-18.6	N/A
The following were maximized between 200 and 1000 MHz.						
974.98	46.8 Qp	2.5 / 23.4 / 27.7	44.9	V / 1.0 / 95.0	-9.1	N/A
572.87	48.0 Qp	2.4 / 18.2 / 28.4	40.1	V / 1.0 / 275.0	-5.9	N/A
515.60	46.6 Qp	2.4 / 18.1 / 28.4	38.7	V / 1.0 / 302.0	-7.3	N/A
Cables were maximized.						
229.19	33.9 Qp	1.6 / 10.8 / 27.3	18.9	H / 1.6 / 0.0	-27.1	N/A
329.43	32.0 Qp	2.0 / 14.4 / 27.3	21.2	H / 1.0 / 0.0	-24.8	N/A
286.47	33.5 Qp	1.9 / 13.5 / 27.1	21.7	H / 1.0 / 0.0	-24.3	N/A

Radiated Electromagnetic Emissions



Test Report #: **BC300332 Run 02**
 Test Method: FCC Part 15.209
 EUT Model #: 3MB4
 EUT Serial #: 1
 Manufacturer: Inovonics
 EUT Description: 3M Headset intercom system
 Notes: 3M base 4

Test Area: Pinewood Site 1 (3m)
 Test Date: 18-Aug-2003
 EUT Power: 120 VAC / 60 Hz

Temperature: 23.4 °C
 Relative Humidity: 56 %
 Air Pressure: 81 kPa
 Page: 5 of 7

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
286.47	39.0 Qp	1.9 / 13.5 / 27.1	27.2	H / 1.0 / 90.0	-18.8	N/A
329.43	31.9 Qp	2.0 / 14.4 / 27.3	21.1	H / 1.0 / 90.0	-24.9	N/A
343.75	42.0 Qp	2.0 / 14.6 / 27.4	31.2	H / 1.0 / 90.0	-14.8	N/A
358.08	36.8 Qp	2.1 / 14.4 / 27.5	25.8	H / 1.0 / 90.0	-20.2	N/A
372.39	41.4 Qp	2.1 / 14.7 / 27.6	30.6	H / 1.0 / 90.0	-15.4	N/A
401.02	39.9 Qp	2.2 / 15.1 / 27.9	29.2	H / 1.0 / 90.0	-16.8	N/A
974.98	40.0 Qp	2.5 / 23.4 / 27.7	38.2	H / 1.0 / 90.0	-15.8	N/A
977.85	33.5 Qp	2.5 / 23.5 / 27.8	31.7	H / 1.0 / 90.0	-22.3	N/A
231.90	33.5 Qp	1.6 / 10.8 / 27.3	18.6	H / 1.0 / 90.0	-27.4	N/A
386.70	36.8 Qp	2.1 / 15.3 / 27.8	26.4	H / 1.0 / 90.0	-19.6	N/A
315.11	34.1 Qp	2.0 / 15.6 / 27.2	24.5	H / 1.0 / 180.0	-21.5	N/A
343.75	43.6 Qp	2.0 / 14.6 / 27.4	32.8	H / 1.0 / 180.0	-13.2	N/A
458.31	41.1 Qp	2.3 / 16.5 / 28.3	31.6	H / 1.0 / 180.0	-14.4	N/A
974.98	48.9 Qp	2.5 / 23.4 / 27.7	47.0	H / 1.6 / 180.0	-7.0	N/A
401.02	44.6 Qp	2.2 / 15.1 / 27.9	33.9	H / 1.6 / 180.0	-12.1	N/A
229.19	36.0 Qp	1.6 / 10.8 / 27.3	21.0	H / 1.6 / 270.0	-25.0	N/A
701.76	33.6 Qp	2.4 / 21.2 / 28.1	29.1	H / 1.0 / 270.0	-16.9	N/A
358.08	39.1 Qp	2.1 / 14.4 / 27.5	28.1	H / 1.0 / 270.0	-17.9	N/A
343.75	46.2 Qp	2.0 / 14.6 / 27.4	35.5	H / 1.0 / 270.0	-10.5	N/A
329.43	32.5 Qp	2.0 / 14.4 / 27.3	21.7	H / 1.0 / 270.0	-24.3	N/A
286.47	38.9 Qp	1.9 / 13.5 / 27.1	27.1	H / 1.0 / 270.0	-18.9	N/A
231.90	33.7 Qp	1.6 / 10.8 / 27.3	18.8	H / 1.0 / 270.0	-27.2	N/A
229.19	36.3 Qp	1.6 / 10.8 / 27.3	21.3	H / 1.0 / 270.0	-24.7	N/A
The following were maximized between 200 and 1000 MHz.						
343.75	46.5 Qp	2.0 / 14.6 / 27.4	35.7	H / 1.0 / 160.0	-10.3	N/A
974.98	51.6 Qp	2.5 / 23.4 / 27.7	49.8	H / 1.6 / 200.0	-4.2	N/A

Radiated Electromagnetic Emissions



Test Report #: **BC300332 Run 02**
 Test Method: FCC Part 15.209
 EUT Model #: 3MB4
 EUT Serial #: 1
 Manufacturer: Inovonics
 EUT Description: 3M Headset intercom system
 Notes: 3M base 4

Test Area: Pinewood Site 1 (3m)
 Test Date: 18-Aug-2003
 EUT Power: 120 VAC / 60 Hz

Temperature: 23.4 °C
 Relative Humidity: 56 %
 Air Pressure: 81 kPa
 Page: 6 of 7

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
***** Measurement Summary *****						
401.02	54.7 Qp	2.2 / 15.1 / 27.9	44.1	H / 1.0 / 163.0	-1.9	N/A
974.98	51.6 Qp	2.5 / 23.4 / 27.7	49.8	H / 1.6 / 200.0	-4.2	N/A
572.87	48.0 Qp	2.4 / 18.2 / 28.4	40.1	V / 1.0 / 275.0	-5.9	N/A
515.60	46.6 Qp	2.4 / 18.1 / 28.4	38.7	V / 1.0 / 302.0	-7.3	N/A
165.04	49.1 Qp	1.3 / 12.4 / 27.7	35.1	V / 1.0 / 217.0	-8.4	N/A
163.69	48.9 Qp	1.3 / 12.4 / 27.8	34.8	V / 1.0 / 217.0	-8.7	N/A
57.76	48.1 Qp	0.8 / 9.0 / 28.2	29.7	V / 1.0 / 217.0	-10.3	N/A
161.09	47.3 Qp	1.3 / 12.4 / 27.8	33.2	V / 1.0 / 90.0	-10.3	N/A
343.75	46.5 Qp	2.0 / 14.6 / 27.4	35.7	H / 1.0 / 160.0	-10.3	N/A
56.44	47.6 Qp	0.8 / 9.2 / 28.3	29.4	V / 1.0 / 0.0	-10.6	N/A
630.15	41.8 Qp	2.4 / 19.4 / 28.3	35.2	V / 1.0 / 90.0	-10.8	N/A
166.48	46.6 Qp	1.3 / 12.3 / 27.7	32.4	V / 1.0 / 90.0	-11.1	N/A
167.83	46.4 Qp	1.3 / 12.3 / 27.7	32.2	V / 1.0 / 0.0	-11.3	N/A
169.15	46.1 Qp	1.3 / 12.4 / 27.7	32.2	V / 1.0 / 0.0	-11.3	N/A
544.25	42.8 Qp	2.4 / 18.0 / 28.5	34.6	V / 1.0 / 270.0	-11.4	N/A
601.50	42.1 Qp	2.4 / 18.4 / 28.5	34.4	V / 1.0 / 0.0	-11.6	N/A
458.31	43.8 Qp	2.3 / 16.5 / 28.3	34.3	V / 1.0 / 270.0	-11.7	N/A
53.76	45.6 Qp	0.8 / 9.6 / 28.3	27.7	V / 1.0 / 90.0	-12.3	N/A
139.53	45.4 Qp	1.2 / 12.4 / 27.9	31.0	H / 1.4 / 108.0	-12.5	N/A
52.40	45.1 Qp	0.8 / 9.8 / 28.3	27.4	V / 1.0 / 90.0	-12.6	N/A
85.93	46.8 Qp	0.9 / 7.5 / 28.1	27.1	V / 1.0 / 90.0	-12.9	N/A
86.59	46.6 Qp	0.9 / 7.7 / 28.1	27.0	V / 1.0 / 180.0	-13.0	N/A
84.59	46.4 Qp	0.9 / 7.4 / 28.2	26.5	V / 1.0 / 90.0	-13.5	N/A
587.19	40.5 Qp	2.4 / 18.0 / 28.4	32.5	V / 1.0 / 0.0	-13.5	N/A
85.28	46.1 Qp	0.9 / 7.4 / 28.2	26.3	V / 1.0 / 180.0	-13.7	N/A
558.56	40.1 Qp	2.4 / 17.9 / 28.5	31.9	V / 1.0 / 270.0	-14.1	N/A
139.62	43.4 Qp	1.2 / 12.4 / 27.9	29.0	H / 1.6 / 90.0	-14.5	N/A
83.95	45.1 Qp	0.9 / 7.4 / 28.2	25.2	V / 1.0 / 270.0	-14.8	N/A
81.89	44.9 Qp	0.9 / 7.2 / 28.2	24.9	V / 1.0 / 90.0	-15.1	N/A
644.46	36.7 Qp	2.4 / 20.1 / 28.2	30.9	V / 1.0 / 0.0	-15.1	N/A
529.91	39.0 Qp	2.4 / 17.8 / 28.4	30.7	V / 1.0 / 270.0	-15.3	N/A
372.39	41.4 Qp	2.1 / 14.7 / 27.6	30.6	H / 1.0 / 90.0	-15.4	N/A
138.28	41.5 Qp	1.2 / 12.5 / 27.9	27.2	H / 1.6 / 90.0	-16.3	N/A
140.96	41.0 Qp	1.2 / 12.4 / 27.9	26.6	H / 1.6 / 90.0	-16.9	N/A

Radiated Electromagnetic Emissions



Test Report #: **BC300332 Run 02**
 Test Method: **FCC Part 15.209**
 EUT Model #: **3MB4**
 EUT Serial #: **1**
 Manufacturer: **Inovonics**
 EUT Description: **3M Headset intercom system**
 Notes: **3M base 4**

Test Area: **Pinewood Site 1 (3m)**
 Test Date: **18-Aug-2003**
 EUT Power: **120 VAC / 60 Hz**

Temperature: **23.4** °C
 Relative Humidity: **56** %
 Air Pressure: **81** kPa
 Page: **7** of **7**

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV/m)	(m) (DEG)	FCC B (< 1GHz)	N/A
701.76	33.6 Qp	2.4 / 21.2 / 28.1	29.1	H / 1.0 / 270.0	-16.9	N/A
977.85	38.7 Qp	2.5 / 23.5 / 27.8	36.9	V / 1.0 / 90.0	-17.1	N/A
80.03	43.0 Qp	0.9 / 7.1 / 28.2	22.8	V / 1.0 / 270.0	-17.2	N/A
358.08	39.1 Qp	2.1 / 14.4 / 27.5	28.1	H / 1.0 / 270.0	-17.9	N/A
63.13	41.0 Qp	0.9 / 8.4 / 28.2	22.0	V / 1.0 / 0.0	-18.0	N/A
173.12	39.4 Qp	1.3 / 12.4 / 27.7	25.4	V / 1.0 / 90.0	-18.1	N/A
110.08	41.5 Qp	1.0 / 10.7 / 28.0	25.2	V / 1.0 / 90.0	-18.3	N/A
128.84	39.4 Qp	1.1 / 12.4 / 27.9	25.0	H / 1.0 / 90.0	-18.5	N/A
472.63	36.3 Qp	2.3 / 17.1 / 28.3	27.4	V / 1.0 / 270.0	-18.6	N/A
615.83	35.1 Qp	2.4 / 18.4 / 28.5	27.4	V / 1.0 / 270.0	-18.6	N/A
286.47	39.0 Qp	1.9 / 13.5 / 27.1	27.2	H / 1.0 / 90.0	-18.8	N/A
146.88	38.2 Qp	1.2 / 12.3 / 27.8	23.9	V / 1.0 / 90.0	-19.6	N/A
386.70	36.8 Qp	2.1 / 15.3 / 27.8	26.4	H / 1.0 / 90.0	-19.6	N/A
77.89	40.4 Qp	0.9 / 7.0 / 28.2	20.1	V / 1.0 / 90.0	-19.9	N/A
108.79	38.5 Qp	1.0 / 10.6 / 28.0	22.1	V / 1.0 / 90.0	-21.4	N/A
315.11	34.1 Qp	2.0 / 15.6 / 27.2	24.5	H / 1.0 / 180.0	-21.5	N/A
118.04	36.9 Qp	1.1 / 11.6 / 28.0	21.6	V / 1.0 / 0.0	-21.9	N/A
429.66	34.2 Qp	2.2 / 15.8 / 28.1	24.1	V / 1.0 / 180.0	-21.9	N/A
111.46	37.0 Qp	1.1 / 10.9 / 28.0	20.9	H / 1.6 / 0.0	-22.6	N/A
329.43	32.5 Qp	2.0 / 14.4 / 27.3	21.7	H / 1.0 / 270.0	-24.3	N/A
229.19	36.3 Qp	1.6 / 10.8 / 27.3	21.3	H / 1.0 / 270.0	-24.7	N/A
436.14	30.3 Qp	2.2 / 16.1 / 28.1	20.5	V / 1.0 / 180.0	-25.5	N/A
231.90	33.7 Qp	1.6 / 10.8 / 27.3	18.8	H / 1.0 / 270.0	-27.2	N/A
226.79	32.9 Qp	1.6 / 10.7 / 27.4	17.8	V / 1.0 / 90.0	-28.2	N/A

Radiated Electromagnetic Emissions



Test Report #: **BC300332 Run 1** Test Area: Pinewood Site 1 (3m)
 Test Method: FCC CFR47 15.249(a) Test Date: 18-Aug-2003
 EUT Model #: 3MB4 EUT Power: 120 VAC / 60 Hz
 EUT Serial #: 1
 Manufacturer: Inovonics
 EUT Description: 3M Headset intercom system
 Notes: 3M base 4

Temperature: 23.4 °C
 Relative Humidity: 56 %
 Air Pressure: 81 kPa
 Page: 1 of 3

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV)	(m) (DEG)	15.249(a)	N/A
EUT flat on the table.						
921.52	61.8 Pk	2.5 / 23.0 / 0.0	87.3	V / 1.0 / 167.0	-6.68	N/A
921.52	60.5 Pk	2.5 / 23.0 / 0.0	86.0	H / 1.1 / 310.0	-7.98	N/A
EUT standing on its side.						
921.52	64.2 Pk	2.5 / 23.0 / 0.0	89.8	H / 1.1 / 127.0	-4.18	N/A
921.52	62.2 Pk	2.5 / 23.0 / 0.0	87.7	V / 1.2 / 239.0	-6.28	N/A
Determined Worst Case of EUT is standing on its Side						
R49 changed from 330 ohms to 220 ohms. (Changed to Increase Power to Antenna)						
Mid Channel.						
921.52	66.3 Pk	2.5 / 23.0 / 0.0	91.9	V / 1.2 / 169.0	-2.08	N/A
921.52	66.2 Pk	2.5 / 23.0 / 0.0	91.7	H / 1.0 / 146.0	-2.28	N/A
Low Channel.						
920.32	66.3 Pk	2.5 / 23.1 / 0.0	91.9	H / 1.0 / 151.0	-2.08	N/A
920.32	66.4 Pk	2.5 / 23.1 / 0.0	92.0	V / 1.2 / 169.0	-1.98	N/A
High Channel.						
924.87	65.4 Pk	2.5 / 23.1 / 0.0	91.0	V / 1.2 / 169.0	-2.98	N/A
924.87	65.5 Pk	2.5 / 23.1 / 0.0	91.1	H / 1.2 / 129.0	-2.88	N/A
High Channel Harmonics						
1849.70	56.4 Av	4.4 / 27.9 / 37.8	50.8	V / 1.0 / 64.0	-3.18	N/A
2774.51	45.4 Av	4.4 / 29.8 / 36.7	42.8	V / 1.0 / 62.0	-11.18	N/A
3699.34	37.1 Av	5.2 / 32.2 / 37.0	37.5	V / 1.0 / 62.0	-16.48	N/A
4624.14	55.0 Av	5.3 / 33.3 / 38.9	54.7	V / 1.3 / 74.0	0.72	N/A
Changed C93 and C94 from 4.7pF to 2.7pF.						
4624.14	51.6 Av	5.3 / 33.3 / 38.9	51.3	V / 1.3 / 74.0	-2.68	N/A
5548.96	35.5 Av	6.5 / 34.7 / 37.7	39.1	V / 1.0 / 97.0	-14.88	N/A
6473.66	34.1 Av	8.6 / 35.5 / 40.3	37.9	V / 1.0 / 0.0	-16.08	N/A

Radiated Electromagnetic Emissions



Test Report #: **BC300332 Run 1**
 Test Method: FCC CFR47 15.249(a)
 EUT Model #: 3MB4
 EUT Serial #: 1
 Manufacturer: Inovonics
 EUT Description: 3M Headset intercom system
 Notes: 3M base 4

Test Area: Pinewood Site 1 (3m)
 Test Date: 18-Aug-2003
 EUT Power: 120 VAC / 60 Hz

Temperature: 23.4 °C
 Relative Humidity: 56 %
 Air Pressure: 81 kPa
 Page: 2 of 3

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV)	(m) (DEG)	15.249(a)	N/A
7398.51	34.9 Av	8.2 / 36.7 / 40.0	39.7	V / 1.0 / 0.0	-14.28	N/A
8323.39	43.2 Av	8.9 / 38.0 / 46.0	44.2	V / 1.0 / 0.0	-9.78	N/A
9248.27	43.9 Av	8.3 / 38.8 / 48.1	42.9	V / 1.0 / 0.0	-11.08	N/A
Rechecked after mod.						
1849.70	56.6 Av	4.4 / 27.9 / 37.8	51.1	V / 1.0 / 0.0	-2.88	N/A
2774.51	50.1 Av	4.4 / 29.8 / 36.7	47.5	V / 1.0 / 0.0	-6.48	N/A
3699.34	48.5 Av	5.2 / 32.2 / 37.0	48.8	V / 1.2 / 73.0	-5.18	N/A
No re evaluation of the Fundamental Frequencies was completed for the fact that the knee of the harmonic filter was increased due to this modification to the device under test. By raising the knee of the harmonic filter, there is no change to the RF circuitry in the fundamental range.						
1849.70	58.0 Av	4.4 / 27.9 / 37.8	52.4	H / 1.0 / 146.0	-1.58	N/A
2774.51	50.1 Av	4.4 / 29.8 / 36.7	47.5	H / 1.3 / 197.0	-6.48	N/A
3699.34	44.1 Av	5.2 / 32.2 / 37.0	44.4	H / 1.0 / 132.0	-9.58	N/A
4624.14	49.7 Av	5.3 / 33.3 / 38.9	49.4	H / 1.7 / 147.0	-4.58	N/A
5548.96	36.1 Av	6.5 / 34.7 / 37.7	39.7	H / 1.5 / 153.0	-14.28	N/A
6473.66	36.7 Av	8.6 / 35.5 / 40.3	40.5	H / 1.6 / 98.0	-13.48	N/A
7398.47	39.4 Av	8.2 / 36.7 / 40.0	44.2	H / 1.7 / 112.0	-9.78	N/A
8323.39	43.2 Av	8.9 / 38.0 / 46.0	44.2	H / 1.0 / 0.0	-9.78	N/A
9248.27	43.9 Av	8.3 / 38.8 / 48.1	42.9	H / 1.0 / 0.0	-11.08	N/A
Mid Channel.						
1842.98	58.8 Av	4.3 / 27.8 / 37.7	53.2	H / 1.0 / 136.0	-0.78	N/A
2764.43	50.1 Av	4.4 / 29.8 / 37.1	47.1	H / 1.6 / 105.0	-6.88	N/A
3685.89	49.8 Av	5.2 / 32.2 / 37.5	49.7	H / 2.0 / 81.0	-4.28	N/A
5528.80	43.6 Av	6.5 / 34.7 / 37.7	47.2	H / 1.5 / 45.0	-6.78	N/A
4607.34	47.8 Av	5.3 / 33.3 / 38.9	47.4	H / 1.7 / 45.0	-6.58	N/A
6450.15	36.0 Av	8.6 / 35.4 / 40.2	39.9	H / 1.5 / 61.0	-14.08	N/A
7371.61	39.3 Av	8.3 / 36.7 / 40.2	44.1	H / 1.7 / 95.0	-9.88	N/A
8293.51	43.4 Av	8.9 / 38.1 / 45.9	44.5	H / 1.7 / 95.0	-9.48	N/A
9214.51	44.1 Av	8.3 / 38.8 / 48.1	43.2	H / 1.7 / 95.0	-10.78	N/A
9214.51	44.0 Av	8.3 / 38.8 / 48.1	43.0	V / 1.0 / 0.0	-10.98	N/A
8293.51	43.1 Av	8.9 / 38.1 / 45.9	44.2	V / 1.0 / 0.0	-9.78	N/A
7371.61	37.4 Av	8.3 / 36.7 / 40.2	42.2	V / 1.0 / 75.0	-11.78	N/A

Radiated Electromagnetic Emissions

Test Report #: **BC300332 Run 1** Test Area: Pinewood Site 1 (3m)
 Test Method: FCC CFR47 15.249(a) Test Date: 18-Aug-2003
 EUT Model #: 3MB4 EUT Power: 120 VAC / 60 Hz
 EUT Serial #: 1
 Manufacturer: Inovonics
 EUT Description: 3M Headset intercom system
 Notes: 3M base 4

Temperature: 23.4 °C
 Relative Humidity: 56 %
 Air Pressure: 81 kPa
 Page: 3 of 3

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dBm) (dB)	(dBuV)	(m) (DEG)	15.249(a)	N/A
6450.15	36.4 Av	8.6 / 35.4 / 40.2	40.2	V / 1.0 / 114.0	-13.78	N/A
5528.80	38.1 Av	6.5 / 34.7 / 37.7	41.6	V / 1.1 / 72.0	-12.38	N/A
4607.34	45.9 Av	5.3 / 33.3 / 38.9	45.5	V / 1.3 / 137.0	-8.48	N/A
3685.89	48.8 Av	5.2 / 32.2 / 37.5	48.7	V / 1.3 / 111.0	-5.28	N/A
2764.43	47.2 Av	4.4 / 29.8 / 37.1	44.3	V / 1.3 / 0.0	-9.68	N/A
1842.98	51.8 Av	4.3 / 27.8 / 37.7	46.2	V / 1.6 / 97.0	-7.78	N/A
Low Channel.						
1840.57	50.0 Av	4.3 / 27.8 / 37.9	44.2	V / 2.0 / 0.0	-9.78	N/A
2760.82	51.3 Av	4.4 / 29.8 / 37.0	48.4	V / 1.6 / 71.0	-5.58	N/A
3681.08	49.6 Av	5.2 / 32.2 / 37.6	49.4	V / 1.6 / 74.0	-4.58	N/A
4601.33	45.6 Av	5.3 / 33.3 / 38.9	45.1	V / 1.7 / 55.0	-8.88	N/A
5521.58	38.2 Av	6.5 / 34.7 / 37.7	41.7	V / 1.4 / 82.0	-12.28	N/A
6441.78	39.5 Av	8.6 / 35.4 / 40.1	43.4	V / 1.5 / 82.0	-10.58	N/A
7362.02	37.5 Av	8.3 / 36.7 / 40.2	42.3	V / 1.5 / 82.0	-11.68	N/A
8282.27	43.4 Av	8.9 / 38.1 / 45.9	44.4	V / 1.0 / 0.0	-9.58	N/A
9202.52	44.2 Av	8.3 / 38.7 / 48.0	43.2	V / 1.0 / 0.0	-10.78	N/A
9202.52	44.3 Av	8.3 / 38.7 / 48.0	43.3	H / 1.0 / 0.0	-10.68	N/A
8282.27	43.2 Av	8.9 / 38.1 / 45.9	44.3	H / 1.0 / 0.0	-9.68	N/A
7362.02	40.1 Av	8.3 / 36.7 / 40.2	44.9	H / 1.8 / 90.0	-9.08	N/A
6441.76	38.1 Av	8.6 / 35.4 / 40.1	42.0	H / 1.5 / 101.0	-11.98	N/A
5521.58	43.8 Av	6.5 / 34.7 / 37.7	47.2	H / 1.5 / 43.0	-6.78	N/A
4601.33	45.2 Av	5.3 / 33.3 / 38.9	44.8	H / 1.7 / 83.0	-9.18	N/A
3681.08	49.1 Av	5.2 / 32.2 / 37.6	48.9	H / 2.1 / 83.0	-5.08	N/A
2760.82	51.2 Av	4.4 / 29.8 / 37.0	48.3	H / 2.3 / 15.0	-5.68	N/A
1840.57	55.7 Av	4.3 / 27.8 / 37.9	50.0	H / 2.3 / 127.0	-3.98	N/A

Radiated Electromagnetic Emissions



Test Report #: **BC300332 Run 1**
 Test Method: FCC CFR47 15.249(c)
 EUT Model #: 3MB4
 EUT Serial #: 1
 Manufacturer: Inovonics
 EUT Description: 3M Headset intercom system
 Notes: 3M base 4

Test Area: Pinewood Site 1 (3m)
 Test Date: 18-Aug-2003
 EUT Power: 120 VAC / 60 Hz

Temperature: 23.4 °C
 Relative Humidity: 56 %
 Air Pressure: 81 kPa
 Page: 1 of 1

Level Key	
Pk – Peak	Nb – Narrow Band
Qp – QuasiPeak	Bb – Broad Band
Av - Average	

FREQ	LEVEL	CABLE / ANT / PREAMP	FINAL	POL / HGT / AZ	DELTA1 (dB)	DELTA2 (dB)
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dBuV)	(m) (DEG)	15.249(c)/15.209	N/A
2923.37	59.0 Av	4.1 / 30.2 / 37.0	56.2	H / 1.5 / 136.0	2.22	N/A
Changed R49 from 220 to 330 ohms.						
2923.38	58.9 Av	4.1 / 30.2 / 37.0	56.1	H / 1.5 / 136.0	2.12	N/A
Disconnected the antenna.						
2923.38	58.5 Av	4.1 / 30.2 / 37.0	55.7	H / 1.5 / 136.0	1.72	N/A
Added a bypass cap to the power supply.						
2923.38	58.9 Av	4.1 / 30.2 / 37.0	56.1	H / 1.5 / 37.0	2.12	N/A
2923.38	58.8 Av	4.1 / 30.2 / 37.0	56.0	H / 1.5 / 37.0	2.02	N/A
2923.38	57.9 Av	4.1 / 30.2 / 37.0	55.1	H / 1.5 / 45.0	1.12	N/A
Different ground for cap.						
2923.38	56.6 Av	4.1 / 30.2 / 37.0	53.8	H / 1.5 / 45.0	-0.18	N/A
Removed L12						
2923.38	57.0 Av	4.1 / 30.2 / 37.0	54.2	H / 1.5 / 45.0	0.22	N/A
Grounded the shield.						
2923.33	56.9 Av	4.1 / 30.2 / 37.0	54.1	H / 1.5 / 45.0	0.12	N/A
Reversed all modifications except for the R49 Modification to increase output power at the fundamental and added two solder beads to the can.						
2923.37	56.7 Av	4.1 / 30.2 / 37.0	53.9	H / 1.6 / 101.0	-0.1	N/A
In accordance to 15.249(c), frequency falling out of the ranges listed in 15.249(a) except for harmonics shall be attenuated by 50dB from the carrier or meet the requirements of 15.209 whichever is the lesser attenuation. This emission is created by the receiver LO and meets the requirements of 15.209.						

Project Report

Begin Date: 8/26/2003

Technician Mike Spataro

Project: BC300332

Capital Asset ID	Manufacturer	Model #	Serial #	Description	Test Performed	Cal Date	Cal Due
192	RHODE & SCHWARZ	ESH2-Z5	830364/002	LISN 50 ohm/50uH 3 line (1kHz - 30 MHz)	C Conducted Emissions	3/4/2003	3/4/2004
198	Hewlett-Packard	11947A	3107A01984	Transient Limiter	C Conducted Emissions	9/18/2002	9/18/2003
199	RHODE & SCHWARZ	ESH3	872318/036	Low Frequency Receiver (9 kHz - 30 MHz)	C Conducted Emissions	10/31/2002	10/31/2003
106	TENSOR	4105	2020	Ridged Guide Antenna 1-18GHz	R Radiated Emissions	7/11/2003	7/11/2004
138	EMC TEST SYSTEMS	3109	3142	Biconical Antenna 30-3000MHz	R Radiated Emissions	9/30/2002	9/30/2003
202	Avantek	AWT-18037	1002	RF Pre-Amplifier (8-18 GHz)	R Radiated Emissions	4/23/2003	4/23/2004
203	Avantek	AFT97-8434-10F	1007	RF Pre-Amplifier (4-8 GHz)	R Radiated Emissions	4/23/2003	4/23/2004
209	Hewlett-Packard	85662A	2403A08749	Display Section	R Radiated Emissions	10/21/2002	10/21/2003
210	Hewlett-Packard	8566B	2410A00154	Spectrum Analyzer (dc-22 GHz)	R Radiated Emissions	10/21/2002	10/21/2003
211	Hewlett-Packard	85650A	2043A00256	Quasi Peak Adapter (set 1)	R Radiated Emissions	9/17/2003	9/17/2004
213	Mini-Circuits Lab	ZHL-42	N052792-2	Amplifier	R Radiated Emissions	6/20/2003	6/20/2004
217	EMCO	3146	9203-3376	Log Periodic Antenna	R Radiated Emissions	9/11/2002	9/11/2003
248	Hewlett-Packard	8447F	3113A05545	9 kHz- 1.3GHz Pre Amp	R Radiated Emissions	6/5/2003	6/5/2004

Appendix B


Test Plan
and
Constructional Data Form
To be supplied by Customer

Appendix C

Measurement Protocol

And

Test Procedures

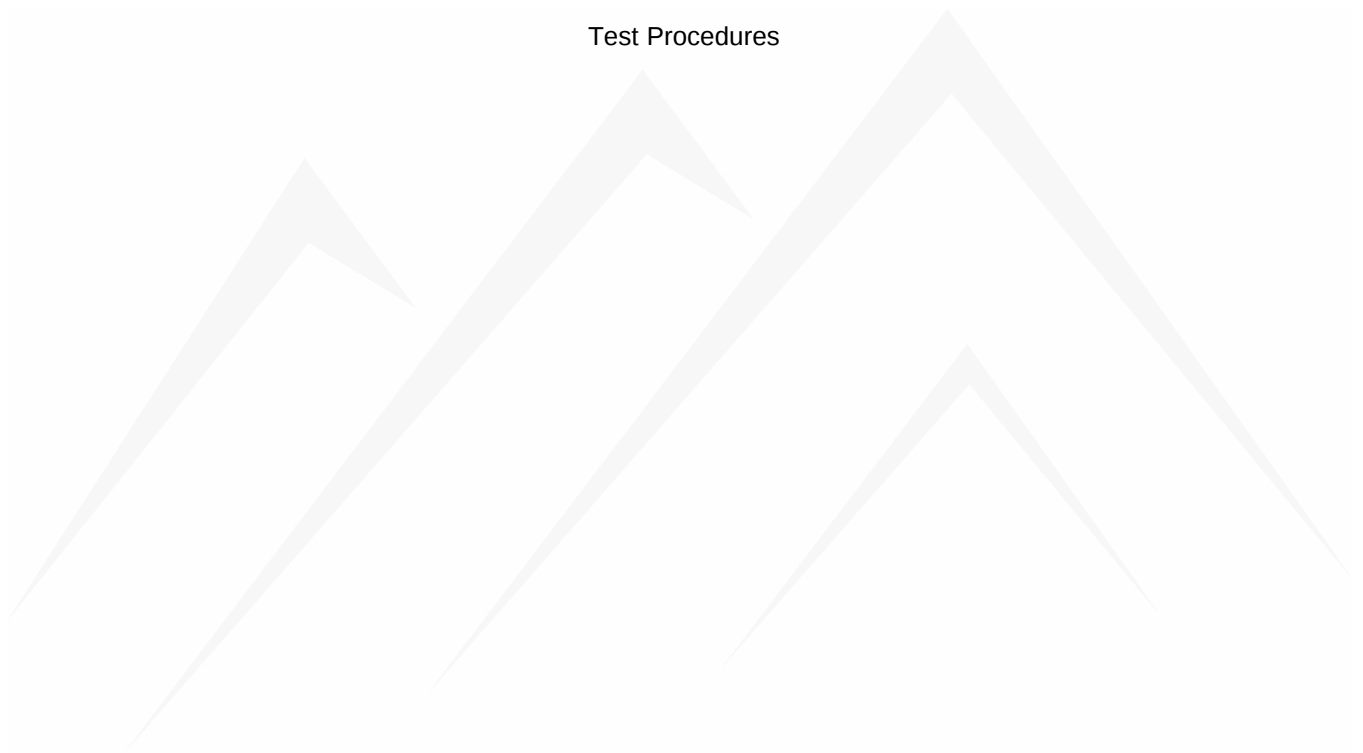

MEASUREMENT PROTOCOL

GENERAL INFORMATION

Test Methodology

Conducted and radiated emission testing is performed according to the procedures in ANSI C63.4 & CNS13438.

Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

CONDUCTED EMISSIONS

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the applicable limit.

To convert between dB μ V and μ V, the following conversions apply:

- $\text{dB}\mu\text{V} = 20(\log \mu\text{V})$
- $\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$

RADIATED EMISSIONS

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the spectrum analyzer (Level dB μ V) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has the applicable limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets in Attachment B. The amplifier gain is automatically accounted for by using an analyzer offset.

Example: At a Test Frequency of 30 MHz, with a peak reading on the spectrum analyzer or measuring receiver of 14 dBmV:

Measured Level	+	Transducer & Cable Loss factor	=	Corrected Reading	Specification Limit	-	Corrected Reading	=	Delta Specification
(dB μ V)		(dB)		(dB μ V/m)	(dB μ V/m)		(dB μ V/m)		
14.0		14.9		28.9	40.0		28.9		-11.1

DETAILS OF TEST PROCEDURES

General Standard Information

The test methods used comply with ANSI C63.4-1992 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

Conducted Emissions

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. In some cases, a pre-scan using a spectrum analyzer is initially performed on the units comprising the system under test to locate the highest emissions. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver or spectrum analyzer with quasi-peak and average detection and recorded on the data sheets.

Radiated Emissions

Radiated emissions from the EUT are measured in the frequency range of 30 to 22GHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection and measurements above 1000 MHz are made with a 1 MHz/6 dB bandwidth and peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3, 10 or 30 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees.

Radiated Emissions Diagram:

