

#01_WCDMA II_RMC 12.2Kbps_Left Side_10mm_Ch9538

Communication System: WCDMA; Frequency: 1907.600 MHz

Medium: HSL_1900_240103 Medium parameters used: $f = 1907.600$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.2, 7.21, 7.59); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10457-AAB

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.546 W/kg; SAR (10g) = 0.304 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.595 W/kg; SAR (8g) = 0.360 W/kg; SAR (10g) = 0.333 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

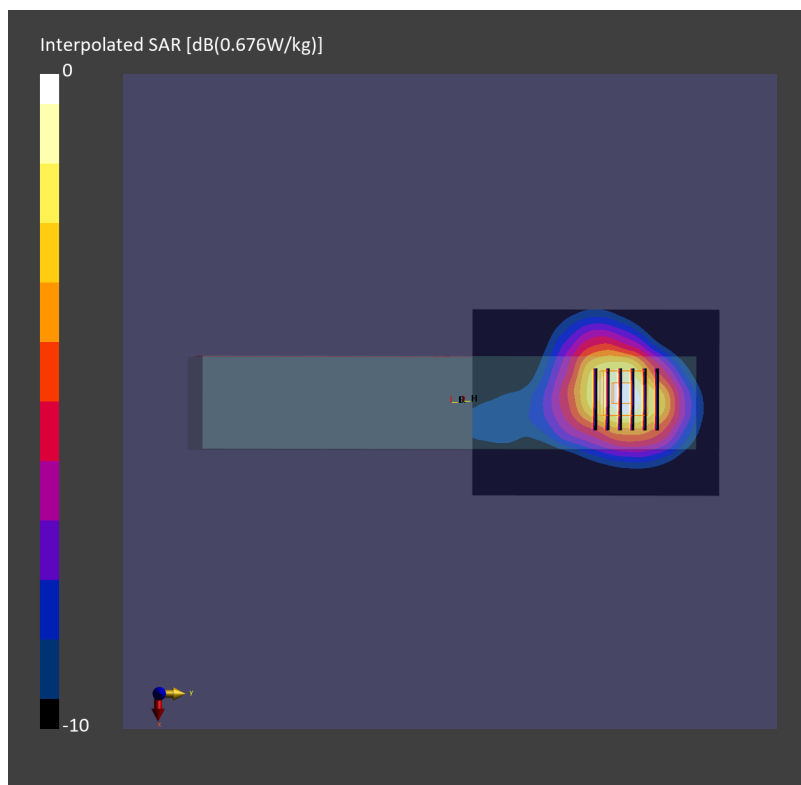

#02_WCDMA IV_RMC 12.2Kbps_Left Side_10mm_Ch1513

Communication System: WCDMA; Frequency: 1752.600 MHz

Medium: HSL_1750_240104 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.42, 7.42, 7.85); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10457-AAB

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.504 W/kg; SAR (10g) = 0.300 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.18 dB

SAR (1g) = 0.570 W/kg; SAR (8g) = 0.359 W/kg; SAR (10g) = 0.334 W/kg

Smallest distance from peaks to all points 3 dB below = 15.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.3 %

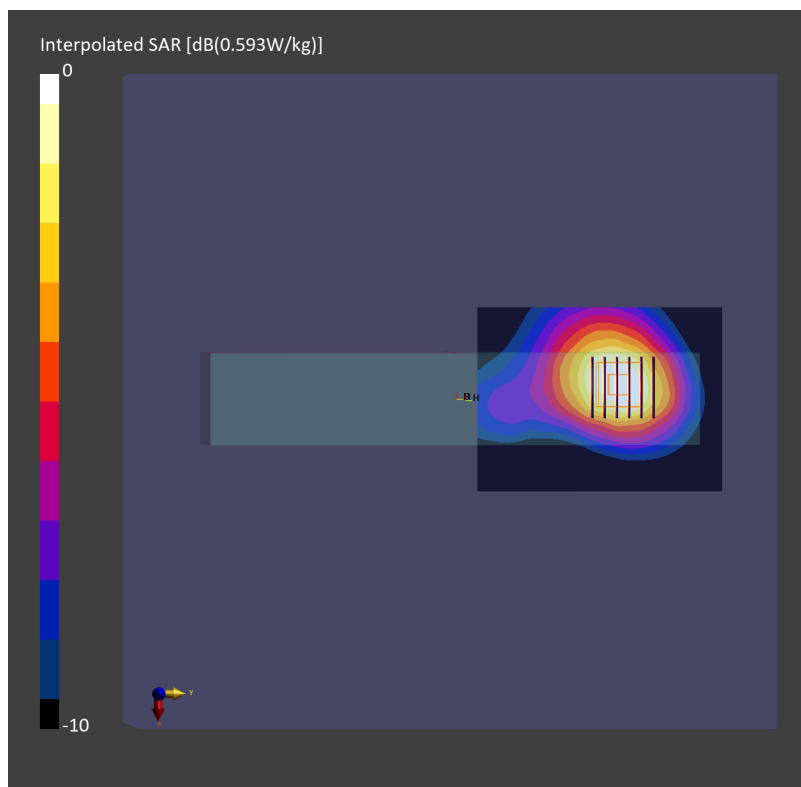

#03_WCDMA V_RMC 12.2Kbps_Left Side_10mm_Ch4182

Communication System: WCDMA; Frequency: 836.400 MHz

Medium: HSL_835_231218 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(9.84, 9.84, 9.84); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.303 W/kg; SAR (10g) = 0.206 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.304 W/kg; SAR (8g) = 0.217 W/kg; SAR (10g) = 0.206 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.3 %

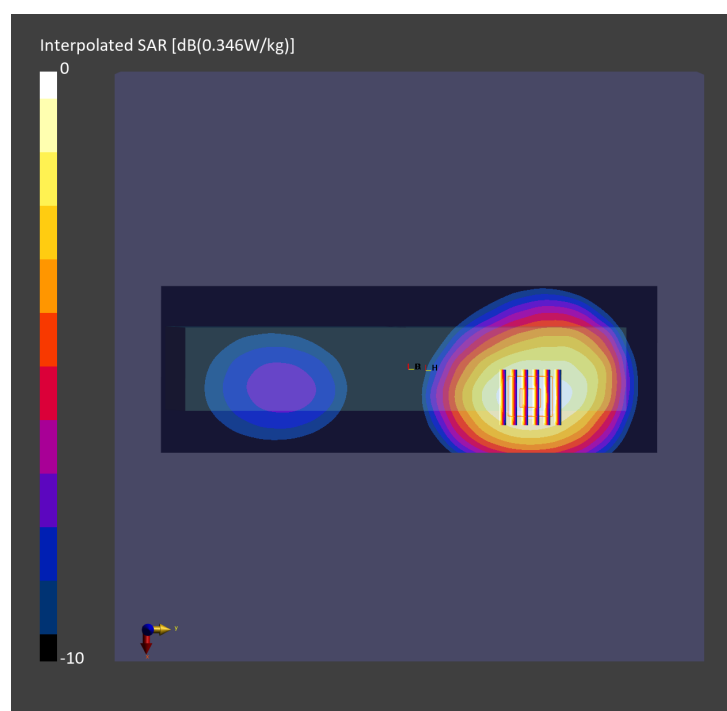

#04_LTE Band 7_20M_QPSK_1_0_Left Side_10mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL_2600_240102 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.8, 6.8, 7.12); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.564 W/kg; SAR (10g) = 0.298 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.11 dB

SAR (1g) = 0.590 W/kg; SAR (8g) = 0.340 W/kg; SAR (10g) = 0.314 W/kg

Smallest distance from peaks to all points 3 dB below = 16.3 mm

Ratio of SAR at M2 to SAR at M1 = 80.1 %

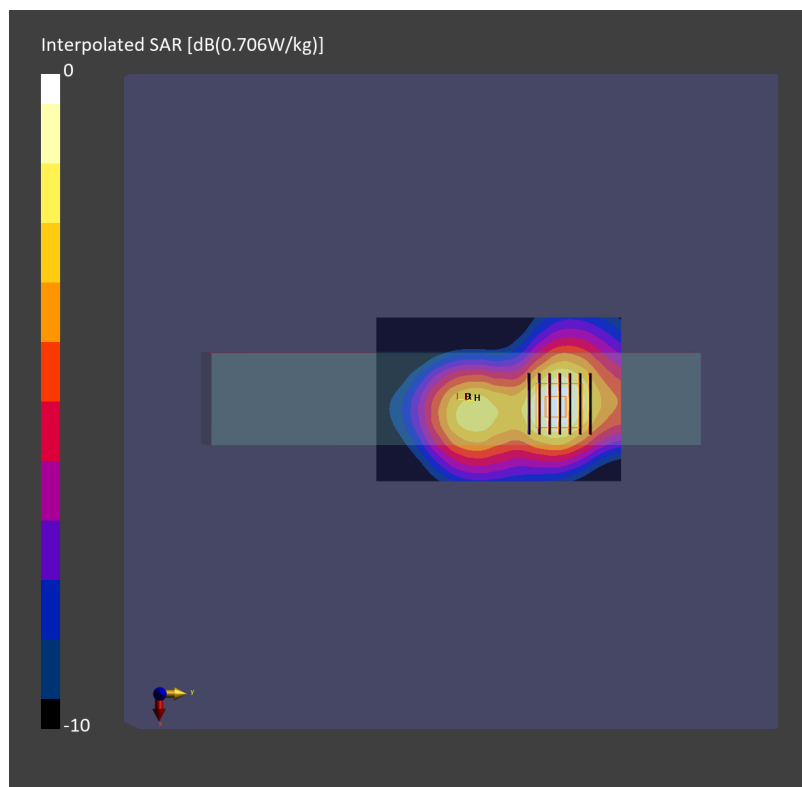

#05_LTE Band 12_10M_QPSK_1_0_Left Side_10mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_750_231215 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.870$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(10.06, 10.06, 10.06); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 300.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.180 W/kg; SAR (10g) = 0.119 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.185 W/kg; SAR (8g) = 0.119 W/kg; SAR (10g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below = 16.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

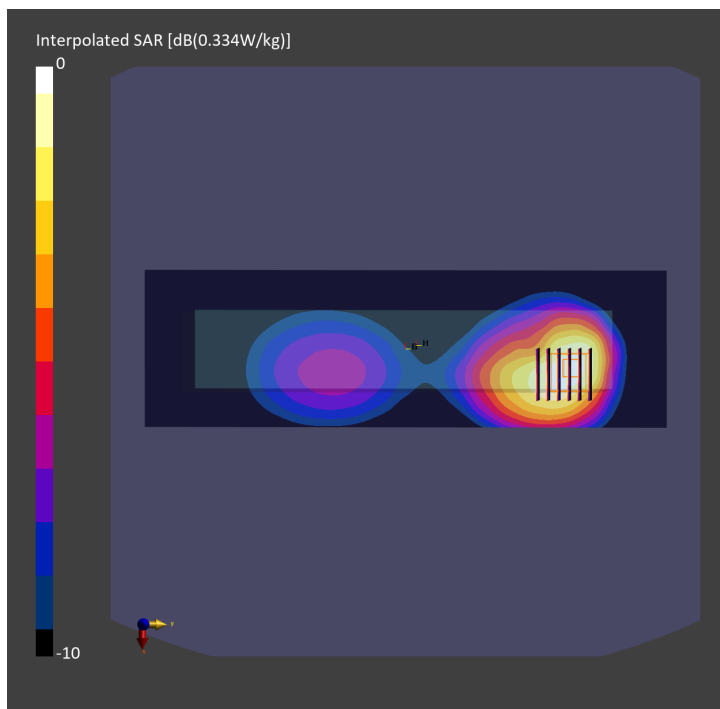

#06_LTE Band 13_10M_QPSK_1_0_Left Side_10mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_750_231215 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(10.06, 10.06, 10.06); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 300.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.435 W/kg; SAR (10g) = 0.300 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.459 W/kg; SAR (8g) = 0.321 W/kg; SAR (10g) = 0.305 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 86.4 %

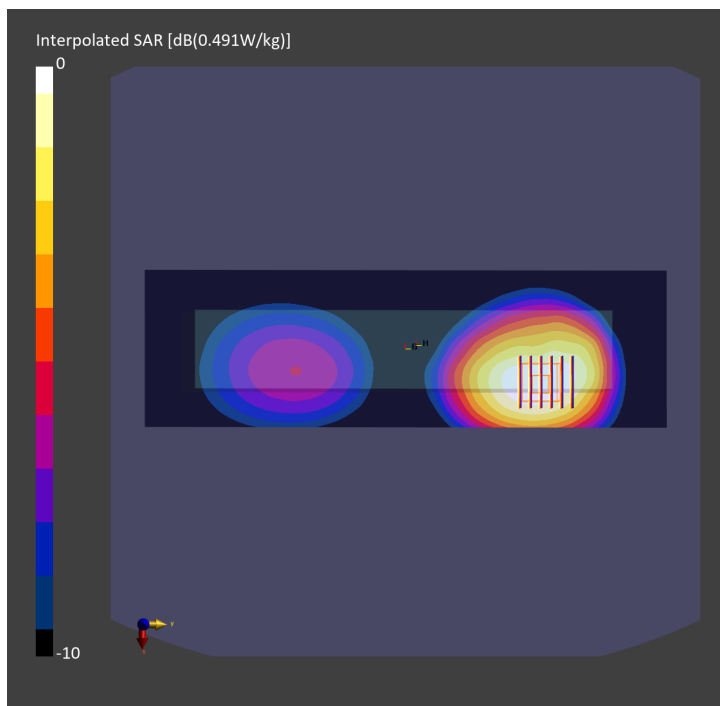

#07_LTE Band 14_10M_QPSK_1_0_Left Side_10mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_750_231215 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(10.06, 10.06, 10.06); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 300.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.460 W/kg; SAR (10g) = 0.317 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.457 W/kg; SAR (8g) = 0.324 W/kg; SAR (10g) = 0.308 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 86.5 %

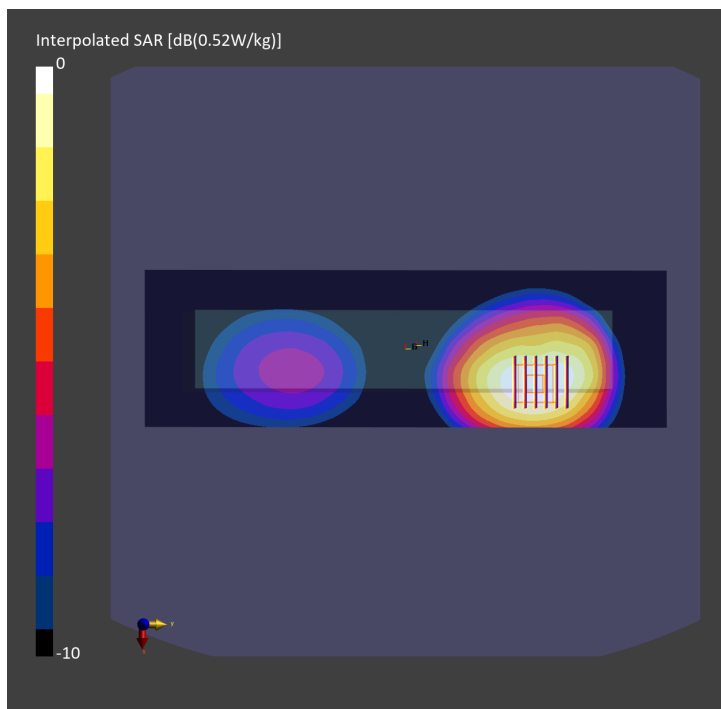

#08_LTE Band 25_20M_QPSK_1_0_Left Side_10mm_Ch26590

Communication System: LTE-FDD ; Frequency: 1905.000 MHz

Medium: HSL_1900_231216 Medium parameters used: $f=1905.000$ MHz; $\sigma=1.43$ S/m; $\epsilon_r=40.0$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(7.92, 7.92, 7.92); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.560 W/kg; SAR (10g) = 0.309 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.00 dB

SAR (1g) = 0.573 W/kg; SAR (8g) = 0.344 W/kg; SAR (10g) = 0.319 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 82.4 %

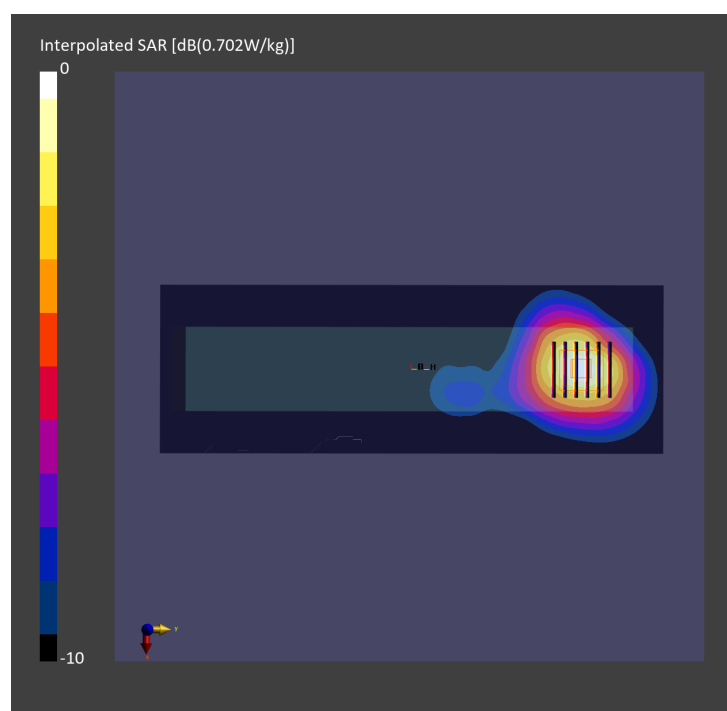

#09_LTE Band 26_15M_QPSK_1_0_Left Side_10mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_835_231218 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(9.84, 9.84, 9.84); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10181-CAF

Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.469 W/kg; SAR (10g) = 0.320 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.469 W/kg; SAR (8g) = 0.334 W/kg; SAR (10g) = 0.318 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.1 %

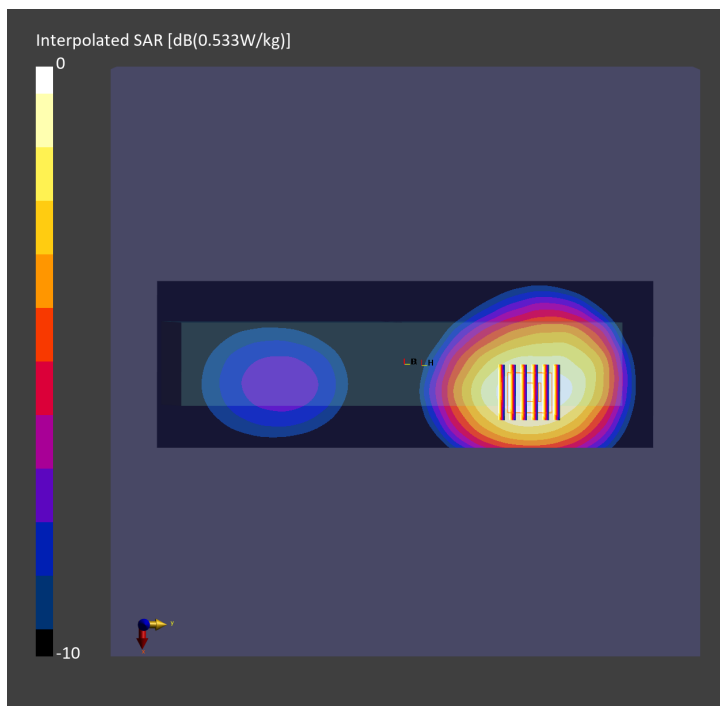

#10_LTE Band 30_10M_QPSK_1_0_Left Side_10mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_2300_231214 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.66$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(7.66, 7.66, 7.66); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (80.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.481 W/kg; SAR (10g) = 0.259 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.489 W/kg; SAR (8g) = 0.284 W/kg; SAR (10g) = 0.262 W/kg

Smallest distance from peaks to all points 3 dB below = 15.7 mm

Ratio of SAR at M2 to SAR at M1 = 81.9 %

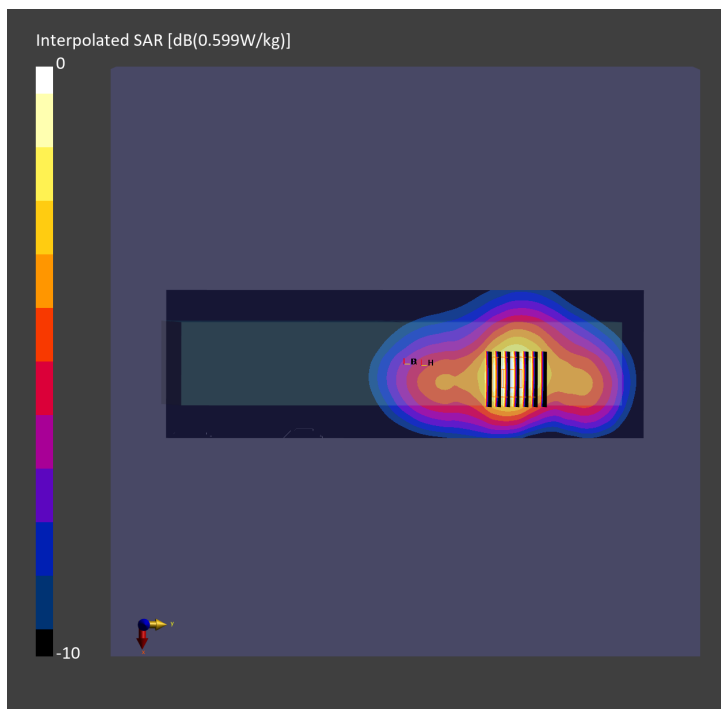

#11_LTE Band 41 _20M_QPSK_1_0_Left Side_10mm_Ch41490

Communication System: LTE-TDD; Frequency: 2680.000 MHz

Medium: HSL_2600_231221 Medium parameters used: $f = 2680.000$ MHz; $\sigma = 2.05$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.8, 6.8, 7.12); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.460 W/kg; SAR (10g) = 0.244 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.473 W/kg; SAR (8g) = 0.275 W/kg; SAR (10g) = 0.254 W/kg

Smallest distance from peaks to all points 3 dB below = 18.4 mm

Ratio of SAR at M2 to SAR at M1 = 78.9 %

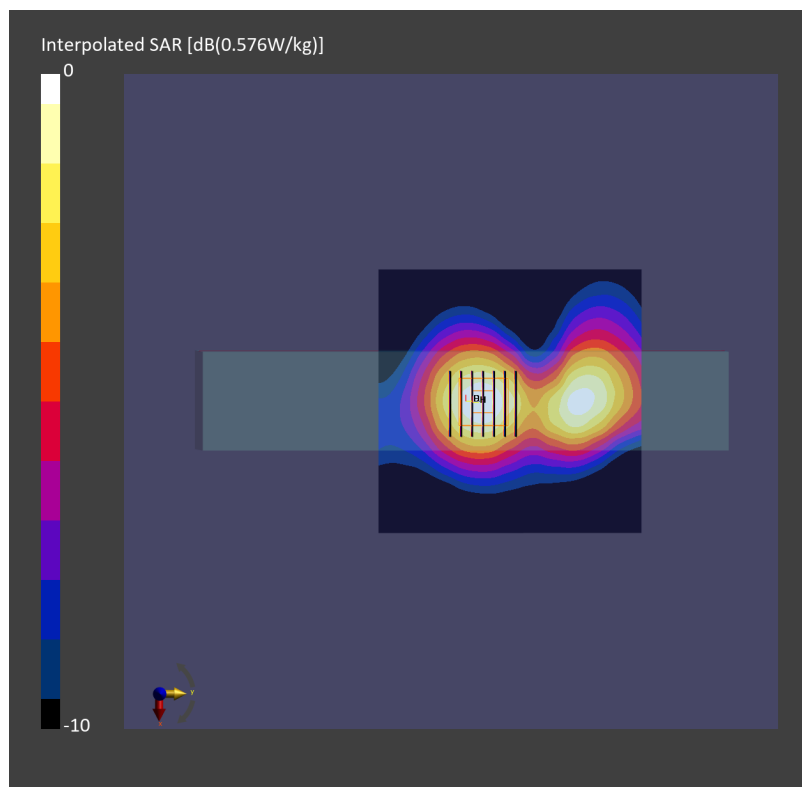

#12_LTE Band 48_20M_QPSK_1_0_Right Side_10mm_Ch56150

Communication System: LTE-TDD ; Frequency: 3641.000 MHz

Medium: HSL_3700_231225 Medium parameters used: $f = 3641.000$ MHz; $\sigma = 3.09$ S/m; $\epsilon_r = 38.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.54, 6.51, 6.82); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

Area Scan (80.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.449 W/kg; SAR (10g) = 0.207 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.00 dB

SAR (1g) = 0.467 W/kg; SAR (8g) = 0.233 W/kg; SAR (10g) = 0.211 W/kg

Smallest distance from peaks to all points 3 dB below = 14.6 mm

Ratio of SAR at M2 to SAR at M1 = 73.7 %

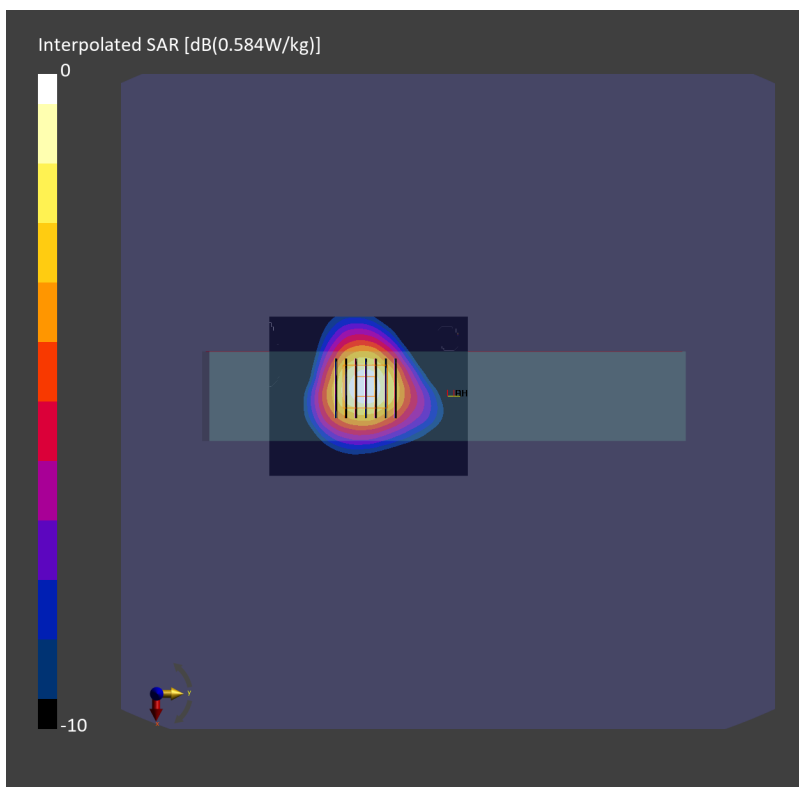

#13_LTE Band 66_20M_QPSK_1_0_Left Side_10mm_Ch132572

Communication System: LTE-FDD ; Frequency: 1770.000 MHz

Medium: HSL_1750_231217 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(8.25, 8.25, 8.25); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.495 W/kg; SAR (10g) = 0.282 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.506 W/kg; SAR (8g) = 0.313 W/kg; SAR (10g) = 0.292 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

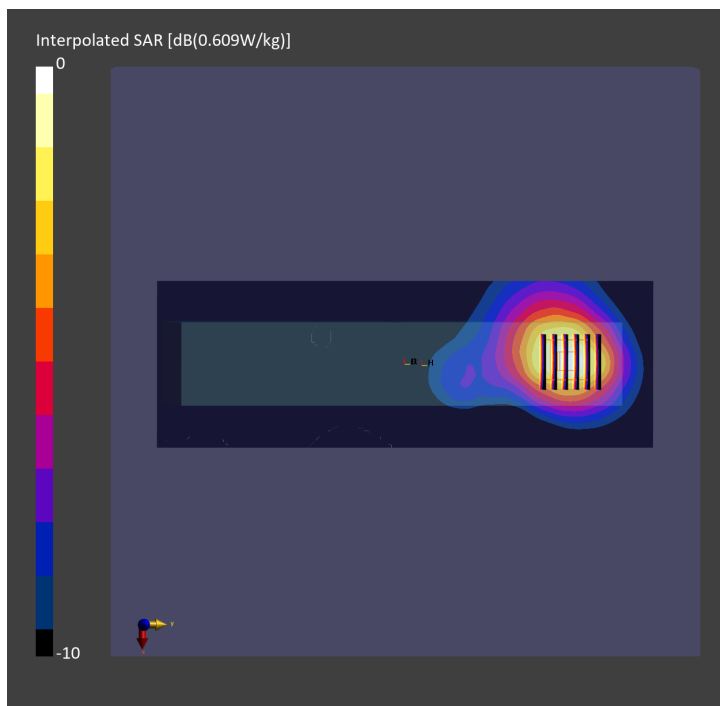

#14_LTE Band 71_20M_QPSK_1_0_Left Side_10mm_Ch133297

Communication System: LTE-FDD ; Frequency: 680.500 MHz

Medium: HSL_750_231215 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.854$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(10.06, 10.06, 10.06); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.187 W/kg; SAR (10g) = 0.126 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.190 W/kg; SAR (8g) = 0.124 W/kg; SAR (10g) = 0.117 W/kg

Smallest distance from peaks to all points 3 dB below = 17.8 mm

Ratio of SAR at M2 to SAR at M1 = 82.5 %

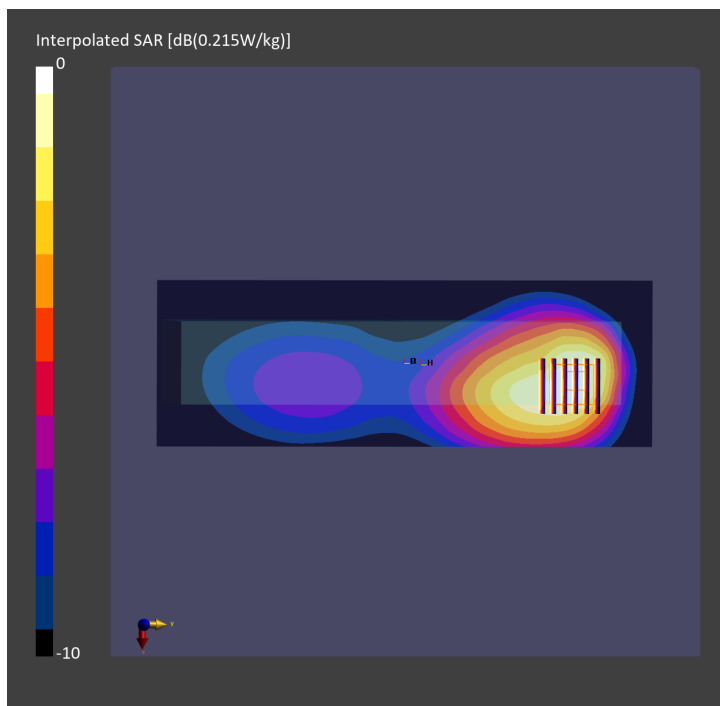

#15_FR1 n7_40M_BPSK_1_1_Left Side_10mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_2600_231214 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(7.32, 7.32, 7.32); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (80.0 mm x 280.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.580 W/kg; SAR (10g) = 0.306 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.10 dB

SAR (1g) = 0.583 W/kg; SAR (8g) = 0.333 W/kg; SAR (10g) = 0.307 W/kg

Smallest distance from peaks to all points 3 dB below = 15.6 mm

Ratio of SAR at M2 to SAR at M1 = 80.7 %

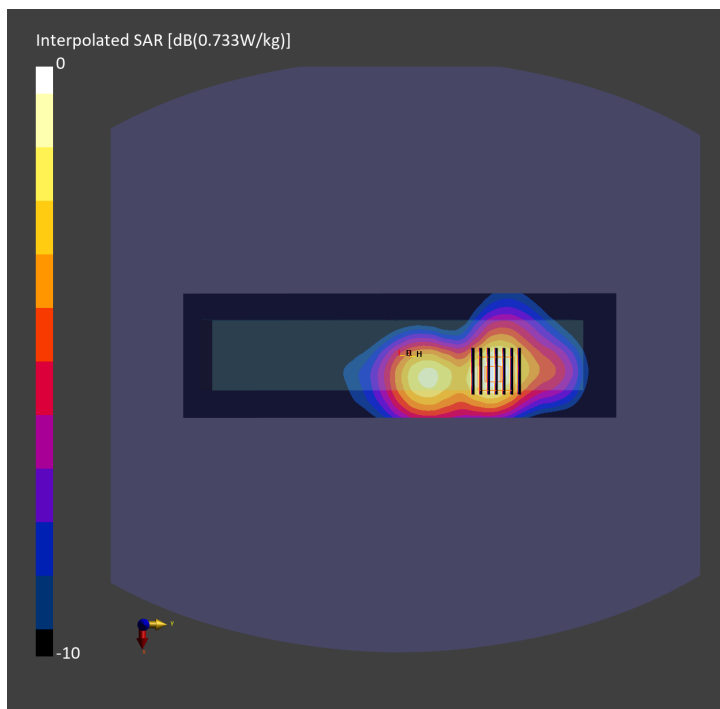

#16_FR1 n12_15M_BPSK_1_1_Left Side_10mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_750_231219 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.880$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(10.06, 10.06, 10.06); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.231 W/kg; SAR (10g) = 0.159 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.228 W/kg; SAR (8g) = 0.160 W/kg; SAR (10g) = 0.152 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 84.1 %

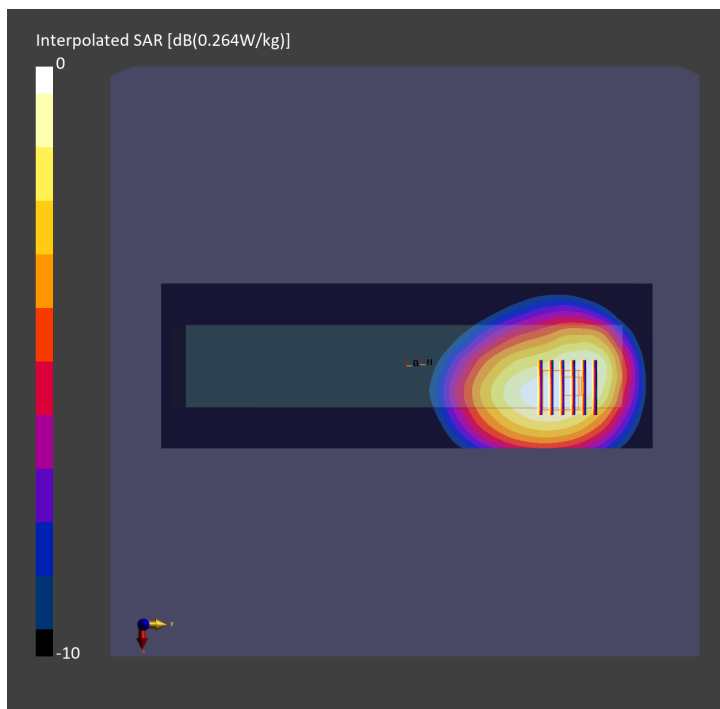

#17_FR1 n13_10M_BPSK_1_1_Left Side_10mm_Ch156400

Communication System: 5G NR; Frequency: 782.000 MHz

Medium: HSL_750_231219 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(10.06, 10.06, 10.06); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.354 W/kg; SAR (10g) = 0.241 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.354 W/kg; SAR (8g) = 0.248 W/kg; SAR (10g) = 0.236 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 85.6 %

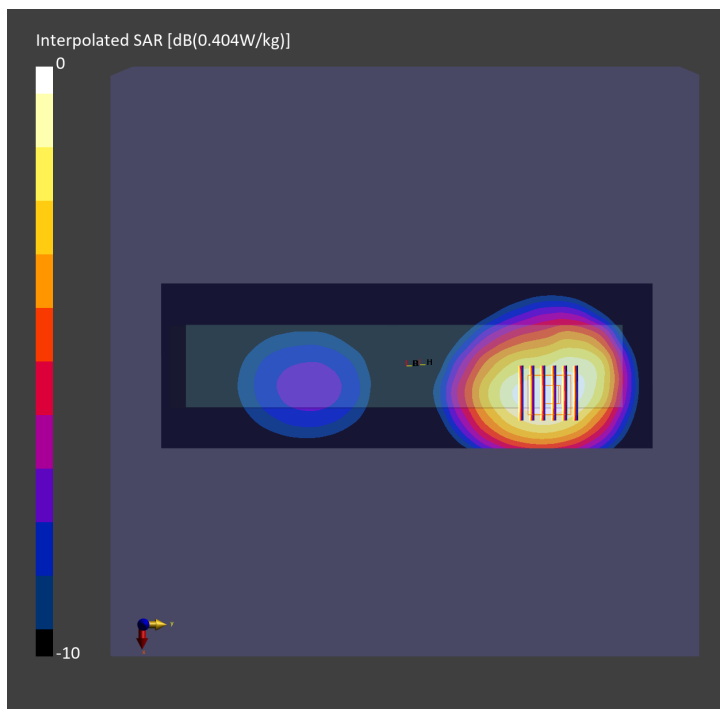

#18_FR1 n14_10M_BPSK_1_1_Left Side_10mm_Ch158600

Communication System: 5G NR ; Frequency: 793.000 MHz

Medium: HSL_750_231219 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(10.06, 10.06, 10.06); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.370 W/kg; SAR (10g) = 0.252 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.365 W/kg; SAR (8g) = 0.257 W/kg; SAR (10g) = 0.244 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 86.4 %

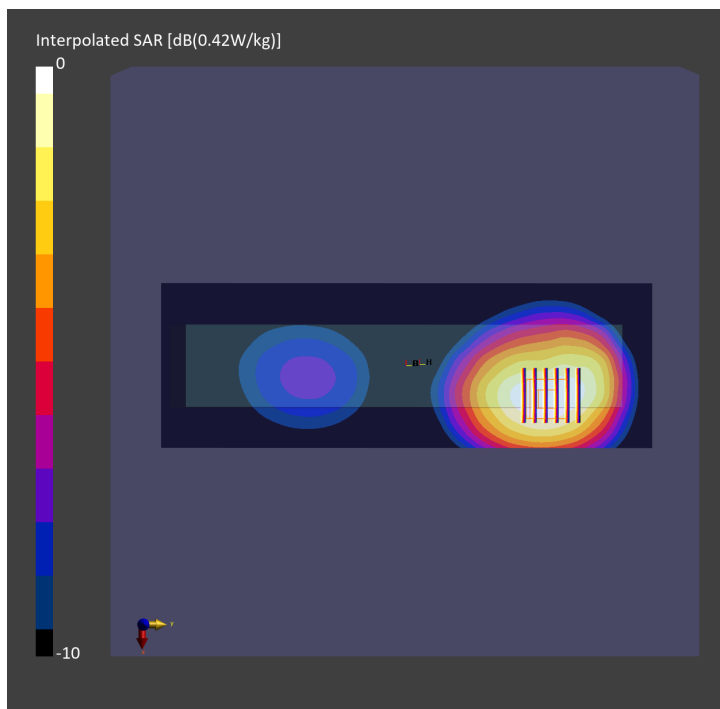

#19_FR1 n25_40M_BPSK_1_1_Left Side_10mm_Ch379000

Communication System: 5G NR; Frequency: 1895.000 MHz

Medium: HSL_1900_240103 Medium parameters used: $f = 1895.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.2, 7.21, 7.59); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.433 W/kg; SAR (10g) = 0.252 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.17 dB

SAR (1g) = 0.488 W/kg; SAR (8g) = 0.300 W/kg; SAR (10g) = 0.279 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 82.9 %

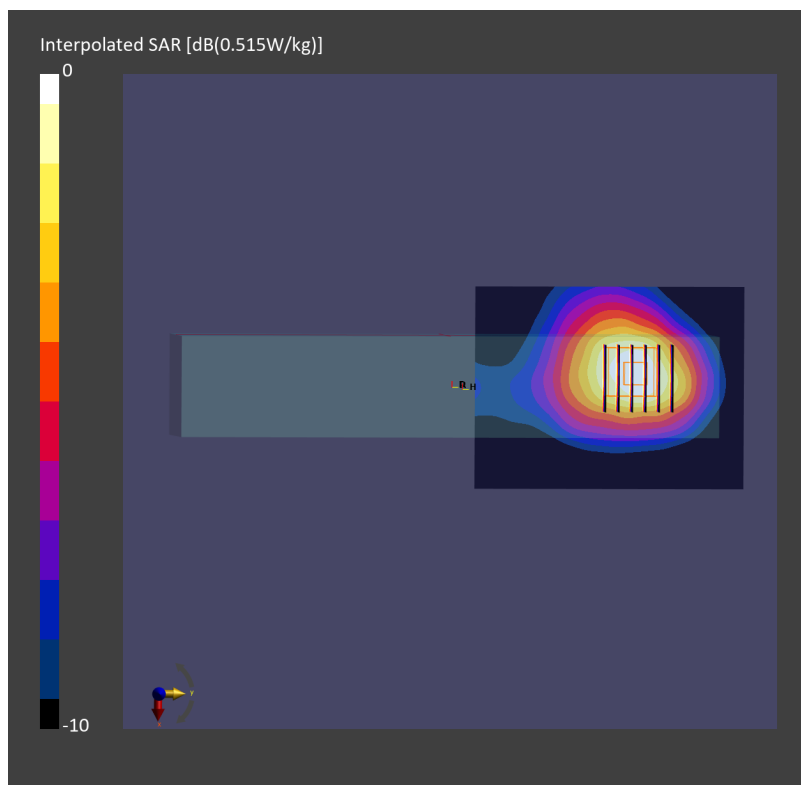

#20_FR1 n26_20M_BPSK_1_1_Left Side_10mm_Ch166300


Communication System: 5G NR ; Frequency: 831.500 MHz
Medium: HSL_835_231218 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.7$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(9.84, 9.84, 9.84); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.388 W/kg; SAR (10g) = 0.265 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.07 dB
SAR (1g) = 0.385 W/kg; SAR (8g) = 0.274 W/kg; SAR (10g) = 0.260 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 87.7 %

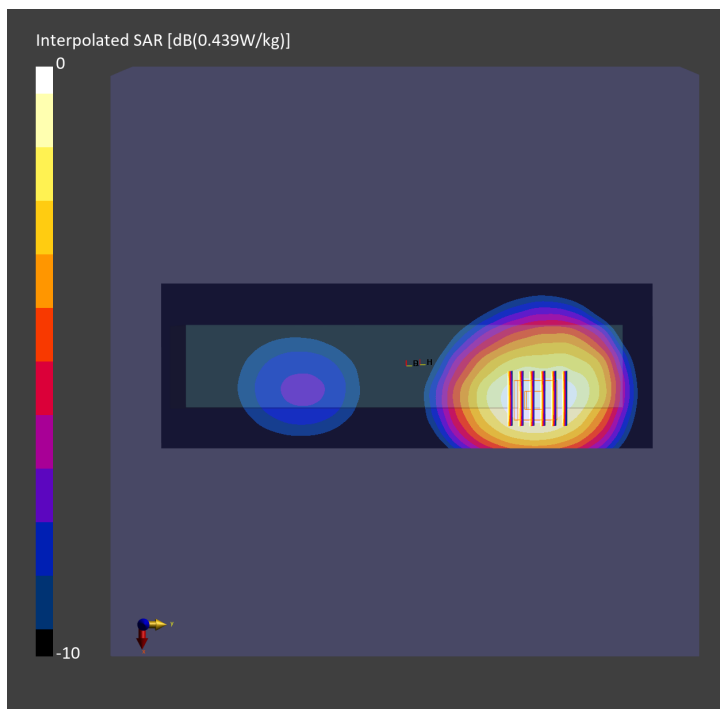

#21_FR1 n30_10M_BPSK_1_1_Left Side_10mm_Ch462000

Communication System: 5G NR ; Frequency: 2310.000 MHz

Medium: HSL_2300_231214 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.66$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(7.66, 7.66, 7.66); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (80.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.468 W/kg; SAR (10g) = 0.249 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.00 dB

SAR (1g) = 0.467 W/kg; SAR (8g) = 0.269 W/kg; SAR (10g) = 0.248 W/kg

Smallest distance from peaks to all points 3 dB below = 14.9 mm

Ratio of SAR at M2 to SAR at M1 = 81.4 %

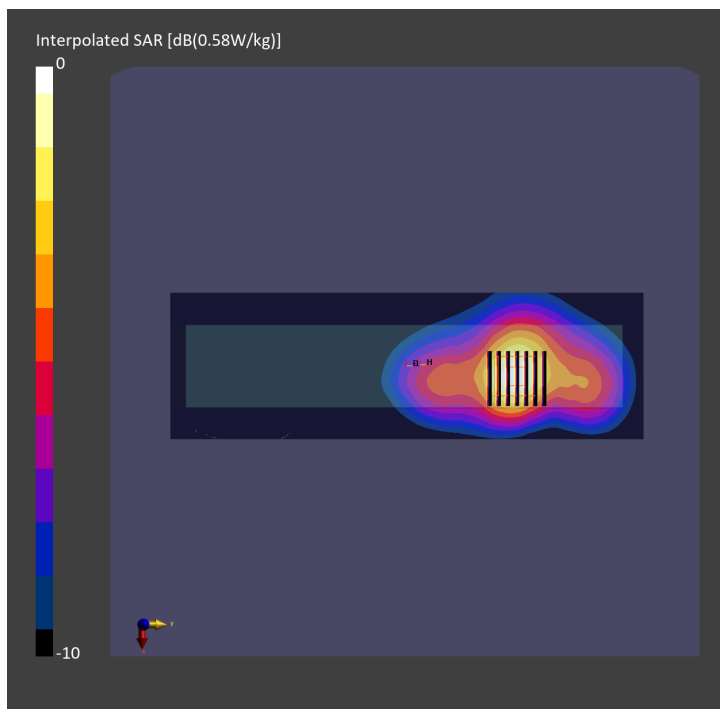

#22_FR1 n41_100M_BPSK_1_271_Left Side_10mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_2600_240102 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.8, 6.8, 7.12); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.498 W/kg; SAR (10g) = 0.268 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.515 W/kg; SAR (8g) = 0.303 W/kg; SAR (10g) = 0.280 W/kg

Smallest distance from peaks to all points 3 dB below = 18.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

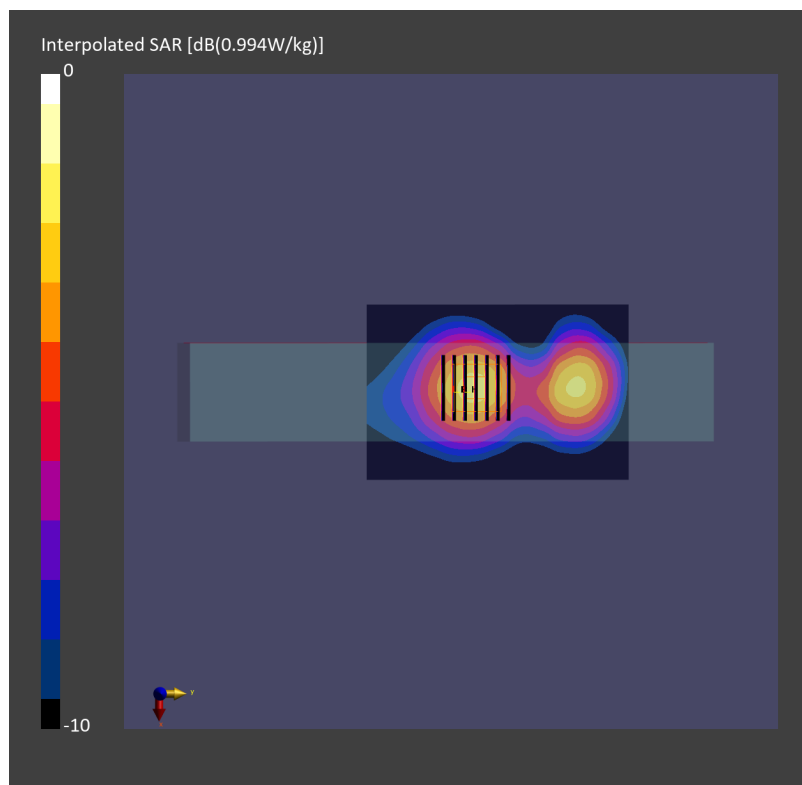

#23_FR1 n48_40M_BPSK_1_1_Right Side_10mm_Ch645332

Communication System: 5G NR ; Frequency: 3679.98 MHz

Medium: HSL_3700_231226 Medium parameters used: $f = 3679.98$ MHz; $\sigma = 3.17$ S/m; $\epsilon_r = 38.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.54, 6.51, 6.82); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10903-AAD

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.516 W/kg; SAR (10g) = 0.237 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.533 W/kg; SAR (8g) = 0.267 W/kg; SAR (10g) = 0.243 W/kg

Smallest distance from peaks to all points 3 dB below = 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.4 %

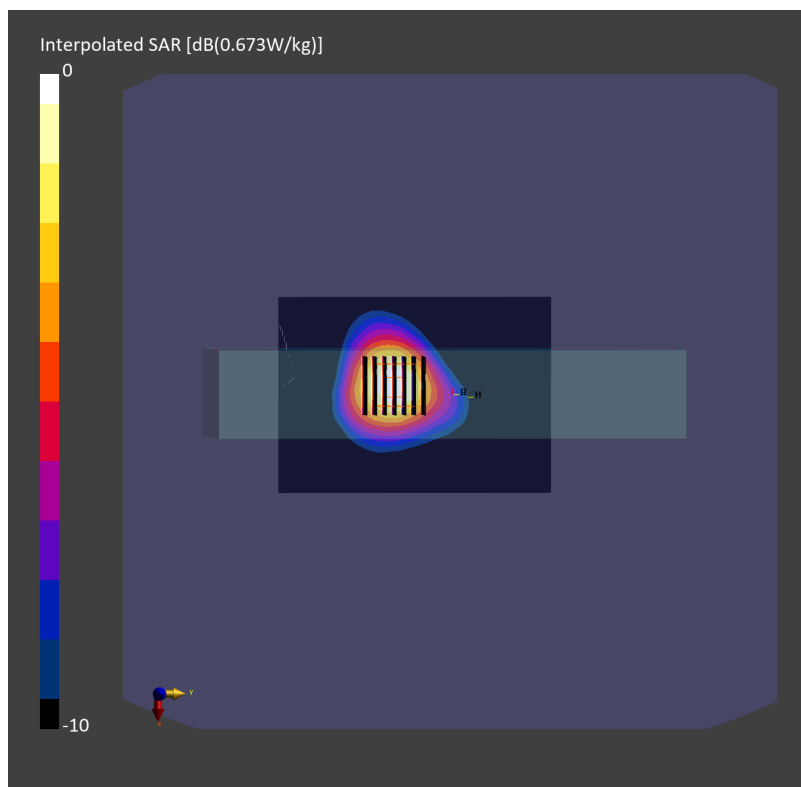

#24_FR1 n66_40M_BPSK_1_1_Left Side_10mm_Ch349000

Communication System: 5G NR ; Frequency: 1745.000 MHz

Medium: HSL_1750_231217 Medium parameters used: $f=1745.000$ MHz; $\sigma=1.36$ S/m; $\epsilon_r=40.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(8.25, 8.25, 8.25); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.388 W/kg; SAR (10g) = 0.226 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.397 W/kg; SAR (8g) = 0.250 W/kg; SAR (10g) = 0.233 W/kg

Smallest distance from peaks to all points 3 dB below = 14.6 mm

Ratio of SAR at M2 to SAR at M1 = 85.0 %

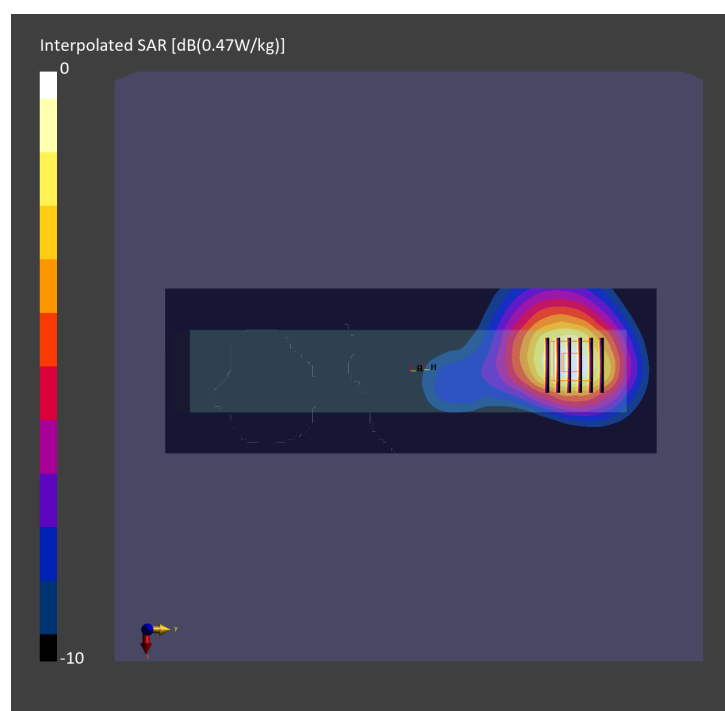

#25_FR1 n71_20M_BPSK_1_1_Left Side_10mm_Ch136100

Communication System: 5G NR ; Frequency: 680.500 MHz
Medium: HSL_750_231219 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.854$ S/m; $\epsilon_r = 42.9$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(10.06, 10.06, 10.06); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.207 W/kg; SAR (10g) = 0.139 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.214 W/kg; SAR (8g) = 0.138 W/kg; SAR (10g) = 0.129 W/kg

Smallest distance from peaks to all points 3 dB below = 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 81.9 %

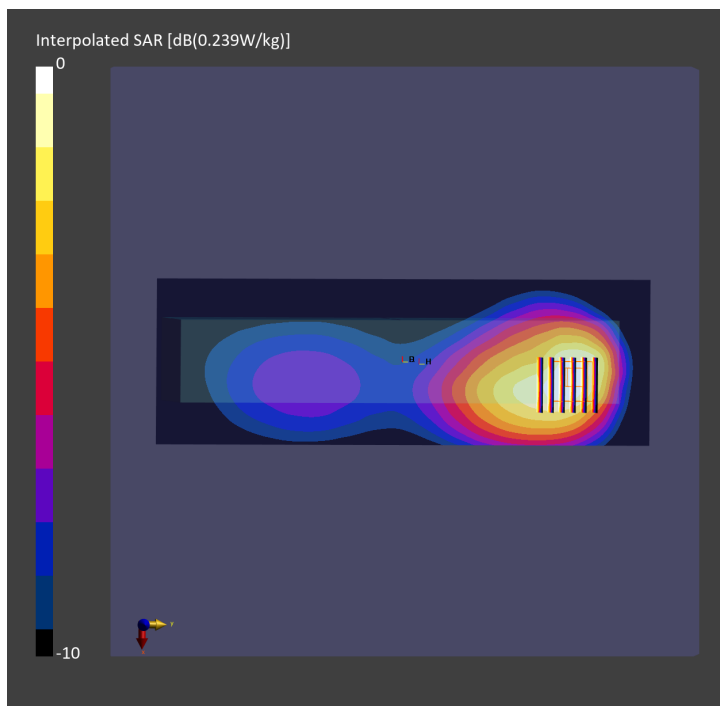

#26_FR1 n77_100M_BPSK_1_1_Left Side_10mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_3900_231230 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.29$ S/m; $\epsilon_r = 37.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.47, 6.43, 6.73); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (80.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.489 W/kg; SAR (10g) = 0.218 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.07 dB

SAR (1g) = 0.506 W/kg; SAR (8g) = 0.249 W/kg; SAR (10g) = 0.226 W/kg

Smallest distance from peaks to all points 3 dB below = 13.9 mm

Ratio of SAR at M2 to SAR at M1 = 74.6 %

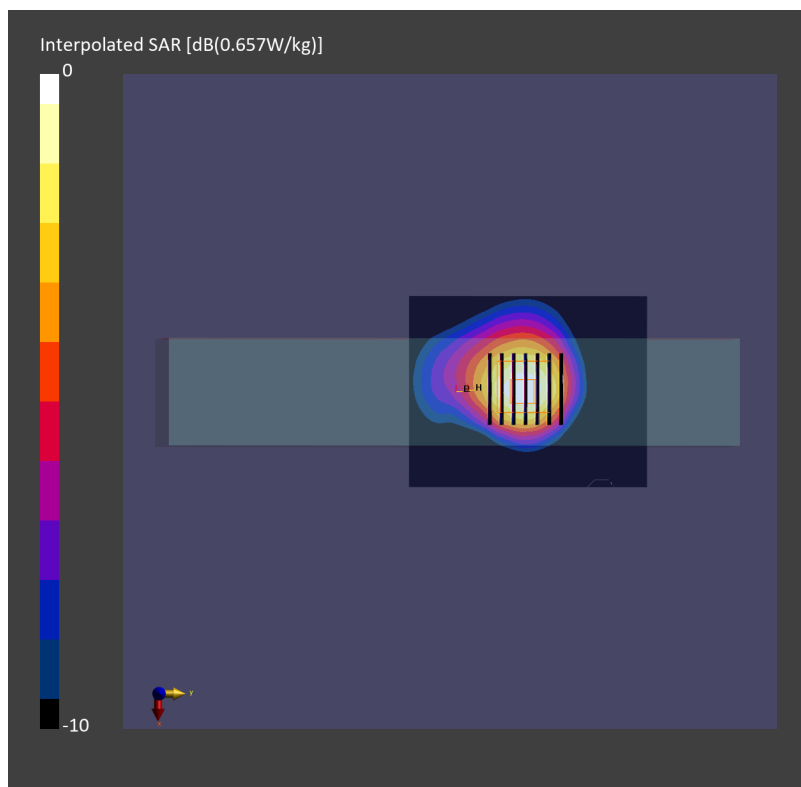

#27_WLAN2.4GHz_802.11b 1Mbps_Right Side_10mm_Ch6

Communication System: 802.11b; Frequency: 2437.000 MHz

Medium: HSL_2450_231228 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.89, 6.89, 7.21); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10315-AAB

Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.394 W/kg; SAR (10g) = 0.212 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.402 W/kg; SAR (8g) = 0.234 W/kg; SAR (10g) = 0.216 W/kg

Smallest distance from peaks to all points 3 dB below = 15.7 mm

Ratio of SAR at M2 to SAR at M1 = 81.0 %

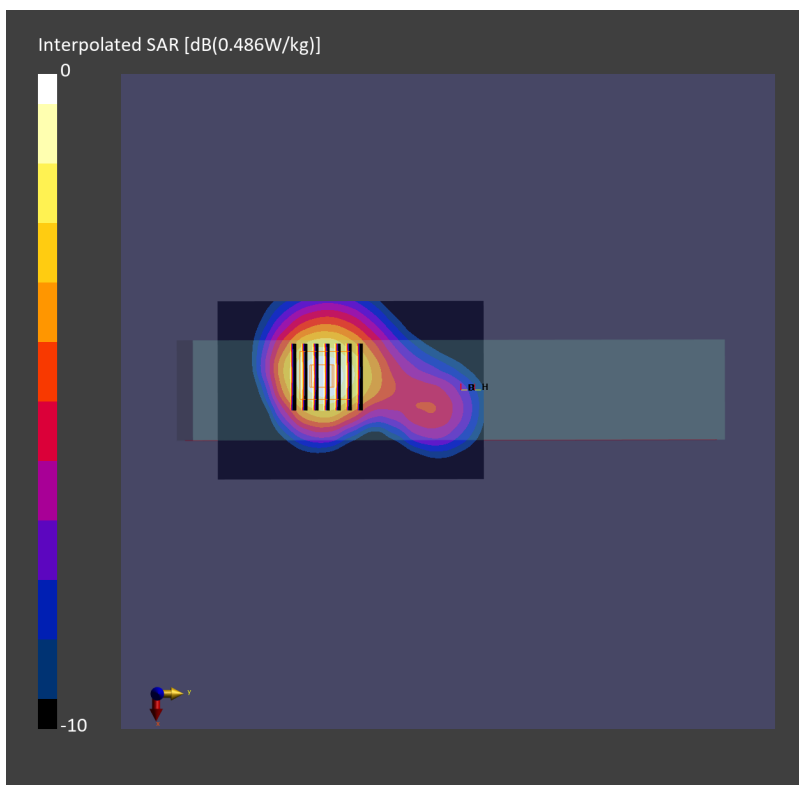

#28_WLAN5GHz_802.11n-HT40 MCS0_Left Side_10mm_Ch46

Communication System: 802.11n; Frequency: 5230.000 MHz

Medium: HSL_5250_231222 Medium parameters used: $f = 5230.000$ MHz; $\sigma = 4.71$ S/m; $\epsilon_r = 36.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(5.38, 5.34, 5.57); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10599-AAD

Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.942 W/kg; SAR (10g) = 0.391 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.967 W/kg; SAR (8g) = 0.447 W/kg; SAR (10g) = 0.402 W/kg

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 63.8 %

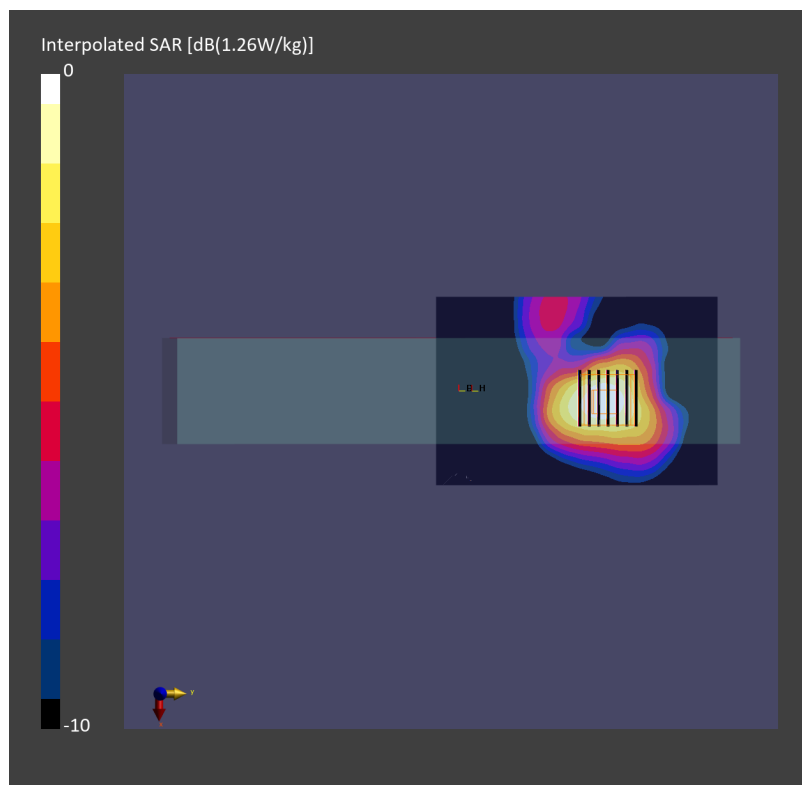

#29_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_10mm_Ch155

Communication System: 802.11ac; Frequency: 5775.000 MHz

Medium: HSL_5750_231222 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.29$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(4.68, 4.58, 4.85); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10626-AAD

Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.05 W/kg; SAR (10g) = 0.423 W/kg;


Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 1.10 W/kg; SAR (8g) = 0.489 W/kg; SAR (10g) = 0.440 W/kg

Smallest distance from peaks to all points 3 dB below = 10.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.3 %

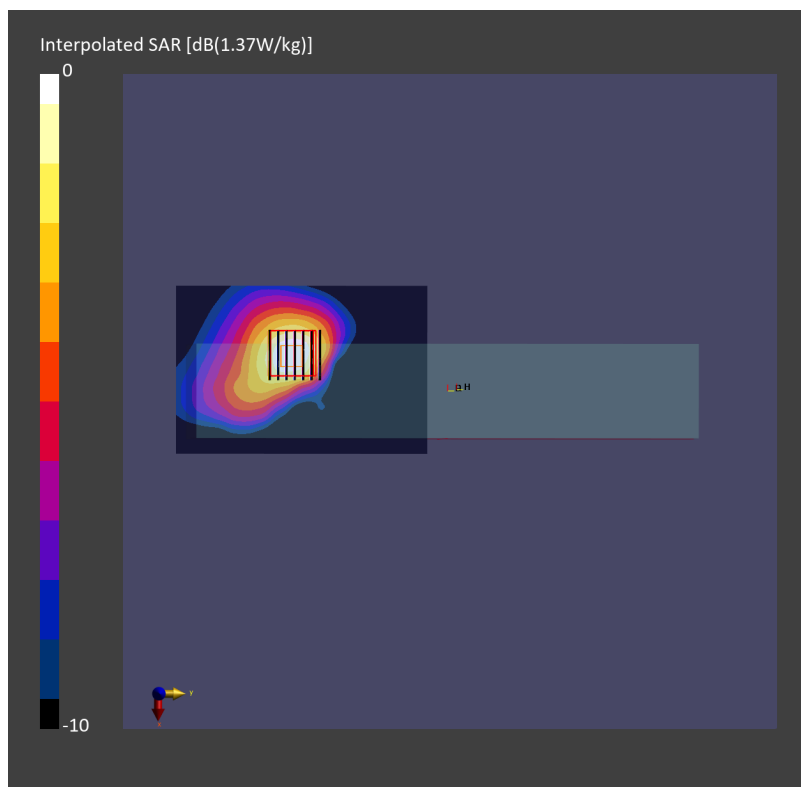

#30_Bluetooth_3Mbps_Right Side_10mm_Ch78

Communication System: Bluetooth; Frequency: 2480.000 MHz

Medium: HSL_2450_240101 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.89, 6.89, 7.21); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.004 W/kg; SAR (10g) = 0.002 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.003 W/kg; SAR (8g) = 0 W/kg; SAR (10g) = 0 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 67.6 %

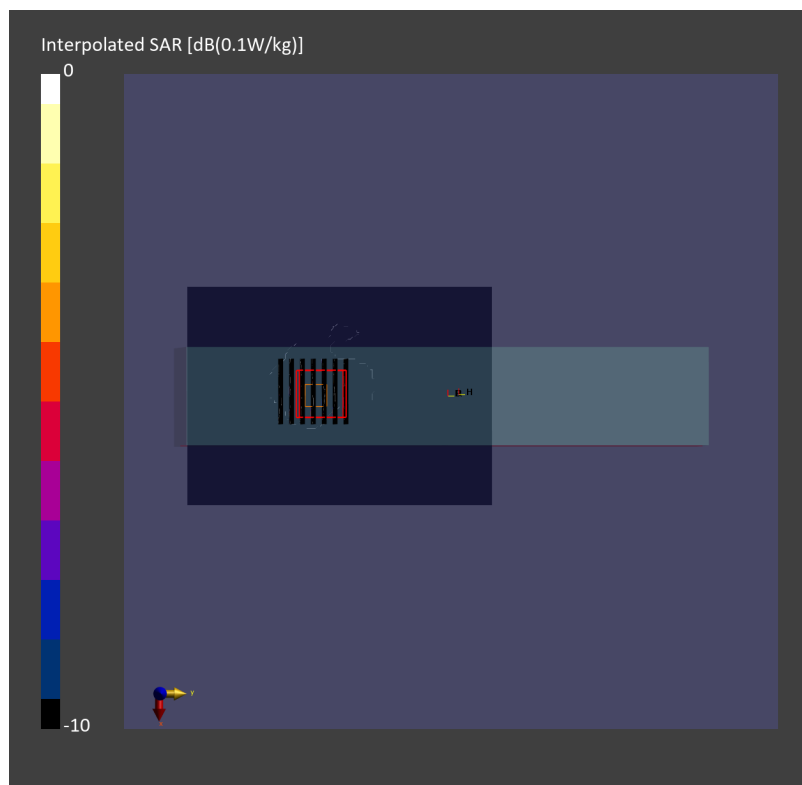

#31_WCDMA II_RMC 12.2Kbps_Left Side_0mm_Ch9538

Communication System: WCDMA; Frequency: 1907.600 MHz

Medium: HSL_1900_231221 Medium parameters used: $f = 1907.600$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(7.92, 7.92, 7.92); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.427 W/kg; SAR (10g) = 0.259 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.423 W/kg; SAR (8g) = 0.272 W/kg; SAR (10g) = 0.255 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 84.1 %

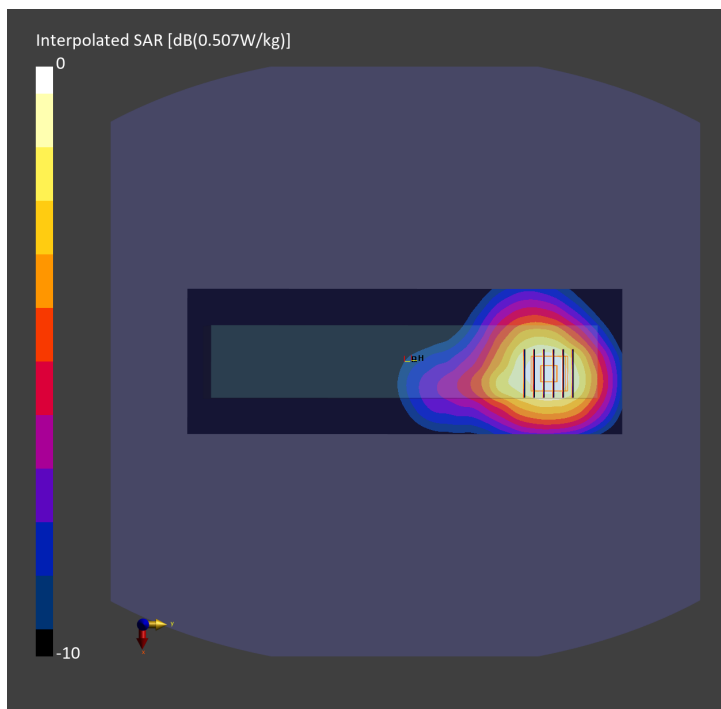

#32_WCDMA IV_RMC 12.2Kbps_Left Side_0mm_Ch1513

Communication System: WCDMA; Frequency: 1752.600 MHz

Medium: HSL_1750_231222 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(8.25, 8.25, 8.25); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.506 W/kg; SAR (10g) = 0.309 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.504 W/kg; SAR (8g) = 0.338 W/kg; SAR (10g) = 0.318 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.9 %

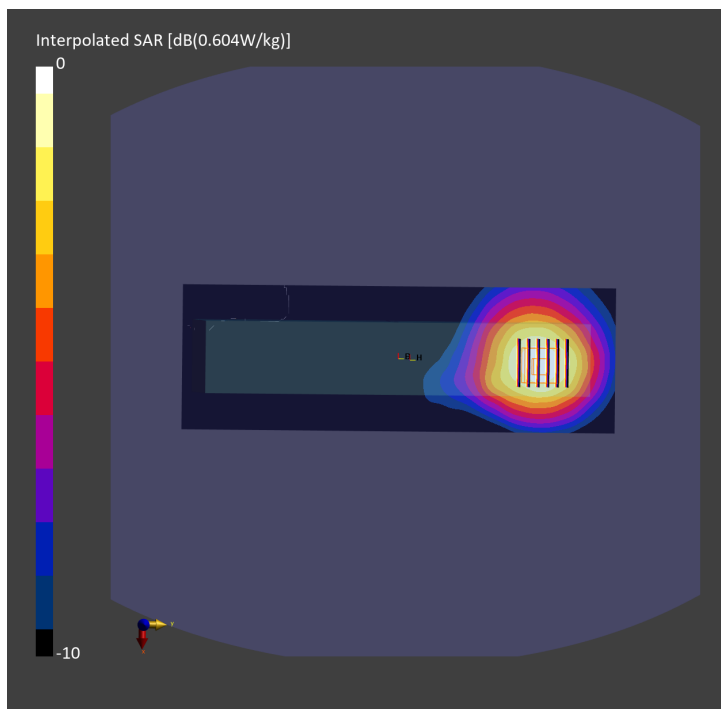

#33_WCDMA V_RMC 12.2Kbps_Front_0mm_Ch4182

Communication System: WCDMA; Frequency: 836.400 MHz

Medium: HSL_835_231225 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(9.84, 9.84, 9.84); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.253 W/kg; SAR (10g) = 0.174 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.19 dB

SAR (1g) = 0.261 W/kg; SAR (8g) = 0.191 W/kg; SAR (10g) = 0.183 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.9 %

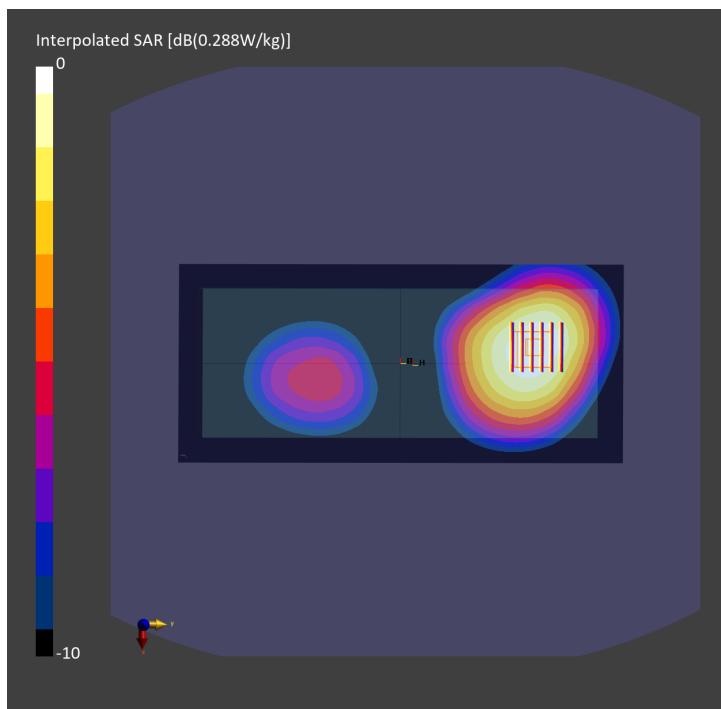

#34_LTE Band 7_20M_QPSK_1_0_Left Side_0mm_Ch21100


Communication System: LTE-FDD; Frequency: 2535.000 MHz
Medium: HSL_2600_231223 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 38.6$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(7.32, 7.32, 7.32); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (80.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.508 W/kg; SAR (10g) = 0.251 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.516 W/kg; SAR (8g) = 0.258 W/kg; SAR (10g) = 0.236 W/kg
Smallest distance from peaks to all points 3 dB below = 7.1 mm
Ratio of SAR at M2 to SAR at M1 = 63.2 %

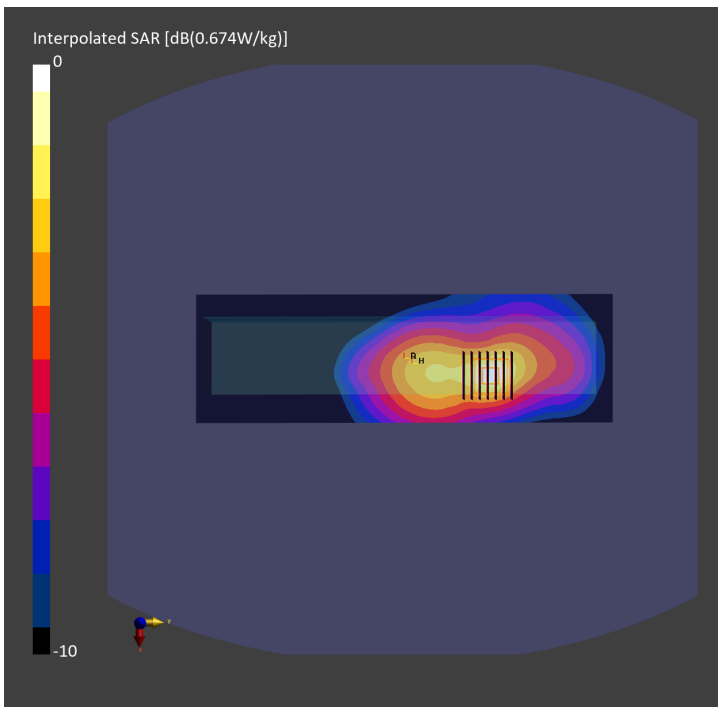

#35_LTE Band 12_10M_QPSK_1_0_Front_0mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_750_231224 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(10.06, 10.06, 10.06); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.176 W/kg; SAR (10g) = 0.122 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.178 W/kg; SAR (8g) = 0.131 W/kg; SAR (10g) = 0.125 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.8 %

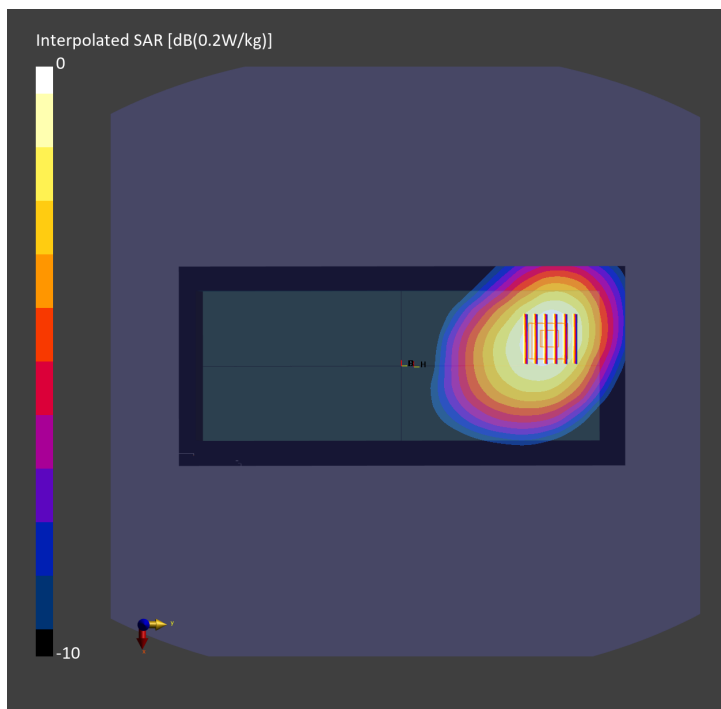

#36_LTE Band 13_10M_QPSK_1_0_Front_0mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_750_231224 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(10.06, 10.06, 10.06); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.152 W/kg; SAR (10g) = 0.104 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.151 W/kg; SAR (8g) = 0.109 W/kg; SAR (10g) = 0.104 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 87.8 %

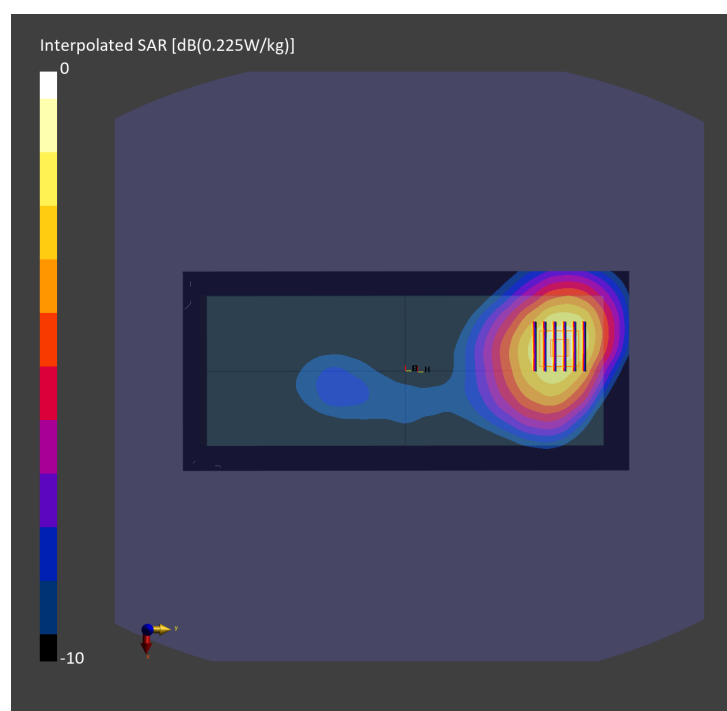

#37_LTE Band 14_10M_QPSK_1_0_Front_0mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_750_231224 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(10.06, 10.06, 10.06); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.236 W/kg; SAR (10g) = 0.161 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.238 W/kg; SAR (8g) = 0.172 W/kg; SAR (10g) = 0.164 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 87.9 %

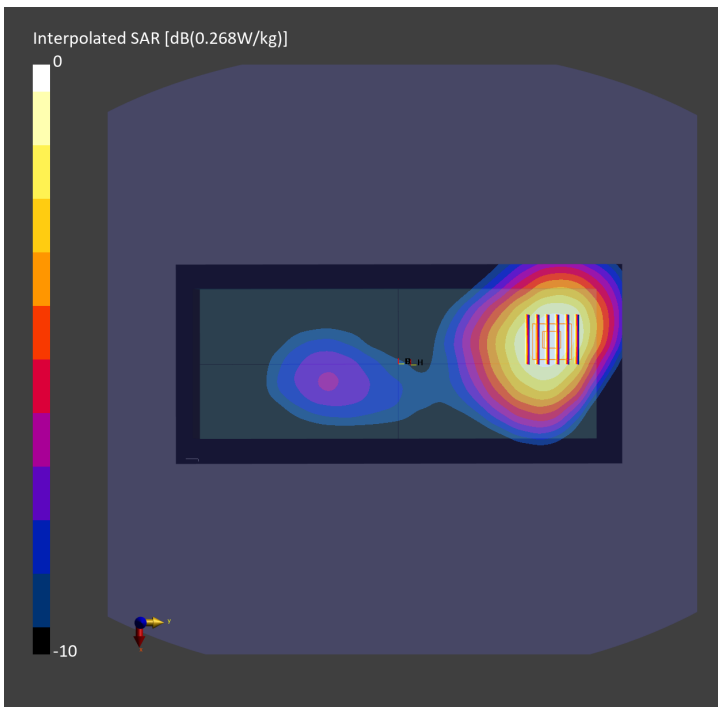

#38_LTE Band 25_20M_QPSK_1_0_Left Side_0mm_Ch26590


Communication System: LTE-FDD; Frequency: 1905.000 MHz
Medium: HSL_1900_231221 Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 39.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(7.92, 7.92, 7.92); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.278 W/kg; SAR (10g) = 0.168 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.06 dB
SAR (1g) = 0.277 W/kg; SAR (8g) = 0.179 W/kg; SAR (10g) = 0.168 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 83.9 %

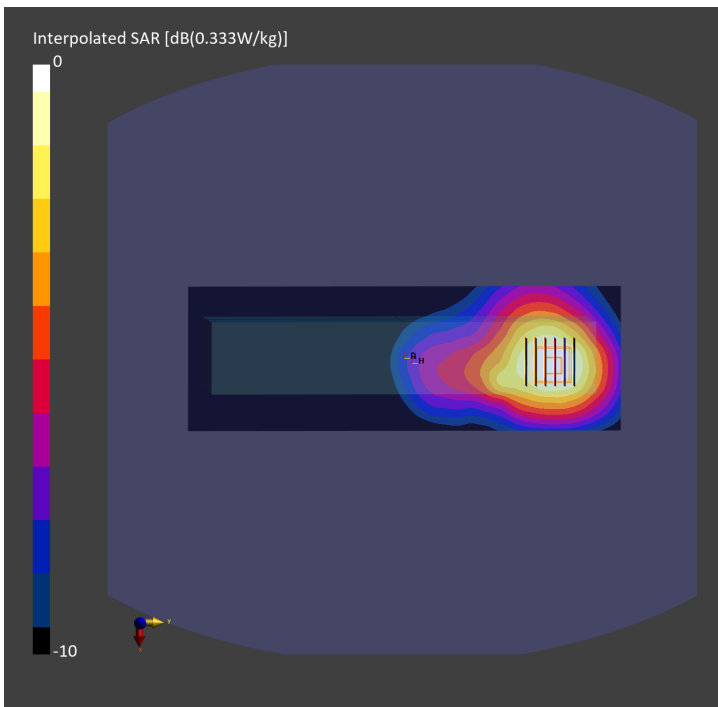

#39_LTE Band 26_15M_QPSK_1_0_Front_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_835_231225 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(9.84, 9.84, 9.84); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.380 W/kg; SAR (10g) = 0.262 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.385 W/kg; SAR (8g) = 0.280 W/kg; SAR (10g) = 0.267 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.9 %

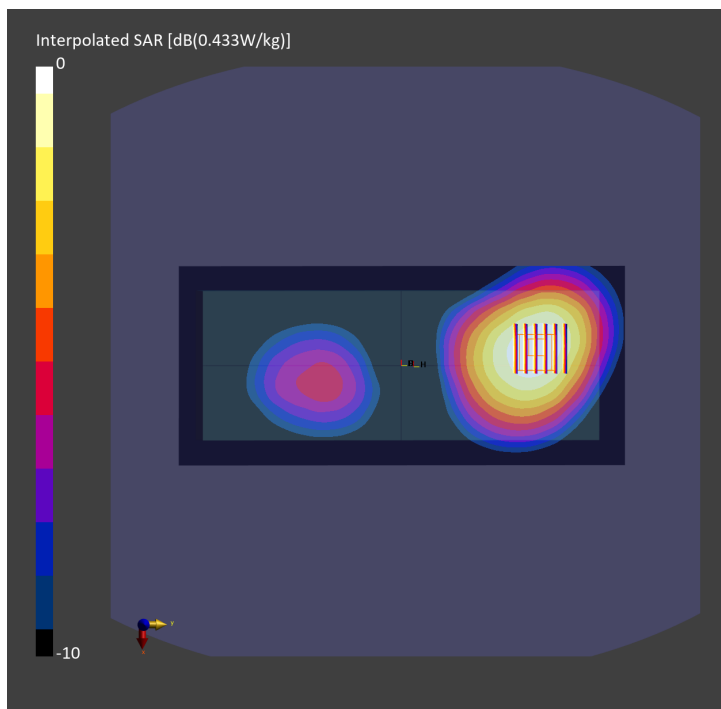

#40_LTE Band 30_10M_QPSK_1_0_Left Side_0mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_2300_231223 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.64$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(7.66, 7.66, 7.66); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (80.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.281 W/kg; SAR (10g) = 0.146 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.281 W/kg; SAR (8g) = 0.147 W/kg; SAR (10g) = 0.134 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 66.5 %

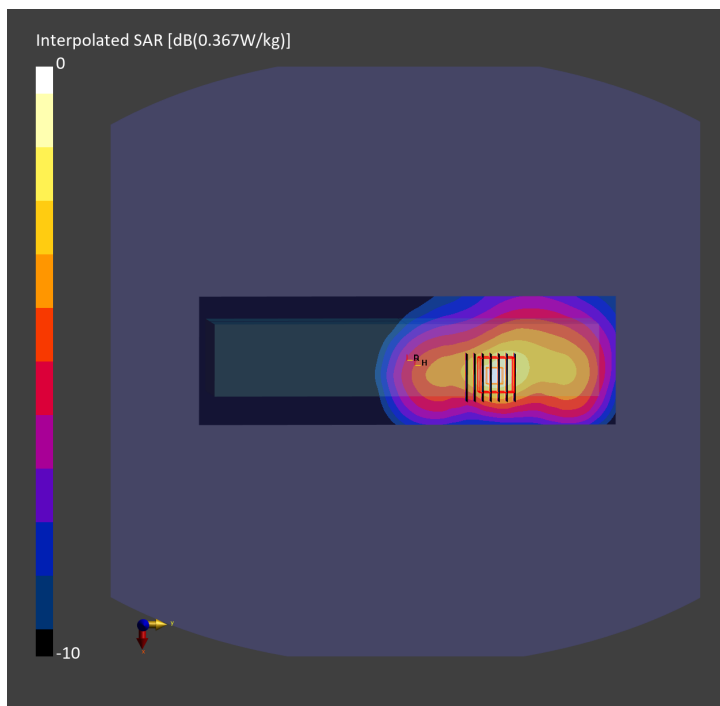

#41_LTE Band 41 _20M_QPSK_1_0_Left Side_0mm_Ch41490

Communication System: LTE-TDD; Frequency: 2680.000 MHz

Medium: HSL_2600_231221 Medium parameters used: $f = 2680.000$ MHz; $\sigma = 2.05$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.8, 6.8, 7.12); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.259 W/kg; SAR (10g) = 0.129 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.279 W/kg; SAR (8g) = 0.145 W/kg; SAR (10g) = 0.133 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 64.8 %

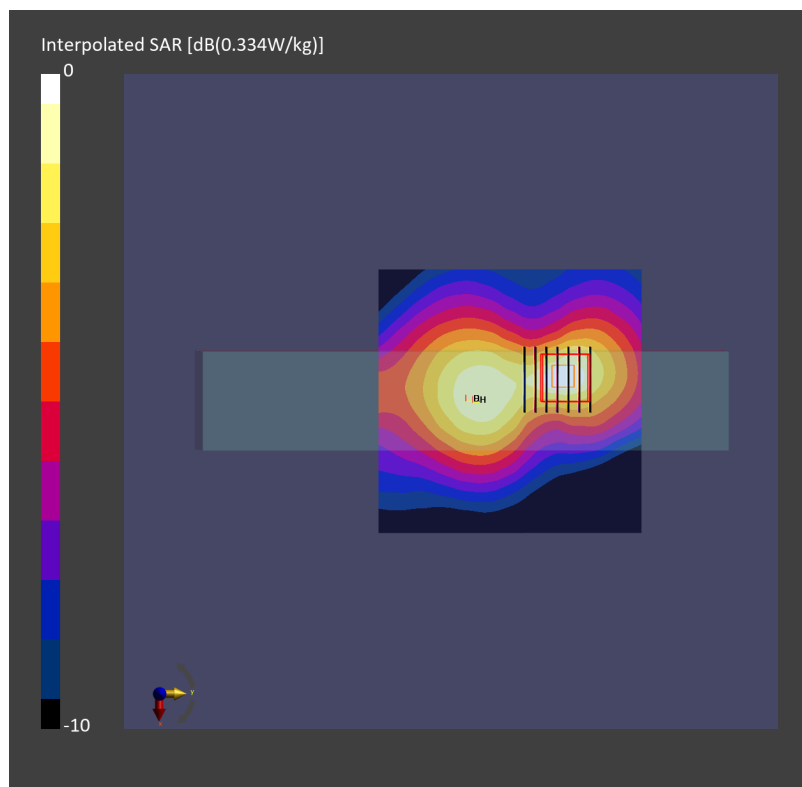

#42_LTE Band 48_20M_QPSK_1_0_Right Side_0mm_Ch56150

Communication System: LTE-TDD; Frequency: 3641.000 MHz

Medium: HSL_3700_231225 Medium parameters used: $f = 3641.000$ MHz; $\sigma = 3.09$ S/m; $\epsilon_r = 38.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.54, 6.51, 6.82); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

Area Scan (80.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.371 W/kg; SAR (10g) = 0.145 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.404 W/kg; SAR (8g) = 0.168 W/kg; SAR (10g) = 0.148 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.3 %

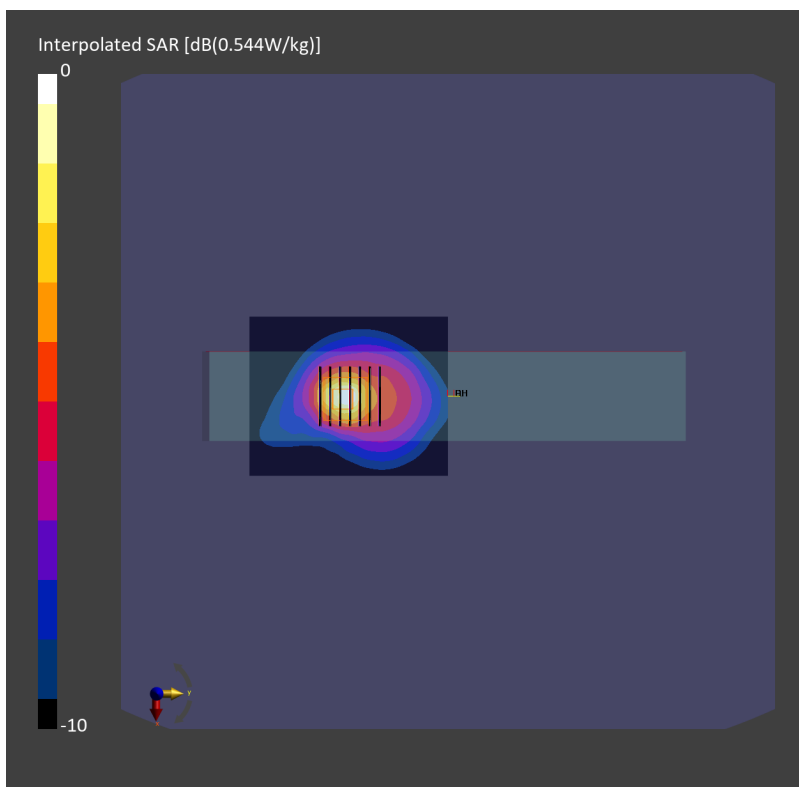

#43_LTE Band 66_20M_QPSK_1_0_Left Side_0mm_Ch132572


Communication System: LTE-FDD; Frequency: 1770.000 MHz
Medium: HSL_1750_231222 Medium parameters used: $f=1770.000$ MHz; $\sigma=1.37$ S/m; $\epsilon_r=39.8$
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(8.25, 8.25, 8.25); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.446 W/kg; SAR (10g) = 0.271 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.447 W/kg; SAR (8g) = 0.295 W/kg; SAR (10g) = 0.278 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 85.0 %

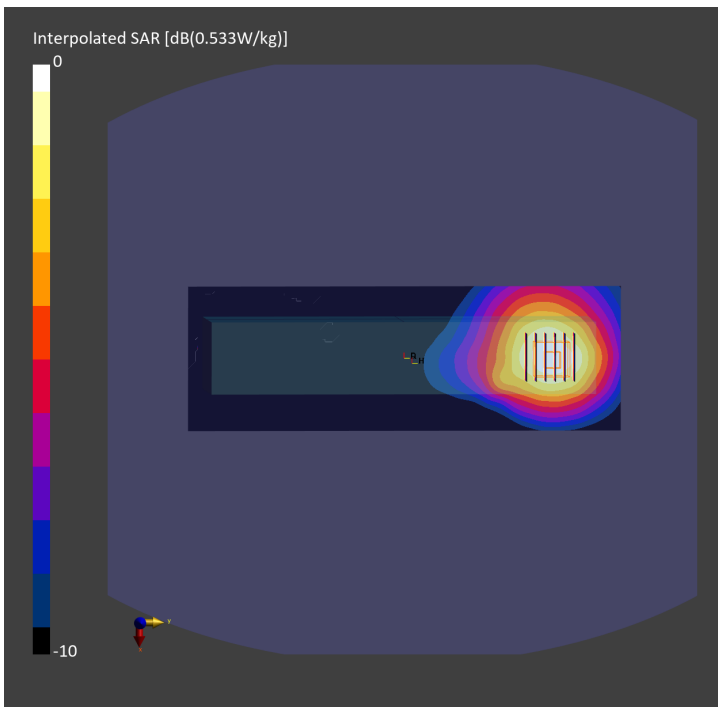

#44_LTE Band 71_20M_QPSK_1_0_Front_0mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_750_231224 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(10.06, 10.06, 10.06); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.179 W/kg; SAR (10g) = 0.124 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.181 W/kg; SAR (8g) = 0.132 W/kg; SAR (10g) = 0.125 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 86.8 %

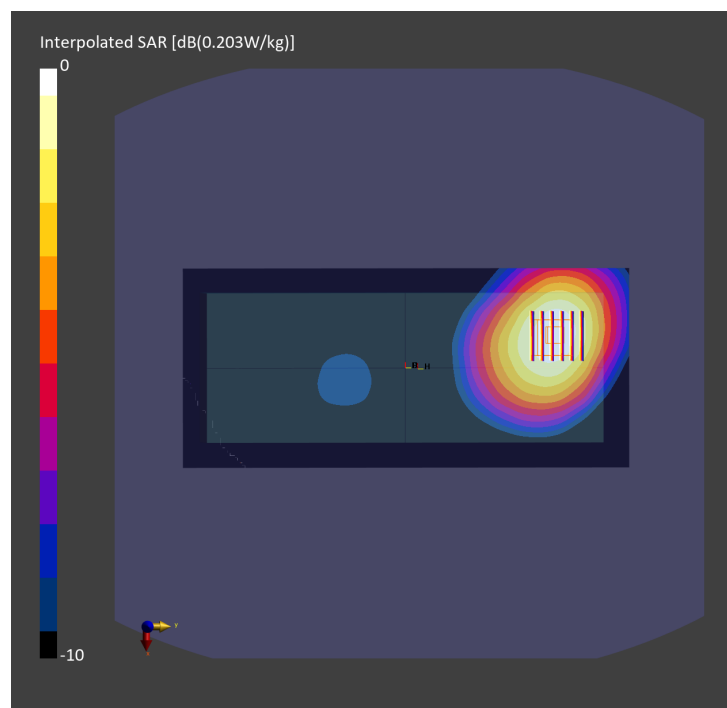

#45_FR1 n7_40M_BPSK_1_1_Left Side_0mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_2600_231221 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.8, 6.8, 7.12); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.411 W/kg; SAR (10g) = 0.209 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.414 W/kg; SAR (8g) = 0.224 W/kg; SAR (10g) = 0.206 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 69.3 %

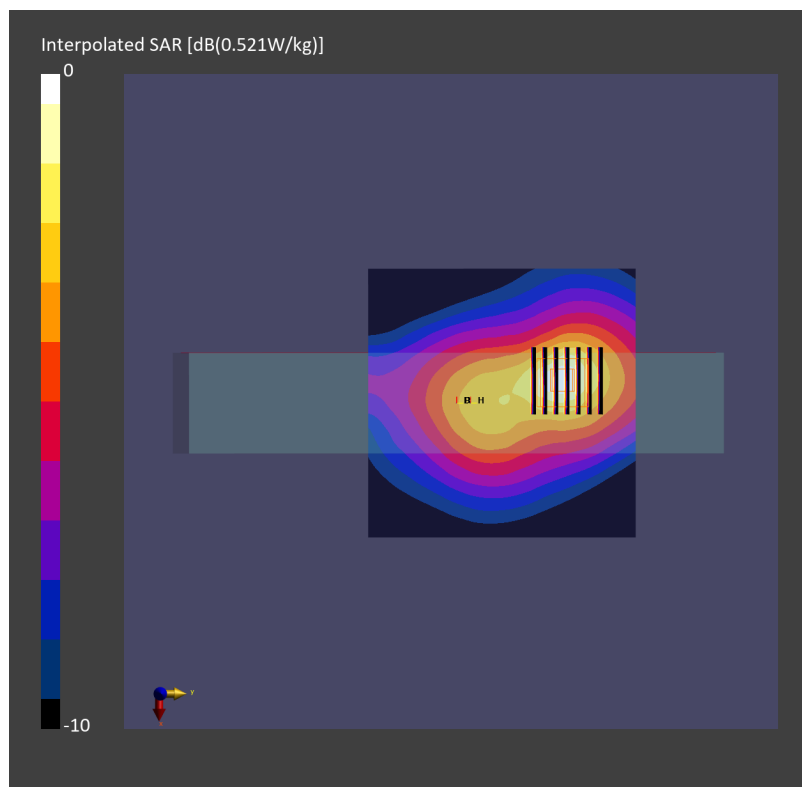

#46_FR1 n12_15M_BPSK_1_1_Front_0mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_750_231227 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(10.06, 10.06, 10.06); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.075 W/kg; SAR (10g) = 0.052 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.078 W/kg; SAR (8g) = 0.055 W/kg; SAR (10g) = 0.052 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 86.7 %

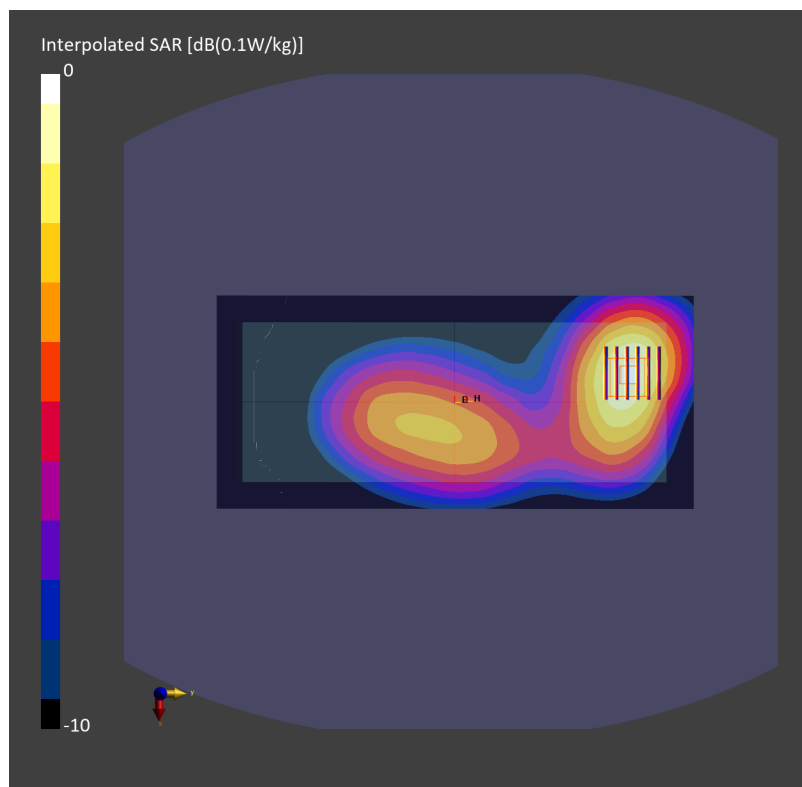

#47_FR1 n13_10M_BPSK_1_1_Front_0mm_Ch156400

Communication System: 5G NR; Frequency: 782.000 MHz

Medium: HSL_750_231227 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(10.06, 10.06, 10.06); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2023-03-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 270.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.211 W/kg; SAR (10g) = 0.145 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.12 dB

SAR (1g) = 0.220 W/kg; SAR (8g) = 0.159 W/kg; SAR (10g) = 0.151 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 89.0 %

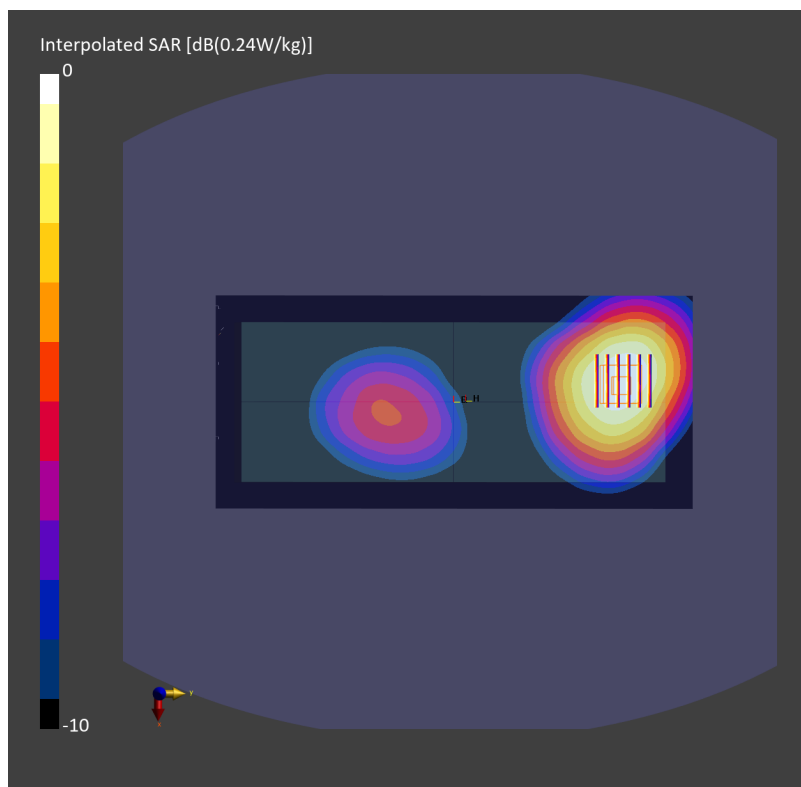

#48_FR1 n14_10M_BPSK_1_1_Front_0mm_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz

Medium: HSL_750_231223 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(8.8, 9.24, 9.25); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (150.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.205 W/kg; SAR (10g) = 0.141 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.211 W/kg; SAR (8g) = 0.158 W/kg; SAR (10g) = 0.152 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 90.8 %

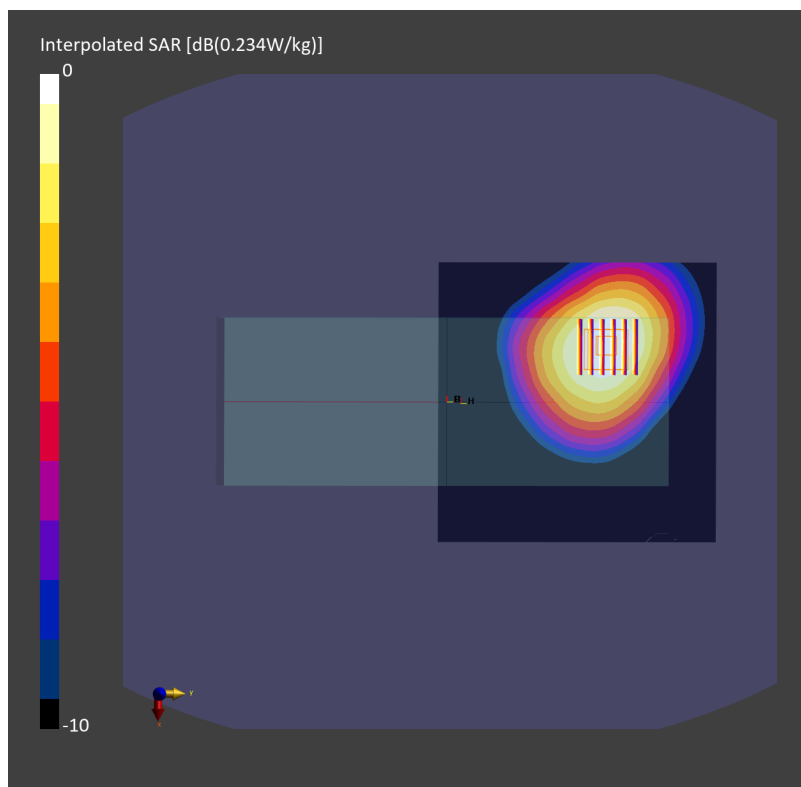

#49_FR1 n25_40M_BPSK_1_1_Left Side_0mm_Ch379000

Communication System: 5G NR; Frequency: 1895.000 MHz

Medium: HSL_1900_231224 Medium parameters used: $f=1895.000$ MHz; $\sigma=1.39$ S/m; $\epsilon_r=40.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.2, 7.21, 7.59); Calibrated: 2023-08-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2023-07-31
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2211; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.166 W/kg; SAR (10g) = 0.101 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.172 W/kg; SAR (8g) = 0.115 W/kg; SAR (10g) = 0.108 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.8 %

