

FCC TEST REPORT (15.247)

REPORT NO.: RF940418L10

MODEL NO.: P-781

OEM MODEL NO.: A5023

RECEIVED: Apr. 18, 2005

TESTED: Apr. 22 ~ Apr. 25, 2005

ISSUED: Apr. 26, 2005

APPLICANT: Gemtek Technology Co., Ltd.

ADDRESS: No.1, Jen Ai Road, Hsinchu Industrial Park,
Hukou Hsinchu, Taiwan, R.O.C. 303

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen,
Kwei Shan Hsiang, Taoyuan Hsien 333,
Taiwan, R.O.C.

This test report consists of 114 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



No. 2177-01

Table of Contents

1.	CERTIFICATION	5
2.	SUMMARY OF TEST RESULTS	6
2.1	MEASUREMENT UNCERTAINTY.....	7
3.	GENERAL INFORMATION.....	8
3.1	GENERAL DESCRIPTION OF EUT.....	8
3.2	DESCRIPTION OF TEST MODES.....	10
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	11
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:.....	12
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	14
3.4	DESCRIPTION OF SUPPORT UNITS.....	14
4.	TEST TYPES AND RESULTS (802.11b & g 2412~2462MHz Band).....	15
4.1	CONDUCTED EMISSION MEASUREMENT.....	15
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	15
4.1.2	TEST INSTRUMENTS.....	15
4.1.3	TEST PROCEDURES	16
4.1.4	DEVIATION FROM TEST STANDARD	16
4.1.5	TEST SETUP	17
4.1.6	EUT OPERATING CONDITIONS	17
4.1.7	TEST RESULTS	17
4.2	RADIATED EMISSION MEASUREMENT.....	24
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	24
4.2.2	TEST INSTRUMENTS.....	25
4.2.3	TEST PROCEDURES	26
4.2.4	DEVIATION FROM TEST STANDARD	26
4.2.5	TEST SETUP	27
4.2.6	EUT OPERATING CONDITIONS	27
4.2.7	TEST RESULTS	28
4.3	6dB BANDWIDTH MEASUREMENT.....	42
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	42
4.3.2	TEST INSTRUMENTS.....	42
4.3.3	TEST PROCEDURE	43
4.3.4	DEVIATION FROM TEST STANDARD	43
4.3.5	TEST SETUP	43
4.3.6	EUT OPERATING CONDITIONS	43
4.3.7	TEST RESULTS	44
4.4	MAXIMUM PEAK OUTPUT POWER.....	50
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	50
4.4.2	INSTRUMENTS.....	50

4.4.3	TEST PROCEDURES	51
4.4.4	DEVIATION FROM TEST STANDARD	51
4.4.5	TEST SETUP	51
4.4.6	EUT OPERATING CONDITIONS	51
4.4.7	TEST RESULTS	52
4.5	POWER SPECTRAL DENSITY MEASUREMENT	54
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	54
4.5.2	TEST INSTRUMENTS.....	54
4.5.3	TEST PROCEDURE	55
4.5.4	DEVIATION FROM TEST STANDARD	55
4.5.5	TEST SETUP	55
4.5.6	EUT OPERATING CONDITION	55
4.5.7	TEST RESULTS	56
4.6	BAND EDGES MEASUREMENT.....	62
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	62
4.6.2	TEST INSTRUMENTS.....	62
4.6.3	TEST PROCEDURE	62
4.6.4	DEVIATION FROM TEST STANDARD	62
4.6.5	EUT OPERATING CONDITION	62
4.6.6	TEST RESULTS	63
4.7	ANTENNA REQUIREMENT.....	73
4.7.1	STANDARD APPLICABLE	73
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	73
5.	TEST TYPES AND RESULTS (802.11a 5725~5850MHz Band)	74
5.1	CONDUCTED EMISSION MEASUREMENT.....	74
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	74
5.1.2	TEST INSTRUMENTS.....	74
5.1.3	TEST PROCEDURES	75
5.1.4	DEVIATION FROM TEST STANDARD	75
5.1.5	TEST SETUP	76
5.1.6	EUT OPERATING CONDITIONS	76
5.1.7	TEST RESULTS	77
5.2	RADIATED EMISSION MEASUREMENT.....	79
5.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	79
5.2.2	TEST INSTRUMENTS.....	80
5.2.3	TEST PROCEDURES	81
5.2.4	DEVIATION FROM TEST STANDARD	81
5.2.5	TEST SETUP	82
5.2.6	EUT OPERATING CONDITIONS	82
5.2.7	TEST RESULTS	83
5.3	6dB BANDWIDTH MEASUREMENT.....	91



5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	91
5.3.2	TEST INSTRUMENTS.....	91
5.3.3	TEST PROCEDURE	92
5.3.4	DEVIATION FROM TEST STANDARD	92
5.3.5	TEST SETUP	92
5.3.6	EUT OPERATING CONDITIONS	92
5.3.7	TEST RESULTS	93
5.4	MAXIMUM PEAK OUTPUT POWER	96
5.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	96
5.4.2	INSTRUMENTS.....	96
5.4.3	TEST PROCEDURES	97
5.4.4	DEVIATION FROM TEST STANDARD	97
5.4.5	TEST SETUP	97
5.4.6	EUT OPERATING CONDITIONS	97
5.4.7	TEST RESULTS	98
5.5	POWER SPECTRAL DENSITY MEASUREMENT.....	99
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	99
5.5.2	TEST INSTRUMENTS.....	99
5.5.3	TEST PROCEDURE	100
5.5.4	DEVIATION FROM TEST STANDARD	100
5.5.5	TEST SETUP	100
5.5.6	EUT OPERATING CONDITION	100
5.5.7	TEST RESULTS	101
5.6	BAND EDGES MEASUREMENT.....	104
5.6.1	LIMITS OF BAND EDGES MEASUREMENT	104
5.6.2	TEST INSTRUMENTS.....	104
5.6.3	TEST PROCEDURE	104
5.6.4	DEVIATION FROM TEST STANDARD	104
5.6.5	EUT OPERATING CONDITION	105
5.6.6	TEST RESULTS	105
5.7	ANTENNA REQUIREMENT.....	109
5.7.1	STANDARD APPLICABLE	109
5.7.2	ANTENNA CONNECTED CONSTRUCTION.....	109
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	110
7.	INFORMATION ON THE TESTING LABORATORIES	114



1. CERTIFICATION

PRODUCT: 2.4GHz/5GHz Outdoor Access Point
OEM PRODUCT: AirMagnet Sensor
BRAND NAME: Gemtek Systems
OEM BRAND NAME: AirMagnet
MODEL NO.: P-781
OEM MODEL NO.: A5023
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Apr. 22 ~ Apr. 25, 2005
APPLICANT: Gemtek Technology Co., Ltd.
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Candice Chen , **DATE:** Apr. 26, 2005
(Candice Chen)

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Apr. 26, 2005
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang **DATE:** Apr. 26, 2005
(Cody Chang,
Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -18.36dB at 0.474MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.13dB at 43.61MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.63 dB
	200MHz ~1000MHz	3.65 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	2.4GHz/5GHz Outdoor Access Point
OEM PRODUCT	AirMagnet Sensor
MODEL NO.	P-781
OEM MODEL NO.	A5023
POWER SUPPLY	48Vdc from POE
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11a: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	802.11b & 802.11g: 2412 ~ 2462MHz 802.11a: 5.15 ~ 5.35GHz and 5.725 ~ 5.850GHz
NUMBER OF CHANNEL	802.11b & 802.11g: 11 802.11a: 13
CHANNEL SPACING	802.11b & 802.11g: 5MHz 802.11a: 20MHz
OUTPUT POWER	802.11b: 28.774mW 802.11g: 43.853mW 13.868mW for 5.150 ~ 5.350GHz 25.527mW for 5.725 ~ 5.825GHz
DATA CABLE	1.8m N-Type antenna cable
ANTENNA TYPE	Please refer to the note 2 as below
I/O PORTS	RJ45
ASSOCIATED DEVICES	NA

NOTE:

1. The POE is for support unit only.
2. There are 3 antennas provided to this EUT. The information about those antennas as below table:

Item	Ant. Type	Ant. Gain
1	A-807 omni dual band	4.5dBi for 2.4GHz, 7dBi for 5GHz
2	A-308 omni single band	8dBi for 2.4GHz
3	A-408 omni single band	8dBi for 5GHz



3. There are two product names, brands, and model names provided to this EUT. Please refer to the table as below for EUT's information:

Product Name	Model Name	Brand
2.4GHz/5GHz Outdoor Access Point	P-781	Gemtek Systems
AirMagnet Sensor	A5023	AirMagnet

4. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
5. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g: Eleven channels are provided to this EUT.


Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

Operated in 5725 ~ 5850MHz band:

For 802.11a: Five channels are provided to this EUT.

Channel	Frequency
1	5745 MHz
2	5765 MHz
3	5785 MHz
4	5805 MHz
5	5825 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

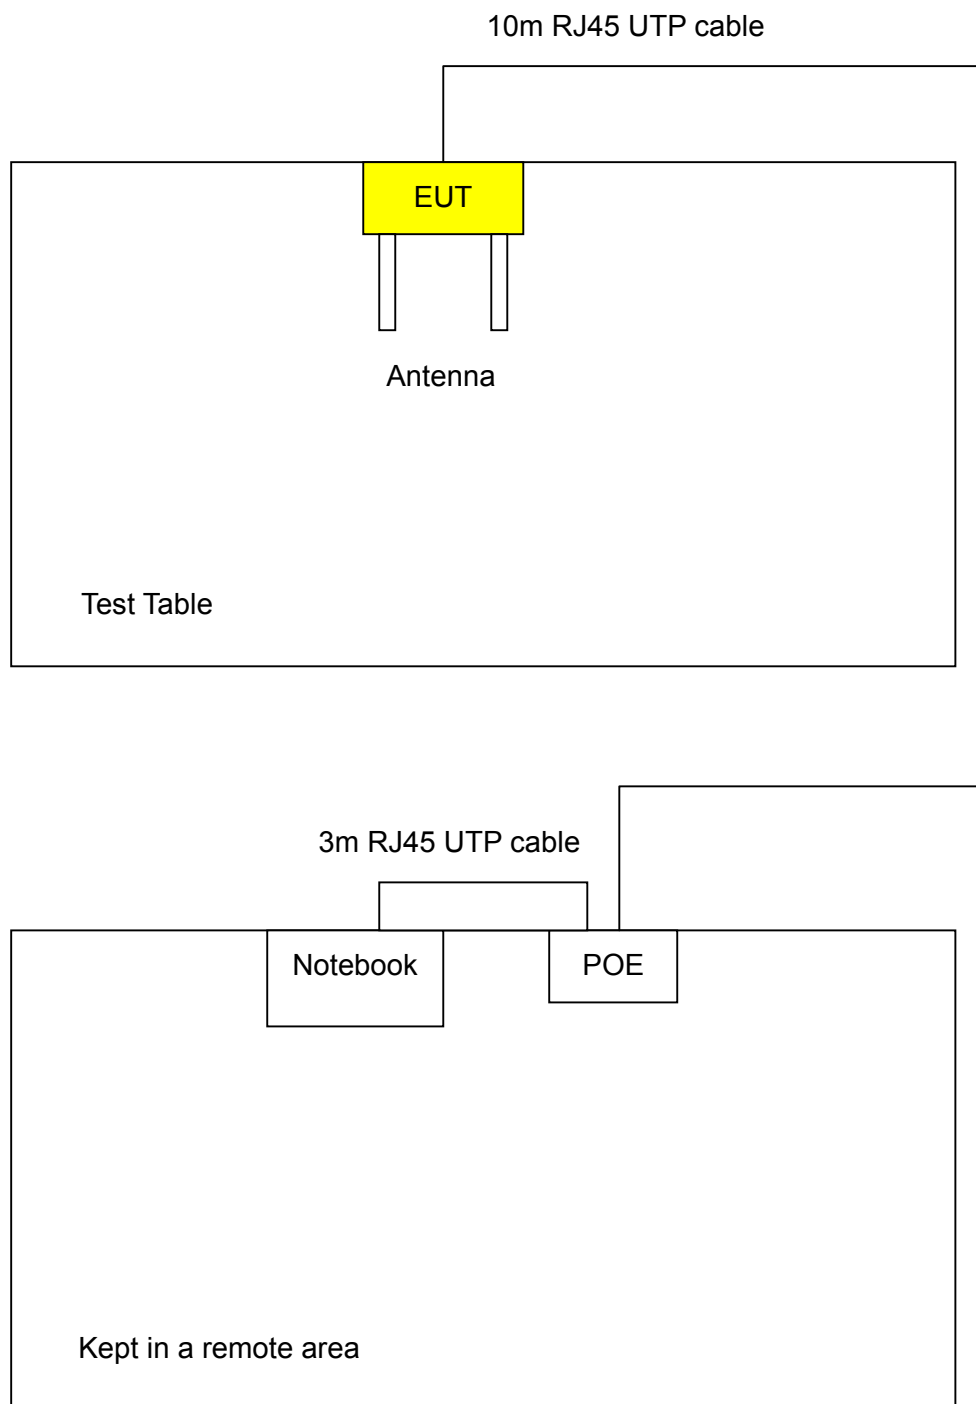

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
A	Note 1	x	Note 2	Note 3	A-308 antenna with 8dBi (for 2.4GHz)
B	Note 1	x	Note 2	Note 3	A-807 antenna with 4.5dBi (for 2.4GHz)
C	Note 1	x	Note 2	Note 3	A-408 antenna with 8dBi (for 5GHz)
D	Note 1	x	Note 2	Note 3	A-807 antenna with 7dBi (for 5GHz)

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Note 1: Pre-scan shown antenna has no effect for PLC test and only worst case recorded in the report.

Note 2: Pre-scan shown POE has no effect for radiated emission about 1GHz and only worst case recorded in the report.

Note 3: Conducted RF measurement is independent of antennas and POE.

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
C	802.11a	1 to 5	3	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11g	1 to 11	11	OFDM	BPSK	6
B	802.11g	1 to 11	11	OFDM	BPSK	6
C	802.11a	1 to 5	3	OFDM	BPSK	6
D	802.11a	1 to 5	3	OFDM	BPSK	6



Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
B	802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
C	802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6
D	802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11a	1 to 5	1, 5	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 2.4GHz/5GHz Outdoor Access Point. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	25191592336	E2K24CLNS
2	POE	Gemtek Systems	PW130RB4800N52	NA	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

4. TEST TYPES AND RESULTS (802.11b & g 2412~2462MHz Band)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 16, 2005
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Feb. 15, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

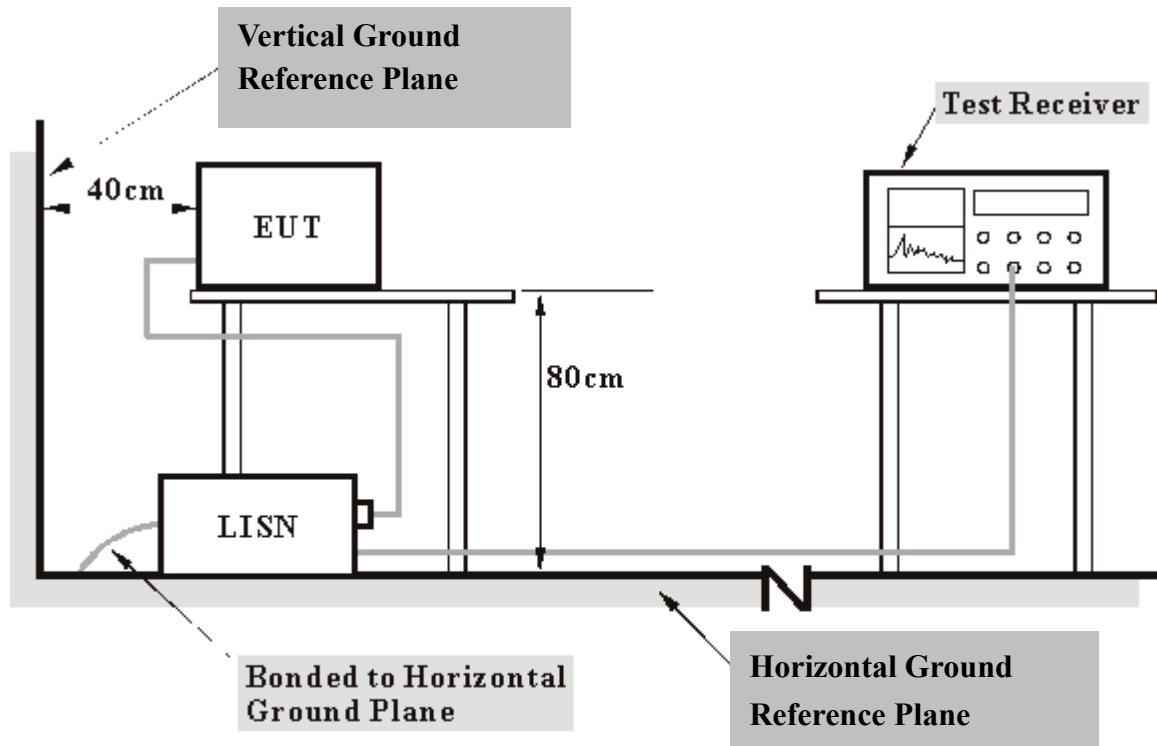

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared another Notebook system to act as a communication partner and placed it outside of testing area.
- c. The communication partner connected with EUT via “RJ45” cable and run a Test program (provided by manufacturer) to enable EUT under transmission/Receiving condition continuously at specific channels frequency.
- d. The communication partner sent data to EUT by command "PING".


4.1.7 TEST RESULTS

Conducted Worst-Case Data

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.11	44.17	-	44.28	-	64.98	54.98	-20.71	-
2	0.474	0.13	37.14	-	37.27	-	56.44	46.44	-19.17	-
3	0.677	0.17	33.58	-	33.75	-	56.00	46.00	-22.25	-
4	5.973	0.44	33.12	-	33.56	-	60.00	50.00	-26.44	-
5	15.434	0.59	38.66	-	39.25	-	60.00	50.00	-20.75	-
6	23.129	1.23	37.08	-	38.31	-	60.00	50.00	-21.69	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

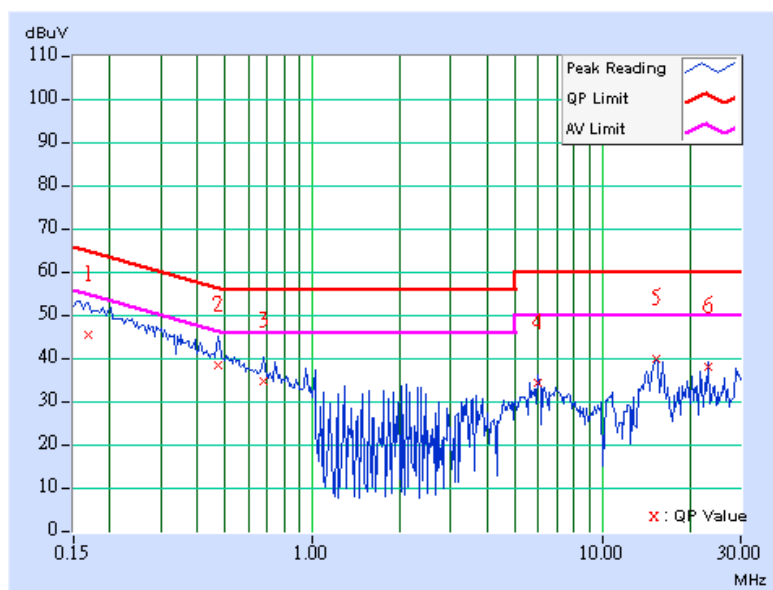

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.11	42.70	-	42.81	-	64.61	54.61	-21.80	-
2	0.267	0.11	39.35	-	39.46	-	61.20	51.20	-21.74	-
3	0.474	0.13	37.34	-	37.47	-	56.44	46.44	-18.97	-
4	2.105	0.27	36.39	-	36.66	-	56.00	46.00	-19.34	-
5	15.617	0.48	39.10	-	39.58	-	60.00	50.00	-20.42	-
6	23.129	0.81	37.56	-	38.37	-	60.00	50.00	-21.63	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

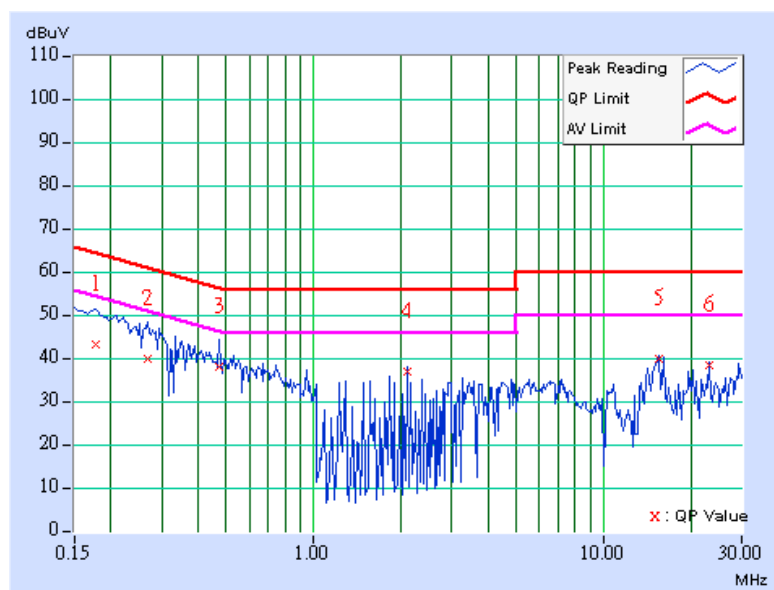

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	45.07	-	45.18	-	66.00	56.00	-20.82	-
2	0.209	0.11	43.02	-	43.13	-	63.26	53.26	-20.13	-
3	0.474	0.13	36.80	-	36.93	-	56.44	46.44	-19.51	-
4	0.744	0.18	32.33	-	32.51	-	56.00	46.00	-23.49	-
5	5.699	0.43	33.41	-	33.84	-	60.00	50.00	-26.16	-
6	15.434	0.59	38.70	-	39.29	-	60.00	50.00	-20.71	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

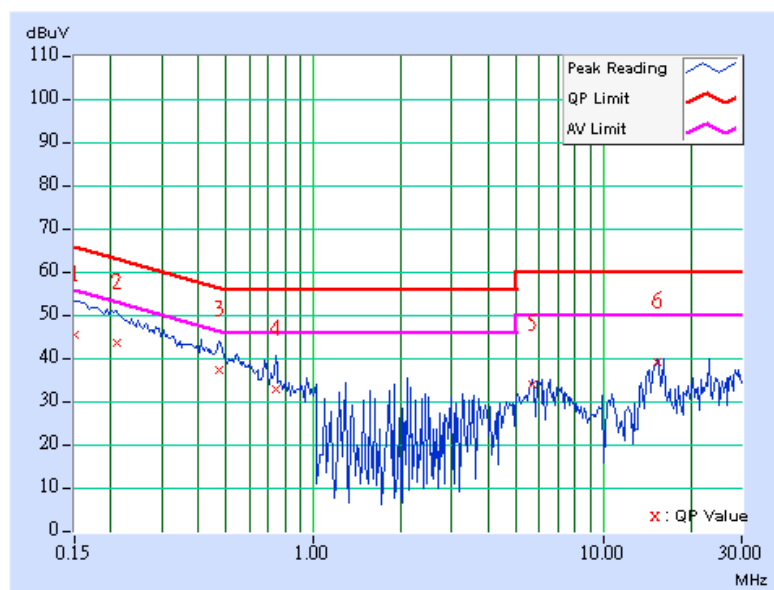

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	45.74	-	45.85	-	66.00	56.00	-20.15	-
2	0.275	0.11	38.85	-	38.96	-	60.97	50.97	-22.01	-
3	0.474	0.13	37.44	-	37.57	-	56.44	46.44	-18.87	-
4	0.677	0.17	34.87	-	35.04	-	56.00	46.00	-20.96	-
5	2.375	0.28	35.85	-	36.13	-	56.00	46.00	-19.87	-
6	15.434	0.47	38.88	-	39.35	-	60.00	50.00	-20.65	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

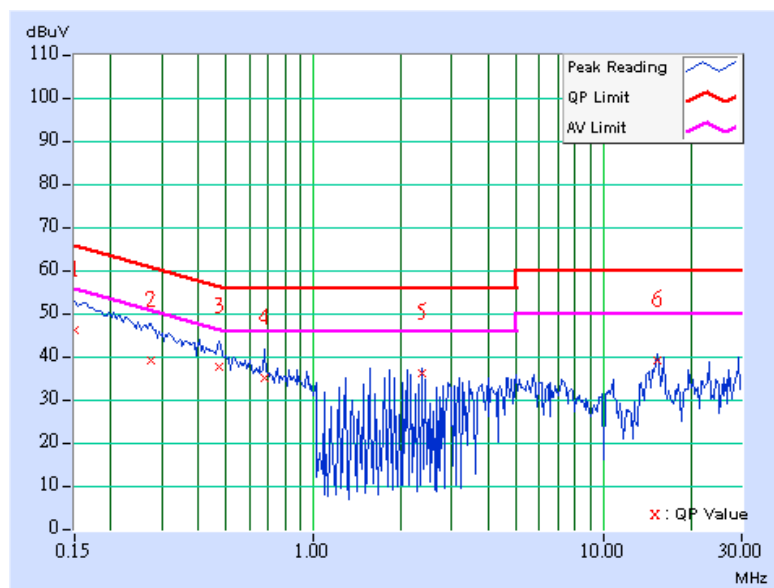

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.11	45.85	-	45.96	-	65.38	55.38	-19.42	-
2	0.193	0.11	44.20	-	44.31	-	63.91	53.91	-19.60	-
3	0.427	0.12	35.00	-	35.12	-	57.30	47.30	-22.19	-
4	0.951	0.23	33.02	-	33.25	-	56.00	46.00	-22.75	-
5	6.309	0.45	31.50	-	31.95	-	60.00	50.00	-28.05	-
6	15.250	0.57	39.06	-	39.63	-	60.00	50.00	-20.37	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

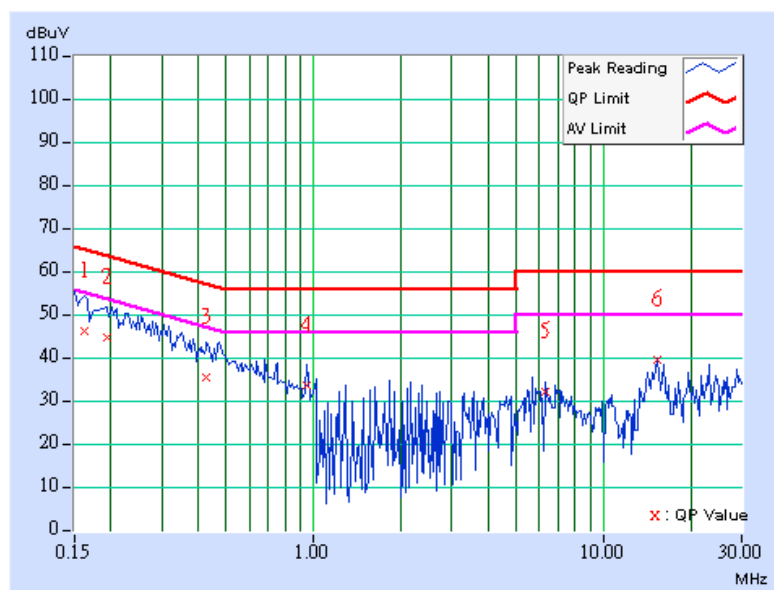

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	46.71	-	46.82	-	66.00	56.00	-19.18	-
2	0.197	0.11	43.90	-	44.01	-	63.74	53.74	-19.73	-
3	0.478	0.13	36.87	-	37.00	-	56.37	46.37	-19.37	-
4	2.105	0.27	36.24	-	36.51	-	56.00	46.00	-19.49	-
5	7.191	0.42	33.47	-	33.89	-	60.00	50.00	-26.11	-
6	15.434	0.47	38.83	-	39.30	-	60.00	50.00	-20.70	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

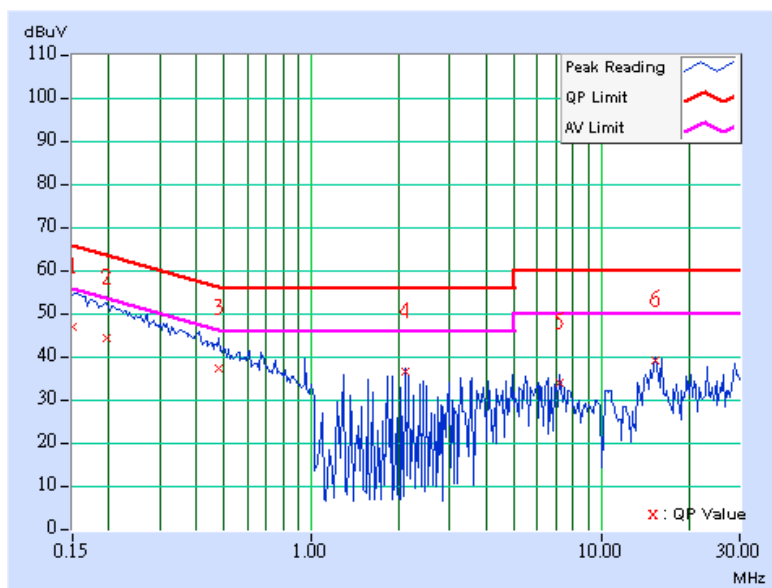

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Jan. 07, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Nov. 29, 2005
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 22, 2006
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 05, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170242	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10631	Nov. 17, 2005
Preamplifier Agilent	8449B	3008A01960	Nov. 14, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219275/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

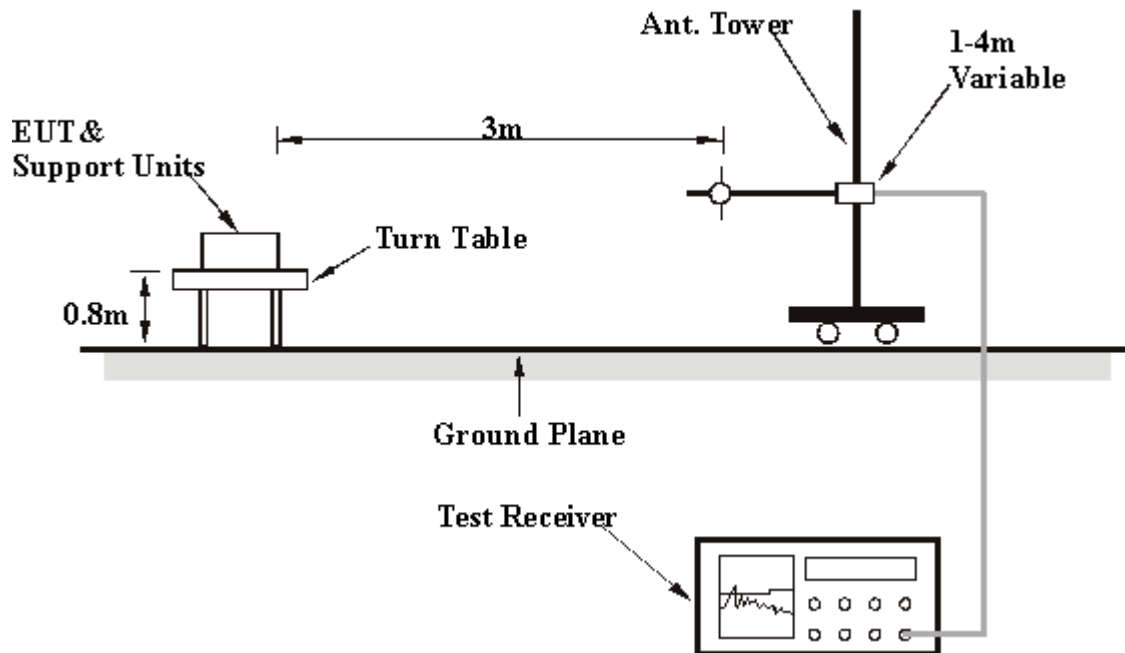

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

Below 1GHz Worst-Case Data (A-308 antenna with 8dBi)

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	424.60	40.58 QP	46.00	-5.42	1.75 H	50	23.23	17.35
2	533.47	44.26 QP	46.00	-1.74	1.25 H	48	25.09	19.17
3	578.18	39.62 QP	46.00	-6.38	1.25 H	186	19.39	20.23
4	667.61	38.56 QP	46.00	-7.44	1.00 H	196	16.90	21.66
5	733.70	41.53 QP	46.00	-4.47	1.25 H	224	18.69	22.84
6	778.41	41.61 QP	46.00	-4.39	1.00 H	166	18.24	23.37

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	61.11	34.96 QP	40.00	-5.04	1.00 V	255	21.48	13.48
2	133.02	34.25 QP	43.50	-9.25	1.00 V	190	20.36	13.89
3	333.24	41.73 QP	46.00	-4.27	1.00 V	103	26.58	15.15
4	554.85	44.23 QP	46.00	-1.77	1.00 V	321	24.64	19.59
5	757.01	39.12 QP	46.00	-6.88	1.00 V	142	15.85	23.27
6	799.79	42.11 QP	46.00	-3.89	1.00 V	166	18.65	23.46

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

Below 1GHz Worst-Case Data (A-807 antenna with 4.5dBi)

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	309.92	43.75 QP	46.00	-2.25	1.00 H	268	29.12	14.63
2	354.62	35.98 QP	46.00	-10.02	1.00 H	223	20.35	15.63
3	533.46	37.75 QP	46.00	-8.25	2.00 H	300	18.58	19.17
4	667.60	38.79 QP	46.00	-7.21	1.00 H	195	17.13	21.66
5	733.70	44.79 QP	46.00	-1.21	1.00 H	121	21.95	22.84
6	778.39	44.77 QP	46.00	-1.23	1.00 H	174	21.41	23.36

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.61	38.87 QP	40.00	-1.13	1.00 V	320	23.48	15.39
2	309.91	41.13 QP	46.00	-4.87	1.00 V	153	26.50	14.63
3	399.33	38.10 QP	46.00	-7.90	1.00 V	333	21.39	16.71
4	533.46	44.61 QP	46.00	-1.39	1.00 V	256	25.44	19.17
5	578.17	38.53 QP	46.00	-7.47	1.00 V	354	18.30	20.23
6	778.39	39.62 QP	46.00	-6.38	1.00 V	185	16.26	23.36

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

802.11b DSSS modulation (A-308 antenna with 8dBi)

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2292.00	46.28 PK	74.00	-27.72	1.06 H	215	14.78	31.50
2	2390.00	36.35 PK	74.00	-37.65	1.20 H	247	4.48	31.87
3	*2412.00	92.19 PK			1.20 H	247	60.23	31.96
3	*2412.00	87.65 AV			1.20 H	247	55.69	31.96
4	4824.00	50.13 PK	74.00	-23.87	1.09 H	155	12.30	37.83
4	4824.00	36.81 AV	54.00	-17.19	1.09 H	155	-1.02	37.83

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2292.00	47.26 PK	74.00	-26.74	1.09 V	120	15.76	31.50
1	2292.00	42.37 AV	54.00	-11.63	1.09 V	120	10.87	31.50
2	2390.00	55.55 PK	74.00	-18.45	1.20 V	220	23.68	31.87
2	2390.00	51.83 AV	54.00	-2.17	1.20 V	220	19.96	31.87
3	*2412.00	110.89 PK			1.20 V	220	78.93	31.96
3	*2412.00	107.17 AV			1.20 V	220	75.21	31.96
4	4824.00	50.34 PK	74.00	-23.66	1.09 V	211	12.51	37.83
4	4824.00	37.25 AV	54.00	-16.75	1.09 V	211	-0.58	37.83

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2268.00	49.83 PK	74.00	-24.17	1.05 H	219	18.43	31.40
2	*2437.00	90.27 PK			1.28 H	106	58.21	32.06
2	*2437.00	86.58 AV			1.28 H	106	54.52	32.06
3	4874.00	49.86 PK	74.00	-24.14	1.20 H	169	11.88	37.98

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2268.00	51.18 PK	74.00	-22.82	1.05 V	211	19.78	31.40
1	2268.00	47.82 AV	54.00	-6.18	1.05 V	211	16.42	31.40
2	*2437.00	111.76 PK			1.02 V	326	79.70	32.06
2	*2437.00	108.00 AV			1.02 V	326	75.94	32.06
3	4874.00	51.09 PK	74.00	-22.91	1.10 V	196	13.11	37.98
3	4874.00	37.56 AV	54.00	-16.44	1.10 V	196	-0.42	37.98

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2242.00	49.58 PK	74.00	-24.42	1.10 H	159	18.28	31.30
2	*2462.00	90.47 PK			1.20 H	241	58.31	32.16
2	*2462.00	86.75 AV			1.20 H	241	54.59	32.16
3	2483.50	31.70 PK	74.00	-42.30	1.20 H	241	-0.54	32.24
4	4924.00	48.29 PK	74.00	-25.71	1.06 H	166	10.15	38.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2242.00	51.89 PK	74.00	-22.11	1.07 V	121	20.59	31.30
1	2242.00	45.46 AV	54.00	-8.54	1.07 V	121	14.16	31.30
2	*2462.00	111.45 PK			1.19 V	200	79.29	32.16
2	*2462.00	107.43 AV			1.19 V	200	75.27	32.16
3	2483.50	52.68 PK	74.00	-21.32	1.10 V	210	20.44	32.24
3	2483.50	48.66 AV	54.00	-5.34	1.10 V	210	16.42	32.24
4	4924.00	49.88 PK	74.00	-24.12	1.10 V	210	11.74	38.14

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

802.11b DSSS modulation (A-807 antenna with 4.5dBi)

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2292.00	47.53 PK	74.00	-26.47	1.16 H	215	16.03	31.50
1	2292.00	43.62 AV	54.00	-10.38	1.16 H	215	12.12	31.50
2	2390.00	46.01 PK	74.00	-27.99	1.80 H	277	14.14	31.87
2	2390.00	42.10 AV	54.00	-11.90	1.80 H	277	10.23	31.87
3	*2412.00	101.83 PK			1.80 H	277	69.87	31.96
3	*2412.00	97.92 AV			1.80 H	277	65.96	31.96
4	4824.00	49.63 PK	74.00	-24.37	1.12 H	196	11.80	37.83

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2292.00	49.63 PK	74.00	-24.37	1.07 V	103	18.13	31.50
2	2390.00	53.31 PK	74.00	-20.69	1.20 V	325	21.44	31.87
2	2390.00	49.46 AV	54.00	-4.54	1.20 V	325	17.59	31.87
3	*2412.00	109.13 PK			1.20 V	325	77.17	31.96
3	*2412.00	105.28 AV			1.20 V	325	73.32	31.96
4	4824.00	52.39 PK	74.00	-21.61	1.16 V	243	14.56	37.83
4	4824.00	39.27 AV	54.00	-14.73	1.16 V	243	1.44	37.83

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2268.00	49.63 PK	74.00	-24.37	1.06 H	216	18.23	31.40
2	*2437.00	103.78 PK			1.68 H	277	71.72	32.06
2	*2437.00	99.51 AV			1.68 H	277	67.45	32.06
3	4874.00	49.56 PK	74.00	-24.44	1.35 H	211	11.58	37.98

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2268.00	49.51 PK	74.00	-24.49	1.24 V	196	18.11	31.40
2	*2437.00	108.47 PK			1.15 V	329	76.41	32.06
2	*2437.00	104.72 AV			1.15 V	329	72.66	32.06
3	4874.00	52.23 PK	74.00	-21.77	1.16 V	125	14.25	37.98
3	4874.00	38.33 AV	54.00	-15.67	1.16 V	125	0.35	37.98

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2242.00	48.57 PK	74.00	-25.43	1.22 H	100	17.27	31.30
2	*2462.00	103.89 PK			1.76 H	122	71.73	32.16
2	*2462.00	100.04 AV			1.76 H	122	67.88	32.16
3	2483.50	45.15 PK	74.00	-28.85	1.76 H	122	12.91	32.24
3	2483.50	41.30 AV	54.00	-12.70	1.76 H	122	9.06	32.24
4	4924.00	49.53 PK	74.00	-24.47	1.20 H	246	11.39	38.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2242.00	51.06 PK	74.00	-22.94	1.09 V	105	19.76	31.30
1	2242.00	45.27 AV	54.00	-8.73	1.09 V	105	13.97	31.30
2	*2462.00	108.46 PK			1.24 V	6	76.30	32.16
2	*2462.00	104.47 AV			1.24 V	6	72.31	32.16
3	2483.50	49.72 PK	74.00	-24.28	1.24 V	6	17.48	32.24
3	2483.50	45.73 AV	54.00	-8.27	1.24 V	6	13.49	32.24
4	4924.00	51.68 PK	74.00	-22.32	1.32 V	160	13.54	38.14
4	4924.00	39.47 AV	54.00	-14.53	1.32 V	160	1.33	38.14

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

802.11g OFDM modulation (A-308 antenna with 8dBi)

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2292.00	51.90 PK	74.00	-22.10	1.02 H	158	20.40	31.50
1	2292.00	43.85 AV	54.00	-10.15	1.02 H	158	12.35	31.50
2	2390.00	49.66 PK	74.00	-24.34	1.16 H	210	17.79	31.87
2	2390.00	39.30 AV	54.00	-14.70	1.16 H	210	7.43	31.87
3	*2412.00	96.81 PK			1.16 H	210	64.85	31.96
3	*2412.00	86.45 AV			1.16 H	210	54.49	31.96
4	4824.00	48.93 PK	74.00	-25.07	1.19 H	122	11.10	37.83

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2292.00	59.76 PK	74.00	-14.24	1.52 V	309	28.26	31.50
1	2292.00	51.82 AV	54.00	-2.18	1.52 V	309	20.32	31.50
2	2390.00	61.88 PK	74.00	-12.12	1.16 V	250	30.01	31.87
2	2390.00	52.06 AV	54.00	-1.94	1.16 V	250	20.19	31.87
3	*2412.00	109.03 PK			1.16 V	250	77.07	31.96
3	*2412.00	99.21 AV			1.16 V	250	67.25	31.96
4	4824.00	49.56 PK	74.00	-24.44	1.07 V	206	11.73	37.83

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2268.00	49.85 PK	74.00	-24.15	1.06 H	50	18.45	31.40
2	*2437.00	94.82 PK			1.02 H	225	62.76	32.06
2	*2437.00	85.06 AV			1.02 H	225	53.00	32.06
3	4874.00	47.55 PK	74.00	-26.45	1.10 H	160	9.57	37.98

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2268.00	53.28 PK	74.00	-20.72	1.07 V	300	21.88	31.40
1	2268.00	49.10 AV	54.00	-4.90	1.07 V	300	17.70	31.40
2	*2437.00	109.81 PK			1.25 V	250	77.75	32.06
2	*2437.00	99.53 AV			1.25 V	250	67.47	32.06
3	4874.00	49.87 PK	74.00	-24.13	1.19 V	218	11.89	37.98

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2242.00	52.36 PK	74.00	-21.64	1.10 H	196	21.06	31.30
1	2242.00	46.50 AV	54.00	-7.50	1.10 H	196	15.20	31.30
2	*2462.00	94.62 PK			1.05 H	211	62.46	32.16
2	*2462.00	85.44 AV			1.05 H	211	53.28	32.16
3	2483.50	46.81 PK	74.00	-27.19	1.05 H	211	14.57	32.24
3	2483.50	37.63 AV	54.00	-16.37	1.05 H	211	5.39	32.24
4	4924.00	49.68 PK	74.00	-24.32	1.09 H	211	11.54	38.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2242.00	54.18 PK	74.00	-19.82	1.29 V	250	22.88	31.30
1	2242.00	48.65 AV	54.00	-5.35	1.29 V	250	17.35	31.30
2	*2462.00	108.91 PK			1.15 V	293	76.75	32.16
2	*2462.00	99.15 AV			1.15 V	293	66.99	32.16
3	2483.50	61.10 PK	74.00	-12.90	1.15 V	293	28.86	32.24
3	2483.50	51.34 AV	54.00	-2.66	1.15 V	293	19.10	32.24
4	4924.00	51.63 PK	74.00	-22.37	1.02 V	216	13.49	38.14
4	4924.00	40.06 AV	54.00	-13.94	1.02 V	216	1.92	38.14

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

802.11g OFDM modulation (A-807 antenna with 4.5dBi)

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2292.00	48.67 PK	74.00	-25.33	1.20 H	256	17.17	31.50
2	2390.00	53.96 PK	74.00	-20.04	1.52 H	106	22.09	31.87
2	2390.00	43.55 AV	54.00	-10.45	1.52 H	106	11.68	31.87
3	*2412.00	101.13 PK			1.52 H	106	69.17	31.96
3	*2412.00	90.72 AV			1.52 H	106	58.76	31.96
4	4824.00	48.76 PK	74.00	-25.24	1.03 H	158	10.93	37.83

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2292.00	58.26 PK	74.00	-15.74	1.26 V	24	26.76	31.50
1	2292.00	50.47 AV	54.00	-3.53	1.26 V	24	18.97	31.50
2	2390.00	59.13 PK	74.00	-14.87	1.12 V	10	27.26	31.87
2	2390.00	48.61 AV	54.00	-5.39	1.12 V	10	16.74	31.87
3	*2412.00	106.28 PK			1.12 V	10	74.32	31.96
3	*2412.00	95.76 AV			1.12 V	10	63.80	31.96
4	4824.00	49.51 PK	74.00	-24.49	1.10 V	195	11.68	37.83

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2268.00	50.19 PK	74.00	-23.81	1.12 H	79	18.79	31.40
1	2268.00	45.47 AV	54.00	-8.53	1.12 H	79	14.07	31.40
2	*2437.00	102.51 PK			1.70 H	285	70.45	32.06
2	*2437.00	91.87 AV			1.70 H	285	59.81	32.06
3	4874.00	48.59 PK	74.00	-25.41	1.02 H	93	10.61	37.98

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2268.00	50.38 PK	74.00	-23.62	1.15 V	130	18.98	31.40
1	2268.00	46.25 AV	54.00	-7.75	1.15 V	130	14.85	31.40
2	*2437.00	106.35 PK			1.15 V	12	74.29	32.06
2	*2437.00	95.83 AV			1.15 V	12	63.77	32.06
3	4874.00	48.29 PK	74.00	-25.71	1.05 V	253	10.31	37.98

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2242.00	48.96 PK	74.00	-25.04	1.20 H	316	17.66	31.30
2	*2462.00	100.87 PK			1.87 H	253	68.71	32.16
2	*2462.00	90.35 AV			1.87 H	253	58.19	32.16
3	2483.50	53.06 PK	74.00	-20.94	1.87 H	253	20.82	32.24
3	2483.50	42.54 AV	54.00	-11.46	1.87 H	253	10.30	32.24
4	4924.00	48.16 PK	74.00	-25.84	1.26 H	203	10.02	38.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2242.00	51.16 PK	74.00	-22.84	1.10 V	235	19.86	31.30
1	2242.00	45.79 AV	54.00	-8.21	1.10 V	235	14.49	31.30
2	*2462.00	106.73 PK			1.12 V	9	74.57	32.16
2	*2462.00	96.02 AV			1.12 V	9	63.86	32.16
3	2483.50	58.92 PK	74.00	-15.08	1.12 V	9	26.68	32.24
3	2483.50	48.21 AV	54.00	-5.79	1.12 V	9	15.97	32.24
4	4924.00	48.69 PK	74.00	-25.31	1.06 V	165	10.55	38.14

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK 30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS


802.11b DSSS modulation

EUT	2.4GHz/5GHz Outdoor Access Point	MODEL	P-781
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 57%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.40	0.5	PASS
6	2437	10.60	0.5	PASS
11	2462	11.60	0.5	PASS



CH1

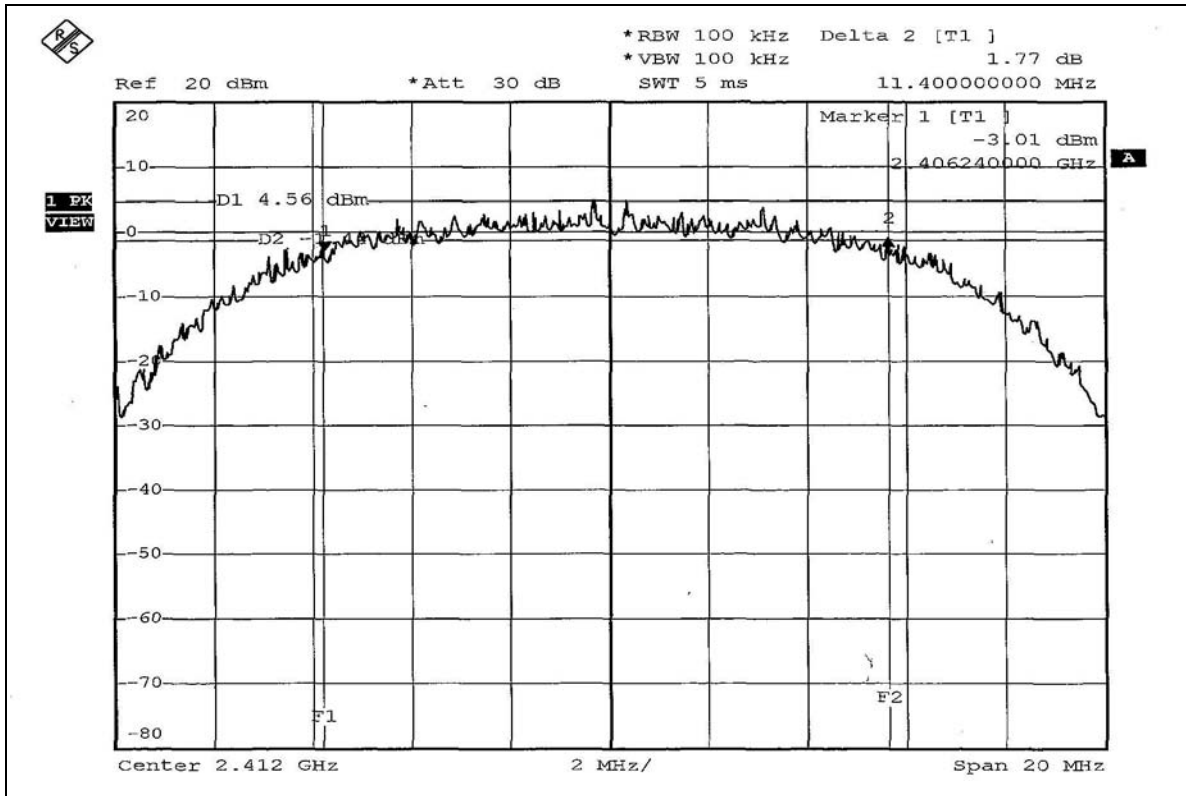


CH6

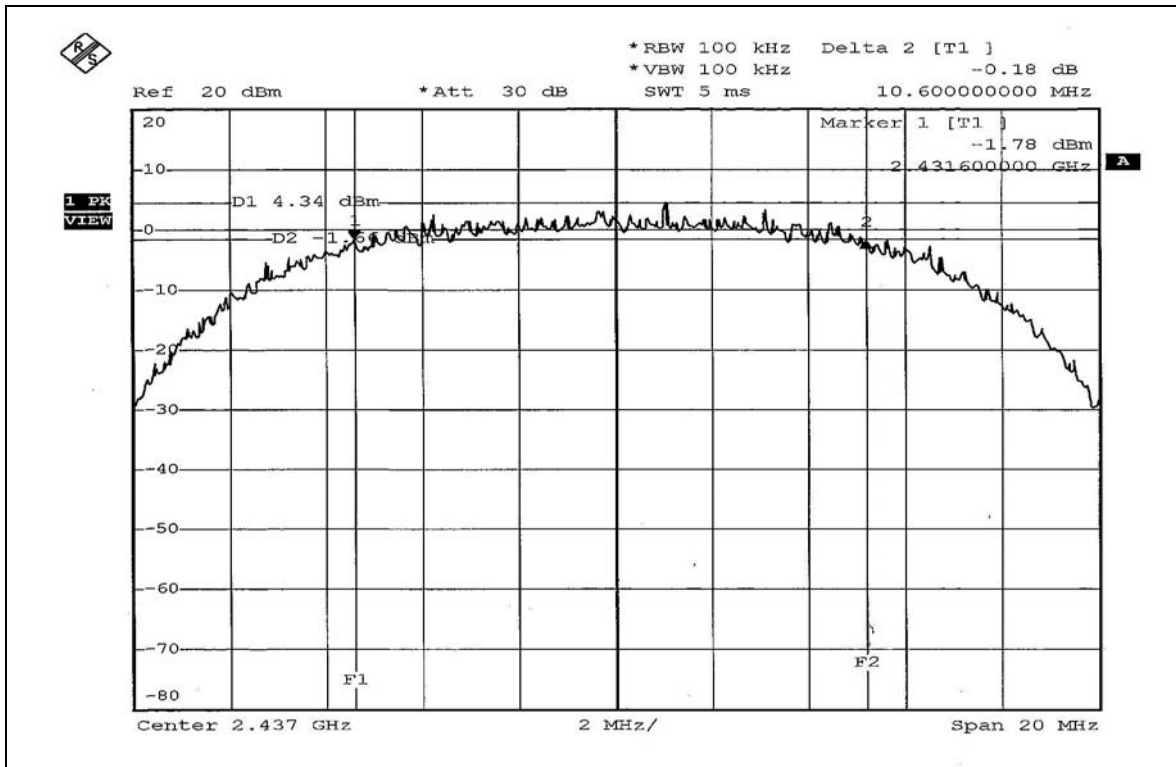



CH11

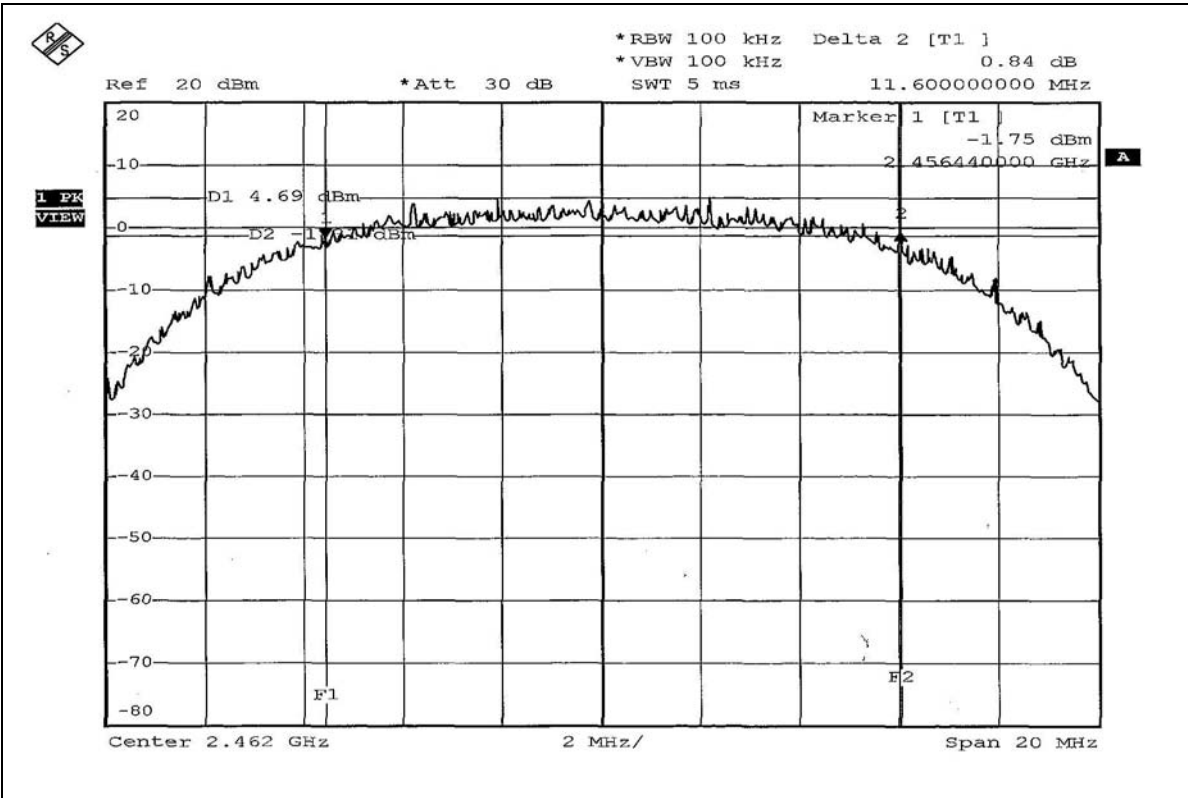


802.11g OFDM modulation

EUT	2.4GHz/5GHz Outdoor Access Point	MODEL	P-781
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 57%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.64	0.5	PASS
6	2437	16.56	0.5	PASS
11	2462	16.60	0.5	PASS




CH1

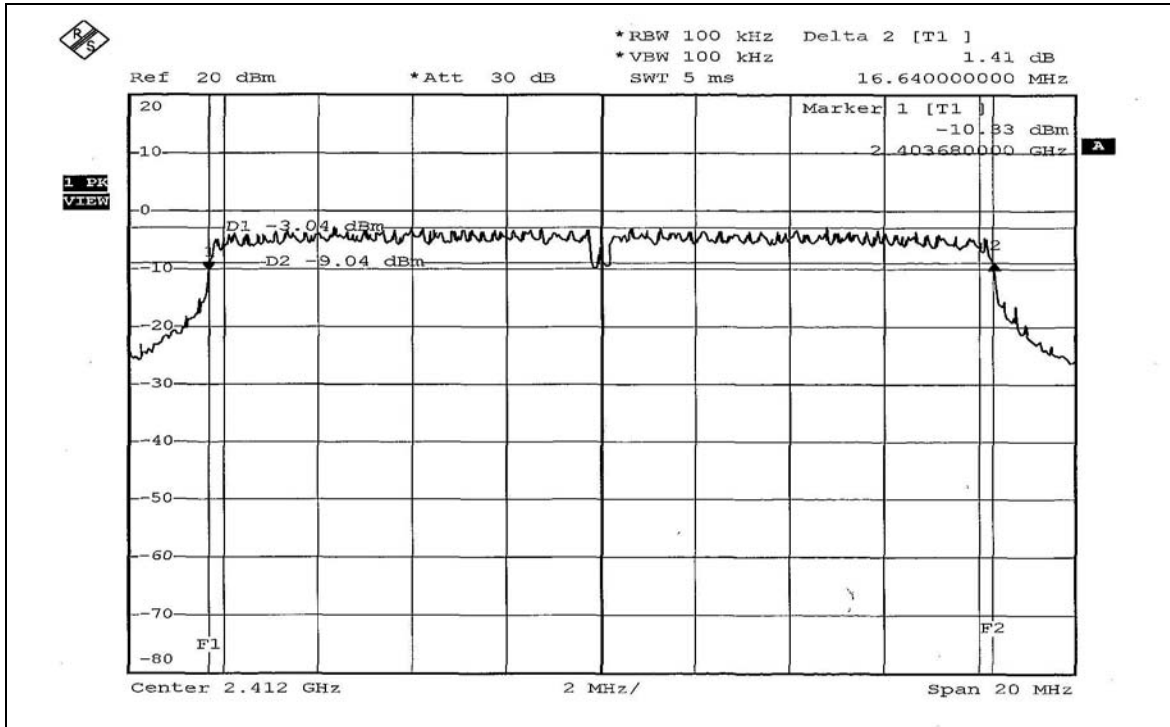

CH6

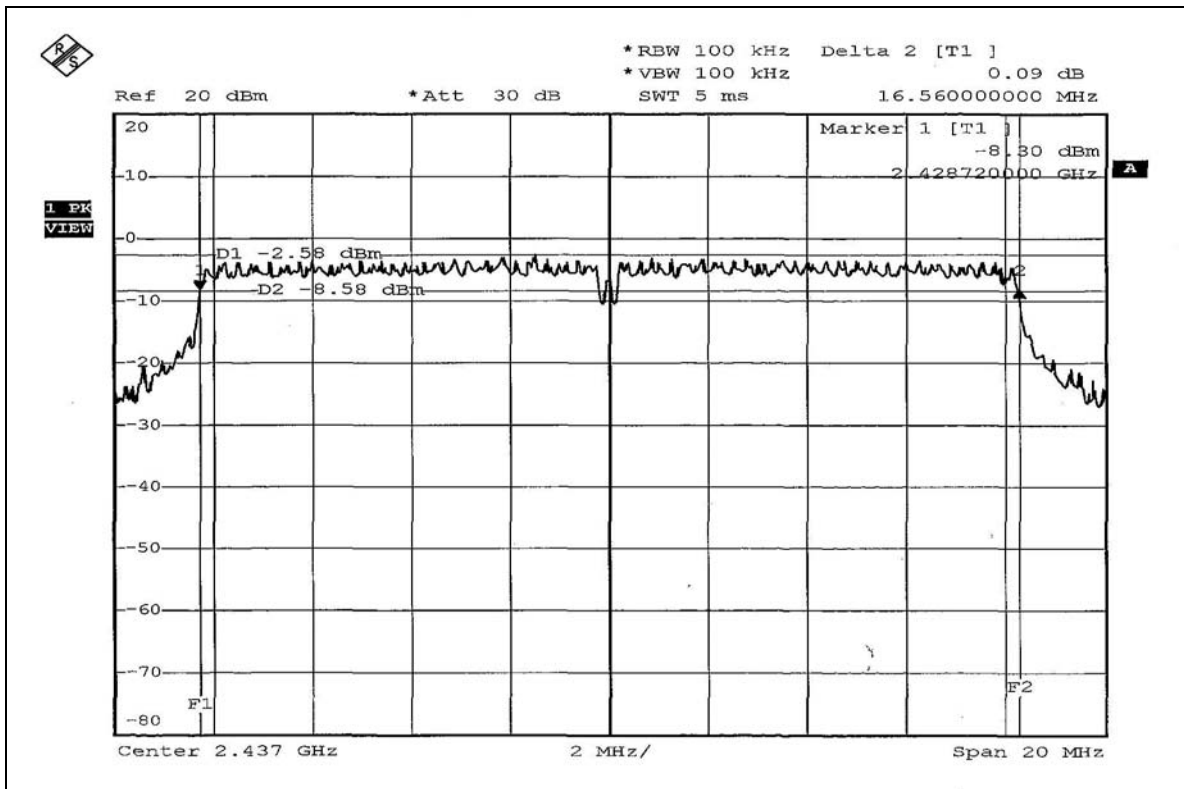

CH11

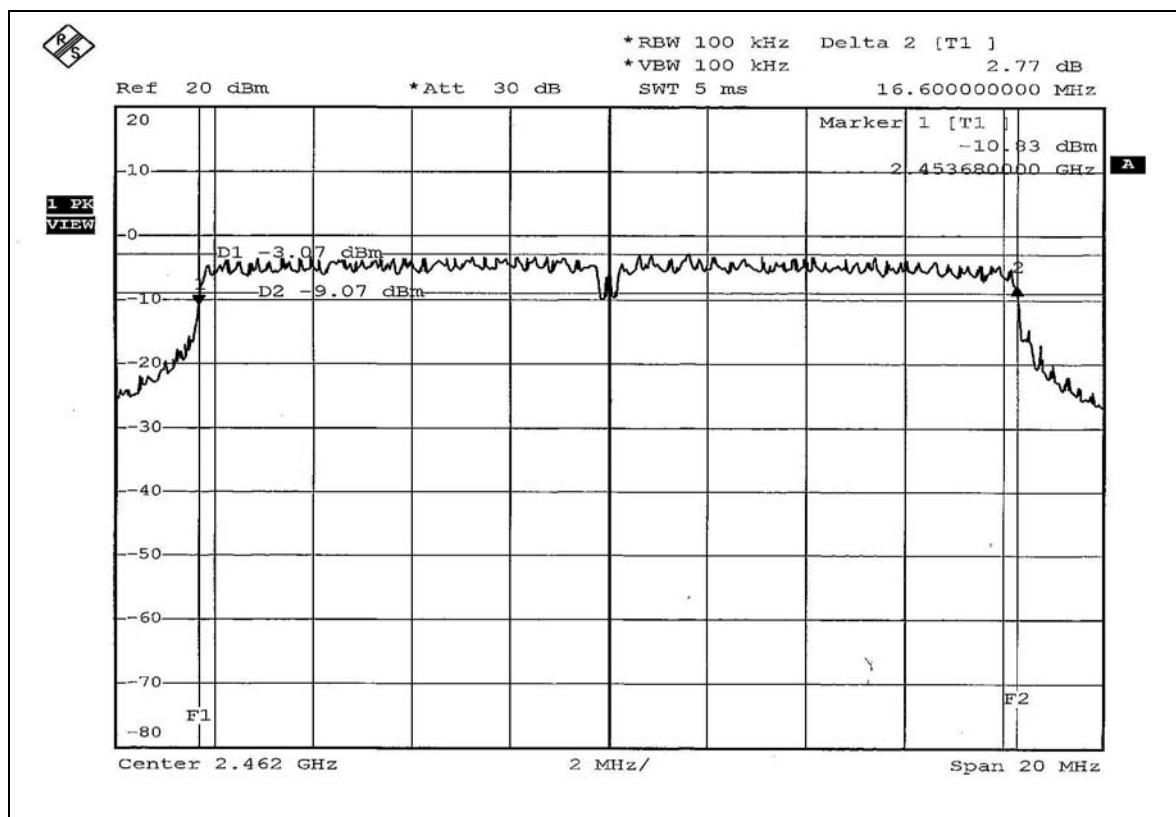

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 06, 2005
TEKTRONIX OSCILLOSCOPE	TDS 1012	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b DSSS modulation

EUT	2.4GHz/5GHz Outdoor Access Point	MODEL	P-781
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 57%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	28.576	14.56	28	PASS
6	2437	28.774	14.59	28	PASS
11	2462	28.249	14.51	28	PASS

Note: According to 15.247 (b) (4), the maximum antenna gain 8dBi is higher than 6dBi, so the limit of peak power shall be reduced by 2dB.

**802.11g OFDM modulation**

EUT	2.4GHz/5GHz Outdoor Access Point	MODEL	P-781
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 57%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	42.364	16.27	28	PASS
6	2437	43.853	16.42	28	PASS
11	2462	43.451	16.38	28	PASS

Note: According to 15.247 (b) (4), the maximum antenna gain 8dBi is higher than 6dBi, so the limit of peak power shall be reduced by 2dB.

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6


4.5.7 TEST RESULTS

802.11b DSSS modulation


EUT	2.4GHz/5GHz Outdoor Access Point	MODEL	P-781
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 57%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-8.96	8	PASS
6	2437	-8.30	8	PASS
11	2462	-8.48	8	PASS

CH1

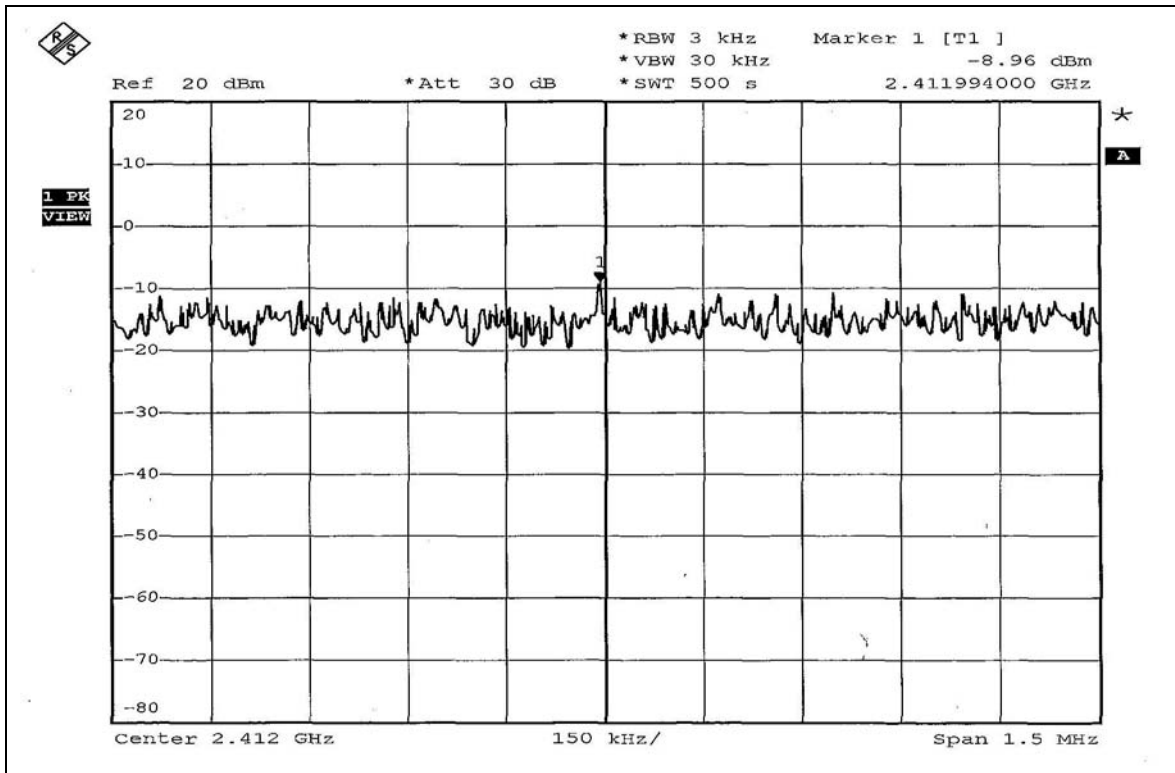


CH6

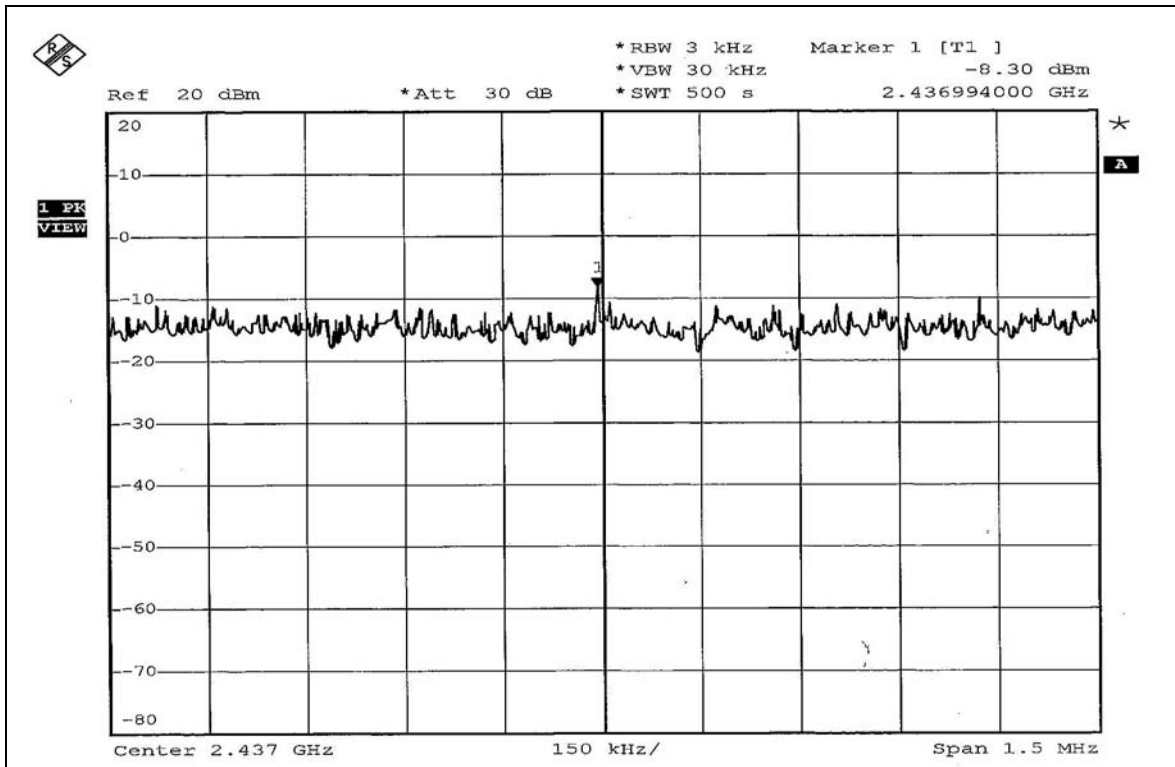



CH11

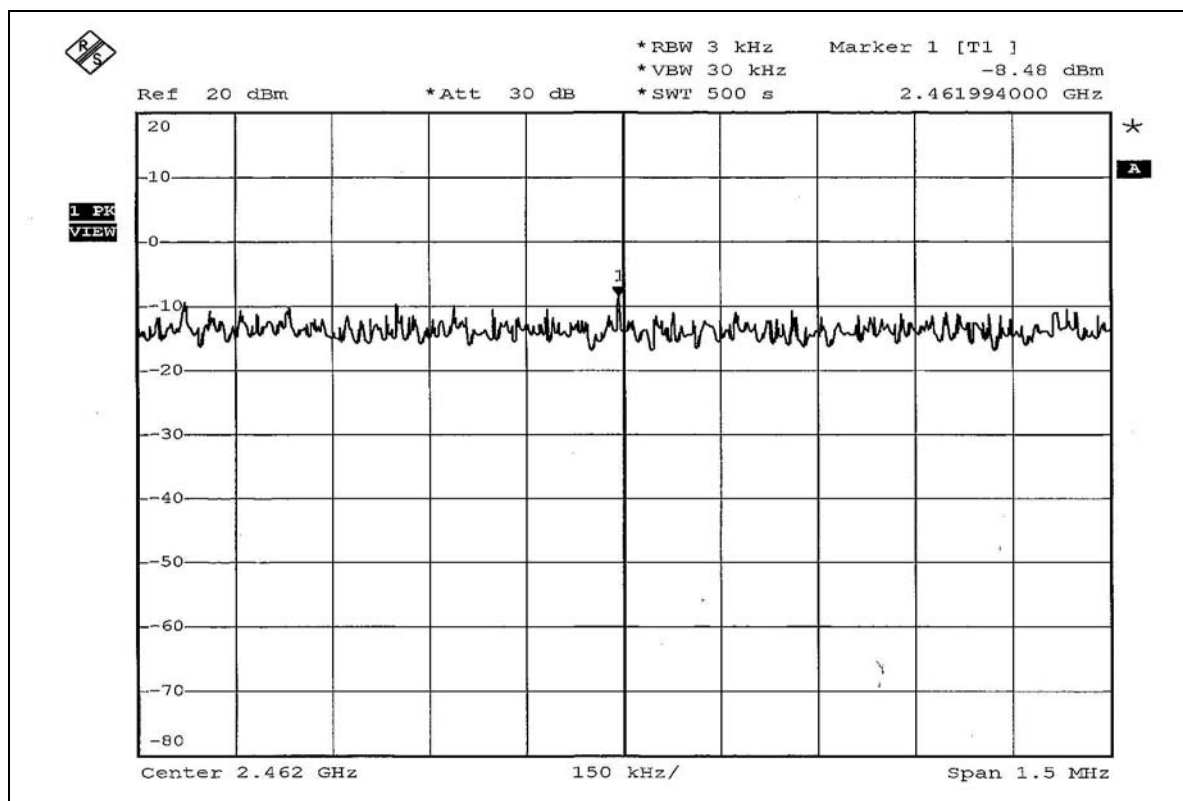


**802.11g OFDM modulation**


EUT	2.4GHz/5GHz Outdoor Access Point	MODEL	P-781
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 57%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.99	8	PASS
6	2437	-9.42	8	PASS
11	2462	-9.91	8	PASS

CH1

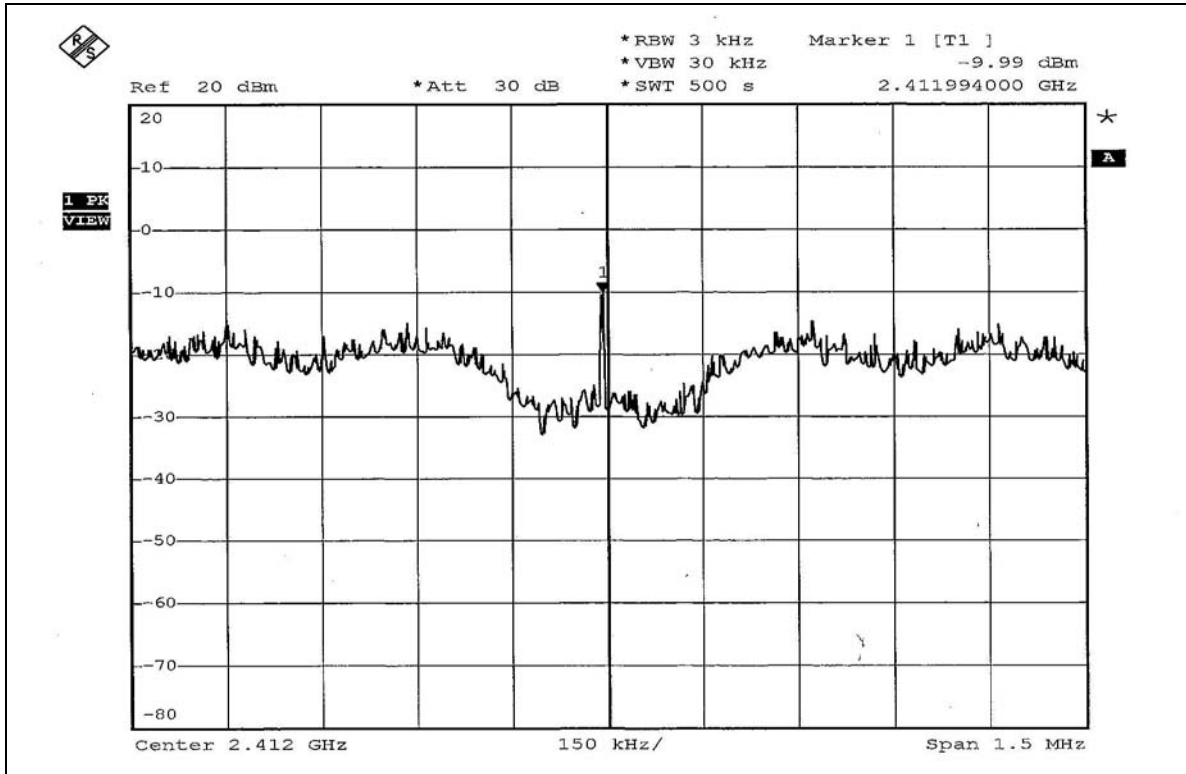


CH6

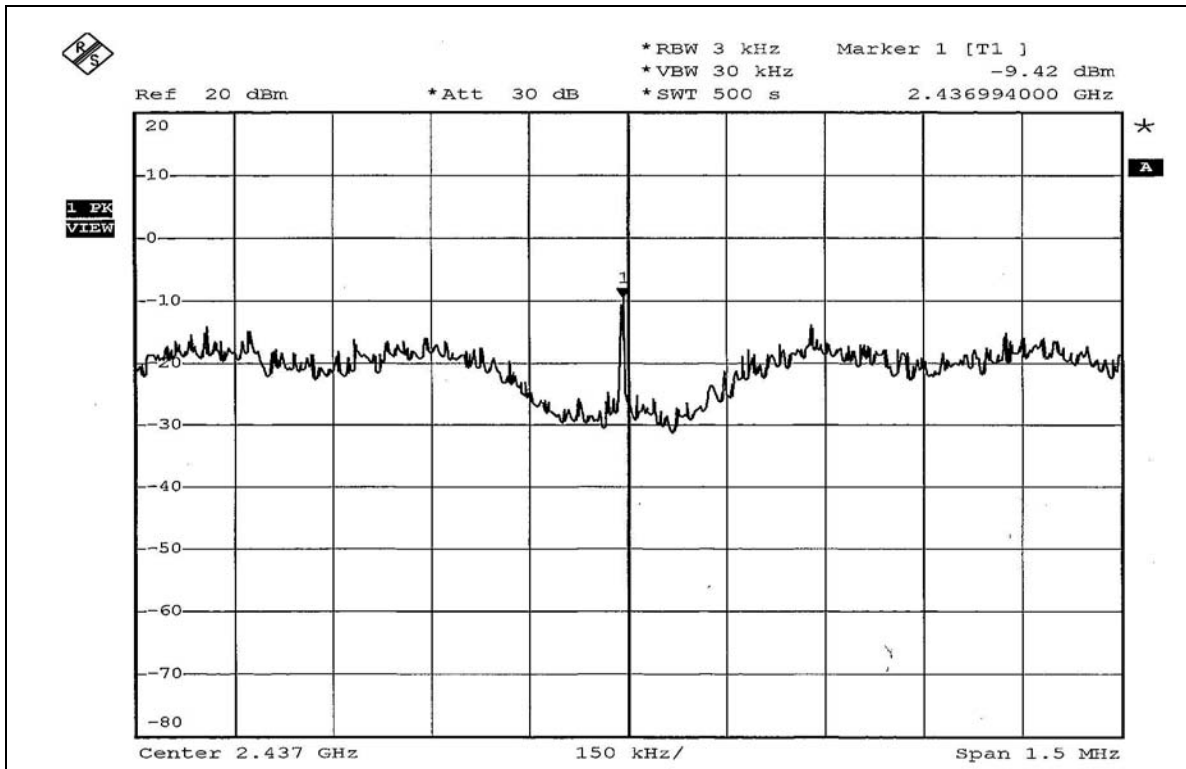



CH11

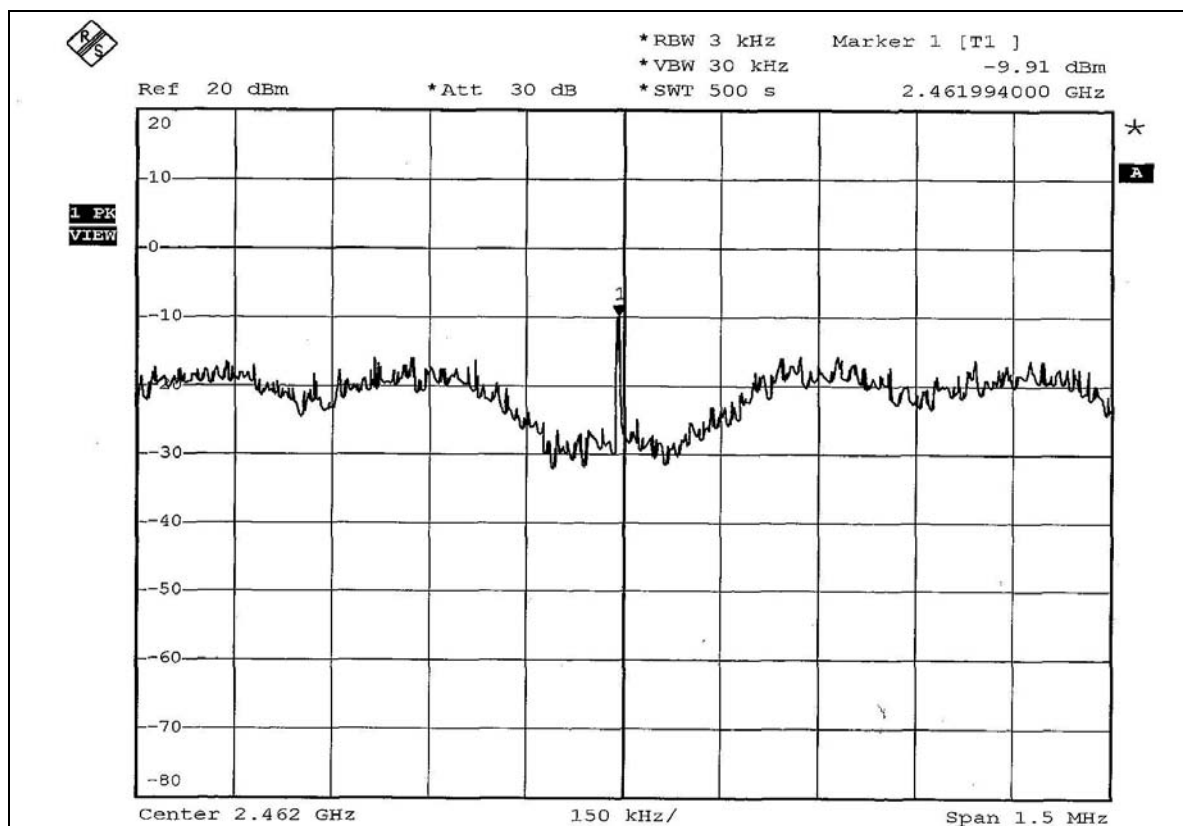

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges were measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS modulation

A-308 antenna with 8dBi

NOTE 1: The band edge emission plot on page 67 shows 51.37dBc between carrier maximum power and local maximum emission in restrict band (2.3600GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 110.89dBuV/m (Peak), so the maximum field strength in restrict band is $110.89 - 51.37 = 59.52$ dBuV/m which is under 74dBuV/m limit..

The band edge emission plot of on page 67 shows 56.79dBc between carrier maximum power and local maximum emission in restrict band (2.3600GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 107.17dBuV/m (Average), so the maximum field strength in restrict band is $107.17 - 56.79 = 50.38$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 68 shows 52.00dBc between carrier maximum power and local maximum emission in restrict band (2.4878GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 111.45dBuV/m (Peak), so the maximum field strength in restrict band is $111.45 - 52.00 = 59.45$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 69 shows 56.34dBc between carrier maximum power and local maximum emission in restrict band (2.4872GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 107.43dBuV/m (Average), so the maximum field strength in restrict band is $107.43 - 56.34 = 51.09$ dBuV/m which is under 54dBuV/m limit.

**A-807 antenna with 4.5dBi**

NOTE 1: The band edge emission plot on page 67 shows 51.37dBc between carrier maximum power and local maximum emission in restrict band (2.3600GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 109.13dBuV/m (Peak), so the maximum field strength in restrict band is $109.13 - 51.37 = 57.76$ dBuV/m which is under 74dBuV/m limit..

The band edge emission plot of on page 67 shows 56.79dBc between carrier maximum power and local maximum emission in restrict band (2.3600GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 105.28dBuV/m (Average), so the maximum field strength in restrict band is $105.28 - 56.79 = 48.49$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 68 shows 52.00dBc between carrier maximum power and local maximum emission in restrict band (2.4878GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 108.46dBuV/m (Peak), so the maximum field strength in restrict band is $108.46 - 52.00 = 56.46$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 69 shows 56.34dBc between carrier maximum power and local maximum emission in restrict band (2.4872GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 104.47dBuV/m (Average), so the maximum field strength in restrict band is $104.47 - 56.34 = 48.13$ dBuV/m which is under 54dBuV/m limit.

802.11g OFDM modulation

A-308 antenna with 8dBi

NOTE 1: The band edge emission plot on page 70 shows 43.16dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 109.03dBuV/m (Peak), so the maximum field strength in restrict band is $109.03 - 43.16 = 65.87$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of on page 70 shows 47.11dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 99.21dBuV/m (Average), so the maximum field strength in restrict band is $99.21 - 47.11 = 52.10$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 71 shows 44.67dBc between carrier maximum power and local maximum emission in restrict band (2.4882GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 108.91dBuV/m (Peak), so the maximum field strength in restrict band is $108.91 - 44.67 = 64.24$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 72 shows 49.00dBc between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 99.15dBuV/m (Average), so the maximum field strength in restrict band is $99.15 - 49.00 = 50.15$ dBuV/m which is under 54dBuV/m limit.

**A-807 antenna with 4.5dBi**



NOTE 1: The band edge emission plot on page 70 shows 43.16dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 106.28dBuV/m (Peak), so the maximum field strength in restrict band is $106.28 - 43.16 = 63.12$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on page 70 shows 47.11dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 95.76dBuV/m (Average), so the maximum field strength in restrict band is $95.76 - 47.11 = 48.65$ dBuV/m which is under 54dBuV/m limit.



NOTE 2: The band edge emission plot on page 71 shows 44.67dBc between carrier maximum power and local maximum emission in restrict band (2.4882GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 106.73dBuV/m (Peak), so the maximum field strength in restrict band is $106.73 - 44.67 = 62.06$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on page 72 shows 49.00dBc between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 96.02dBuV/m (Average), so the maximum field strength in restrict band is $96.02 - 49.00 = 47.02$ dBuV/m which is under 54dBuV/m limit.



802.11b DSSS modulation

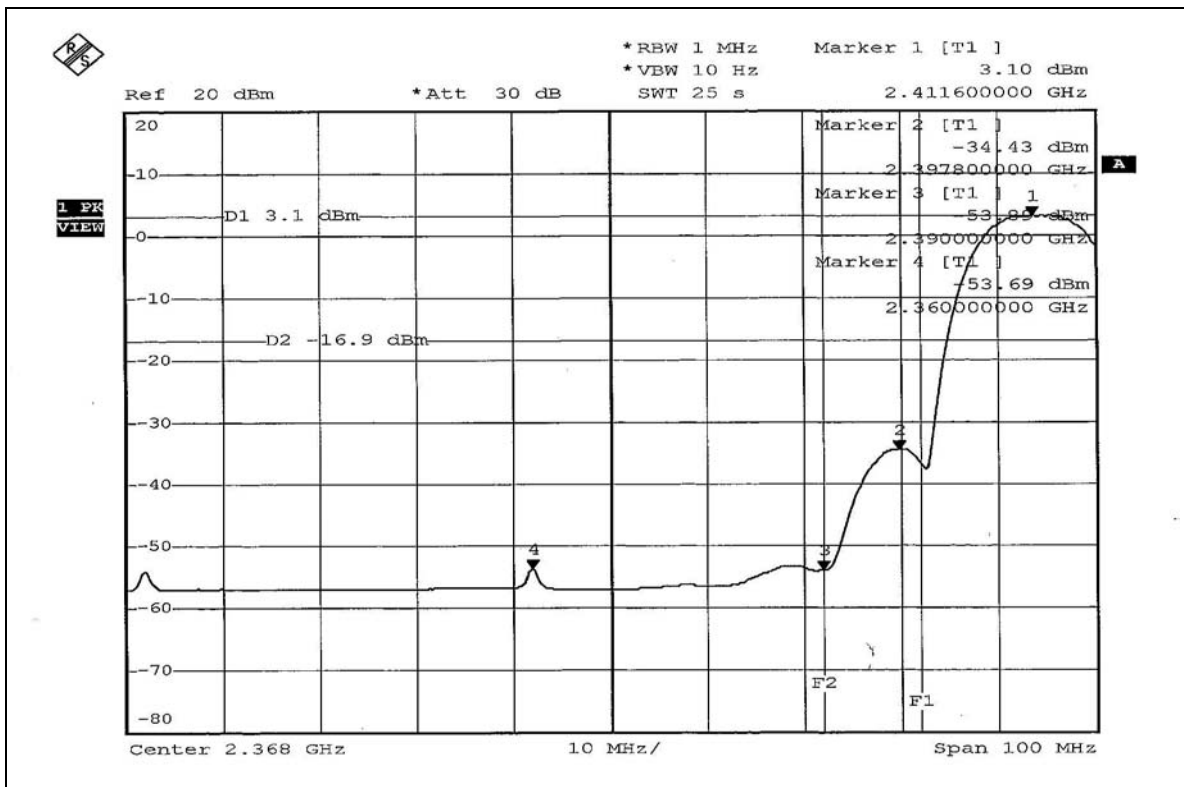
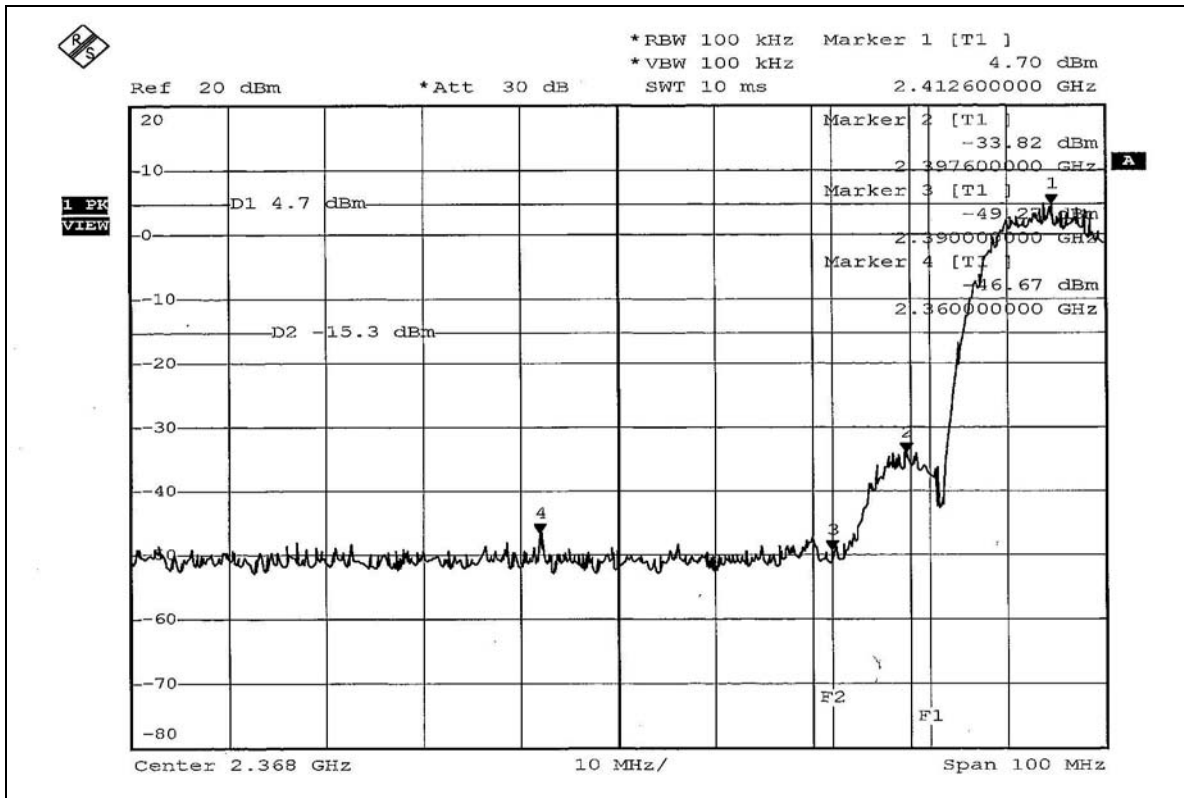


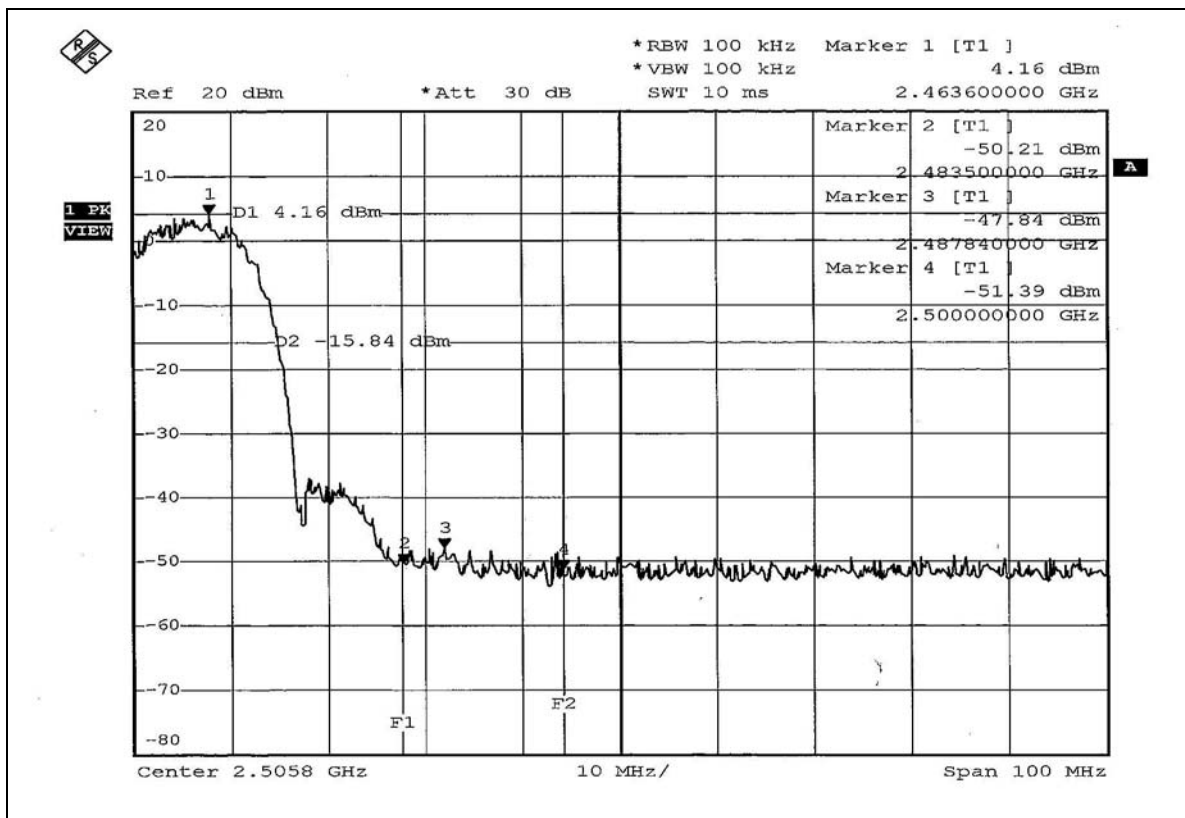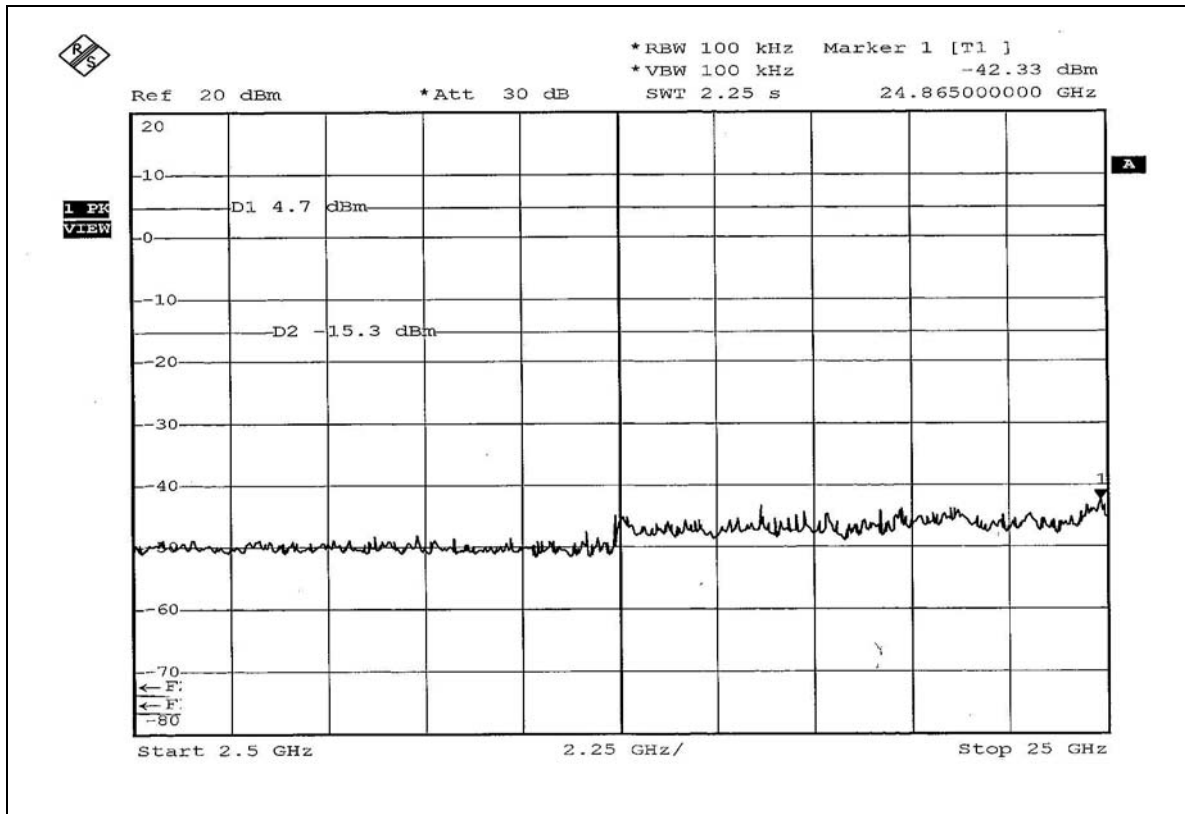

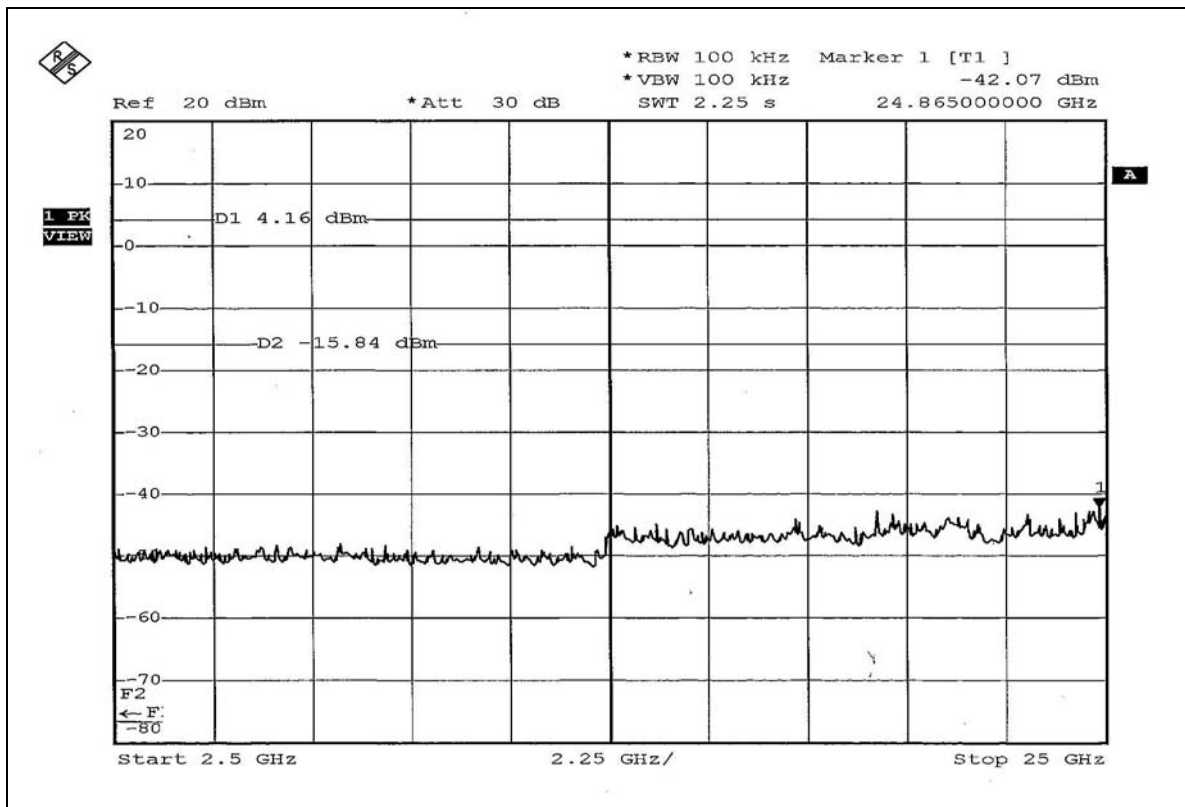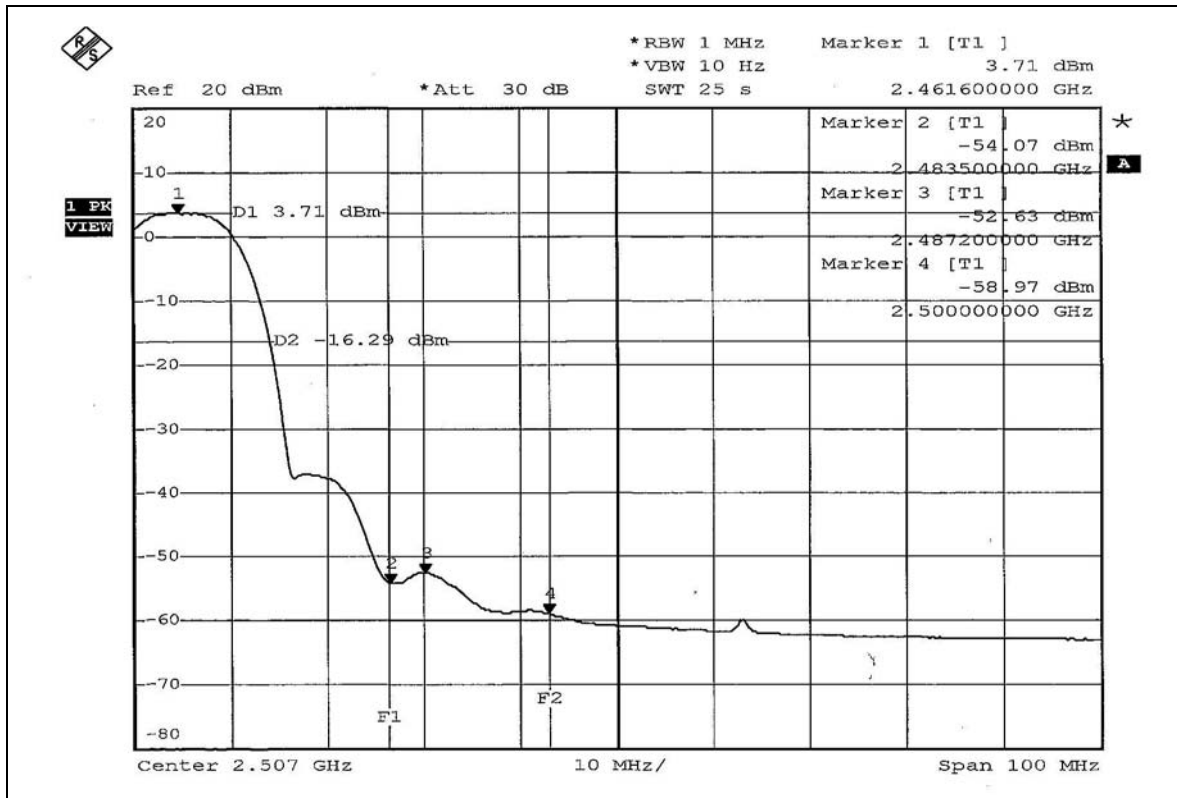

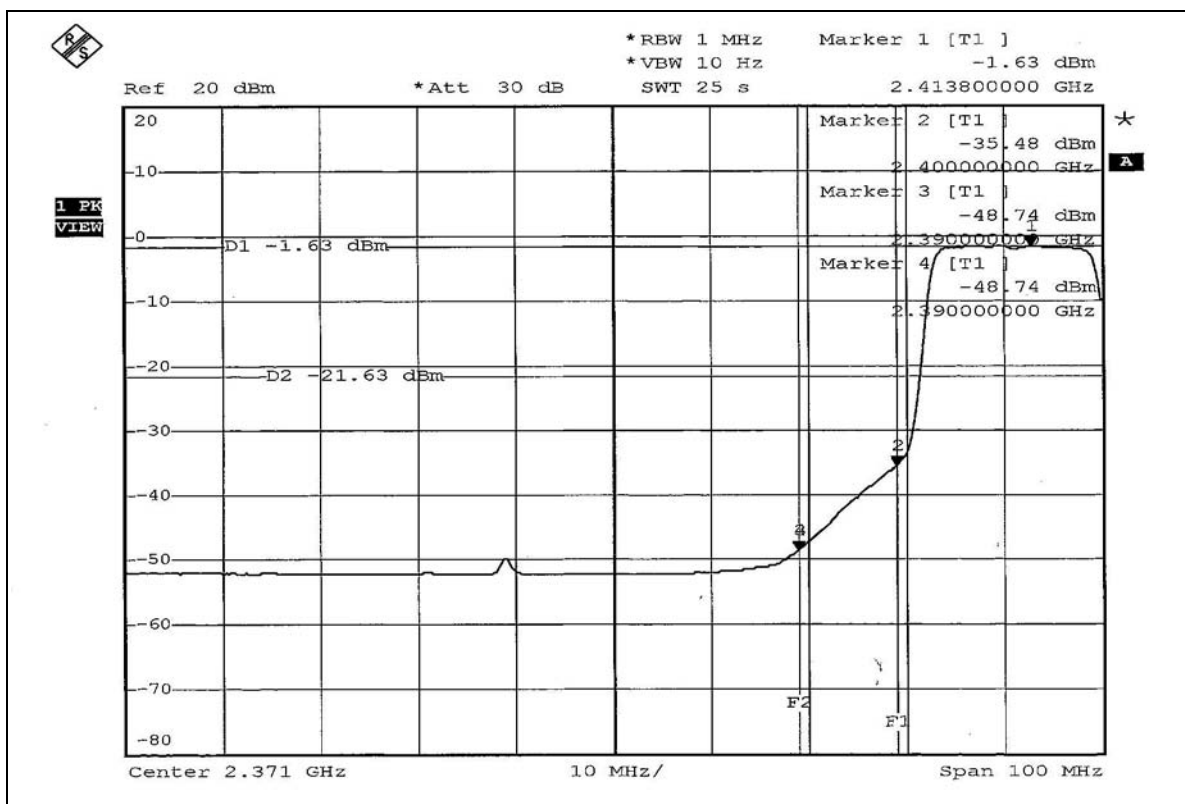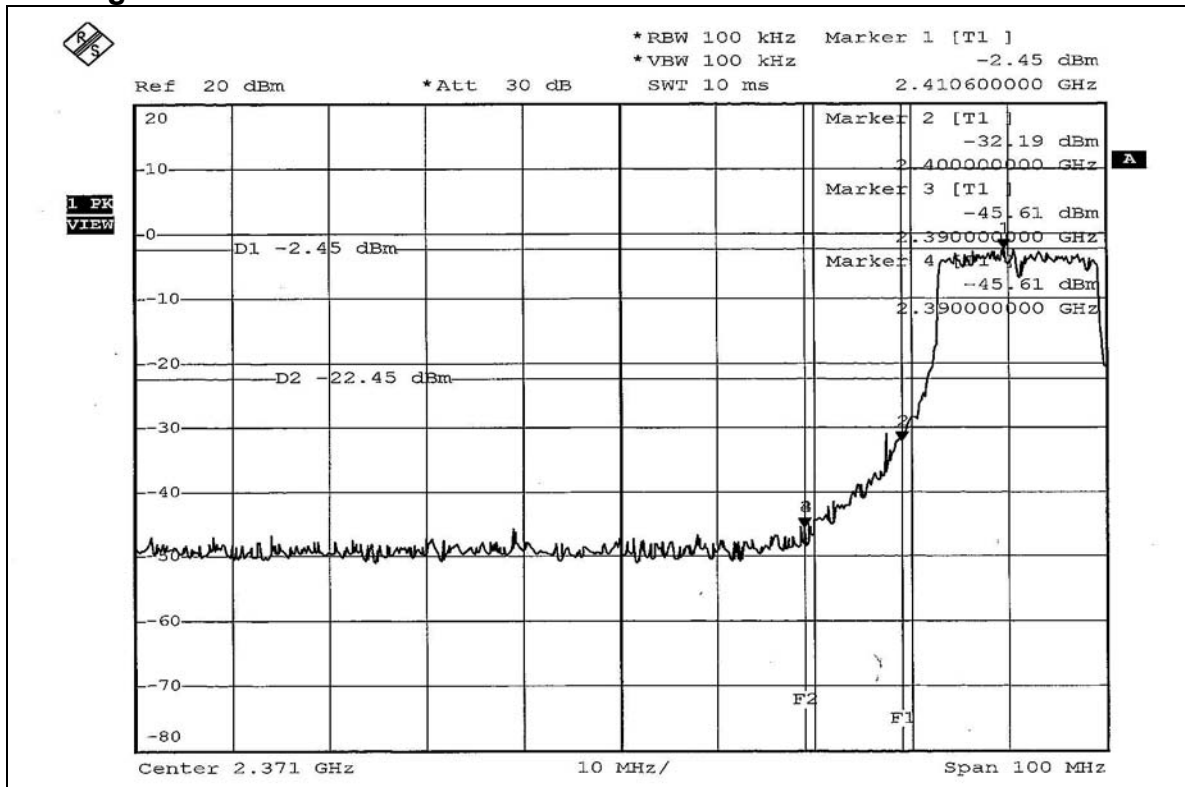802.11g OFDM modulation

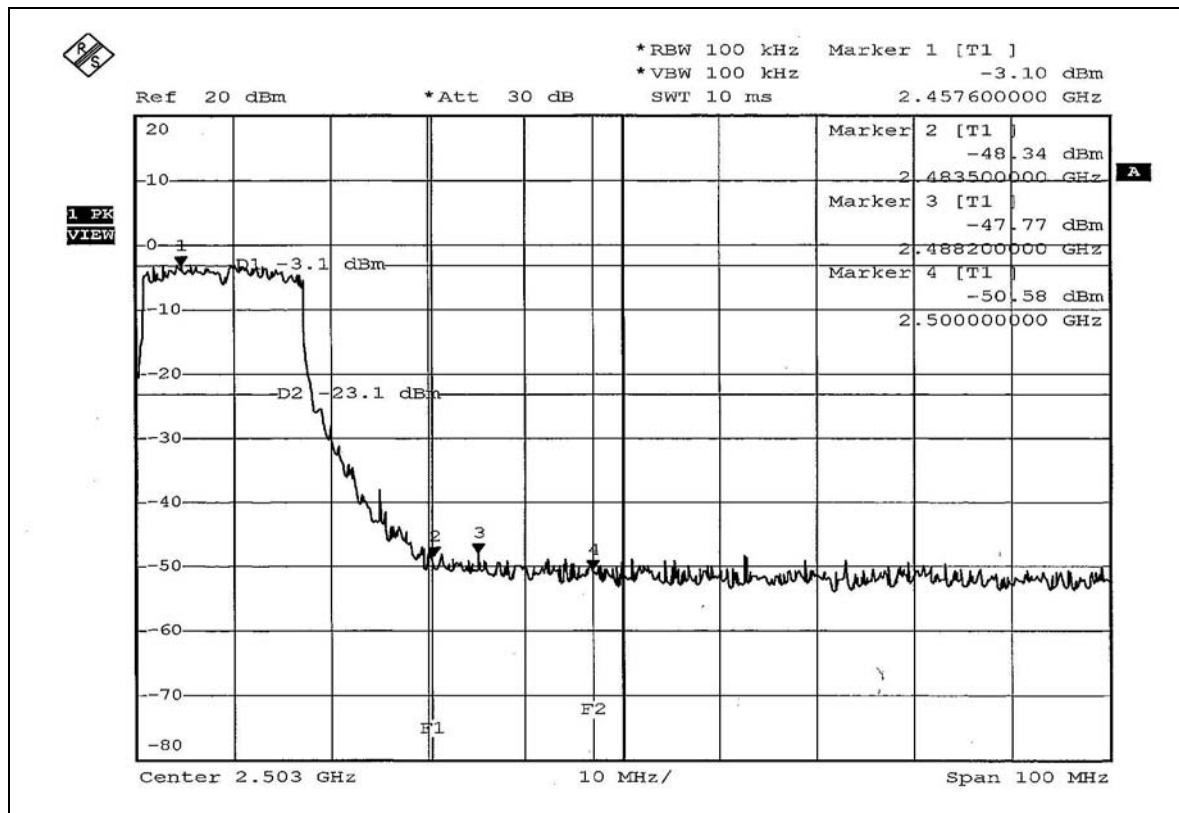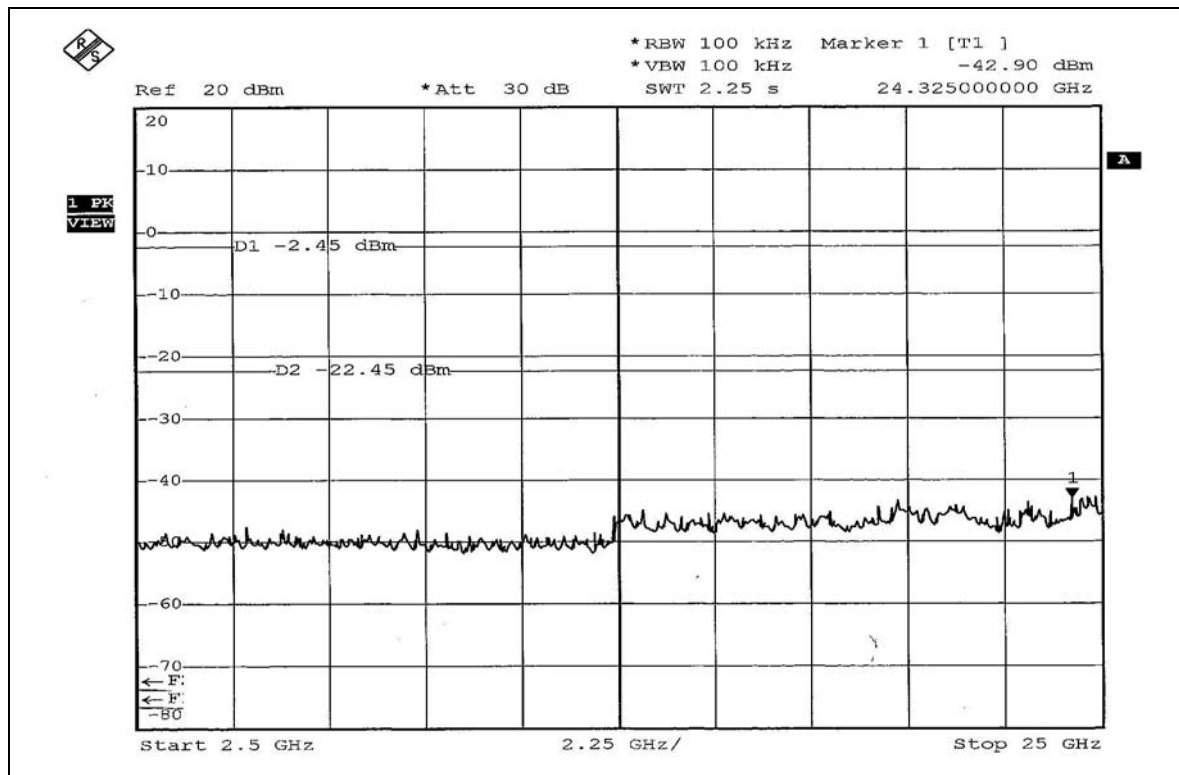

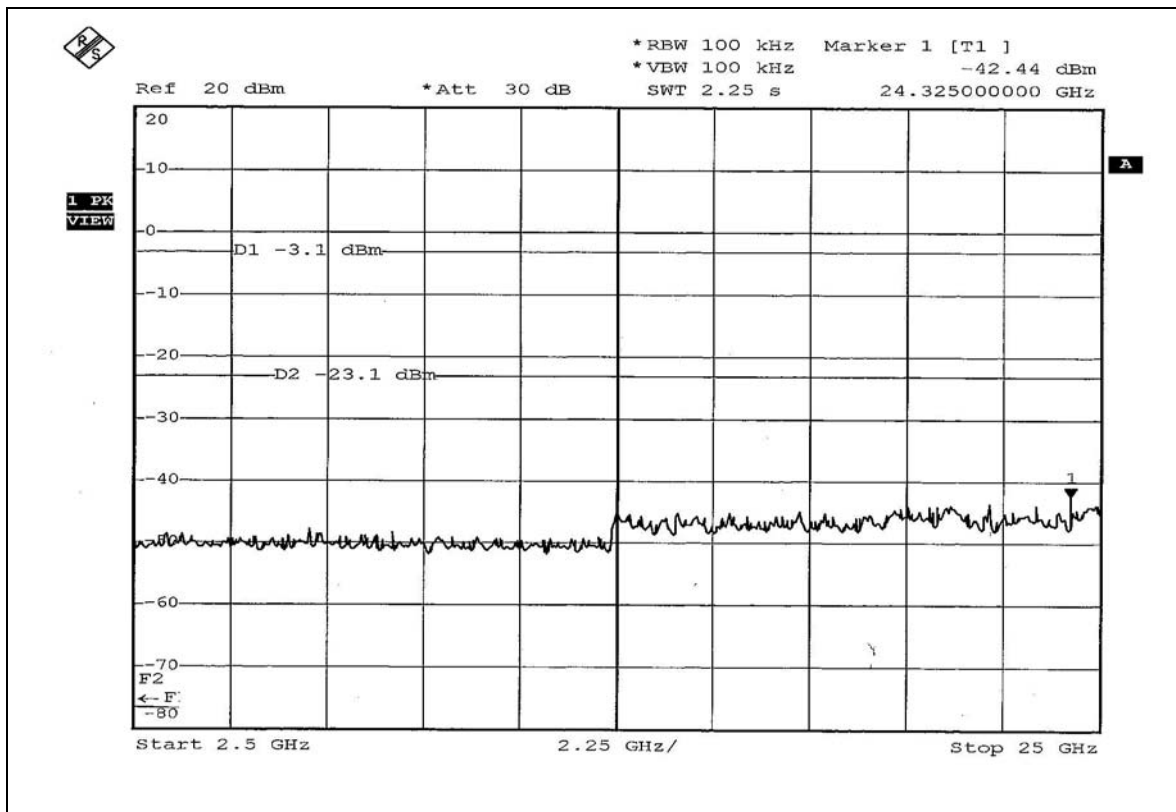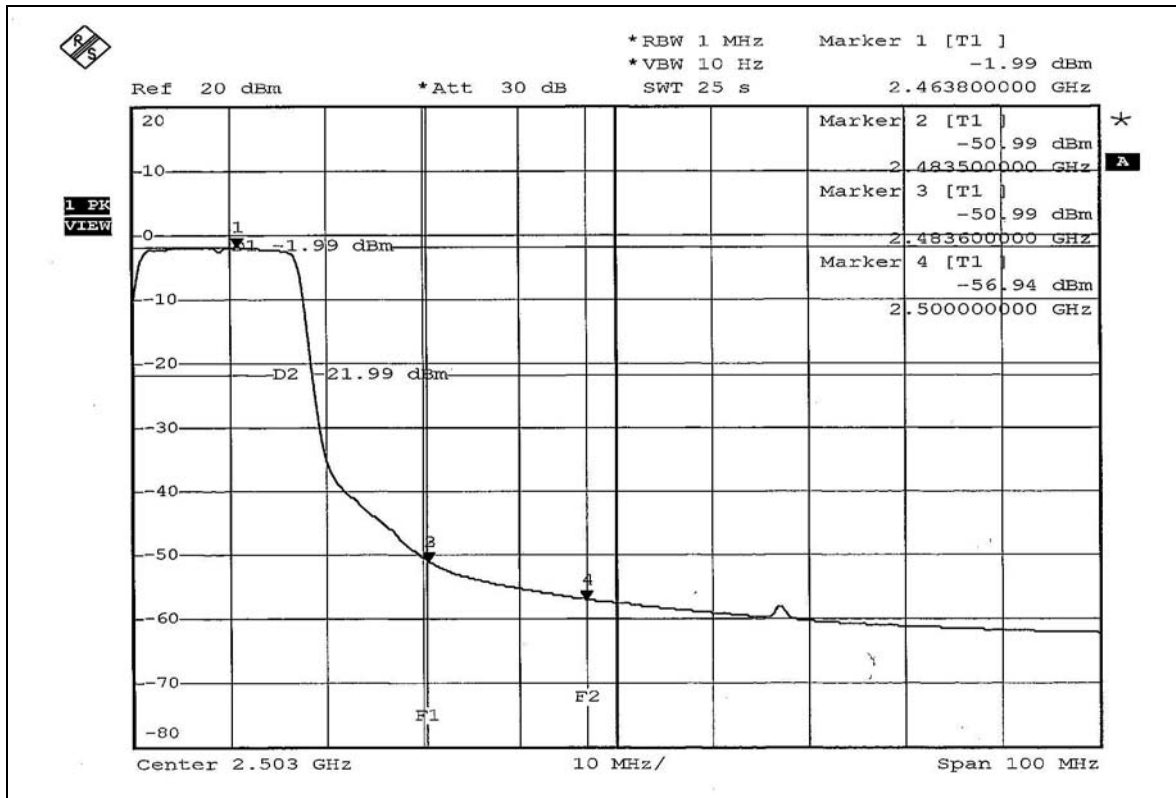



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Omni antenna with N type connector. The maximum Gain of the antenna is 8dBi.

5. TEST TYPES AND RESULTS (802.11a 5725~5850MHz Band)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
- The lower limit shall apply at the transition frequencies.
 - The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 - All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 16, 2005
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Feb. 15, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
- The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 - The test was performed in HwaYa Shielded Room 1.
 - The VCCI Site Registration No. is C-2040.




5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) was not recorded.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

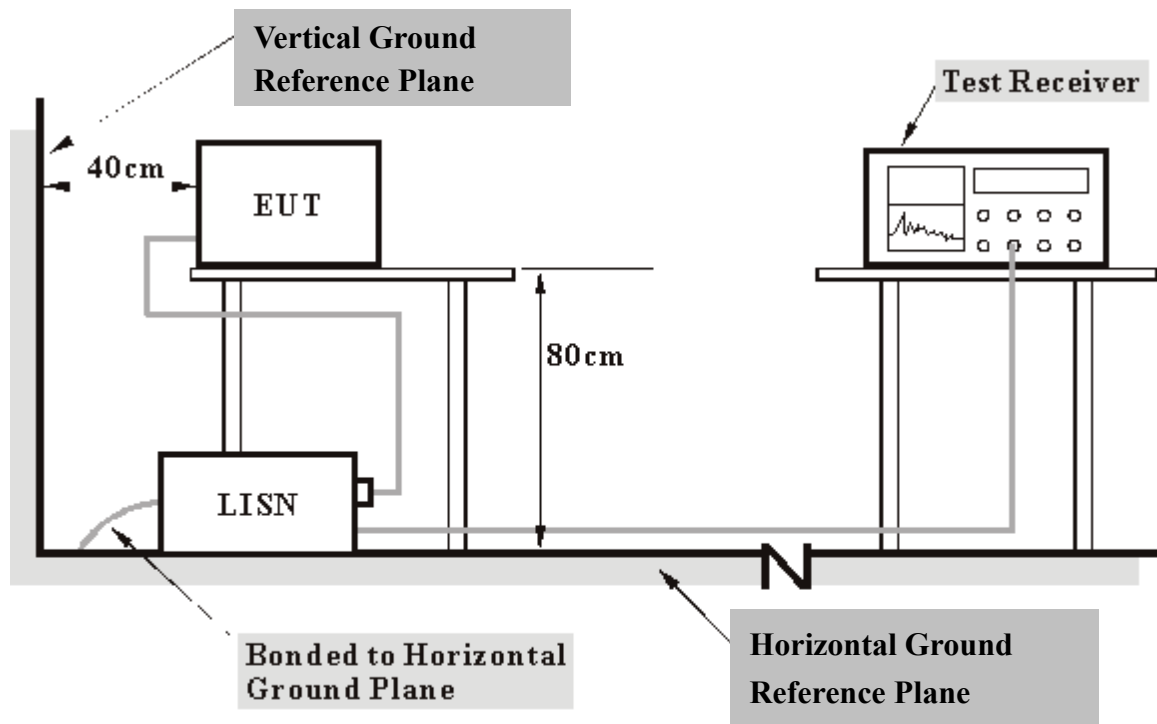

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6


5.1.7 TEST RESULTS

Conducted Worst-Case Data

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	PHASE	Line 1
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.11	46.61	-	46.72	-	65.79	55.79	-19.07	-
2	0.205	0.11	44.46	-	44.57	-	63.42	53.42	-18.85	-
3	0.338	0.11	38.57	-	38.68	-	59.26	49.26	-20.58	-
4	0.748	0.19	33.78	-	33.97	-	56.00	46.00	-22.03	-
5	2.172	0.27	34.15	-	34.42	-	56.00	46.00	-21.58	-
6	15.617	0.61	38.66	-	39.27	-	60.00	50.00	-20.73	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

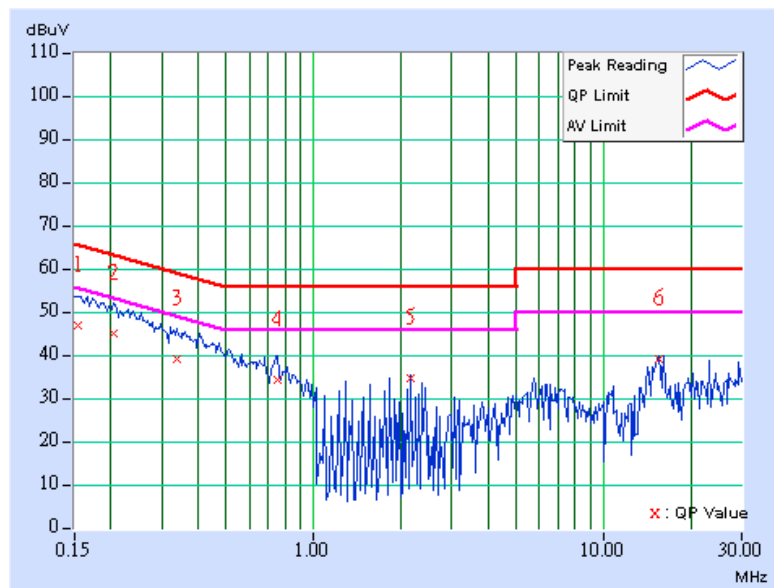

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	PHASE	Line 2
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.11	46.74	-	46.85	-	65.58	55.58	-18.73	-
2	0.201	0.11	44.69	-	44.80	-	63.58	53.58	-18.78	-
3	0.283	0.11	39.67	-	39.78	-	60.73	50.73	-20.95	-
4	0.474	0.13	37.95	-	38.08	-	56.44	46.44	-18.36	-
5	2.102	0.27	36.56	-	36.83	-	56.00	46.00	-19.17	-
6	15.250	0.46	39.36	-	39.82	-	60.00	50.00	-20.18	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

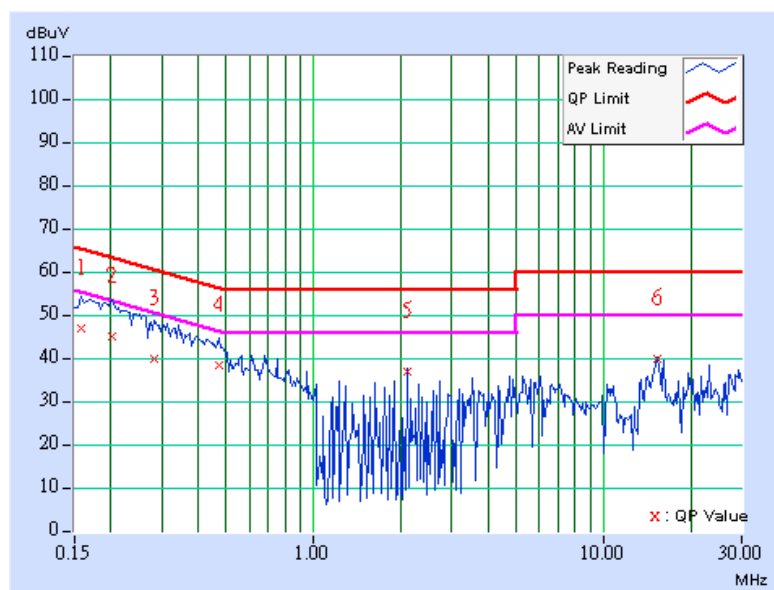

5.2 RADIATED EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

5.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Jan. 07, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Nov. 29, 2005
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 22, 2006
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 05, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170242	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10631	Nov. 17, 2005
Preamplifier Agilent	8449B	3008A01960	Nov. 14, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219275/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.



5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation

5.2.5 TEST SETUP

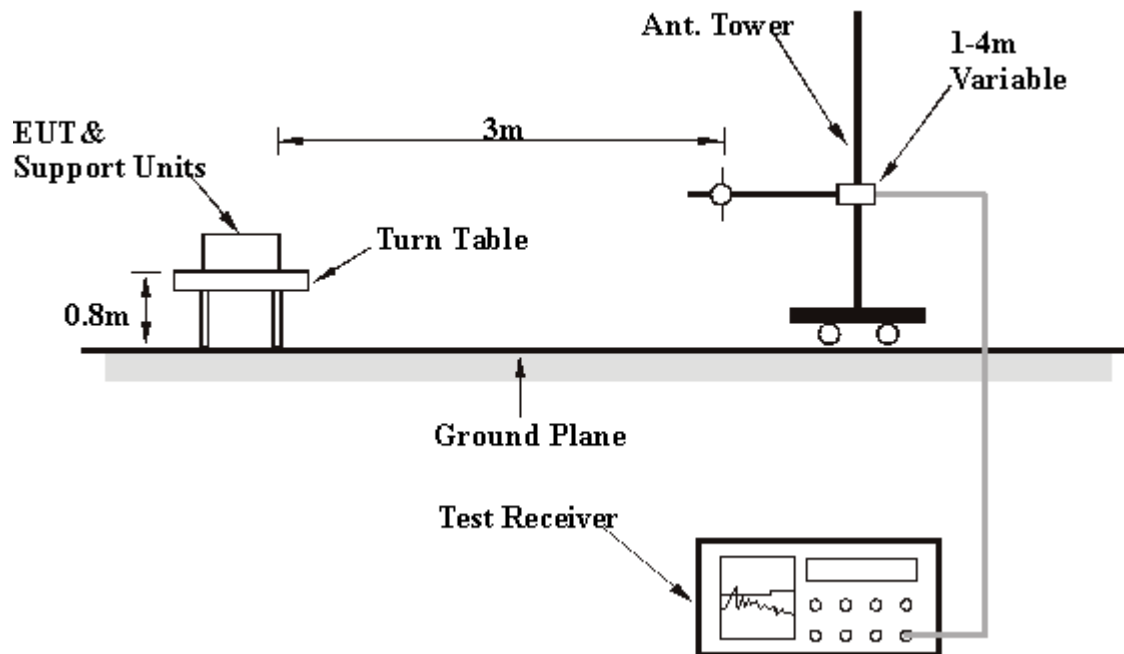

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

5.2.7 TEST RESULTS

Below 1GHz Worst-Case Data (A-408 antenna with 8dBi)

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	138.86	40.12 QP	43.50	-3.38	1.75 H	25	25.77	14.35
2	309.91	44.70 QP	46.00	-1.30	1.00 H	215	30.07	14.63
3	533.46	40.95 QP	46.00	-5.05	1.00 H	162	21.78	19.17
4	667.61	39.51 QP	46.00	-6.49	1.00 H	133	17.85	21.66
5	733.70	44.72 QP	46.00	-1.28	1.00 H	254	21.88	22.84
6	778.40	44.45 QP	46.00	-1.55	1.00 H	250	21.09	23.36

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.16	34.93 QP	40.00	-5.07	1.00 V	285	21.24	13.69
2	134.98	40.57 QP	43.50	-2.93	1.00 V	58	26.53	14.04
3	309.92	40.45 QP	46.00	-5.55	1.25 V	182	25.82	14.63
4	533.46	44.69 QP	46.00	-1.31	1.00 V	126	25.52	19.17
5	578.17	40.23 QP	46.00	-5.77	1.00 V	338	20.00	20.23
6	778.39	40.82 QP	46.00	-5.18	1.00 V	52	17.46	23.36

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

Below 1GHz Worst-Case Data (A-807antenna with 7dBi)

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	D

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	288.55	39.57 QP	46.00	-6.43	1.00 H	189	25.34	14.23
2	333.26	43.25 QP	46.00	-2.75	1.00 H	261	28.10	15.15
3	533.46	38.16 QP	46.00	-7.84	2.00 H	265	18.99	19.17
4	733.70	44.56 QP	46.00	-1.44	1.00 H	215	21.72	22.84
5	778.40	44.68 QP	46.00	-1.32	1.00 H	203	21.32	23.36
6	823.12	35.37 QP	46.00	-10.63	1.00 H	188	11.70	23.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.61	38.85 QP	40.00	-1.15	1.00 V	322	23.46	15.39
2	309.92	39.72 QP	46.00	-6.28	1.00 V	149	25.09	14.63
3	533.47	43.91 QP	46.00	-2.09	1.00 V	203	24.74	19.17
4	578.18	38.39 QP	46.00	-7.61	1.00 V	267	18.16	20.23
5	733.69	37.45 QP	46.00	-8.55	1.00 V	209	14.61	22.84
6	778.40	39.46 QP	46.00	-6.54	1.00 V	175	16.10	23.36

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

802.11a OFDM modulation (A-408 antenna with 8dBi)

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1108.00	48.87 PK	74.00	-25.13	1.30 H	323	21.17	27.70
2	*5745.00	94.09 PK			1.68 H	159	54.61	39.48
2	*5745.00	83.61 AV			1.68 H	159	44.13	39.48
3	#11490.00	60.23 PK	74.00	-13.77	1.40 H	123	9.52	50.71
3	#11490.00	48.52 AV	54.00	-5.48	1.40 H	123	-2.19	50.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1108.00	49.62 PK	74.00	-24.38	1.12 V	230	21.92	27.70
2	*5745.00	111.06 PK			1.10 V	256	71.58	39.48
2	*5745.00	100.25 AV			1.10 V	256	60.77	39.48
3	#11490.00	61.25 PK	74.00	-12.75	1.05 V	128	10.54	50.71
3	#11490.00	49.63 AV	54.00	-4.37	1.05 V	128	-1.08	50.71

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#”The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1108.00	49.68 PK	74.00	-24.32	1.35 H	258	21.98	27.70
2	*5785.00	92.56 PK			1.26 H	203	53.01	39.55
2	*5785.00	82.47 AV			1.26 H	203	42.92	39.55
3	#11570.00	60.15 PK	74.00	-13.85	1.60 H	195	9.50	50.65
3	#11570.00	48.82 AV	54.00	-5.18	1.60 H	195	-1.83	50.65

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1108.00	48.92 PK	74.00	-25.08	1.53 V	126	21.22	27.70
2	*5785.00	111.46 PK			1.25 V	287	71.91	39.55
2	*5785.00	101.39 AV			1.25 V	287	61.84	39.55
3	#11570.00	61.38 PK	74.00	-12.62	1.23 V	207	10.73	50.65
3	#11570.00	49.52 AV	54.00	-4.48	1.23 V	207	-1.13	50.65

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 5	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1108.00	48.26 PK	74.00	-25.74	1.49 H	164	20.56	27.70
2	*5805.00	93.06 PK			1.76 H	169	53.49	39.57
2	*5805.00	82.95 AV			1.76 H	169	43.38	39.57
3	#11610.00	60.11 PK	74.00	-13.89	1.12 H	158	9.50	50.61
3	#11610.00	48.39 AV	54.00	-5.61	1.12 H	158	-2.22	50.61

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1108.00	49.92 PK	74.00	-24.08	1.30 V	216	22.22	27.70
2	*5805.00	111.38 PK			1.06 V	287	71.81	39.57
2	*5805.00	101.29 AV			1.06 V	287	61.72	39.57
3	#11610.00	61.59 PK	74.00	-12.41	1.06 V	198	10.98	50.61
3	#11610.00	49.88 AV	54.00	-4.12	1.06 V	198	-0.73	50.61

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#”The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

802.11a OFDM modulation (A-807 antenna with 7dBi)

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	D

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1108.00	49.63 PK	74.00	-24.37	1.07 H	90	21.93	27.70
2	*5745.00	98.35 PK			1.06 H	300	58.87	39.48
2	*5745.00	88.04 AV			1.06 H	300	48.56	39.48
3	#11490.00	49.72 PK	74.00	-24.28	1.26 H	207	-0.99	50.71
3	#11490.00	61.15 AV	54.00	7.15	1.26 H	207	10.44	50.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1108.00	52.36 PK	74.00	-21.64	1.00 V	254	24.66	27.70
1	#1108.00	48.41 AV	54.00	-5.59	1.00 V	254	20.71	27.70
2	*5745.00	110.69 PK			1.06 V	259	71.21	39.48
2	*5745.00	100.02 AV			1.06 V	259	60.54	39.48
3	#11490.00	62.58 PK	74.00	-11.42	1.03 V	250	11.87	50.71
3	#11490.00	51.24 AV	54.00	-2.76	1.03 V	250	0.53	50.71

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#”The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	D

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1108.00	49.68 PK	74.00	-24.32	1.23 H	211	21.98	27.70
2	*5785.00	98.63 PK			1.06 H	269	59.08	39.55
2	*5785.00	87.90 AV			1.06 H	269	48.35	39.55
3	#11570.00	59.32 PK	74.00	-14.68	1.26 H	147	8.67	50.65
3	#11570.00	48.56 AV	54.00	-5.44	1.26 H	147	-2.09	50.65

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1108.00	48.69 PK	74.00	-25.31	1.24 V	206	20.99	27.70
2	*5785.00	111.13 PK			1.00 V	250	71.58	39.55
2	*5785.00	101.06 AV			1.00 V	250	61.51	39.55
3	#11570.00	61.24 PK	74.00	-12.76	1.05 V	136	10.59	50.65
3	#11570.00	49.11 AV	54.00	-4.89	1.05 V	136	-1.54	50.65

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

EUT	2.4GHz/5GHz Outdoor Access Point	MEASUREMENT DETAIL	
MODEL	P-781	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 5	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Bard Wu	TEST MODE	D

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1108.00	49.38 PK	74.00	-24.62	1.26 H	195	21.68	27.70
2	*5805.00	99.06 PK			1.04 H	196	59.49	39.57
2	*5805.00	88.32 AV			1.04 H	196	48.75	39.57
3	#11610.00	61.29 PK	74.00	-12.71	1.20 H	210	10.68	50.61
3	#11610.00	49.97 AV	54.00	-4.03	1.20 H	210	-0.64	50.61

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1108.00	49.68 PK	74.00	-24.32	1.09 V	183	21.98	27.70
2	*5805.00	111.10 PK			1.05 V	290	71.53	39.57
2	*5805.00	100.87 AV			1.05 V	290	61.30	39.57
3	#11610.00	61.87 PK	74.00	-12.13	1.06 V	189	11.26	50.61
3	#11610.00	49.92 AV	54.00	-4.08	1.06 V	189	-0.69	50.61

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#”The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


5.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP

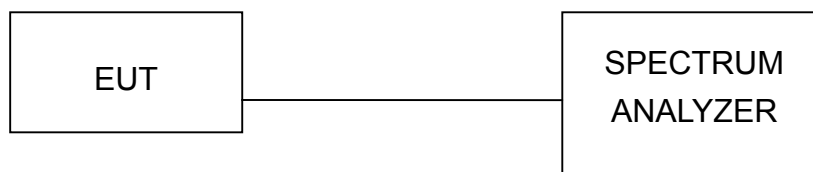

5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

5.3.7 TEST RESULTS


802.11a OFDM modulation

EUT	2.4GHz/5GHz Outdoor Access Point	MODEL	P-781
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 57%RH, 991 hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	5745	16.36	0.5	PASS
3	5785	16.36	0.5	PASS
5	5825	16.36	0.5	PASS




CH 1

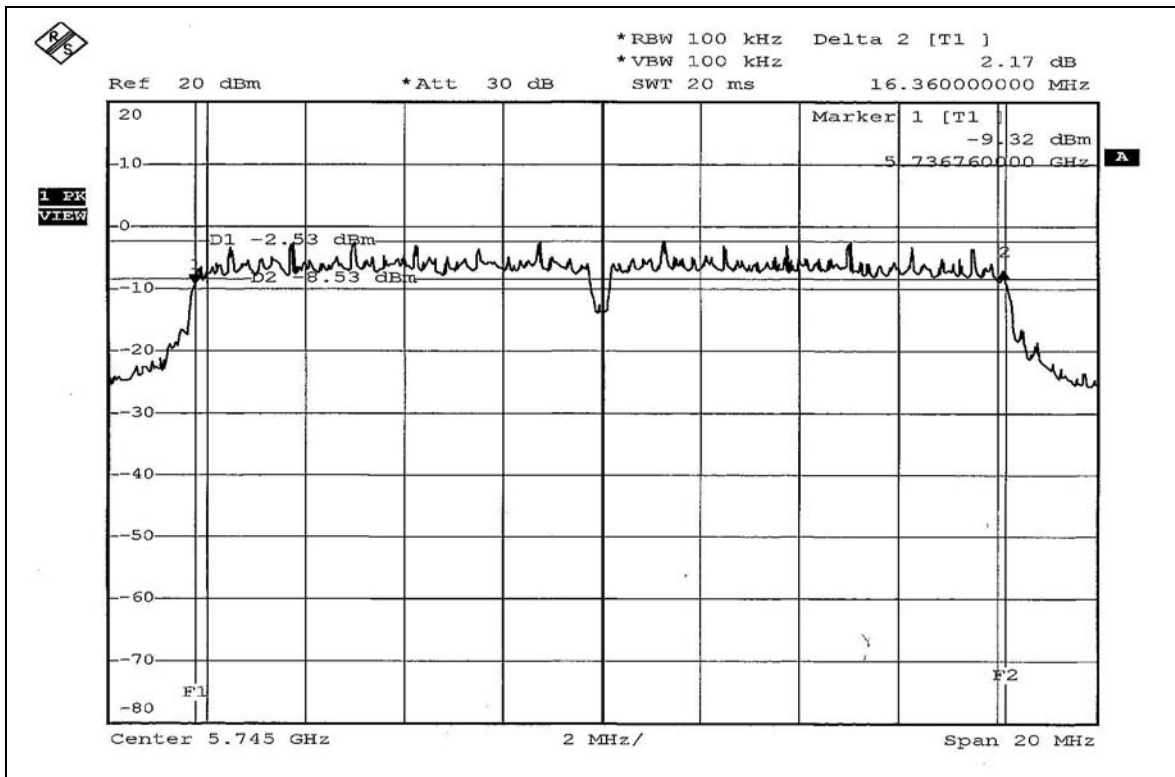

CH 3

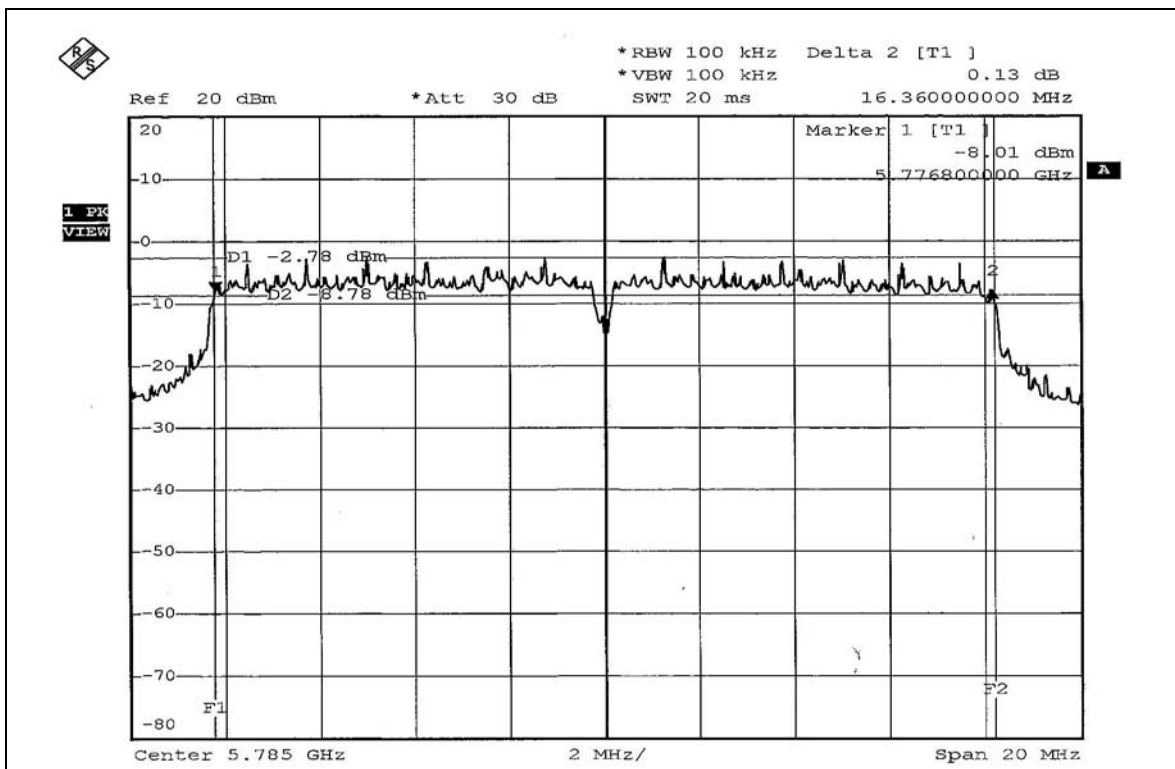

CH 5

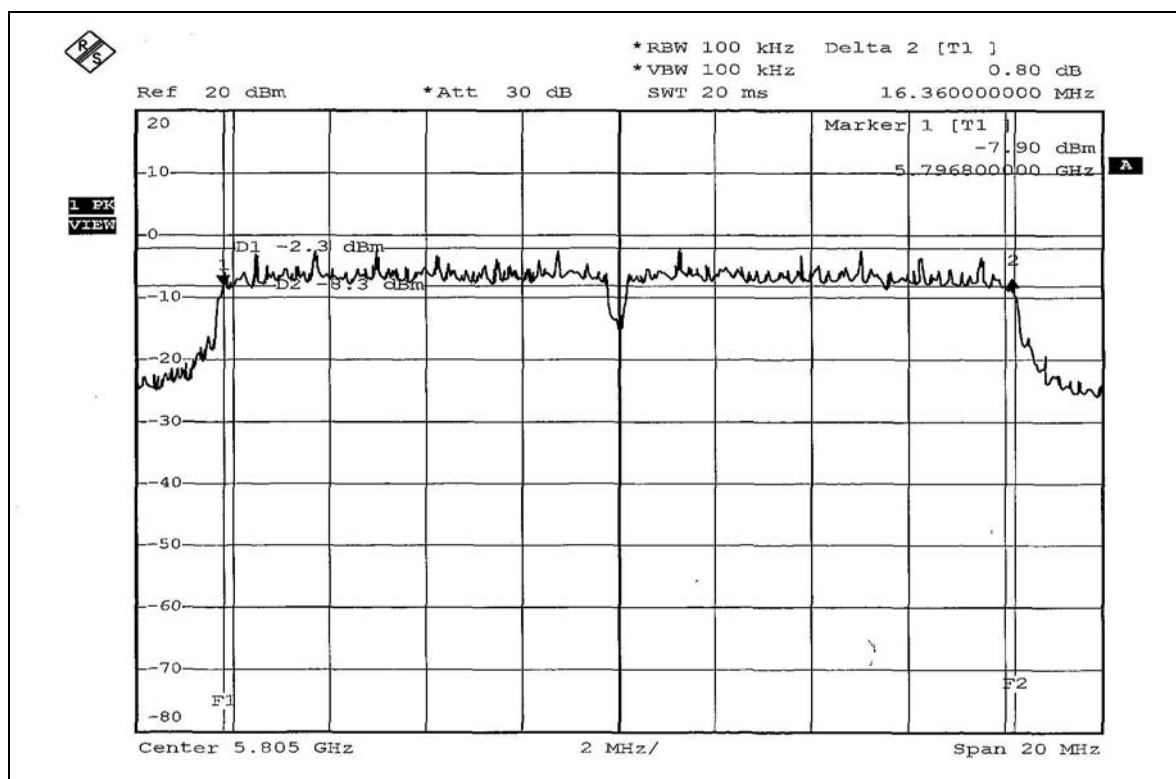

5.4 MAXIMUM PEAK OUTPUT POWER

5.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

5.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 06, 2005
TEKTRONIX OSCILLOSCOPE	TDS 1012	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA..

5.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator . The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation

5.4.5 TEST SETUP



5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6

5.4.7 TEST RESULTS

802.11a OFDM modulation

EUT	2.4GHz/5GHz Outdoor Access Point	MODEL	P-781
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 57%RH, 991 hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	5745	25.410	14.05	28	PASS
3	5785	25.527	14.07	28	PASS
5	5825	25.235	14.02	28	PASS

Note: According to 15.247 (b) (4), the maximum antenna gain 8dBi is higher than 6dBi, so the limit of peak power shall be reduced by 2dB.

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP



5.5.6 EUT OPERATING CONDITION

Same as Item 5.3.6


5.5.7 TEST RESULTS

802.11a OFDM modulation


EUT	2.4GHz/5GHz Outdoor Access Point	MODEL	P-781
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 57%RH, 991 hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5745	-16.91	8	PASS
3	5785	-16.67	8	PASS
5	5825	-16.48	8	PASS


CH1

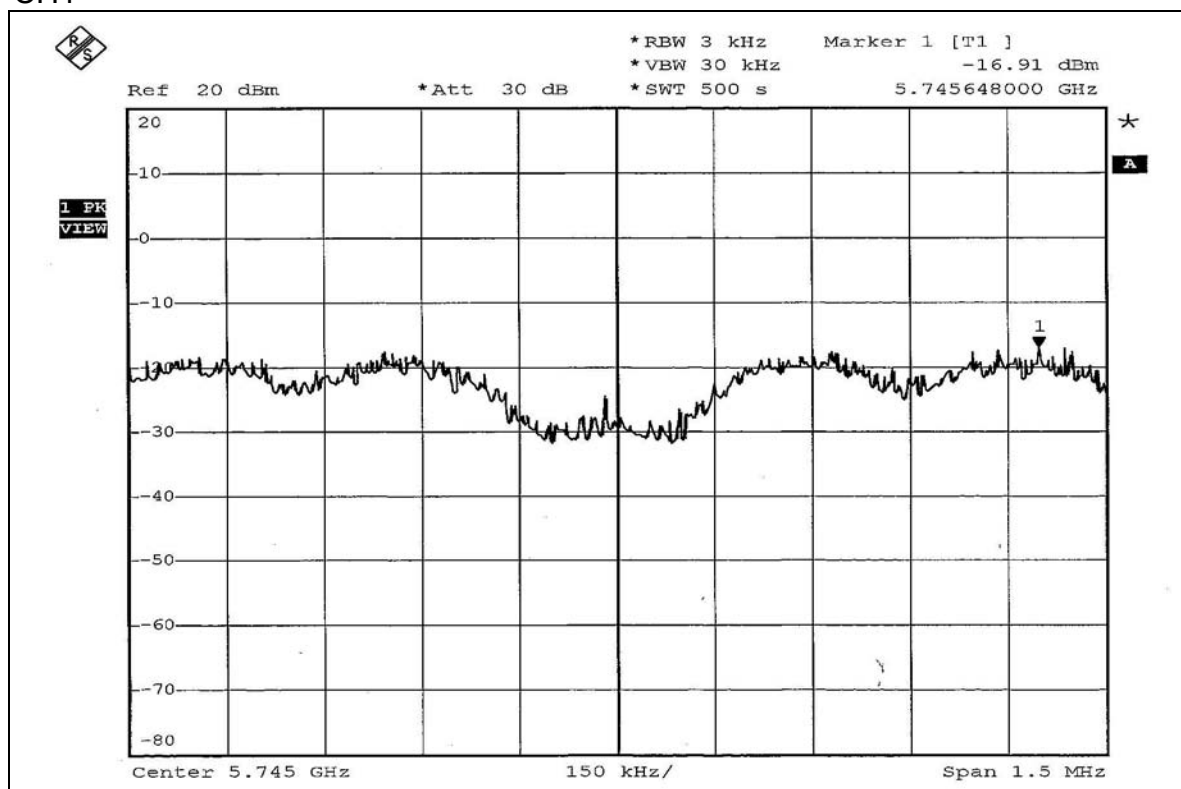

CH3

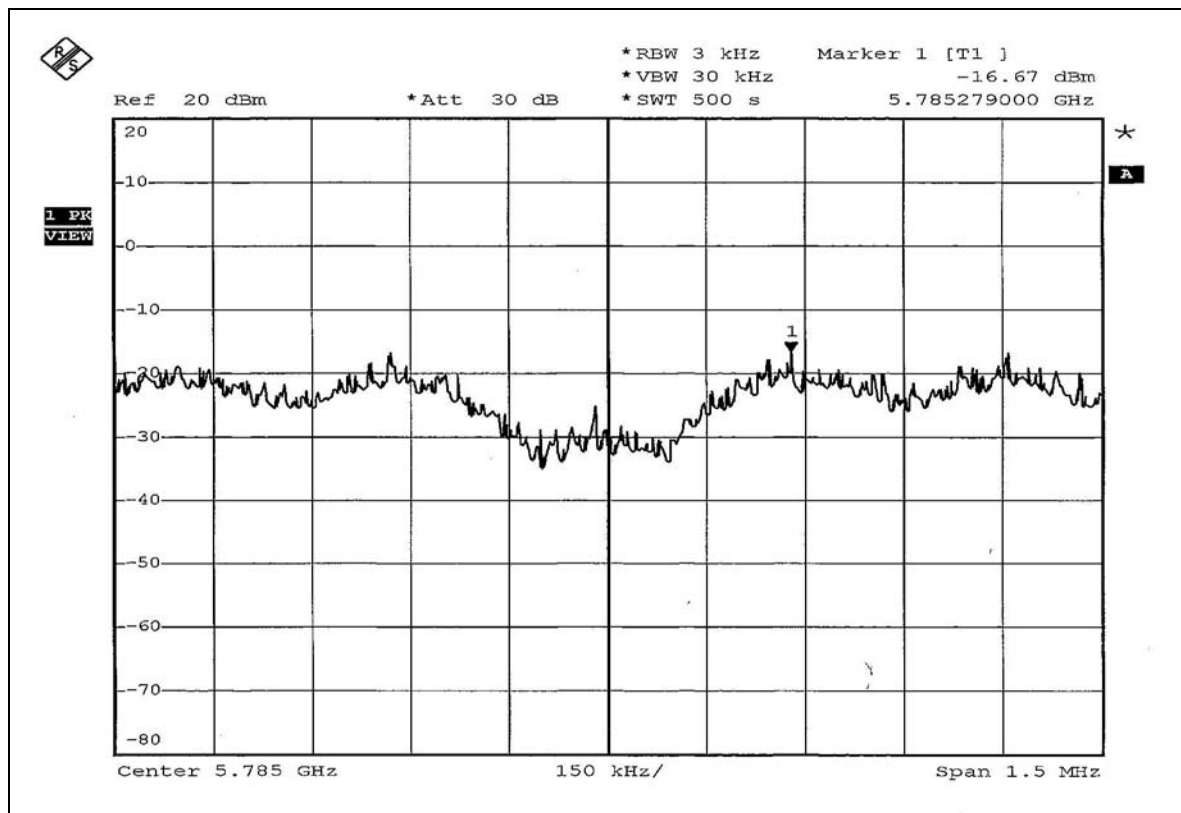

CH5

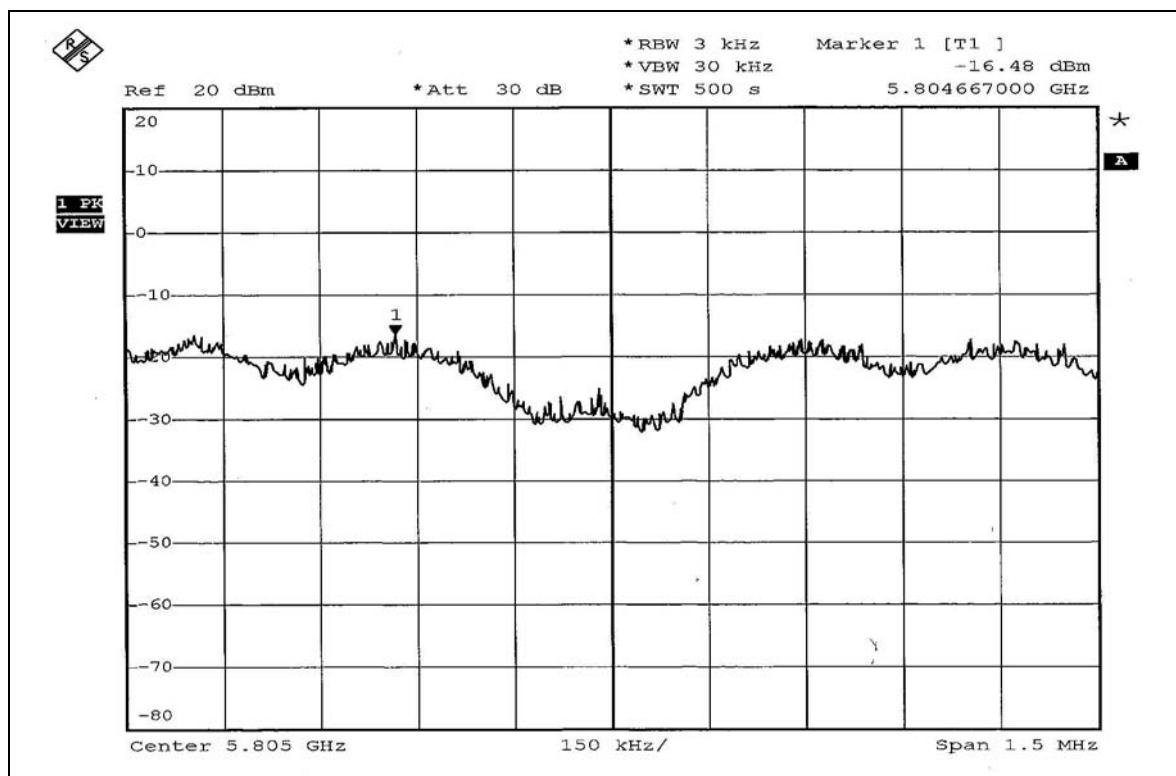

5.6 BAND EDGES MEASUREMENT

5.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation







5.6.5 EUT OPERATING CONDITION



Same as Item 5.3.6

5.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).

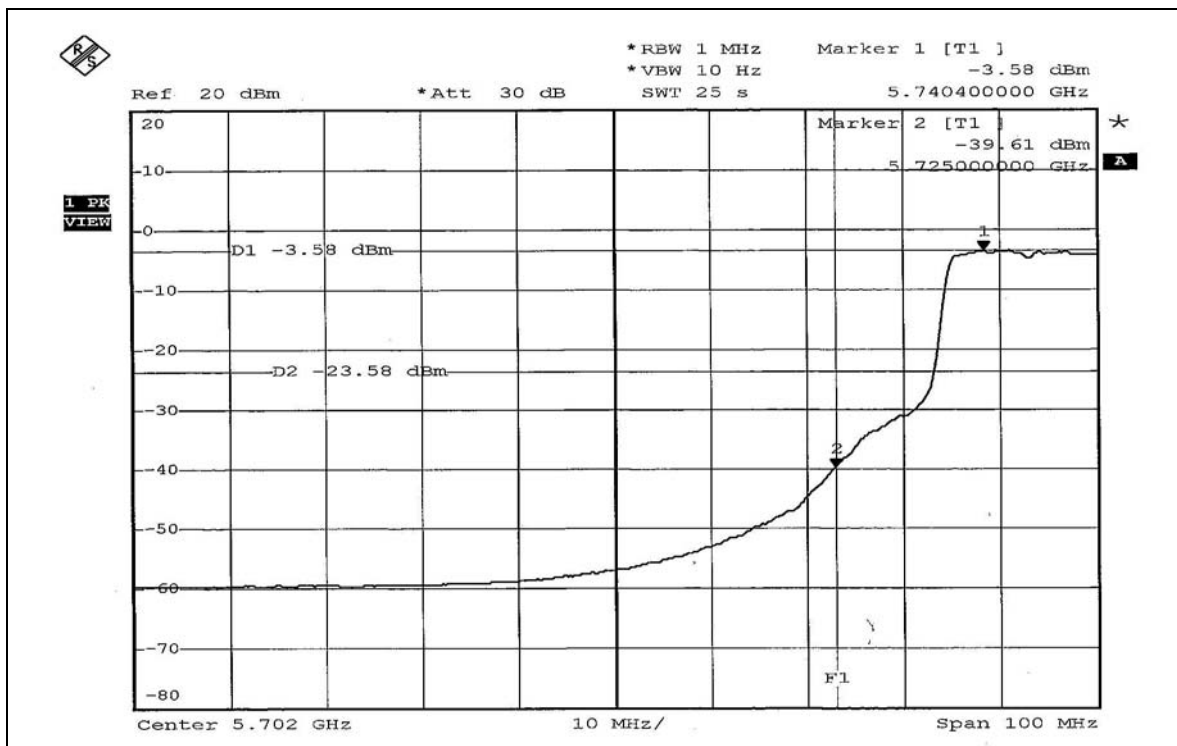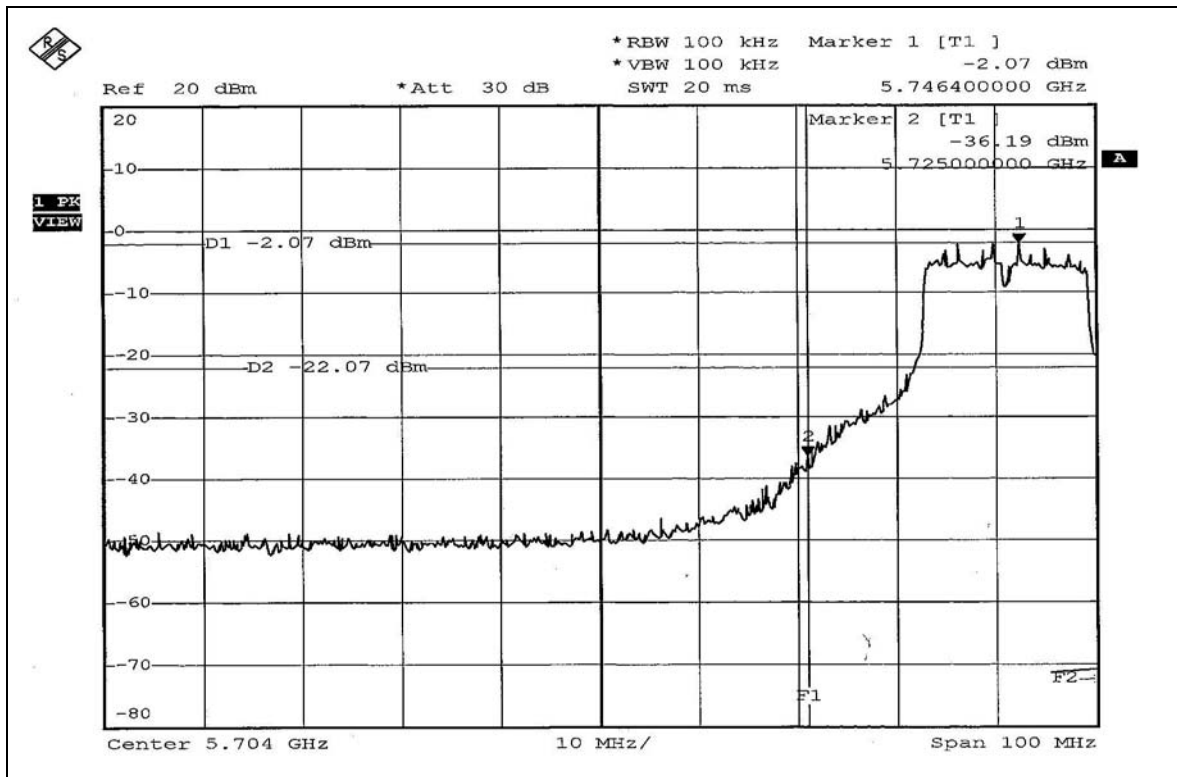802.11a OFDM modulation

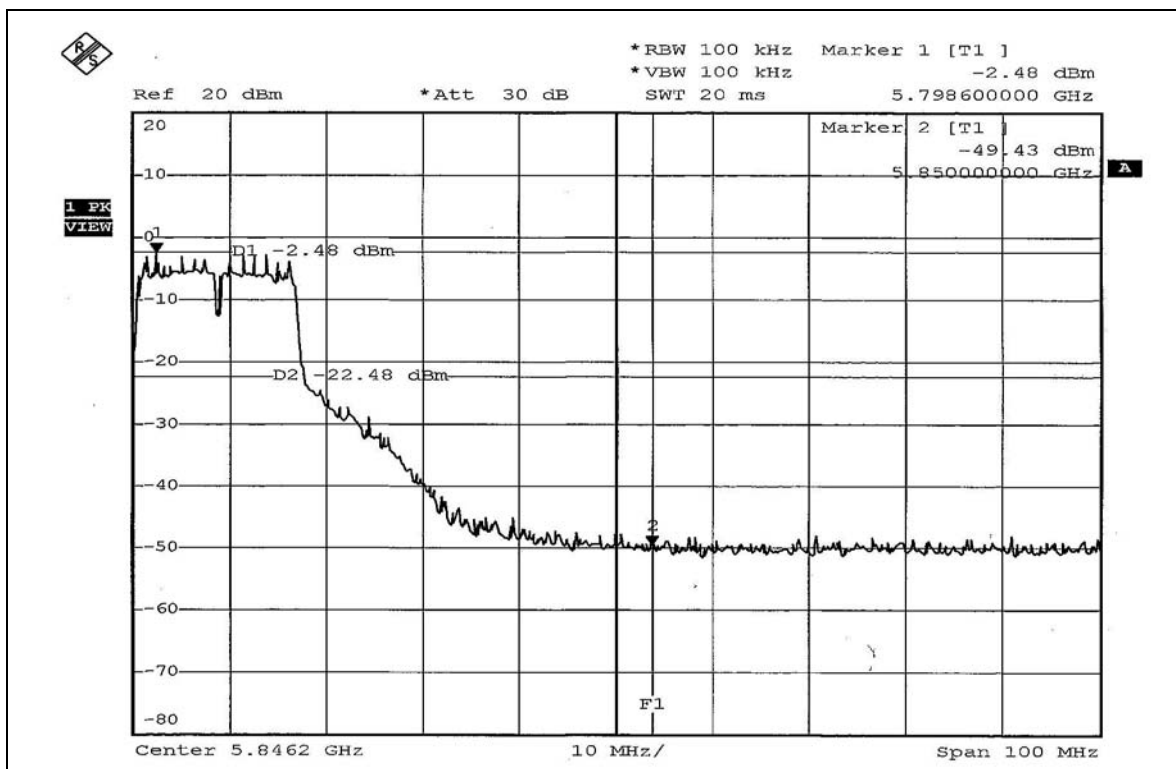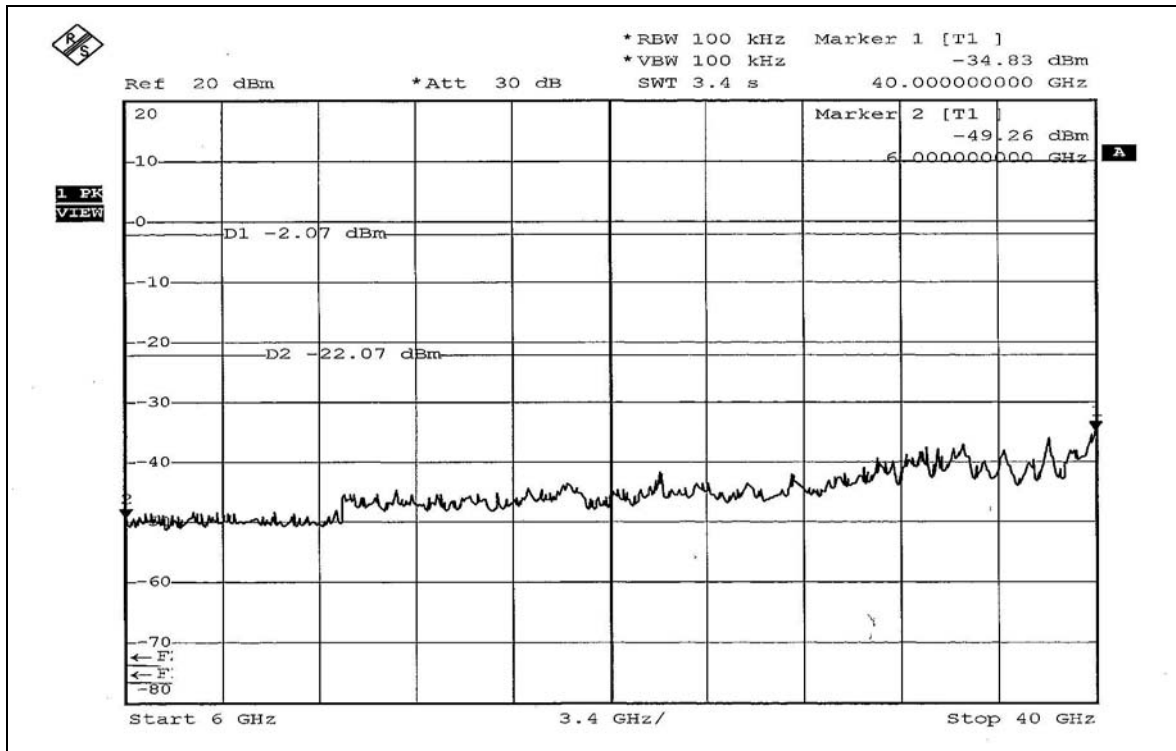

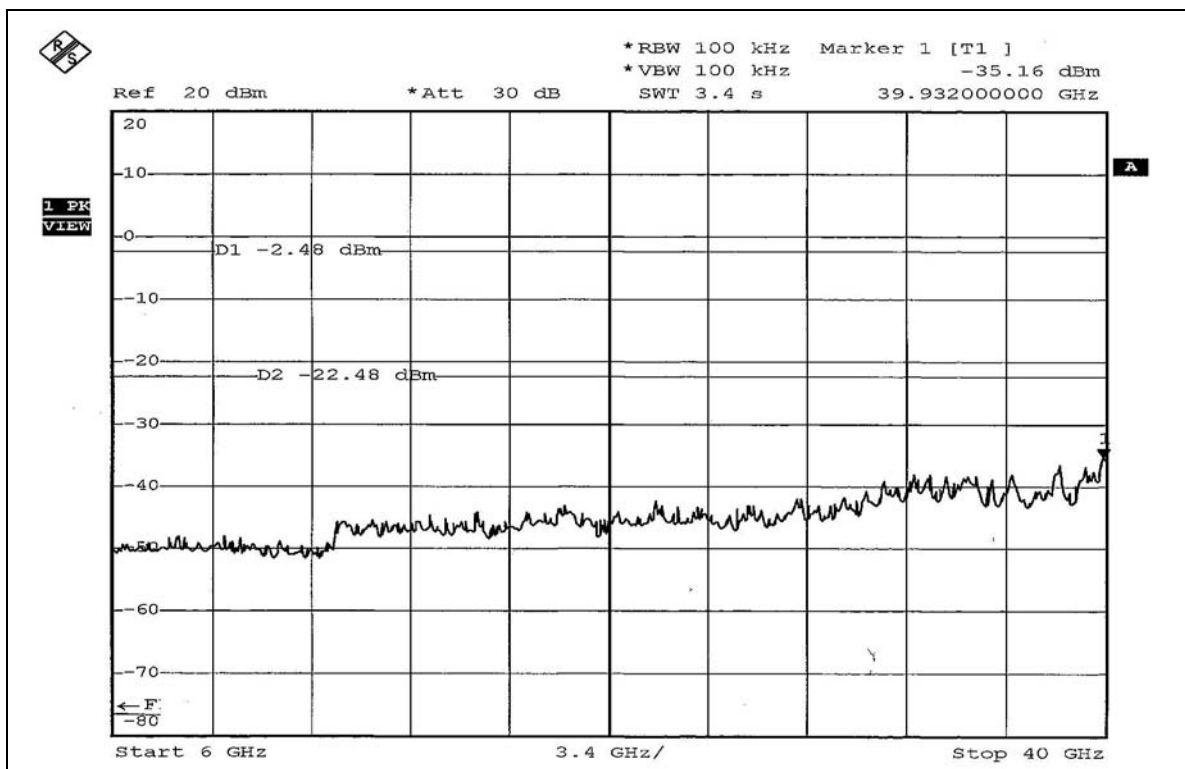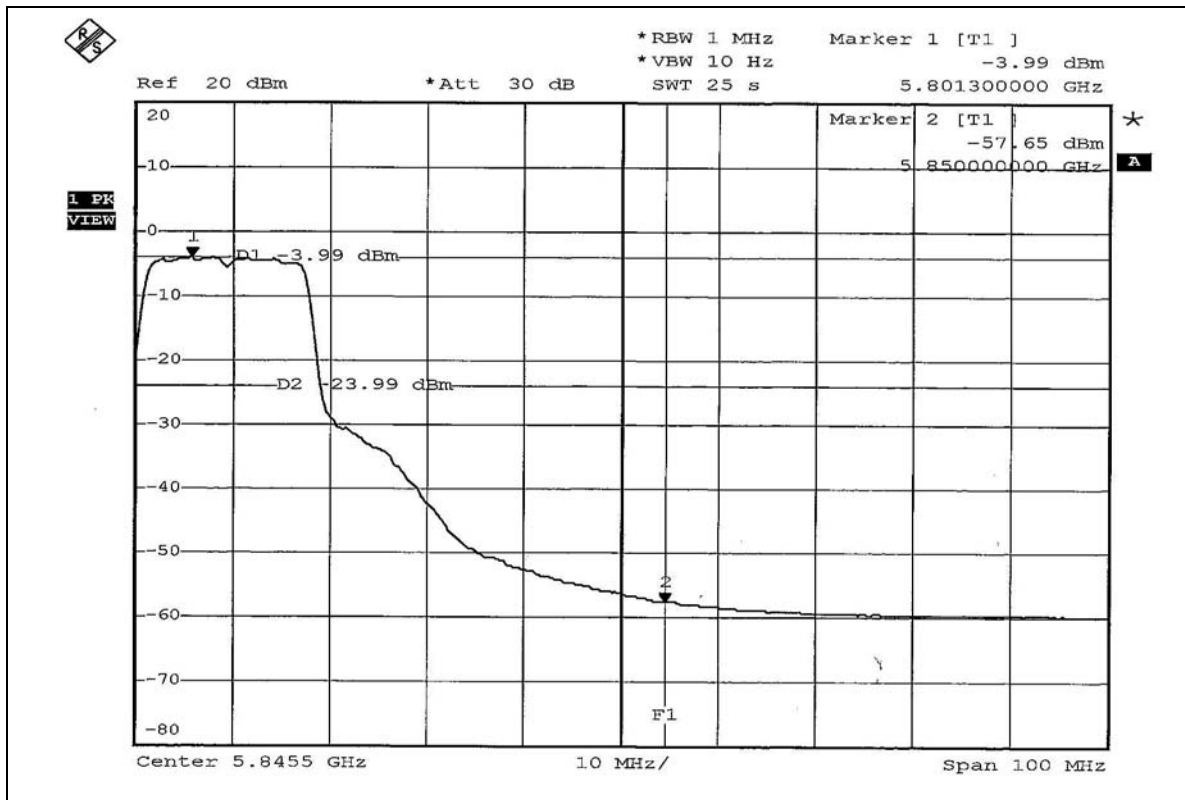



5.7 ANTENNA REQUIREMENT

5.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Omni antenna with N type antenna connector. The maximum Gain of the antenna is 8dBi.


6. PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



Single Band Antenna





Dual Band Antenna

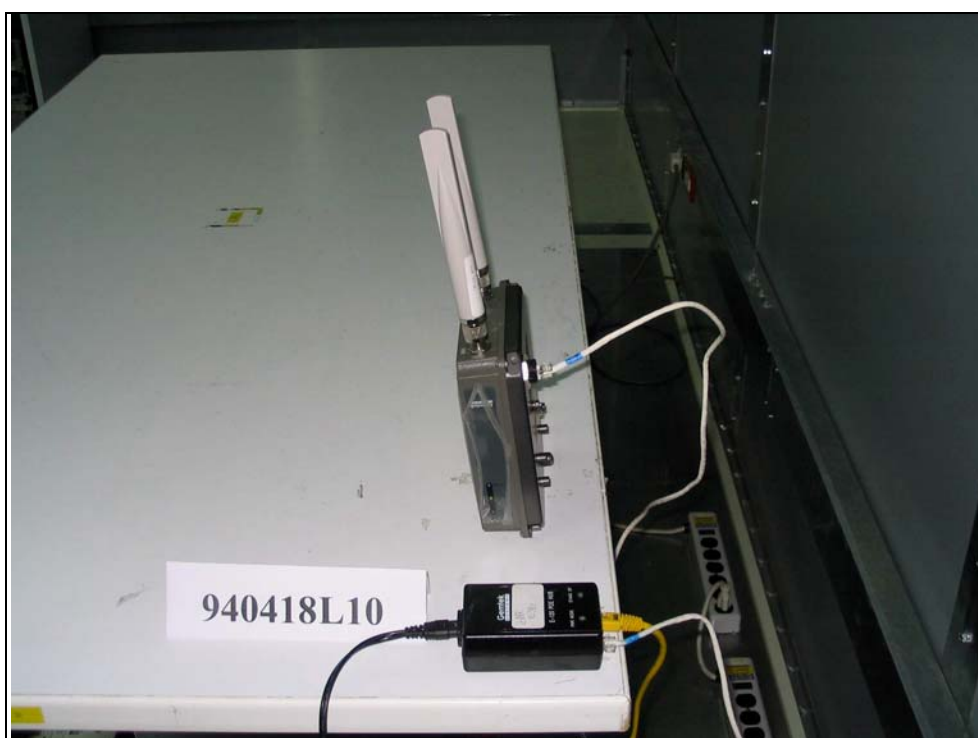

RADIATED EMISSION TEST Single Band Antenna

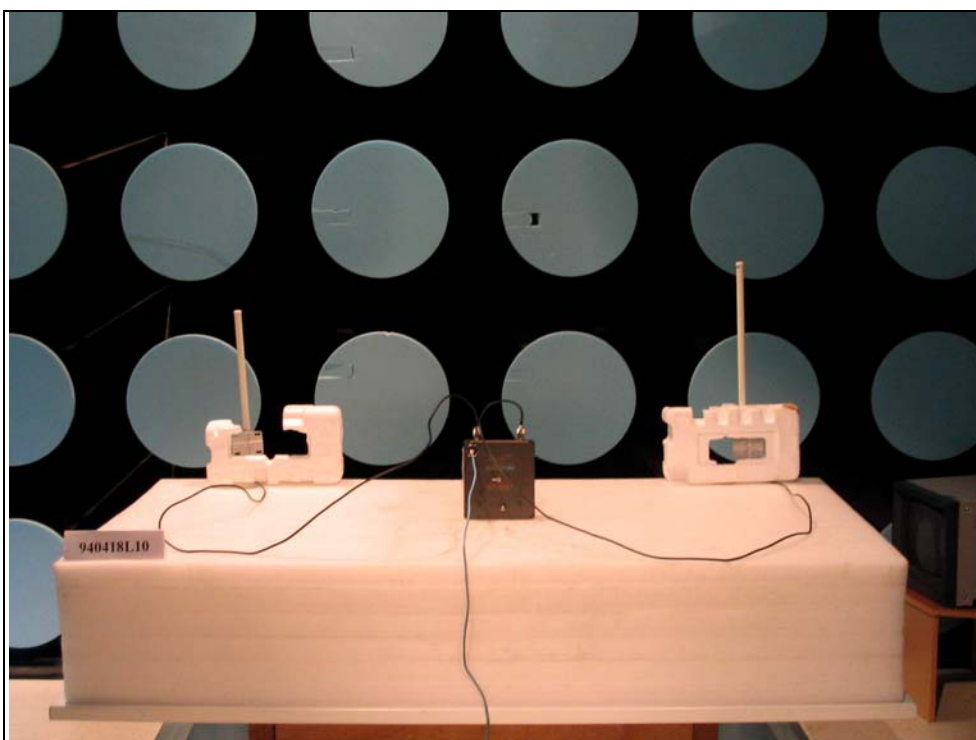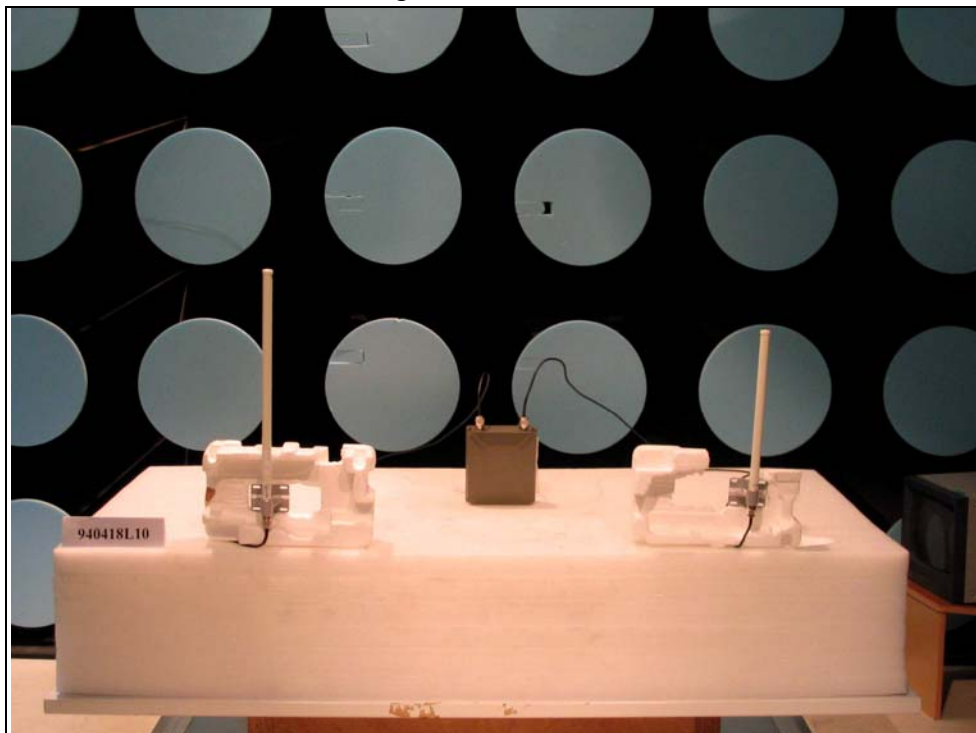

Dual Band Antenna

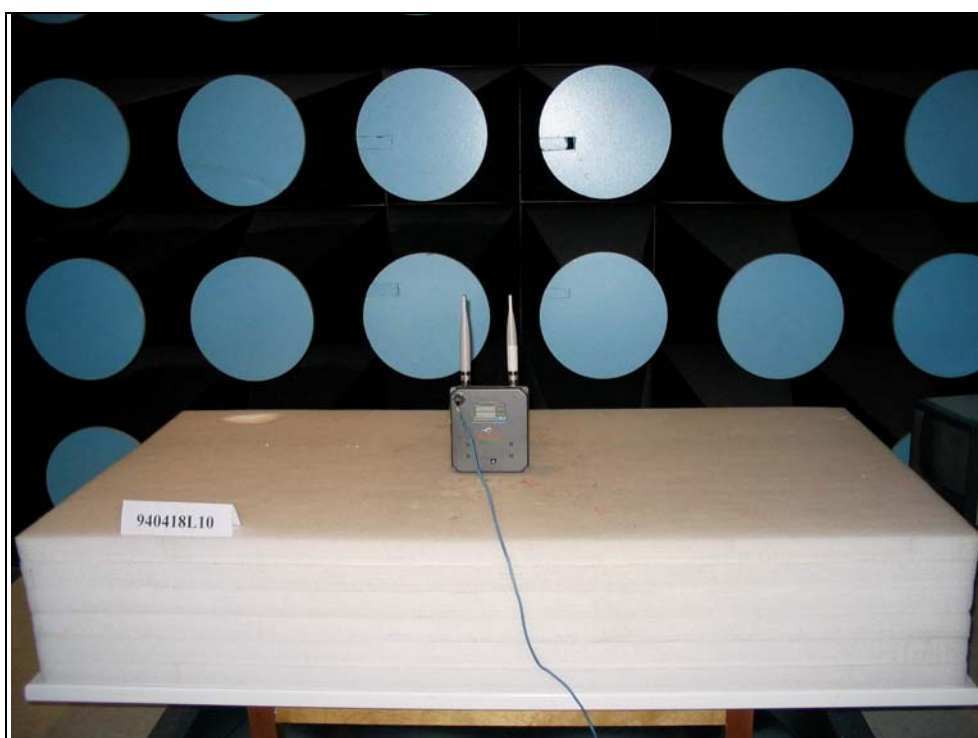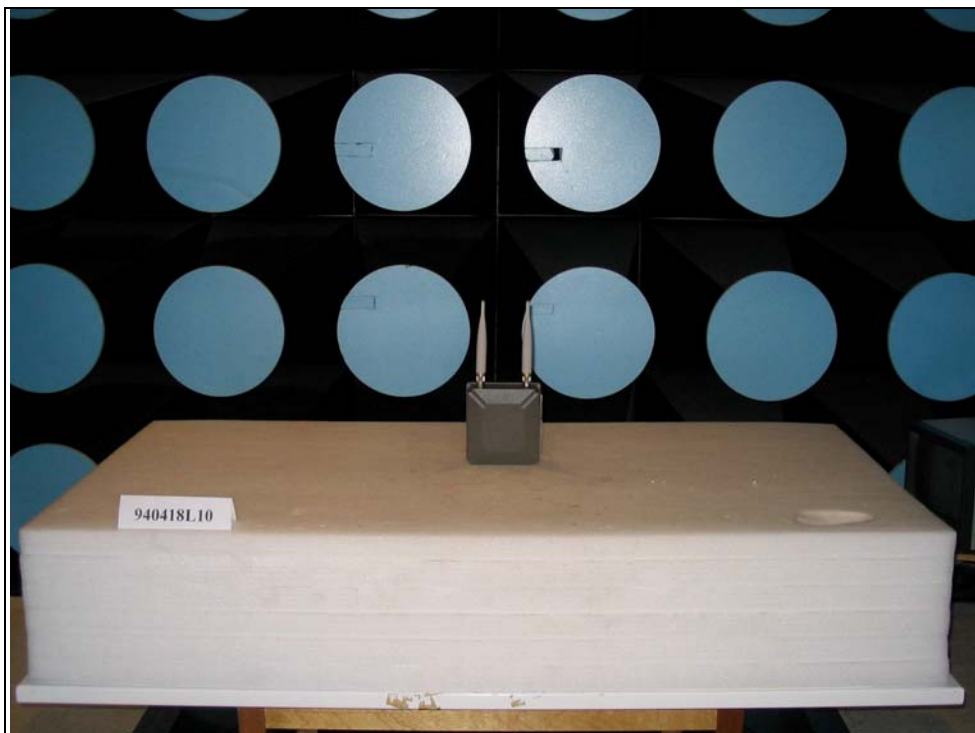



7. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also