



Name : GH6611 LTE&4IN1-ANT-V1.0

History List

[illegible]

GH6611-LTE-ANT-V1.0 **Specification**

1. Explanation of part number :

GH6611 **–** **LTE-ANT** **–** **V1.0**
(1) (2) (3)

(1) Model Name : GH6611

(2) Frequency : 699-960Mhz, 1710-2170MHz, 2300-2690MHz

1575Mhz, 2400-2500MHz, 5150-5850MHz

(3) Suffix :V1.0

2. Electrical Specification :

2-1. Frequency Band:

Frequency Band	MHz
LTE	699-960Mhz, 1710-2170MHz, 2300-2400MHz, 2500-2690MHz
4IN1	1575Mhz, 2400-2500MHz, 5150-5850MHz

2-2. Impedance

50 ohm nominal

UNLESS OTHER SPECIFIED TOLERANCES ON :		 Shanghai Deman Electronics TECHNOLOGY CO.,LTD	
$X = \pm 2$ $X.X = \pm 0.1$ $X.XX = \pm 0.05$			
ANGLES = $\pm$		HOLEDIA = $\pm$	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHANGHAI DEMAN ELECTRONICS TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY :	CHECKED BY :		
DESIGNED BY :	APPROVED BY :		
TITLE : <u>GH6611-LTE-ANT-V1.0</u> Specification		DOCUMENT NO.	PAGE REV. A0

2-3. VSWR ,Efficiency ,Matching and Active Data :

2-3.1 VSWR:

Frequency Band	880	960	1710	2170	2300	2690
2-3-1. Typical Value:	≤ 3.5	≤ 2.5	≤ 2	≤ 3.0	≤ 2.5	≤ 2

2-3-2Measuring Method	1. A 50Ωcoaxial cable is connected to the fpcb antenna. Then this cable is connected to a network analyzer to measure the VSWR. 2. Keeping this jig away from metal at least 20 cm.
-----------------------	---



UNLESS OTHER SPECIFIED TOLERANCES ON : X = ±2 X.X = ±0.1 X.XX = ±0.05 ANGLES = ± HOLEDIA = ±		Deman Shanghai Deman Electronics TECHNOLOGY CO.,LTD	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHANGHAI DEMAN ELECTRONICS TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY :	CHECKED BY :		
DESIGNED BY :	APPROVED BY :		
TITLE : <u>GH6611-LTE-ANT-V1.0</u> Specification		DOCUMENT NO.	PAGE REV. A0

2-3-4Picture



UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± 2 X.X = ± 0.1 X.XX = ± 0.05

ANGLES = $\pm$

HOLEDIA = $\pm$

Deman

Shanghai Deman
Electronics TECHNOLOGY CO.,LTD

SCALE :

UNIT : mm

DRAWN BY :

CHECKED BY :

DESIGNED BY :


APPROVED BY :

TITLE : GH6611-LTE-ANT-V1.0Specification

DOCUMENT
NO.

PAGE REV.
A0

2-3-5Picture

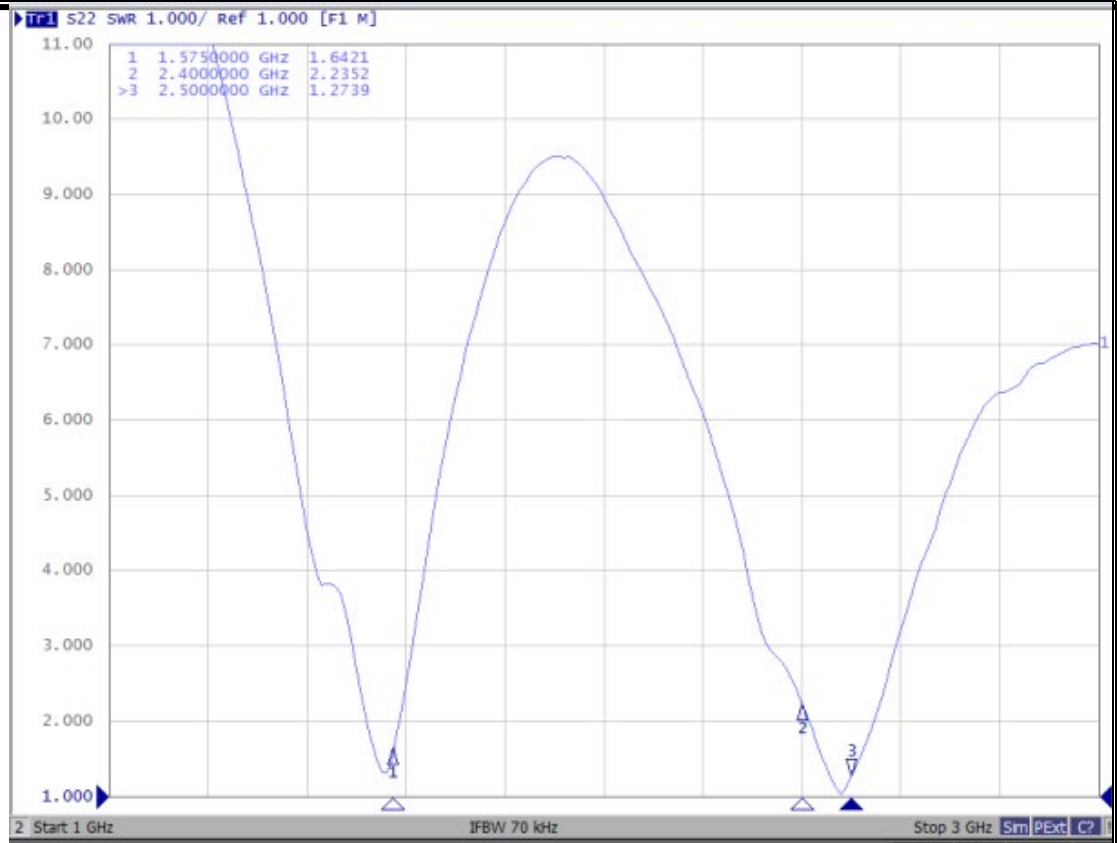

2-4. Measure and Chamber

2-4-1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± 2 X.X = ± 0.1 X.XX = ± 0.05

ANGLES = $\pm$

HOLEDIA = $\pm$

SCALE :

UNIT : mm

DRAWN BY :

CHECKED BY :

DESIGNED BY :

APPROVED BY :

TITLE : GH6611-LTE-ANT-V1.0Specification

Deman


Shanghai Deman
Electronics TECHNOLOGY CO.,LTD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHANGHAI DEMAN ELECTRONICS TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

PAGE REV.
A0

2-4-2 Chamber definition

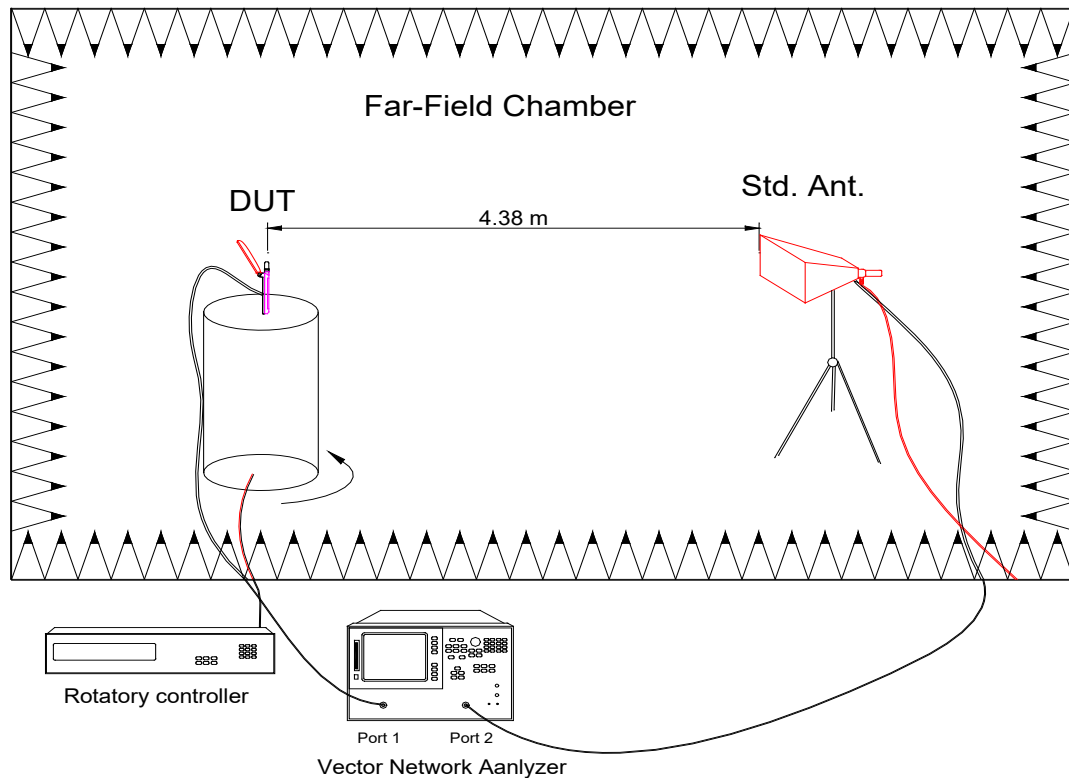

1. An anechoic chamber (8mx4mx3.5m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quiet room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON : X = ±2 X.X = ±0.1 X.XX = ±0.05 ANGLES = ± HOLEDIA = ±		 Shanghai Deman Electronics TECHNOLOGY CO.,LTD	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHANGHAI DEMAN ELECTRONICS TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY :	CHECKED BY :		
DESIGNED BY :	APPROVED BY :		
TITLE : <u>GH6611-LTE-ANT-V1.0</u> Specification		DOCUMENT NO.	PAGE REV. A0

2-4-3 LTE Antenna Efficiency

Frequency (MHz)	Efficiency (dB)		Frequency (MHz)	Efficiency (dB)	
	Efficiency (dB)	Gain (dBi)		Efficiency (dB)	Gain (dBi)
600	-10.03	-9.78	1920	-7.74	-4.82
610	-9.47	-9.35	1940	-7.69	-5.27
620	-8.59	-8.56	1960	-7.72	-5.48
630	-7.75	-7.65	1980	-7.95	-5.48
640	-7.25	-6.8	2000	-7.64	-5.08
650	-6.87	-5.87	2020	-7.51	-5.23
660	-6.77	-5.08	2040	-7.35	-5.5
670	-6.81	-4.39	2060	-7.62	-5.96
680	-7.2	-3.82	2080	-7.55	-5.99
690	-7.62	-3.38	2100	-7.46	-5.5
700	-8.02	-3.62	2120	-7.27	-4.83
710	-11.68	-4.56	2140	-7.21	-4.35
720	-13.32	-6.33	2160	-7.26	-4.02
730	-12.51	-5.54	2180	-7.12	-3.91
740	-12.02	-4.93	2200	-7.09	-3.6
750	-11.68	-4.56	2220	-7.09	-3.42
760	-11.17	-4.23	2240	-6.97	-2.63
770	-10.66	-3.9	2260	-6.93	-2.31
780	-10.11	-3.84	2280	-6.64	-1.88
790	-9.25	-3.99	2300	-6.71	-2.1
800	-7.19	-4.2	2320	-6.8	-1.66
810	-8.78	-7.03	2340	-6.85	-1.09
820	-7.89	-6.21	2360	-6.33	-0.21
830	-7.37	-5.39	2380	-7.46	0.11
840	-7.48	-2.75	2400	-7.04	0.02
850	-7.04	-4.29	2420	-7.06	0
860	-7.09	-3.34	2440	-6.96	-0.22
870	-7.31	-2.98	2460	-6.79	-0.69
880	-7.48	-2.75	2480	-6.83	-1.31
890	-7.96	-2.76	2500	-6.07	-3.14
900	-8.39	-2.95	2520	-6.03	-3.05
910	-6.49	-3.6	2540	-6.22	-3.33
920	-7.06	-3.42	2560	-6.53	-3.22
930	-7.89	-3.49	2580	-6.38	-2.88
940	-8.75	-3.57	2600	-6.64	-3.14
950	-9.71	-3.69	2620	-6.63	-3.35
960	-10.72	-3.99	2640	-6.76	-3.79

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ±2 X.X = ±0.1 X.XX = ±0.05

ANGLES = ± HOLEDIA = ±

SCALE : UNIT : mm

DRAWN BY : CHECKED BY :

DESIGNED BY : APPROVED BY :

TITLE : GH6611-LTE-ANT-V1.0Specification

Deman

Shanghai Deman
Electronics TECHNOLOGY CO.,LTD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHANGHAI DEMAN ELECTRONICS TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

PAGE REV.
A0

1700	-8.81	-4.77	2660	-6.89	-4.05
1720	-8.59	-4.67	2680	-7.05	-3.81
1740	-7.37	-4.47	2700	-7.33	-3.95
1760	-7.44	-4.56			
1780	-8.2	-4.39			
1800	-8.41	-4.28			
1820	-8.77	-4.88			
1840	-8.74	-5.38			
1860	-8.56	-5.2			
1880	-8.46	-5.08			
1900	-8.07	-4.71			

2-4-4 4 IN1 Antenna Efficiency(BT/BLE/2.4G WIFI/5G WIFI)

GPS				2.4G WIFI				5G WIFI			
Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)	Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)	Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
1550	1.16	-4.66	34%	2400	-0.18	-5.03	31%	5150	1.15	-4.5	35%
1555	1.47	-4.46	36%	2410	0.38	-4.69	34%	5200	-0.2	-5.14	31%
1560	1.45	-4.57	35%	2420	0.92	-4.32	37%	5250	-1.13	-5.66	27%
1565	1.44	-4.53	35%	2430	0.53	-4.53	35%	5300	-0.19	-5.88	26%
1570	1.42	-4.49	36%	2440	0.68	-4.64	34%	5350	1.15	-4.5	35%
1575	1.26	-4.49	36%	2450	1.15	-4.5	35%	5400	-0.03	-6	25%
1580	1.07	-4.54	35%	2460	0.82	-4.75	34%	5450	0.61	-6.4	23%
1585	0.85	-4.59	35%	2470	0.68	-4.97	32%	5500	-0.35	-6.46	23%
1590	0.49	-4.72	34%	2480	1.01	-4.9	32%	5550	-0.26	-6.5	22%
1595	0.13	-5.03	31%	2490	0.78	-5.05	31%	5600	1.15	-4.5	35%
1600	0.11	-5.1	31%	2500	0.38	-5.36	29%	5650	-2.38	-6.58	22%
								5700	-2.36	-7.32	19%
								5750	1.15	-4.5	35%
								5800	-1.32	-5.58	28%
								5850	-1.66	-7.14	19%

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ±2 X.X = ±0.1 X.XX = ±0.05

ANGLES = ±

HOLEDIA = ±

SCALE :

UNIT : mm

DRAWN BY :

CHECKED BY :

DESIGNED BY :

APPROVED BY :


TITLE : GH6611-LTE-ANT-V1.0Specification

DOCUMENT
NO.


PAGE REV.
A0

3. LTE Antenna 3D Radiation Pattern


-LTE B2[1855MHz]

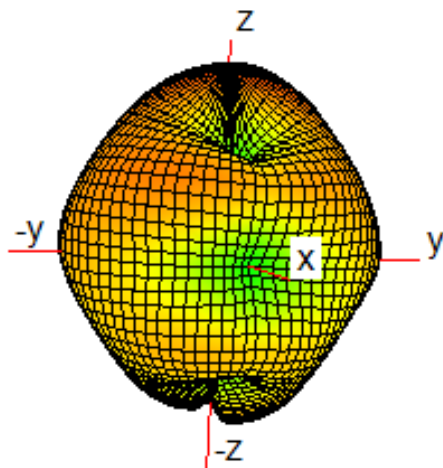


-LTE B2[1905MHz]

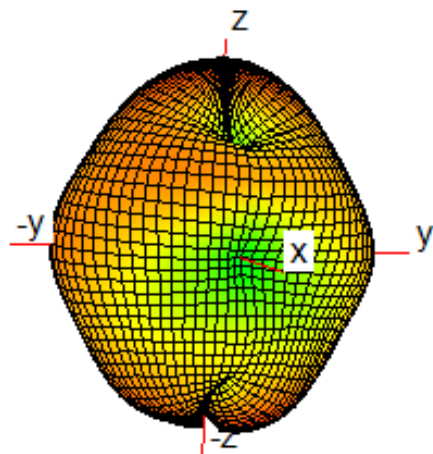

-LTE B4[790MHz]

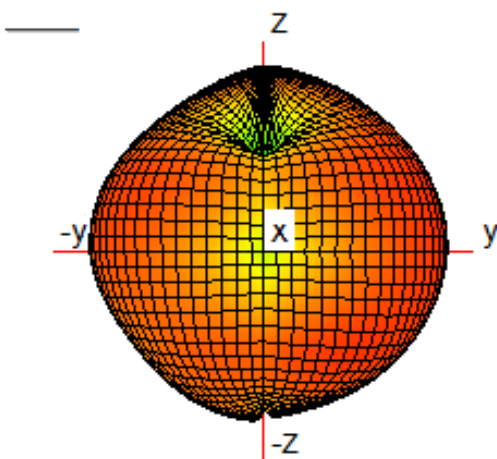


-LTE B4[790MHz]

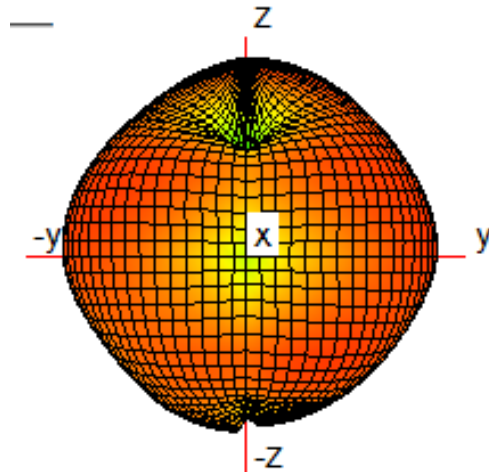


UNLESS OTHER SPECIFIED TOLERANCES ON : X = ±2 X.X = ±0.1 X.XX = ±0.05 ANGLES = ± HOLEDIA = ±		 Shanghai Deman Electronics TECHNOLOGY CO.,LTD	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHANGHAI DEMAN ELECTRONICS TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY :	CHECKED BY :		
DESIGNED BY :	APPROVED BY :		
TITLE : <u>GH6611-LTE-ANT-V1.0</u> Specification		DOCUMENT NO.	PAGE REV. A0


-LTE B66[1715MHz]

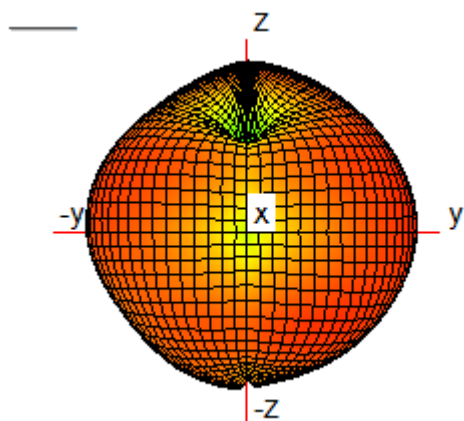


-LTE B66[1775MHz]

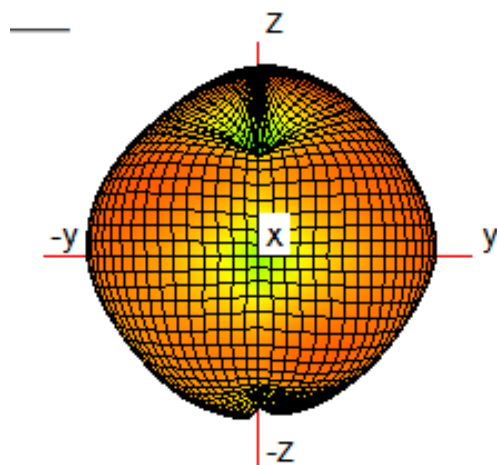

-LTE B5[829MHz]

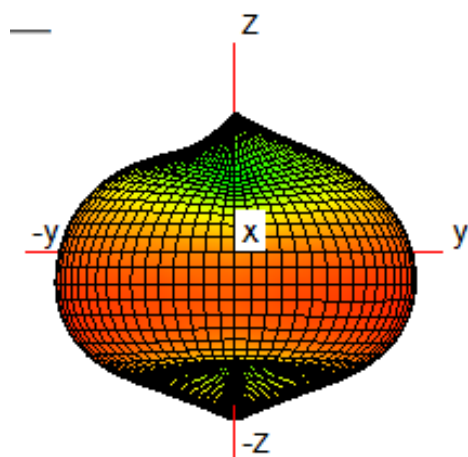

-LTE B5[844MHz]

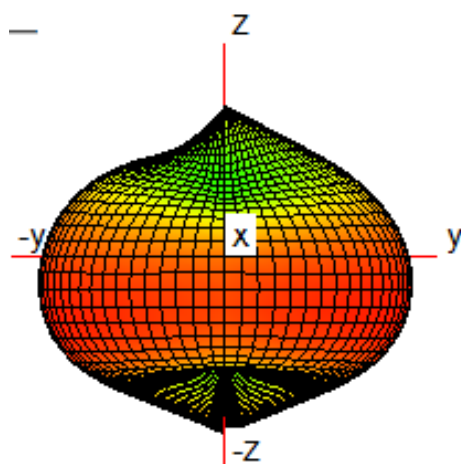

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± 2 X.X = ± 0.1 X.XX = ± 0.05

ANGLES = $\pm$

HOLEDIA = $\pm$

SCALE :

UNIT : mm

DRAWN BY :

CHECKED BY :

DESIGNED BY :

APPROVED BY :

TITLE : GH6611-LTE-ANT-V1.0Specification

Deman


Shanghai Deman
Electronics TECHNOLOGY CO.,LTD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHANGHAI DEMAN ELECTRONICS TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


DOCUMENT
NO.

PAGE REV.
A0


-LTE B12[704MHz]

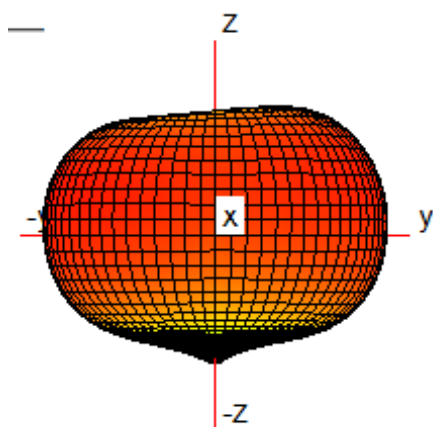


-LTE B12[711MHz]

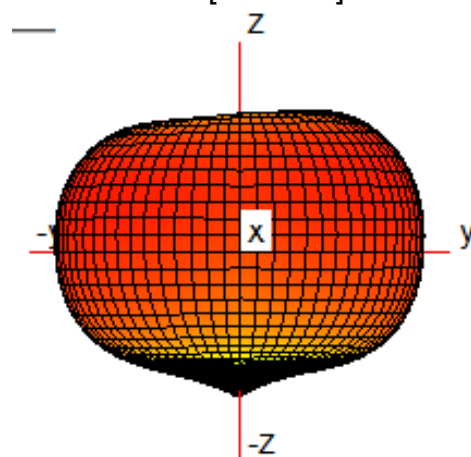


-LTE B13[782MHz]

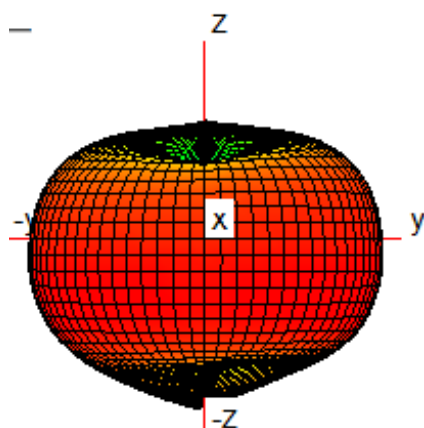

-LTE B25[1855MHz]

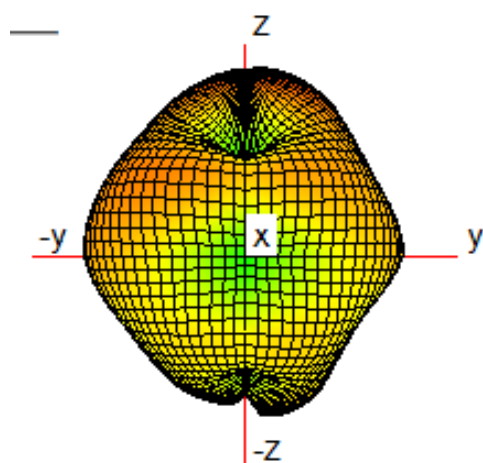

-LTE B25[1910MHz]

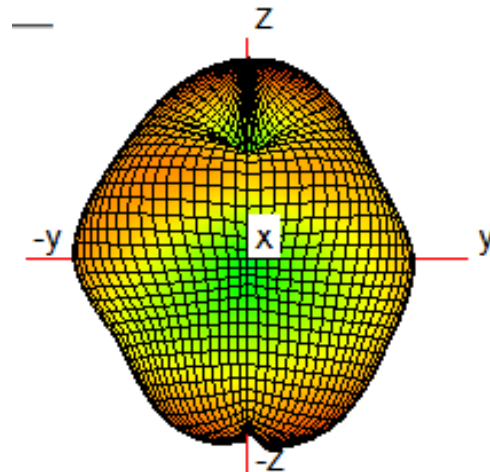

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± 2 X.X = ± 0.1 X.XX = ± 0.05

ANGLES = $\pm$

HOLEDIA = $\pm$

SCALE :

UNIT : mm

DRAWN BY :

CHECKED BY :

DESIGNED BY :

APPROVED BY :

TITLE : GH6611-LTE-ANT-V1.0Specification

Deman


Shanghai Deman
Electronics TECHNOLOGY CO.,LTD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHANGHAI DEMAN ELECTRONICS TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


DOCUMENT
NO.

PAGE REV.
A0


-LTE B26[819MHz]

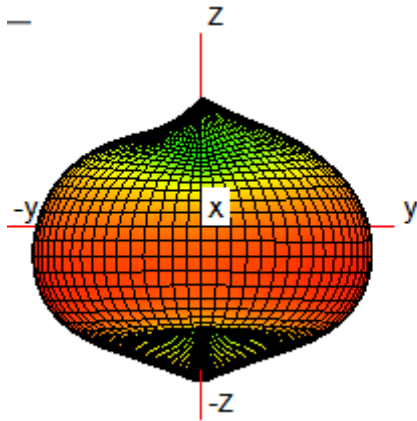


-LTE B26[844MHz]

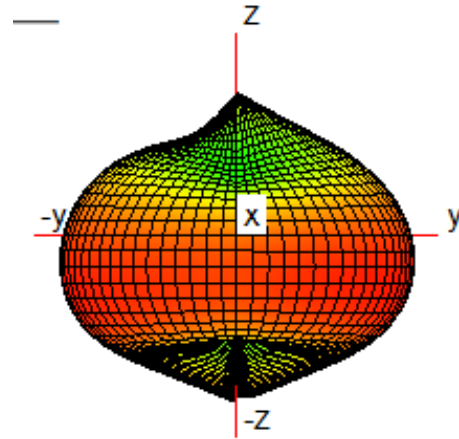

-LTE B71[661MHz]

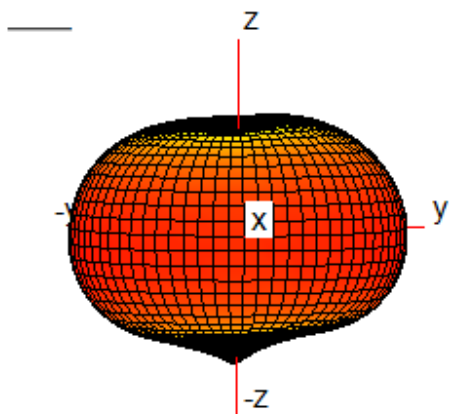

-LTE B71[693MHz]

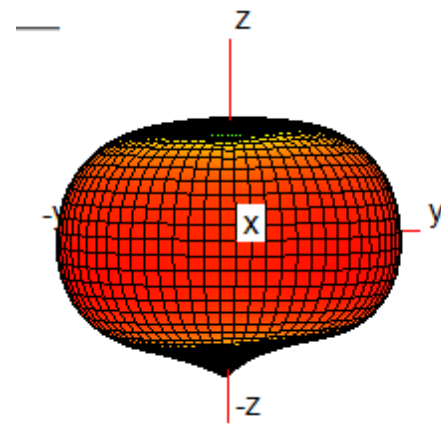

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± 2 X.X = ± 0.1 X.XX = ± 0.05

ANGLES = $\pm$

HOLEDIA = $\pm$

SCALE :

UNIT : mm

DRAWN BY :

CHECKED BY :

DESIGNED BY :

APPROVED BY :

TITLE : GH6611-LTE-ANT-V1.0Specification

Deman

Shanghai Deman
Electronics TECHNOLOGY CO.,LTD


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHANGHAI DEMAN ELECTRONICS TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

PAGE REV.
A0

4 4IN1 Antenna 3D Radiation Pattern(BT/BLE/2.4G WIFI/5G WIFI)


BT/WiFi 2.4GHz

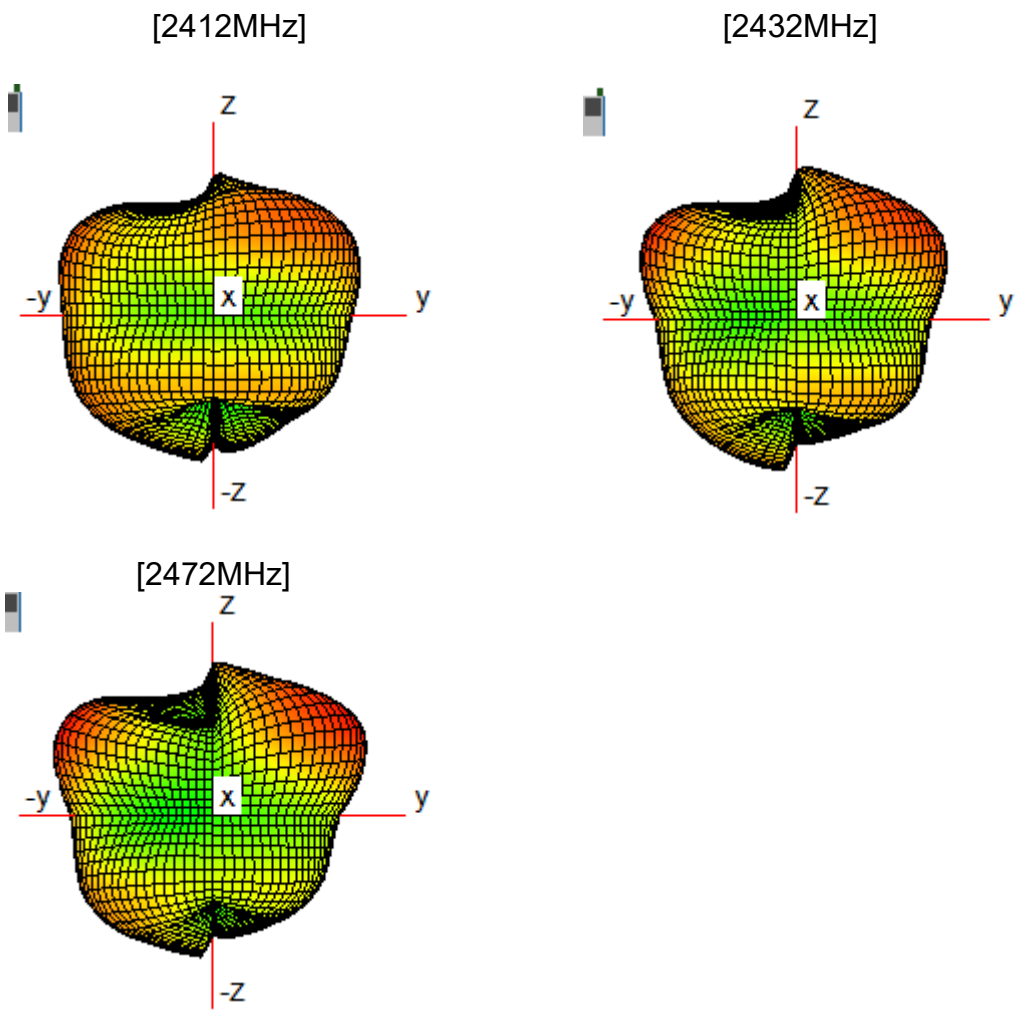


UNLESS OTHER SPECIFIED TOLERANCES ON : X = ±2 X.X = ±0.1 X.XX = ±0.05 ANGLES = ± HOLEDIA = ±		 Shanghai Deman Electronics TECHNOLOGY CO.,LTD	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHANGHAI DEMAN ELECTRONICS TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY :	CHECKED BY :		
DESIGNED BY :	APPROVED BY :		
TITLE : <u>GH6611-LTE-ANT-V1.0</u> Specification		DOCUMENT NO.	PAGE REV. A0

WiFi 5GHz


[5180MHz]

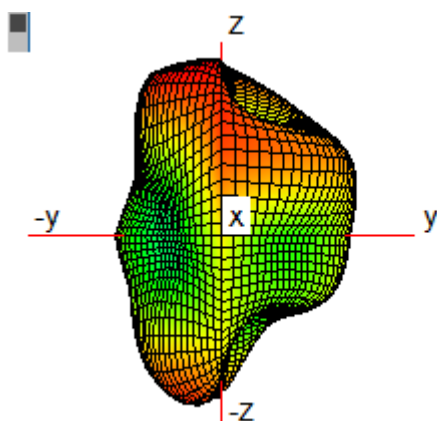

[5320MHz]

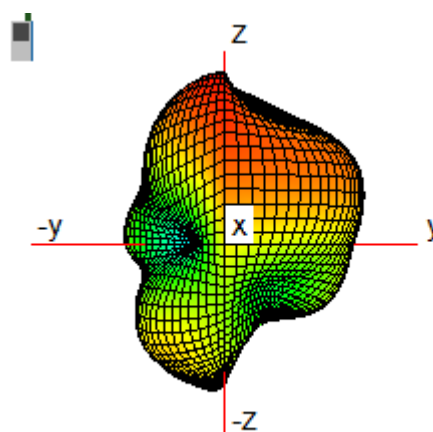

[5825MHz]

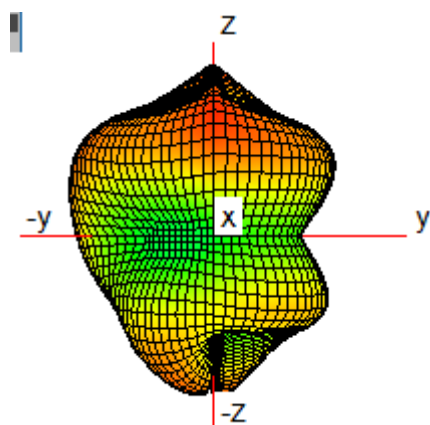

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± 2 X.X = ± 0.1 X.XX = ± 0.05

ANGLES = $\pm$

HOLEDIA = $\pm$

Deman

Shanghai Deman
Electronics TECHNOLOGY CO.,LTD

SCALE :

UNIT : mm

DRAWN BY :

CHECKED BY :

DESIGNED BY :

APPROVED BY :

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHANGHAI DEMAN ELECTRONICS TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : GH6611-LTE-ANT-V1.0Specification

DOCUMENT
NO.

PAGE REV.

A0

4. Antenna Dimensions:

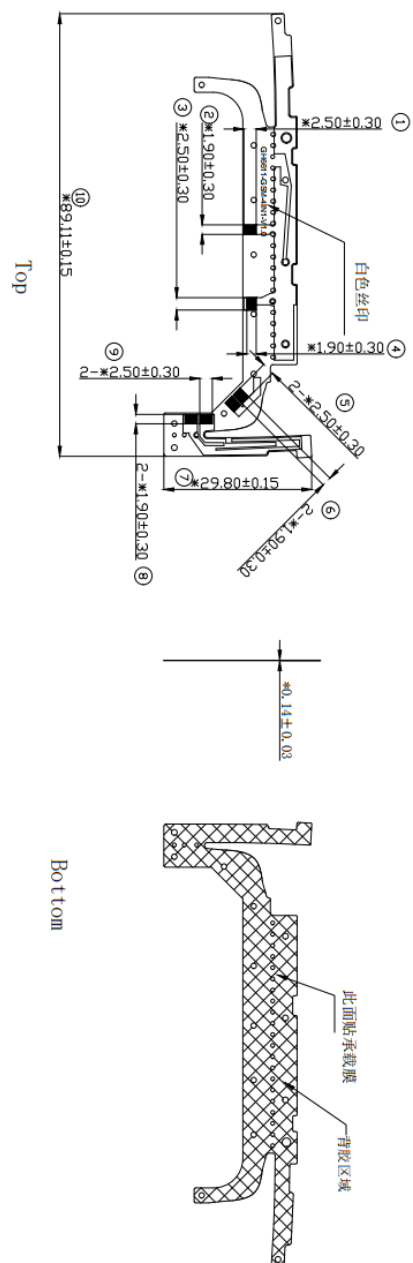

No.58, Shexue Road, Xinzhuang Industrial Park, Minhang District, Shanghai

UNLESS OTHER SPECIFIED TOLERANCES ON : X = ± 2 X.X = ± 0.1 X.XX = ± 0.05 ANGLES = $\pm$ HOLEDIA = $\pm$		 Shanghai Deman Electronics TECHNOLOGY CO.,LTD	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHANGHAI DEMAN ELECTRONICS TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY :	CHECKED BY :		
DESIGNED BY :	APPROVED BY :		
TITLE : <u>GH6611-LTE-ANT-V1.0</u> Specification		DOCUMENT NO.	PAGE REV. A0