



**FCC PART 15 SUBPART C
CERTIFICATION REPORT**

FOR

RFID TAG READER

MODEL: MTAG2

FCC ID NO: HE7MT2

REPORT NO: 04U2979-1

ISSUE DATE: SEPTEMBER 17,2004

Prepared for

**EXI WIRELESS SYSTEMS INC.
SUITE 100, 13551 COMMERCE PARKWAY
RICHMOND, BC, CANADA**

Prepared by

COMPLIANCE ENGINEERING SERVICES, INC.

d.b.a.

**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD
MORGAN HILL, CA 95037 USA
TEL: (408) 463-0885
FAX: (408) 463-0888**



TABLE OF CONTENTS	PAGE
1. VERIFICATION OF COMPLIANCE	3
2. PRODUCT DESCRIPTION	4
3. TEST FACILITY	4
4. MEASUREMENT STANDARD	4
5. TEST METHODOLOGY	4
6. MEASUREMENT EQUIPMENT USED	4
7. POWERLINE RFI LIMIT	5
8. RADIATED EMISSION LIMITS	5
9. SYSTEM TEST CONFIGURATION	6
10. TEST PROCEDURE	7
11. EQUIPMENT MODIFICATIONS	9
12. TEST RESULT	10
12.1 MAXIMUM MODULATION PERCENTAGE (M%)	10
12.2 EMISSION BANDWIDTH	10

TEST DATA

- Maximum Modulation Percentage Plot
- Emission Bandwidth Plot
- Radiated Emission Worksheet for Peak Measurement
- Radiated Emission Worksheet for Average Measurement

ATTACHMENT

- EUT Photographs
- Proposed FCC ID Label
- Schematics & Block Diagram
- User Manual

1. VERIFICATION OF COMPLIANCE

COMPANY NAME : EXI WIRELESS SYSTEMS INC.
SUITE 100, 13551 COMMERCE PARKWAY
RICHMOND BC, CANADA
EUT DESCRIPTION : RFID TAG READER
MODEL NO : MTAG2
FCC ID : HE7MT2
DATE TESTED : 9-16-2004
REPORT NUMBER : 04U2979-1

TYPE OF EQUIPMENT	RF TAGS
EQUIPMENT TYPE	TRANSCEIVER: 433.92MHz, TRANSMITTER: 307KHz
MEASUREMENT PROCEDURE	ANSI C63.4 / 2001
LIMIT TYPE	CERTIFICATION
FCC RULE	CFR 47, PART 15

The above equipment was tested by Compliance Certification Services for compliance with the requirements set forth in the FCC CFR 47, PART 15. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties. **Warning** : This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification will constitute fraud and shall nullify the document.

Tested By:



CHIN PANG
EMC TECHNICIAN
COMPLIANCE CERTIFICATION SERVICES

Approved & Released By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

2. PRODUCT DESCRIPTION

Fundamental Frequency	433.92 MHz / 307kHz
Power Source	3V Battery
Transmitting Time	Periodic \geq 5 seconds
Associated Receiver	NA
Manufacturer	EXI Wireless Systems Inc.

3. TEST FACILITY

The 3/10/30 meter open area test site and conducted measurement facility used to collect the radiated data is located at 561F Monterey Road, Morgan Hill, California, U.S.A. A detailed description of the test facility was submitted to the Commission on May 27, 1994.

4. MEASUREMENT STANDARD

The site is constructed and calibrated in conformance with the requirements of ANSI C63.4/2001.

5. TEST METHODOLOGY

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 KHz, up to at least the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. (CFR 47 Section 15.33)

6. MEASUREMENT EQUIPMENT USED

TEST EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
Antenna, Loop 9 kHz ~ 30 MHz	EMCO	6502	9202-2722	4/23/2005
Spectrum Analyzer 20 Hz ~ 44 GHz	Agilent	E4446A	US42070220	1/13/2005
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	2/4/2005
Amplifier 1-26GHz	MITEQ	NSP2600-SP	924341	4/25/2005
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/20/2004
RF Filter Section	HP	85420E	3705A00256	11/20/2004
Bilog Antenna	ARA	LPB-2520/A	NA	9/3/2005
SA Display Section 2	HP	85662A	2816A16696	2/22/2005
Quasi-Peak Adaptor	HP	85650A	2811A01155	2/22/2005
SA RF Section 1.5GHz	HP	85680B	2814A04227	2/22/2005

7. POWERLINE RFI LIMIT

CONNECTED TO AC POWER LINE	SECTION 15.207
CARRIER CURRENT SYSTEM IN THE FREQUENCY RANGE OF 150 KHz TO 30 MHz	SECTION 15.205 AND SECTION 15.209, 15.221, 15.223, 15.225 OR 15.227, AS APPROPRIATE.
BATTERY POWER	NOT REQUIRED

8. RADIATED EMISSION LIMITS

GENERAL REQUIREMENTS	SECTION 15.209
RESTRICTED BANDS OF OPERATION	SECTION 15.205
PERIODIC OPERATION IN THE BAND 40.66 - 40.70 MHz AND ABOVE 70 MHz.	SECTION 15.231(e)

9. SYSTEM TEST CONFIGURATION

Use a block of foam and combined it with EUT wrapping rubber band around it. This way it can test X.Y, and Z axis. To activate continuous transmission, place a small plastic block between rubber band and EUT push button.



X-Axis



Y-Axis



Z-Axis

Radiated Open Site Test Set-up

10. TEST PROCEDURE

Radiated Emissions, 15.209

Test Set-up for frequency range below 30 MHz

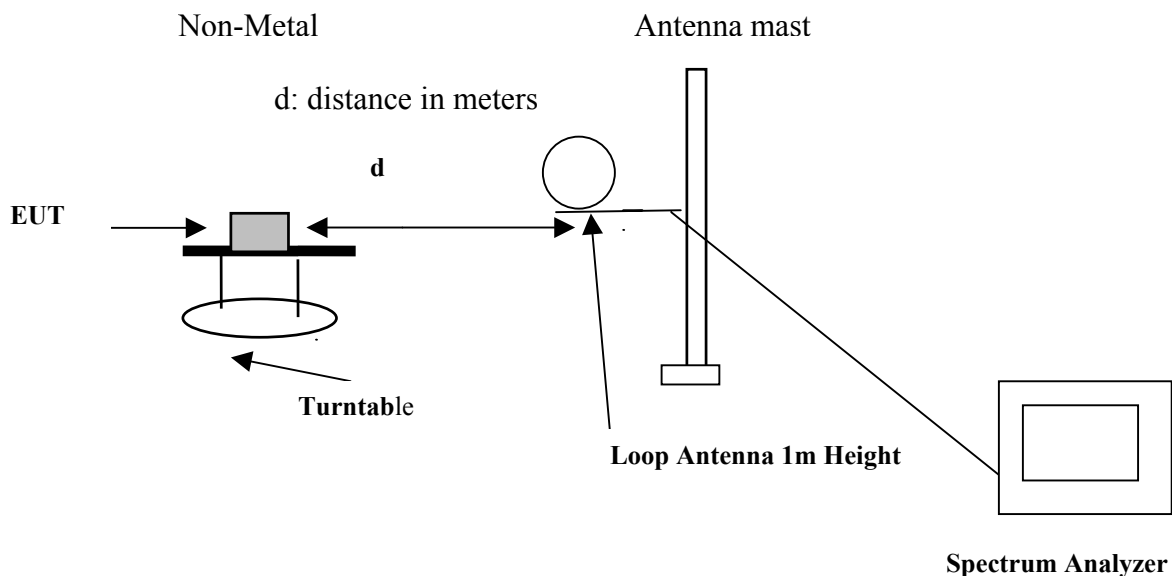



FIG. 1

Test Procedure:

The measurement is made on open field test site, the H field produced by the EUT is measured using an active loop antenna, measurement is done at 3m distances from the EUT with an extrapolation of corrected distance factor. The loop antenna is rotated around its axis to maximize the emission, the antenna of the EUT was placed at three different orientations, X, Y and Z to find the worst orientation, the worst orientation was found to be when the antenna of the EUT is in vertical position and the plane of the loop antenna is in parallel with the antenna of the EUT.

The RBW of the spectrum analyzer is set to 10kHz, VBW is set to 10kHz, reading on the analyzer in dBuV was added to cable loss and antenna factor in dB/m to get the H field in dBuA/m.

Radiated Emissions, 15.231(4) (e)

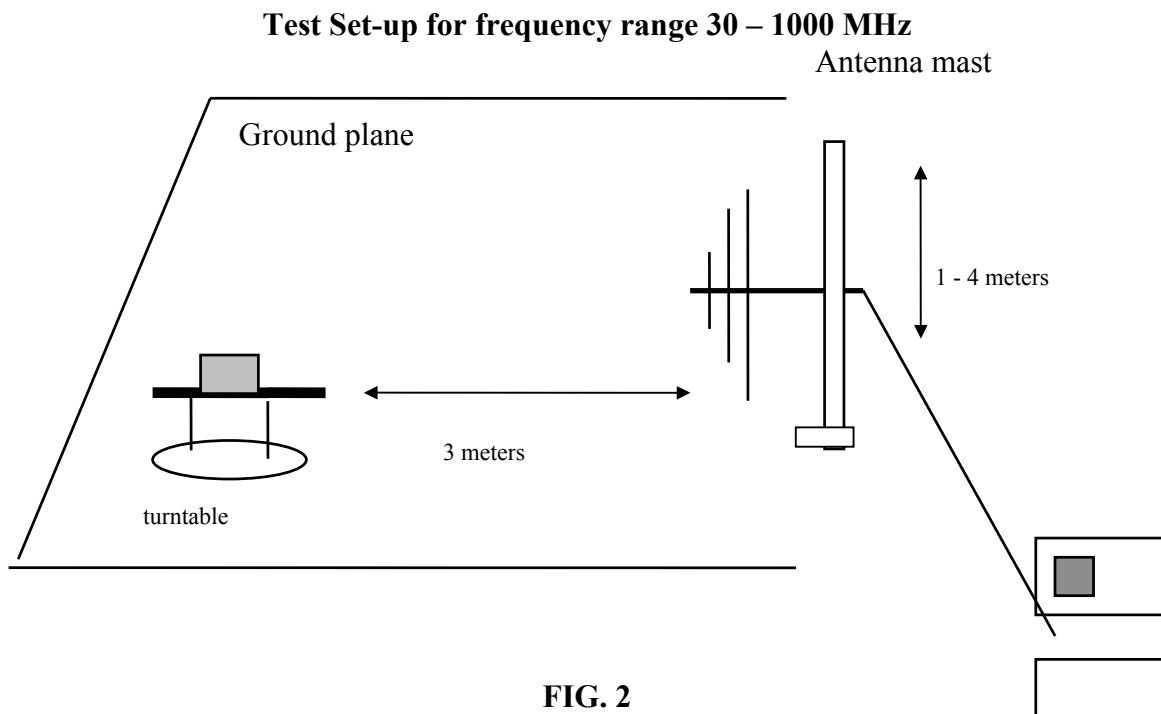

preamplifier/spectrum analyzer

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 3-meters from the EUT.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205. The EUT was moved throughout the XY, XZ, and YZ planes to maximize emissions received by the search antenna.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The maximum readings so obtained are recorded in the data listed below.

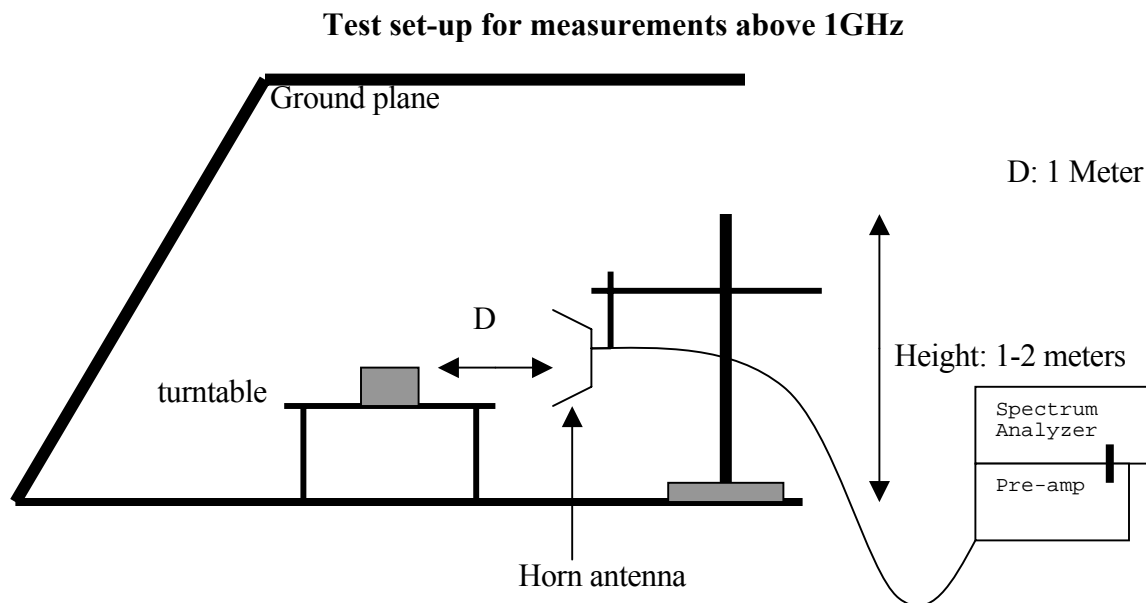


FIG. 3

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 1-meters from the EUT. The EUT antenna was mounted vertically as per normal installation.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205. The EUT was moved throughout the XY, XZ, and YZ planes to maximize emissions received by the search antenna.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The maximum readings so obtained are recorded in the data listed below.

11. EQUIPMENT MODIFICATIONS

To achieve compliance to FCC Section 15.231 technical limits, the following change(s) were made during compliance testing:

No changes were required in order to achieve compliance to Section 15.231 levels.

12. TEST RESULT

Powerline RFI Class B	Eut	Radiated Emission Limits	Eut
SECTION 15.207		SECTION 15.209	X
SECTION 15.205, 15.209, 15.221, 15.223, x 15.225 OR 15.227		SECTION 15.205	X
BATTERY POWER	X	SECTION 15.231 (e)	X

12.1 MAXIMUM MODULATION PERCENTAGE (M%)

CALCULATION:

Average Reading = Peak Reading (dBuV/m)+ 20log (Duty Cycle)

In order to determine possible Maximum Modulation percentage, alternations are made to the EUT. We measured:

WHERE 1 Period = 128.8ms
 Long pulse = 1 ms
 Short pulse =0.800 ms
 No of Long pulse = 12
 No of Short pulse = 48

Duty Cycle = (N1L1+N2L2+...+Nn-1Ln-1+NnLn)/100 or T

Duty Cycle = ((12x1)+(48x0.800))/100=0504=50.4%


For duty cycle refer to plot #1, 2, 3,4, 5, 6

12.2 EMISSION BANDWIDTH


The bandwidth of the emissions were investigated per 15.231(c)

Center Frequency	Measured	Limits
433.92 MHz	534KHz (refer to plot)	433.92 x 0.25%= 1.0848MHz


DUTY CYCLE 1

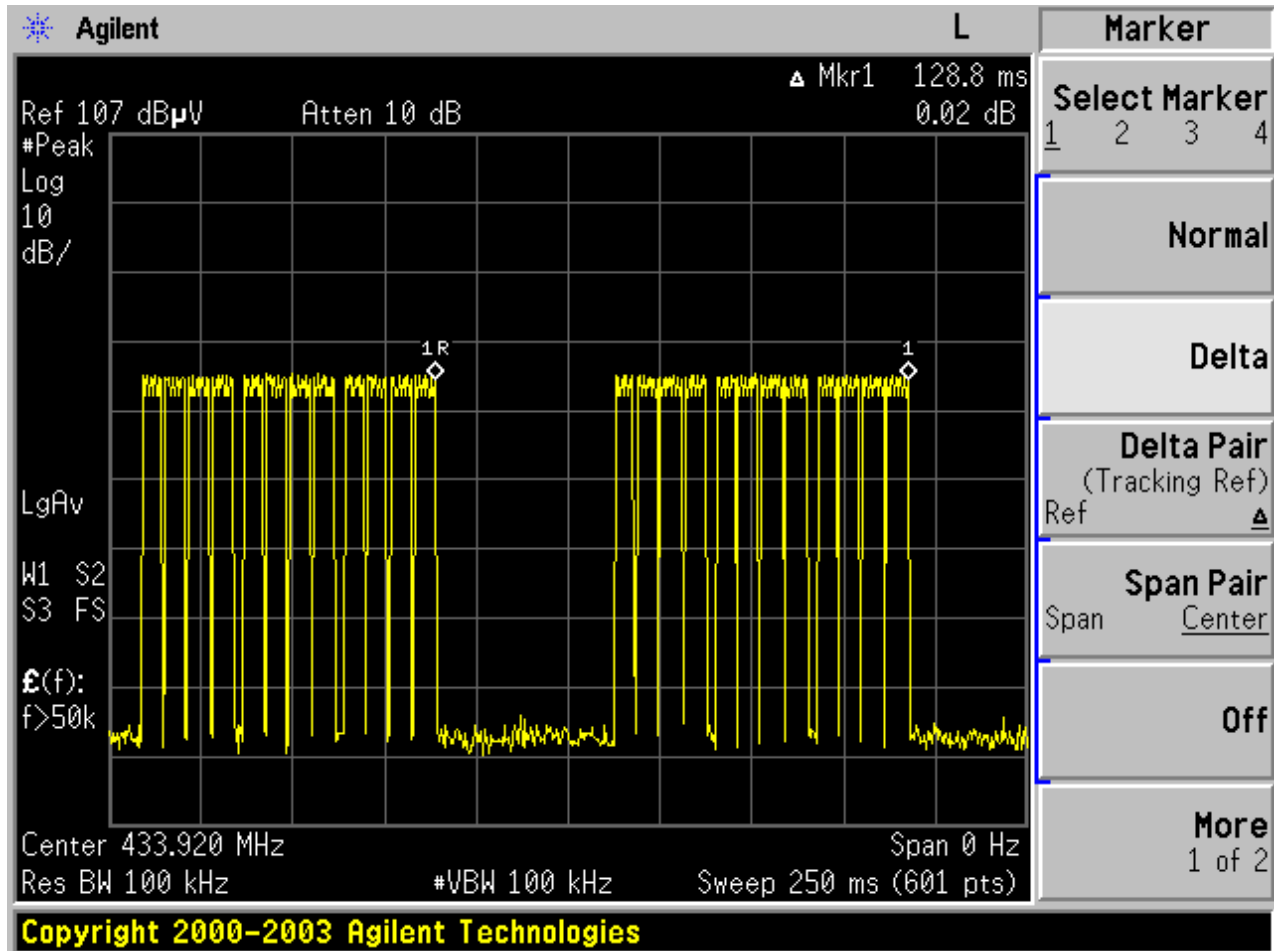


DUTY CYCLE 2

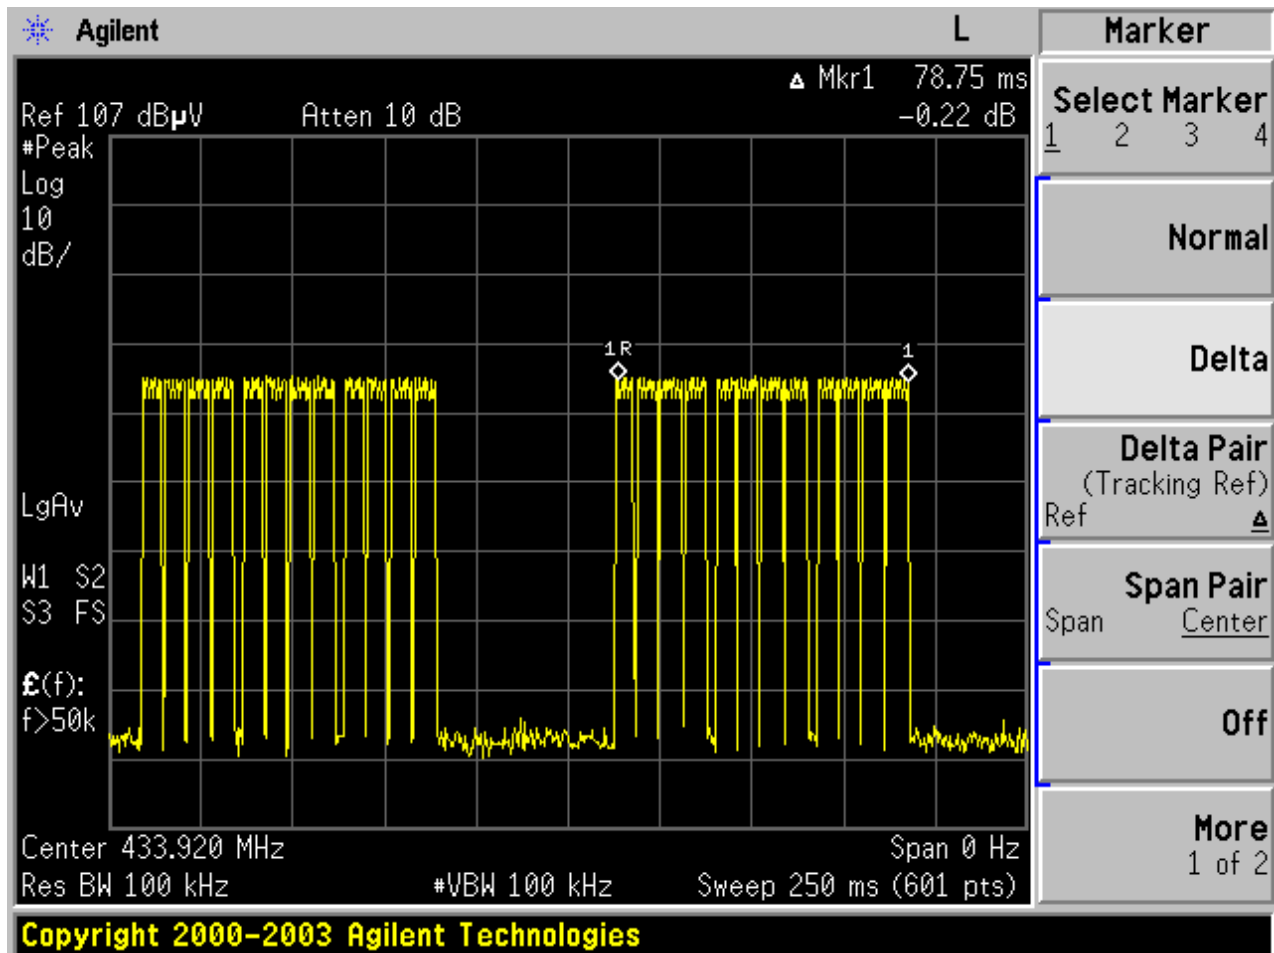


DUTY CYCLE 3

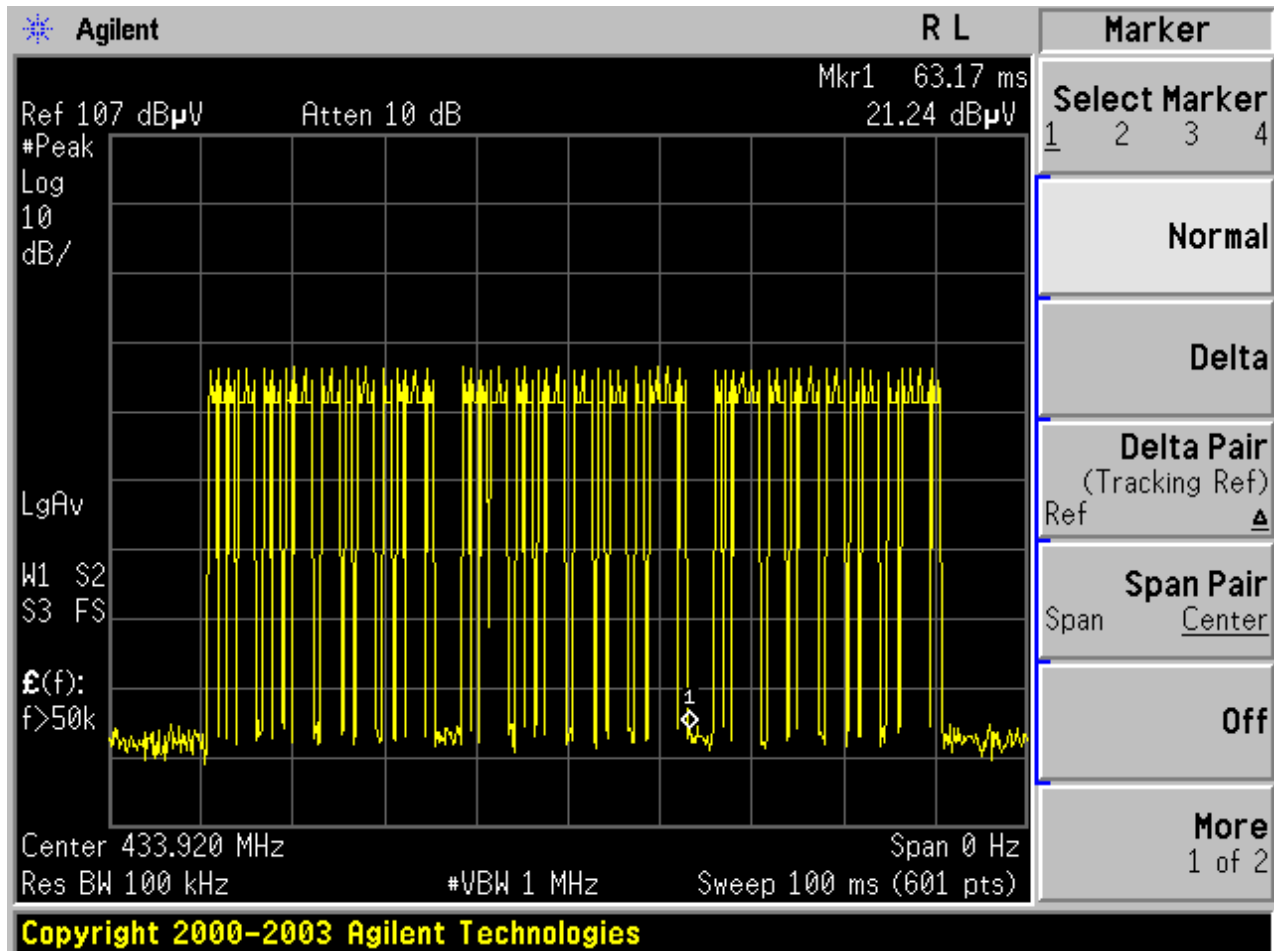


DUTY CYCLE 4

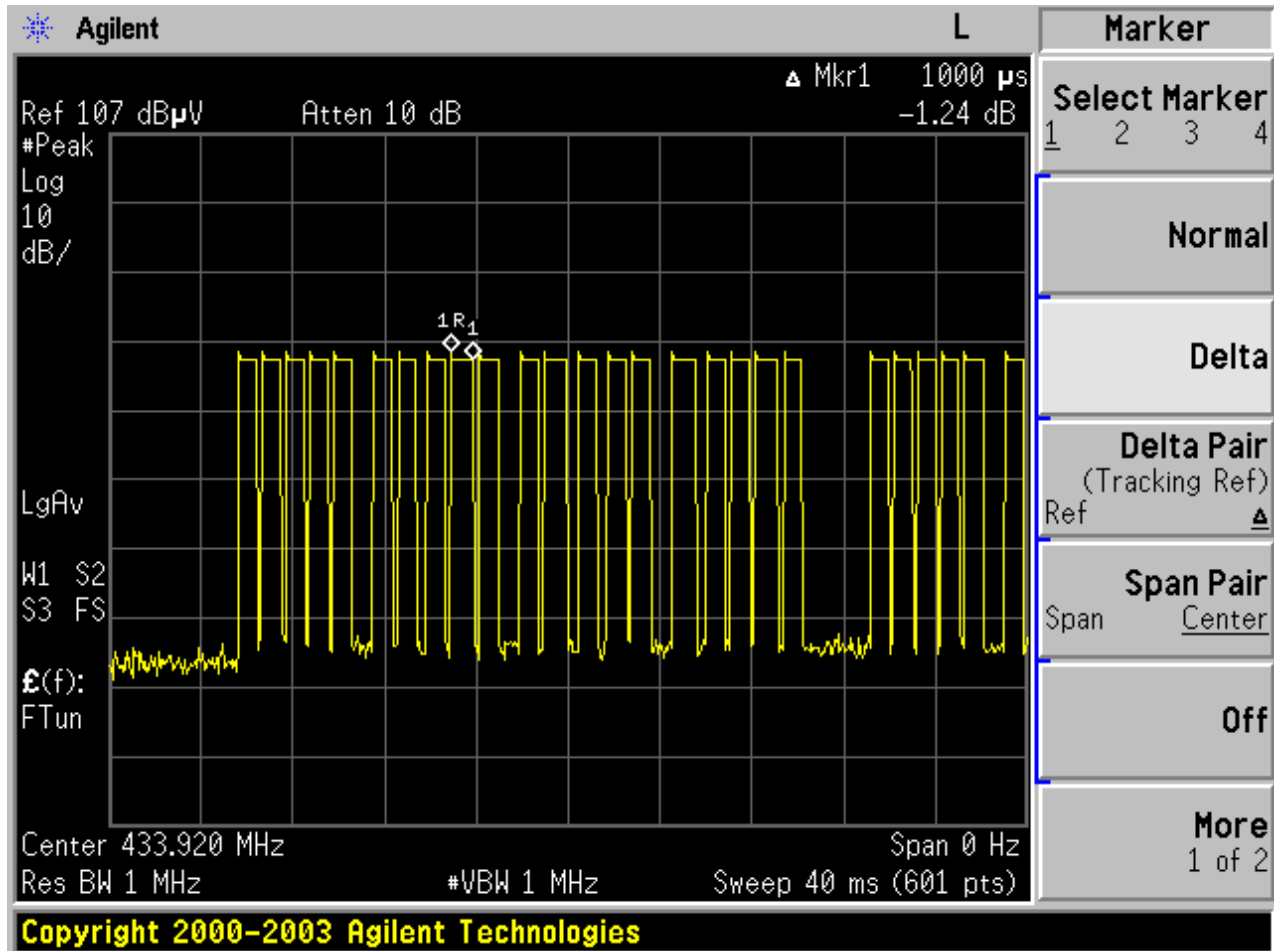


DUTY CYCLE 5

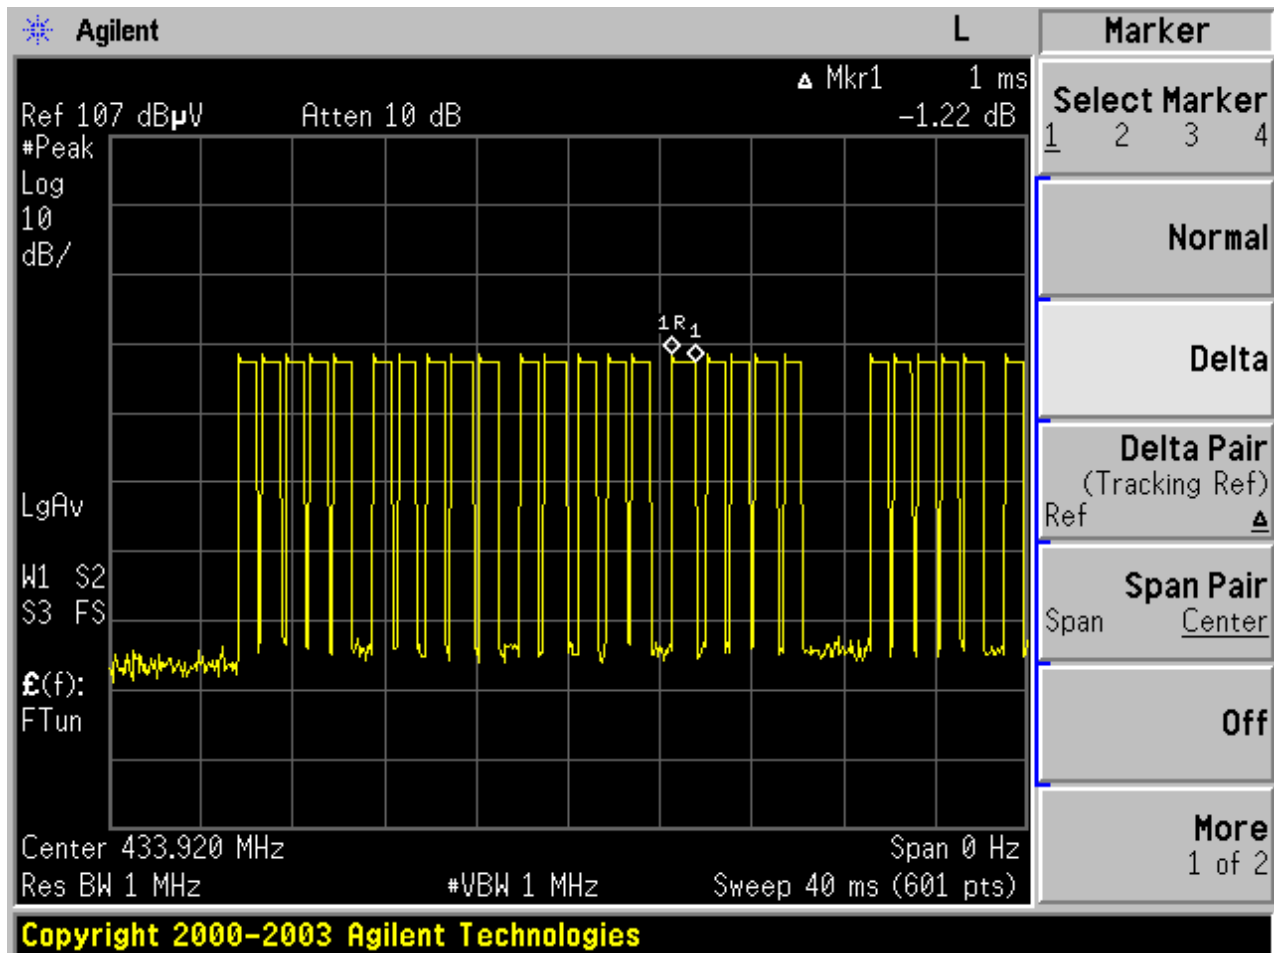


DUTY CYCLE 6

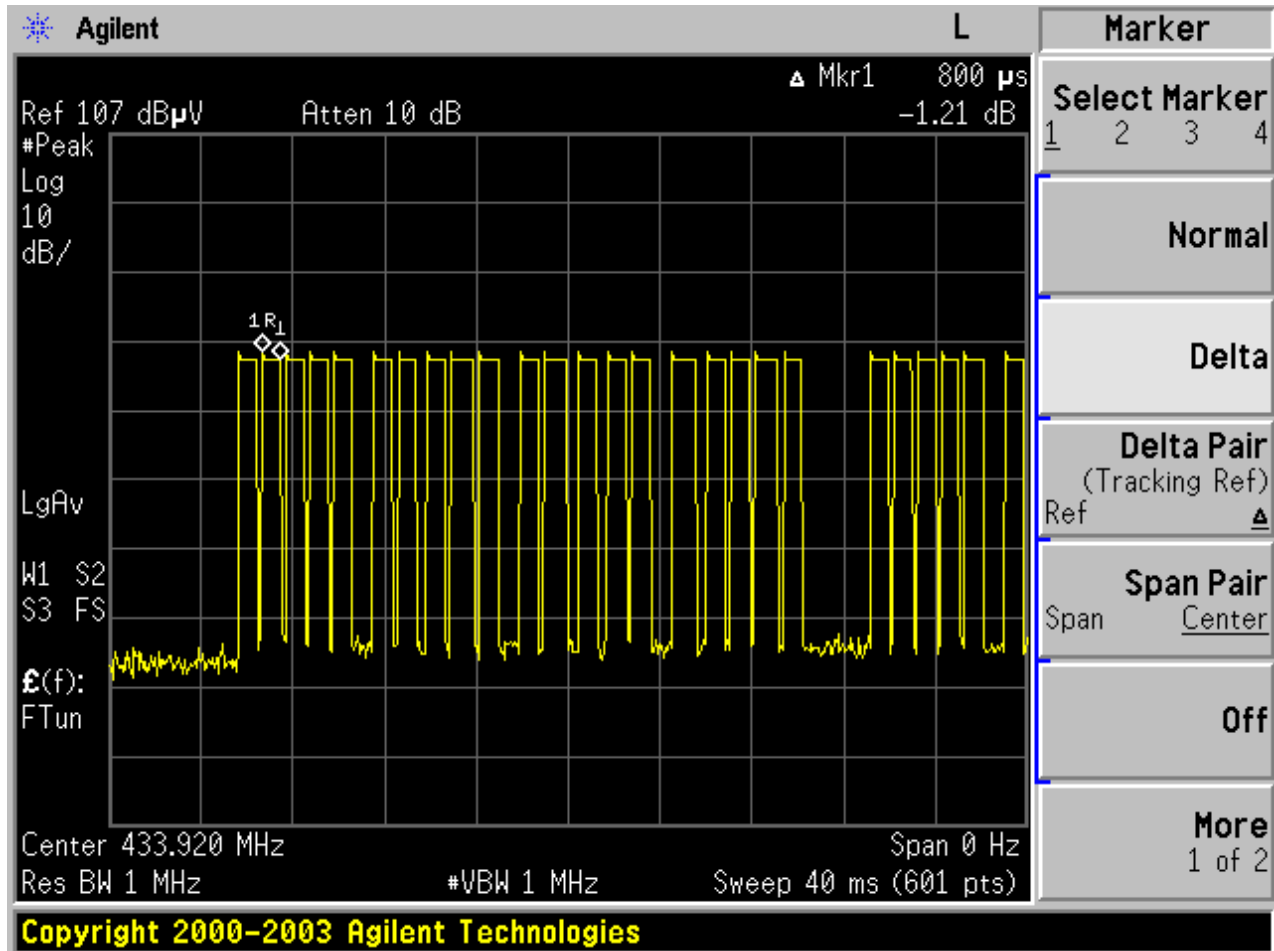

EMISSION BANDWIDTH

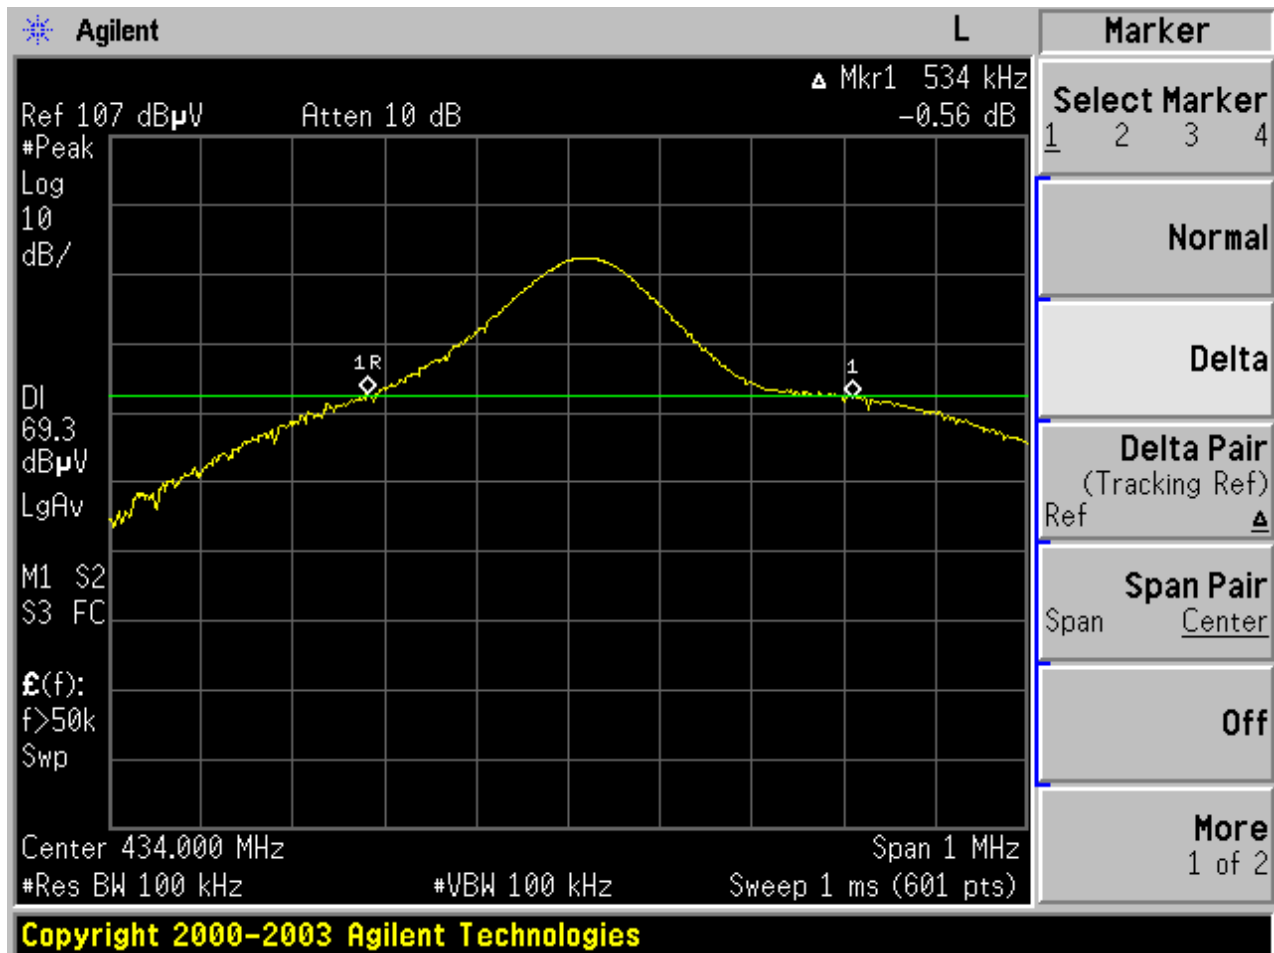

RADIATED EMISSION DATA

						Project #: 04U2979-1 Report #: 040915C1 Date & Time: 9/9/2004 19:30 PM Test Engr: Chin Pang	
FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP 561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888							
Company: EXI Wireless System, Inc. EUT Description: Transceiver: 433.92MHz Test Configuration: EUT Only Type of Test: FCC 15.231 Mode of Operation: Transmitting							


$M\% = ((t1+t2+t3+...)/T)*100\% = 50.4\%$

Av Reading = Pk Reading + 20*log(M%)
20*log(M%) = -5.95

Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)
433.92Mhz Fundamental frequency												
X-Position (Laydown)												
433.92	42.59	36.64	15.66	3.15	0.00	55.45	72.86	-17.41	3mV	0.00	1.00	P
433.92	34.20	28.25	15.58	3.15	0.00	46.98	72.86	-25.88	3mH	0.00	1.00	P
Y-Position (Standup)												
433.92	39.34	33.39	15.66	3.15	0.00	52.20	72.86	-20.66	3mV	0.00	1.00	P
433.92	43.75	37.80	15.58	3.15	0.00	56.53	72.86	-16.33	3mH	0.00	1.00	P
Z-Position (Side Lay Down)												
433.92	41.71	35.76	15.66	3.15	0.00	54.57	72.86	-18.29	3mV	0.00	1.00	P
433.92	38.36	32.41	15.58	3.15	0.00	51.14	72.86	-21.72	3mH	0.00	1.00	P
The Data show Y-Position is the worst case												
868.60	14.26	8.31	20.23	4.83	0.00	33.37	52.86	-19.49	3mV	0.00	1.00	P
868.60	12.74	6.79	20.98	4.83	0.00	32.60	52.86	-20.26	3mH	0.00	2.00	P



RADIATED EMISSION DATA

Emissions data below 30MHz

						Project #: 04U2979-1 Report #: 040915C1 Date & Time: 09/15/04 Test Engr: Chin Pang					
FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP											
561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888											
Company: EXI Wireless Systems Inc. EUT Description: Transmitter: 307KHz Test Configuration : EUT Only Type of Test: FCC 15.209 Mode of Operation: TX											
<input checked="" type="radio"/> A-Site		<input type="radio"/> B-Site		<input type="radio"/> C-Site		<input type="radio"/> F-Site		6 Worst Data		Descending	
Freq.	Reading	AF	Closs	Dist	Level	Limit	Margin	Pol	Az	Height	Mark
(KHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	FCC B	(dB)	(H/V)	(Deg)	(Meter)	(P/Q/A)
Test at worst position:											
307.00	65.20	10.80	0.30	80.00	-3.70	17.86	-21.56	3mV	0.00	1.00	P
614.00	57.30	10.60	0.30	40.00	28.20	31.84	-3.64	3mV	0.00	1.00	P
921.00	42.20	10.60	0.30	40.00	13.10	28.32	-15.22	3mV	0.00	1.00	P
1228.00	51.00	10.60	0.30	40.00	21.90	25.82	-3.92	3mV	0.00	1.00	P
1535.00	46.20	10.60	0.30	40.00	17.10	23.88	-6.78	3mV	0.00	1.00	P
307.00	61.50	10.80	0.30	80.00	-7.40	17.86	-25.26	3mH	0.00	1.00	P
614.00	54.20	10.60	0.30	40.00	25.10	31.84	-6.74	3mH	0.00	1.00	P
921.00	42.30	10.60	0.30	40.00	13.20	28.32	-15.12	3mH	0.00	1.00	P
1228.00	48.50	10.60	0.30	40.00	19.40	25.82	-6.42	3mH	0.00	1.00	P
1535.00	40.50	10.60	0.30	40.00	11.40	23.88	-12.48	3mH	0.00	1.00	P
No other emissions were found up to 30MHz.											
Total data #: 10											

RADIATED EMISSION DATA

Receiver Spurious Emissions 30MHz – 1GHz

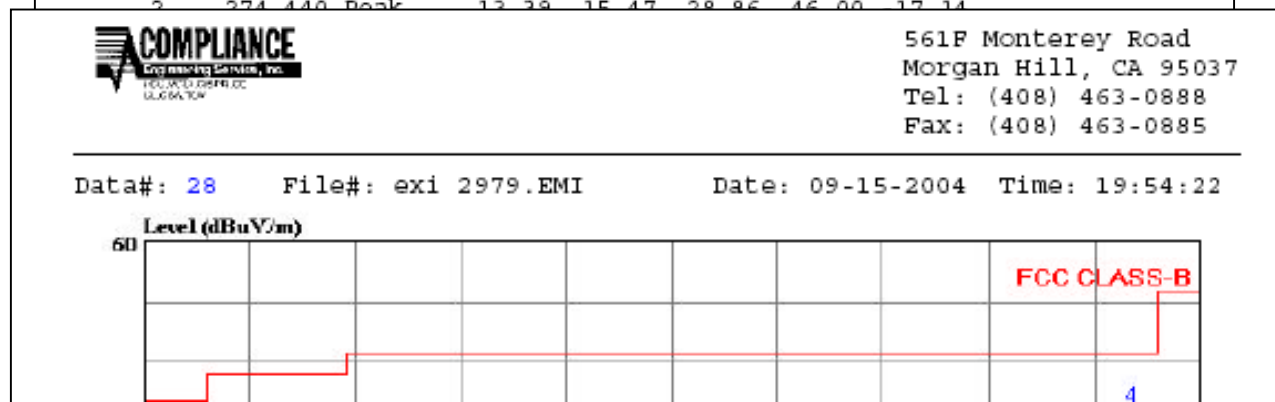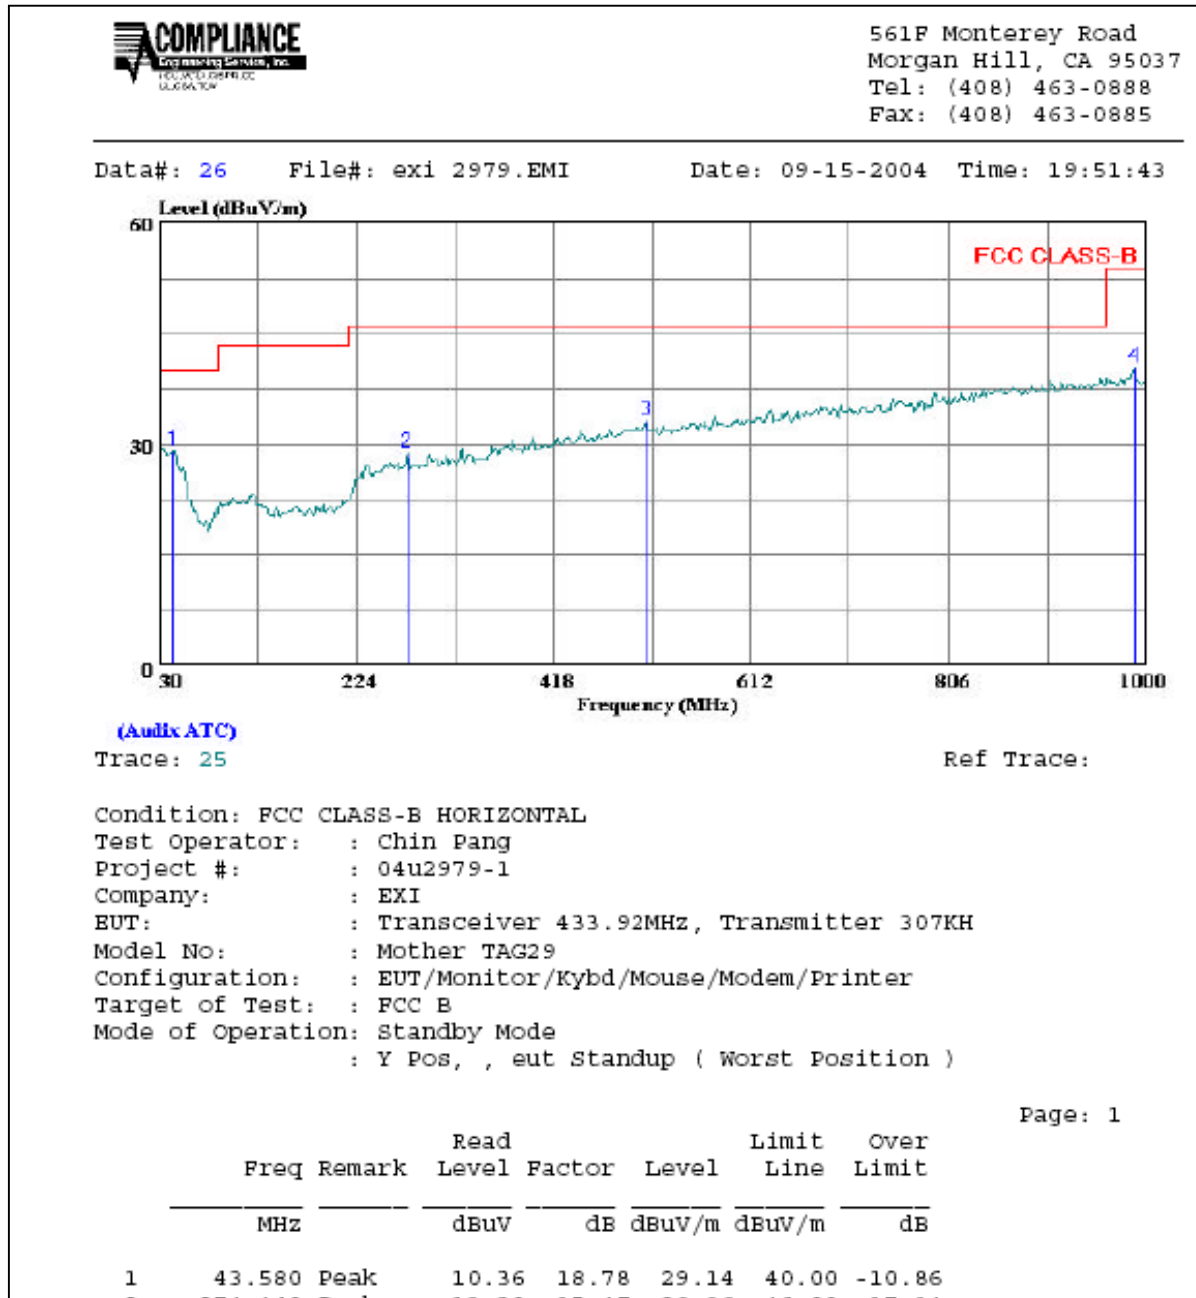

RECEIVER SPURIOUS EMISSIONS ABOVE 1GHZ


No emissions were found from 1GHz to 5th harmonics.

EUT PHOTOGRAPHS







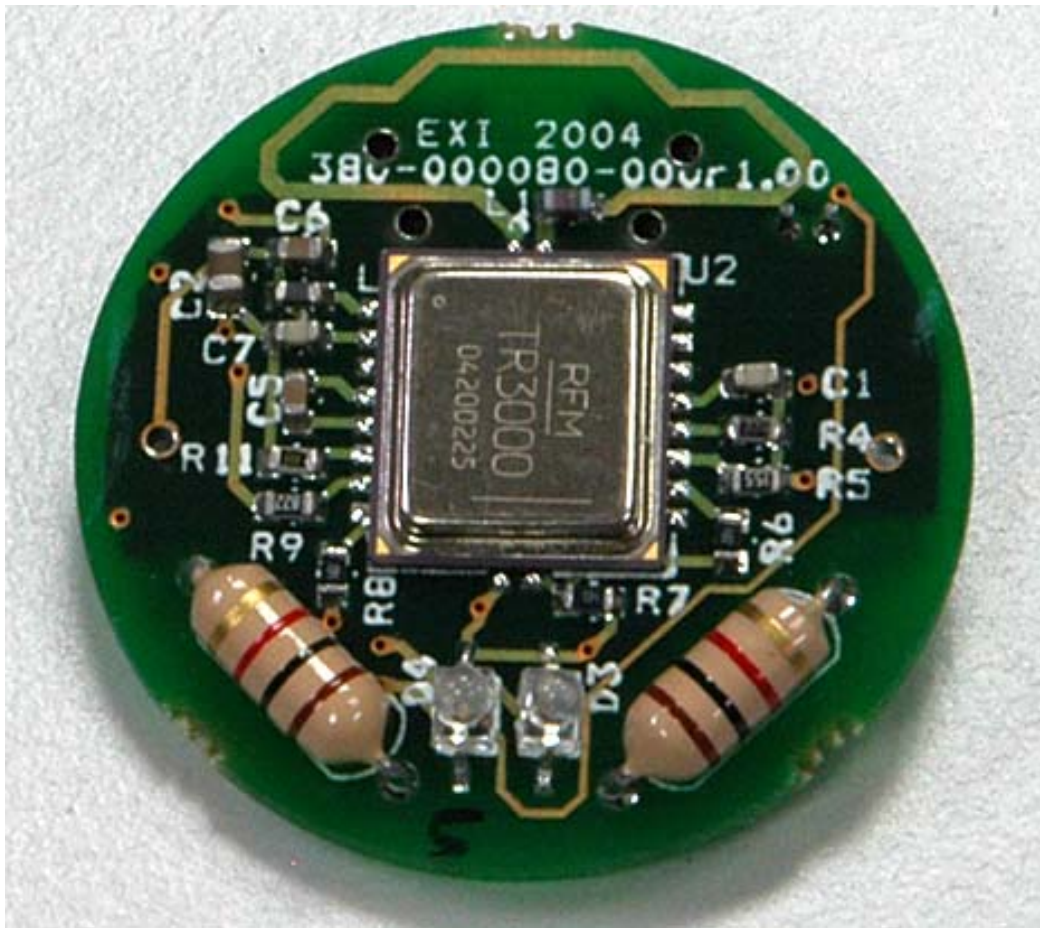

END OF REPORT