



# **FCC TEST REPORT**

**FCC ID: QOB-NOA0039R**

for

**Product: Photocell timer - Dusk to Dawn 8 6 4 2 countdown 3 Grounded outlets  
With 7 button remote**

**Model: NOA0039R**

**Additional model: 79792**

**Brand Name: Enbrighten**

**Report No.: PTC23070706001E-FC01**

Issued for

**Jasco Products Company LLC**

**10 e memorial road Office oklahoma city, OK 73114**

Issued by

**Precise Testing & Certification Co., Ltd.**

**Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong,  
China.**

**TEL: +86-769-3880 8222**

**FAX: +86-769-3882 6111**

Note: This report shall not be reproduced except in full, without the written approval of Precise Testing & Certification Co., Ltd. This document may be altered or revised by Precise Testing & Certification Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results presented in this report only relate to the tested sample.



## TABLE OF CONTENTS

<b>1. TEST CERTIFICATION .....</b>	<b>3</b>
<b>2. TEST SUMMARY .....</b>	<b>4</b>
<b>3. TEST SITE.....</b>	<b>5</b>
3.1. TEST FACILITY .....	5
3.2. MEASUREMENT UNCERTAINTY .....	5
3.3. LIST OF TEST AND MEASUREMENT INSTRUMENTS .....	6
<b>4. EUT DESCRIPTION .....</b>	<b>7</b>
<b>5. TEST METHODOLOGY .....</b>	<b>8</b>
5.1. TEST MODE .....	8
5.2. EUT SYSTEM OPERATION .....	8
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>9</b>
6.1. DESCRIPTION OF SUPPORT UNITS .....	9
6.2. CONFIGURATION OF SYSTEM UNDER TEST .....	9
<b>7. CONDUCTED EMISSION MEASUREMENT .....</b>	<b>10</b>
7.1. LIMITS .....	10
7.2. TEST PROCEDURES.....	10
7.3. TEST SETUP.....	11
7.4. TEST RESULT .....	11
<b>8. RADIATED EMISSION MEASUREMENT .....</b>	<b>14</b>
8.1. LIMITS .....	14
8.2. TEST PROCEDURE .....	14
8.3. TEST SETUP.....	15
8.4. TEST RESULT .....	15
<b>9. PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>20</b>
<b>10. PHOTOGRAPHS OF EUT.....</b>	<b>21</b>
<b>11. LABELING REQUIREMENTS.....</b>	<b>28</b>
<b>12. INFORMATION TO USER.....</b>	<b>29</b>



## 1. TEST CERTIFICATION

Product:	Photocell timer - Dusk to Dawn 8 6 4 2 countdown 3 Grounded outlets With 7 button remote
Model:	NOA0039R, 79792
Applicant :	Jasco Products Company LLC
Address:	10 e memorial road Office oklahoma city, OK 73114
Manufacturer:	QUANGDONG VUHAO ELECTRONICS CO LTD
Address:	TOAN MY VILLAGE, VOI TOWN, LANG GIANG DISTRICT, BAC GIANG PROVINCE, VIET NAM
Test Date:	July 26, 2023to July 31, 2023
Issued Date:	August 28, 2023
Test Voltage:	AC 125V/60Hz
Applicable Standards:	FCC Part 15, Subpart B Class B ANSI C63.4:2014

The above equipment has been tested by Precise Testing & Certification Co., Ltd. and found compliance with the requirements in the technical standards mentioned above. The test results presented in this report only relate to the product/system tested. The Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Test Engineer:

A handwritten signature in black ink that reads "Simon Pu".

Simon Pu/ Engineer

Technical Manager:

A handwritten signature in black ink that reads "Ronnie Liu".

Ronnie Liu/ Manager



## 2. TEST SUMMARY

EMISSION			
Standard	Item	Result	Remarks
FCC 47 CFR Part 15 Class B	Conducted Emission (Main Port)	PASS	Complied with limit
	Radiated Emission	PASS	Complied with limit

Note: 1) The test result verdict is decided by the limit of test standard.

2) The information of measurement uncertainty is available upon the customer's request.



### 3. TEST SITE

#### 3.1. TEST FACILITY

Precise Testing & Certification Co., Ltd.

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China.

☆ CNAS Registration No.: CNAS L5772

☆ FCC Registration No.: 790290

☆ A2LA Certificate No.: 4408.01

☆ IC Registration No.: 12191A

#### 3.2. MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
Temperature	$\pm 1^{\circ} \text{C}$
Humidity	$\pm 5\%$
DC and Low Frequency Voltages	$\pm 3\%$
Conducted Emission(150KHz-30MHz)	$\pm 3.60\text{dB}$
Radiated Emission(30MHz-1GHz)	$\pm 4.76\text{dB}$
Radiated Emission (1GHz-18GHz)	$\pm 4.44\text{dB}$

Note 1: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



### 3.3. LIST OF TEST AND MEASUREMENT INSTRUMENTS

#### 3.3.1. For conducted emission at the mains terminals test

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Aug 21, 2023
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	Aug 21, 2023
ISN	SCHWARZBECK	NTFM8131	00257	Aug 21, 2023
Test S/W	Tonscend	JS32-CE/4.0.0.3		

#### 3.3.2. For radiated emission test (30MHz-1GHz)

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Aug 21, 2023
Bilog Antenna	SCHWARZBECK	VULB 9160	9160-3355	Aug 21, 2023
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	Aug 21, 2023
Test S/W	Tonscend	JS32-RE/4.0.0.0		

#### 3.3.3. For radiated emission test (1GHz above)

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Aug 21, 2023
Spectrum Analyzer	Agilent	E4407B	MY45109572	Aug 21, 2023
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	Aug 21, 2023
High NOISE AMPLIFIER	ZHINAN	ZN3380C	15002	Aug 21, 2023
Test S/W	Tonscend	JS32-RE/4.0.0.0		



## 4. EUT DESCRIPTION

<b>Product</b>	Photocell timer - Dusk to Dawn 8 6 4 2 countdown 3 Grounded outlets With 7 button remote
<b>Model</b>	NOA0039R, 79792
<b>Supplied Voltage</b>	AC 125V/60Hz
<b>Power</b>	N/A
<b>Antenna Gain</b>	0 dBi
<b>Operating frequency</b>	433.92MHz(RX)

### I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
AC Port	1	<input checked="" type="checkbox"/>
DC Port	1	<input type="checkbox"/>

### Models Difference

Different model names.



## 5. TEST METHODOLOGY

### 5.1. TEST MODE

The EUT was tested together with the thereafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were assessed.

Test Items		Test Mode
Emission	Conducted Emission	Working
	Radiated Emission	Working

### 5.2. EUT SYSTEM OPERATION

1. Set up EUT with the support equipment.
2. Make sure the EUT work normally during the test.





## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1. DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model	Serial No.	Trade Name
1.	N/A	N/A	N/A	N/A

Note: 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 6.2. CONFIGURATION OF SYSTEM UNDER TEST



(EUT: Photocell timer - Dusk to Dawn 8 6 4 2 countdown 3 Grounded outlets With 7 button remote)

## 7. CONDUCTED EMISSION MEASUREMENT

### 7.1. LIMITS

FREQUENCY (MHz)	Class A		Class B	
	Quasi-peak dB( $\mu$ V)	Average dB( $\mu$ V)	Quasi-peak dB( $\mu$ V)	Average dB( $\mu$ V)
0.15 - 0.5	79	66	66-56	56-46
0.5 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: 1) The lower limit shall apply at the transition frequencies.

2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 7.2. TEST PROCEDURES


The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane. When the EUT is floor standing equipment, it is placed on the ground plane, which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane. The EUT should be 0.8 m apart from the AMN, where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, Details please refer to test setup photography.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes. During the above scans, the emissions were maximized by cable manipulation.

A scan was taken on both of the power lines, Line and neutral, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded.

Note: Test Software Name: e3, Software Version: 1.0.0.0.

### 7.3. TEST SETUP

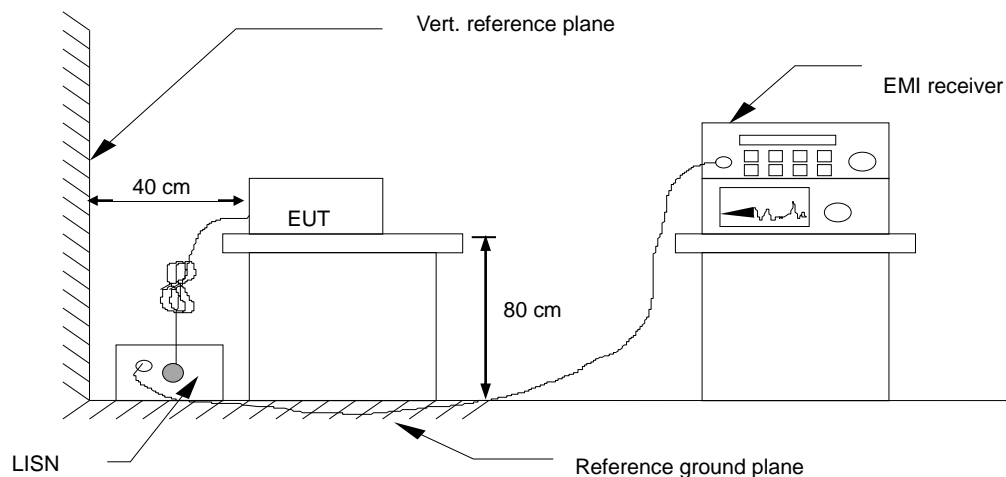

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 7.4. TEST RESULT

<b>Product name</b>	Photocell timer - Dusk to Dawn 8 6 4 2 countdown 3 Grounded outlets With 7 button remote	<b>Tested By</b>	MING ZHI
<b>Model</b>	NOA0039R	<b>Detector Function</b>	Peak / Quasi-peak/AV
<b>Test Mode</b>	Working	<b>6 dB Bandwidth</b>	9 kHz
<b>Environmental Conditions</b>	25.0°C, 60 % RH, 101.2 kPa	<b>Test Result</b>	Pass

Note:

L = Line Line, N = Neutral Line

Freq. = Emission frequency in MHz

Reading level (dB $\mu$ V) = Receiver reading

Corr. Factor (dB) = attenuator + Cable loss

Level (dB $\mu$ V) = Reading level (dB $\mu$ V) + Corr. Factor (dB)

Limit (dB $\mu$ V) = Limit stated in standard


Over Limit (dB) = Level (dB $\mu$ V) – Limit (dB $\mu$ V)

QP = Quasi-Peak

AV = Average

Please refer to the following diagram:


Line:

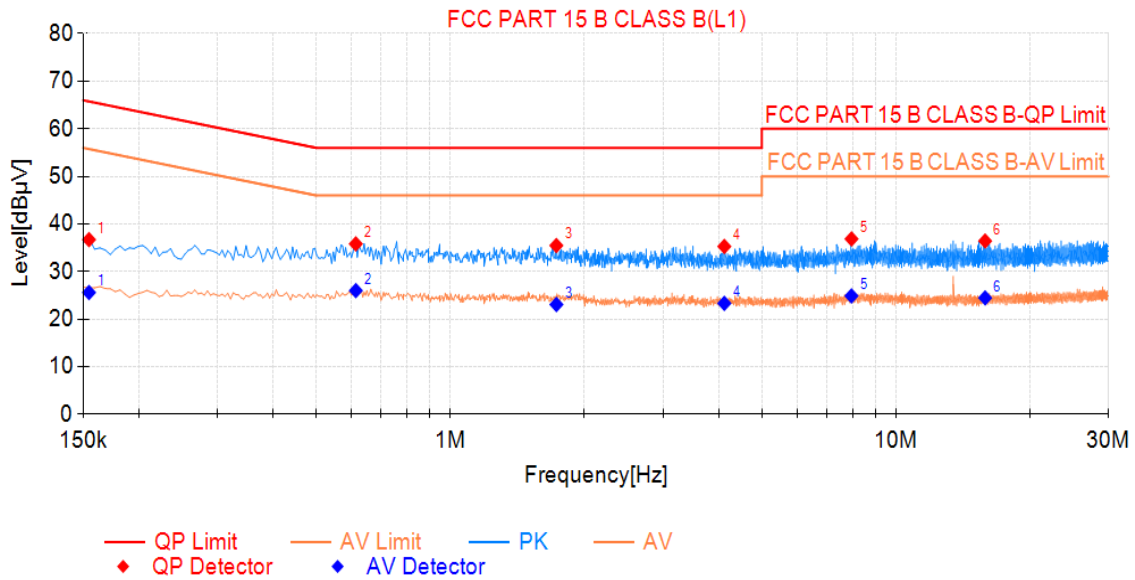

Final Data List								
NO.	Freq. [MHz]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.155	36.72	65.75	29.03	25.60	55.75	30.15	PASS
2	0.614	35.82	56.00	20.18	26.01	46.00	19.99	PASS
3	1.730	35.48	56.00	20.52	23.08	46.00	22.92	PASS
4	4.119	35.29	56.00	20.71	23.33	46.00	22.67	PASS
5	7.949	36.86	60.00	23.14	24.89	50.00	25.11	PASS
6	15.855	36.43	60.00	23.57	24.47	50.00	25.53	PASS

Note:QP Margin[dB]=QP Limit[dBμV]- QP Value[dBμV], AV Margin[dB]=AV Limit[dBμV]- AV Value[dBμV].

Neutral:

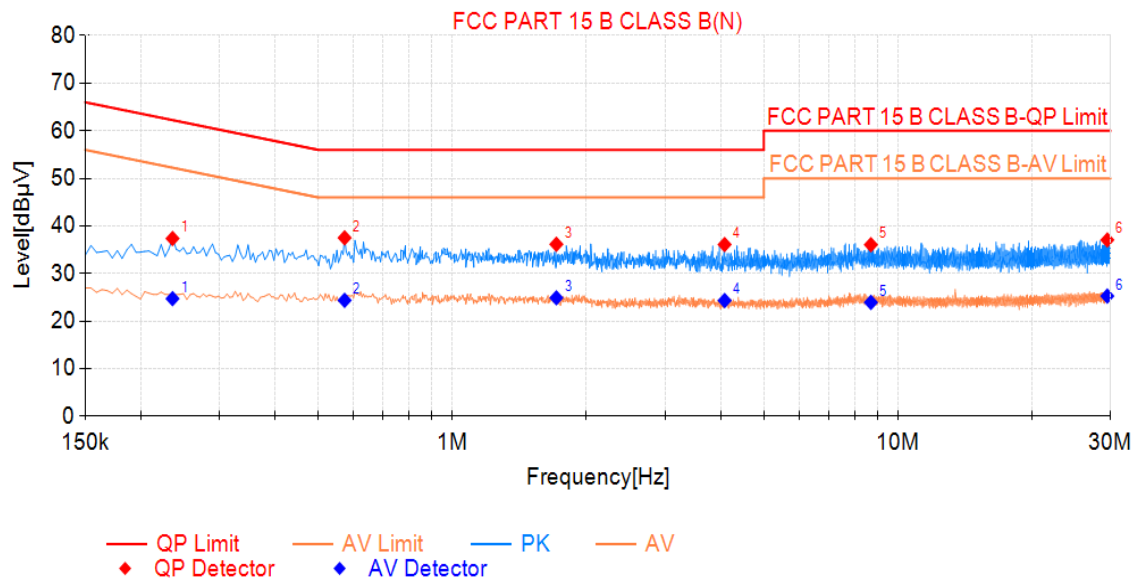

Final Data List								
NO.	Freq. [MHz]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.236	37.38	62.25	24.87	24.73	52.25	27.52	PASS
2	0.573	37.51	56.00	18.49	24.38	46.00	21.62	PASS
3	1.712	36.16	56.00	19.84	24.91	46.00	21.09	PASS
4	4.083	36.11	56.00	19.89	24.34	46.00	21.66	PASS
5	8.696	36.07	60.00	23.93	23.95	50.00	26.05	PASS
6	29.508	37.07	60.00	22.93	25.28	50.00	24.72	PASS

Note:QP Margin[dB]= QP Limit[dBμV]- QP Value[dBμV], AV Margin[dB]= AV Limit[dBμV]- AV Value[dBμV].



## 8. RADIATED EMISSION MEASUREMENT

### 8.1. LIMITS

Maximum permissible level of Radiated Emission measured at 3 meter distance.

FREQUENCY (MHz)	dB $\mu$ V/m (At 3m)	
	Class A digital device	Class B digital device
30~88	49.00	40.00
88~216	53.50	43.50
216~960	56.40	46.00
960~1000	59.50	54.00

Note: 1) The lower limit shall apply at the transition frequencies.

2) Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).

### 8.2. TEST PROCEDURE

The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is floor standing equipment, it is placed on the ground plane which has a 0.1 m non-conductive covering to insulate the EUT from the ground plane.

The antenna was placed at 3 meter away from the EUT. The antenna connected to the spectrum analyzer via a cable and at times a pre-amplifier would be used.


The analyzer / receiver quickly scanned from 30 MHz to 1000 MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

During the above scans, the emissions were maximized by cable manipulation. Each modes is measured, recorded at least the six highest emissions. The emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

The test data of the worst-case condition(s) was recorded.

Note: Test Software Name: e3, Software Version: 8.2.1.0.

### 8.3. TEST SETUP

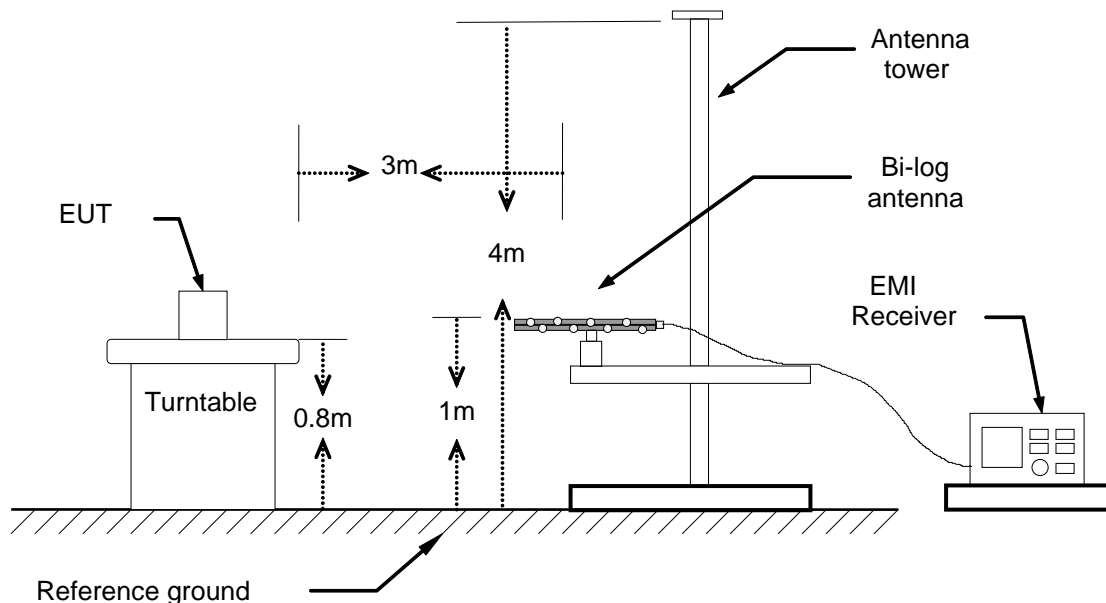

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

### 8.4. TEST RESULT

<b>Product name</b>	Photocell timer - Dusk to Dawn 8 6 4 2 countdown 3 Grounded outlets With 7 button remote	<b>Antenna Distance</b>	3 m
<b>Model</b>	NOA0039R	<b>Antenna Pole</b>	Vertical / Horizontal
<b>Test Mode</b>	Working	<b>Detector Function</b>	Peak / Quasi-peak
<b>Environmental Conditions</b>	25°C, 60 % RH, 101.3 kPa	<b>6 dB Bandwidth</b>	120 kHz
<b>Tested by</b>	Lu	<b>Test Result</b>	Pass

Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading(dBμV)

Corr.Factor (dB/m)=Antenna factor(dB/m)+Cable loss(dB)-Preamp Factor(dB)

Measurement (dBμV/m)=Reading level(dBμV)+ Corr. Factor (dB/m)

Limit (dBμV/m) = Limit stated in standard

Over Limit (dB) = Measurement (dBμV/m) – Limit (dBμV/m)


QP = Quasi-Peak

The highest frequency of the internal sources of the EUT was less than 108 MHz, so the measurement was only made up to 1 GHz.



Please refer to the following diagram:


Vertical:

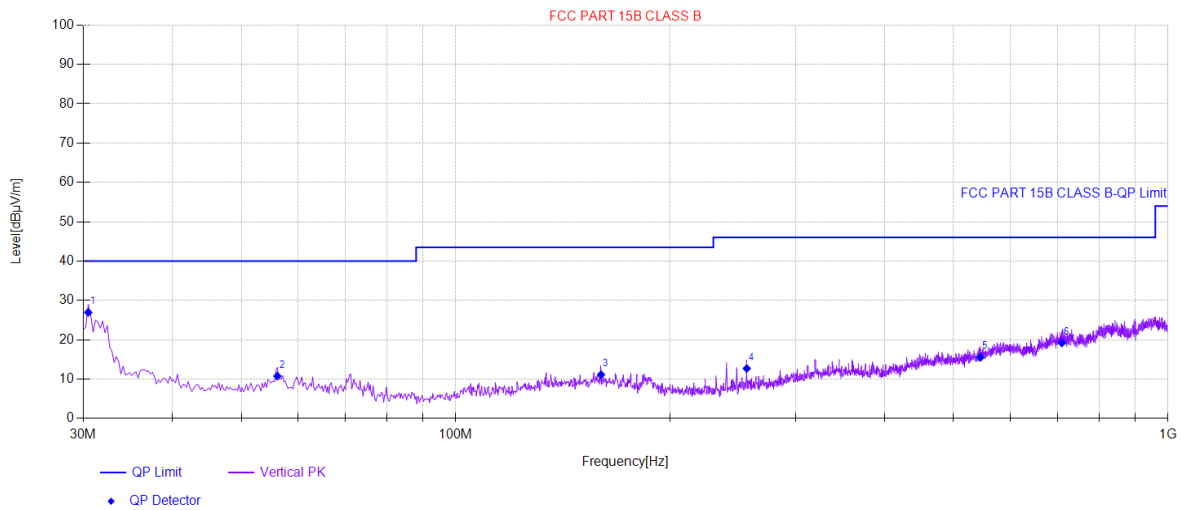

Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	30.49	45.28	-18.32	26.96	40.00	13.04	Vertical	PASS
2	56.19	28.7	-17.93	10.77	40.00	29.23	Vertical	PASS
3	159.98	26.99	-15.85	11.14	43.50	32.36	Vertical	PASS
4	256.25	29.52	-16.80	12.72	46.00	33.28	Vertical	PASS
5	545.31	25.01	-9.49	15.52	46.00	30.48	Vertical	PASS
6	709.49	25.58	-6.38	19.20	46.00	26.80	Vertical	PASS



Horizontal:

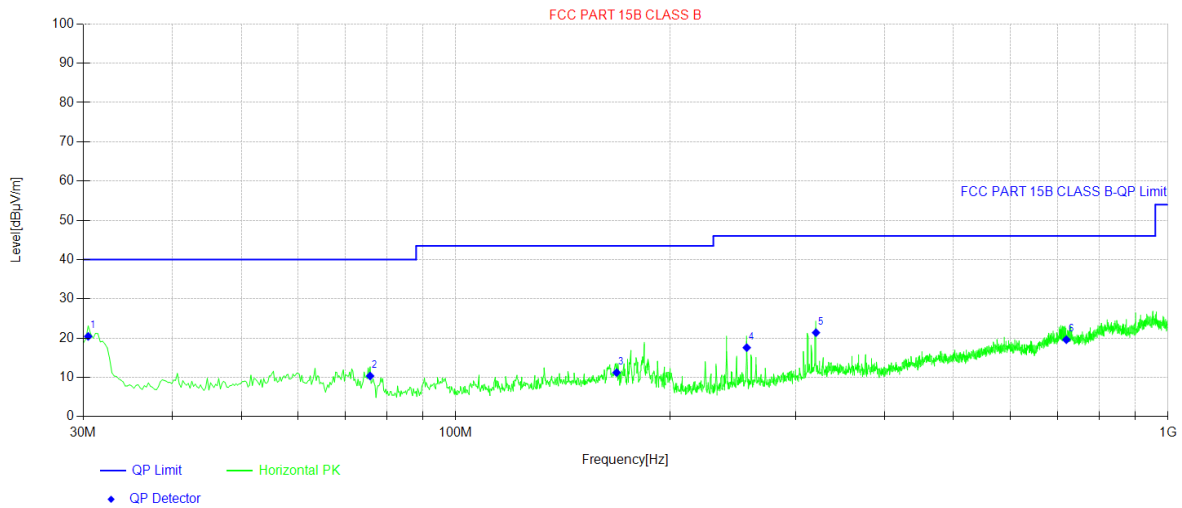


Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	30.49	38.76	-18.32	20.44	40.00	19.56	Horizontal	PASS
2	75.83	31.13	-20.77	10.36	40.00	29.64	Horizontal	PASS
3	168.23	27.4	-16.17	11.23	43.50	32.27	Horizontal	PASS
4	256.25	34.38	-16.80	17.58	46.00	28.42	Horizontal	PASS
5	320.52	36.24	-14.85	21.39	46.00	24.61	Horizontal	PASS
6	719.91	25.83	-6.23	19.60	46.00	26.40	Horizontal	PASS

Note: QP Value[dBμV/m]=QP Reading[dBμV/m]+ Factor[dB], QP Margin[dB]= QP Limit[dBμV/m]-QP Value[dBμV/m].



Please refer to the following diagram:

Vertical:

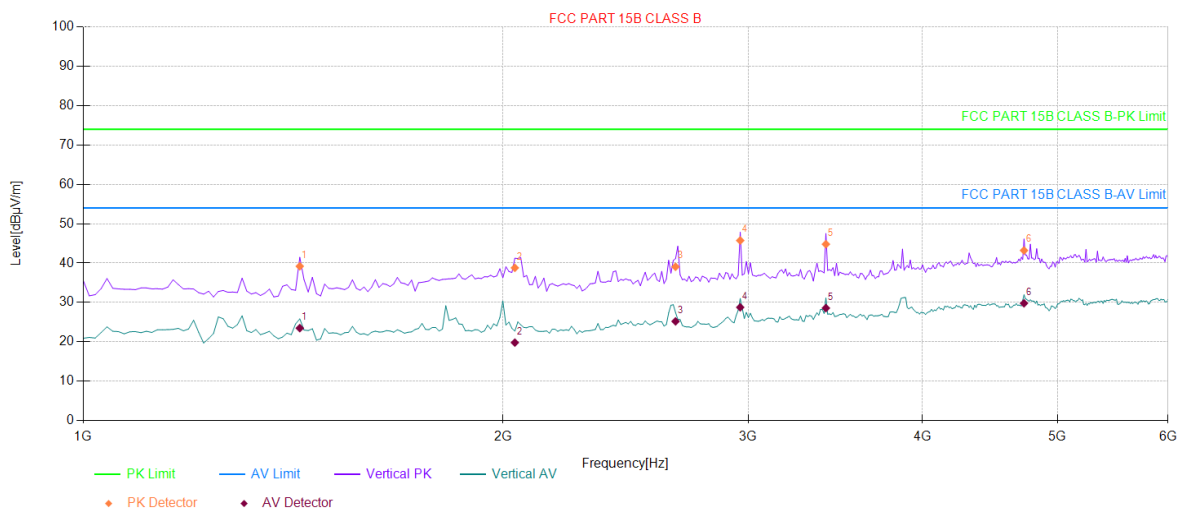


PK Final Data List										
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	Detector	Height [cm]	Angle [°]	Polarity	Verdict
1	1430.0	-2.83	39.20	74.00	34.80	Peak	100	174	Vertical	PASS
2	2040.0	-2.92	38.80	74.00	35.20	Peak	100	204	Vertical	PASS
3	2660.0	-0.04	39.07	74.00	34.93	Peak	100	349	Vertical	PASS
4	2960.0	0.91	45.75	74.00	28.25	Peak	100	146	Vertical	PASS
5	3410.0	1.77	44.80	74.00	29.20	Peak	100	64	Vertical	PASS
6	4730.0	5.58	43.22	74.00	30.78	Peak	100	51	Vertical	PASS

AV Final Data List										
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Detector	Height [cm]	Angle [°]	Polarity	Verdict
1	1430.0	-2.83	23.48	54.00	30.52	AV	100	174	Vertical	PASS
2	2040.0	-2.92	19.79	54.00	34.21	AV	100	204	Vertical	PASS
3	2660.0	-0.04	25.19	54.00	28.81	AV	100	349	Vertical	PASS
4	2960.0	0.91	28.76	54.00	25.24	AV	100	146	Vertical	PASS
5	3410.0	1.77	28.57	54.00	25.43	AV	100	64	Vertical	PASS
6	4730.0	5.58	29.79	54.00	24.21	AV	100	51	Vertical	PASS



Horizontal:

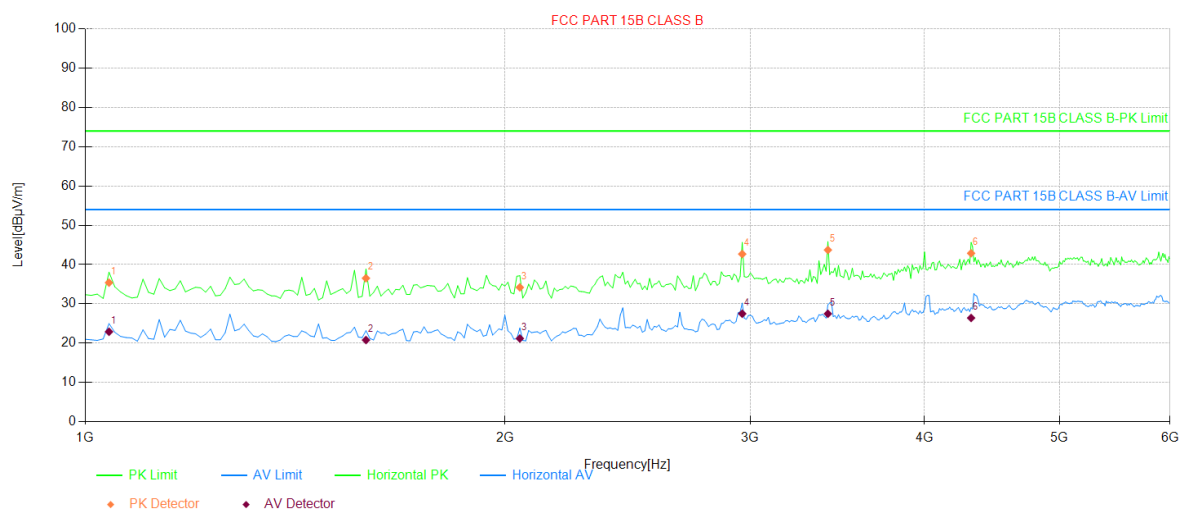

PK Final Data List										
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	Detector	Height [cm]	Angle [°]	Polarity	Verdict
1	1040.0	-2.86	35.40	74.00	38.60	Peak	100	325	Horizontal	PASS
2	1590.0	-3.30	36.53	74.00	37.47	Peak	100	336	Horizontal	PASS
3	2050.0	-2.87	34.20	74.00	39.80	Peak	100	303	Horizontal	PASS
4	2960.0	0.91	42.69	74.00	31.31	Peak	100	138	Horizontal	PASS
5	3410.0	1.77	43.72	74.00	30.28	Peak	100	357	Horizontal	PASS
6	4320.0	4.38	42.88	74.00	31.12	Peak	100	265	Horizontal	PASS

AV Final Data List										
NO.	Freq. [MHz]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Detector	Height [cm]	Angle [°]	Polarity	Verdict
1	1040.0	-2.86	22.90	54.00	31.10	AV	100	325	Horizontal	PASS
2	1590.0	-3.30	20.79	54.00	33.21	AV	100	336	Horizontal	PASS
3	2050.0	-2.87	21.18	54.00	32.82	AV	100	303	Horizontal	PASS
4	2960.0	0.91	27.50	54.00	26.50	AV	100	138	Horizontal	PASS
5	3410.0	1.77	27.48	54.00	26.52	AV	100	357	Horizontal	PASS
6	4320.0	4.38	26.41	54.00	27.59	AV	100	265	Horizontal	PASS


## 9. PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST



### RADIATED EMISSION TEST

From 30MHz-1000MHz

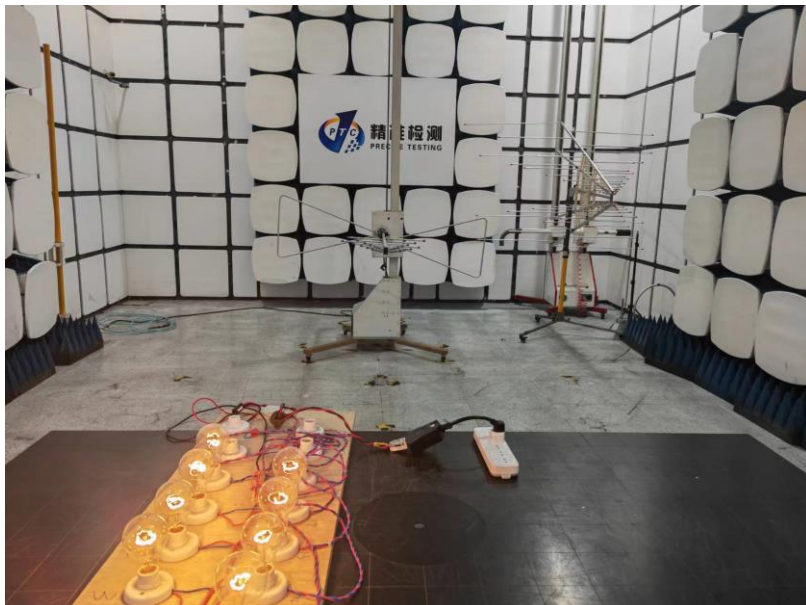


### Test frequency from 1GHz






## 10. PHOTOGRAPHS OF EUT





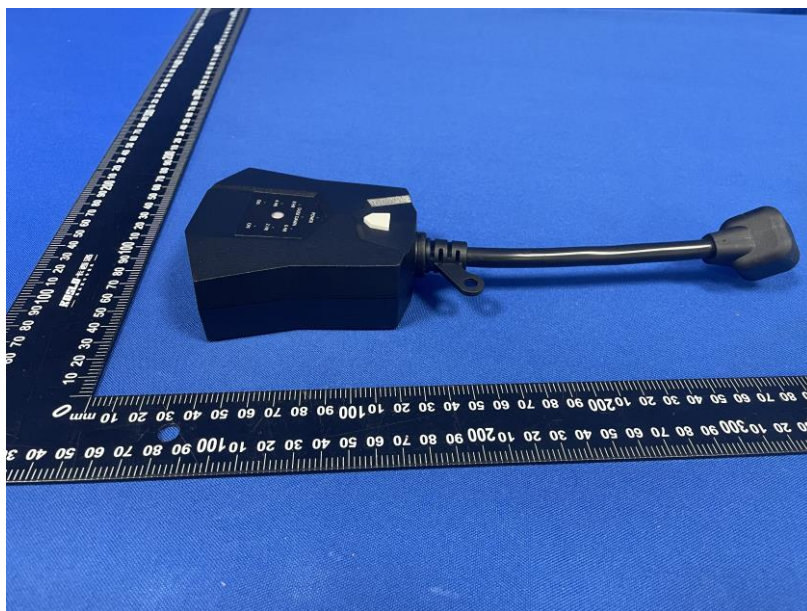




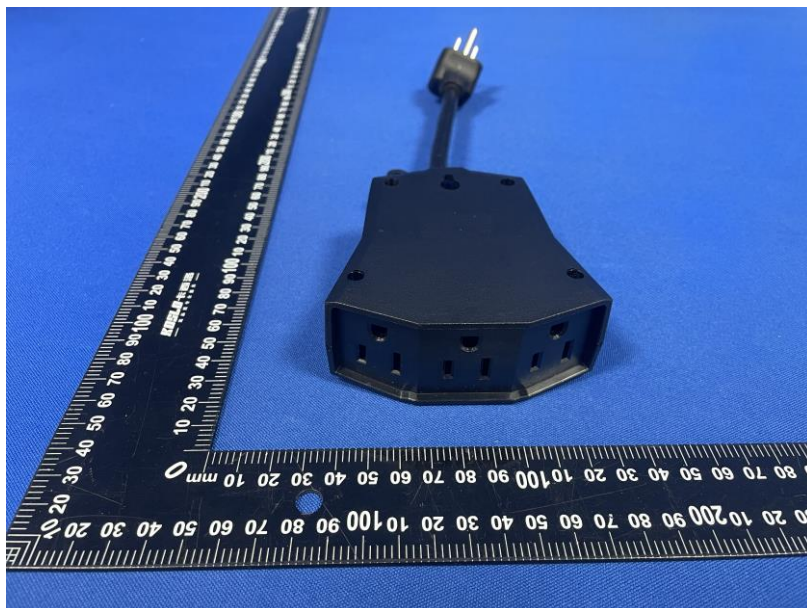




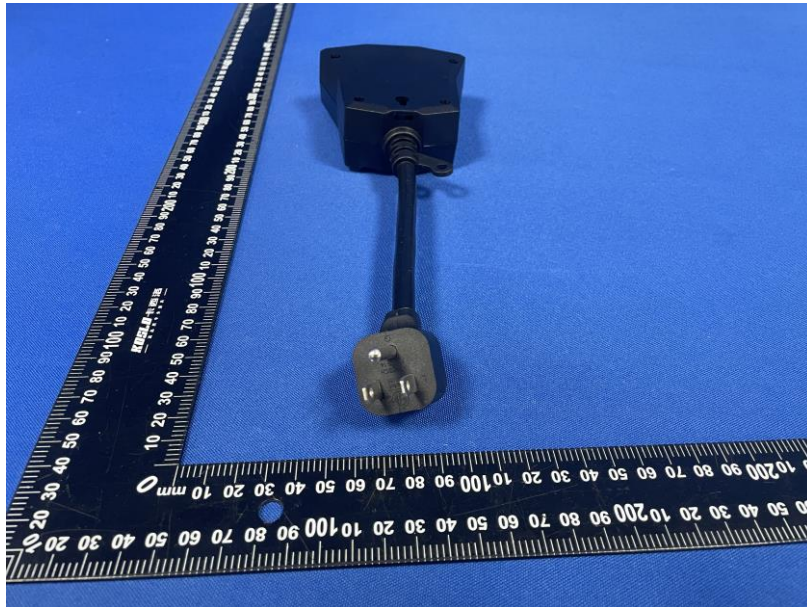

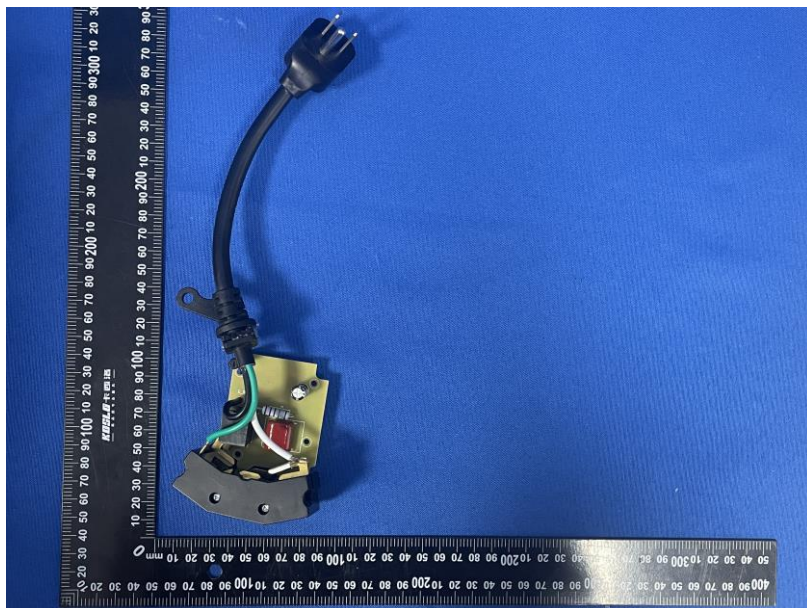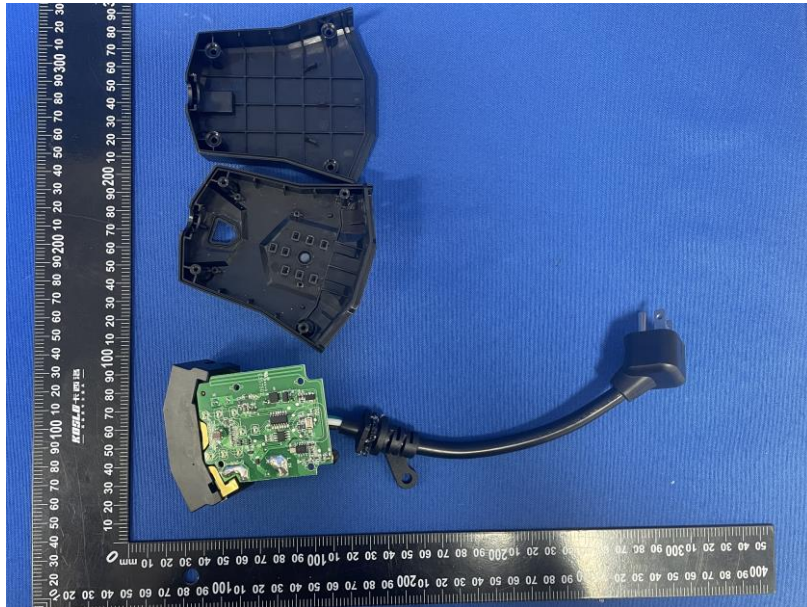



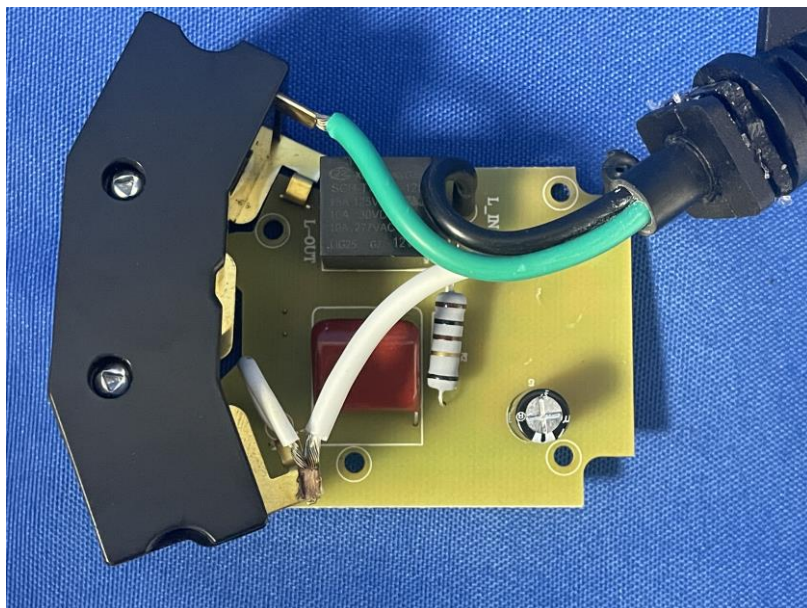



## 11. LABELING REQUIREMENTS

According to FCC Part 15 Section 15.19, a device subject to certification or Supplier's Declaration of Conformity shall be labelled as follows:

**“This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.”**

The device shall bear the statement in a conspicuous location on the device.

Devices subject to authorization under Supplier's Declaration of Conformity may be labeled with the FCC logo on a voluntary basis as a visual indication that the product complies with the applicable FCC requirements.

Note: The Commission concluded that if the labeling and regulatory information cannot be displayed to the intended recipient “in a manner that effects its purpose,” the device is incapable of digitally displaying the required information as required by the E-LABEL Act. Electronic labeling information must be electronically displayed in a manner that is “clearly legible without the aid of magnification” Similarly, because electronic labels cannot be easily removed or replaced if they are to be effective, manufacturers that choose to display required labeling information electronically must ensure that the information may not be removed or modified by anyone other than the responsible party.



## 12. INFORMATION TO USER

If a product must be tested and authorized under Supplier's Declaration of Conformity, a compliance information statement shall be supplied with product at the time of marketing or importation, containing the following information:

- (1) Identification of the product, e.g., name and model number;
- (2) A compliance statement as applicable, e.g., for devices subject to part 15 of this chapter as specified in 15.19(a)(3) of this chapter, that the product complies with the rules; and
- (3) The identification, by name, address and telephone number or Internet contact information, of the responsible party. The responsible party for Supplier's Declaration of Conformity must be located within the United States.

According to FCC Part 15 section 15.21, the users manual or instruction manual for an intentional or unintentional radiator shall caution the user that:

**"Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment".**

Also, refer to FCC Part 15 section 15.105, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

**"Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:**

- Reorient or relocate the receiving antenna.**
- Increase the separation between the equipment and receiver.**
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.**
- Consult the dealer or an experienced radio/TV technician for help."**

**\*\*\*\*\*THE END REPORT\*\*\*\*\***