



FCC RADIO TEST REPORT

FCC ID : MCL951993
Equipment : LTE Module
Brand Name : Foxconn
Model Name : 95.1993T01
Marketing Name : 95.1993T01
Applicant : Hon Hai Precision Ind. Co., Ltd.
5F-1, 5 Hsin-An Road, Hsinchu,
Science-Based Industrial Park, Taiwan
Manufacturer : Hon Hai Precision Ind. Co., Ltd.
5F-1, 5 Hsin-An Road, Hsinchu,
Science-Based Industrial Park, Taiwan
Standard : 47 CFR Part 2, 24(E), 27

The product was received on May 11, 2018 and testing was started from May 29, 2018 and completed on Jun. 02, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System.....	8
2.3 Support Unit used in test configuration and system	8
2.4 Measurement Results Explanation Example.....	8
2.5 Frequency List of Low/Middle/High Channels	9
3 Conducted Test Items.....	10
3.1 Measuring Instruments	10
3.2 Conducted Output Power and ERP/EIRP	11
3.3 Peak-to-Average Ratio	12
3.4 Occupied Bandwidth.....	13
3.5 Conducted Band Edge	14
3.6 Conducted Spurious Emission	15
3.7 Frequency Stability	16
4 Radiated Test Items	17
4.1 Measuring Instruments	17
4.2 Radiated Spurious Emission	18
5 List of Measuring Equipment.....	19
6 Uncertainty of Evaluation.....	21
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of EIRP and Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG851104	01	Initial issue of report	Jun. 13, 2018

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046 §27.50 (h)(2)	Conducted Output Power (Band 41)	Pass	-
	§24.232 (c)	Equivalent Isotropic Radiated Power (Band 25)	Pass	
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §24.238 (a)	Conducted Band Edge Measurement (Band 25)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (Band 41)		
3.6	§2.1051 §24.238 (a)	Conducted Spurious Emission (Band 25)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (Band 41)		
3.7	§2.1055 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §24.238 (a)	Radiated Spurious Emission (Band 25)	Pass	Under limit 11.12 dB at 8040.000 MHz
	§2.1053 §27.53 (m)(4)	Radiated Spurious Emission (Band 41)		

Reviewed by: Joseph Lin

Report Producer: Wii Chang



1 General Description

1.1 Product Feature of Equipment Under Test

LTE

Product Specification subjective to this standard	
Antenna Type	WWAN: <Ant. 1>: Patch Antenna <Ant. 2>: Patch Antenna <Ant. 3>: Patch Antenna <Ant. 4>: Patch Antenna

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 24(E), 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168

D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	25			v	v	v	v	v	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	25						v	v	v	v	v		v	v	v	v
	41	-	-				v	v	v	v	v		v	v	v	v
26dB and 99% Bandwidth	25			v	v	v	v	v	v	v			v	v	v	v
	41	-	-	v	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	25			v	v	v	v	v	v	v	v		v	v		v
	41	-	-	v	v	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	25			v	v	v	v	v	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v	v			v	v	v
Frequency Stability	25				v			v					v		v	
	41	-	-		v			v					v		v	
E.R.P / E.I.R.P	25			v	v	v	v	v	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	25	Worst Case												v	v	v
	41	Worst Case												v	v	v
Remark	1. The mark “v” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.															

2.2 Connection Diagram of Test System

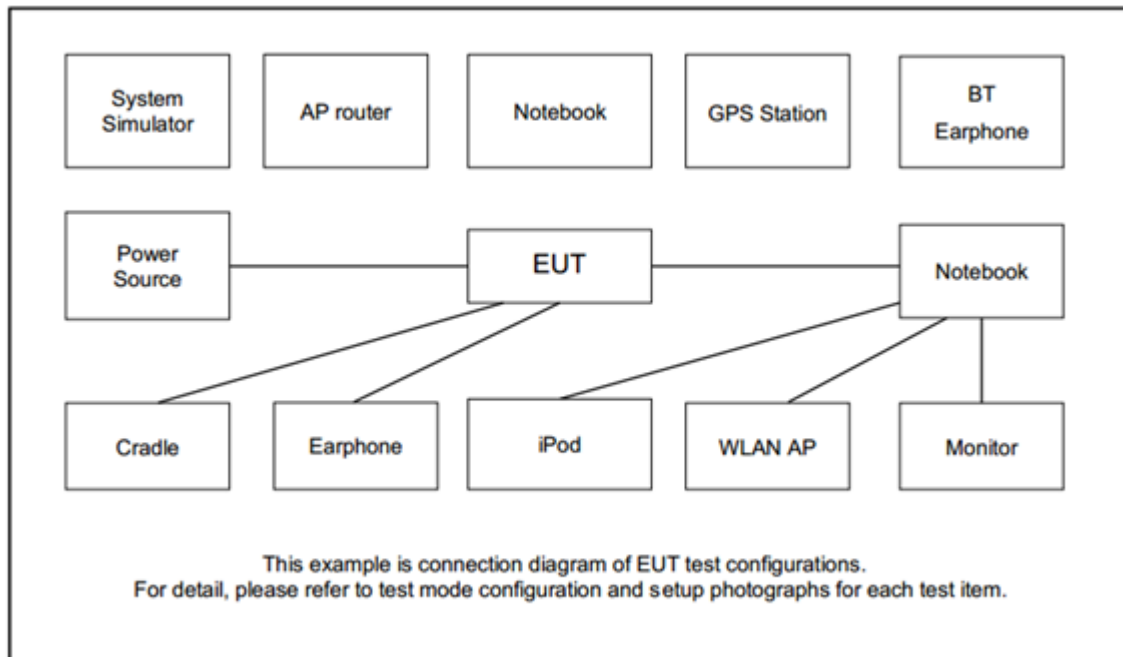

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	Base Station	R&S	CMW500	N/A	N/A	Unshielded, 1.8 m
4.	Fixture	Foxconn	N/A	N/A	N/A	N/A
5.	Adapter	Ktec	KSA-40A-050800HU	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	26140	26340	26590
	Frequency	1860	1880	1905
15	Channel	26115	26340	26615
	Frequency	1857.5	1880	1907.5
10	Channel	26090	26340	26640
	Frequency	1855	1880	1910
5	Channel	26065	26340	26665
	Frequency	1852.5	1880	1912.5

LTE Band 41 Low Band Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	39750	40010	40270
	Frequency	2506.0	2532.0	2558.0
15	Channel	39725	40010	40295
	Frequency	2503.5	2532.0	2560.5
10	Channel	39700	40010	40320
	Frequency	2501.0	2532.0	2563.0
5	Channel	39675	40010	40345
	Frequency	2498.5	2532.0	2565.5

LTE Band 41 High Band Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	40970	41230	41490
	Frequency	2628.0	2654.0	2680.0
15	Channel	40945	41230	41515
	Frequency	2625.5	2654.0	2682.5
10	Channel	40920	41230	41540
	Frequency	2623.0	2654.0	2685.0
5	Channel	40895	41230	41565
	Frequency	2620.5	2654.0	2687.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

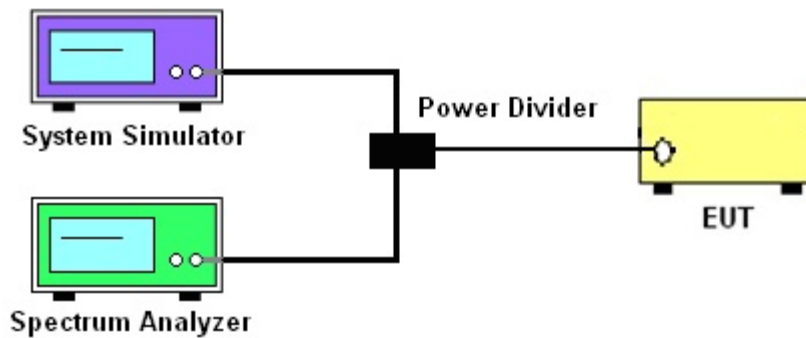

3.1.4 Frequency Stability

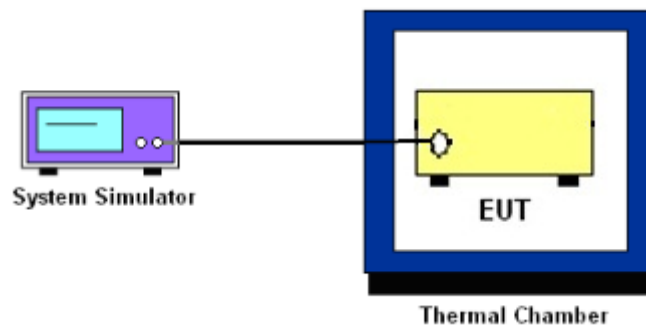

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for Band 25 and Band 41.

All user stations are limited to 2.0 watts transmitter output power for LTE band 41.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

Note: The device is other user station then the EIRP test data for LTE Band 41 in this report is reporting only.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.7.1

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 4.2

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

For MIMO mode, the test is following KDB 662911 D01 "Measure and add $10\log(\text{Nant})$ " method and the additional of $10\log(\text{Nant})$ factor has offset to the spectrum analyzer.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.
The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power $P(\text{Watts})$
8. For LTE Band 41, the other 40 dB, and 55 dB have additionally applied same calculation above.

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

For MIMO mode, the test is following KDB 662911 D01 "Measure and add $10\log(Nant)$ " method and the additional of $10\log(Nant)$ factor has offset to the spectrum analyzer.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
10. For Band 41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup

For radiated test from 30MHz to 1GHz

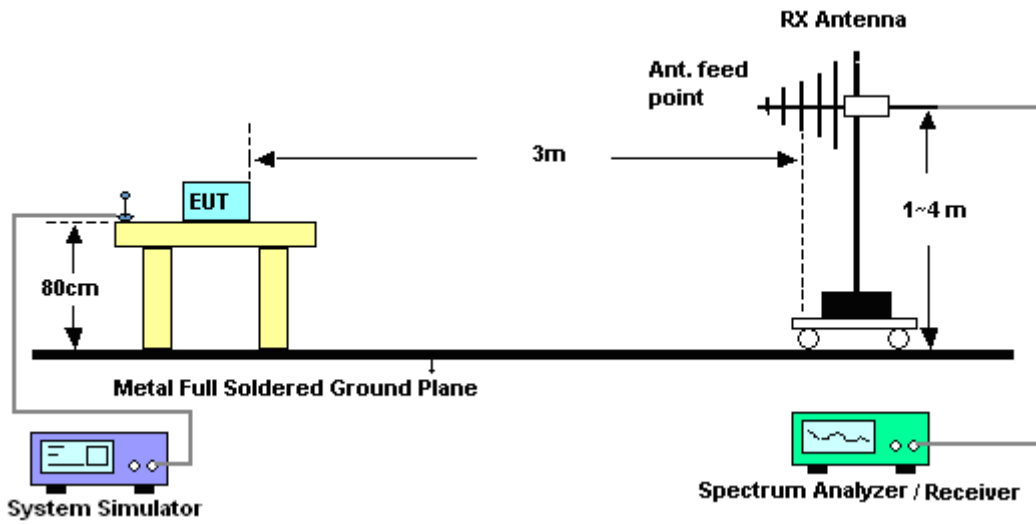

For radiated test above 1GHz

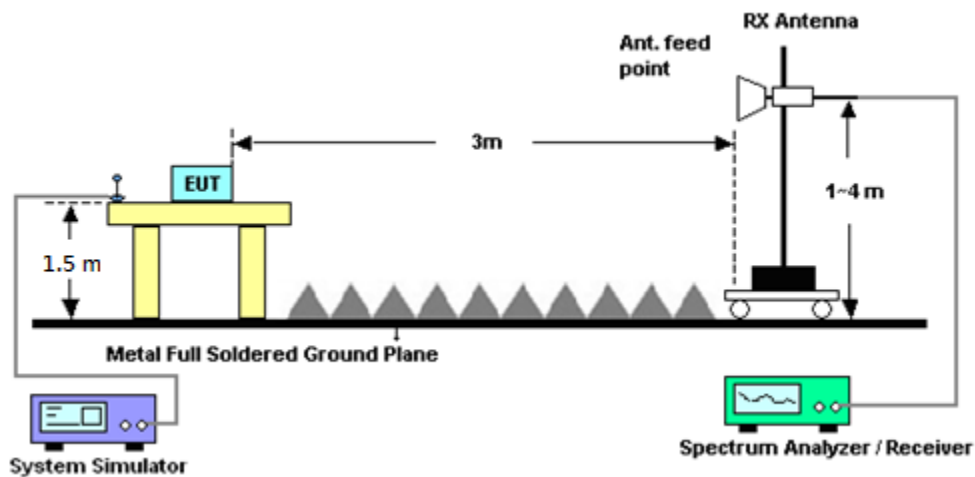

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

4.2 Radiated Spurious Emission

4.2.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

11. For Band 41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

ERP (dBm) = EIRP - 2.15



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LTE Base Station	Anritsu	MT8820C	6201432821	GSM/GPRS /WCDMA/LTE	Oct. 13, 2017	May 29, 2018~ Jun. 04, 2018	Oct. 12, 2018	Conducted (TH05-HY)
Base Station (Measure)	Rohde & Schwarz	CMW500	116160	MIMO/LTE(FDD TDD with 42 43) /WLAN /IP T-PUT / Volte	Mar. 22, 2017	May 29, 2018~ Jun. 04, 2018	Mar. 21, 2019	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 07, 2017	May 29, 2018~ Jun. 04, 2018	Nov. 06, 2018	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-30℃~70℃	Aug. 28, 2017	May 29, 2018~ Jun. 04, 2018	Aug. 27, 2018	Conducted (TH05-HY)
AC Power Source	AC POWER	AFC-500W	F104070011	50Hz~60Hz	Mar. 21, 2018	May 29, 2018~ Jun. 04, 2018	Mar. 20, 2019	Conducted (TH05-HY)
Coupler	Warison	1-18GHz 20dB 25WSMA	#B	1G~18GHz	Dec. 04, 2017	May 29, 2018~ Jun. 04, 2018	Dec. 03, 2018	Conducted (TH05-HY)
Power Divider	MTJ	2Way SMA Power Divider	MD10003	0.5GHz-6GHz	Dec. 04, 2017	May 29, 2018~ Jun. 04, 2018	Dec. 03, 2018	Conducted (TH05-HY)
Power Divider	Woken	2-8GHz 4Way SMA	0120A04056002D	N/A	Dec. 04, 2017	May 29, 2018~ Jun. 04, 2018	Dec. 03, 2018	Conducted (TH05-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35419&03	30MHz to 1GHz	Dec. 18, 2017	Jun. 01, 2018 ~ Jun. 02, 2018	Dec. 17, 2018	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 23, 2017	Jun. 01, 2018 ~ Jun. 02, 2018	Aug. 22, 2018	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 30, 2017	Jun. 01, 2018 ~ Jun. 02, 2018	Oct. 29, 2018	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Apr. 17, 2018	Jun. 01, 2018 ~ Jun. 02, 2018	Apr. 16, 2019	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Jun. 01, 2018 ~ Jun. 02, 2018	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF780208368	Control Ant Mast	N/A	Jun. 01, 2018 ~ Jun. 02, 2018	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Jun. 01, 2018 ~ Jun. 02, 2018	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jun. 01, 2018 ~ Jun. 02, 2018	N/A	Radiation (03CH07-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Jun. 01, 2018 ~ Jun. 02, 2018	Jul. 17, 2018	Radiation (03CH07-HY)
Amplifier	SONOMA	310N	187231	9kHz~1GHz	Jan. 08, 2018	Jun. 01, 2018 ~ Jun. 02, 2018	Jan. 07, 2019	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Agilent	N9038A (MXE)	MY532900 53	20Hz to 26.5GHz	Jan. 16, 2018	Jun. 01, 2018 ~ Jun. 02, 2018	Jan. 15, 2019	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 27, 2017	Jun. 01, 2018 ~ Jun. 02, 2018	Nov. 26, 2018	Radiation (03CH07-HY)
Horn Antenna	ESCO	3117	00066584	1GHz~18GHz	Sep. 06, 2017	Jun. 01, 2018 ~ Jun. 02, 2018	Sep. 05, 2018	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	N/A	N/A	N/A	Jun. 01, 2018 ~ Jun. 02, 2018	N/A	Radiation (03CH07-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Jan. 15, 2018	Jun. 01, 2018 ~ Jun. 02, 2018	Jan. 14, 2019	Radiation (03CH07-HY)

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.05
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.44
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.95
---	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

<For 1x1 Tx>

LTE Band 25 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.30	23.80	23.40
20	1	49		23.00	23.60	22.60
20	1	99		23.40	23.30	22.10
20	50	0		23.20	23.30	23.00
20	50	24		23.10	23.50	22.80
20	50	50		23.10	23.30	22.70
20	100	0		23.20	23.30	22.70
20	1	0	16-QAM	23.20	23.70	23.30
20	1	49		23.00	23.40	22.70
20	1	99		23.40	23.20	22.20
20	50	0		23.20	23.40	23.00
20	50	24		23.10	23.40	22.80
20	50	50		23.10	23.20	22.80
20	100	0		23.10	23.20	22.70
20	1	0	64-QAM	23.30	23.60	23.20
20	1	49		23.00	23.50	22.60
20	1	99		23.30	23.30	22.20
20	50	0		23.10	23.20	22.90
20	50	24		23.20	23.40	22.90
20	50	50		23.10	23.20	22.70
20	100	0		23.10	23.30	22.60
15	1	0	QPSK	23.20	23.50	23.20
15	1	37		23.00	23.80	22.50
15	1	74		23.10	23.20	22.10
15	36	0		23.10	23.40	22.90
15	36	20		23.10	23.60	22.80
15	36	39		22.90	23.30	22.70
15	75	0		23.00	23.30	22.90
15	1	0	16-QAM	23.00	23.40	23.20
15	1	37		23.00	23.70	22.50
15	1	74		23.00	23.20	22.00
15	36	0		23.10	23.40	22.70
15	36	20		23.20	23.50	22.80
15	36	39		23.00	23.30	22.60
15	75	0		23.10	23.30	22.80
15	1	0	64-QAM	23.10	23.40	23.10
15	1	37		23.00	23.50	22.40
15	1	74		23.00	23.20	22.00
15	36	0		23.00	23.40	22.80
15	36	20		23.10	23.50	22.70
15	36	39		22.90	23.30	22.60
15	75	0		23.00	23.30	22.90



LTE Band 25 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.80	23.30	22.70
10	1	25		22.80	23.40	22.50
10	1	49		23.20	23.20	21.70
10	25	0		23.10	23.20	22.60
10	25	12		23.10	23.50	22.70
10	25	25		23.10	23.20	22.50
10	50	0		23.00	23.40	22.60
10	1	0	16-QAM	22.80	23.10	22.70
10	1	25		22.80	23.30	22.40
10	1	49		23.20	23.10	21.60
10	25	0		23.10	23.20	22.70
10	25	12		23.10	23.40	22.70
10	25	25		23.10	23.20	22.50
10	50	0		22.70	23.40	22.70
10	1	0	64-QAM	22.80	23.30	22.40
10	1	25		23.20	23.20	21.80
10	1	49		23.10	23.10	22.50
10	25	0		23.00	23.10	22.60
10	25	12		23.10	23.50	22.50
10	25	25		23.10	23.20	22.60
10	50	0		22.80	23.30	22.60
5	1	0	QPSK	22.50	22.90	22.70
5	1	12		22.60	23.40	22.30
5	1	24		22.60	23.30	21.20
5	12	0		23.00	23.70	23.00
5	12	7		23.00	23.50	22.30
5	12	13		22.90	23.40	21.80
5	25	0		22.90	23.30	22.40
5	1	0	16-QAM	22.50	22.80	22.50
5	1	12		22.60	23.20	22.20
5	1	24		22.60	22.90	21.10
5	12	0		22.90	23.70	22.90
5	12	7		23.10	23.50	22.30
5	12	13		23.00	23.50	21.90
5	25	0		22.90	23.30	22.40
5	1	0	64-QAM	22.60	22.80	22.50
5	1	12		22.60	23.30	22.20
5	1	24		22.50	23.40	21.20
5	12	0		22.90	23.60	22.90
5	12	7		22.90	23.50	22.20
5	12	13		22.80	23.40	22.00
5	25	0		22.90	23.30	22.30

**<For 2x2 Tx>**

LTE Band 25 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	21.92	22.71	22.86
20	1	49		22.15	22.63	22.54
20	1	99		22.66	22.57	21.90
20	50	0		21.21	22.01	22.16
20	50	24		21.20	21.76	21.50
20	50	50		21.42	21.52	20.98
20	100	0		21.21	21.63	21.63
20	1	0	16-QAM	21.38	22.12	22.24
20	1	49		21.45	22.00	21.66
20	1	99		21.83	21.82	21.07
20	50	0		20.15	20.86	21.11
20	50	24		20.16	20.60	20.52
20	50	50		20.41	20.29	19.95
20	100	0		20.18	20.50	20.64
20	1	0	64-QAM	21.23	22.03	22.17
20	1	49		21.34	21.88	21.61
20	1	99		21.69	21.71	20.96
20	50	0		20.13	20.87	21.06
20	50	24		20.15	20.57	20.45
20	50	50		20.40	20.23	19.95
20	100	0		20.18	20.45	20.61
15	1	0	QPSK	22.77	22.88	22.96
15	1	37		22.72	22.87	22.25
15	1	74		22.83	22.72	21.91
15	36	0		21.63	21.76	21.55
15	36	20		21.60	21.87	21.64
15	36	39		21.36	21.81	21.69
15	75	0		21.53	21.71	21.68
15	1	0	16-QAM	22.18	22.32	22.21
15	1	37		21.87	22.35	21.67
15	1	74		21.89	22.12	21.12
15	36	0		20.51	20.85	20.52
15	36	20		20.60	20.96	20.50
15	36	39		20.35	20.57	20.63
15	75	0		20.53	20.66	20.62
15	1	0	64-QAM	22.07	22.19	22.05
15	1	37		21.71	22.28	21.52
15	1	74		21.82	21.97	20.96
15	36	0		20.49	20.82	20.49
15	36	20		20.58	21.01	20.49
15	36	39		20.32	20.55	20.61
15	75	0		20.51	20.79	20.61



LTE Band 25 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.14	22.79	22.51
10	1	25		21.93	22.48	22.44
10	1	49		22.42	22.61	21.88
10	25	0		20.91	21.57	21.26
10	25	12		20.97	21.51	21.56
10	25	25		20.93	21.44	21.48
10	50	0		20.87	21.50	21.40
10	1	0	16-QAM	21.44	22.05	21.83
10	1	25		21.27	21.90	21.60
10	1	49		21.67	21.91	21.11
10	25	0		19.94	20.57	20.15
10	25	12		20.01	20.55	20.48
10	25	25		19.92	20.21	20.37
10	50	0		19.98	20.50	20.32
10	1	0	64-QAM	21.30	21.99	21.67
10	1	25		21.17	21.75	21.50
10	1	49		21.58	21.77	20.99
10	25	0		19.95	20.53	20.11
10	25	12		19.97	20.50	20.46
10	25	25		19.88	20.22	20.39
10	50	0		19.94	20.45	20.29
5	1	0	QPSK	21.88	22.34	22.51
5	1	12		21.87	22.56	22.65
5	1	24		21.75	22.31	21.36
5	12	0		21.15	21.83	21.79
5	12	7		20.91	21.65	21.52
5	12	13		20.82	21.55	21.03
5	25	0		20.81	21.44	21.36
5	1	0	16-QAM	21.17	21.69	21.61
5	1	12		21.15	21.92	21.86
5	1	24		21.10	21.52	20.66
5	12	0		20.15	20.68	20.72
5	12	7		19.91	20.48	20.46
5	12	13		19.82	20.33	20.00
5	25	0		19.78	20.28	20.29
5	1	0	64-QAM	21.02	21.61	21.49
5	1	12		21.04	21.83	21.80
5	1	24		20.93	21.42	20.56
5	12	0		20.14	20.69	20.68
5	12	7		19.90	20.46	20.39
5	12	13		19.82	20.28	20.00
5	25	0		19.73	20.23	20.27



<For 1x1 Tx Low Band>

LTE Band 41 Low Band Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	21.80	22.60	22.30
20	1	49		22.20	22.30	22.50
20	1	99		22.50	22.80	22.40
20	50	0		22.30	22.40	22.70
20	50	24		22.50	22.60	22.60
20	50	50		22.40	22.60	22.50
20	100	0		22.50	22.40	22.60
20	1	0	16-QAM	21.80	22.80	22.50
20	1	49		22.20	22.30	22.40
20	1	99		22.30	22.90	22.40
20	50	0		22.30	22.60	22.40
20	50	24		22.50	22.70	22.40
20	50	50		22.40	22.60	22.60
20	100	0		22.50	22.70	22.60
20	1	0	64-QAM	21.90	22.70	22.20
20	1	49		22.30	22.40	22.40
20	1	99		22.40	22.90	22.40
20	50	0		22.40	22.40	22.60
20	50	24		22.50	22.50	22.60
20	50	50		22.30	22.50	22.50
20	100	0		22.50	22.40	22.60
15	1	0	QPSK	21.60	22.60	22.40
15	1	37		22.40	22.40	22.60
15	1	74		22.60	22.50	22.40
15	36	0		22.10	22.40	22.70
15	36	20		22.50	22.30	22.70
15	36	39		22.40	22.40	22.60
15	75	0		22.20	22.50	22.50
15	1	0	16-QAM	21.70	22.70	22.50
15	1	37		22.40	22.60	22.50
15	1	74		22.70	22.60	22.30
15	36	0		22.10	22.50	22.60
15	36	20		22.50	22.40	22.70
15	36	39		22.40	22.30	22.60
15	75	0		22.40	22.50	22.50
15	1	0	64-QAM	21.70	22.60	22.30
15	1	37		22.40	22.70	22.60
15	1	74		22.50	22.40	22.40
15	36	0		22.20	22.30	22.60
15	36	20		22.40	22.30	22.60
15	36	39		22.40	22.40	22.50
15	75	0		22.30	22.60	22.60



LTE Band 41 Low Band Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	21.40	22.40	22.50
10	1	25		22.20	22.10	22.20
10	1	49		22.30	22.60	22.30
10	25	0		21.80	22.20	22.60
10	25	12		22.30	22.40	22.40
10	25	25		22.10	22.40	22.10
10	50	0		22.10	22.40	22.50
10	1	0	16-QAM	21.10	22.40	22.40
10	1	25		22.10	22.10	22.30
10	1	49		22.30	22.50	22.30
10	25	0		21.90	22.30	22.60
10	25	12		22.50	22.50	22.50
10	25	25		22.50	22.50	22.40
10	50	0		22.30	22.50	22.70
10	1	0	64-QAM	21.20	22.30	22.40
10	1	25		22.10	22.20	22.30
10	1	49		22.20	22.50	22.30
10	25	0		22.00	22.30	22.60
10	25	12		22.40	22.40	22.40
10	25	25		22.50	22.50	22.10
10	50	0		22.40	22.40	22.40
5	1	0	QPSK	21.20	21.90	22.20
5	1	12		21.70	22.20	22.20
5	1	24		22.10	22.10	21.80
5	12	0		21.80	22.60	22.90
5	12	7		22.00	22.40	22.40
5	12	13		22.20	22.30	22.20
5	25	0		21.70	22.10	22.20
5	1	0	16-QAM	21.20	22.40	22.00
5	1	12		21.70	22.50	22.00
5	1	24		22.10	22.40	21.80
5	12	0		21.90	22.70	22.90
5	12	7		22.10	22.50	22.50
5	12	13		22.20	22.40	22.30
5	25	0		21.90	22.40	22.30
5	1	0	64-QAM	21.30	22.00	22.30
5	1	12		21.80	22.20	22.20
5	1	24		22.00	22.30	21.90
5	12	0		21.90	22.00	22.80
5	12	7		22.10	22.40	22.40
5	12	13		22.30	22.40	22.20
5	25	0		22.00	22.30	22.30



<For 1x1 Tx High Band>

LTE Band 41 High Band Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	21.80	22.50	21.70
20	1	49		21.80	21.70	21.40
20	1	99		22.50	21.50	22.00
20	50	0		21.80	22.00	21.30
20	50	24		22.00	21.50	21.40
20	50	50		22.30	22.00	21.70
20	100	0		22.00	21.50	21.40
20	1	0	16-QAM	21.90	22.40	21.90
20	1	49		21.90	21.70	21.60
20	1	99		22.40	21.60	22.00
20	50	0		21.80	21.60	21.40
20	50	24		22.10	22.00	21.60
20	50	50		22.30	21.40	21.70
20	100	0		22.10	21.60	21.50
20	1	0	64-QAM	21.80	22.40	21.70
20	1	49		21.80	21.60	21.50
20	1	99		22.40	21.40	22.10
20	50	0		21.90	21.90	21.40
20	50	24		21.90	21.70	21.70
20	50	50		22.30	21.40	21.70
20	100	0		22.00	21.60	21.60
15	1	0	QPSK	21.70	22.40	21.50
15	1	37		21.90	21.80	21.70
15	1	74		22.30	21.70	21.90
15	36	0		21.80	22.00	21.50
15	36	20		22.00	21.90	21.60
15	36	39		22.10	21.70	21.90
15	75	0		22.20	22.00	21.60
15	1	0	16-QAM	21.90	22.10	21.50
15	1	37		22.10	21.60	21.90
15	1	74		22.40	21.40	21.70
15	36	0		22.10	21.90	21.60
15	36	20		22.10	21.60	21.90
15	36	39		22.20	21.40	22.00
15	75	0		21.90	21.70	21.70
15	1	0	64-QAM	21.90	22.10	21.50
15	1	37		21.90	21.60	21.60
15	1	74		22.40	21.40	21.90
15	36	0		22.00	21.90	21.60
15	36	20		21.90	21.70	21.70
15	36	39		22.10	21.50	22.00
15	75	0		22.10	21.80	22.10



LTE Band 41 High Band Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.00	22.10	21.30
10	1	25		21.50	22.20	21.50
10	1	49		21.70	22.20	21.80
10	25	0		21.80	22.40	21.60
10	25	12		21.90	22.30	21.80
10	25	25		21.60	22.30	22.00
10	50	0		21.90	22.10	21.80
10	1	0	16-QAM	21.90	22.10	21.50
10	1	25		21.50	22.10	21.60
10	1	49		21.60	22.20	21.80
10	25	0		21.70	22.40	21.70
10	25	12		21.90	22.30	21.80
10	25	25		21.60	22.40	22.00
10	50	0		21.80	22.30	21.80
10	1	0	64-QAM	22.00	22.00	21.50
10	1	25		21.60	22.10	21.70
10	1	49		21.60	22.20	21.80
10	25	0		21.70	22.40	21.60
10	25	12		21.80	22.30	21.70
10	25	25		21.70	22.20	22.00
10	50	0		21.80	22.20	21.90
5	1	0	QPSK	21.30	22.10	21.60
5	1	12		21.60	22.30	21.80
5	1	24		21.30	22.10	21.80
5	12	0		22.20	22.60	22.20
5	12	7		21.90	22.30	21.90
5	12	13		21.50	22.20	21.60
5	25	0		21.80	22.40	22.00
5	1	0	16-QAM	21.50	22.00	21.60
5	1	12		21.60	22.20	21.50
5	1	24		21.30	22.10	21.40
5	12	0		22.40	22.60	22.30
5	12	7		22.00	22.40	21.90
5	12	13		21.70	22.30	21.80
5	25	0		21.90	22.40	21.80
5	1	0	64-QAM	21.40	22.10	21.70
5	1	12		21.70	22.40	21.80
5	1	24		21.40	22.20	21.90
5	12	0		22.20	22.50	22.00
5	12	7		21.90	22.30	22.00
5	12	13		21.60	22.20	21.60
5	25	0		21.90	22.50	22.10

**<For 4x4 Tx Low Band>**

LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.42	22.78	22.80
20	1	49		22.71	22.37	22.49
20	1	99		22.89	22.85	22.80
20	50	0		22.68	22.31	22.52
20	50	24		22.77	22.39	22.48
20	50	50		22.78	22.54	22.62
20	100	0		22.68	22.52	22.57
20	1	0	16-QAM	22.53	22.88	22.85
20	1	49		22.78	22.58	22.75
20	1	99		22.85	22.94	22.91
20	50	0		22.69	22.35	22.53
20	50	24		22.74	22.38	22.49
20	50	50		22.79	22.58	22.65
20	100	0		22.59	22.51	22.56
20	1	0	64-QAM	22.60	22.88	22.82
20	1	49		22.77	22.42	22.57
20	1	99		22.88	22.88	22.85
20	50	0		22.62	22.37	22.49
20	50	24		22.76	22.34	22.43
20	50	50		22.78	22.51	22.56
20	100	0		22.64	22.53	22.58
15	1	0	QPSK	22.35	22.62	22.51
15	1	37		22.73	22.48	22.41
15	1	74		22.80	22.77	22.55
15	36	0		22.43	22.25	22.28
15	36	20		22.54	22.31	22.26
15	36	39		22.59	22.35	22.28
15	75	0		22.53	22.22	22.38
15	1	0	16-QAM	22.54	22.67	22.72
15	1	37		22.85	22.69	22.46
15	1	74		22.85	22.88	22.74
15	36	0		22.39	22.21	22.25
15	36	20		22.54	22.28	22.25
15	36	39		22.56	22.31	22.26
15	75	0		22.54	22.26	22.39
15	1	0	64-QAM	22.39	22.53	22.68
15	1	37		22.78	22.52	22.49
15	1	74		22.84	22.71	22.63
15	36	0		22.40	22.24	22.34
15	36	20		22.56	22.30	22.30
15	36	39		22.60	22.30	22.30
15	75	0		22.54	22.25	22.37



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.22	22.35	22.41
10	1	25		22.63	22.21	22.18
10	1	49		22.75	22.60	22.58
10	25	0		22.56	22.26	22.30
10	25	12		22.64	22.32	22.29
10	25	25		22.72	22.46	22.34
10	50	0		22.56	22.31	22.25
10	1	0	16-QAM	22.49	22.62	22.69
10	1	25		22.77	22.47	22.54
10	1	49		22.75	22.82	22.83
10	25	0		22.57	22.19	22.37
10	25	12		22.65	22.25	22.38
10	25	25		22.69	22.34	22.42
10	50	0		22.59	22.22	22.29
10	1	0	64-QAM	22.33	22.42	22.56
10	1	25		22.70	22.25	22.33
10	1	49		22.68	22.70	22.72
10	25	0		22.53	22.18	22.35
10	25	12		22.65	22.15	22.31
10	25	25		22.63	22.24	22.35
10	50	0		22.53	22.12	22.21
5	1	0	QPSK	21.72	21.95	21.96
5	1	12		22.23	21.81	22.10
5	1	24		22.33	21.97	22.06
5	12	0		22.35	22.29	22.49
5	12	7		22.36	21.93	22.27
5	12	13		22.42	21.96	22.19
5	25	0		22.25	21.96	22.07
5	1	0	16-QAM	21.96	22.13	22.22
5	1	12		22.41	22.10	22.38
5	1	24		22.50	22.23	22.36
5	12	0		22.38	22.31	22.46
5	12	7		22.35	21.99	22.30
5	12	13		22.44	21.93	22.20
5	25	0		22.29	21.92	22.16
5	1	0	64-QAM	21.92	21.98	22.02
5	1	12		22.38	21.96	22.23
5	1	24		22.43	22.05	22.24
5	12	0		22.39	22.25	22.45
5	12	7		22.35	21.94	22.26
5	12	13		22.41	21.90	22.13
5	25	0		22.25	21.86	22.07



<For 4x4 Tx High Band>

LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.44	22.43	22.21
20	1	49		22.05	22.03	21.43
20	1	99		22.46	22.52	22.54
20	50	0		22.13	22.05	21.83
20	50	24		22.11	22.16	21.77
20	50	50		22.44	22.14	21.61
20	100	0		22.35	22.09	21.97
20	1	0	16-QAM	22.74	22.65	22.63
20	1	49		22.40	22.31	21.78
20	1	99		22.65	22.67	22.77
20	50	0		22.26	22.18	21.86
20	50	24		22.18	22.33	21.81
20	50	50		22.49	22.33	21.99
20	100	0		22.41	22.22	22.07
20	1	0	64-QAM	22.57	22.64	22.40
20	1	49		22.25	22.25	21.55
20	1	99		22.65	22.72	22.69
20	50	0		22.19	22.12	21.82
20	50	24		22.09	22.25	21.72
20	50	50		22.36	22.26	21.88
20	100	0		22.48	22.25	22.06
15	1	0	QPSK	22.67	22.58	22.26
15	1	37		22.46	22.35	21.68
15	1	74		22.78	22.79	22.52
15	36	0		22.28	22.30	21.92
15	36	20		22.23	22.51	21.69
15	36	39		22.40	22.50	21.68
15	75	0		22.31	22.54	21.91
15	1	0	16-QAM	22.86	22.73	22.55
15	1	37		22.70	22.67	21.94
15	1	74		22.84	22.89	22.75
15	36	0		22.27	22.27	21.92
15	36	20		22.30	22.45	21.68
15	36	39		22.47	22.46	21.70
15	75	0		22.37	22.54	21.99
15	1	0	64-QAM	22.74	22.59	22.34
15	1	37		22.58	22.49	21.79
15	1	74		22.78	22.79	22.55
15	36	0		22.31	22.31	21.98
15	36	20		22.30	22.46	21.74
15	36	39		22.49	22.46	21.72
15	75	0		22.32	22.53	21.98



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.59	22.47	21.88
10	1	25		22.24	22.16	21.46
10	1	49		22.70	22.63	21.99
10	25	0		22.37	22.37	21.52
10	25	12		22.29	22.31	21.53
10	25	25		22.33	22.43	21.75
10	50	0		22.33	22.39	21.58
10	1	0	16-QAM	22.86	22.89	22.26
10	1	25		22.61	22.45	21.79
10	1	49		22.92	22.83	22.38
10	25	0		22.40	22.39	21.56
10	25	12		22.37	22.34	21.57
10	25	25		22.36	22.46	21.77
10	50	0		22.36	22.42	21.61
10	1	0	64-QAM	22.75	22.64	22.05
10	1	25		22.41	22.27	21.59
10	1	49		22.86	22.69	22.17
10	25	0		22.33	22.34	21.53
10	25	12		22.26	22.29	21.51
10	25	25		22.34	22.40	21.75
10	50	0		22.41	22.32	21.58
5	1	0	QPSK	22.09	22.03	21.41
5	1	12		21.94	22.04	21.51
5	1	24		21.98	22.11	21.49
5	12	0		22.48	22.49	21.88
5	12	7		22.17	22.08	21.73
5	12	13		22.08	21.99	21.50
5	25	0		22.23	22.00	21.57
5	1	0	16-QAM	22.37	22.25	21.74
5	1	12		22.31	22.20	21.84
5	1	24		22.33	22.20	21.84
5	12	0		22.55	22.54	21.93
5	12	7		22.25	22.08	21.80
5	12	13		22.14	22.01	21.56
5	25	0		22.26	22.03	21.61
5	1	0	64-QAM	22.25	22.08	21.55
5	1	12		22.08	22.19	21.67
5	1	24		22.15	22.23	21.65
5	12	0		22.47	22.52	21.85
5	12	7		22.19	22.04	21.74
5	12	13		22.21	21.95	21.50
5	25	0		22.23	21.97	21.54



LTE Band 25

<For 1x1 Tx>

Peak-to-Average Ratio

Mode	LTE Band 25 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.88	4.35	4.09	4.96	PASS
Middle CH	4.49	4.61	4.61	4.58	
Highest CH	3.88	4.55	3.94	5.04	
Mode	LTE Band 25 / 20MHz				
Mod.	64QAM				Limit: 13dB
RB Size	1RB	Full RB			Result
Lowest CH	4.26	4.90	-	-	PASS
Middle CH	4.81	5.10	-	-	
Highest CH	4.38	5.13	-	-	



LTE Band 25 / 20MHz / QPSK

Lowest Channel / 1RB



Date: 29 MAY 2018 21:45:10

Lowest Channel / Full RB



Date: 29 MAY 2018 21:44:58

Middle Channel / 1RB



Date: 29 MAY 2018 20:43:39

Middle Channel / Full RB




Date: 29 MAY 2018 20:42:27

Highest Channel / 1RB



Date: 29 MAY 2018 21:49:55

Highest Channel / Full RB

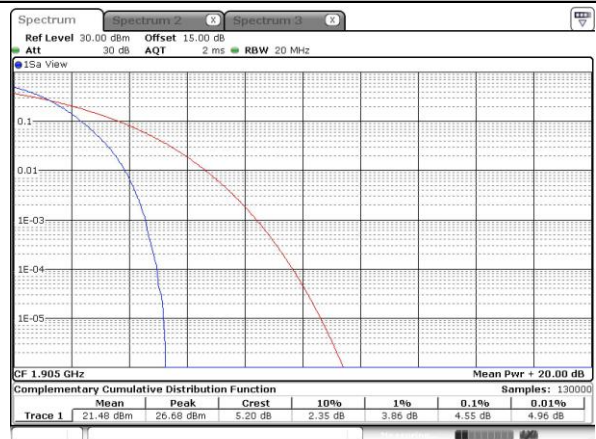

Date: 29 MAY 2018 21:50:35


LTE Band 25 / 20MHz / 16QAM

Lowest Channel / 1RB



Date: 29 MAY 2018 21:45:21

Lowest Channel / Full RB

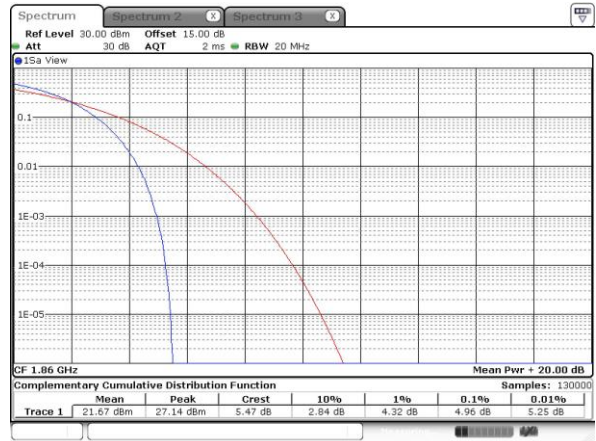


Date: 29 MAY 2018 21:43:53

Middle Channel / 1RB



Date: 29 MAY 2018 20:43:51

Middle Channel / Full RB

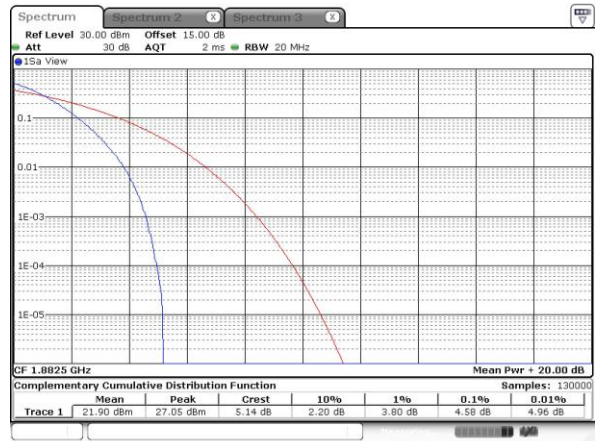

Date: 29 MAY 2018 20:42:36

Highest Channel / 1RB



Date: 29 MAY 2018 21:50:05

Highest Channel / Full RB




Date: 29 MAY 2018 21:52:22




LTE Band 25 / 20MHz / 64QAM

Lowest Channel / 1RB

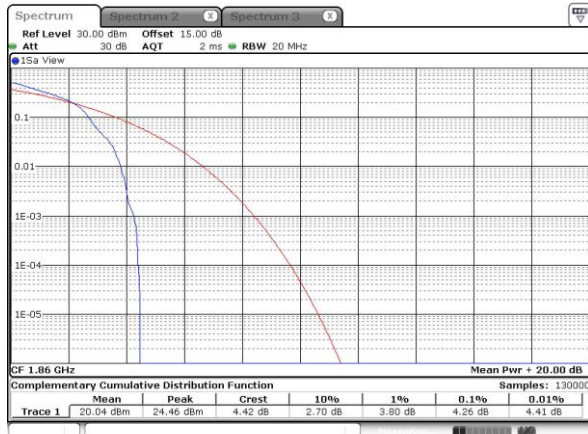

Lowest Channel / Full RB

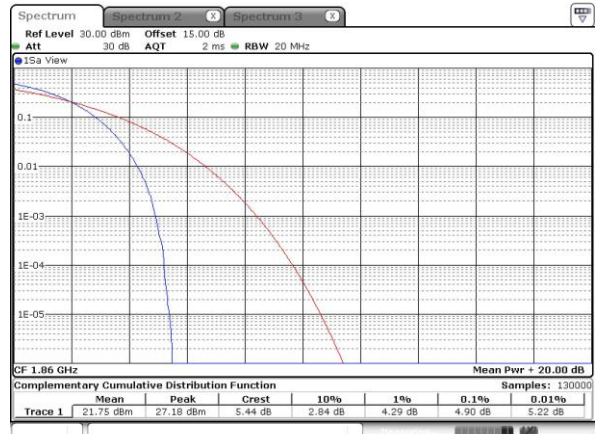

Middle Channel / 1RB




Middle Channel / Full RB



Highest Channel / 1RB



Highest Channel / Full RB

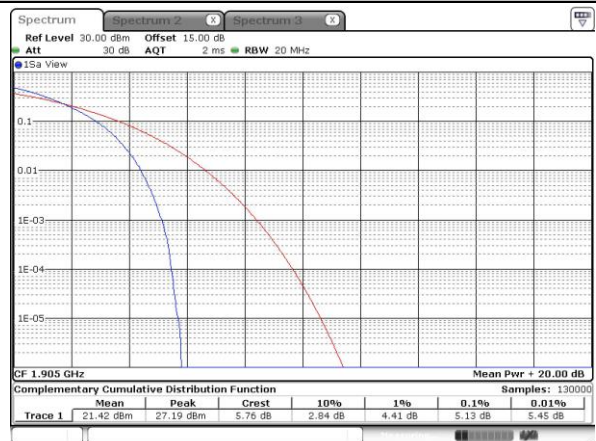


**26dB Bandwidth**

Mode	LTE Band 25 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	5.05	5.18	9.89	10.01	14.36	14.27	20.14	20.22
Middle CH	-	-	-	-	5.09	5.13	9.67	9.95	14.51	14.54	20.22	20.26
Highest CH	-	-	-	-	5.28	5.25	10.07	9.97	14.48	14.42	20.22	20.42
Mode	LTE Band 25 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH		-		-	5.25	-	9.89	-	14.60	-	20.18	-
Middle CH		-		-	5.23	-	10.01	-	14.51	-	20.18	-
Highest CH		-		-	5.16	-	10.09	-	14.48	-	20.10	-




LTE Band 25


Lowest Channel / 5MHz / QPSK

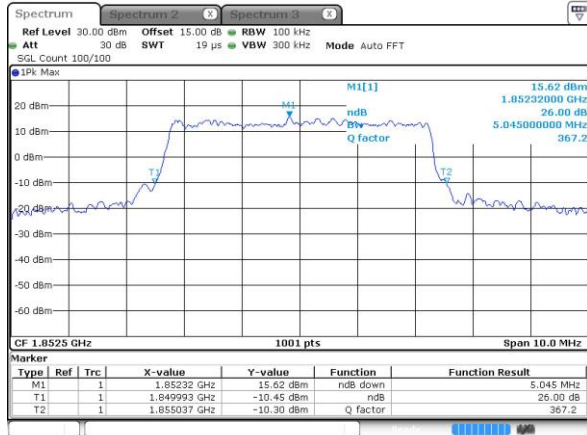


Lowest Channel / 5MHz / 16QAM

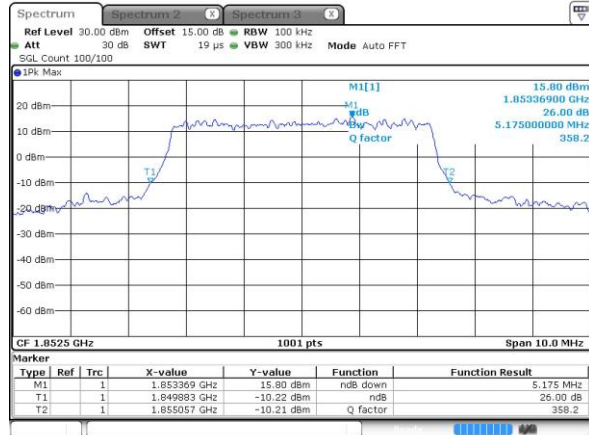

Middle Channel / 5MHz / QPSK

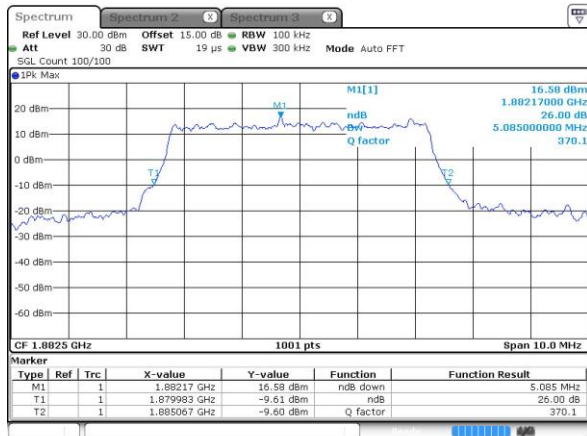

Middle Channel / 5MHz / 16QAM

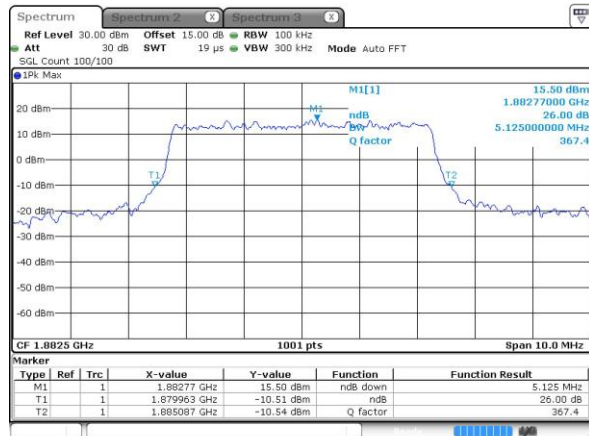

Highest Channel / 5MHz / QPSK




Highest Channel / 5MHz / 16QAM






LTE Band 25

Lowest Channel / 10MHz / QPSK

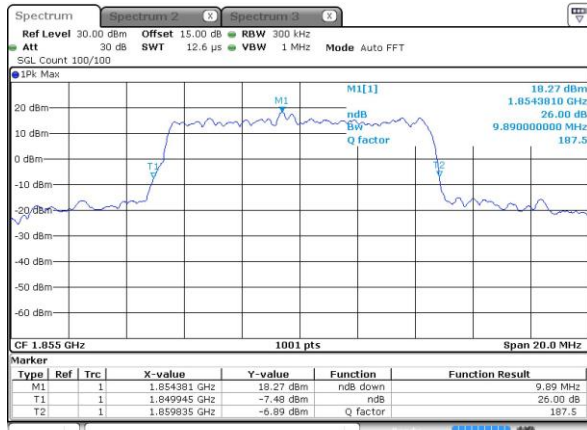


Date: 29 MAY 2018 21:02:42

Lowest Channel / 10MHz / 16QAM

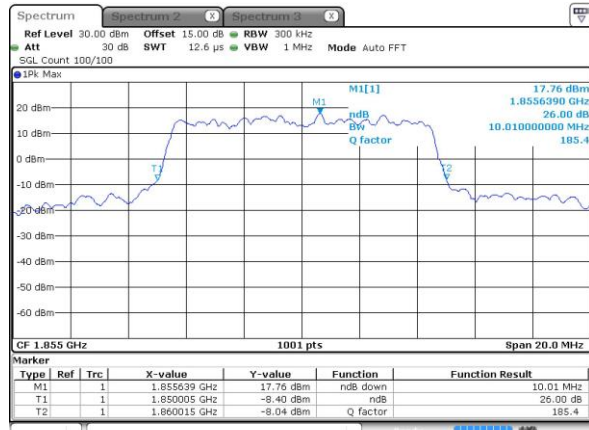


Date: 29 MAY 2018 21:03:43

Middle Channel / 10MHz / QPSK

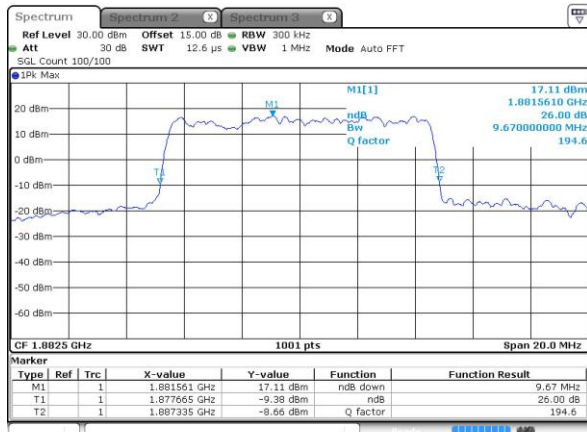


Date: 29 MAY 2018 20:24:23

Middle Channel / 10MHz / 16QAM

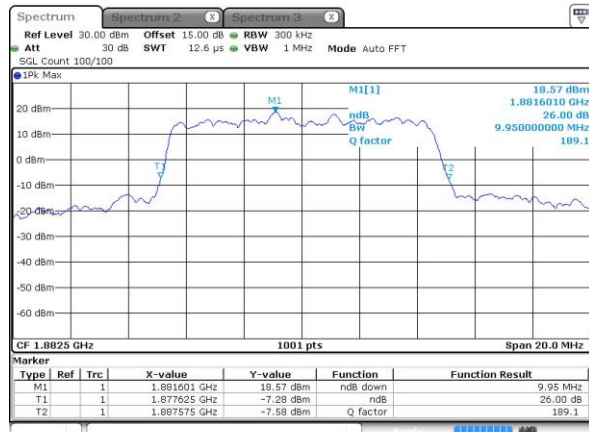


Date: 29 MAY 2018 20:24:44

Highest Channel / 10MHz / QPSK

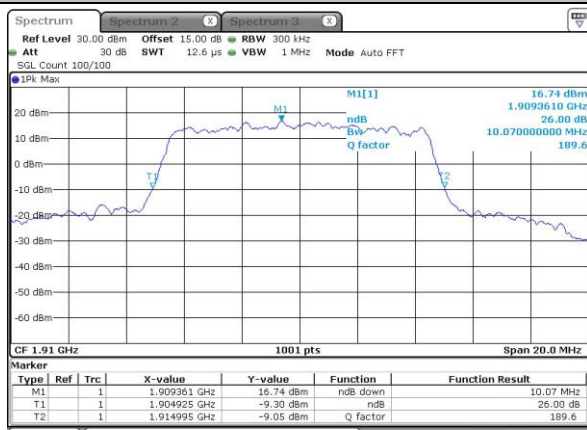

Date: 29 MAY 2018 21:11:14

Highest Channel / 10MHz / 16QAM

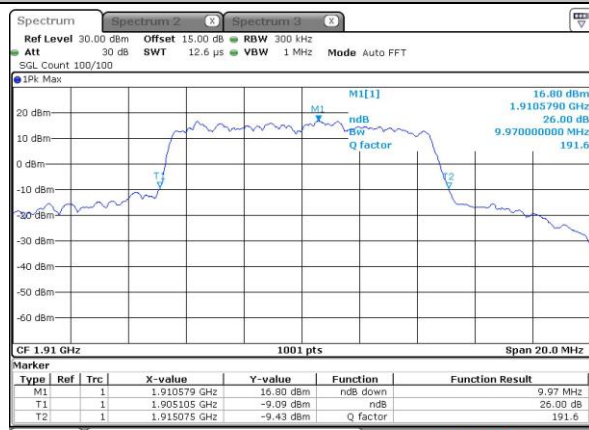


Date: 29 MAY 2018 21:11:33




LTE Band 25

Lowest Channel / 15MHz / QPSK

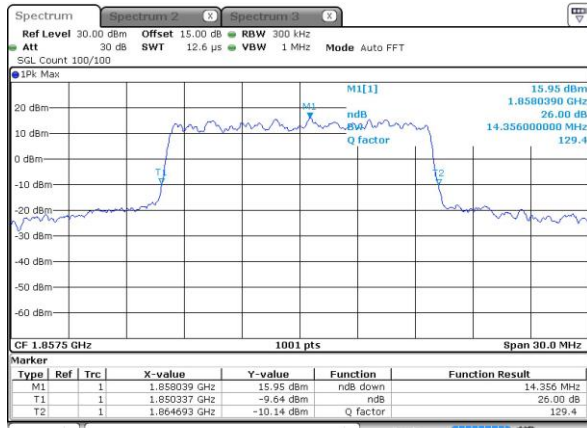


Date: 29 MAY 2018 21:21:33

Lowest Channel / 15MHz / 16QAM

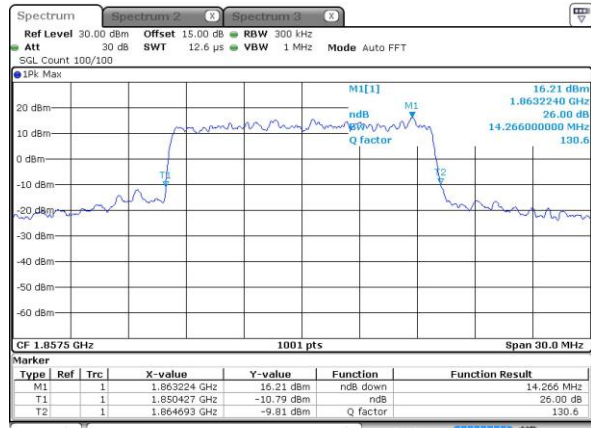


Date: 29 MAY 2018 21:22:05

Middle Channel / 15MHz / QPSK

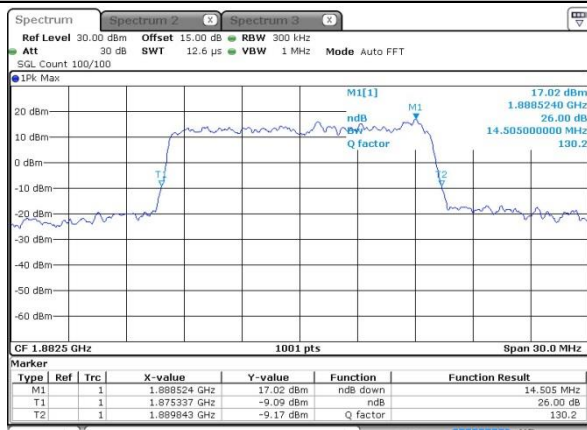


Date: 29 MAY 2018 20:35:55

Middle Channel / 15MHz / 16QAM

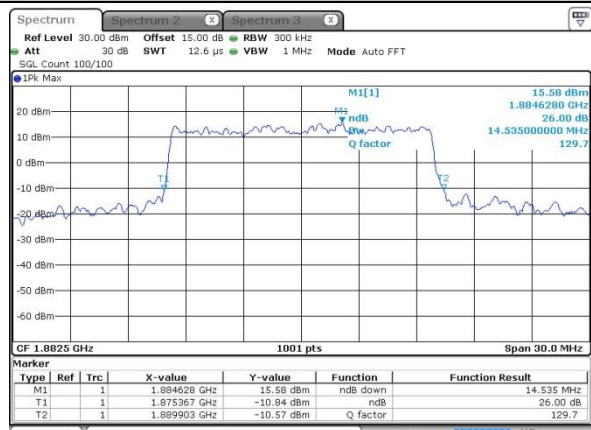


Date: 29 MAY 2018 20:36:22

Highest Channel / 15MHz / QPSK

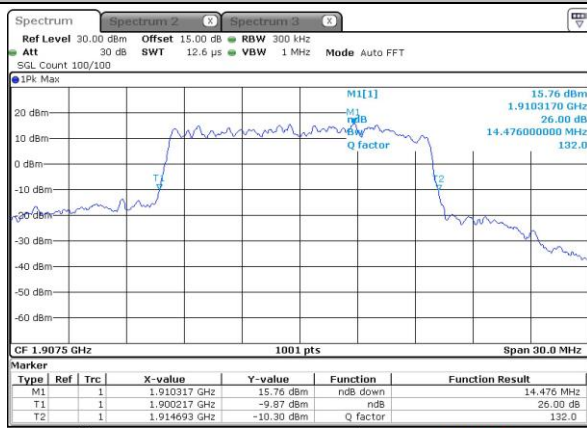

Date: 29 MAY 2018 21:24:23

Highest Channel / 15MHz / 16QAM

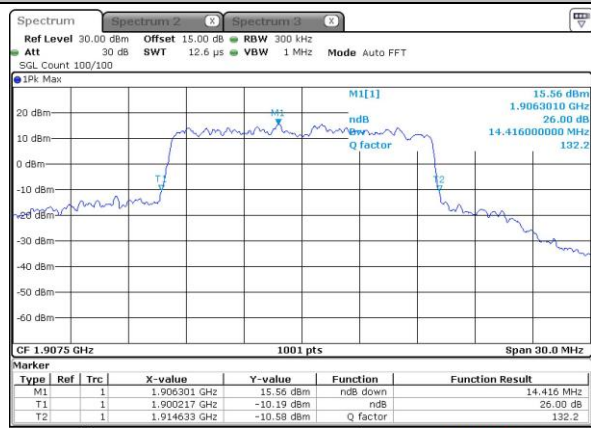


Date: 29 MAY 2018 21:25:48




LTE Band 25

Lowest Channel / 20MHz / QPSK

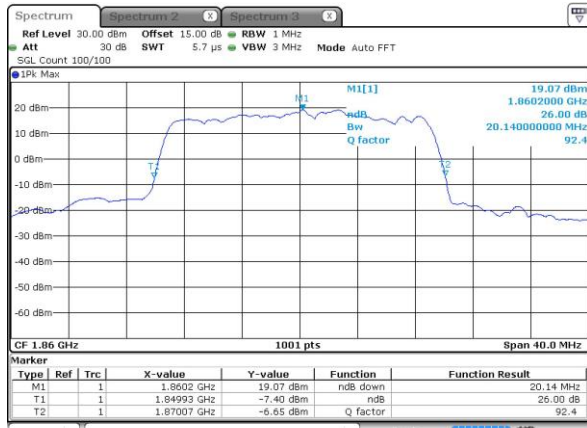


Date: 29 MAY 2018 21:43:08

Lowest Channel / 20MHz / 16QAM

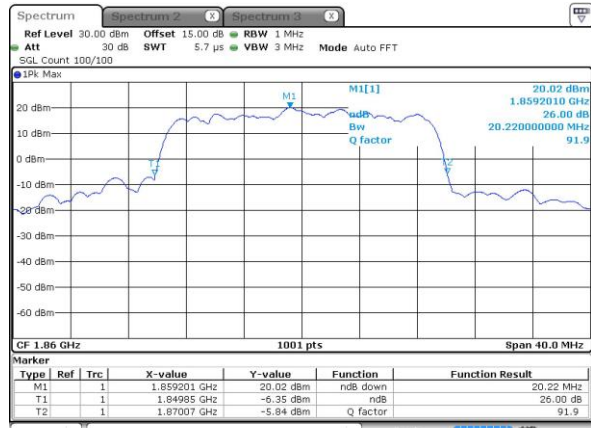


Date: 29 MAY 2018 21:44:01

Middle Channel / 20MHz / QPSK

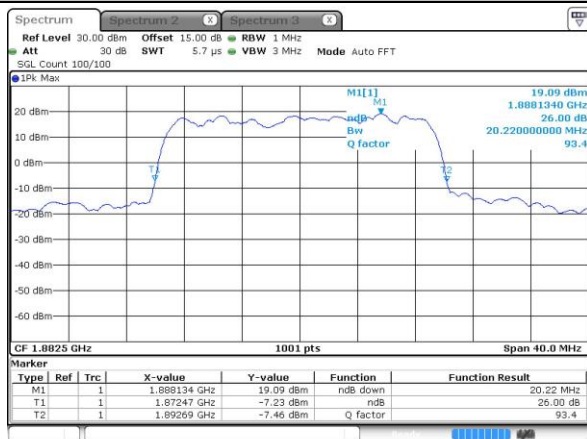


Date: 29 MAY 2018 20:41:59

Middle Channel / 20MHz / 16QAM

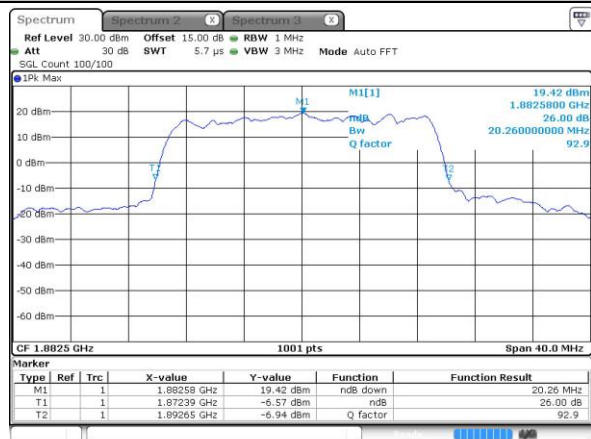


Date: 29 MAY 2018 20:42:17

Highest Channel / 20MHz / QPSK

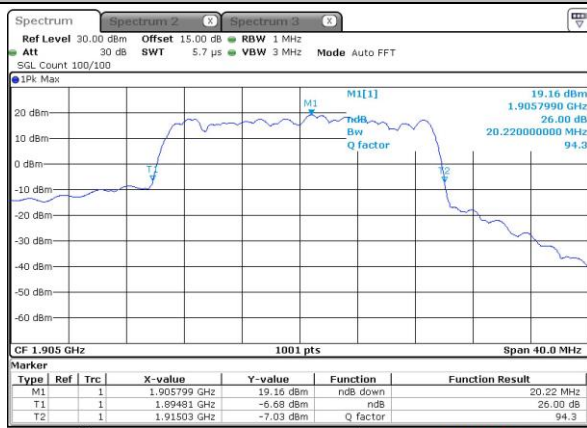

Date: 29 MAY 2018 21:50:50

Highest Channel / 20MHz / 16QAM

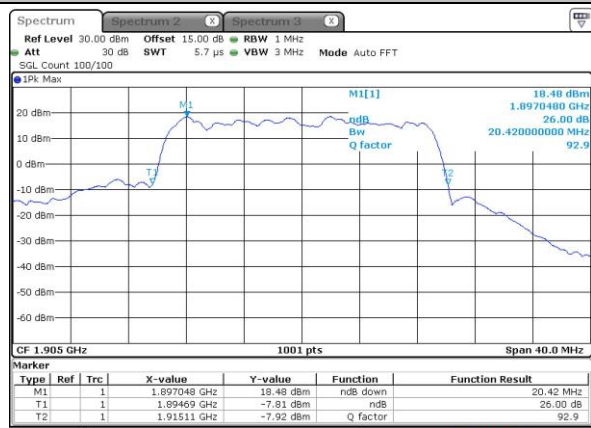


Date: 29 MAY 2018 21:52:40




LTE Band 25

Lowest Channel / 5MHz / 64QAM

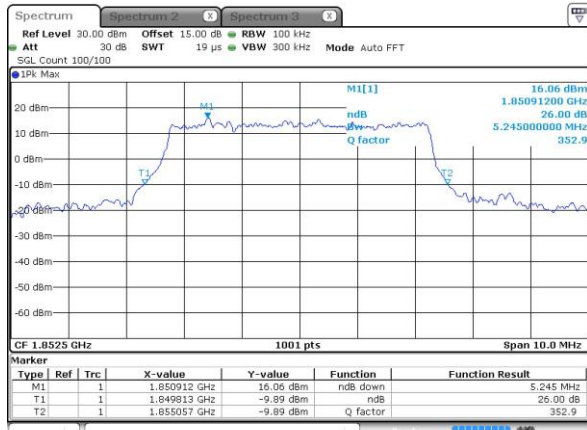


Date: 29 MAY 2018 19:54:21

Lowest Channel / 10MHz / 64QAM

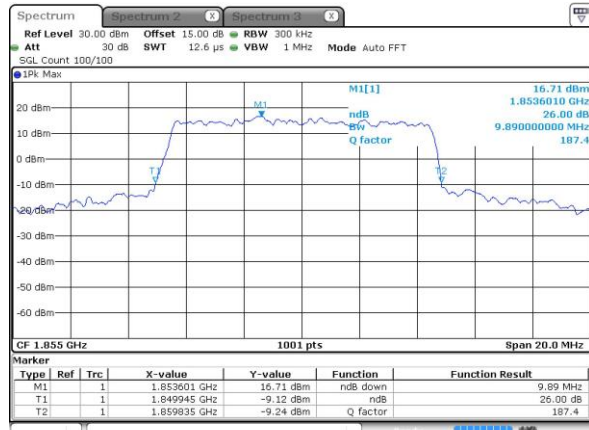


Date: 29 MAY 2018 21:04:29

Middle Channel / 5MHz / 64QAM

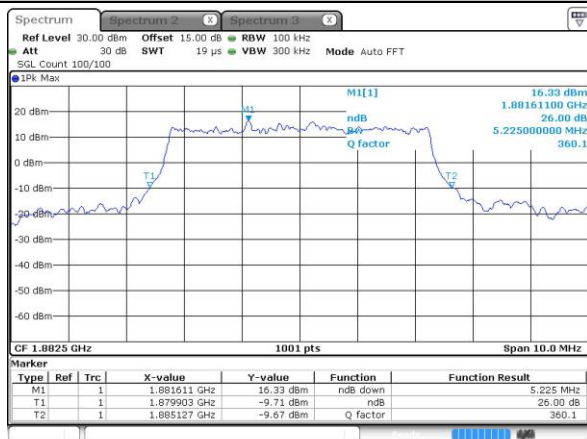


Date: 29 MAY 2018 20:17:09

Middle Channel / 10MHz / 64QAM

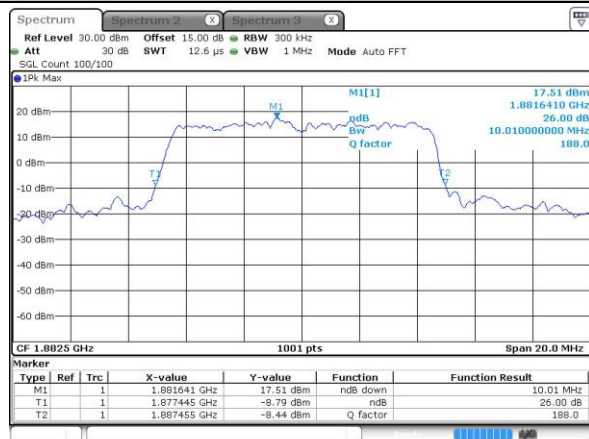


Date: 29 MAY 2018 20:25:02

Highest Channel / 5MHz / 64QAM

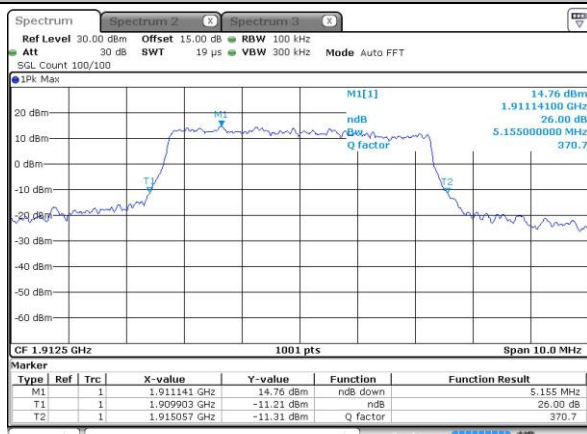

Date: 29 MAY 2018 20:50:29

Highest Channel / 10MHz / 64QAM

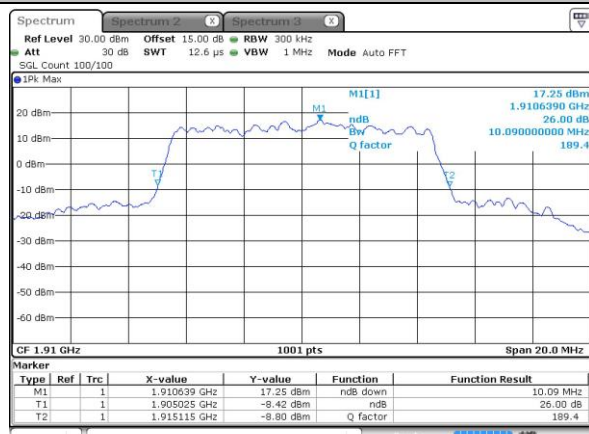


Date: 29 MAY 2018 21:11:51




LTE Band 25

Lowest Channel / 15MHz / 64QAM

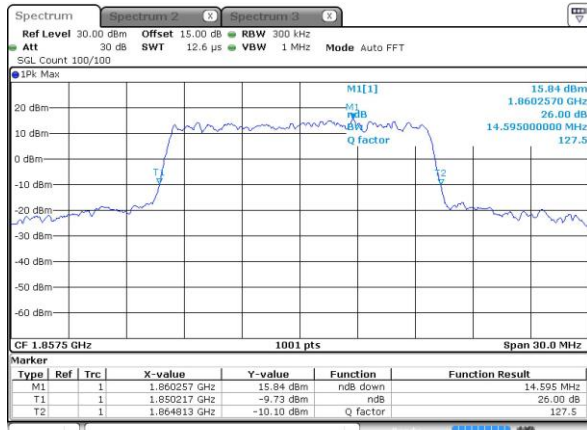


Date: 29 MAY 2018 21:21:02

Lowest Channel / 20MHz / 64QAM

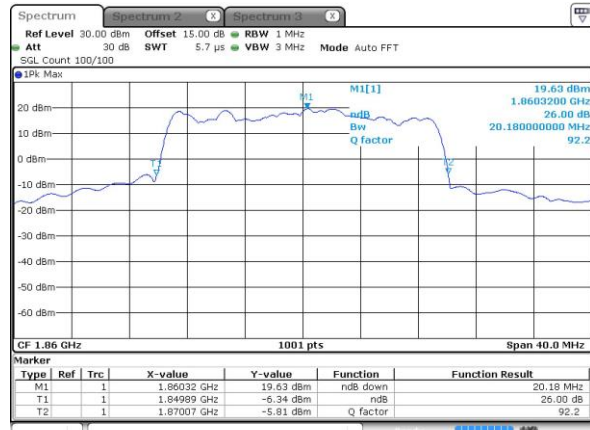


Date: 29 MAY 2018 21:44:36

Middle Channel / 15MHz / 64QAM

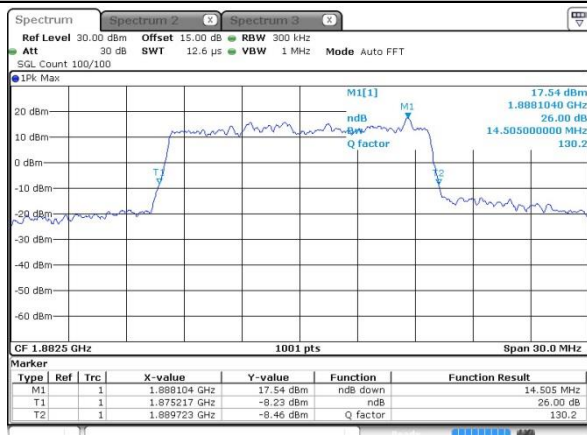


Date: 29 MAY 2018 20:36:47

Middle Channel / 20MHz / 64QAM

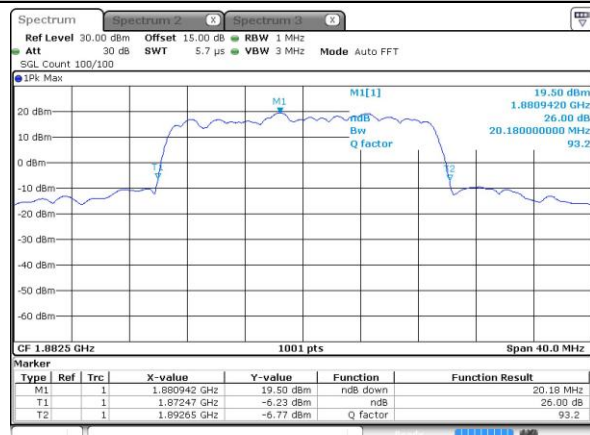


Date: 29 MAY 2018 20:43:08

Highest Channel / 15MHz / 64QAM

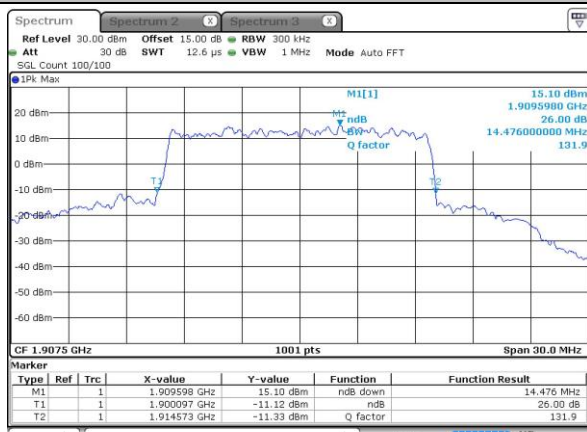

Date: 29 MAY 2018 21:26:55

Highest Channel / 20MHz / 64QAM

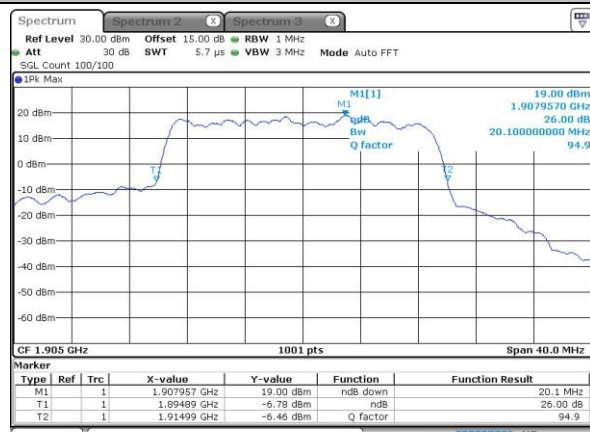

Date: 29 MAY 2018 21:54:09


**Occupied Bandwidth**

Mode	LTE Band 25 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.54	4.53	8.99	9.09	13.4	13.49	18.34	18.3
Middle CH	-	-	-	-	4.54	4.51	9.05	9.03	13.49	13.49	18.34	18.46
Highest CH	-	-	-	-	4.5	4.47	9.01	9.01	13.37	13.46	18.34	18.5
Mode	LTE Band 25 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH		-		-	4.50	-	9.07	-	13.46	-	18.38	-
Middle CH		-		-	4.50	-	9.07	-	13.46	-	18.54	-
Highest CH		-		-	4.50	-	9.01	-	13.43	-	18.50	-




LTE Band 25


Lowest Channel / 5MHz / QPSK

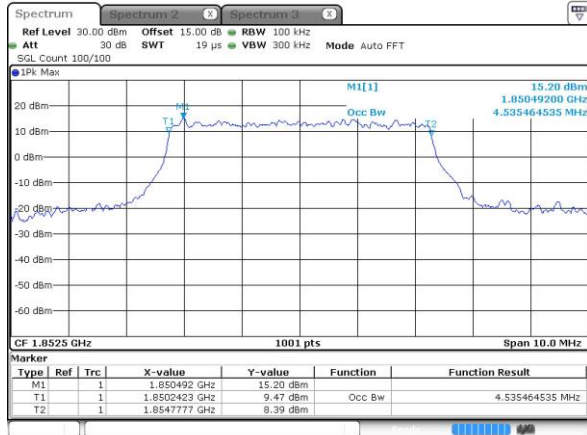


Lowest Channel / 5MHz / 16QAM

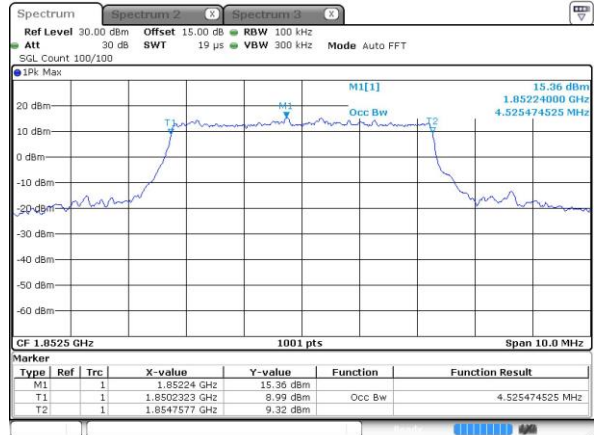


Middle Channel / 5MHz / QPSK

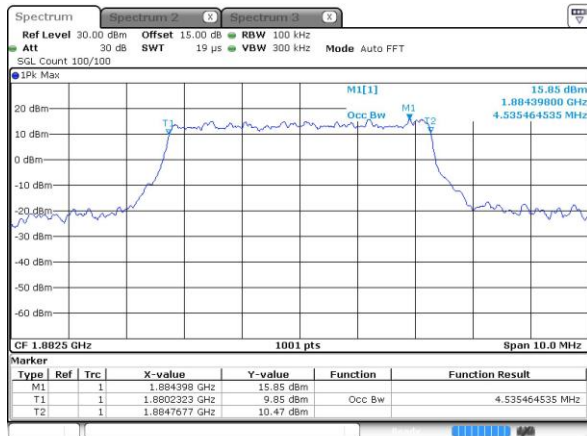


Middle Channel / 5MHz / 16QAM

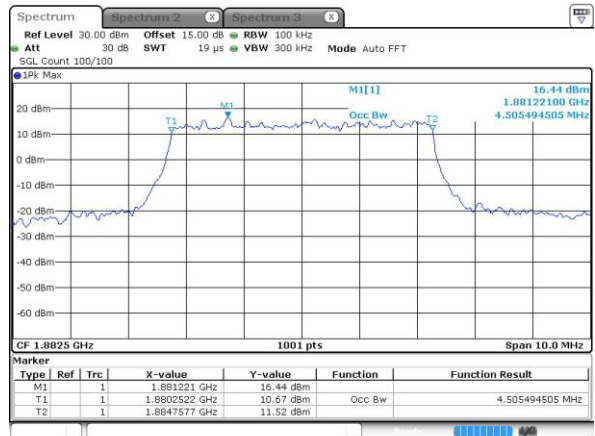

Highest Channel / 5MHz / QPSK

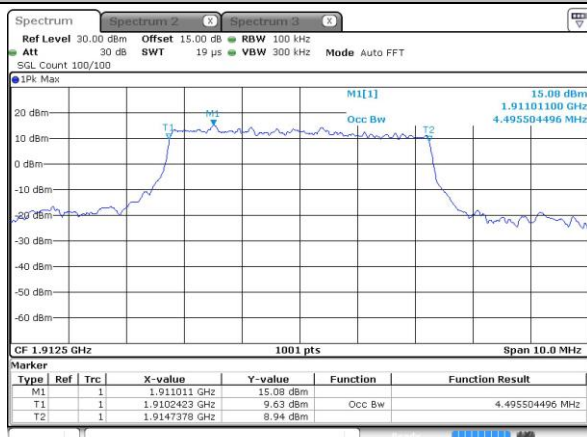


Highest Channel / 5MHz / 16QAM

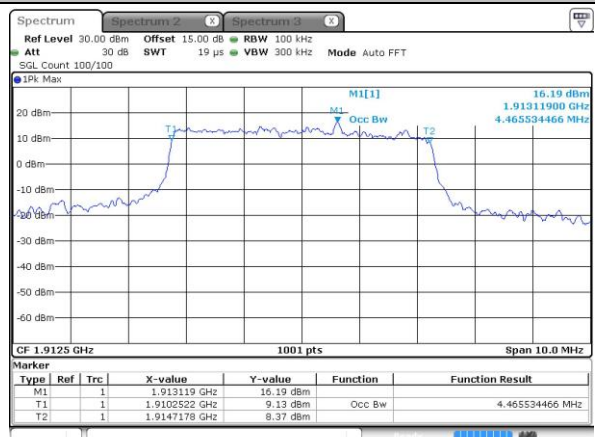




LTE Band 25

Lowest Channel / 10MHz / QPSK

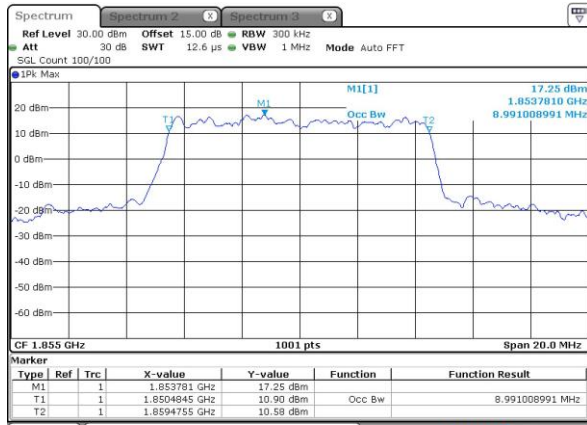


Date: 29 MAY 2018 21:02:34

Lowest Channel / 10MHz / 16QAM

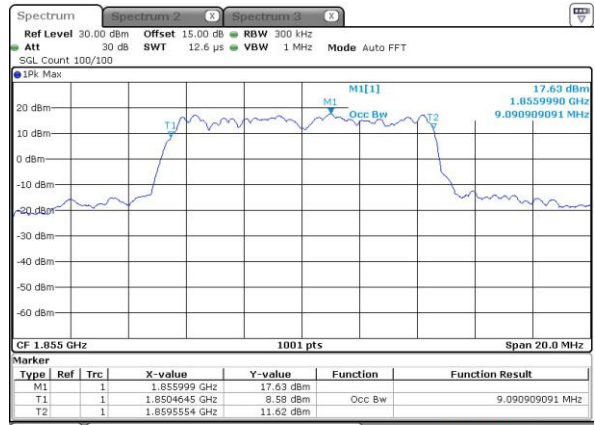


Date: 29 MAY 2018 21:03:27

Middle Channel / 10MHz / QPSK

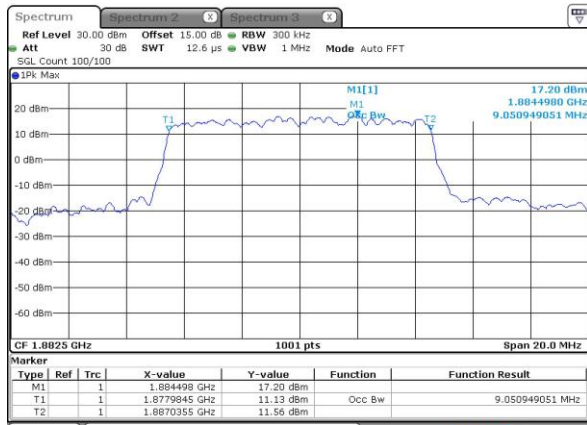


Date: 29 MAY 2018 20:24:15

Middle Channel / 10MHz / 16QAM

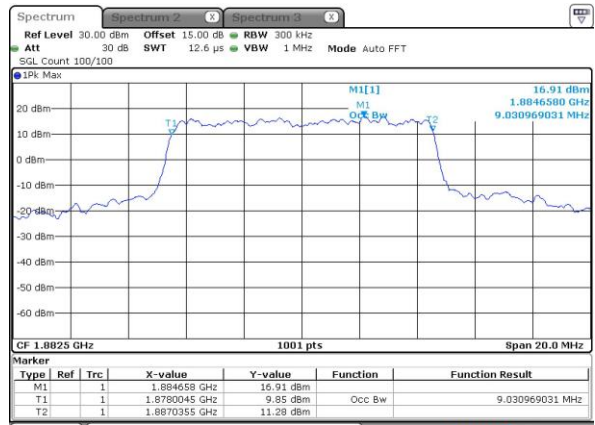


Date: 29 MAY 2018 20:24:36

Highest Channel / 10MHz / QPSK

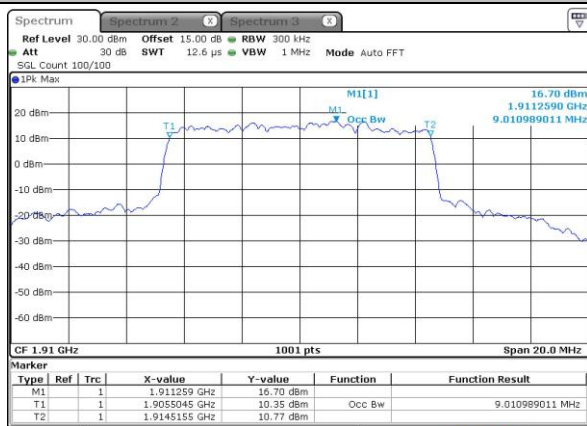

Date: 29 MAY 2018 21:11:06

Highest Channel / 10MHz / 16QAM

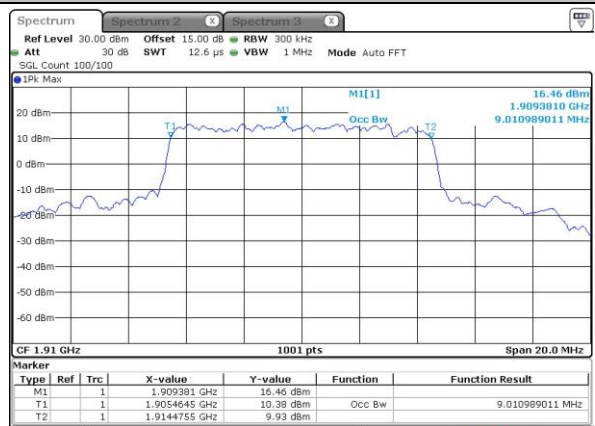


Date: 29 MAY 2018 21:11:25




LTE Band 25

Lowest Channel / 15MHz / QPSK

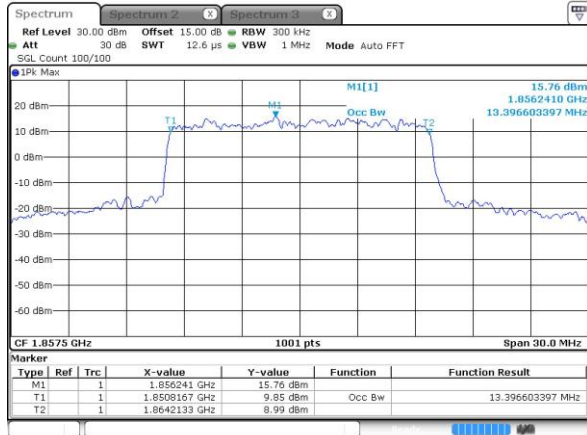


Date: 29 MAY 2018 21:21:26

Lowest Channel / 15MHz / 16QAM

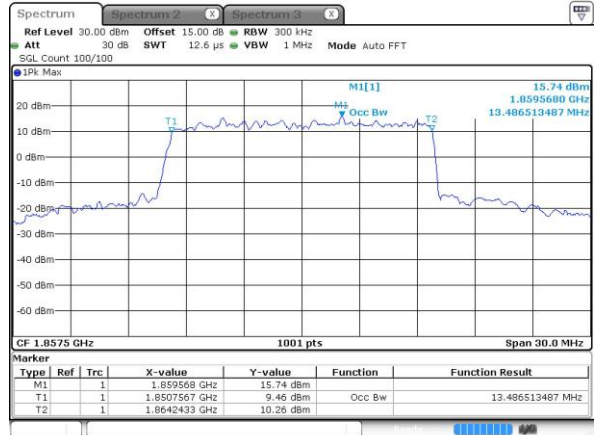


Date: 29 MAY 2018 21:21:59

Middle Channel / 15MHz / QPSK

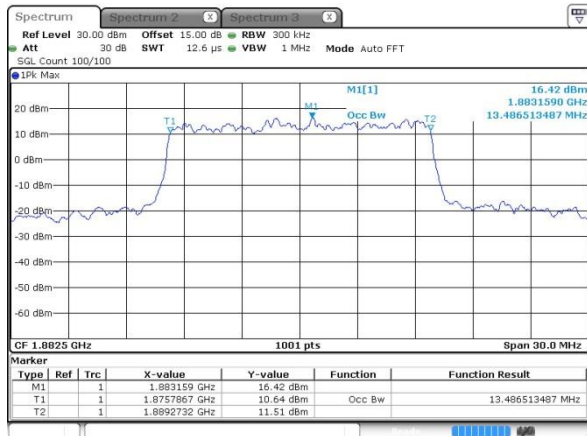


Date: 29 MAY 2018 20:35:45

Middle Channel / 15MHz / 16QAM

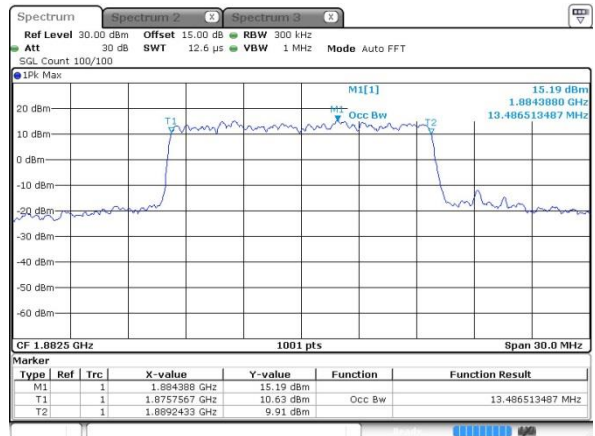


Date: 29 MAY 2018 20:36:13

Highest Channel / 15MHz / QPSK

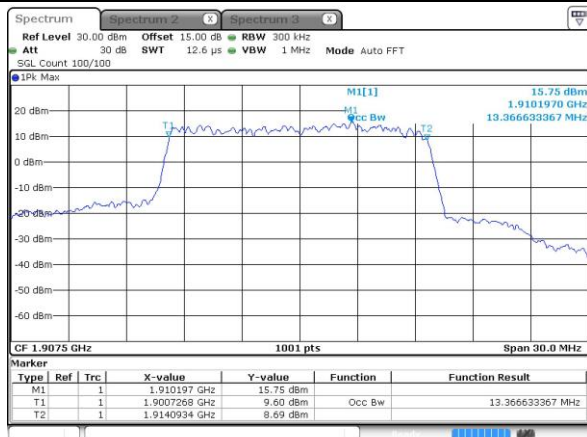

Date: 29 MAY 2018 21:24:16

Highest Channel / 15MHz / 16QAM

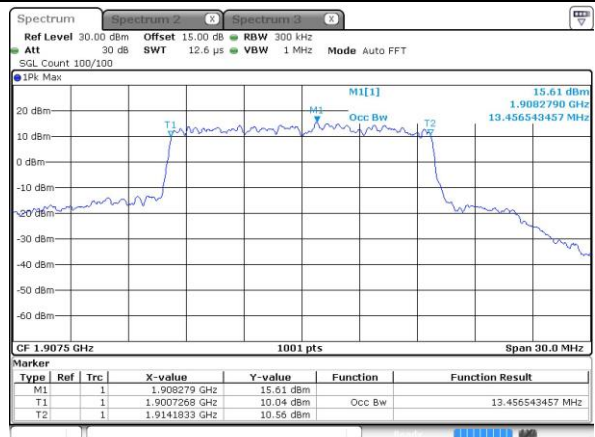

Date: 29 MAY 2018 21:25:40