



SAR TEST REPORT

No. I18Z60490-SEM01

For

LG Electronics MobileComm USA, Inc.

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model name:

LM-X410FC, LMX410FC, X410FC ; LM-X410FO, LMX410FO, X410FO

With

Hardware Version: Rev.1.0

Software Version: V09p

FCC ID: ZNFX410FC

Issued Date: 2018-5-2



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Issue Date	Description
I18Z60490-SEM01	Rev.0	2018-5-2	Initial creation of test report

TABLE OF CONTENT

1 TEST LABORATORY	5
1.1 TESTING LOCATION	5
1.2 TESTING ENVIRONMENT.....	5
1.3 PROJECT DATA	5
1.4 SIGNATURE.....	5
2 STATEMENT OF COMPLIANCE	6
3 CLIENT INFORMATION	8
3.1 APPLICANT INFORMATION	8
3.2 MANUFACTURER INFORMATION	8
4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	9
4.1 ABOUT EUT	9
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	9
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	9
5 TEST METHODOLOGY	10
5.1 APPLICABLE LIMIT REGULATIONS	10
5.2 APPLICABLE MEASUREMENT STANDARDS.....	10
6 SPECIFIC ABSORPTION RATE (SAR).....	11
6.1 INTRODUCTION.....	11
6.2 SAR DEFINITION	11
7 TISSUE SIMULATING LIQUIDS	12
7.1 TARGETS FOR TISSUE SIMULATING LIQUID	12
7.2 DIELECTRIC PERFORMANCE	12
8 SYSTEM VERIFICATION	18
8.1 SYSTEM SETUP.....	18
8.2 SYSTEM VERIFICATION.....	19
9 MEASUREMENT PROCEDURES	20
9.1 TESTS TO BE PERFORMED	20
9.2 GENERAL MEASUREMENT PROCEDURE.....	21
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR	23
9.4 SAR MEASUREMENT FOR LTE.....	24
9.5 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR	26
9.6 POWER DRIFT.....	26
10 AREA SCAN BASED 1-G SAR.....	27
10.1 REQUIREMENT OF KDB.....	27
10.2 FAST SAR ALGORITHMS	27
11 CONDUCTED OUTPUT POWER.....	28

11.1 GSM MEASUREMENT RESULT	28
11.2 WCDMA MEASUREMENT RESULT.....	29
11.3 LTE MEASUREMENT RESULT	30
11.4 Wi-Fi AND BT MEASUREMENT RESULT	41
12 SIMULTANEOUS TX SAR CONSIDERATIONS.....	42
12.1 INTRODUCTION.....	42
12.2 TRANSMIT ANTENNA SEPARATION DISTANCES	42
12.3 SAR MEASUREMENT POSITIONS	43
12.4 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	43
13 EVALUATION OF SIMULTANEOUS.....	44
14 SAR TEST RESULT	45
14.1 THE EVALUATION OF MULTI-BATTERIES	45
14.2 SAR RESULTS FOR FAST SAR.....	46
14.3 SAR RESULTS FOR STANDARD PROCEDURE	54
14.4 WLAN EVALUATION FOR 2.4G	58
15 SAR MEASUREMENT VARIABILITY.....	61
16 MEASUREMENT UNCERTAINTY	62
16.1 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHz~3GHz)	62
16.2 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (3~6GHz)	63
16.3 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHz~3GHz)	64
16.4 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (3~6GHz).....	65
17 MAIN TEST INSTRUMENTS.....	66
ANNEX A GRAPH RESULTS.....	67
ANNEX B SYSTEM VERIFICATION RESULTS	107
ANNEX C SAR MEASUREMENT SETUP	118
ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	124
ANNEX E EQUIVALENT MEDIA RECIPES	127
ANNEX F SYSTEM VALIDATION	128
ANNEX G PROBE CALIBRATION CERTIFICATE.....	129
ANNEX H DIPOLE CALIBRATION CERTIFICATE	140
ANNEX I ACCREDITATION CERTIFICATE.....	180

1 Test Laboratory

1.1 Testing Location

Company Name:	CTTL(Shouxiang)
Address:	No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191

1.2 Testing Environment

Temperature:	18°C~25°C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg


1.3 Project Data

Project Leader:	Qi Dianyuan
Test Engineer:	Lin Xiaojun
Testing Start Date:	March 29, 2018
Testing End Date:	April 1, 2018


1.4 Signature



Lin Xiaojun
(Prepared this test report)

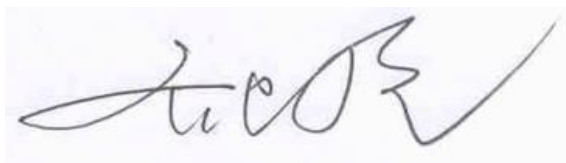

Qi Dianyuan
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2 Statement of Compliance

The maximum results of SAR found during testing for LG Electronics MobileComm USA, Inc. Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN LM-X410FC,LMX410FC,X410FC ; LM-X410FO,LMX410FO,X410FO are as follows:

Table 2.1: Highest Reported SAR (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g(W/kg)	Equipment Class
Head (Separation Distance 0mm)	GSM 850	0.69	PCE
	PCS 1900	0.20	
	UMTS FDD 5	0.28	
	UMTS FDD 4	0.15	
	UMTS FDD 2	0.41	
	LTE Band 2	0.67	
	LTE Band 4	0.16	
	LTE Band 5	0.30	
	LTE Band 7	0.25	
	WLAN 2.4 GHz	0.64	DTS
Hotspot (Separation Distance 10mm)	GSM 850	0.74	PCE
	PCS 1900	1.25	
	UMTS FDD 5	0.39	
	UMTS FDD 4	1.21	
	UMTS FDD 2	0.99	
	LTE Band 2	1.29	
	LTE Band 4	1.10	
	LTE Band 5	0.48	
	LTE Band 7	0.74	
	WLAN 2.4 GHz	0.16	DTS

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

For body operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report. The highest reported SAR value is obtained at the case of **(Table 2.1)**, and the values are: **1.29 W/kg(1g)**.

Table 2.2: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.67	0.64	1.31
	Right hand, Touch cheek	0.69	0.23	0.92
Highest reported SAR value for Body	Rear	1.13	0.16	1.29
	Bottom	1.29	/	1.29

Table 2.3: The sum of reported SAR values for main antenna and BT

	Position	Main antenna	BT	Sum
Maximum reported SAR value for Head	Right hand, Touch cheek	0.69	0.23 ^[1]	0.92
Maximum reported SAR value for Body	Rear	1.13	0.12 ^[1]	1.25
	Bottom	1.29	/	1.29

[1] - Estimated SAR for Bluetooth (see the table 13.3)

According to the above tables, the highest sum of reported SAR values is **1.31 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.

According to the KDB648474 D04, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB Publication 865664 D01 to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg

Table 2.4: 0mm Reported SAR for phablet (10g)

Exposure Configuration	Technology Band	Highest Reported SAR 10g(W/kg)	Limit 10g (W/kg)
Hotspot (Separation Distance 0mm)	PCS 1900	3.21	4.0
	WCDMA 1700	2.01	4.0
	LTE Band 2	2.93	4.0

3 Client Information

3.1 Applicant Information

Company Name:	LG Electronics MobileComm USA, Inc.
Address/Post:	1000 Sylvan Avenue, Englewood Cliffs NJ 07632
City:	/
Country:	/
Contact Person:	/
E-mail:	/
Telephone:	/
Fax:	/

3.2 Manufacturer Information

Company Name:	LG Electronics Inc.
Address/Post:	LG Twin Tower 20, Yeouido-dong, Yeongdeungpo-gu Seoul, Korea 150-721
City:	/
Country:	/
Contact Person:	/
E-mail:	/
Telephone:	/
Fax:	/

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN
Model name:	LM-X410FC,LMX410FC,X410FC ; LM-X410FO,LMX410FO,X410FO
Operating mode(s):	GSM 850/900/1800/1900, UMTS FDD 1/2/4/5/8, BT, Wi-Fi LTE Band 2/3/4/5/7/8/28
Tested Tx Frequency:	825 – 848.8 MHz (GSM 850)
	1850.2 – 1910 MHz (GSM 1900)
	826.4–846.6 MHz (WCDMA 850 Band V)
	1712.4 – 1752.6 MHz (WCDMA 1700 Band IV)
	1852.4–1907.6 MHz (WCDMA1900 Band II)
	1860 – 1900 MHz (LTE Band 2)
	1720 – 1745 MHz (LTE Band 4)
	824.7 – 848.3 MHz (LTE Band 5)
	2502.5 – 2567.5 MHz (LTE Band 7)
	2412 – 2462 MHz (Wi-Fi 2.4G)
GPRS/EGPRS Multislot Class:	12
GPRS capability Class:	B
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Hotspot mode:	Support
VoIP:	Support
Product Dimension:	L: 146.3mm W: 73.2mm overall diagonal: 163.6mm

4.2 Internal Identification of EUT used during the test

EUT ID*	IMEI	HW	SW Version
EUT1	356699090006981	Rev.1.0	V09p
EUT2	356699090005520	Rev.1.0	V09p
EUT3	356699090005330	Rev.1.0	V09p
EUT4	356699090006585	Rev.1.0	V09p
EUT5	356699090002121	Rev.1.0	V09p
EUT6	356699090007419	Rev.1.0	V09p

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT1&2&3&4 and conducted power with the EUT5&6.

4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	BL-T36	EAC63778201	Shenzhen BYD Lithium Battery Company Limited
AE2	Battery	BL-T36	EAC63638201	TOCAD

*AE ID: is used to identify the test sample in the lab internally.

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1–1992:IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528:2013 Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

KDB447498 D01 General RF Exposure Guidance v06 Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB648474 D04 Handset SAR v01r03 SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D01 SAR test for 3G devices v03r01 SAR Measurement Procedures for 3G Devices

KDB941225 D05 SAR for LTE Devices v02r05 SAR Evaluation Considerations for LTE Devices

KDB941225 D06 Hotspot Mode SAR v02r01 SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB248227 D01 802.11 Wi-Fi SAR v02r02 SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

KDB865664 D01SAR measurement 100 MHz to 6 GHz v01r04 SAR Measurement Requirements for 100 MHz to 6 GHz.

KDB865664 D02RF Exposure Reporting v01r02 RF Exposure Compliance Reporting and Documentation Considerations

6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid

Frequency(MHz)	Liquid Type	Conductivity(σ)	$\pm 5\%$ Range	Permittivity(ϵ)	$\pm 5\%$ Range
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1750	Head	1.37	1.30~1.44	40.08	38.1~42.1
1750	Body	1.49	1.42~1.56	53.4	50.7~56.1
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3
2600	Head	1.96	1.86~2.06	39.01	37.1~41.0
2600	Body	2.16	2.05~2.27	52.5	49.9~55.1

7.2 Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Type	Frequency	Permittivity ϵ	Drift (%)	Conductivity σ (S/m)	Drift (%)
2018-3-30	Head	835 MHz	41.76	0.63	0.908	0.89
	Body	835 MHz	55.91	1.29	0.979	0.93
2018-3-31	Head	1750 MHz	40.41	0.82	1.421	3.72
	Body	1750 MHz	53.72	0.60	1.506	1.07
2018-3-29	Head	1900 MHz	40.61	1.53	1.411	0.79
	Body	1900 MHz	52.71	-1.11	1.527	0.46
2018-4-1	Head	2450 MHz	38.91	-0.74	1.811	0.61
	Body	2450 MHz	52.09	-1.16	1.982	1.64
2018-4-1	Head	2600 MHz	38.49	-1.33	1.949	-0.56
	Body	2600 MHz	51.81	-1.31	2.14	-0.93

Note: The liquid temperature is 22.0°C




Picture 7-1 Liquid depth in the Head Phantom (835 MHz)




Picture 7-2 Liquid depth in the Flat Phantom (835 MHz)



Picture 7-3 Liquid depth in the Head Phantom (1750 MHz)

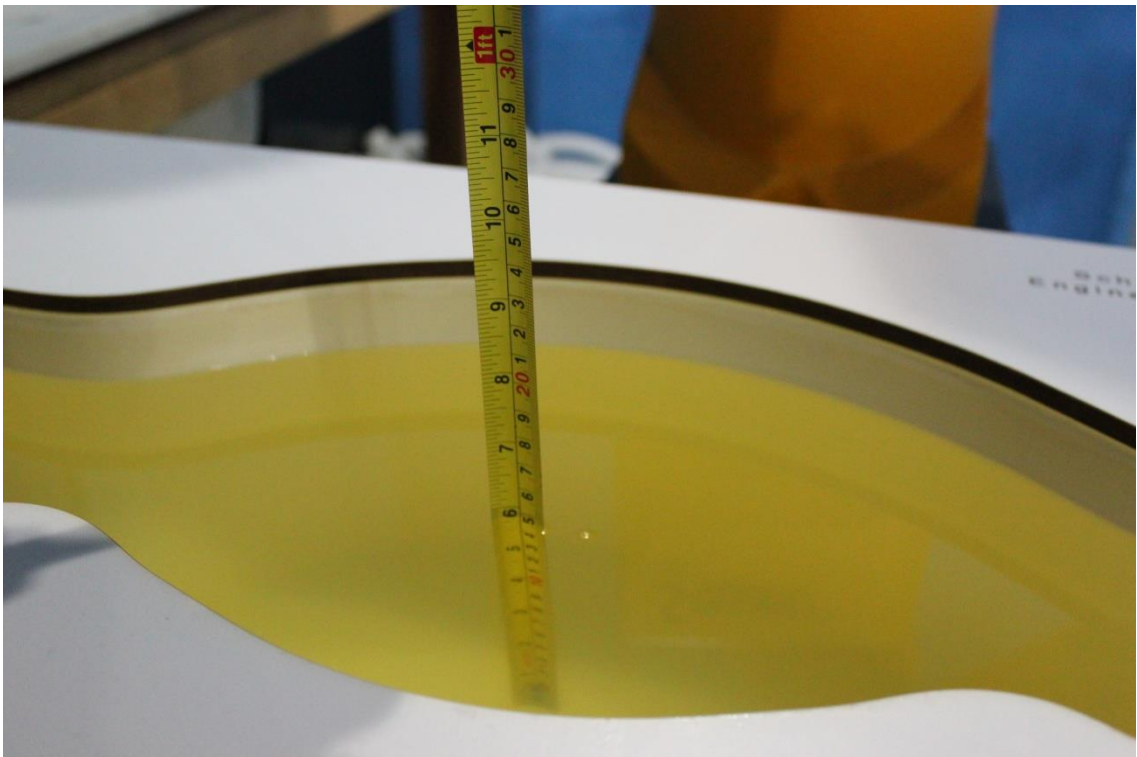

Picture 7-4 Liquid depth in the Flat Phantom (1750MHz)

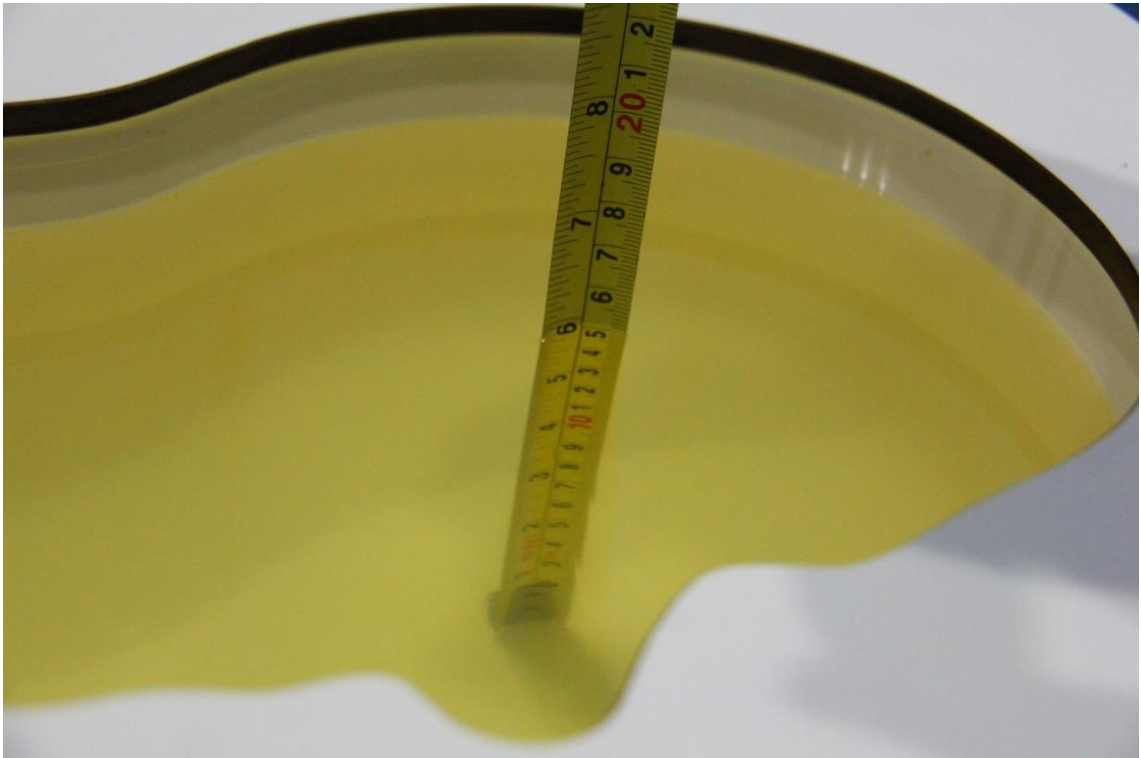


Picture 7-5 Liquid depth in the Head Phantom (1900 MHz)



Picture 7-6 Liquid depth in the Flat Phantom (1900MHz)




Picture 7-7 Liquid depth in the Head Phantom (2450MHz)

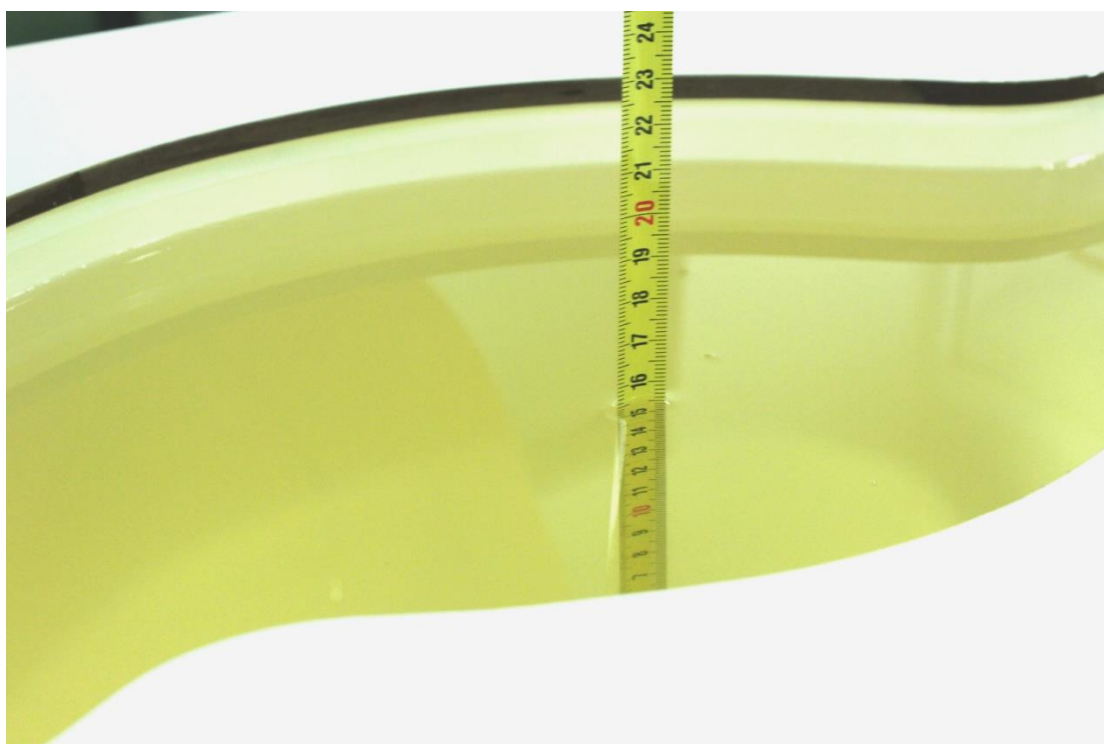

Picture 7-8 Liquid depth in the Flat Phantom (2450MHz)



Picture 7-9 Liquid depth in the Head Phantom (2600 MHz Head)

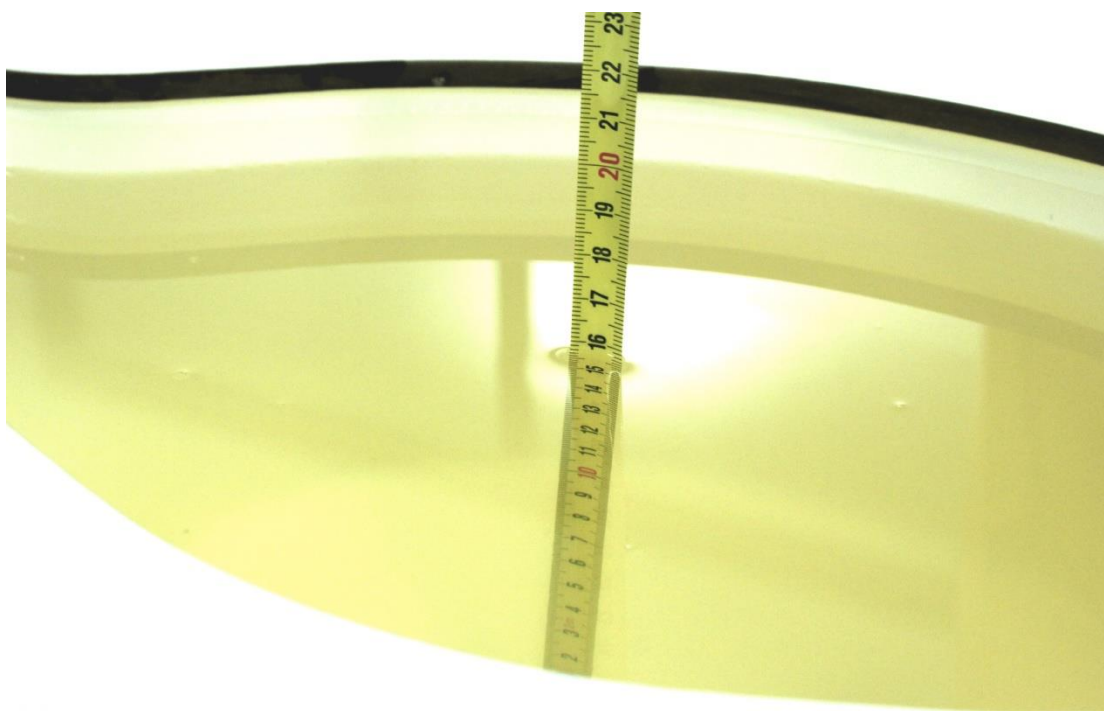


Picture 7-10 Liquid depth in the Flat Phantom (2600MHz)

8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

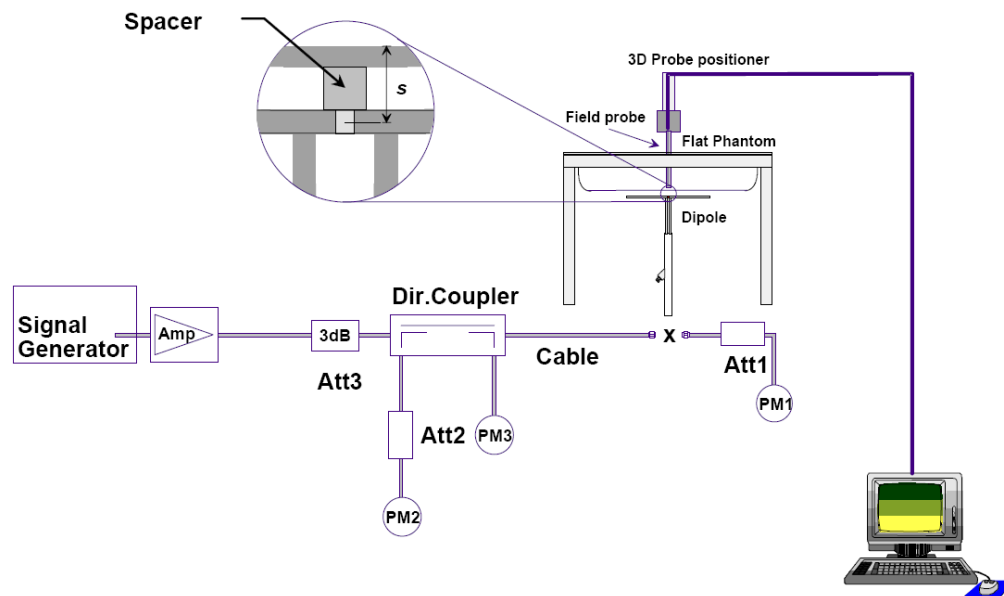

Picture 8.1 System Setup for System Evaluation



Picture 8.2 Photo of Dipole Setup

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value(W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2018-3-30	835 MHz	6.06	9.37	6.12	9.48	0.99%	1.17%
2018-3-31	1750 MHz	19.4	36.7	19.5	36.7	0.62%	0.05%
2018-3-29	1900 MHz	21.0	40.0	21.5	40.8	2.48%	2.00%
2018-4-1	2450 MHz	24.7	52.2	25.1	53.2	1.54%	1.92%
2018-4-1	2600 MHz	25.8	57.9	26.2	58.4	1.55%	0.86%

Table 8.2: System Verification of Body

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2018-3-30	835 MHz	6.12	9.41	6.36	9.72	3.92%	3.29%
2018-3-31	1750 MHz	19.8	37.1	19.96	37.68	0.81%	1.56%
2018-3-29	1900 MHz	21.5	40.5	21.96	41.60	2.14%	2.72%
2018-4-1	2450 MHz	23.8	50.4	24.32	52.00	2.18%	3.17%
2018-4-1	2600 MHz	24.8	55.5	25.40	57.20	2.42%	3.06%

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

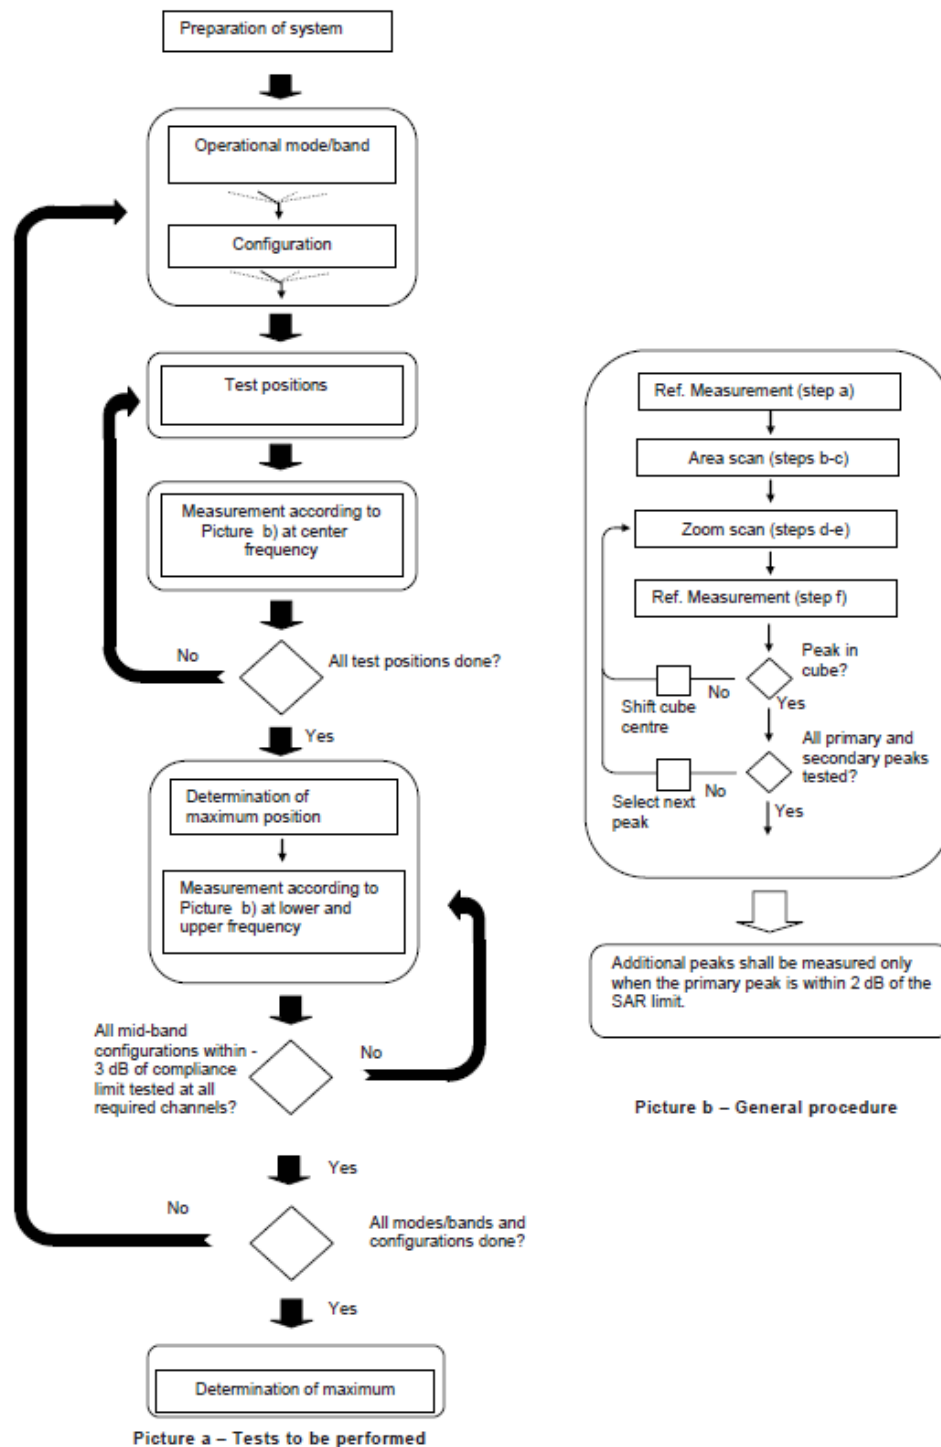

Picture 9.1Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the

higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.5	1.5	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	1.5	1.5	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	1.5	1.5	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	1.5	1.5	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.5	1.5	21	81

Rel.8 DC-HSDPA (Cat 24)

SAR test exclusion for Rel.8 DC-HSDPA must satisfy the SAR test exclusion requirements of Rel.5 HSDPA. SAR test exclusion for DC-HSDPA devices is determined by power measurements according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to qualify for SAR test exclusion.

9.4 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Rohde & Schwarz CMW500. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the CMW 500.

It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

TDD test:

TDD testing is performed using guidance from FCC KDB 941225 D05 v02r05 and the SAR test guidance provided in April 2013 TCB works hop notes. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05 v02r05. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211.

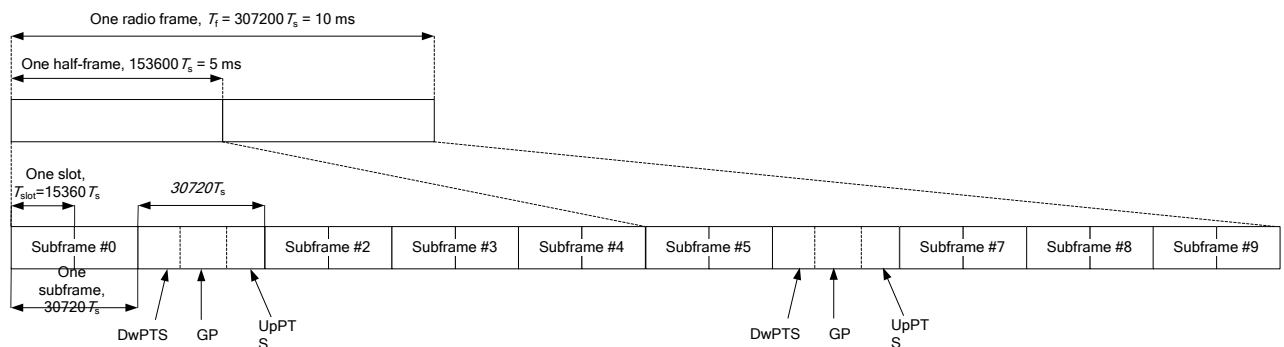


Figure 9.2: Frame structure type 2 (for 5 ms switch-point periodicity)

Table 9.1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 9.2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Duty factor is calculated by:

Duty factor = uplink frame*6+UpPTS*2/one frame length

$$= (30720 \cdot T_s * 6 + 5120 \cdot T_s * 2) / 307200 \cdot T_s$$

$$= 0.633$$

According to the KDB 447498 D01, SAR should be evaluated at more than 3 frequencies for devices supporting transmit bands wider than 100MHz. Oct.2014 FCC-TCB conference notes (Dec. 2014 rev.) specifies the 5 test channels to use for 3GPP band 41 SAR evaluation.

9.5 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.6 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-gSAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

11 Conducted Output Power

11.1 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11.1-1: The conducted power measurement results for GSM, GPRS and EGPRS

GSM 850 Speech (GMSK)	Measured Power (dBm)			Tune up	calculation	Averaged Power (dBm)		
	251	190	128			251	190	128
1 Txslot	32.72	32.72	32.75	33.5	/	/	/	/
GSM 850 GPRS (GMSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	251	190	128			251	190	128
1 Txslot	32.71	32.73	32.75	33.5	-9.03	23.68	23.70	23.72
2 Txslots	32.03	32.04	32.05	32.5	-6.02	26.01	26.02	26.03
3Txslots	29.27	29.26	29.29	30.5	-4.26	25.01	25.00	25.03
4 Txslots	28.32	28.29	28.33	29.5	-3.01	25.31	25.28	25.32
GSM 850 EGPRS (GMSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	251	190	128			251	190	128
1 Txslot	32.72	32.73	32.76	33.5	-9.03	23.69	23.70	23.73
2 Txslots	32.04	32.04	32.06	32.5	-6.02	26.02	26.02	26.04
3Txslots	29.26	29.25	29.29	30.5	-4.26	25.00	24.99	25.03
4 Txslots	28.31	28.28	28.34	29.5	-3.01	25.30	25.27	25.33
GSM 850 EGPRS (8PSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	251	190	128			251	190	128
1 Txslot	26.83	26.82	26.75	27.5	-9.03	17.80	17.79	17.72
2 Txslots	25.83	25.79	25.69	26.5	-6.02	19.81	19.77	19.67
3Txslots	23.69	23.79	23.71	24.5	-4.26	19.43	19.53	19.45
4 Txslots	22.54	22.56	22.50	23.5	-3.01	19.53	19.55	19.49
PCS1900 Speech (GMSK)	Measured Power (dBm)			Tune up	calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	29.41	29.37	29.40	30.5	/	/	/	/
PCS1900 GPRS (GMSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	29.41	29.37	29.40	30.5	-9.03	20.38	20.34	20.37
2 Txslots	28.78	28.75	28.79	29.5	-6.02	22.76	22.73	22.77
3Txslots	26.23	26.10	25.99	27	-4.26	21.97	21.84	21.73
4 Txslots	25.26	25.12	25.01	26	-3.01	22.25	22.11	22.00
PCS1900 EGPRS (GMSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	29.42	29.38	29.41	30.5	-9.03	20.39	20.35	20.38
2 Txslots	28.79	28.74	28.80	29.5	-6.02	22.77	22.72	22.78

3Txslots	26.23	26.11	25.99	27	-4.26	21.97	21.85	21.73
4 Txslots	25.26	25.12	25.01	26	-3.01	22.25	22.11	22.00
PCS1900 EGPRS (8PSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	25.74	25.76	25.75	26.5	-9.03	16.71	16.73	16.72
2 Txslots	24.57	24.62	24.59	25.5	-6.02	18.55	18.60	18.57
3Txslots	22.46	22.61	22.51	23.5	-4.26	18.20	18.35	18.25
4 Txslots	21.03	21.09	21.09	22.5	-3.01	18.02	18.08	18.08

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 2Txslots for GSM850 and GSM1900.

11.2 WCDMA Measurement result

Table 11.2-1: The conducted Power for WCDMA

Item	band	FDDV result			
	ARFCN	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)	Tune up
WCDMA	1	23.54	23.57	23.53	24.5
HSUPA	1	21.43	21.46	21.42	22.5
	2	21.39	21.18	21.12	22.5
	3	22.2	22.09	22.07	23.5
	4	20.89	20.61	20.60	22
	5	22.32	22.10	22.23	23.5
DC-HSDPA	1	23.24	23.20	23.22	24
	2	23.19	23.21	23.19	24
	3	22.71	22.72	22.72	24
	4	22.72	22.73	22.70	24
Item	band	FDDIV result			
	ARFCN	1513 (1752.6MHz)	1412 (1732.4MHz)	1312 (1712.4MHz)	
WCDMA	1	23.21	23.14	23.17	24
HSUPA	1	21.11	21.03	21.02	22
	2	20.95	21.00	20.89	22
	3	21.53	21.50	21.47	23
	4	20.08	20.07	20.07	21.5
	5	21.79	21.76	21.52	23

DC-HSDPA	1	23.4	23.25	23.30	23.5
	2	23.37	23.26	23.29	23.5
	3	22.9	22.80	22.76	23.5
	4	22.87	22.79	22.79	23.5
Item	band	FDDII result			
	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)	
WCDMA	1	22.75	22.67	22.72	23.5
HSUPA	1	20.81	20.59	20.62	21.5
	2	20.78	20.62	20.68	21.5
	3	21.76	21.62	21.65	22.5
	4	20.32	20.15	20.16	21
	5	21.76	21.60	21.61	22.5
DC-HSDPA	1	22.99	22.89	22.87	23
	2	22.98	22.88	22.89	23
	3	22.44	22.32	22.37	23
	4	22.45	22.31	22.38	23

11.3 LTE Measurement result

Table 11.3-1: The conducted Power for LTE

Band 2							
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
	RB offset (Start RB)			Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
1.4 MHz	1RB High (5)	1909.3	24	23.07	0	22.43	1
		1880	24	22.98	0	22.41	1
		1850.7	24	22.93	0	22.08	1
	1RB Middle (3)	1909.3	24	23.03	0	22.35	1
		1880	24	22.99	0	22.33	1
		1850.7	24	22.95	0	21.98	1
	1RB Low (0)	1909.3	24	23.06	0	22.48	1
		1880	24	22.98	0	22.41	1
		1850.7	24	22.91	0	22.06	1
	3RB High (3)	1909.3	24	23.16	0	22.15	1
		1880	24	23.10	0	22.35	1
		1850.7	24	23.05	0	22.37	1
	3RB Middle (1)	1909.3	24	23.06	0	22.16	1
		1880	24	23.04	0	22.25	1
		1850.7	24	23.05	0	22.25	1
	3RB Low (0)	1909.3	24	23.11	0	22.22	1
		1880	24	23.10	0	22.30	1
		1850.7	24	23.10	0	22.30	1

	6RB (0)	1909.3	24	22.08	1	21.15	2
		1880	24	21.96	1	20.88	2
		1850.7	24	21.98	1	21.10	2
3 MHz	1RB High (14)	1908.5	24	23.02	0	21.89	1
		1880	24	23.02	0	22.34	1
		1851.5	24	22.93	0	21.96	1
	1RB Middle (7)	1908.5	24	22.99	0	21.92	1
		1880	24	23.02	0	22.34	1
		1851.5	24	22.95	0	21.98	1
	1RB Low (0)	1908.5	24	22.99	0	21.89	1
		1880	24	23.02	0	22.34	1
		1851.5	24	22.96	0	22.01	1
	8RB High (7)	1908.5	24	22.16	1	21.26	2
		1880	24	22.11	1	21.17	2
		1851.5	24	22.11	1	21.12	2
	8RB Middle (4)	1908.5	24	22.16	1	21.25	2
		1880	24	22.09	1	21.17	2
		1851.5	24	22.08	1	21.10	2
	8RB Low (0)	1908.5	24	22.11	1	21.21	2
		1880	24	22.05	1	21.14	2
		1851.5	24	22.05	1	21.06	2
	15RB (0)	1908.5	24	22.09	1	21.14	2
		1880	24	22.05	1	21.08	2
		1851.5	24	22.06	1	21.00	2
5 MHz	1RB High (24)	1907.5	24	23.00	0	22.04	1
		1880	24	22.89	0	22.34	1
		1852.5	24	22.92	0	21.95	1
	1RB Middle (12)	1907.5	24	23.04	0	22.09	1
		1880	24	22.95	0	22.42	1
		1852.5	24	23.00	0	22.04	1
	1RB Low (0)	1907.5	24	22.98	0	22.01	1
		1880	24	22.87	0	22.35	1
		1852.5	24	22.95	0	21.99	1
	12RB High (13)	1907.5	24	21.97	1	21.03	2
		1880	24	21.94	1	21.05	2
		1852.5	24	21.96	1	20.98	2
	12RB Middle (6)	1907.5	24	21.97	1	21.01	2
		1880	24	21.94	1	21.06	2
		1852.5	24	21.96	1	20.99	2
	12RB Low (0)	1907.5	24	21.99	1	21.04	2
		1880	24	21.94	1	21.06	2
		1852.5	24	21.96	1	20.98	2
	25RB (0)	1907.5	24	21.98	1	20.96	2
		1880	24	21.94	1	20.97	2
		1852.5	24	21.95	1	20.88	2
10 MHz	1RB High (49)	1905	24	23.02	0	21.89	1
		1880	24	23.02	0	22.30	1
		1855	24	22.94	0	21.94	1

	1RB Middle (24)	1905	24	22.98	0	21.84	1
		1880	24	23.01	0	22.30	1
		1855	24	22.92	0	21.92	1
	1RB Low (0)	1905	24	22.95	0	21.86	1
		1880	24	23.01	0	22.33	1
		1855	24	22.99	0	22.00	1
	25RB High (25)	1905	24	21.93	1	20.93	2
		1880	24	21.92	1	20.94	2
		1855	24	21.87	1	20.97	2
	25RB Middle (12)	1905	24	21.96	1	20.98	2
		1880	24	21.94	1	20.97	2
		1855	24	21.92	1	21.00	2
	25RB Low (0)	1905	24	22.03	1	21.04	2
		1880	24	21.92	1	20.96	2
		1855	24	21.91	1	21.01	2
	50RB (0)	1905	24	21.99	1	20.97	2
		1880	24	21.91	1	20.93	2
		1855	24	21.91	1	20.92	2
15 MHz	1RB High (74)	1902.5	24	22.98	0	21.89	1
		1880	24	22.99	0	22.30	1
		1857.5	24	22.98	0	22.31	1
	1RB Middle (37)	1902.5	24	22.93	0	21.84	1
		1880	24	22.99	0	22.29	1
		1857.5	24	22.95	0	22.27	1
	1RB Low (0)	1902.5	24	22.98	0	21.88	1
		1880	24	23.05	0	22.35	1
		1857.5	24	23.07	0	22.40	1
	36RB High (38)	1902.5	24	21.94	1	20.90	2
		1880	24	21.95	1	20.97	2
		1857.5	24	21.88	1	20.81	2
	36RB Middle (19)	1902.5	24	21.96	1	20.94	2
		1880	24	21.95	1	20.98	2
		1857.5	24	21.91	1	20.86	2
	36RB Low (0)	1902.5	24	22.03	1	21.00	2
		1880	24	21.96	1	20.98	2
		1857.5	24	21.94	1	20.89	2
	75RB (0)	1902.5	24	22.00	1	20.97	2
		1880	24	21.96	1	20.95	2
		1857.5	24	21.91	1	20.88	2
20 MHz	1RB High (99)	1900	24	23.33	0	22.49	1
		1880	24	23.23	0	22.41	1
		1860	24	23.26	0	22.51	1
	1RB Middle (50)	1900	24	22.99	0	22.40	1
		1880	24	22.97	0	22.36	1
		1860	24	22.91	0	22.41	1
	1RB Low (0)	1900	24	23.04	0	22.49	1
		1880	24	23.03	0	22.41	1
		1860	24	23.06	0	22.54	1

	50RB High (50)	1900	24	21.84	1	20.85	2
		1880	24	21.94	1	20.89	2
		1860	24	21.82	1	20.86	2
	50RB Middle (25)	1900	24	21.98	1	20.98	2
		1880	24	21.95	1	20.91	2
		1860	24	21.86	1	20.89	2
	50RB Low (0)	1900	24	22.08	1	21.11	2
		1880	24	22.02	1	20.99	2
		1860	24	21.91	1	20.94	2
	100RB (0)	1900	24	22.00	1	20.99	2
		1880	24	21.96	1	20.97	2
		1860	24	21.85	1	20.91	2

Band 4							
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
	RB offset (Start RB)			Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
1.4 MHz	1RB High (5)	1754.3	23.5	22.19	0	21.40	1
		1732.5	23.5	22.21	0	21.66	1
		1710.7	23.5	22.16	0	21.34	1
	1RB Middle (3)	1754.3	23.5	22.19	0	21.31	1
		1732.5	23.5	22.22	0	21.58	1
		1710.7	23.5	22.17	0	21.23	1
	1RB Low (0)	1754.3	23.5	22.19	0	21.37	1
		1732.5	23.5	22.20	0	21.66	1
		1710.7	23.5	22.12	0	21.30	1
	3RB High (3)	1754.3	23.5	22.37	0	21.40	1
		1732.5	23.5	22.34	0	21.64	1
		1710.7	23.5	22.30	0	21.63	1
	3RB Middle (1)	1754.3	23.5	22.25	0	21.42	1
		1732.5	23.5	22.27	0	21.53	1
		1710.7	23.5	22.29	0	21.51	1
	3RB Low (0)	1754.3	23.5	22.32	0	21.47	1
		1732.5	23.5	22.33	0	21.58	1
		1710.7	23.5	22.36	0	21.54	1
	6RB (0)	1754.3	23.5	21.19	1	20.36	2
		1732.5	23.5	21.16	1	20.12	2
		1710.7	23.5	21.18	1	20.34	2
3 MHz	1RB High (14)	1753.5	23.5	22.17	0	21.14	1
		1732.5	23.5	22.26	0	21.61	1
		1711.5	23.5	22.18	0	21.25	1
	1RB Middle (7)	1753.5	23.5	22.15	0	21.13	1
		1732.5	23.5	22.27	0	21.62	1
		1711.5	23.5	22.20	0	21.26	1
	1RB Low (0)	1753.5	23.5	22.14	0	21.13	1
		1732.5	23.5	22.25	0	21.61	1
		1711.5	23.5	22.19	0	21.28	1

	8RB High (7)	1753.5	23.5	21.32	1	20.47	2
		1732.5	23.5	21.33	1	20.46	2
		1711.5	23.5	21.37	1	20.40	2
	8RB Middle (4)	1753.5	23.5	21.32	1	20.46	2
		1732.5	23.5	21.31	1	20.44	2
		1711.5	23.5	21.33	1	20.37	2
	8RB Low (0)	1753.5	23.5	21.27	1	20.44	2
		1732.5	23.5	21.28	1	20.43	2
		1711.5	23.5	21.29	1	20.34	2
	15RB (0)	1753.5	23.5	21.27	1	20.38	2
		1732.5	23.5	21.29	1	20.38	2
		1711.5	23.5	21.30	1	20.29	2
5 MHz	1RB High (24)	1752.5	23.5	22.22	0	21.34	1
		1732.5	23.5	22.18	0	21.68	1
		1712.5	23.5	22.26	0	21.33	1
	1RB Middle (12)	1752.5	23.5	22.28	0	21.39	1
		1732.5	23.5	22.25	0	21.76	1
		1712.5	23.5	22.34	0	21.38	1
	1RB Low (0)	1752.5	23.5	22.22	0	21.33	1
		1732.5	23.5	22.18	0	21.69	1
		1712.5	23.5	22.25	0	21.30	1
	12RB High (13)	1752.5	23.5	21.17	1	20.27	2
		1732.5	23.5	21.21	1	20.38	2
		1712.5	23.5	21.31	1	20.35	2
	12RB Middle (6)	1752.5	23.5	21.21	1	20.34	2
		1732.5	23.5	21.24	1	20.41	2
		1712.5	23.5	21.29	1	20.34	2
	12RB Low (0)	1752.5	23.5	21.25	1	20.35	2
		1732.5	23.5	21.26	1	20.43	2
		1712.5	23.5	21.26	1	20.32	2
	25RB (0)	1752.5	23.5	21.23	1	20.25	2
		1732.5	23.5	21.24	1	20.33	2
		1712.5	23.5	21.27	1	20.26	2
10 MHz	1RB High (49)	1750	23.5	22.26	0	21.25	1
		1732.5	23.5	22.36	0	21.67	1
		1715	23.5	22.30	0	21.32	1
	1RB Middle (24)	1750	23.5	22.21	0	21.19	1
		1732.5	23.5	22.31	0	21.64	1
		1715	23.5	22.26	0	21.29	1
	1RB Low (0)	1750	23.5	22.22	0	21.20	1
		1732.5	23.5	22.33	0	21.65	1
		1715	23.5	22.27	0	21.31	1
	25RB High (25)	1750	23.5	21.13	1	20.21	2
		1732.5	23.5	21.22	1	20.28	2
		1715	23.5	21.29	1	20.40	2
	25RB Middle (12)	1750	23.5	21.22	1	20.31	2
		1732.5	23.5	21.26	1	20.33	2
		1715	23.5	21.27	1	20.39	2

	25RB Low (0)	1750	23.5	21.26	1	20.34	2
		1732.5	23.5	21.28	1	20.34	2
		1715	23.5	21.22	1	20.32	2
	50RB (0)	1750	23.5	21.21	1	20.26	2
		1732.5	23.5	21.25	1	20.29	2
		1715	23.5	21.25	1	20.30	2
15 MHz	1RB High (74)	1747.5	23.5	22.31	0	21.26	1
		1732.5	23.5	22.38	0	21.72	1
		1717.5	23.5	22.42	0	21.80	1
	1RB Middle (37)	1747.5	23.5	22.27	0	21.22	1
		1732.5	23.5	22.36	0	21.69	1
		1717.5	23.5	22.38	0	21.77	1
	1RB Low (0)	1747.5	23.5	22.34	0	21.28	1
		1732.5	23.5	22.43	0	21.75	1
		1717.5	23.5	22.42	0	21.82	1
	36RB High (38)	1747.5	23.5	21.24	1	20.25	2
		1732.5	23.5	21.26	1	20.33	2
		1717.5	23.5	21.34	1	20.32	2
	36RB Middle (19)	1747.5	23.5	21.31	1	20.33	2
		1732.5	23.5	21.32	1	20.37	2
		1717.5	23.5	21.33	1	20.32	2
	36RB Low (0)	1747.5	23.5	21.32	1	20.34	2
		1732.5	23.5	21.34	1	20.39	2
		1717.5	23.5	21.30	1	20.28	2
	75RB (0)	1747.5	23.5	21.28	1	20.29	2
		1732.5	23.5	21.33	1	20.33	2
		1717.5	23.5	21.32	1	20.32	2
20 MHz	1RB High (99)	1745	23.5	22.41	0	21.80	1
		1732.5	23.5	22.45	0	21.94	1
		1720	23.5	22.41	0	21.89	1
	1RB Middle (50)	1745	23.5	22.29	0	21.71	1
		1732.5	23.5	22.33	0	21.84	1
		1720	23.5	22.31	0	21.79	1
	1RB Low (0)	1745	23.5	22.38	0	21.78	1
		1732.5	23.5	22.44	0	21.92	1
		1720	23.5	22.40	0	21.88	1
	50RB High (50)	1745	23.5	21.22	1	20.20	2
		1732.5	23.5	21.19	1	20.24	2
		1720	23.5	21.31	1	20.35	2
	50RB Middle (25)	1745	23.5	21.31	1	20.30	2
		1732.5	23.5	21.30	1	20.35	2
		1720	23.5	21.31	1	20.36	2
	50RB Low (0)	1745	23.5	21.43	1	20.42	2
		1732.5	23.5	21.35	1	20.42	2
		1720	23.5	21.29	1	20.30	2
	100RB (0)	1745	23.5	21.32	1	20.32	2
		1732.5	23.5	21.29	1	20.33	2
		1720	23.5	21.29	1	20.31	2

Band 5							
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
	RB offset (Start RB)			Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
1.4 MHz	1RB High (5)	848.3	25	24.03	0	23.37	1
		836.5	25	24.13	0	23.20	1
		824.7	25	24.14	0	23.23	1
	1RB Middle (3)	848.3	25	24.00	0	23.29	1
		836.5	25	24.15	0	23.10	1
		824.7	25	24.12	0	23.14	1
	1RB Low (0)	848.3	25	24.04	0	23.36	1
		836.5	25	24.16	0	23.17	1
		824.7	25	24.15	0	23.19	1
	3RB High (3)	848.3	25	24.04	0	23.30	1
		836.5	25	24.21	0	23.47	1
		824.7	25	24.20	0	23.24	1
	3RB Middle (1)	848.3	25	23.98	0	23.22	1
		836.5	25	24.20	0	23.37	1
		824.7	25	24.12	0	23.25	1
	3RB Low (0)	848.3	25	24.01	0	23.27	1
		836.5	25	24.23	0	23.40	1
		824.7	25	24.15	0	23.30	1
	6RB (0)	848.3	25	23.08	1	21.94	2
		836.5	25	23.16	1	22.23	2
		824.7	25	23.17	1	22.21	2
3 MHz	1RB High (14)	847.5	25	24.04	0	22.86	1
		836.5	25	24.20	0	23.45	1
		825.5	25	24.16	0	23.12	1
	1RB Middle (7)	847.5	25	24.02	0	22.88	1
		836.5	25	24.20	0	23.47	1
		825.5	25	24.14	0	23.11	1
	1RB Low (0)	847.5	25	24.05	0	22.89	1
		836.5	25	24.18	0	23.47	1
		825.5	25	24.12	0	23.11	1
	8RB High (7)	847.5	25	23.16	1	22.24	2
		836.5	25	23.31	1	22.34	2
		825.5	25	23.33	1	22.31	2
	8RB Middle (4)	847.5	25	23.18	1	22.24	2
		836.5	25	23.30	1	22.33	2
		825.5	25	23.29	1	22.28	2
	8RB Low (0)	847.5	25	23.15	1	22.22	2
		836.5	25	23.26	1	22.28	2
		825.5	25	23.25	1	22.24	2
	15RB (0)	847.5	25	23.12	1	22.13	2
		836.5	25	23.24	1	22.23	2
		825.5	25	23.25	1	22.18	2

5 MHz	1RB High (24)	846.5	25	24.09	0	23.10	1
		836.5	25	24.11	0	23.54	1
		826.5	25	24.19	0	23.20	1
	1RB Middle (12)	846.5	25	24.19	0	23.18	1
		836.5	25	24.18	0	23.63	1
		826.5	25	24.20	0	23.23	1
	1RB Low (0)	846.5	25	24.12	0	23.11	1
		836.5	25	24.14	0	23.57	1
		826.5	25	24.13	0	23.13	1
	12RB High (13)	846.5	25	23.04	1	22.07	2
		836.5	25	23.18	1	22.27	2
		826.5	25	23.20	1	22.19	2
	12RB Middle (6)	846.5	25	23.11	1	22.12	2
		836.5	25	23.20	1	22.29	2
		826.5	25	23.21	1	22.21	2
	12RB Low (0)	846.5	25	23.11	1	22.12	2
		836.5	25	23.19	1	22.30	2
		826.5	25	23.20	1	22.22	2
	25RB (0)	846.5	25	23.08	1	22.04	2
		836.5	25	23.16	1	22.20	2
		826.5	25	23.19	1	22.12	2
10 MHz	1RB High (49)	844.0	25	24.13	0	23.03	1
		836.5	25	24.24	0	23.06	1
		829.0	25	24.33	0	23.56	1
	1RB Middle (24)	844.0	25	24.09	0	23.04	1
		836.5	25	24.23	0	23.09	1
		829.0	25	24.25	0	23.50	1
	1RB Low (0)	844.0	25	24.16	0	23.11	1
		836.5	25	24.21	0	23.07	1
		829.0	25	24.20	0	23.45	1
	25RB High (25)	844.0	25	23.05	1	22.11	2
		836.5	25	23.14	1	22.14	2
		829.0	25	23.20	1	22.19	2
	25RB Middle (12)	844.0	25	23.11	1	22.17	2
		836.5	25	23.20	1	22.19	2
		829.0	25	23.21	1	22.21	2
	25RB Low (0)	844.0	25	23.16	1	22.21	2
		836.5	25	23.18	1	22.17	2
		829.0	25	23.22	1	22.24	2
	50RB (0)	844.0	25	23.10	1	22.11	2
		836.5	25	23.16	1	22.13	2
		829.0	25	23.22	1	22.20	2

Band 7							
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
	RB offset (Start RB)			Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
5 MHz	1RB High (24)	2567.5	22.5	21.57	0	20.67	1
		2535	22.5	21.46	0	21.03	1
		2502.5	22.5	21.57	0	20.62	1
	1RB Middle (12)	2567.5	22.5	21.63	0	20.73	1
		2535	22.5	21.52	0	21.08	1
		2502.5	22.5	21.65	0	20.67	1
	1RB Low (0)	2567.5	22.5	21.55	0	20.64	1
		2535	22.5	21.45	0	20.98	1
		2502.5	22.5	21.58	0	20.61	1
	12RB High (13)	2567.5	22.5	20.53	1	19.67	2
		2535	22.5	20.57	1	19.76	2
		2502.5	22.5	20.63	1	19.70	2
	12RB Middle (6)	2567.5	22.5	20.58	1	19.71	2
		2535	22.5	20.56	1	19.75	2
		2502.5	22.5	20.62	1	19.68	2
	12RB Low (0)	2567.5	22.5	20.60	1	19.73	2
		2535	22.5	20.55	1	19.76	2
		2502.5	22.5	20.58	1	19.66	2
	25RB (0)	2567.5	22.5	20.58	1	19.64	2
		2535	22.5	20.56	1	19.68	2
		2502.5	22.5	20.60	1	19.59	2
10 MHz	1RB High (49)	2565	22.5	21.60	0	20.56	1
		2535	22.5	21.69	0	21.05	1
		2505	22.5	21.64	0	20.69	1
	1RB Middle (24)	2565	22.5	21.55	0	20.49	1
		2535	22.5	21.63	0	20.98	1
		2505	22.5	21.60	0	20.65	1
	1RB Low (0)	2565	22.5	21.52	0	20.45	1
		2535	22.5	21.60	0	20.96	1
		2505	22.5	21.59	0	20.62	1
	25RB High (25)	2565	22.5	20.49	1	19.57	2
		2535	22.5	20.60	1	19.70	2
		2505	22.5	20.63	1	19.79	2
	25RB Middle (12)	2565	22.5	20.59	1	19.66	2
		2535	22.5	20.63	1	19.70	2
		2505	22.5	20.64	1	19.79	2
	25RB Low (0)	2565	22.5	20.62	1	19.71	2
		2535	22.5	20.58	1	19.68	2
		2505	22.5	20.60	1	19.75	2
	50RB (0)	2565	22.5	20.60	1	19.64	2
		2535	22.5	20.61	1	19.70	2
		2505	22.5	20.62	1	19.73	2

15 MHz	1RB High (74)	2562.5	22.5	21.55	0	20.52	1
		2535	22.5	21.65	0	21.04	1
		2507.5	22.5	21.64	0	21.04	1
	1RB Middle (37)	2562.5	22.5	21.53	0	20.48	1
		2535	22.5	21.61	0	21.00	1
		2507.5	22.5	21.64	0	21.03	1
	1RB Low (0)	2562.5	22.5	21.61	0	20.52	1
		2535	22.5	21.67	0	21.03	1
		2507.5	22.5	21.70	0	21.05	1
	36RB High (38)	2562.5	22.5	20.52	1	19.56	2
		2535	22.5	20.60	1	19.68	2
		2507.5	22.5	20.59	1	19.59	2
	36RB Middle (19)	2562.5	22.5	20.59	1	19.61	2
		2535	22.5	20.62	1	19.69	2
		2507.5	22.5	20.63	1	19.62	2
	36RB Low (0)	2562.5	22.5	20.66	1	19.67	2
		2535	22.5	20.61	1	19.68	2
		2507.5	22.5	20.62	1	19.60	2
	75RB (0)	2562.5	22.5	20.61	1	19.63	2
		2535	22.5	20.64	1	19.64	2
		2507.5	22.5	20.62	1	19.61	2
20 MHz	1RB High (99)	2560	22.5	21.63	0	21.10	1
		2535	22.5	21.66	0	21.09	1
		2510	22.5	21.67	0	21.22	1
	1RB Middle (50)	2560	22.5	21.58	0	21.02	1
		2535	22.5	21.60	0	21.03	1
		2510	22.5	21.63	0	21.18	1
	1RB Low (0)	2560	22.5	21.66	0	21.12	1
		2535	22.5	21.66	0	21.08	1
		2510	22.5	21.71	0	21.24	1
	50RB High (50)	2560	22.5	20.51	1	19.56	2
		2535	22.5	20.62	1	19.66	2
		2510	22.5	20.59	1	19.66	2
	50RB Middle (25)	2560	22.5	20.64	1	19.70	2
		2535	22.5	20.66	1	19.70	2
		2510	22.5	20.66	1	19.74	2
	50RB Low (0)	2560	22.5	20.73	1	19.80	2
		2535	22.5	20.65	1	19.69	2
		2510	22.5	20.67	1	19.74	2
	100RB (0)	2560	22.5	20.61	1	19.68	2
		2535	22.5	20.64	1	19.69	2
		2510	22.5	20.64	1	19.71	2

The device supports downlink Release 10 LTE Carrier Aggregation (CA) only. It supports a maximum of 2 carriers in the downlink. Other Release 10 features are not supported, including Uplink Carrier Aggregation, Enhanced SC-FDMA and Uplink MIMO or other antenna diversity configurations etc. All uplink communications are identical to the Release 8 Specifications. According to KDB 941225 D05A, the downlink LTE CA SAR test is not required and PAG requirements can be excluded.

The following conducted power measurement results of downlink LTE carrier aggregation are provided to quantify downlink only carrier aggregation SAR test exclusion per KDB 941225 D05A.

Uplink maximum output power is measured with downlink carrier aggregation active, using the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.

The conducted power measurement results of downlink LTE CA Conducted Power are as below:

DL LTE CA Class	PCC								SCC			Power		
	PCC Band	PCC Band width (MHz)	PCC UL RB size	PCC UL RB offset	PCC DL RB size	PCC DL RB offset	PCC UL Channel	PCC DL Channel	SCC Band	SCC Band width (MHz)	SCC DL Channel	Rel 8 LTE Tx Power (dBm)	Rel 10 DL LTE CA Tx Power (dBm)	Tune-up
7C	7	20	1	0	100	0	20850	2850	7	20	3048	21.71	21.42	22.5
4A-28A	4	20	1	99	100	0	20175	2175	28	20	9460	22.45	22.43	23.5
7A-28A	7	20	1	0	100	0	20850	2850	28	20	9460	21.71	21.47	22.5

Note: Testing is not required in bands or modes not intended/allowed for US operation.

11.4 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

Mode	Conducted Power (dBm)		
	Channel 0 (2402MHz)	Channel 39 (2441MHz)	Channel 78(2480MHz)
GFSK	5.68	7.24	5.28
Tune up	6	7.5	6.5
EDR2M-4_DQPSK	4.75	6.29	4.34
Tune up	5.5	7	6
EDR3M-8DPSK	4.78	6.33	4.38
Tune up	5.5	7	6

The average conducted power for Wi-Fi is as following:

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
11	16.75	16.53	16.62	16.73
6	16.64	/	/	/
1	15.89	/	/	/
Tune up	17	17	17	17

802.11g (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
11	15.14	15.08	15.12	15.11	14.96	14.67	14.41	14.36
6	15.01	/	/	/	/	/	/	/
1	14.19	/	/	/	/	/	/	/
Tune up	16	16	16	16	16	16	15.5	15.5

802.11n (dBm) - HT20 (2.4G)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
11	15.12	14.89	14.86	14.79	14.68	14.63	14.36	13.36
6	15.07	/	/	/	/	/	/	/
1	14.28	/	/	/	/	/	/	/
Tune up	16	16	16	16	16	16	15.5	15

12 Simultaneous TX SAR Considerations

12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter. For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

12.2 Transmit Antenna Separation Distances



Antenna	Mode	Band
① Main Ant	GSM	850.900.1800.1900 Tx,Rx
	WCDMA	B1.B2.B4.B5.B8. Tx .Rx
	LTE	B2.B3.B4.B5.B7.B8.B28. Tx .Rx
② Diversity Ant	WCDMA	B2.B4.B5.B8 Rx
	LTE	B2.B3.B4.B5.B7.B8.B28.Rx
③ GPS&WIFI&BT	GPS	1561GHz-1615GHz RX
	Wi-Fi	2.4GHz TX,RX
	BT	2400-2500MHz

Picture 12.1 Antenna Locations

12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
Main antenna	Yes	Yes	Yes	Yes	No	Yes
WLAN	Yes	Yes	No	Yes	Yes	No

12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR, where}$$

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Table 12.1: Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	Position	SAR test exclusion threshold(mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.441	Head	9.60	7.5	5.62	Yes
		Body	19.20	7.5	5.62	Yes
2.4GHz WLAN	2.45	Head	9.58	17	50.12	No
		Body	19.17	17	50.12	No

13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	Left hand, Touch cheek	0.67	0.64	1.31
	Right hand, Touch cheek	0.69	0.23	0.92
Highest reported SAR value for Body	Rear	1.13	0.16	1.29
	Bottom	1.29	/	1.29

Table 13.2: The sum of reported SAR values for main antenna and BT

	Position	Main antenna	BT	Sum
Maximum reported SAR value for Head	Right hand, Touch cheek	0.69	0.23 ^[1]	0.92
Maximum reported SAR value for Body	Rear	1.13	0.12 ^[1]	1.25
	Bottom	1.29	/	1.29

[1] - Estimated SAR for Bluetooth (see the table 13.3)

Table 13.3: Estimated SAR for Bluetooth

Mode/Band	F (GHz)	Position	Distance (mm)	Upper limit of power *		Estimated _{1g} (W/kg)
				dBm	mW	
Bluetooth	2.441	Head	5	7.5	5.62	0.23
Bluetooth	2.441	Body	10	7.5	5.62	0.12

* - Maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance,mm)]·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm;

where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Conclusion:

According to the above tables, the sum of reported SAR values is<1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.

14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.

The distance is 10 mm and just applied to the condition of body worn accessory.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-gSAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or more than 1.2W/kg.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where P_{Target} is the power of manufacturing upper limit;

P_{Measured} is the measured power in chapter 11.

Table 14.1: Duty Cycle

Mode	Duty Cycle
GSM	1:4
WCDMA & LTE	1:1

Note:

B1: The battery of EAC63778201

B2: The battery of EAC63638201

14.1 The evaluation of multi-batteries

We'll perform the head measurement in all bands with the primary battery depending on the evaluation of multi-batteries and retest on highest value point with other batteries. Then, repeat the measurement in the Body test.

Table 14.1-1: The evaluation of multi-batteries for Head Test

Frequency		Mode/Band	Side	Test Position	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
1880	661	GSM1900	Left	Touch	B1	0.166	0.09
1880	661	GSM1900	Left	Touch	B2	0.169	0.07

Note: According to the values in the above table, the battery of B2 is the primary battery.

We'll perform the head measurement with this battery and retest on highest value point with others.

Table 14.1-2: The evaluation of multi-batteries for Body Test

Frequency		Mode/Band	Test Position	Spacing (mm)	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
1850.2	512	GSM1900	Bottom	10	B1	1.06	0.11
1850.2	512	GSM1900	Bottom	10	B2	0.964	0.11

Note: According to the values in the above table, the battery of B1 is the primary battery.

We'll perform the body measurement with this battery and retest on highest value point with others.

14.2 SAR results for Fast SAR

Table 14.2-1: SAR Values (GSM 850 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
190	836.6	Left	Touch	/	32.04	32.5	0.363	0.40	0.498	0.55	0.01
190	836.6	Left	Tilt	/	32.04	32.5	0.276	0.31	0.365	0.41	0.16
251	848.8	Right	Touch	/	32.03	32.5	0.351	0.39	0.476	0.53	-0.03
190	836.6	Right	Touch	/	32.04	32.5	0.397	0.44	0.542	0.60	0.01
128	824.2	Right	Touch	Fig.1	32.05	32.5	0.464	0.51	0.621	0.69	0.02
190	836.6	Right	Tilt	/	32.04	32.5	0.297	0.33	0.381	0.42	0.06
128	824.2	Right	Touch	B1	32.05	32.5	0.450	0.50	0.583	0.65	-0.03

Note: the head SAR of GSM850 is tested with GPRS (2Txslots) mode because of VoIP.

Table 14.2-2: SAR Values (GSM 850 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode (number of timeslots)	Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
190	836.6	GPRS (2)	Front	/	32.04	32.5	0.409	0.45	0.525	0.58	0.02
251	848.8	GPRS (2)	Rear	/	32.03	32.5	0.379	0.42	0.566	0.63	-0.05
190	836.6	GPRS (2)	Rear	/	32.04	32.5	0.408	0.45	0.622	0.69	0.11
128	824.2	GPRS (2)	Rear	Fig.2	32.05	32.5	0.525	0.58	0.668	0.74	-0.03
190	836.6	GPRS (2)	Left	/	32.04	32.5	0.150	0.17	0.213	0.24	0.13
190	836.6	GPRS (2)	Right	/	32.04	32.5	0.381	0.42	0.551	0.61	-0.05
190	836.6	GPRS (2)	Bottom	/	32.04	32.5	0.060	0.07	0.100	0.11	0.07
128	824.2	EGPRS (2)	Rear	/	32.06	32.5	0.492	0.54	0.653	0.72	0.05
128	824.2	GPRS (2)	Rear	B2	32.05	32.5	0.504	0.56	0.658	0.73	0.19

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-3: SAR Values (GSM 1900 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
810	1909.8	Left	Touch	/	28.78	29.5	0.066	0.08	0.108	0.13	0.09
661	1880	Left	Touch	Fig.3	28.75	29.5	0.105	0.12	0.169	0.20	0.07
512	1850.2	Left	Touch	/	28.79	29.5	0.084	0.10	0.136	0.16	0.13
661	1880	Left	Tilt	/	28.75	29.5	0.072	0.09	0.114	0.14	-0.04
661	1880	Right	Touch	/	28.75	29.5	0.103	0.12	0.160	0.19	0.02
661	1880	Right	Tilt	/	28.75	29.5	0.048	0.06	0.072	0.09	0.14
661	1880	Left	Touch	B1	28.75	29.5	0.098	0.12	0.166	0.20	0.09

Note: the head SAR of GSM1900 is tested with GPRS (2Txslots) mode because of VoIP.

Table 14.2-4: SAR Values (GSM 1900 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode (number of timeslots)	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
661	1880	GPRS (2)	Front	/	28.75	29.5	0.286	0.34	0.500	0.59	0.07
661	1880	GPRS (2)	Rear	/	28.75	29.5	0.322	0.38	0.583	0.69	-0.01
661	1880	GPRS (2)	Left	/	28.75	29.5	0.093	0.11	0.151	0.18	0.16
661	1880	GPRS (2)	Right	/	28.75	29.5	0.139	0.17	0.223	0.27	0.03
810	1909.8	GPRS (2)	Bottom	/	28.78	29.5	0.364	0.43	0.707	0.83	0.01
661	1880	GPRS (2)	Bottom	/	28.75	29.5	0.446	0.53	0.847	1.01	0.09
512	1850.2	GPRS (2)	Bottom	Fig.4	28.79	29.5	0.564	0.66	1.06	1.25	0.11
512	1850.2	EGPRS (2)	Bottom	/	28.80	29.5	0.542	0.64	0.898	1.06	0.18
512	1850.2	GPRS (2)	Bottom	B2	28.79	29.5	0.553	0.65	0.964	1.14	0.11

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-5: SAR Values (WCDMA 850 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
4233	846.6	Left	Touch	Fig.5	23.54	24.5	0.168	0.21	0.221	0.28	0.04
4182	836.4	Left	Touch	/	23.57	24.5	0.161	0.20	0.214	0.27	-0.01
4132	826.4	Left	Touch	/	23.53	24.5	0.106	0.13	0.204	0.26	0.09
4182	836.4	Left	Tilt	/	23.57	24.5	0.106	0.13	0.136	0.17	-0.03
4182	836.4	Right	Touch	/	23.57	24.5	0.156	0.19	0.211	0.26	0.01
4182	836.4	Right	Tilt	/	23.57	24.5	0.106	0.13	0.137	0.17	0.19
4233	846.6	Left	Touch	B1	23.54	24.5	0.159	0.20	0.210	0.26	0.02

Table 14.2-6: SAR Values (WCDMA 850 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
4182	836.4	Front	/	23.57	24.5	0.190	0.24	0.243	0.30	0.05
4233	846.6	Rear	/	23.54	24.5	0.237	0.30	0.299	0.37	0.07
4182	836.4	Rear	Fig.6	23.57	24.5	0.248	0.31	0.317	0.39	-0.06
4132	826.4	Rear	/	23.53	24.5	0.231	0.29	0.291	0.36	-0.13
4182	836.4	Left	/	23.57	24.5	0.069	0.09	0.099	0.12	0.05
4182	836.4	Right	/	23.57	24.5	0.130	0.16	0.190	0.24	0.08
4182	836.4	Bottom	/	23.57	24.5	0.021	0.03	0.037	0.05	0.12
4182	836.4	Rear	B2	23.57	24.5	0.241	0.30	0.303	0.38	0.01

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-7: SAR Values (WCDMA 1700 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
1738	1752.6	Left	Touch	/	23.21	24	0.081	0.10	0.116	0.14	0.14
1637	1732.4	Left	Touch	Fig.7	23.14	24	0.082	0.10	0.122	0.15	0.09
1537	1712.4	Left	Touch	/	23.17	24	0.067	0.08	0.100	0.12	0.08
1637	1732.4	Left	Tilt	/	23.14	24	0.060	0.07	0.091	0.11	0.10
1637	1732.4	Right	Touch	/	23.14	24	0.074	0.09	0.113	0.14	-0.05
1637	1732.4	Right	Tilt	/	23.14	24	0.027	0.03	0.044	0.05	0.11
1637	1732.4	Left	Touch	B1	23.14	24	0.074	0.09	0.116	0.14	0.05

Table 14.2-8: SAR Values (WCDMA 1700 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
1637	1732.4	Front	/	23.14	24	0.312	0.38	0.532	0.65	0.01
1738	1752.6	Rear	/	23.21	24	0.498	0.60	0.942	1.13	0.04
1637	1732.4	Rear	/	23.14	24	0.483	0.59	0.890	1.08	-0.09
1537	1712.4	Rear	/	23.17	24	0.490	0.59	0.924	1.12	0.12
1637	1732.4	Left	/	23.14	24	0.040	0.05	0.063	0.08	0.18
1637	1732.4	Right	/	23.14	24	0.083	0.10	0.131	0.16	0.07
1738	1752.6	Bottom	/	23.21	24	0.534	0.64	0.978	1.17	0.02
1637	1732.4	Bottom	/	23.14	24	0.539	0.66	0.951	1.16	-0.06
1537	1712.4	Bottom	Fig.8	23.17	24	0.554	0.67	0.996	1.21	-0.04
1537	1712.4	Bottom	B2	23.17	24	0.528	0.64	0.903	1.09	0.01

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-9: SAR Values (WCDMA 1900 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
9938	1907.6	Left	Touch	/	22.75	23.5	0.169	0.20	0.275	0.33	0.09
9800	1880	Left	Touch	Fig.9	22.67	23.5	0.208	0.25	0.338	0.41	0.07
9662	1852.4	Left	Touch	/	22.72	23.5	0.177	0.21	0.288	0.34	0.13
9800	1880	Left	Tilt	/	22.67	23.5	0.124	0.15	0.196	0.24	-0.05
9800	1880	Right	Touch	/	22.67	23.5	0.232	0.28	0.336	0.41	0.14
9800	1880	Right	Tilt	/	22.67	23.5	0.136	0.16	0.213	0.26	-0.08
9800	1880	Left	Touch	B1	22.67	23.5	0.198	0.24	0.311	0.38	0.11

Table 14.1-10: SAR Values (WCDMA 1900 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
9938	1907.6	Front	/	22.75	23.5	0.379	0.45	0.692	0.82	0.06
9800	1880	Front	/	22.67	23.5	0.387	0.47	0.707	0.86	0.04
9662	1852.4	Front	/	22.72	23.5	0.373	0.45	0.681	0.81	-0.07
9938	1907.6	Rear	/	22.75	23.5	0.420	0.50	0.801	0.95	0.02
9800	1880	Rear	Fig.10	22.67	23.5	0.431	0.52	0.817	0.99	0.07
9662	1852.4	Rear	/	22.72	23.5	0.501	0.60	0.786	0.94	0.13
9938	1907.6	Left	/	22.75	23.5	0.405	0.48	0.708	0.84	0.09
9800	1880	Left	/	22.67	23.5	0.415	0.50	0.722	0.87	0.11
9662	1852.4	Left	/	22.72	23.5	0.398	0.48	0.694	0.83	0.05
9800	1880	Right	/	22.67	23.5	0.365	0.44	0.657	0.80	-0.05
9800	1880	Bottom	/	22.67	23.5	0.100	0.12	0.185	0.22	0.08
9800	1880	Rear	B2	22.67	23.5	0.415	0.50	0.791	0.96	0.05

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-11: SAR Values (LTE Band2 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
19100	1900	1RB_High	Left	Touch	Fig.11	23.13	24	0.325	0.40	0.545	0.67	0.13
19100	1900	1RB_High	Left	Tilt	/	23.13	24	0.193	0.24	0.315	0.38	0.07
19100	1900	1RB_High	Right	Touch	/	23.13	24	0.310	0.38	0.510	0.62	0.04
19100	1900	1RB_High	Right	Tilt	/	23.13	24	0.191	0.23	0.299	0.37	-0.02
19100	1900	50RB_Low	Left	Touch	/	22.08	23	0.262	0.32	0.436	0.54	0.19
19100	1900	50RB_Low	Left	Tilt	/	22.08	23	0.159	0.20	0.257	0.32	-0.02
19100	1900	50RB_Low	Right	Touch	/	22.08	23	0.250	0.31	0.413	0.51	0.07
19100	1900	50RB_Low	Right	Tilt	/	22.08	23	0.156	0.19	0.241	0.30	-0.04
19100	1900	1RB_High	Left	Touch	B1	23.13	24	0.313	0.38	0.531	0.65	0.01

Note1: The LTE mode is QPSK_20MHz.

Table 14.2-12: SAR Values (LTE Band2 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
19100	1900	1RB_High	Front	/	23.13	24	0.306	0.37	0.554	0.68	0.04
19100	1900	1RB_High	Rear	/	23.13	24	0.313	0.38	0.621	0.76	0.02
19100	1900	1RB_High	Left	/	23.13	24	0.114	0.14	0.199	0.24	0.01
19100	1900	1RB_High	Right	/	23.13	24	0.151	0.18	0.274	0.33	0.11
19100	1900	1RB_High	Bottom	/	23.33	24	0.423	0.49	0.855	1.00	0.08
18900	1880	1RB_High	Bottom	/	23.23	24	0.519	0.62	1.04	1.24	0.05
18700	1860	1RB_High	Bottom	Fig.12	23.26	24	0.587	0.70	1.09	1.29	0.11
19100	1900	50RB_Low	Front	/	22.08	23	0.258	0.32	0.464	0.57	-0.10
19100	1900	50RB_Low	Rear	/	22.08	23	0.272	0.34	0.556	0.69	0.07
19100	1900	50RB_Low	Left	/	22.08	23	0.105	0.13	0.184	0.23	0.06
19100	1900	50RB_Low	Right	/	22.08	23	0.125	0.15	0.226	0.28	0.04
19100	1900	50RB_Low	Bottom	/	22.08	23	0.366	0.45	0.738	0.91	0.08
18900	1880	50RB_Low	Bottom	/	22.02	23	0.403	0.51	0.809	1.01	0.02
18700	1860	50RB_Low	Bottom	/	21.91	23	0.430	0.55	0.861	1.11	0.04
19100	1900	100RB	Bottom	/	22.00	23	0.350	0.44	0.708	0.89	0.16
18700	1860	1RB_High	Bottom	B2	23.26	24	0.577	0.68	0.985	1.17	0.04

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.2-13: SAR Values (LTE Band4 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
20175	1732.5	1RB_High	Left	Touch	/	22.45	23.5	0.041	0.05	0.060	0.08	0.03
20175	1732.5	1RB_High	Left	Tilt	/	22.45	23.5	0.050	0.06	0.077	0.10	0.06
20175	1732.5	1RB_High	Right	Touch	/	22.45	23.5	0.063	0.08	0.093	0.12	0.12
20175	1732.5	1RB_High	Right	Tilt	/	22.45	23.5	0.042	0.05	0.059	0.08	0.09
20300	1745	50RB_Low	Left	Touch	/	21.43	22.5	0.070	0.09	0.098	0.13	0.11
20300	1745	50RB_Low	Left	Tilt	/	21.43	22.5	0.044	0.06	0.064	0.08	-0.03
20300	1745	50RB_Low	Right	Touch	Fig.13	21.43	22.5	0.086	0.11	0.127	0.16	0.18
20300	1745	50RB_Low	Right	Tilt	/	21.43	22.5	0.036	0.05	0.051	0.07	-0.04
20300	1745	50RB_Low	Right	Touch	B1	21.43	22.5	0.078	0.10	0.109	0.14	0.18

Note1: The LTE mode is QPSK_20MHz.

Table 14.2-14: SAR Values (LTE Band4 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
20175	1732.5	1RB_High	Front	/	22.45	23.5	0.281	0.36	0.489	0.62	0.04
20300	1745	1RB_High	Rear	/	22.41	23.5	0.422	0.54	0.783	1.01	-0.08
20175	1732.5	1RB_High	Rear	/	22.45	23.5	0.425	0.54	0.807	1.03	-0.01
20050	1720	1RB_High	Rear	/	22.41	23.5	0.412	0.53	0.762	0.98	0.14
20175	1732.5	1RB_High	Left	/	22.45	23.5	0.078	0.10	0.123	0.16	0.18
20175	1732.5	1RB_High	Right	/	22.45	23.5	0.083	0.11	0.132	0.17	0.02
20300	1745	1RB_High	Bottom	/	22.41	23.5	0.474	0.61	0.844	1.08	0.08
20175	1732.5	1RB_High	Bottom	Fig.14	22.45	23.5	0.481	0.61	0.865	1.10	-0.08
20050	1720	1RB_High	Bottom	/	22.41	23.5	0.466	0.60	0.832	1.07	0.01
20300	1745	50RB_Low	Front	/	21.43	22.5	0.210	0.27	0.371	0.47	0.17
20300	1745	50RB_Low	Rear	/	21.43	22.5	0.317	0.41	0.598	0.77	0.04
20300	1745	50RB_Low	Left	/	21.43	22.5	0.024	0.03	0.036	0.05	0.09
20300	1745	50RB_Low	Right	/	21.43	22.5	0.065	0.08	0.104	0.13	0.15
20300	1745	50RB_Low	Bottom	/	21.43	22.5	0.357	0.46	0.629	0.80	0.03
20300	1745	100RB	Rear	/	21.32	22.5	0.316	0.41	0.587	0.77	0.01
20300	1745	100RB	Bottom	/	21.32	22.5	0.359	0.47	0.633	0.83	0.04
20175	1732.5	1RB_High	Bottom	B2	22.45	23.5	0.476	0.61	0.846	1.08	-0.08

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.2-15: SAR Values (LTE Band5 - Head)

Ambient Temperature: 22.9°C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
20450	829	1RB_High	Left	Touch	/	24.33	25	0.193	0.23	0.248	0.29	0.03
20450	829	1RB_High	Left	Tilt	/	24.33	25	0.117	0.14	0.148	0.17	0.01
20450	829	1RB_High	Right	Touch	Fig.15	24.33	25	0.199	0.23	0.259	0.30	0.16
20450	829	1RB_High	Right	Tilt	/	24.33	25	0.089	0.10	0.113	0.13	0.07
20450	829	25RB_Low	Left	Touch	/	23.22	24	0.135	0.16	0.173	0.21	-0.02
20450	829	25RB_Low	Left	Tilt	/	23.22	24	0.104	0.12	0.132	0.16	0.06
20450	829	25RB_Low	Right	Touch	/	23.22	24	0.150	0.18	0.196	0.23	0.19
20450	829	25RB_Low	Right	Tilt	/	23.22	24	0.068	0.08	0.087	0.10	0.11
20450	829	1RB_High	Right	Touch	B1	24.33	25	0.195	0.23	0.253	0.30	-0.03

Note1: The LTE mode is QPSK_10MHz.

Table 14.2-16: SAR Values (LTE Band5 - Body)

Ambient Temperature: 22.9℃						Liquid Temperature: 22.5℃					
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
20450	829	1RB_High	Front	/	24.33	25	0.236	0.28	0.300	0.35	0.06
20450	829	1RB_High	Rear	Fig.16	24.33	25	0.324	0.38	0.412	0.48	0.04
20450	829	1RB_High	Left	/	24.33	25	0.168	0.20	0.242	0.28	0.19
20450	829	1RB_High	Right	/	24.33	25	0.235	0.27	0.338	0.39	0.01
20450	829	1RB_High	Bottom	/	24.33	25	0.040	0.05	0.059	0.07	0.12
20450	829	25RB_Low	Front	/	23.22	24	0.178	0.21	0.227	0.27	0.06
20450	829	25RB_Low	Rear	/	23.22	24	0.230	0.28	0.296	0.35	0.09
20450	829	25RB_Low	Left	/	23.22	24	0.139	0.17	0.197	0.24	0.03
20450	829	25RB_Low	Right	/	23.22	24	0.182	0.22	0.262	0.31	0.07
20450	829	25RB_Low	Bottom	/	23.22	24	0.027	0.03	0.040	0.05	-0.08
20450	829	1RB_High	Rear	B2	24.33	25	0.321	0.37	0.407	0.47	0.03

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_10MHz.

Table 14.2-17: SAR Values (LTE Band7 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conduct ed Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g)(W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
20850	2510	1RB_Low	Left	Touch	/	21.71	22.5	0.048	0.06	0.084	0.10	0.06
20850	2510	1RB_Low	Left	Tilt	/	21.71	22.5	0.044	0.05	0.080	0.10	-0.03
20850	2510	1RB_Low	Right	Touch	Fig.17	21.71	22.5	0.109	0.13	0.212	0.25	0.17
20850	2510	1RB_Low	Right	Tilt	/	21.71	22.5	0.023	0.03	0.041	0.05	0.08
21350	2560	50RB_Low	Left	Touch	/	20.73	21.5	0.028	0.03	0.053	0.06	0.01
21350	2560	50RB_Low	Left	Tilt	/	20.73	21.5	0.031	0.04	0.059	0.07	0.12
21350	2560	50RB_Low	Right	Touch	/	20.73	21.5	0.093	0.11	0.181	0.22	0.16
21350	2560	50RB_Low	Right	Tilt	/	20.73	21.5	0.025	0.03	0.044	0.05	0.03
20850	2510	1RB_Low	Right	Touch	B1	21.71	22.5	0.105	0.13	0.201	0.24	0.17

Note1: The LTE mode is QPSK_20MHz.

Table 14.2-18: SAR Values (LTE Band7 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
20850	2510	1RB_Low	Front	/	21.71	22.5	0.263	0.32	0.588	0.71	0.03
20850	2510	1RB_Low	Rear	Fig.18	21.71	22.5	0.294	0.35	0.616	0.74	-0.03
20850	2510	1RB_Low	Left	/	21.71	22.5	0.046	0.06	0.081	0.10	0.01
20850	2510	1RB_Low	Right	/	21.71	22.5	0.067	0.08	0.120	0.14	0.19
20850	2510	1RB_Low	Bottom	/	21.71	22.5	0.257	0.31	0.526	0.63	0.07
21350	2560	50RB_Low	Front	/	20.73	21.5	0.164	0.20	0.373	0.45	-0.02
21350	2560	50RB_Low	Rear	/	20.73	21.5	0.193	0.23	0.401	0.48	0.12
21350	2560	50RB_Low	Left	/	20.73	21.5	0.032	0.04	0.065	0.08	0.07
21350	2560	50RB_Low	Right	/	20.73	21.5	0.057	0.07	0.105	0.13	0.04
21350	2560	50RB_Low	Bottom	/	20.73	21.5	0.170	0.20	0.339	0.40	0.16
20850	2510	1RB_Low	Rear	B2	21.71	22.5	0.291	0.35	0.581	0.70	0.13

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.