

**FCC PART 15 Subpart C**  
**EMI MEASUREMENT AND TEST REPORT**  
**FOR**  
**LG ELECTRONICS, INC.**

LG Kangseo B/D, 36, Munlae-Dong, 6-Ga,  
Youngdungpo-Gu, Seoul, 150-096, Korea

**FCC ID: FFMGT-8310C**

October 27, 2000

|   |   |
|---|---|
| <b>This Report Concerns:</b><br><input checked="checked" type="checkbox"/> Original Report  | <b>Equipment Type:</b><br>Digital Spread Spectrum<br>Cordless Phone – Household<br>Appliances |
| <b>Test Engineer:</b> Hien Pham   |   |
| <b>Test Date:</b> October 12, 2000  |   |
| <b>Reviewed By:</b><br>John Y. Chan – Engineering Manager   |   |
| <b>Prepared By:</b> Bay Area Compliance Laboratory Corporation<br>230 Commercial Street, Suite 2<br>Sunnyvale, CA 94086<br>Tel: (408) 732-9162<br>Fax: (408) 732-9164 |   |

**Note:** This report may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

---

**TABLE OF CONTENTS**

|   |           |
|---|-----------|
| <b>1 - GENERAL INFORMATION.....</b>                               | <b>3</b>  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....      | 3         |
| 1.2 OBJECTIVE .....   | 3         |
| 1.3 RELATED SUBMITTAL(S)/GRANT(S).....                            | 3         |
| 1.4 TEST METHODOLOGY.....   | 3         |
| 1.5 TEST FACILITY .....   | 4         |
| 1.6 TEST EQUIPMENT LIST .....                                     | 4         |
| 1.7 EQUIPMENT UNDER TEST (EUT).....                               | 5         |
| 1.8 EUT CONFIGURATION DETAILS AND LIST .....                      | 5         |
| 1.9 EXTERNAL I/O CABLING .....                                    | 5         |
| <b>2 - SYSTEM TEST CONFIGURATION.....</b>                         | <b>6</b>  |
| 2.1 JUSTIFICATION.....  | 6         |
| 2.2 BLOCK DIAGRAM.....  | 6         |
| 2.3 TEST SETUP BLOCK DIAGRAM.....                                 | 7         |
| 2.4 EQUIPMENT MODIFICATIONS.....                                  | 8         |
| <b>3.0 SUMMARY OF TEST RESULTS .....</b>                          | <b>9</b>  |
| 3.1.0 PEAK OUTPUT POWER.....                                      | 9         |
| 3.2.0 6dB BANDWIDTH.....  | 17        |
| 3.3.0 POWER DENSITY.....  | 24        |
| 3.4.0 BAND EDGES TESTING.....                                     | 31        |
| 3.5.0 SPURIOUS EMISSIONS.....                                     | 38        |
| 3.6.0 FIELD STRENGTH OF SPURIOUS RADIATION (30 MHz-9000MHz) ..... | 51        |
| 3.7.0 PROCESSING GAIN .....                                       | 57        |
| <b>4 - CONDUCTED EMISSIONS TEST DATA.....</b>                     | <b>62</b> |
| 4.1 MEASUREMENT UNCERTAINTY .....                                 | 62        |
| 4.2 EUT SETUP .....   | 62        |
| 4.3 SPECTRUM ANALYZER SETUP.....                                  | 62        |
| 4.4 TEST PROCEDURE .....  | 63        |
| 4.5 SUMMARY OF TEST RESULTS.....                                  | 63        |
| 4.6 CONDUCTED EMISSIONS TEST DATA.....                            | 63        |
| 4.7 PLOT OF CONDUCTED EMISSIONS TEST DATA.....                    | 63        |
| <b>APPENDIX A – AGENT AUTHORIZATION LETTER .....</b>              | <b>65</b> |

## 1 - GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

The *LG Electronic, Inc.*, FCC ID *FFMGT-8310C* or the "EUT" as referred to in this report is a Digital Spread Spectrum Cordless Phone which has 20 channel possible in the 904-926 MHz Bandwidth, and the transmission range up to 1 Km in open sight (longer range than analog 900MHz cordless phone).

The EUT was composed of two parts: one is the handset which measures 9" L x 2.125" W x 1.675" H, the other is the base which measures 7" L x 5.5" W x 2.25" H.

### 1.2 Objective

This type approval report is prepared on behalf of *LG Electronics, Inc.*, in accordance with Part 2, Subpart J, Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with FCC rules for Output Power, 6 dB Bandwidth, Power Density, Band Edge, Spurious Emission, Processing Gain, Antenna Gain, and Conducted and Radiated Emission.

### 1.3 Related Submittal(s)/Grant(s)

No Related Submittals

### 1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 –1992, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## 1.5 Test Facility

The **Open Area Test Site** used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Suite 2, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-1992.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-674 and R-657. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 1993, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

## 1.6 Test Equipment List

| Manufacturer      | Description              | Model            | Serial Number | Cal. Due Data |
|-------------------|--------------------------|------------------|---------------|---------------|
| HP                | Spectrum Analyzer        | 8566B            | 2610A02165    | 12/6/00       |
| HP                | Spectrum Analyzer        | 8593B            | 2919A00242    | 12/20/00      |
| HP                | Amplifier                | 8349B            | 2644A02662    | 12/20/00      |
| HP                | Quasi-Peak Adapter       | 85650A           | 917059        | 12/6/00       |
| HP                | Amplifier                | 8447E            | 1937A01046    | 12/6/00       |
| A.H. System       | Horn Antenna             | SAS0200/571      | 261           | 12/27/00      |
| Com-Power         | Log Periodic Antenna     | AL-100           | 16005         | 11/2/00       |
| Com-Power         | Biconical Antenna        | AB-100           | 14012         | 11/2/00       |
| Solar Electronics | LISN                     | 8012-50-R-24-BNC | 968447        | 12/28/00      |
| Com-Power         | LISN                     | LI-200           | 12208         | 12/20/00      |
| Com-Power         | LISN                     | LI-200           | 12005         | 12/20/00      |
| BACL              | Data Entry Software      | DES1             | 0001          | 12/20/00      |
| Rohde & Schwarz   | Signal Generator         | SMIQ03B          | 1125.5555.03  | 7/10/2002     |
| Rohde & Schwarz   | I/Q Modulation Generator | AMIQ             | 1110.2003.02  | 8/10/2002     |

**1.7 Equipment Under Test (EUT)**

| Manufacturer         | Description | Model    | Serial Number | FCC ID      |
|----------------------|-------------|----------|---------------|-------------|
| LG Electronics, Inc. | Handset     | GT-8310C | None          | FFMGT-8310C |
| LG Electronics, Inc. | Base        | GT-8310C | None          | FFMGT-8310C |

**1.8 EUT Configuration Details and List**

NOT APPLICABLE

**1.9 External I/O Cabling****For Base:**

| Cable Description        | Length (M) | Port/From     | To                                      |
|--------------------------|------------|---------------|---|
| Non-Shielded Phone Cable | 2.0        | RJ11 Port/EUT | Line1 RJ11 Port/<br>Telephone Simulator |

## **2 - SYSTEM TEST CONFIGURATION**

---

### **2.1 Justification**

The EUT was configured for testing in a typical fashion (as normally used in a typical application).


The final qualification test was performed with the EUT operating at normal mode.

### **2.2 Block Diagram**


Appendix B contains a copy of the EUT's block diagram as reference.

## 2.3 Test Setup Block Diagram

### For Handset:

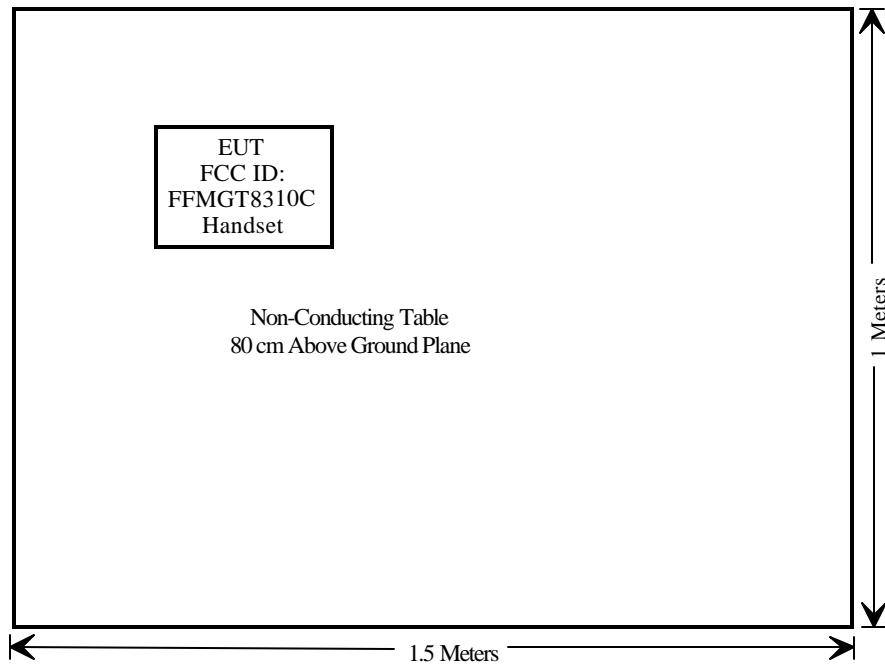

### For Base:

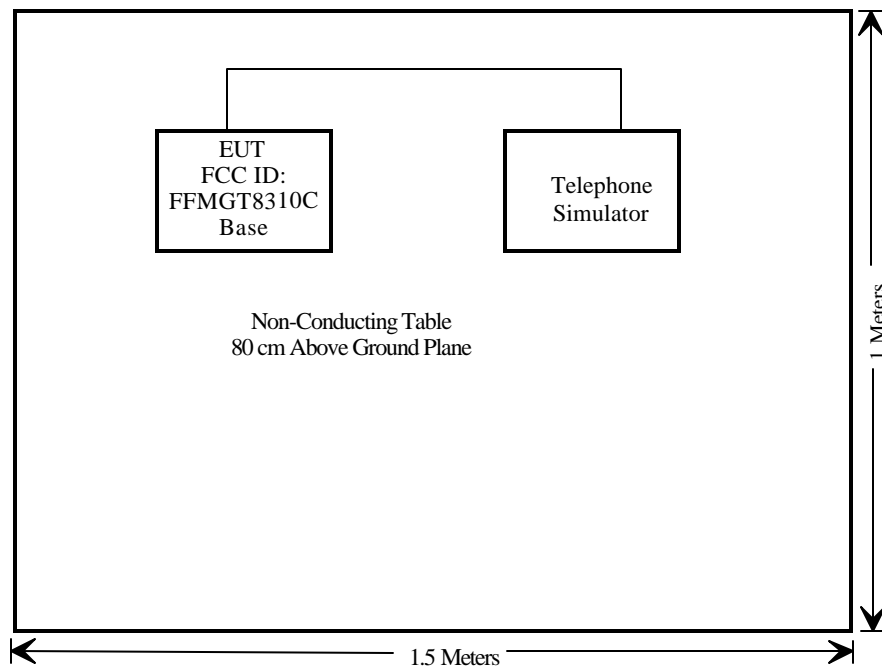

## **2.4 Equipment Modifications**

No modifications were necessary for the EUT to comply.



### 3.0 Summary of Test Results

| FCC RULE       | DESCRIPTION OF TEST                  | RESULT |
|----------------|--------------------------------------|--------|
| 15.247 (b)     | Peak Output Power                    | Pass   |
| 15.247 (a) (2) | 6dB Bandwidth                        | Pass   |
| 15.247 (2) (d) | Power Density                        | Pass   |
| 15.247 (2) (c) | Band Edges Testing                   | Pass   |
| 15.247 (2) (c) | Spurious Emission                    | Pass   |
| 15.247, 15.205 | Field Strength of Spurious Radiation | Pass   |
| 15.207         | Conduction Emission                  | Pass   |
| 15.247 (e)     | Processing Gain                      | Pass   |

#### 3.1.0 Peak Output Power

Requirements: FCC Part 15.247 (b)

##### 3.1.1 Test Procedure

The antenna was removed and SMA connector was connected to the transmitter output. The transmitter output was connected to a calibrated coaxial attenuator (50 Ohm), the other end of which was connected to a spectrum analyzer. Transmitter output was read off the spectrum analyzer in dBm. The power output at the transmitter was determined by adding the value of the attenuator to the spectrum analyzer reading.

The test was performed at three frequencies (low, middle, and high channels) and on all power levels that can be setup on the transmitter.

##### 3.1.2 Test equipment

Hewlett Packard HP8566B Spectrum Analyzer  
Hewlett Packard HP 7470A Plotter

**3.1.3 Test Results**


Refer to the attached to the following plots:


**BASE**


| <b>Peak Output Power</b> |         |
|--------------------------|---------|
| <b>High Channel</b>      | Page 14 |
| <b>Middle Channel</b>    | Page 15 |
| <b>Low Channel</b>       | Page 16 |


**HANDSET**


| <b>Peak Output Power</b> |         |
|--------------------------|---------|
| <b>High Channel</b>      | Page 11 |
| <b>Middle Channel</b>    | Page 12 |
| <b>Low Channel</b>       | Page 13 |

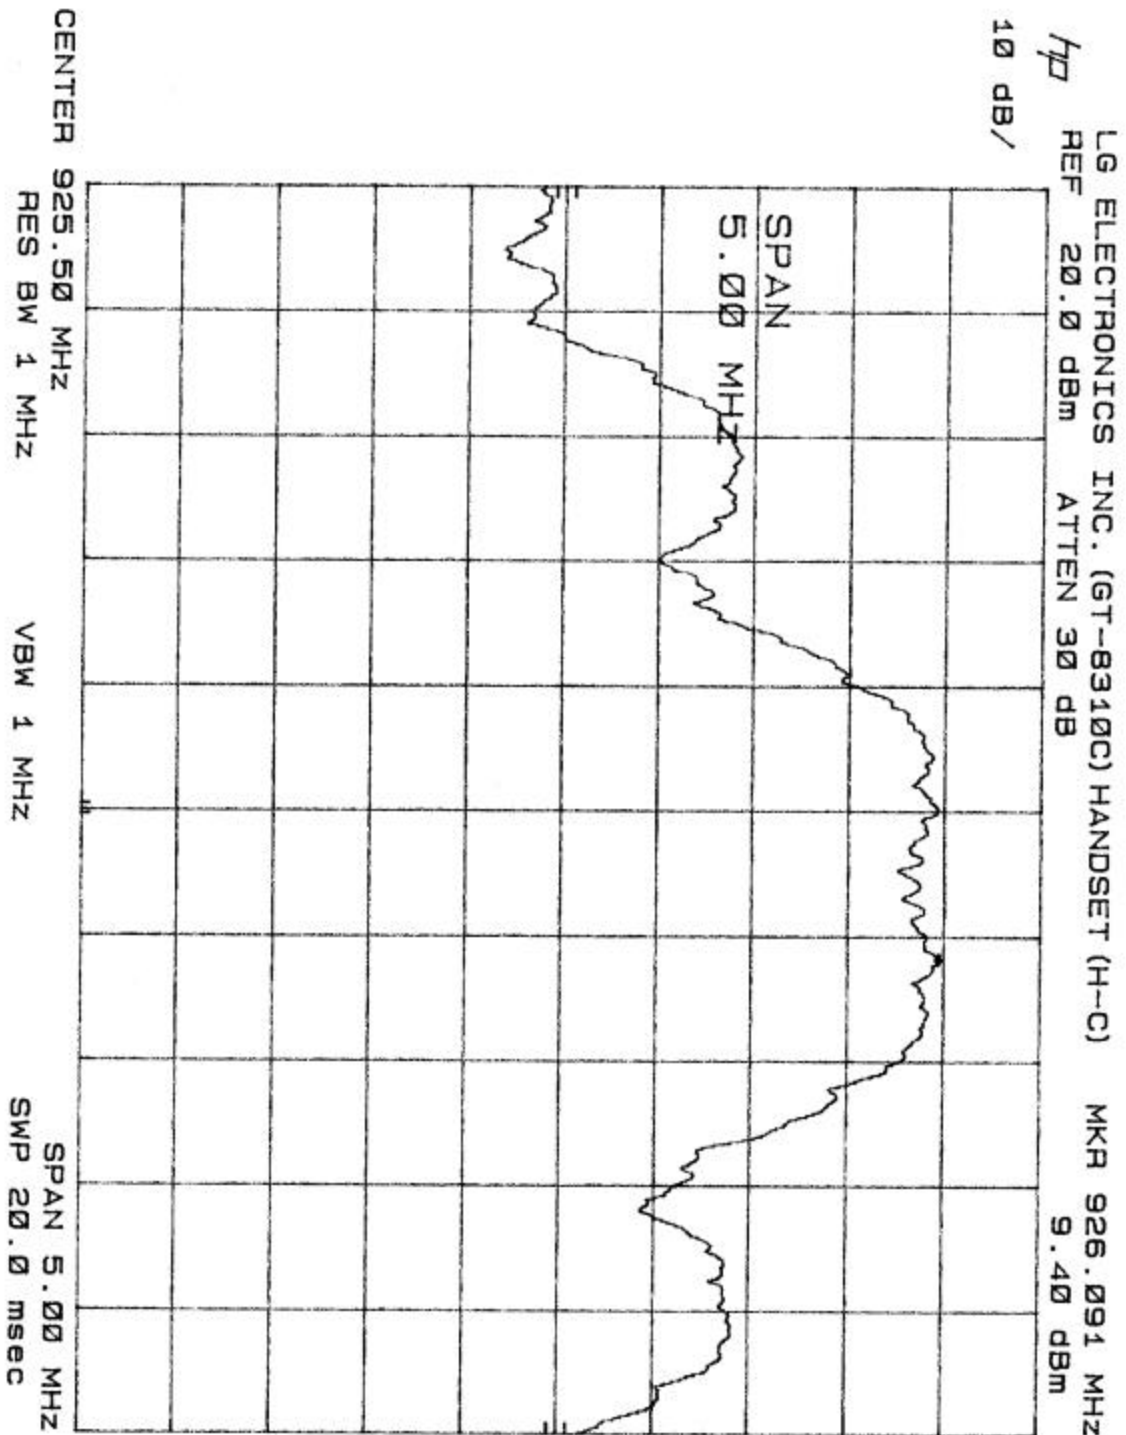


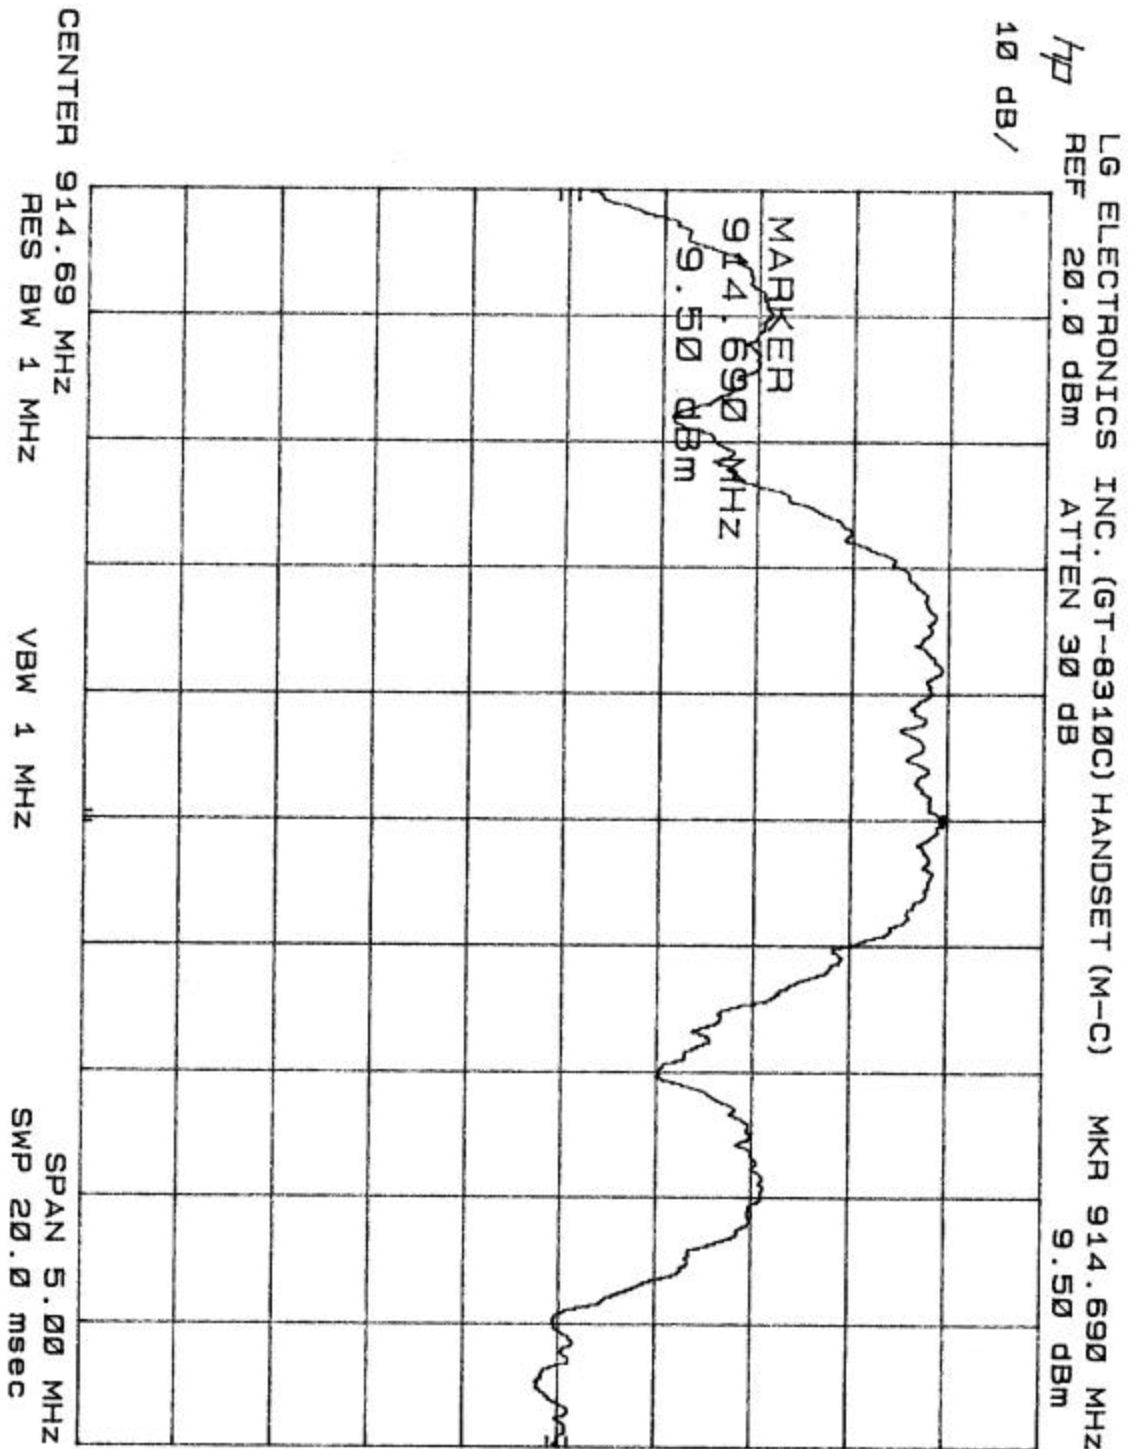

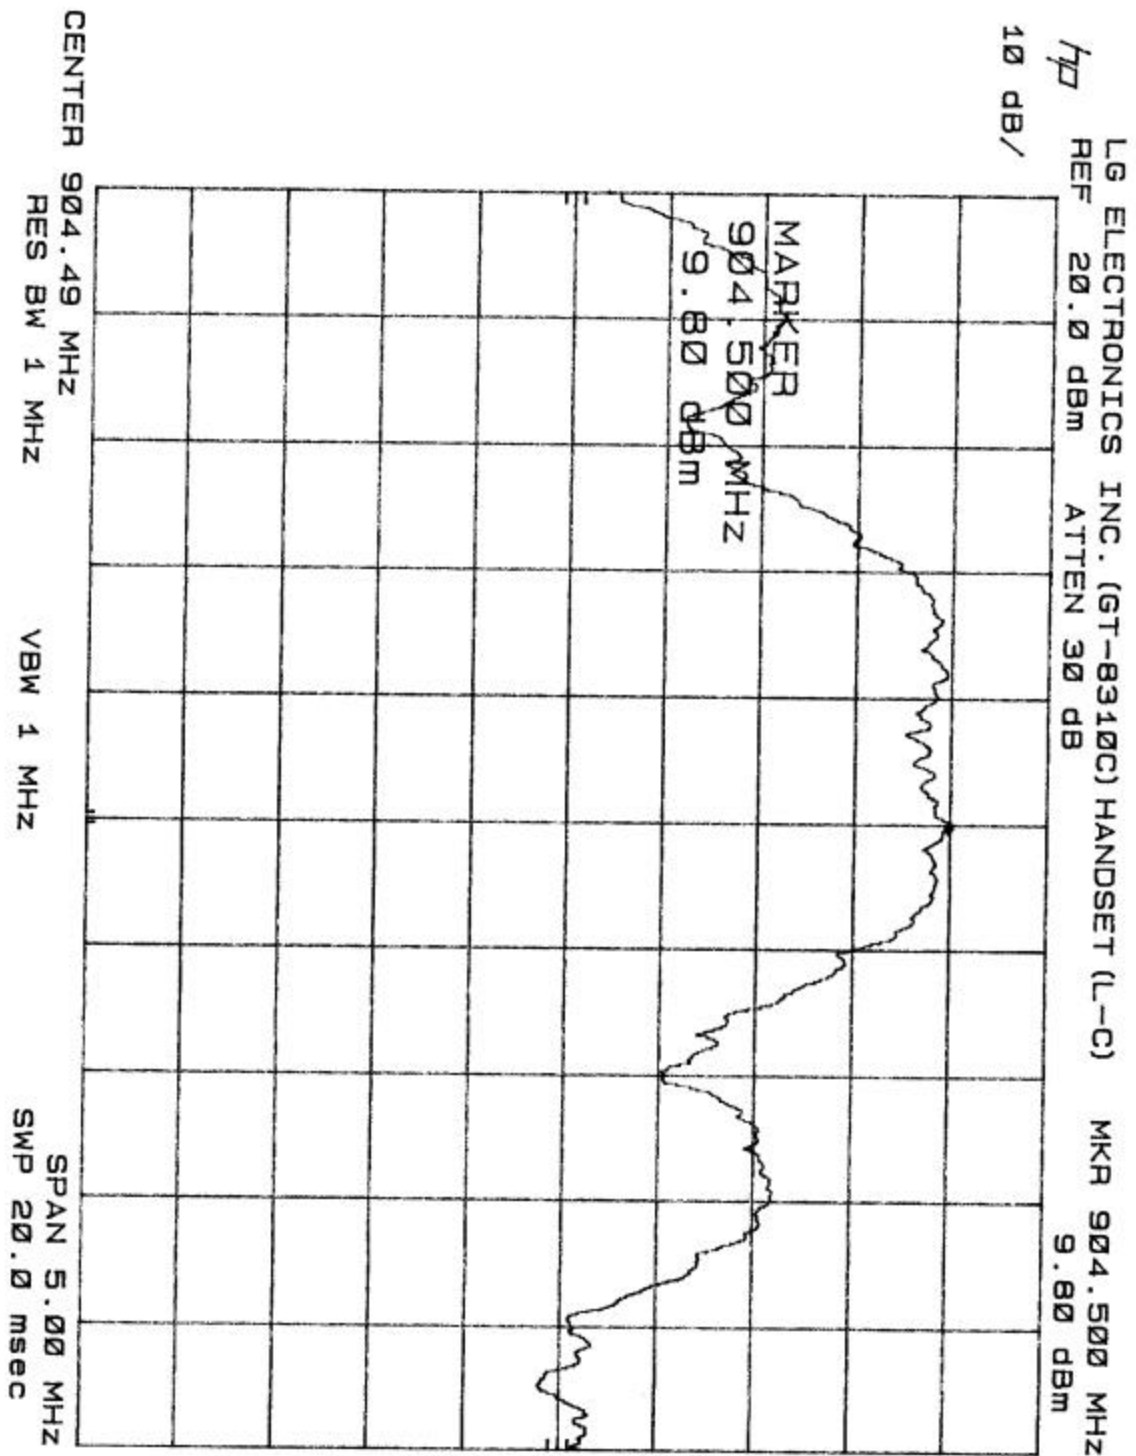

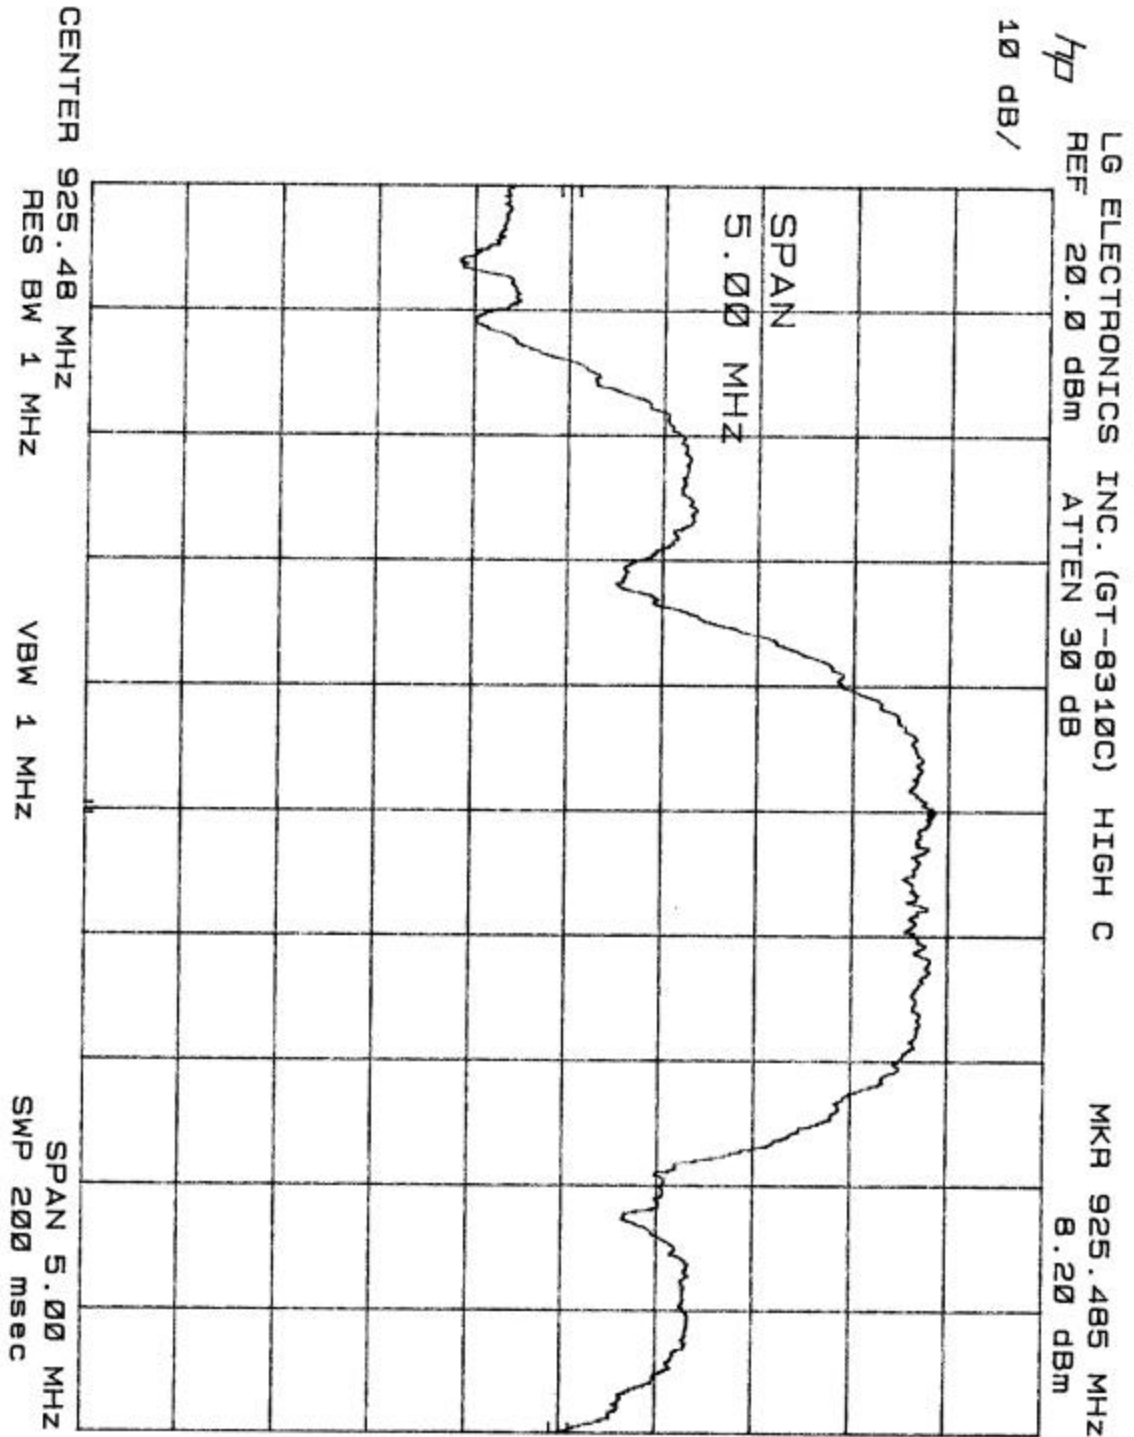

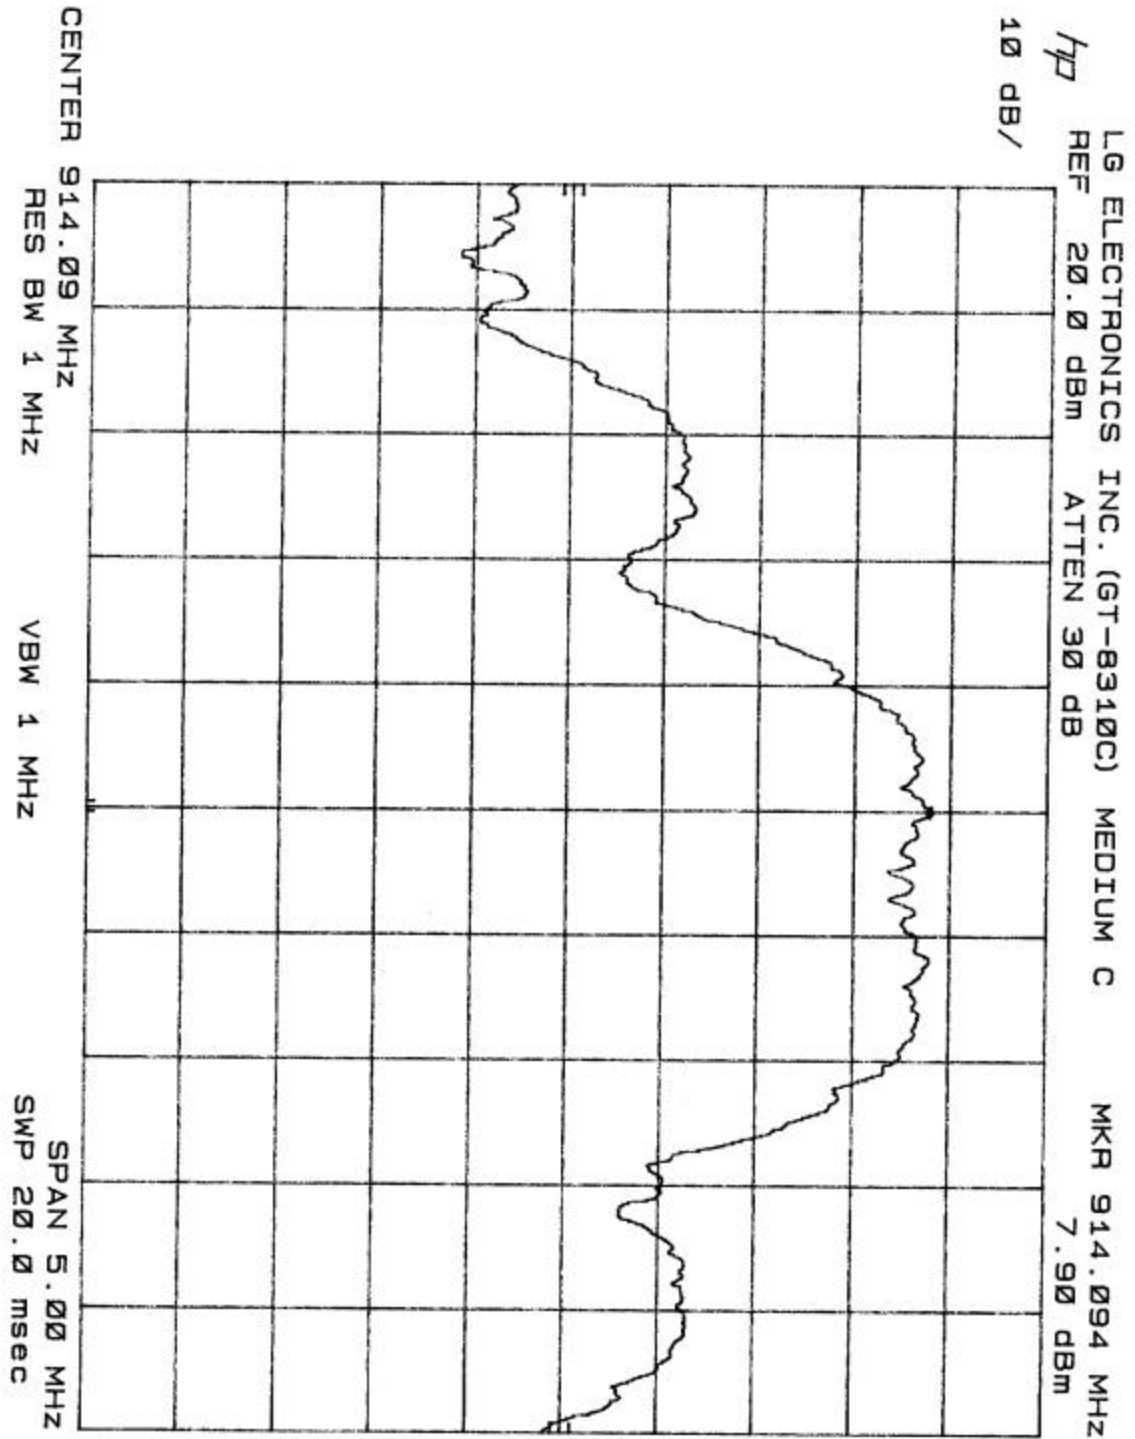

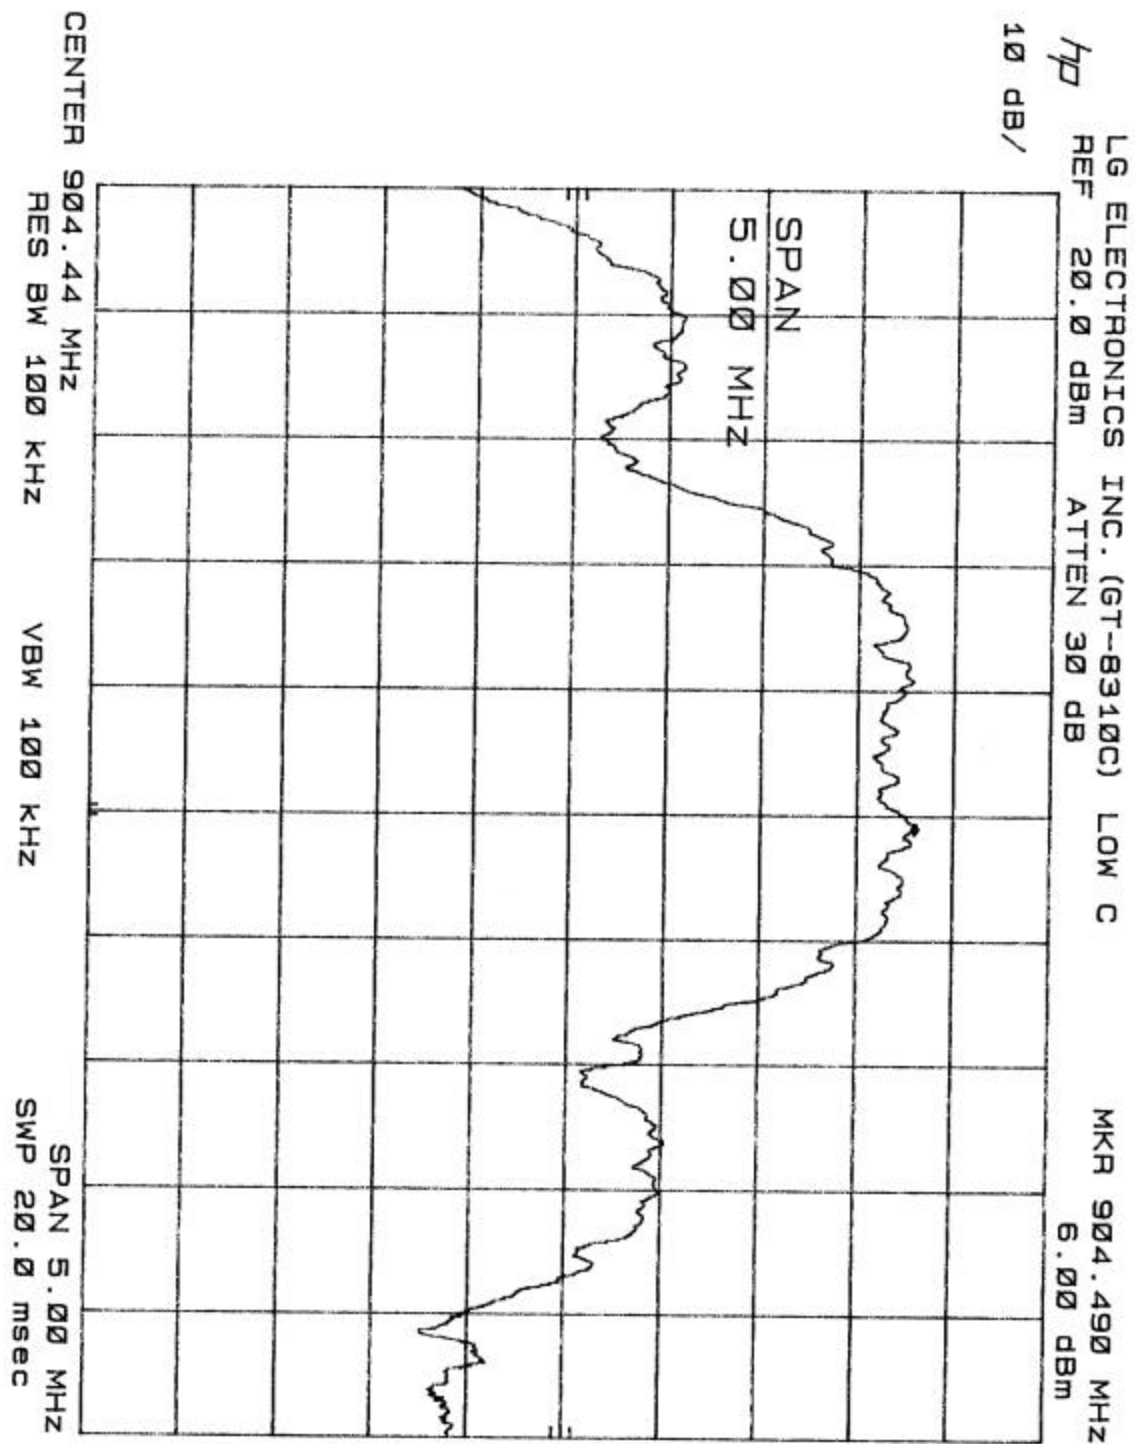



### 3.2.0 6dB Bandwidth

Requirement: FCC 15.247 (a)(2), the 6 dB Bandwidth shall not be less than 500 kHz.

#### 3.2.1 Test Procedure

The antenna was removed and SMA connector was connected to the transmitter output. The transmitter output was connected to a calibrated coaxial attenuator (50 Ohm), the other end of which was connected to a spectrum analyzer with the VBW > RBW. Transmitter output was read off the spectrum analyzer in dBm. The power output at the transmitter was determined by adding the value of the attenuator to the spectrum analyzer reading.

The test was performed at three frequencies (low, middle, and high channels) and on all power levels that can be setup on the transmitter.

#### 3.2.2 Test Equipment

Hewlett Packard HP8566B Spectrum Analyzer  
Hewlett Packard HP 7470A Plotter

#### 3.2.3 Test Results:


Included are plots of 6dB bandwidth for low, middle and high channel.


#### BASE


| 6dB bandwidth  |         |
|----------------|---------|
| High Channel   | Page 21 |
| Middle Channel | Page 22 |
| Low Channel    | Page 23 |


#### HANDSET


| 6dB bandwidth  |         |
|----------------|---------|
| High Channel   | Page 18 |
| Middle Channel | Page 19 |
| Low Channel    | Page 20 |

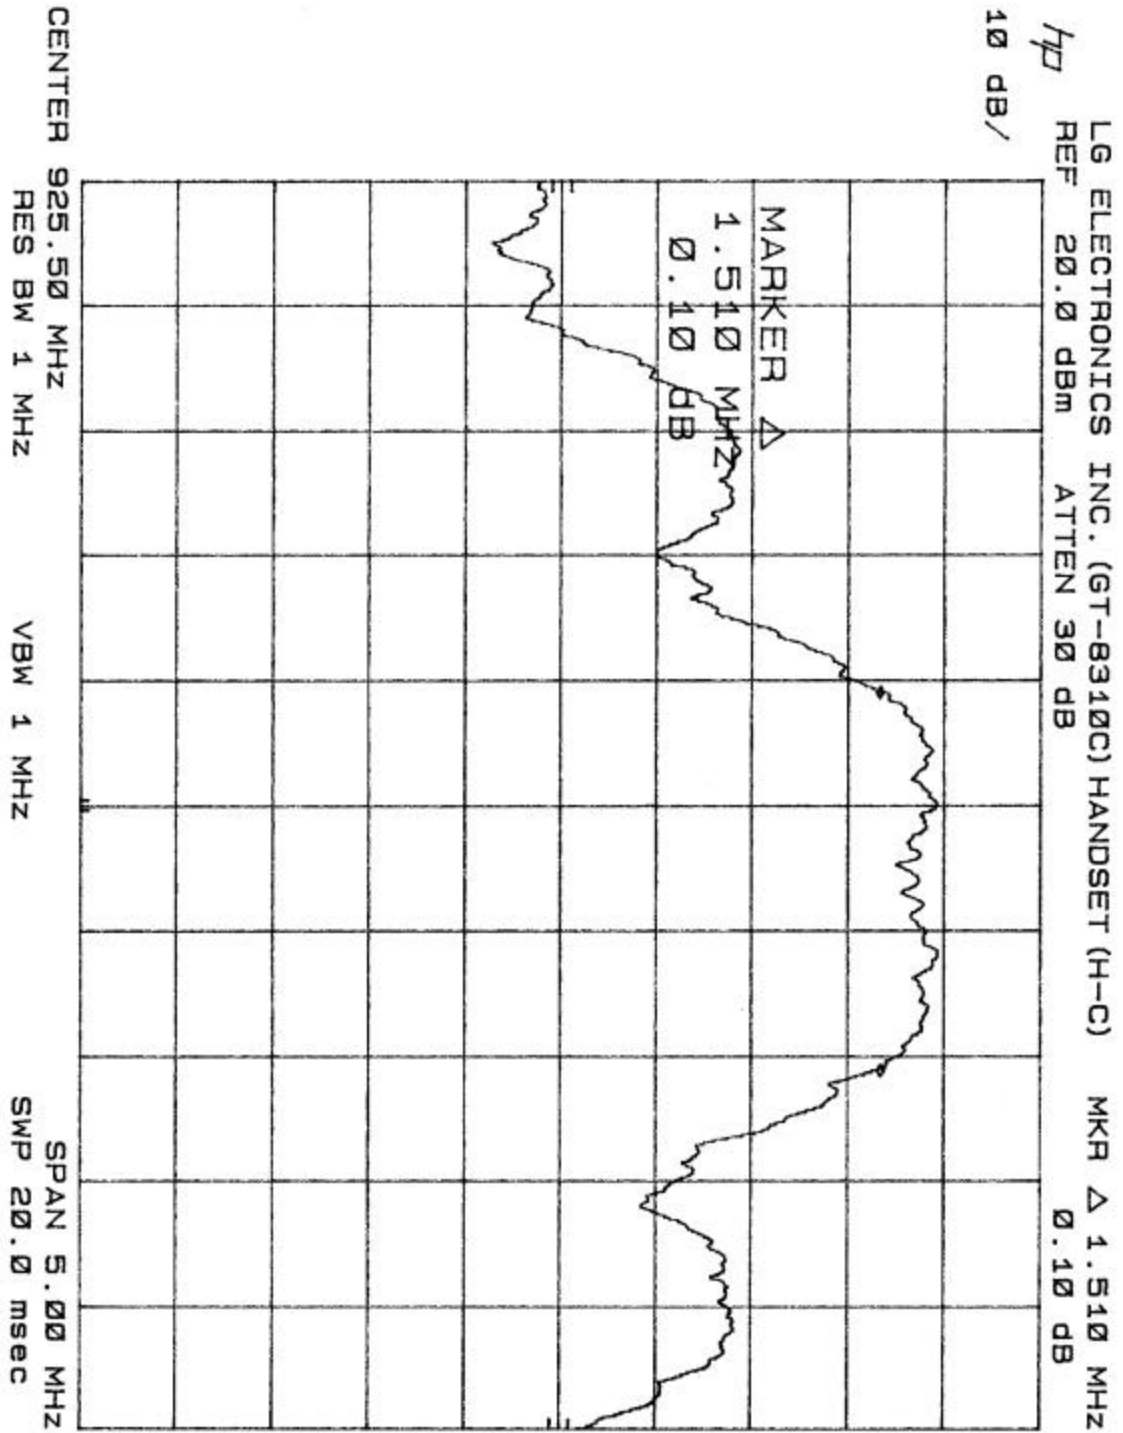


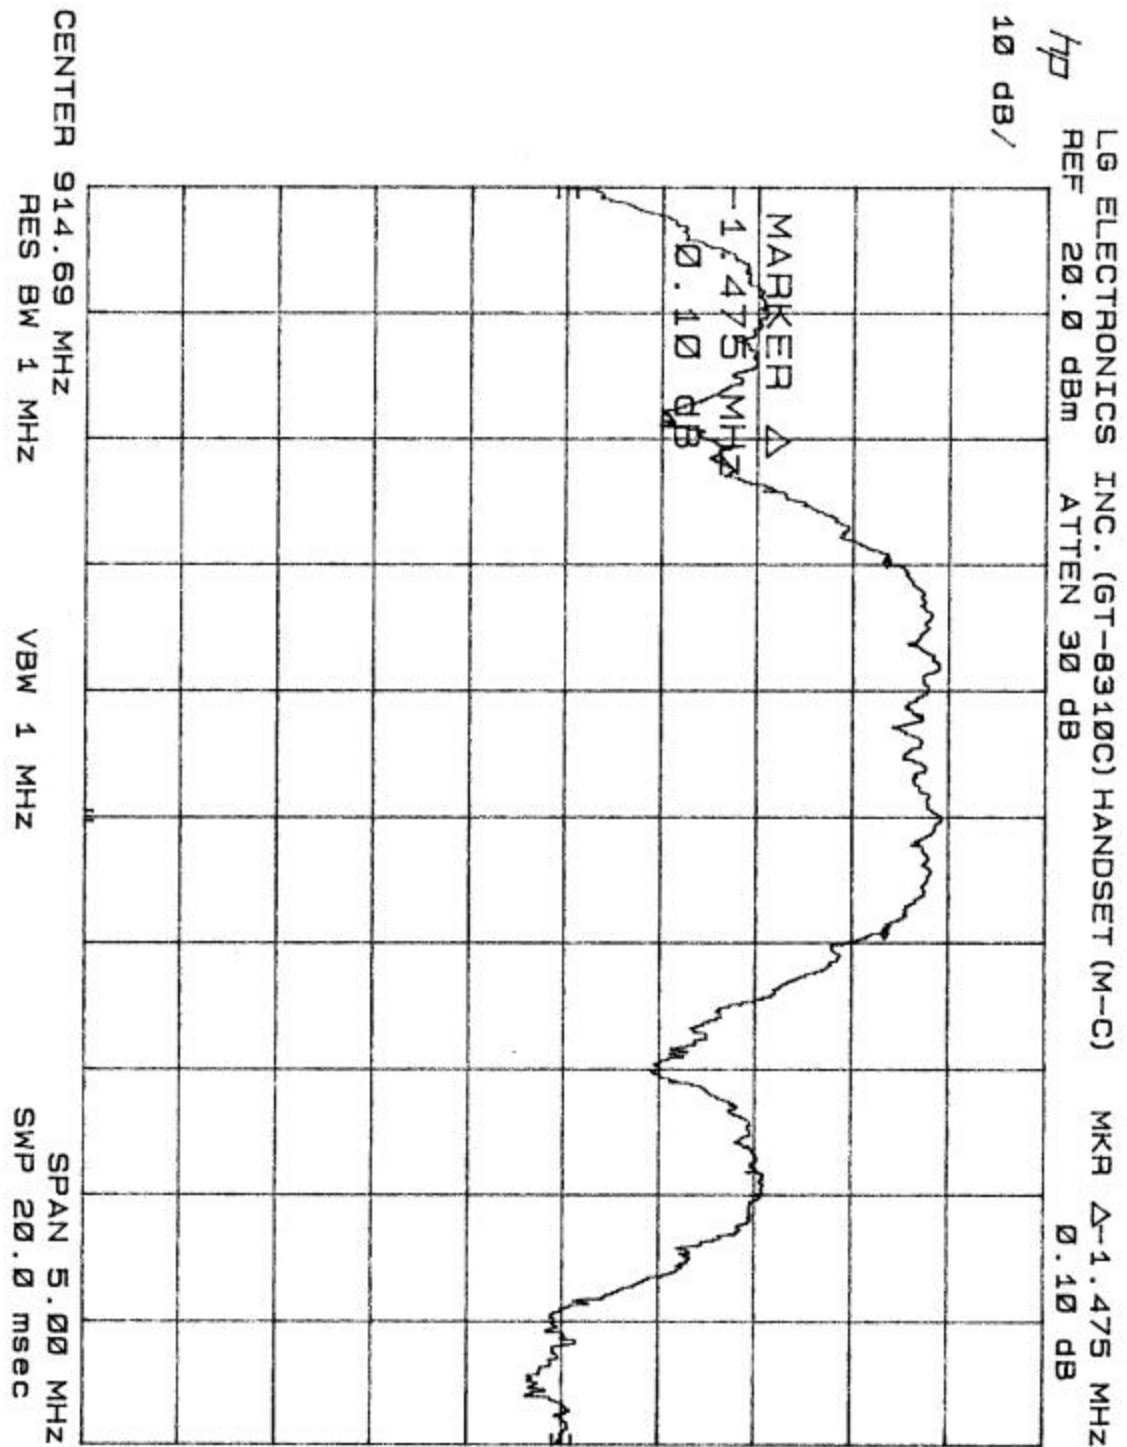

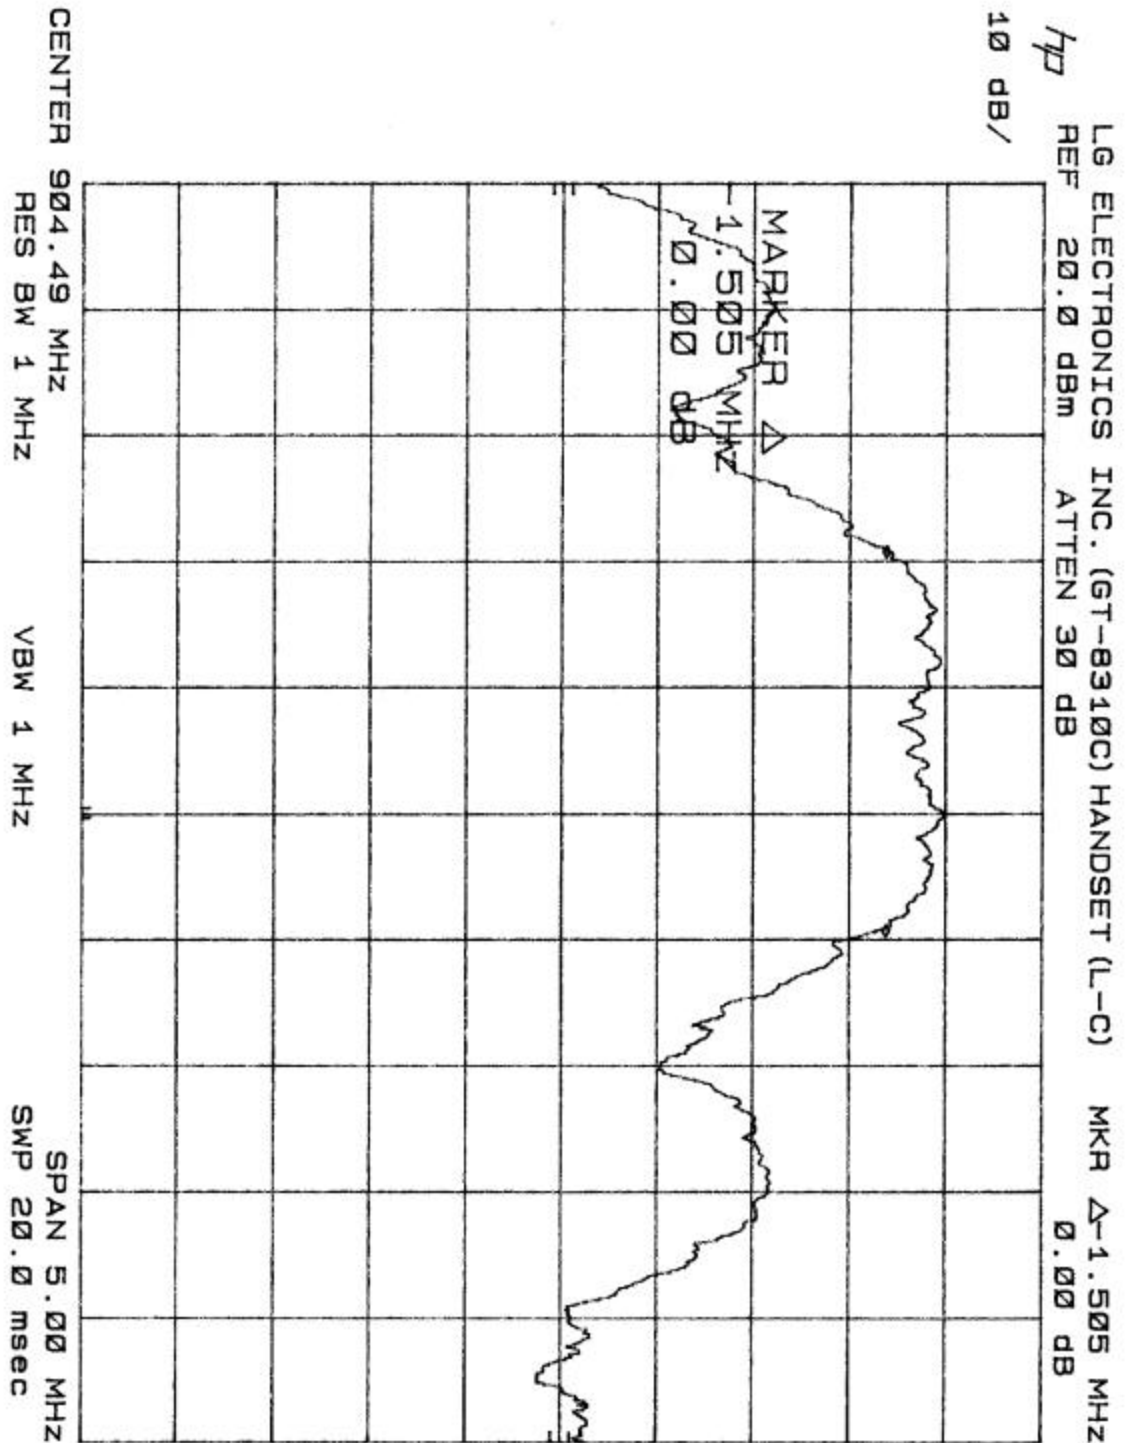

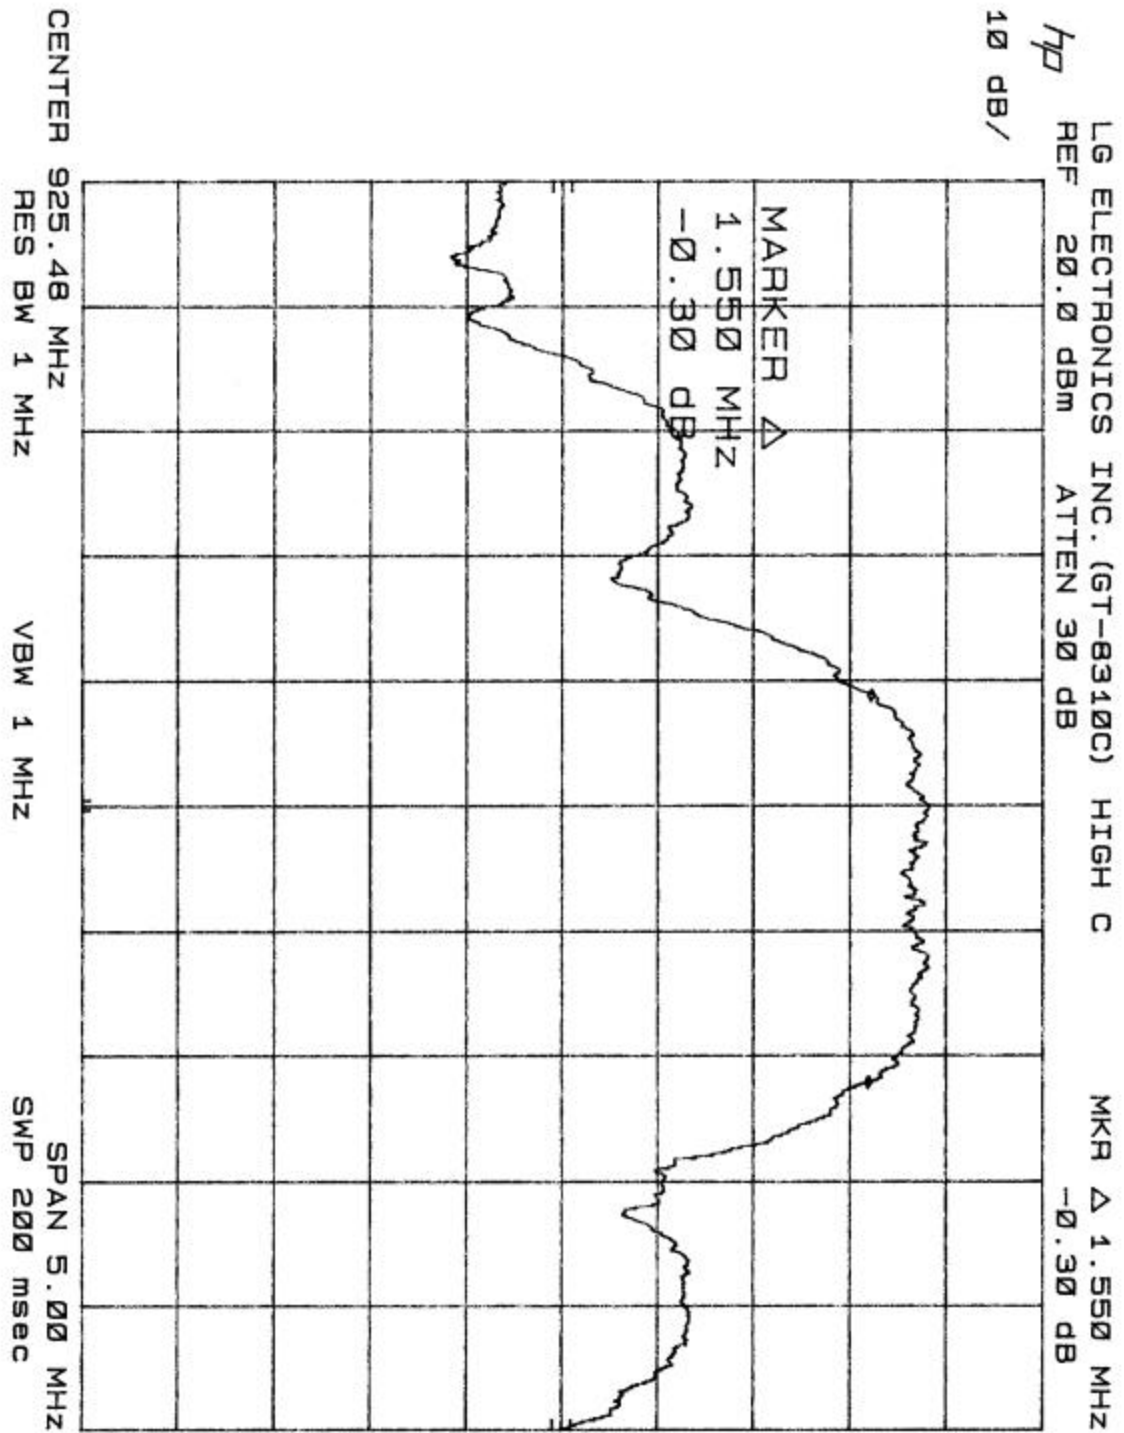

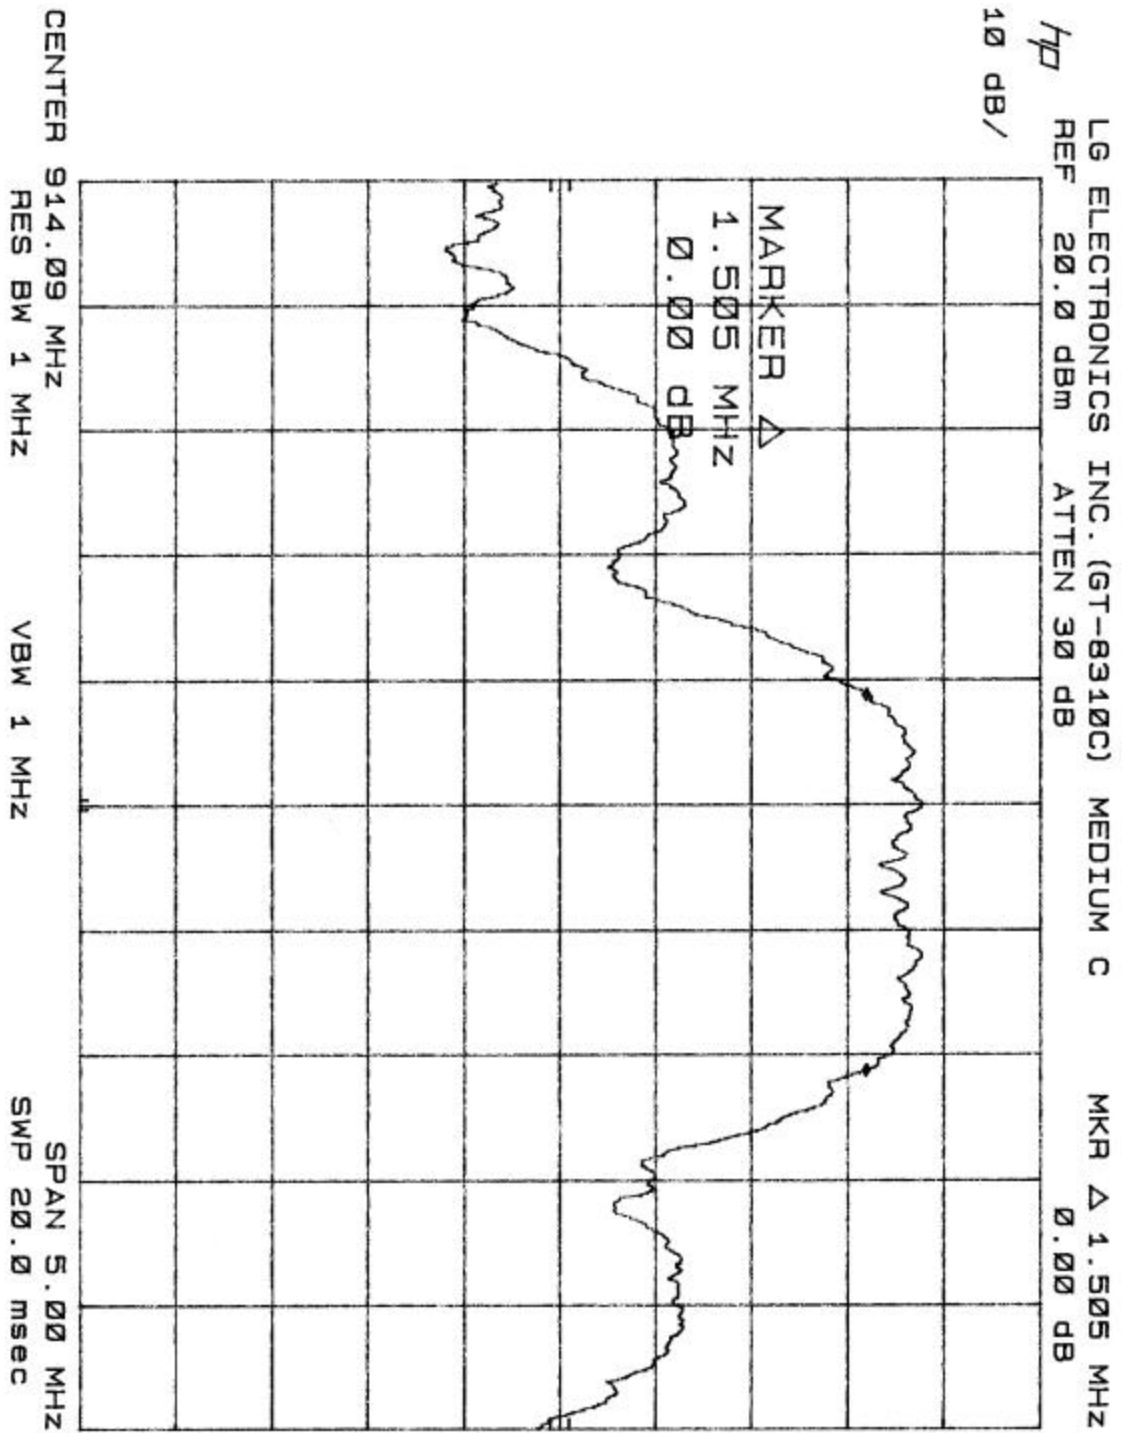

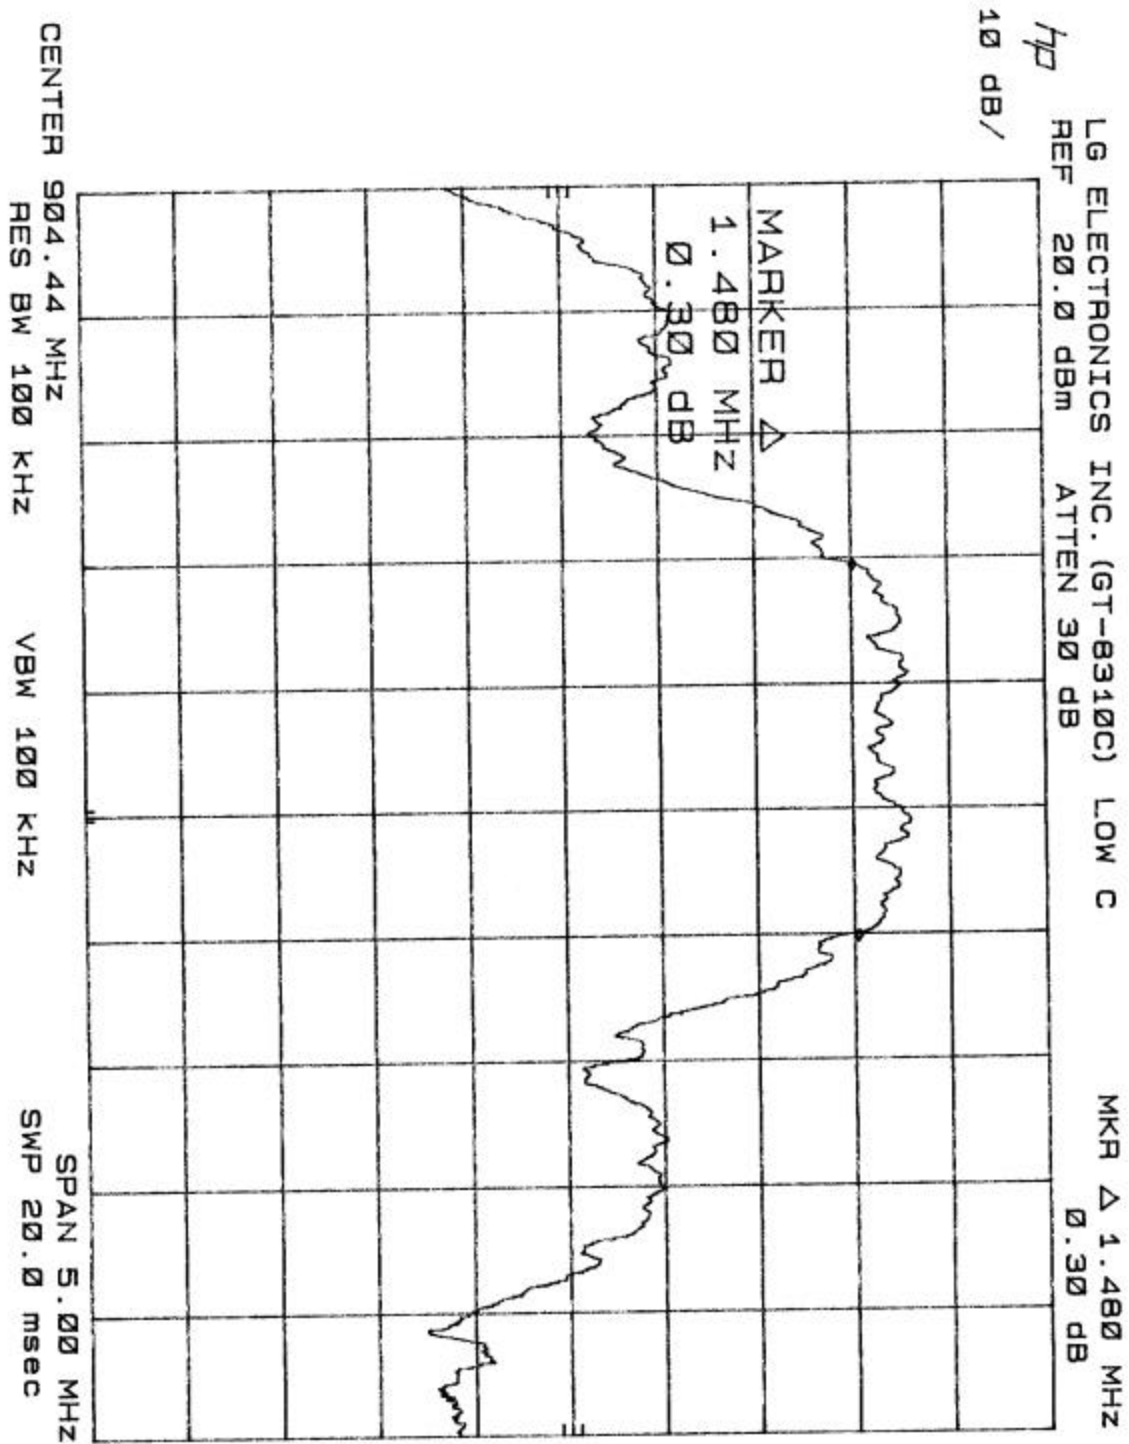

### 3.3.0 Power Density

Requirements: FCC 15.247 (2) (d), the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

#### 3.3.1 Test Procedure

The antenna was removed and SMA connector was connected to the transmitter output. The transmitter output was connected to a calibrated coaxial attenuator (50 Ohm), the other end of which was connected to a spectrum analyzer with the RBW set to 3kHz and VBW > RBW. The start and stop frequencies of the Spectrum Analyzer should be set according to the maximum emission frequency range seen from the 6 dB bandwidth test. The sweep time of the spectrum analyzer should be set to the value that allows to observe each 3 kHz interval for at least 1 second.

The test was performed at three frequencies (low, middle, and high channels) and on all power levels that can be setup on the transmitter.

#### 3.3.2 Test Equipment

Hewlett Packard HP8566B Spectrum Analyzer  
Hewlett Packard HP 7470A Plotter

#### 3.3.3 Test Results

Refer to the attached Plots


#### BASE


| Power Density  |         |
|----------------|---------|
| High Channel   | Page 28 |
| Middle Channel | Page 29 |
| Low Channel    | Page 30 |


#### HANDSET


| Power Density  |         |
|----------------|---------|
| High Channel   | Page 25 |
| Middle Channel | Page 26 |
| Low Channel    | Page 27 |




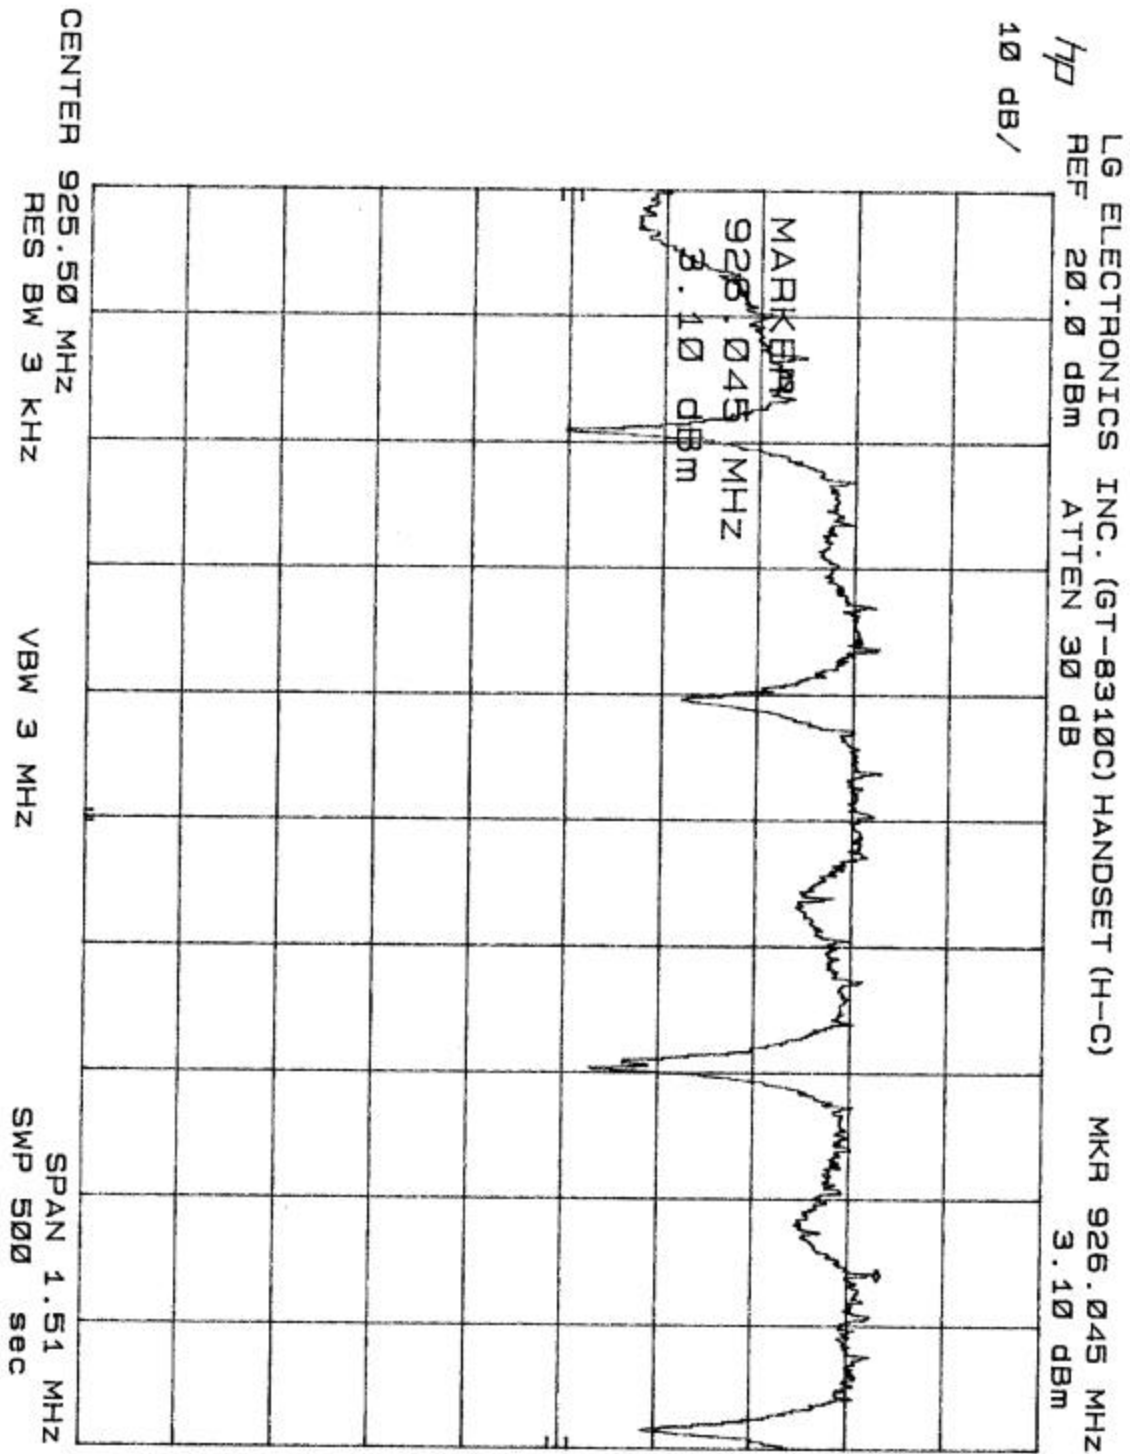


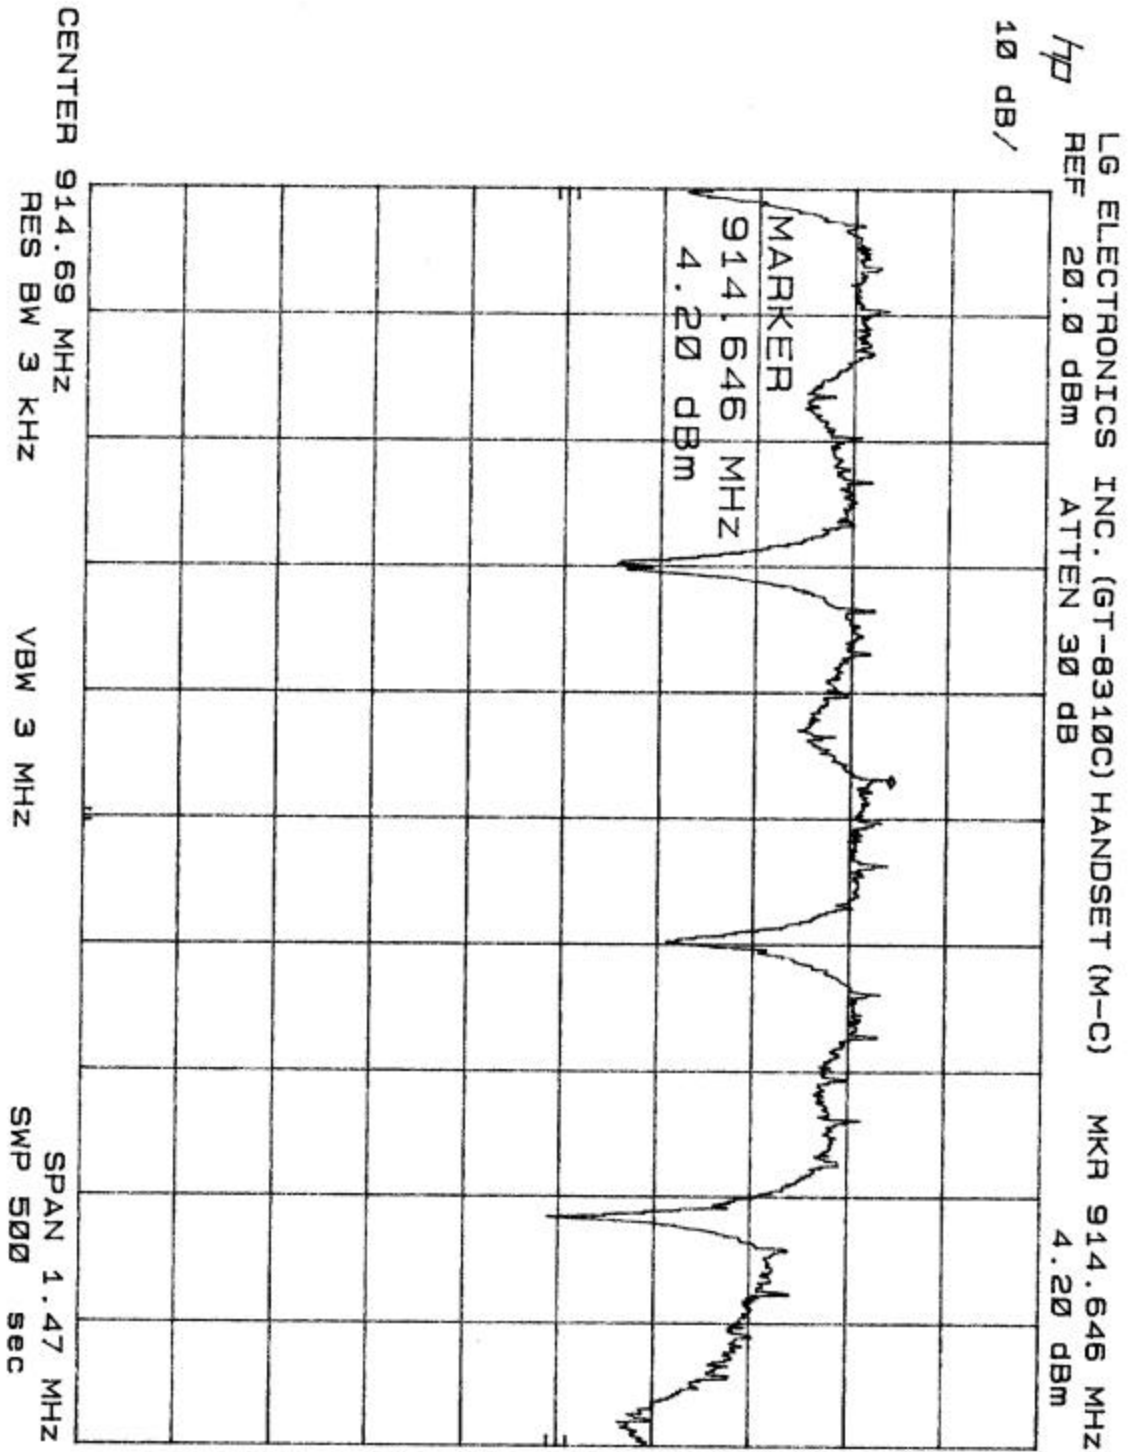

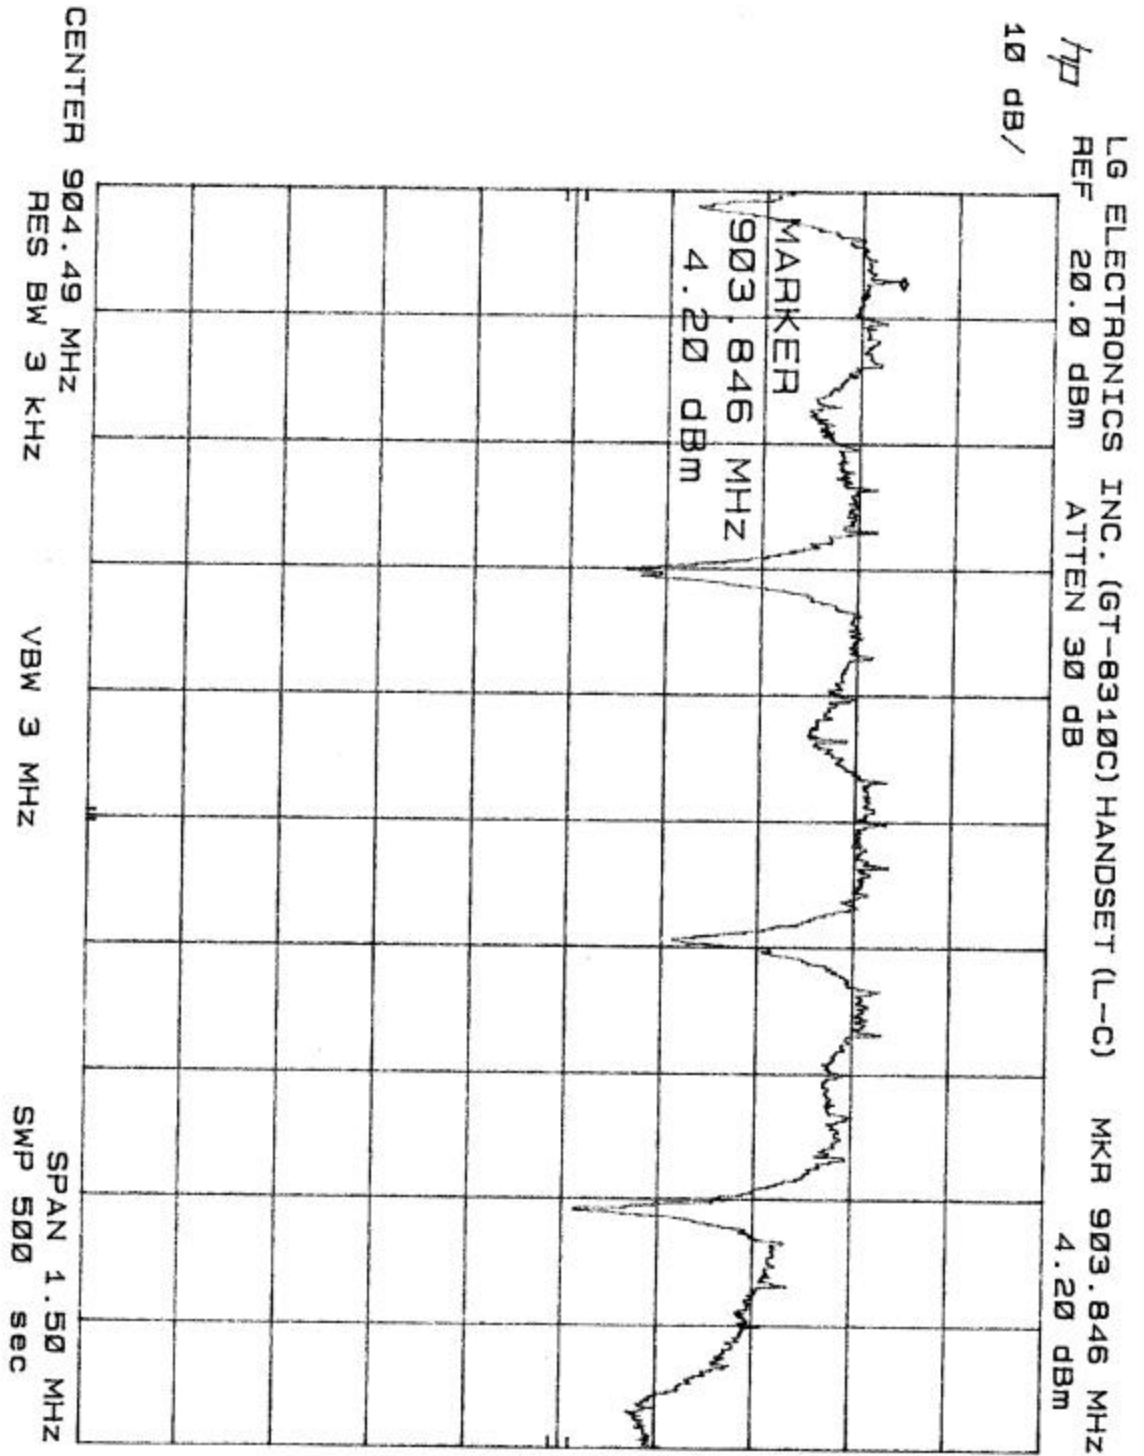

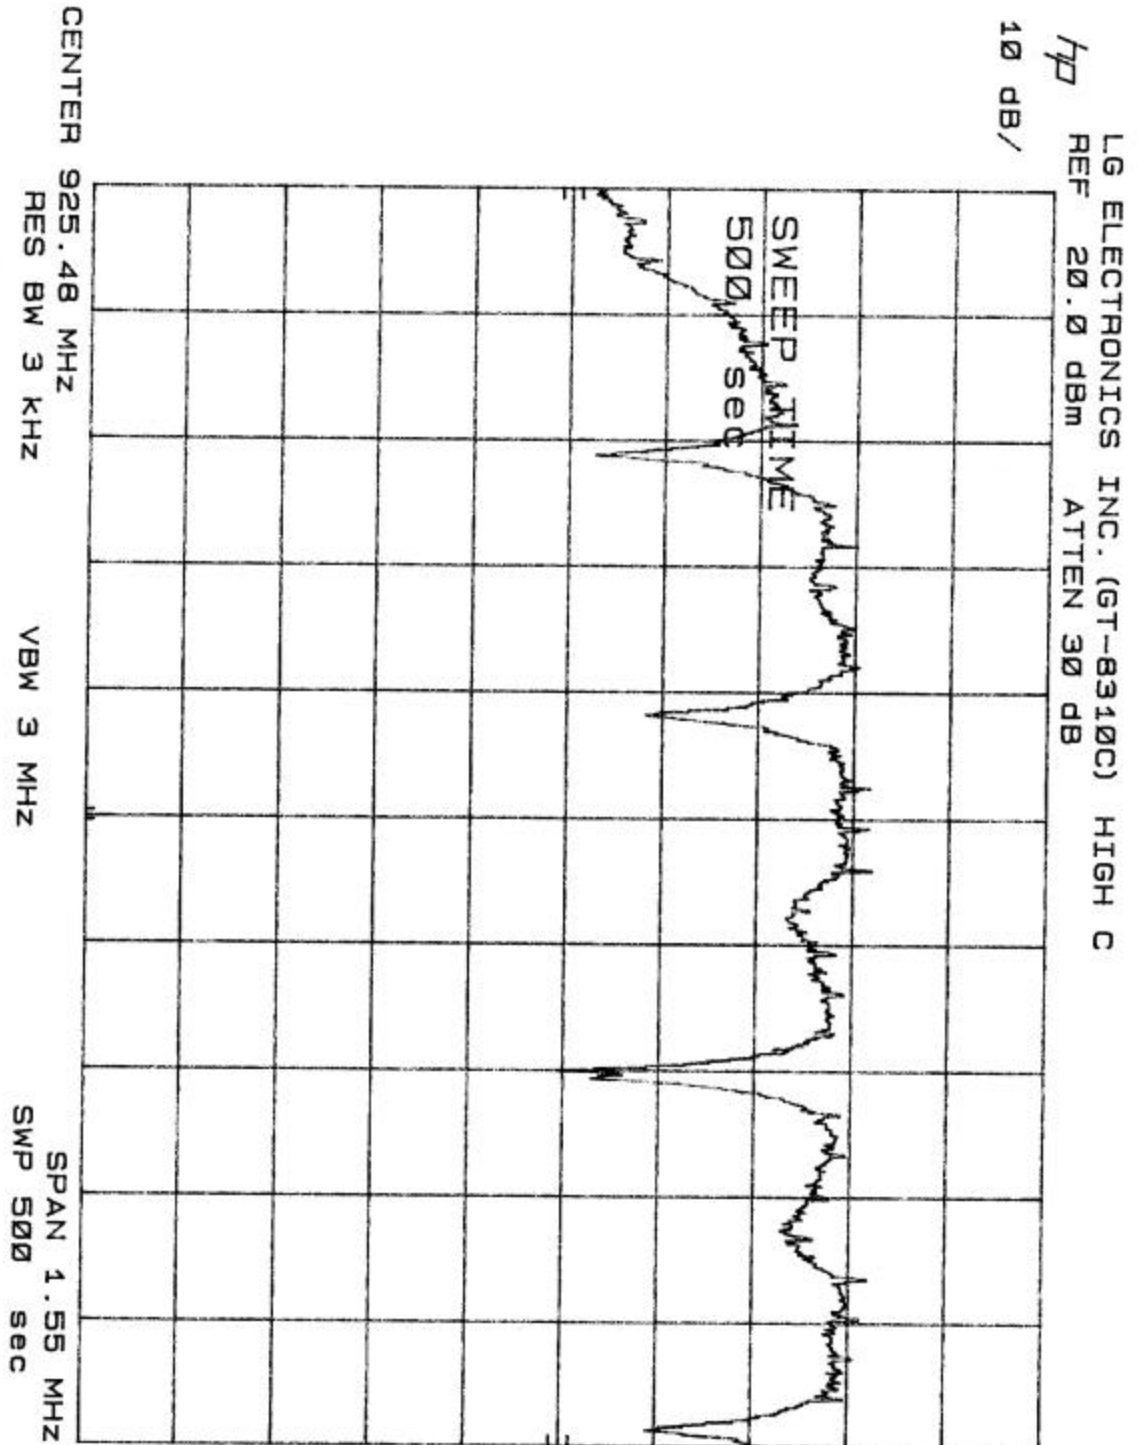

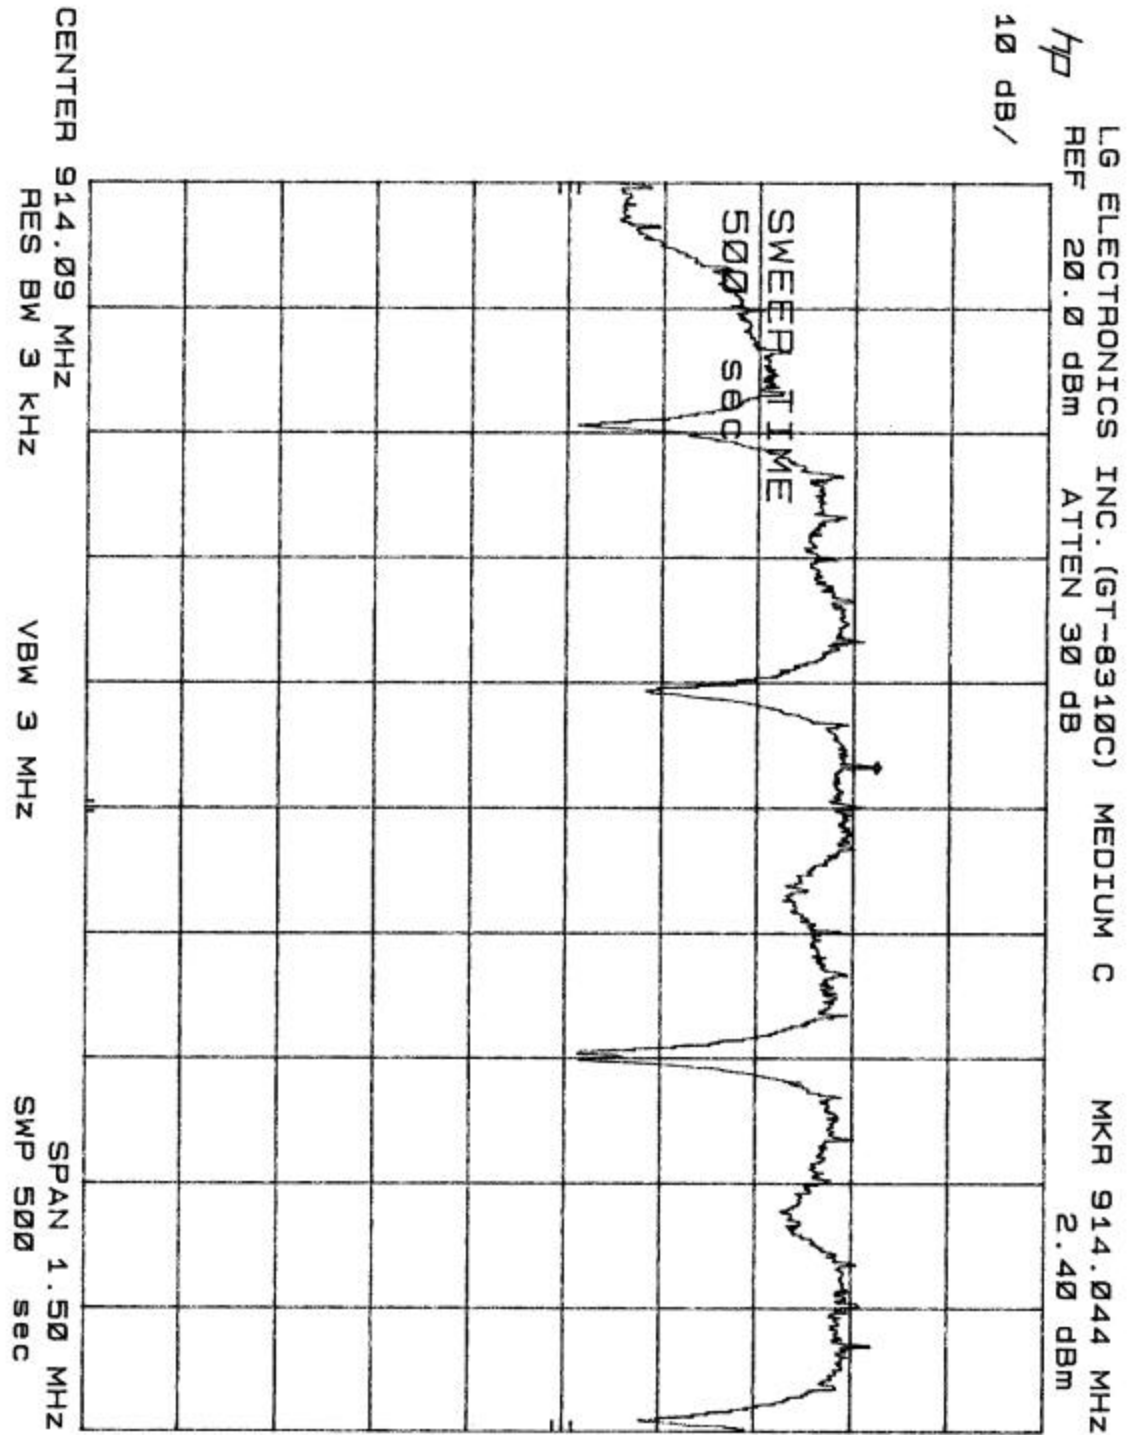

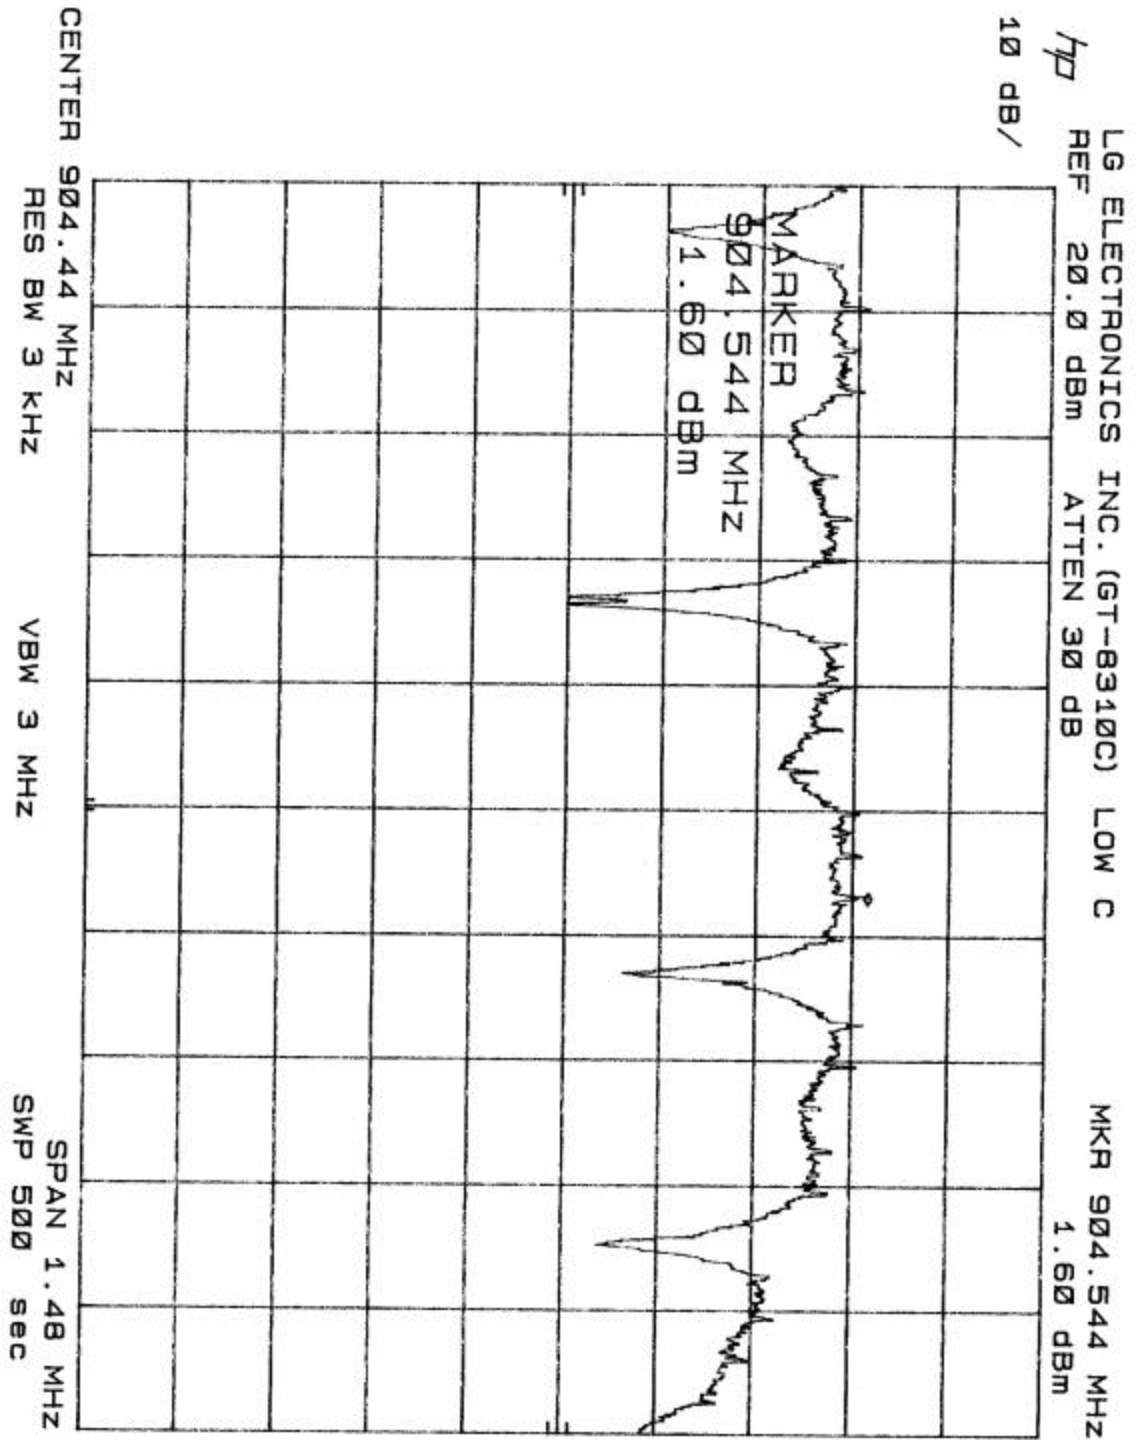

### 3.4.0 Band Edges Testing

Requirements : FCC 15.247 (2) ©, the emission power at the START and STOP frequencies shall be at least 20 dB below than the peak of the EUT's emission inside the operation band.

#### 3.4.1 Test Procedure

The antenna was removed and SMA connector was connected to the transmitter output. The transmitter output was connected to a calibrated coaxial attenuator (50 Ohm), the other end of which was connected to a spectrum analyzer with the START and STOP frequencies set to the operation band. Transmitter output was read off the spectrum analyzer in dBm. The power output at the transmitter was determined by adding the value of the attenuator to the spectrum analyzer reading.

The test was performed at three frequencies (low, middle, and high channels) and on all power levels that can be setup on the transmitter.

#### 3.4.2 Test Equipment

HP 8566B Spectrum Analyzer  
HP 7470A Plotter

#### 3.4.3 Test Results


Refer to the attached plots.

#### BASE


| Band Edge      |         |
|----------------|---------|
| High Channel   | Page 35 |
| Middle Channel | Page 36 |
| Low Channel    | Page 37 |


#### HANDSET


| Band Edge      |         |
|----------------|---------|
| High Channel   | Page 32 |
| Middle Channel | Page 33 |
| Low Channel    | Page 34 |

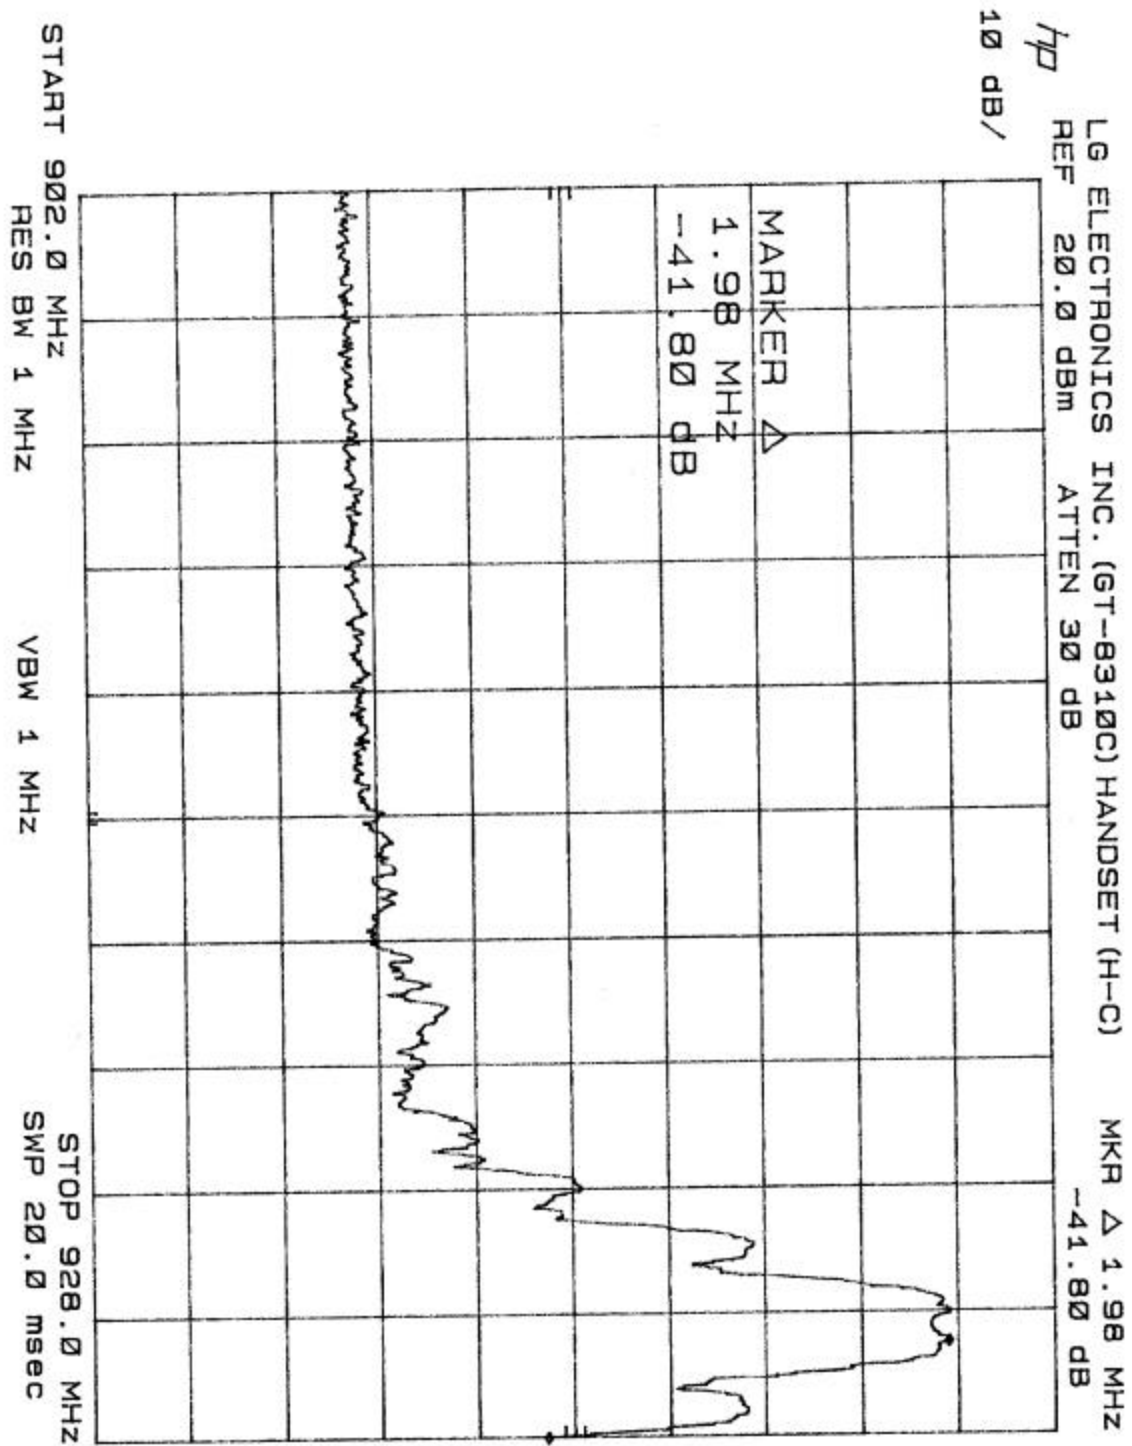





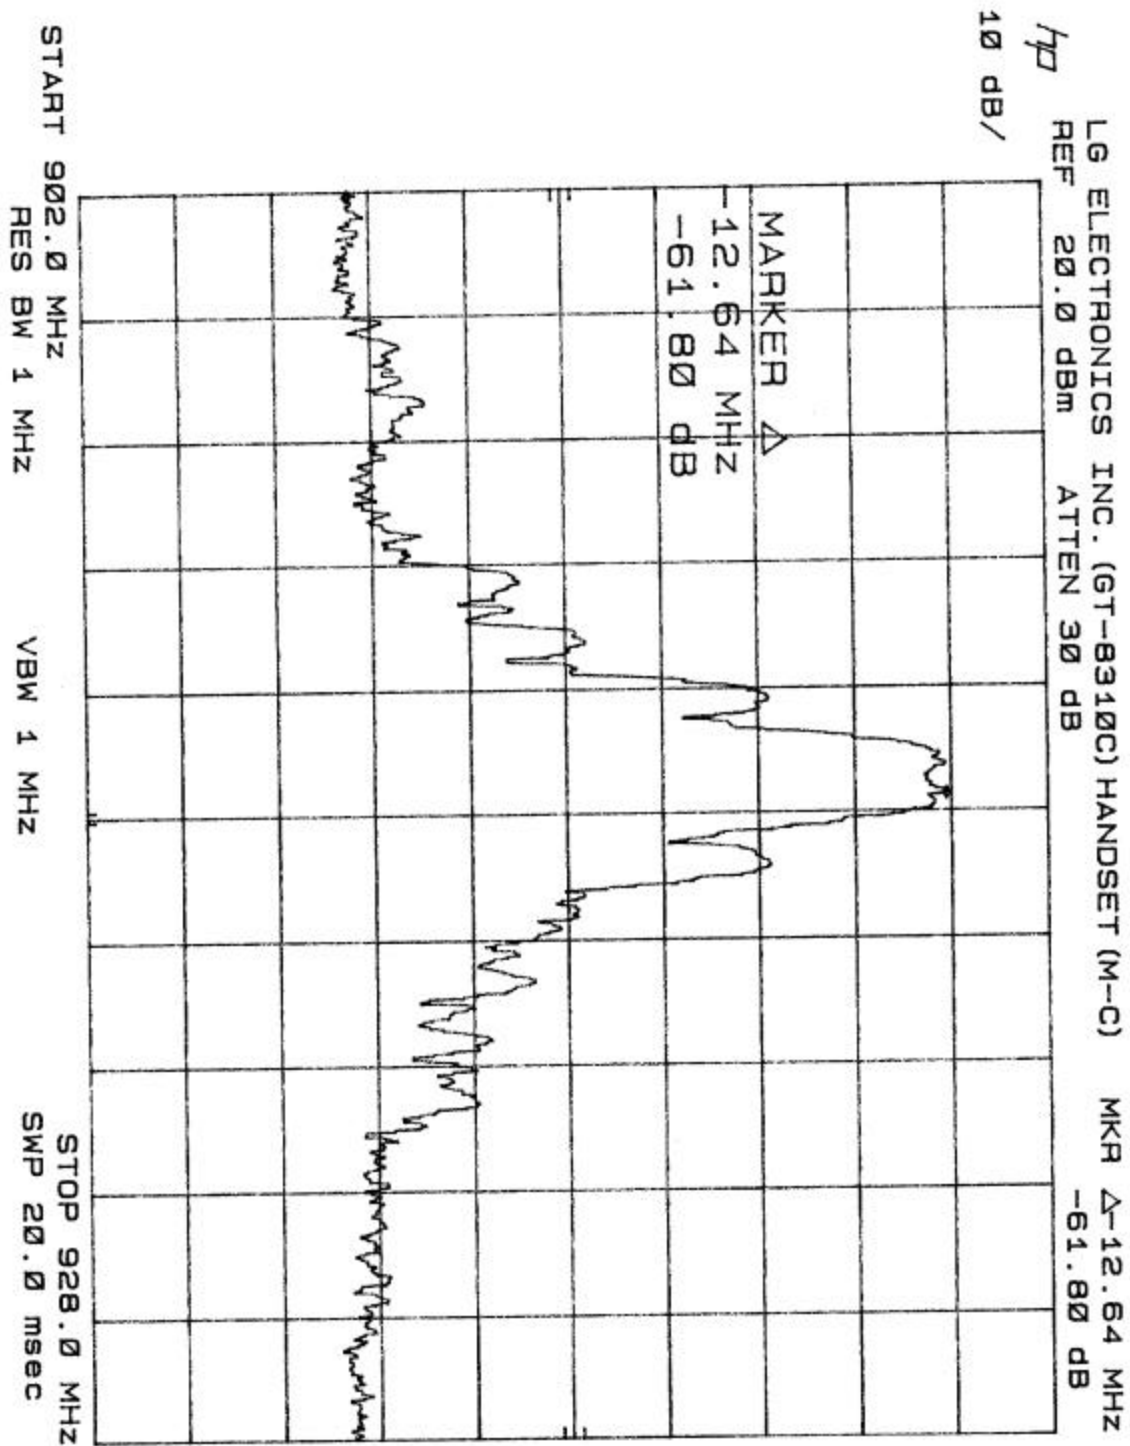

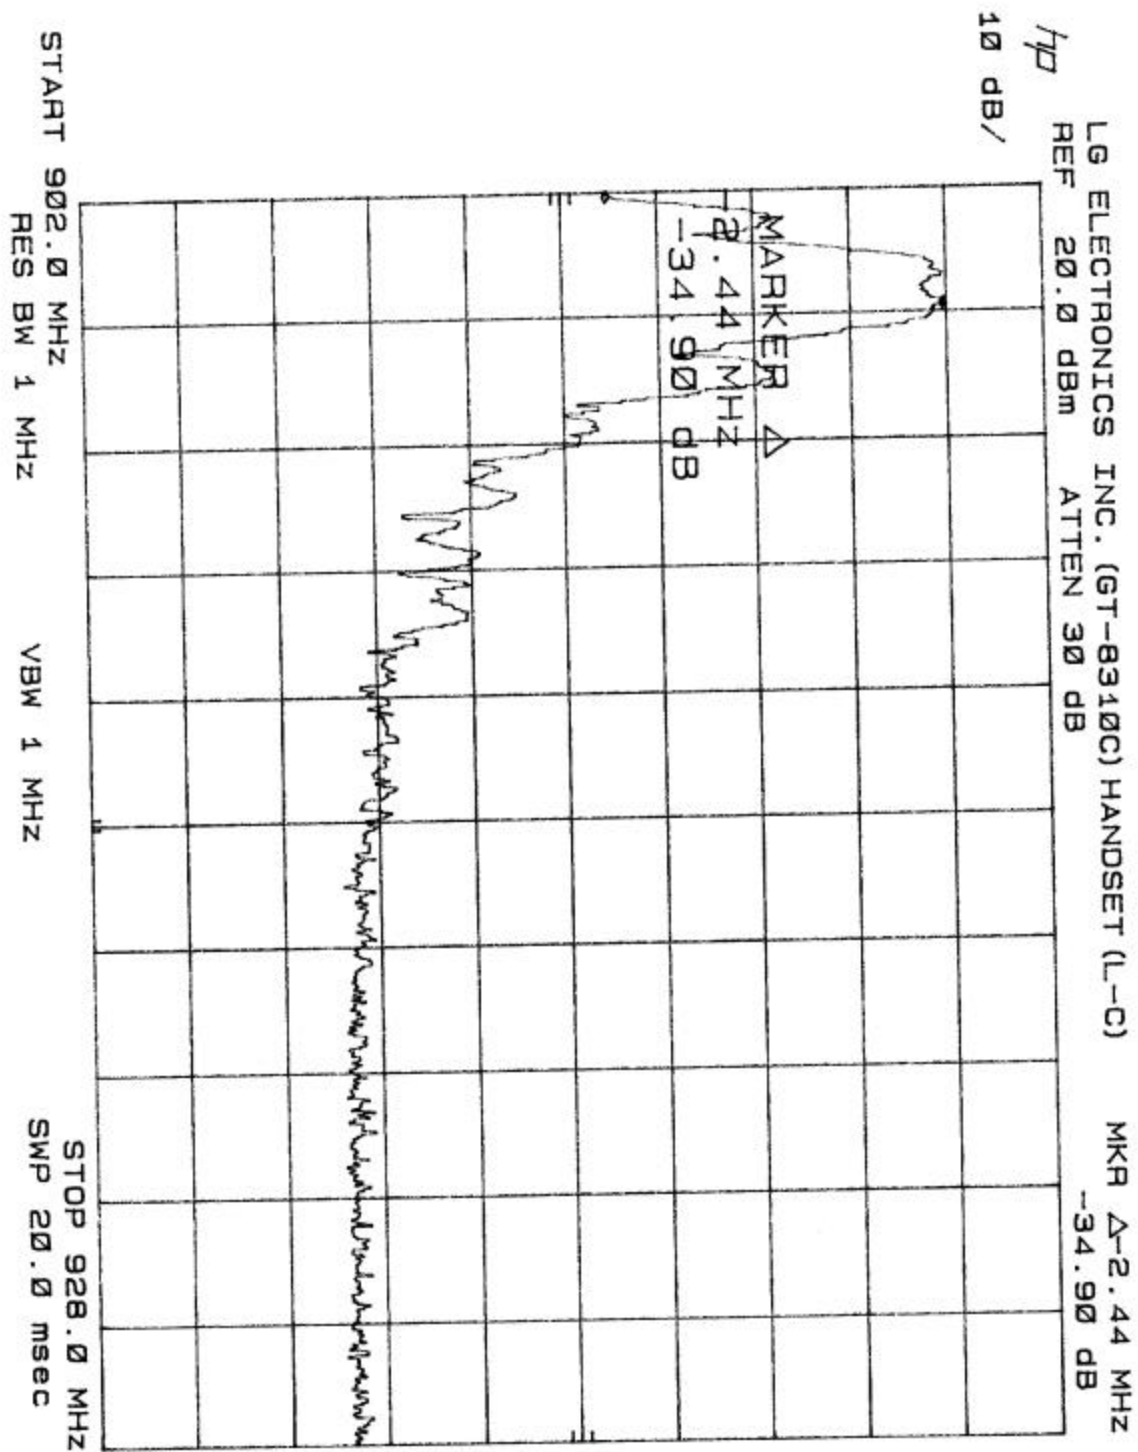

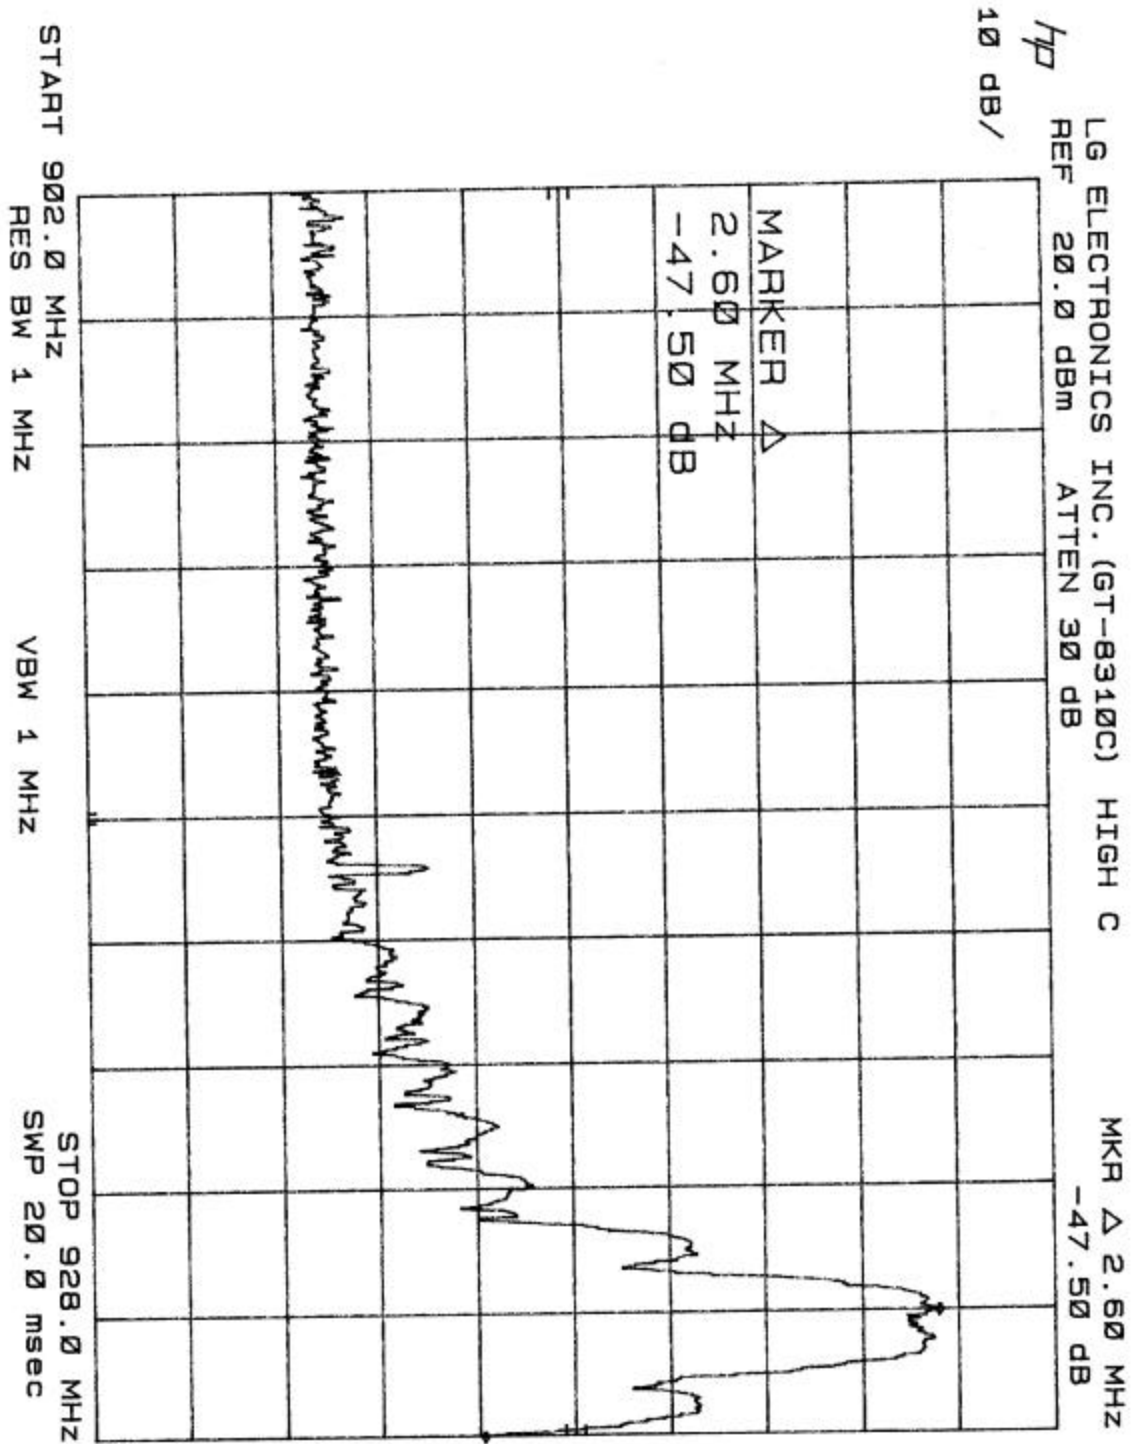

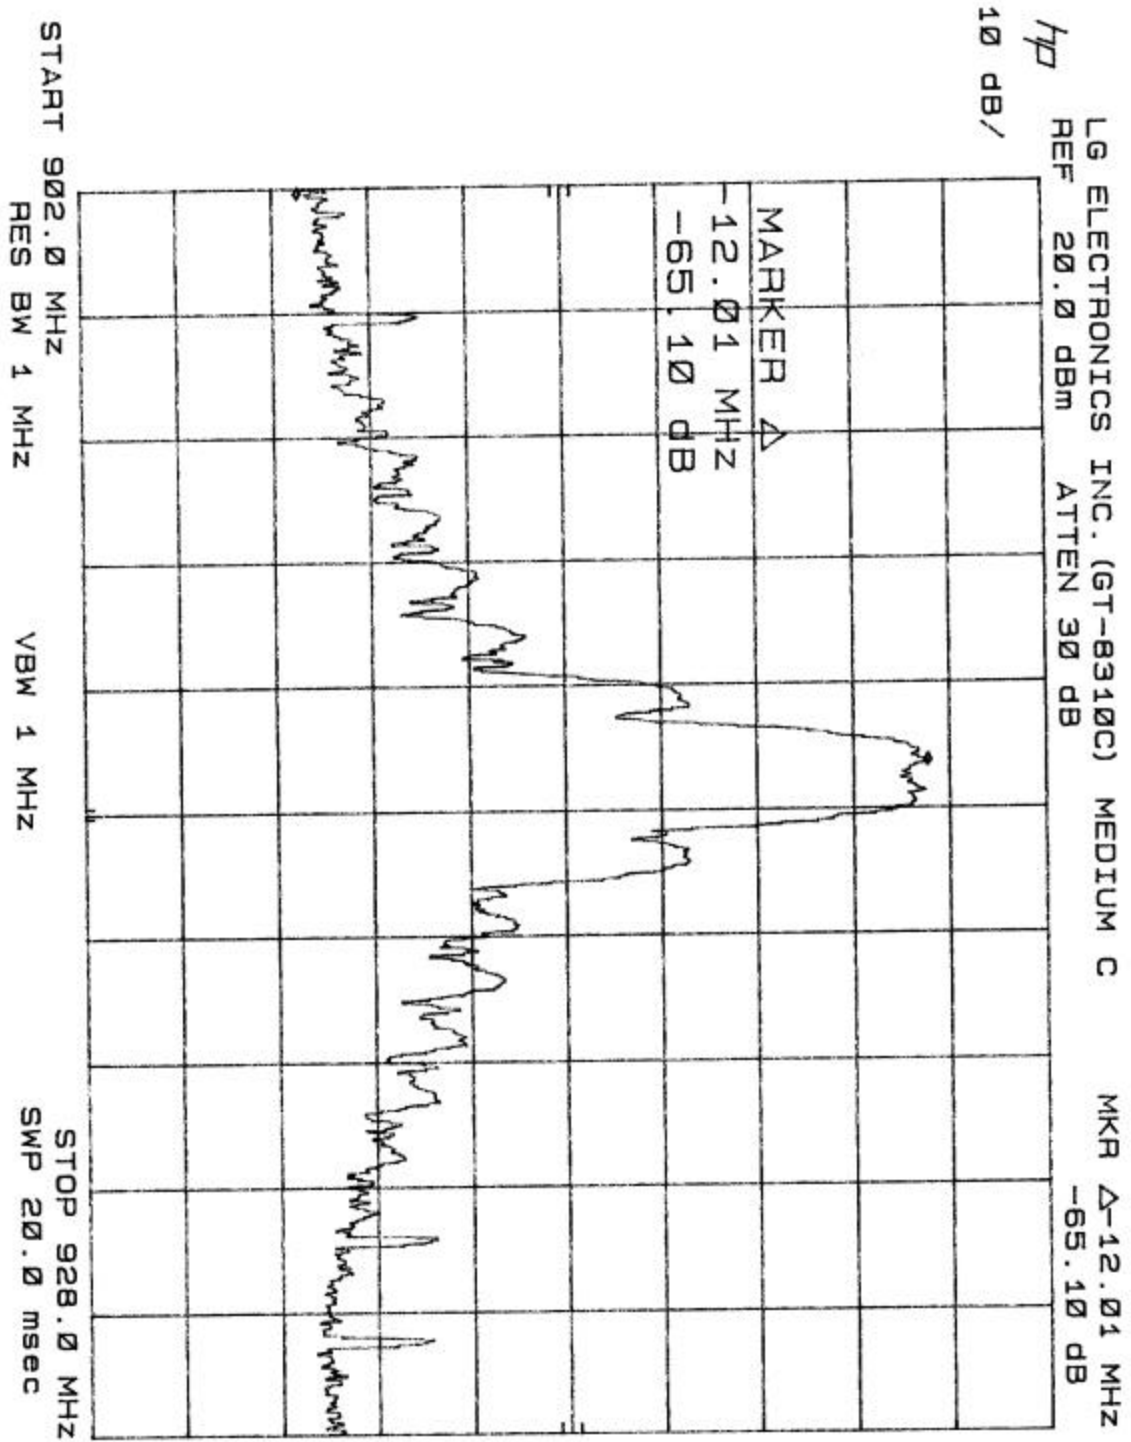

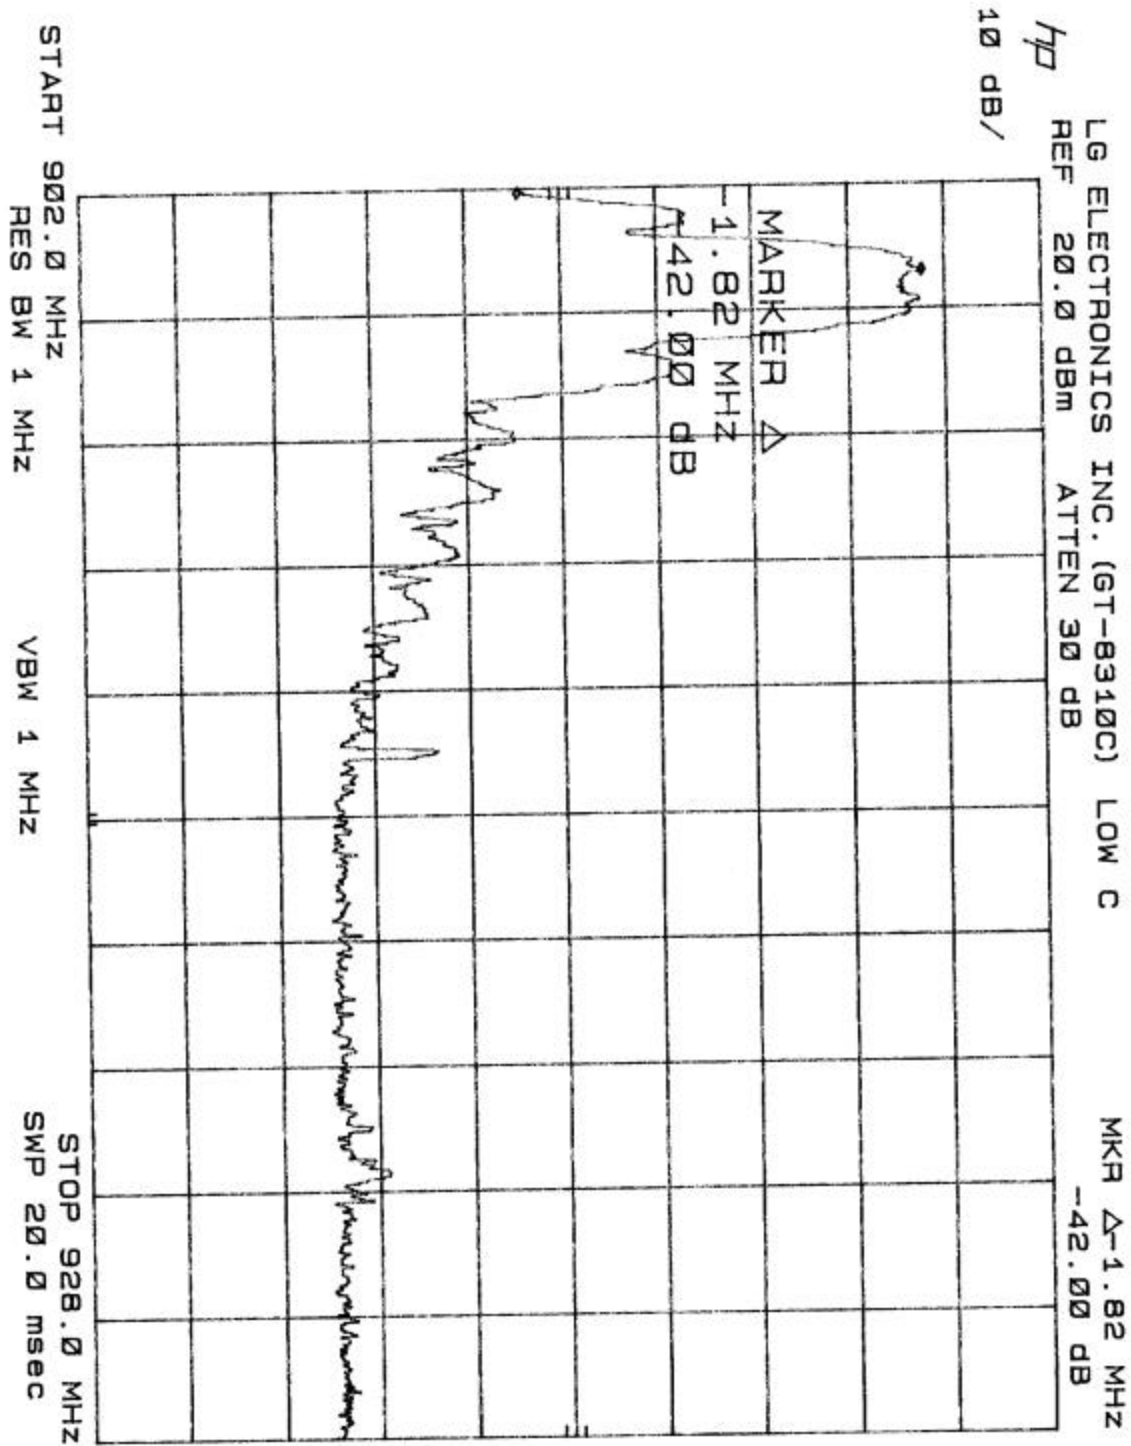

### 3.5.0 Spurious Emissions

Requirements : FCC 15.247 (2) (c). The harmonics and other signals must be at least 20 dB less than the highest emissions level within the operation band.

#### 3.5.1 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

#### 3.5.2 Test Equipment

Hewlett Packard HP8566B Spectrum Analyzer  
Hewlett Packard HP 7470A Plotter

#### 3.5.3 Test Results


Refer to the attached plots.


#### BASE

| Spurious Emission |             |
|-------------------|-------------|
| High Channel      | Page 45, 46 |
| Middle Channel    | Page 47, 48 |
| Low Channel       | Page 49, 50 |


#### HANDSET


| Spurious Emission |             |
|-------------------|-------------|
| High Channel      | Page 39, 40 |
| Middle Channel    | Page 41, 42 |
| Low Channel       | Page 43, 44 |

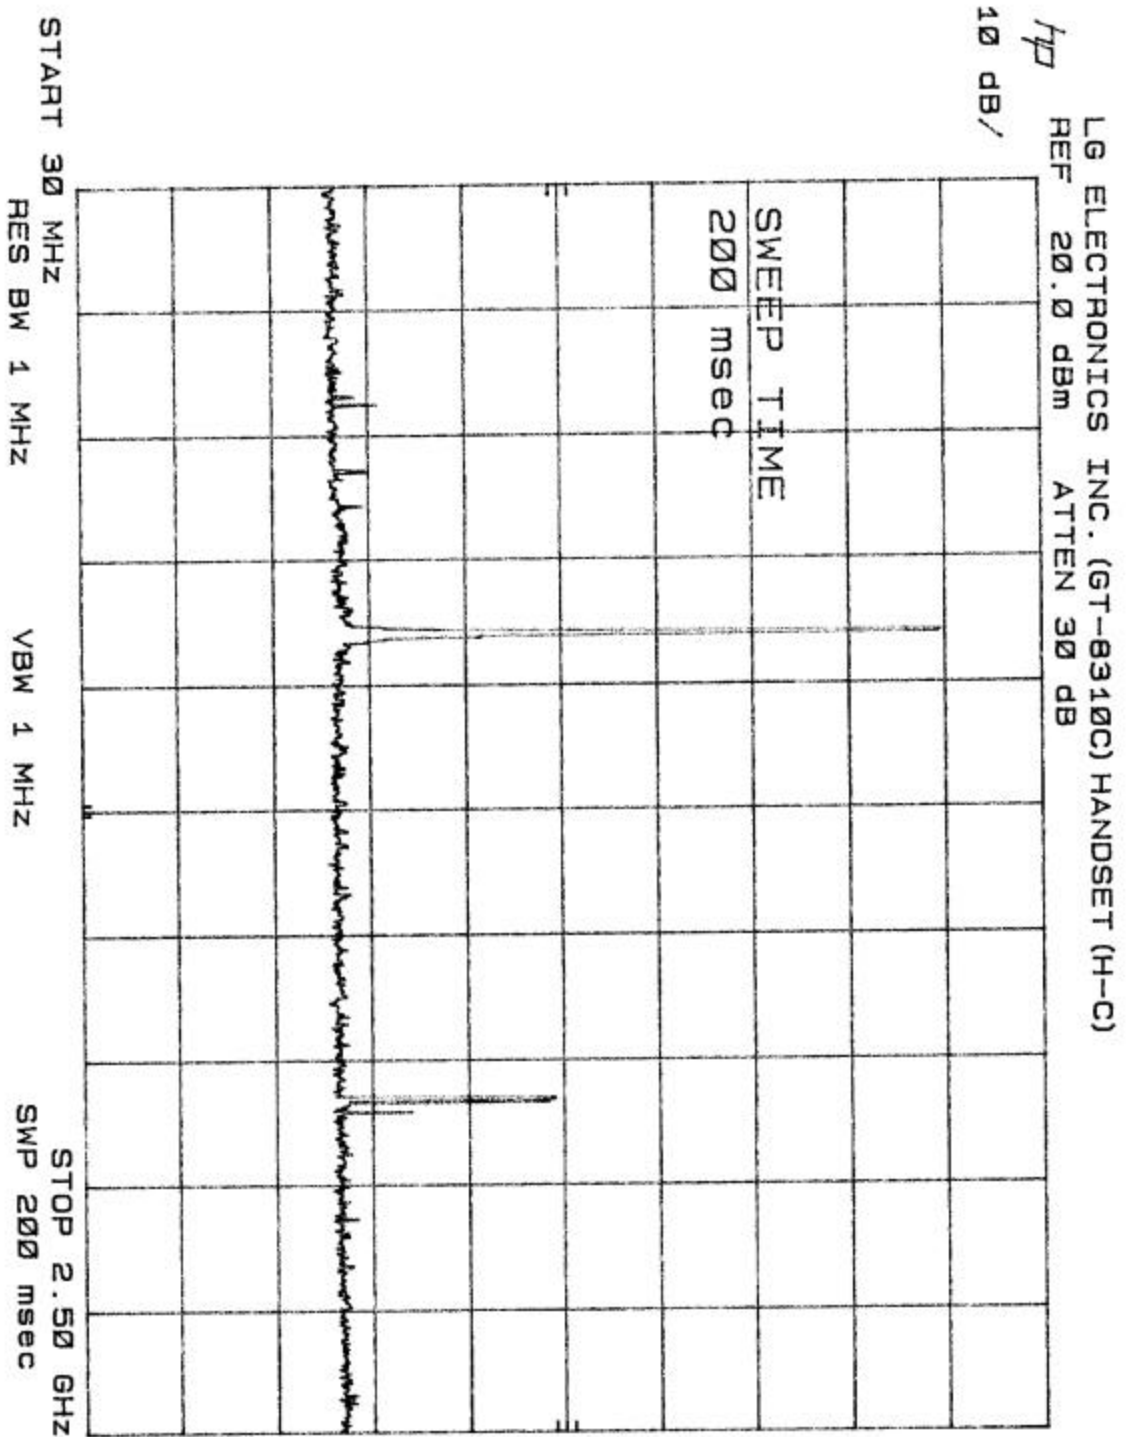


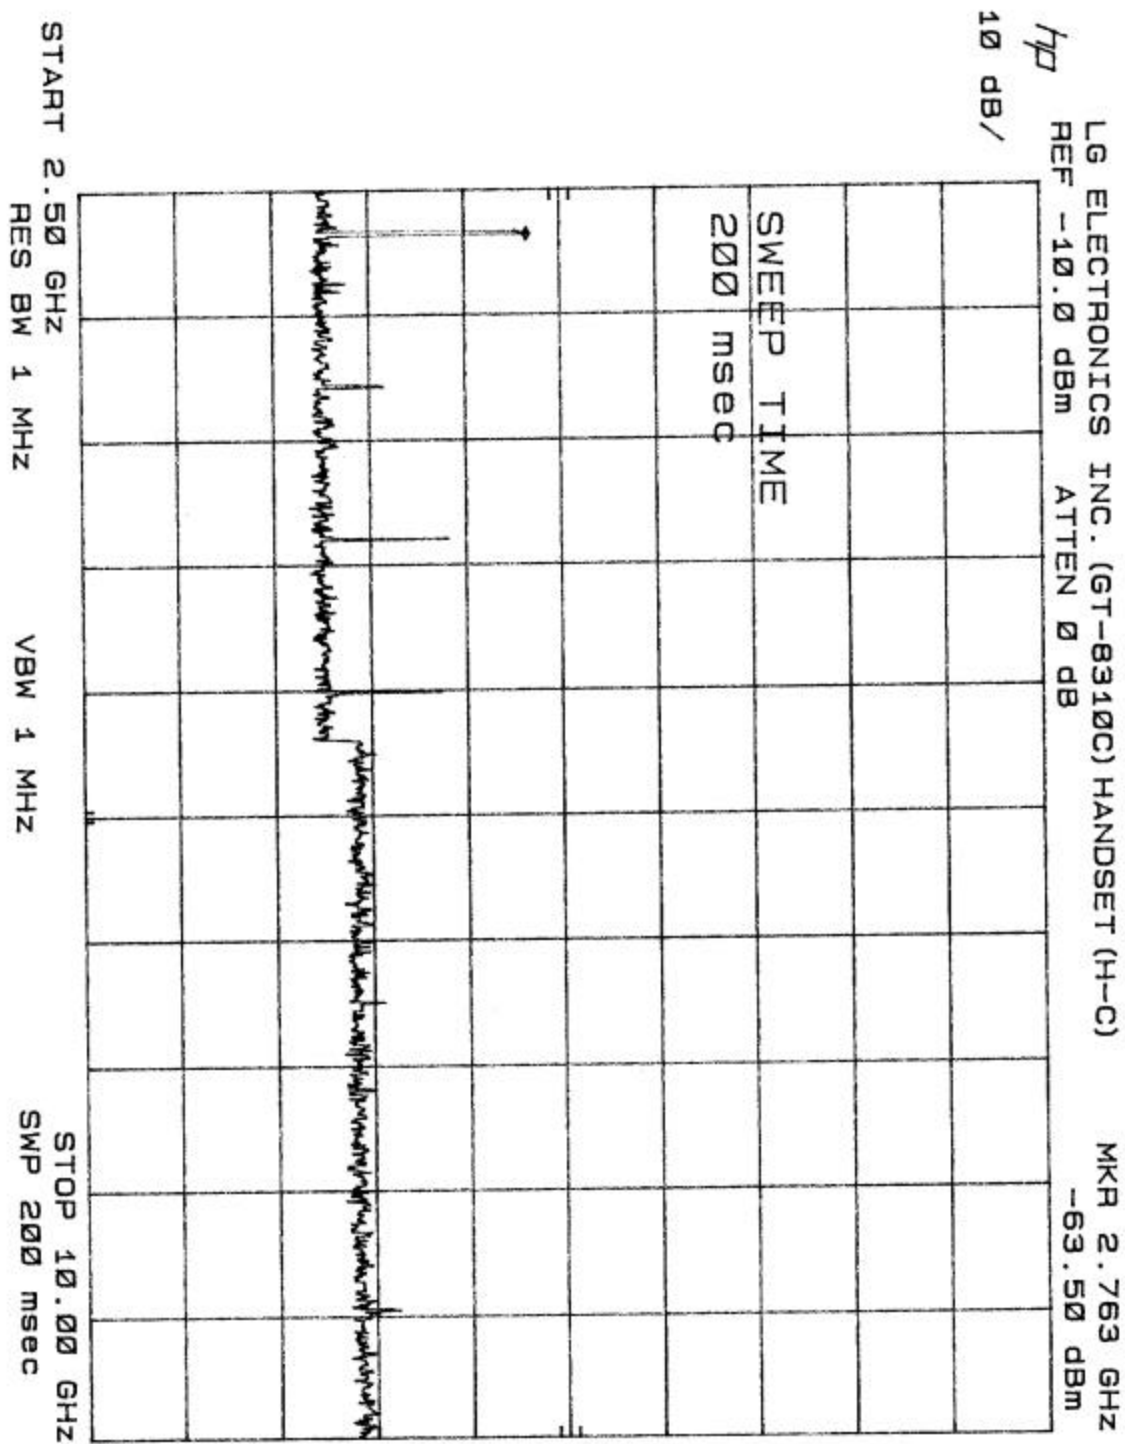





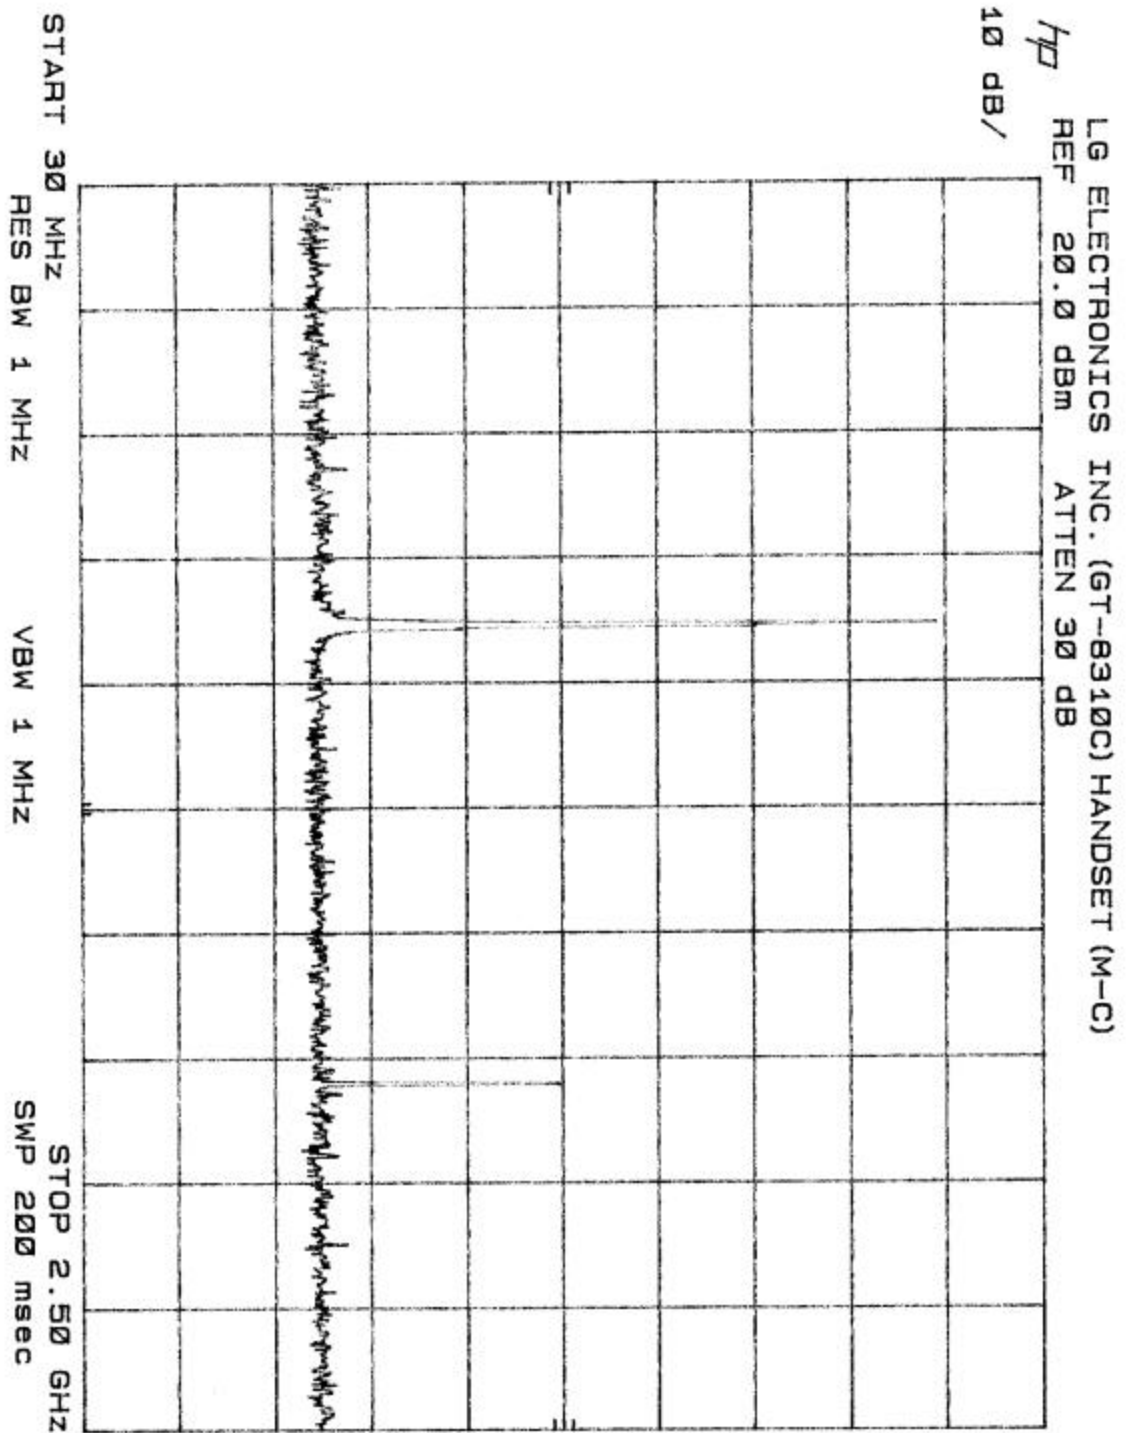


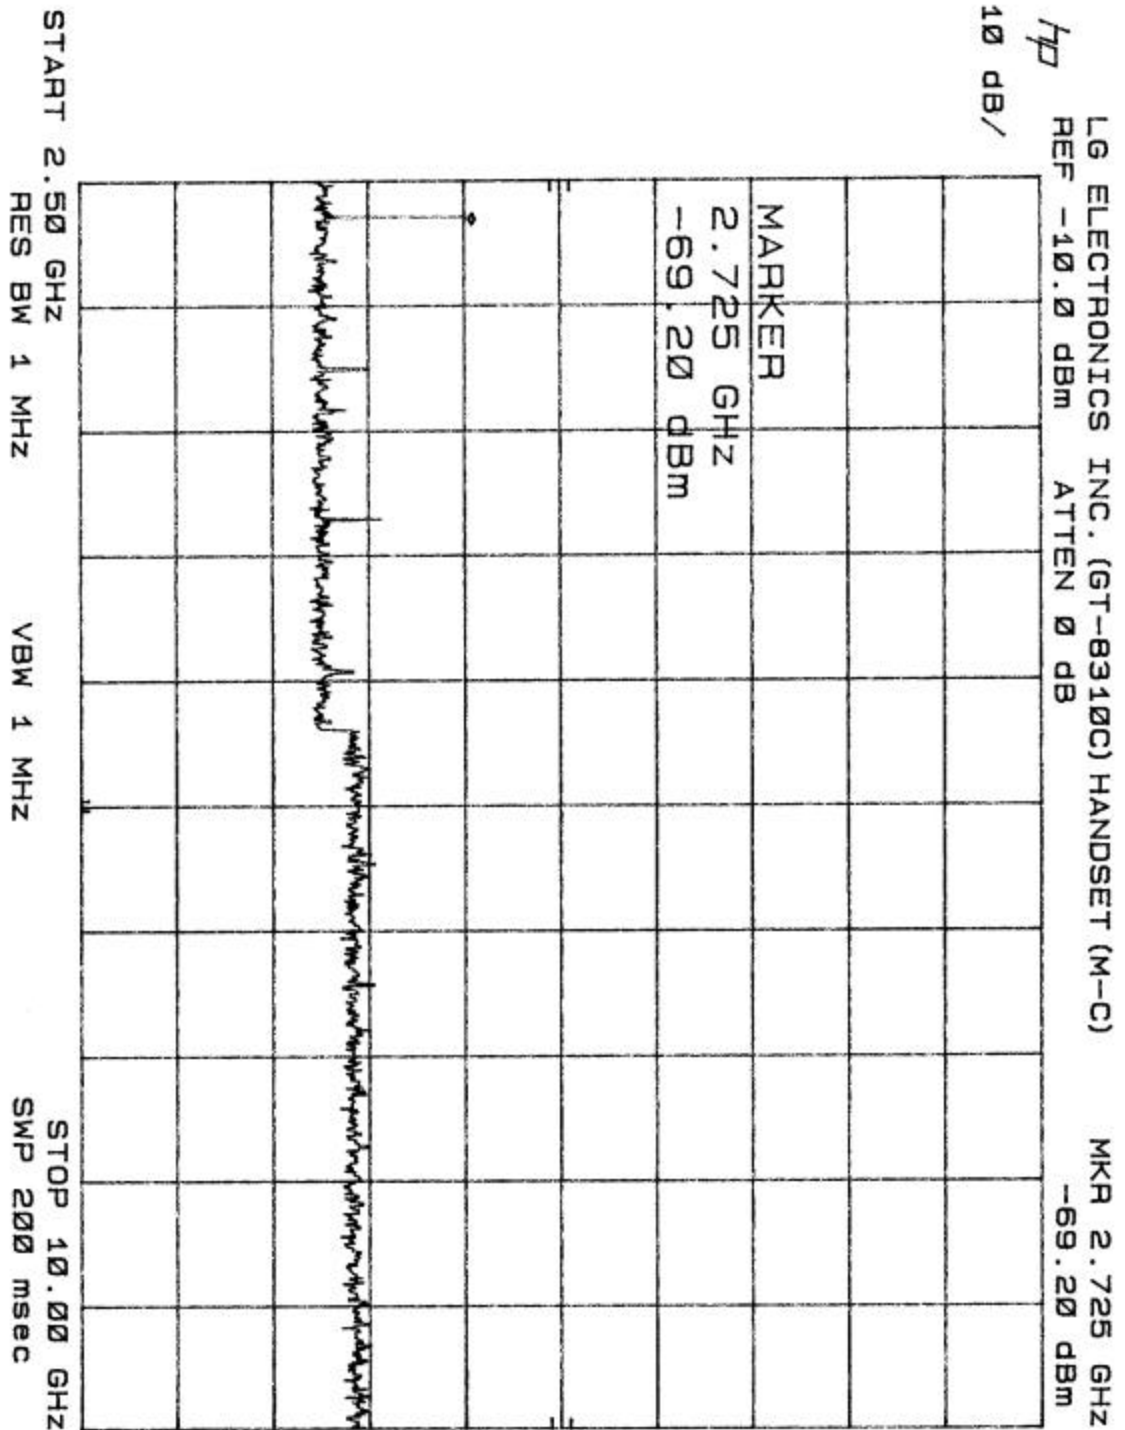


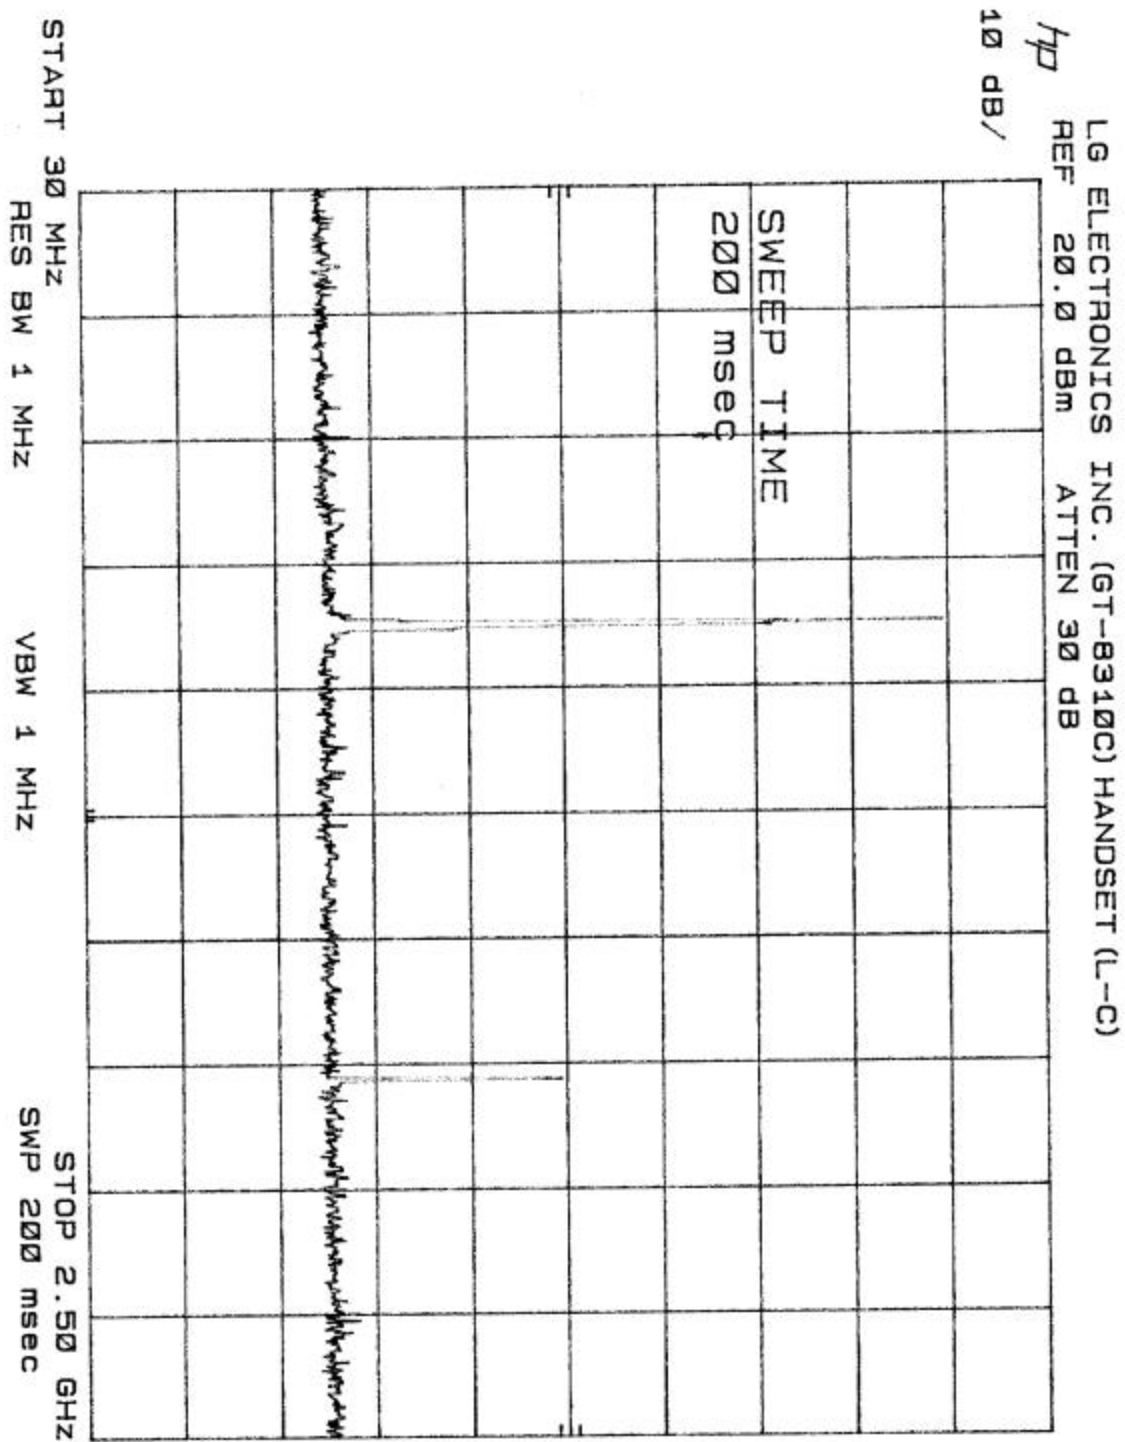


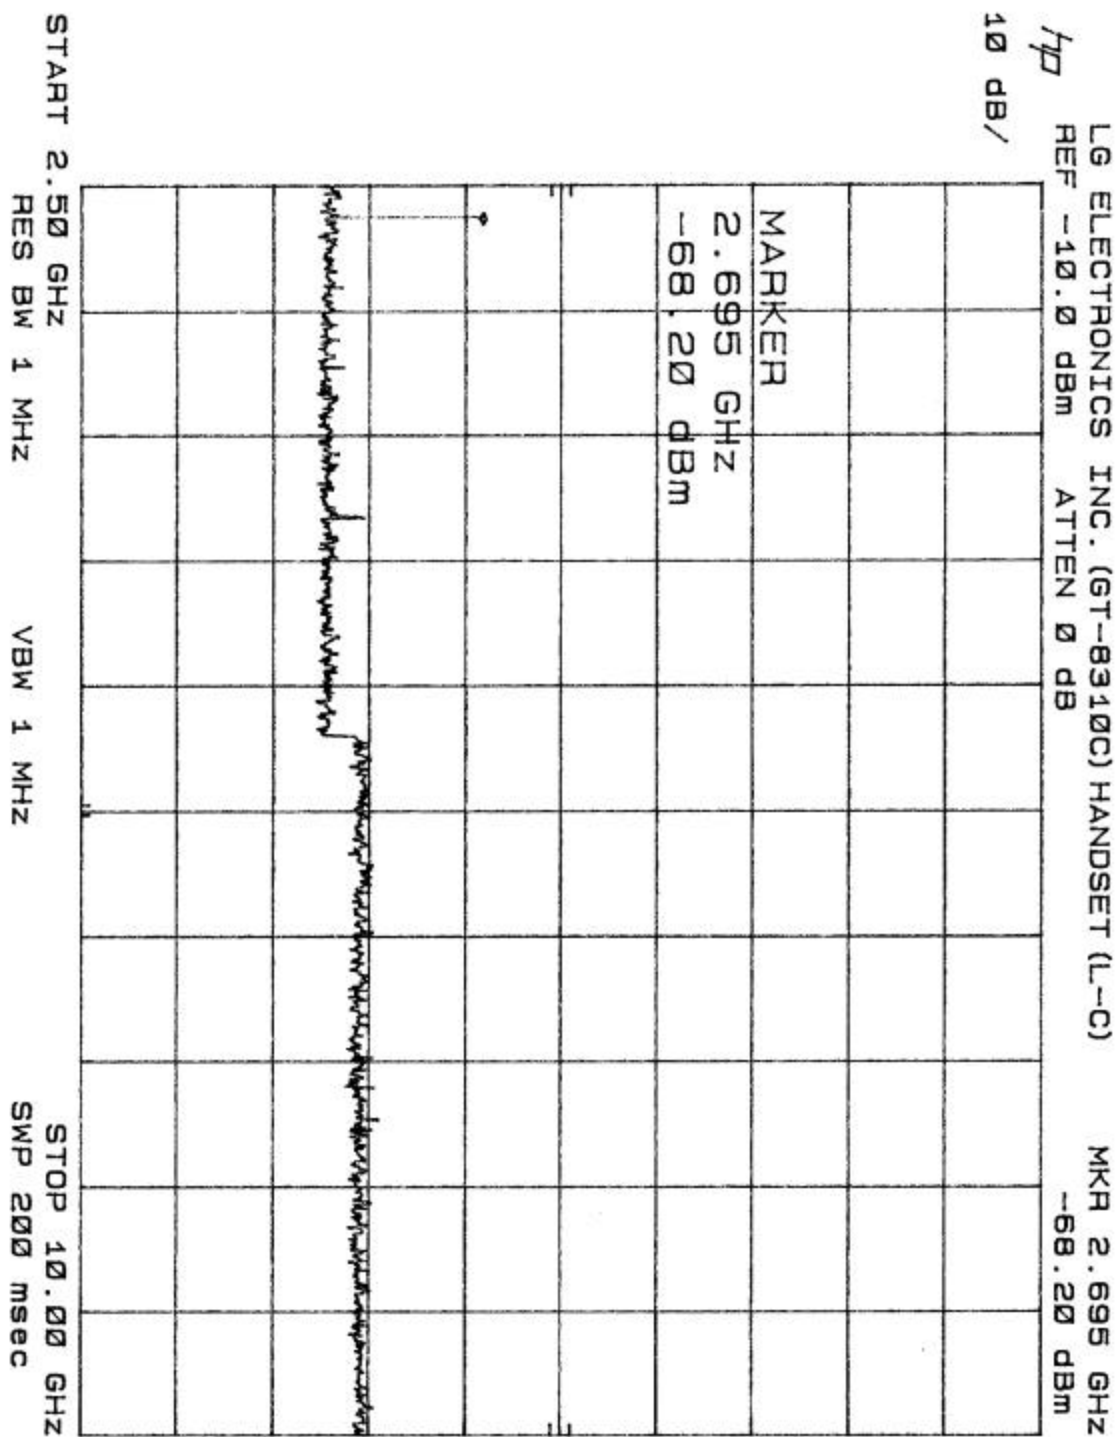

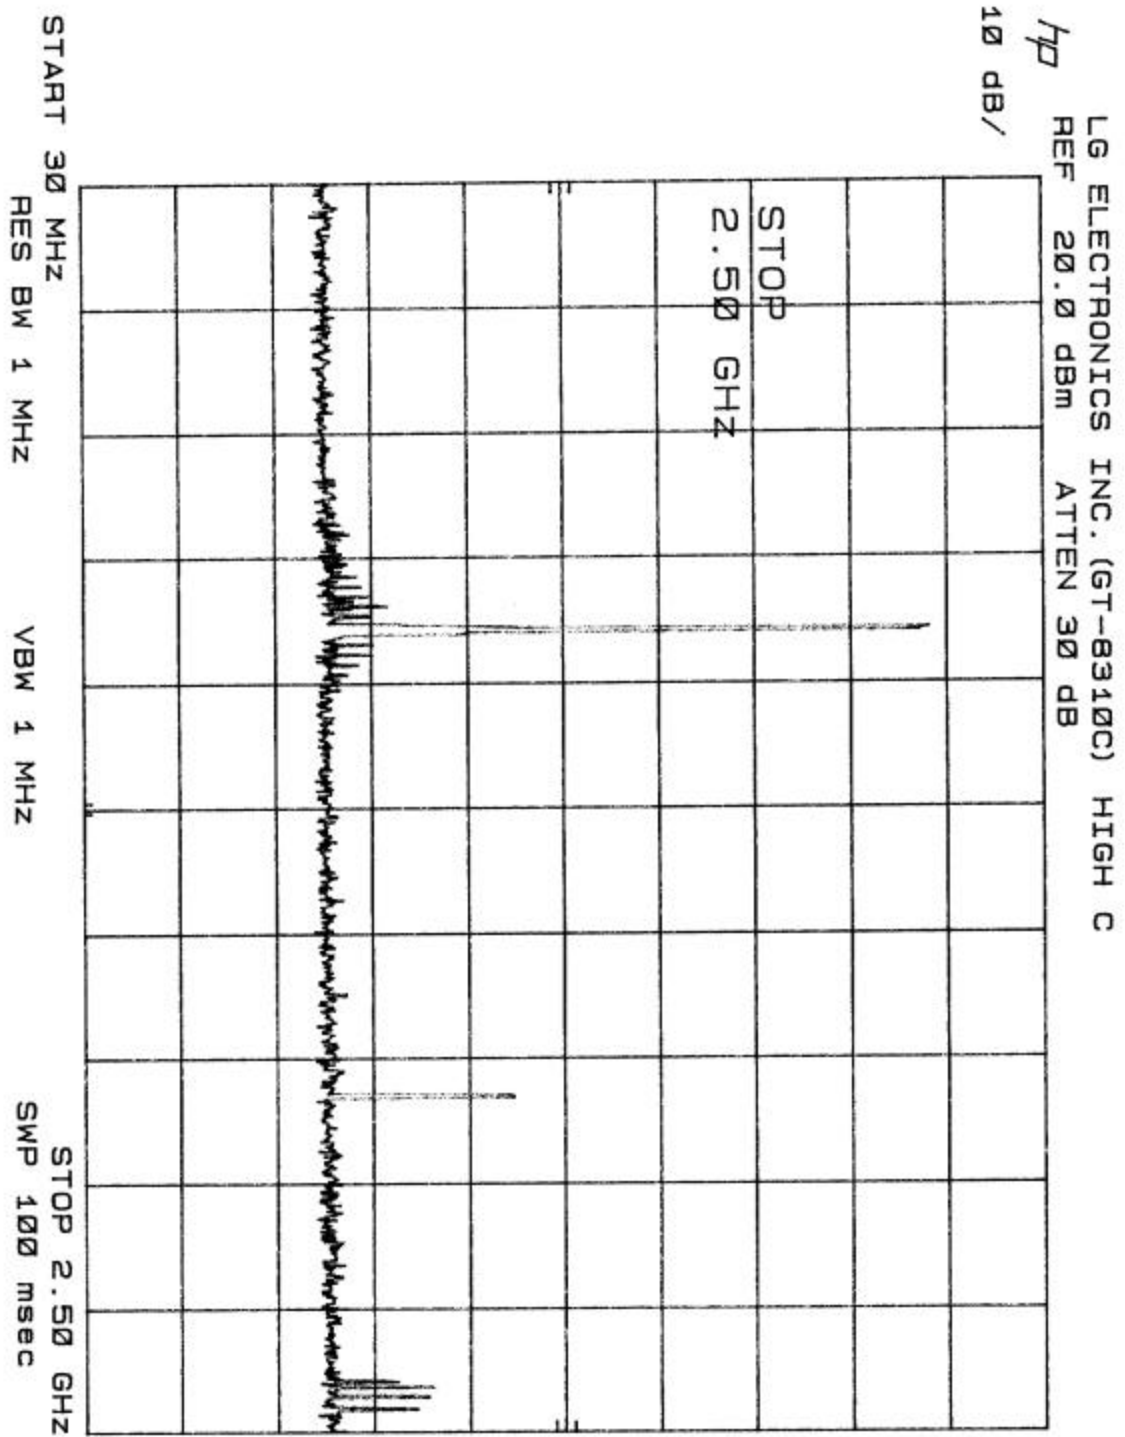


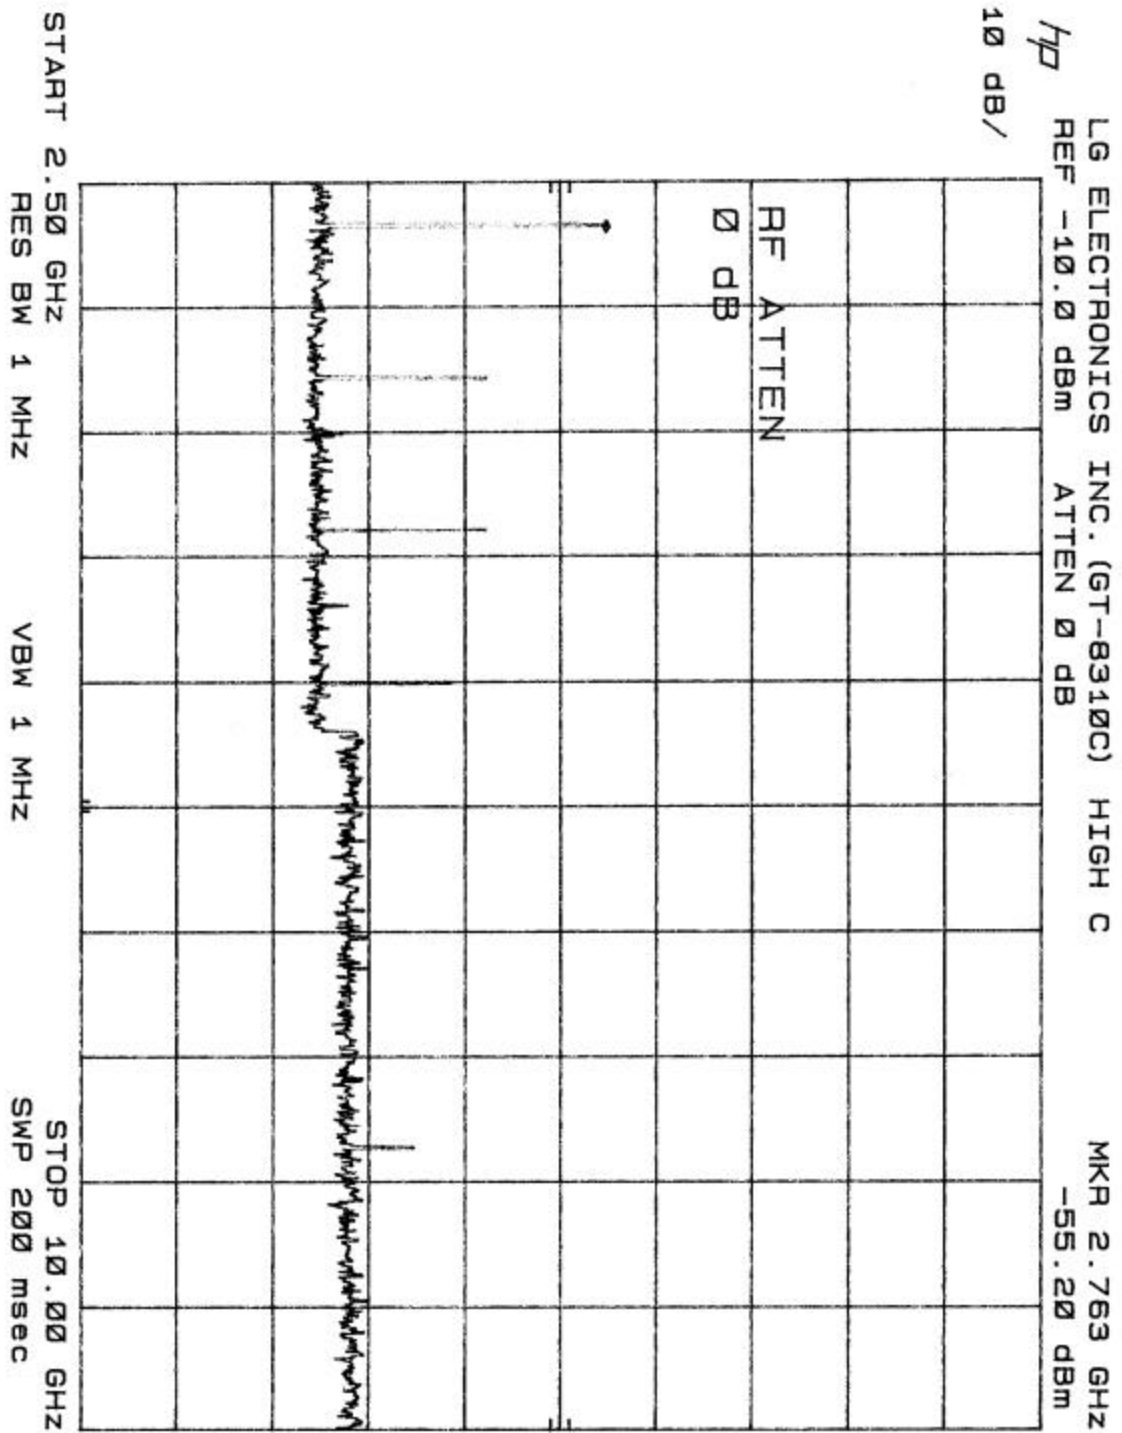


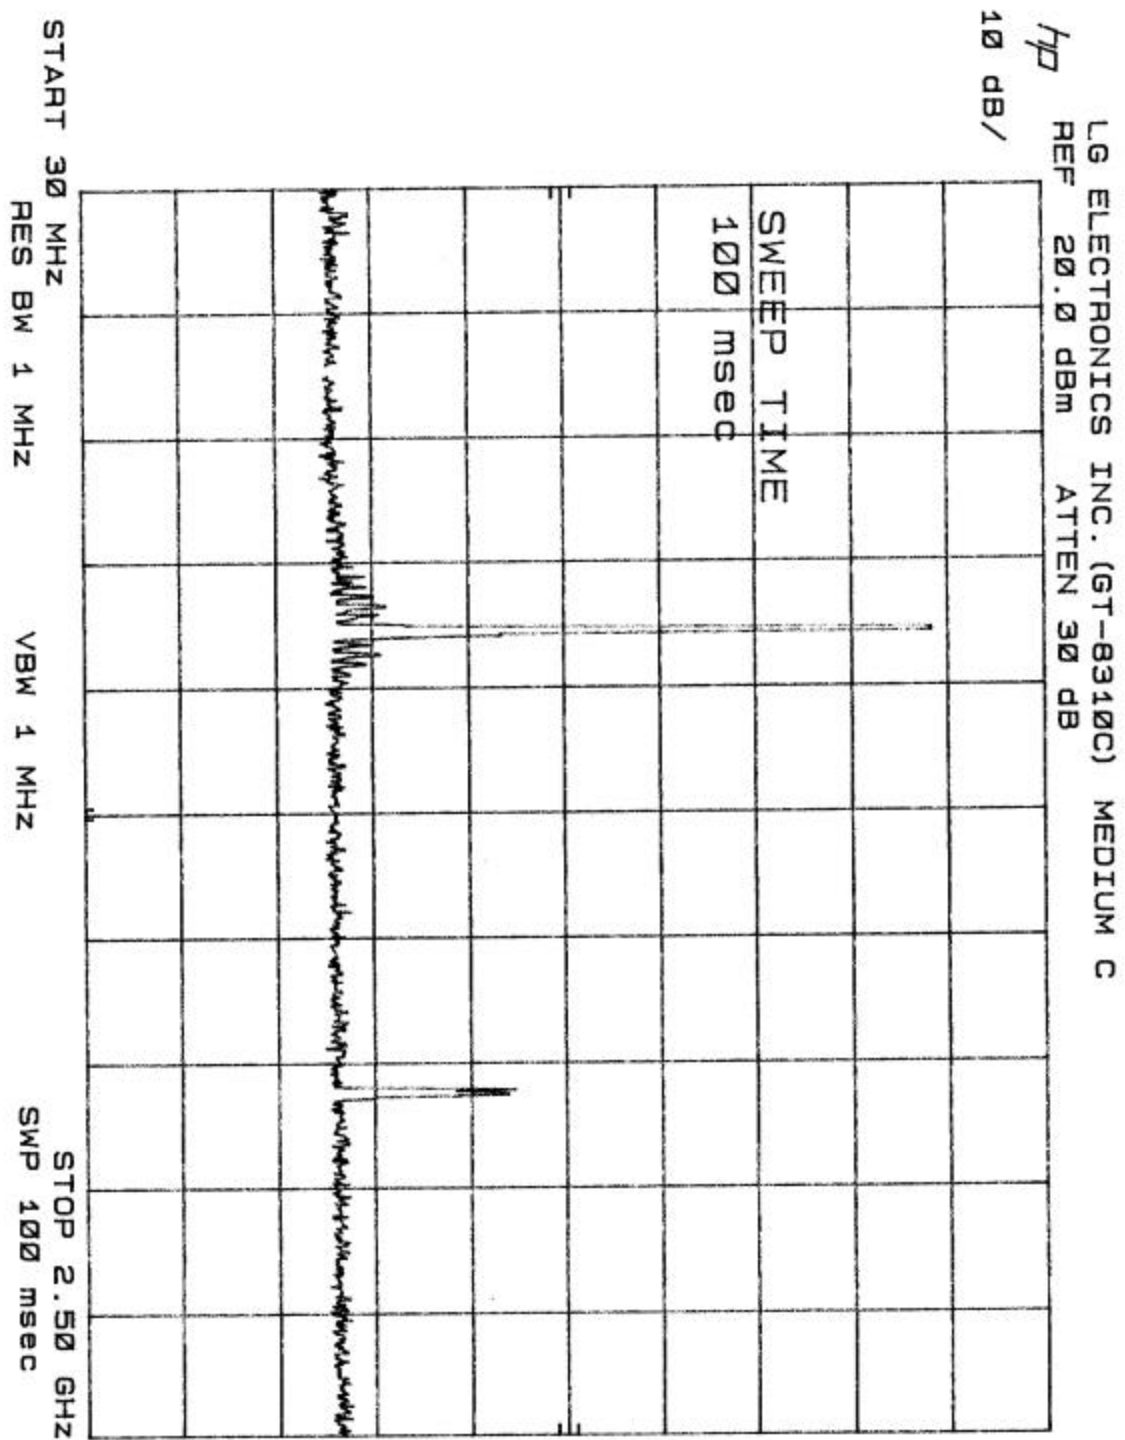

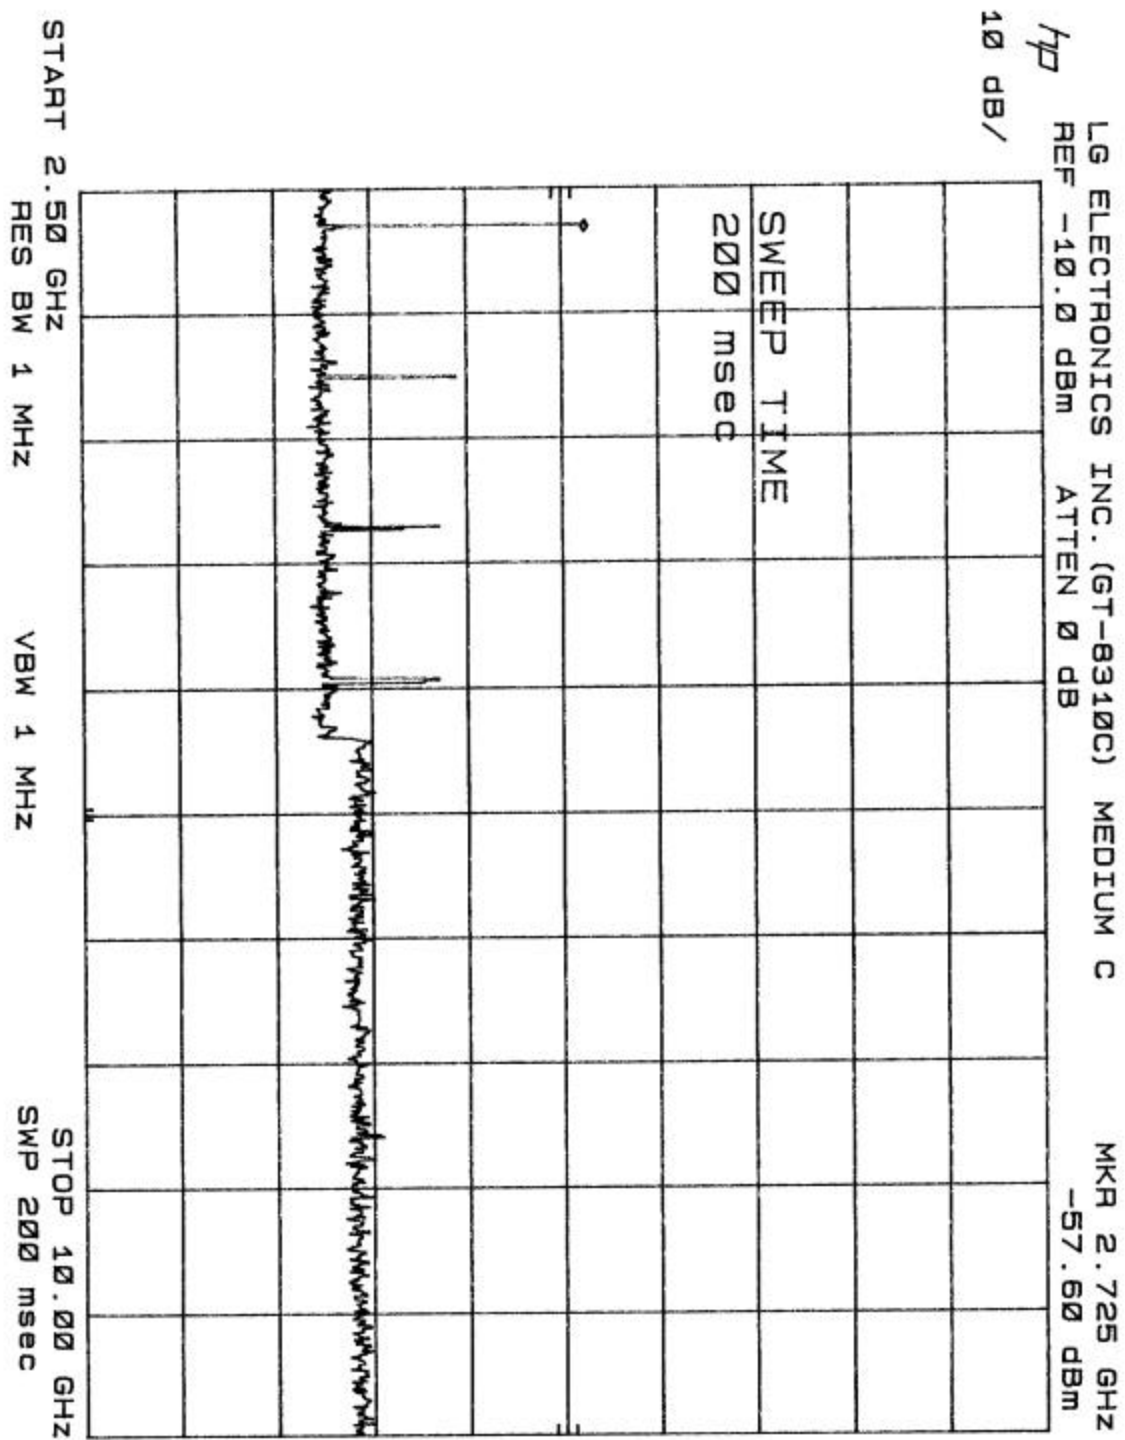



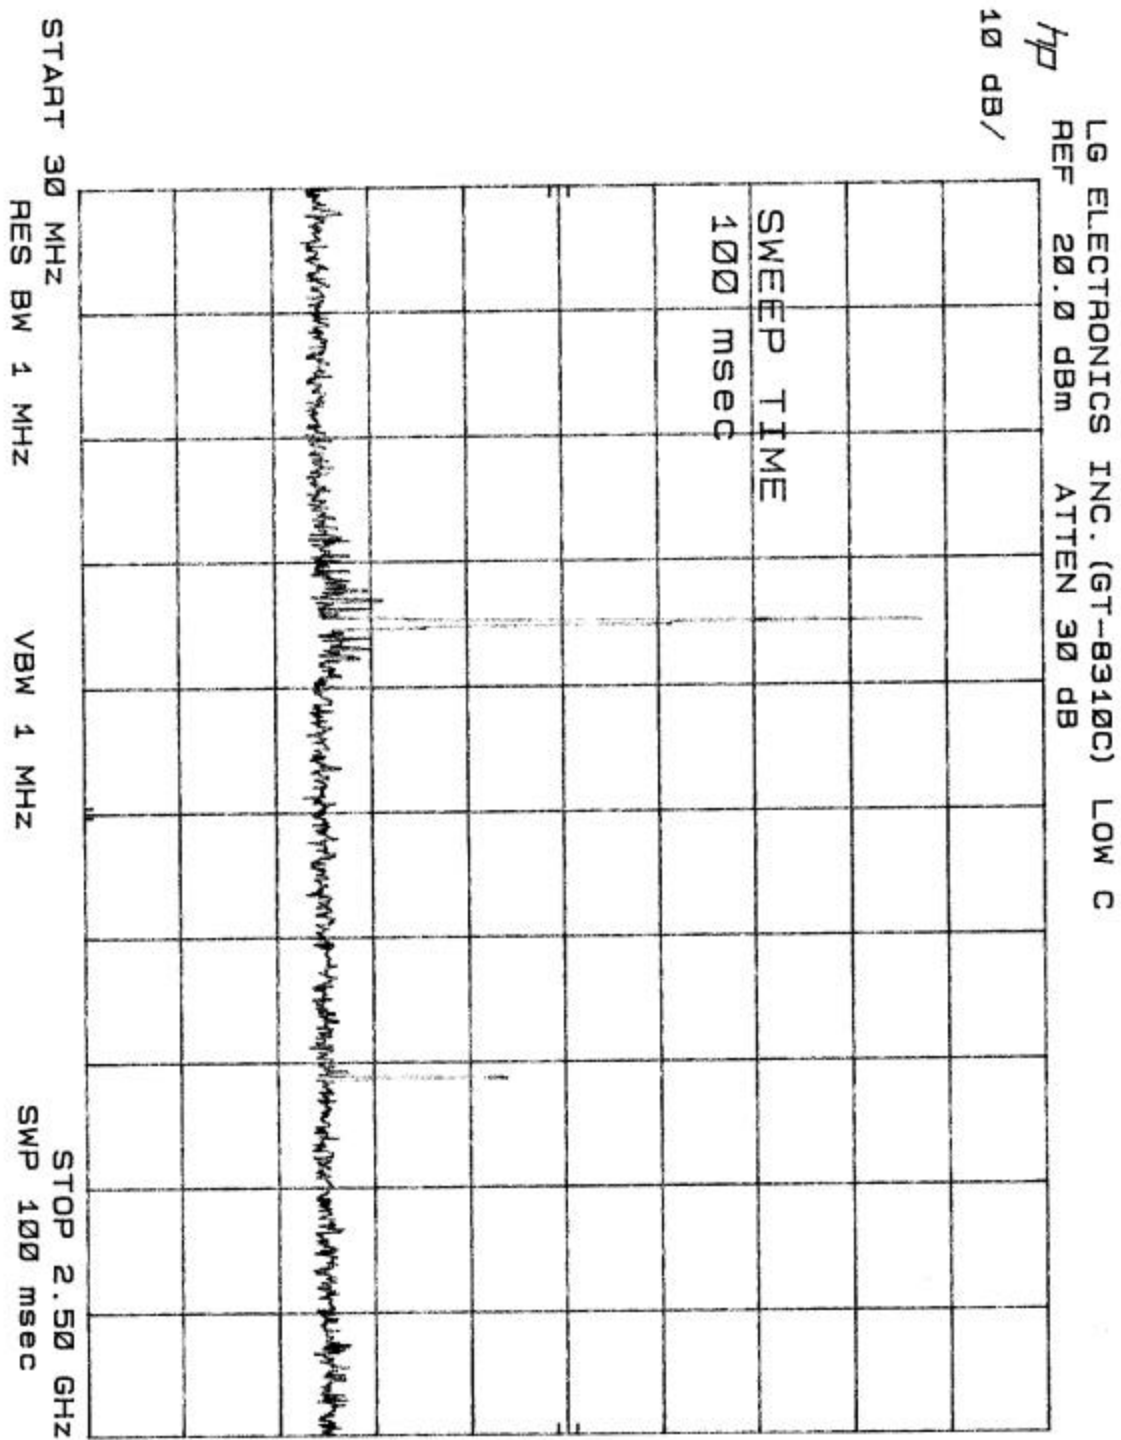

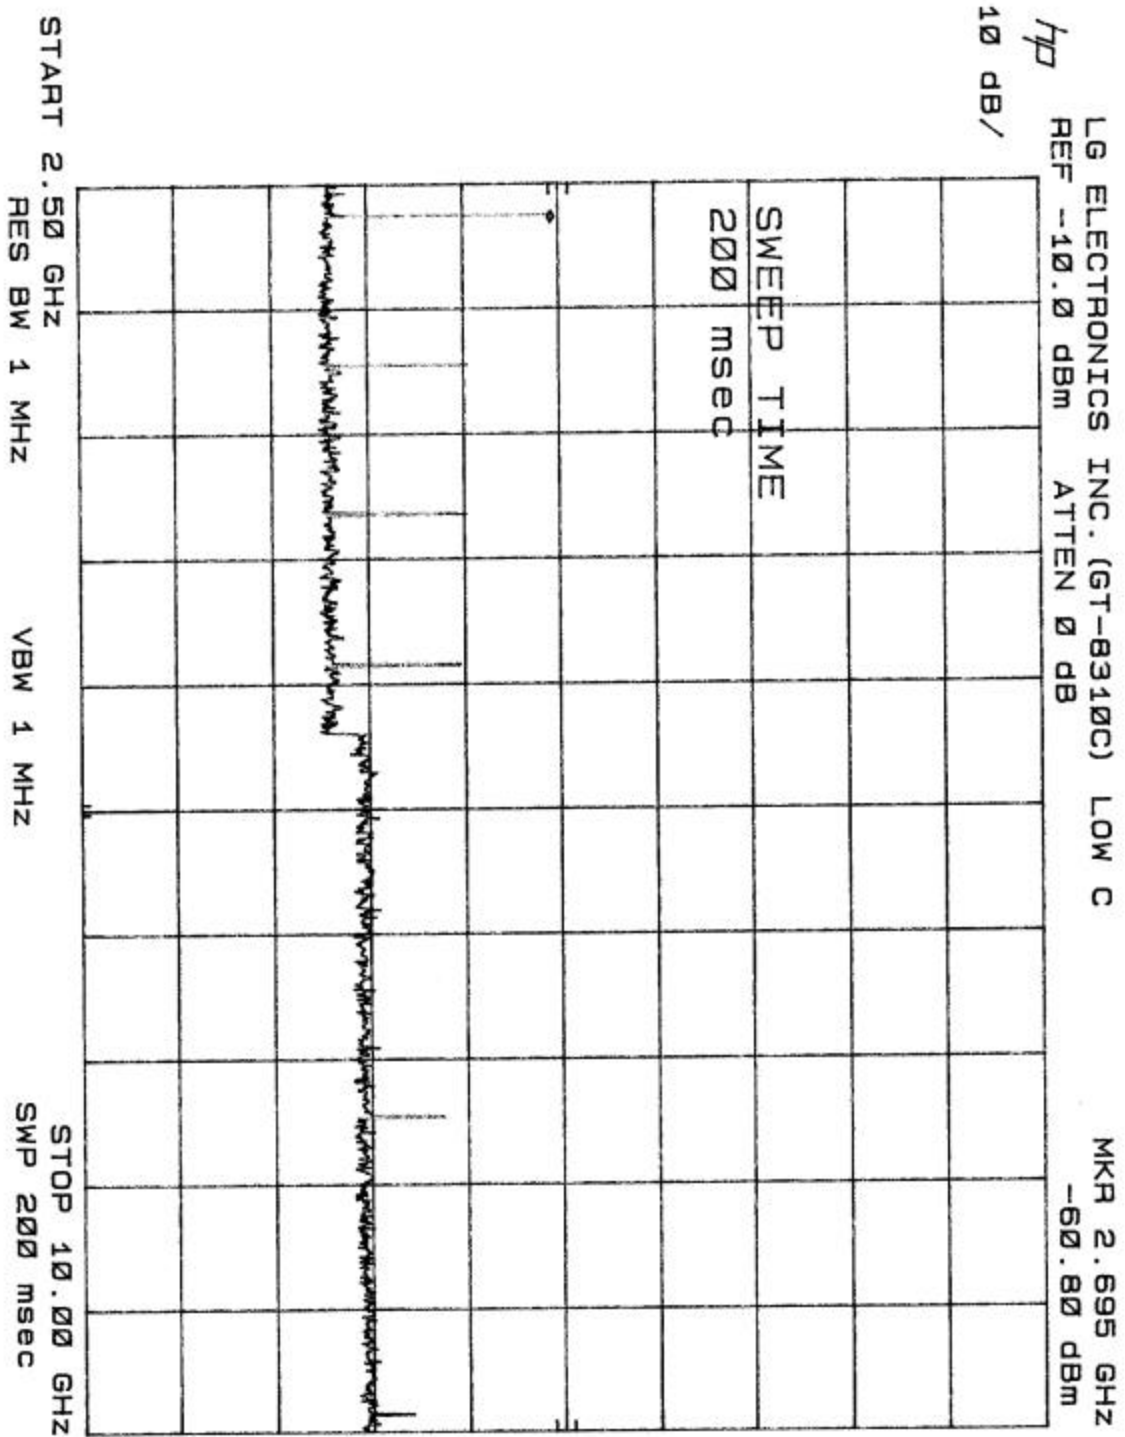

### **3.6.0 Field Strength of Spurious Radiation (30 MHz-9000MHz)**

Requirements: FCC15.247 (2) (c)

#### **3.6.1 Test Procedure**

The measurement antenna was placed at a distance of 3 meter from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

The frequency range up to tenth harmonics of each of the three fundamental frequency (low, middle, and high channels) was investigated.

The spurious emissions attenuation was calculated as the difference between EIRP in dB(pW) at the fundamental frequency and at the spurious emissions frequency.

#### **3.6.2 Test Equipment**

A.H. System Horn Antenna

High Pass Filter

Preamplifier

Hewlett Packard HP8566B Spectrum Analyzer

Hewlett Packard HP 7470A Plotter

#### **3.6.3 Test Results**

Refer to the attached data sheets.

**3.6.3.a Final Scan, Base, High Channel.**

| INDICATED |         | TAB<br>E | ANTENNA |       | CORRECTION FACTOR |       |      | CORRECTE<br>AMPLITUDE | FCC<br>CLASS B |        |
|-----------|---------|----------|---------|-------|-------------------|-------|------|-----------------------|----------------|--------|
| Frequency | Ampl.   | Angle    | Height  | Polar | Antenna           | Cable | Amp. | Corr.<br>Ampl.        | Limit          | Margin |
| MHz       | dBmV/m  | Degree   | Meter   | H/ V  | dBmV/m            | dB    | dB   | dBmV/m                | dBmV/m         | dB     |
| 926.09    | 90.0    | 145      | 1.2     | V     | 24.7              | 4.4   | 20.2 | 98.9                  |                |        |
| 926.09    | 81.5    | 90       | 2.8     | H     | 24.7              | 4.4   | 20.2 | 90.4                  |                |        |
| 1851.00   | 64.0    | 200      | 1.2     | V     | 25.3              | 2.6   | 20.0 | 71.9                  | 78.9           | -7.0   |
| 3703.00   | 38.5(P) | 180      | 1.2     | V     | 30.3              | 4.3   | 20.0 | 53.1                  | 74.0           | -20.9  |
| 1851.00   | 50.0    | 180      | 2.2     | H     | 25.3              | 2.6   | 20.0 | 57.9                  | 78.9           | -21.0  |
| 2777.00   | 39.6(P) | 180      | 1.2     | V     | 29.0              | 3.7   | 20.0 | 52.3                  | 74.0           | -21.7  |
| 3703.00   | 37.0(P) | 270      | 2.2     | H     | 30.3              | 4.3   | 20.0 | 51.6                  | 74.0           | -22.4  |
| 2777.00   | 39.8(P) | 45       | 2.2     | H     | 29.0              | 3.7   | 20.0 | 52.5                  | 74.0           | -21.5  |
| 2777.00   | 31.1(A) | 45       | 2.2     | H     | 29.0              | 3.7   | 20.0 | 43.8                  | 54.0           | -10.2  |
| 3703.00   | 28.9(A) | 270      | 2.2     | H     | 30.3              | 4.3   | 20.0 | 43.5                  | 54.0           | -10.5  |
| 3703.00   | 33.2(A) | 180      | 1.2     | V     | 30.3              | 4.3   | 20.0 | 47.8                  | 54.0           | -6.2   |
| 2777.00   | 32.1(A) | 180      | 1.2     | V     | 29.0              | 3.7   | 20.0 | 44.8                  | 54.0           | -9.2   |

**3.6.3.b Final Scan, Base, Middle Channel.**

| INDICATED |         | TABLE  | ANTENNA |       | CORRECTION FACTOR |       |      | CORRECTED AMPLITUDE | FCC CLASS B |        |
|-----------|---------|--------|---------|-------|-------------------|-------|------|---------------------|-------------|--------|
| Frequency | Ampl.   | Angle  | Height  | Polar | Antenna           | Cable | Amp. | Corr. Ampl.         | Limit       | Margin |
| MHz       | dBmV/m  | Degree | Meter   | H/ V  | dBmV/m            | dB    | dB   | dBmV/m              | dBmV/m      | dB     |
| 914.66    | 88.8    | 145    | 1.2     | V     | 24.6              | 4.2   | 19.8 | 97.8                |             |        |
| 914.66    | 81.6    | 90     | 2.8     | H     | 24.6              | 4.2   | 19.8 | 90.6                |             |        |
| 1828.00   | 64.2    | 145    | 1.1     | V     | 25.3              | 2.6   | 20.0 | 72.1                | 77.8        | -5.7   |
| 3657.00   | 35.7(P) | 180    | 1.1     | V     | 30.3              | 4.3   | 20.0 | 50.3                | 74.0        | -23.7  |
| 1828.00   | 46.3    | 200    | 2.2     | H     | 25.3              | 2.6   | 20.0 | 54.2                | 77.8        | -23.6  |
| 2743.00   | 36.9(P) | 180    | 1.1     | V     | 29.0              | 3.7   | 20.0 | 49.6                | 74.0        | -24.4  |
| 2743.00   | 38.0(P) | 45     | 2.2     | H     | 29.0              | 3.7   | 20.0 | 50.7                | 74.0        | -23.3  |
| 3657.00   | 36.5(P) | 245    | 2.2     | H     | 30.3              | 4.3   | 20.0 | 51.1                | 74.0        | -22.9  |
| 2743.00   | 29.5(A) | 180    | 1.2     | V     | 29.0              | 3.7   | 20.0 | 42.2                | 54.0        | -11.8  |
| 3657.00   | 32.2(A) | 340    | 1.2     | V     | 30.3              | 4.3   | 20.0 | 46.8                | 54.0        | -7.2   |
| 3657.00   | 26.6(A) | 245    | 2.2     | H     | 30.3              | 4.3   | 20.0 | 41.2                | 54.0        | -12.8  |
| 2743.00   | 28.2(A) | 45     | 2.2     | H     | 29.0              | 3.7   | 20.0 | 40.9                | 54.0        | -13.1  |

**3.6.3.c Final Scan, Base, Low Channel.**

| INDICATED |         | TABLE  | ANTENNA |       | CORRECTION FACTOR |       |      | CORRECTED AMPLITUDE | FCC CLASS B |        |
|-----------|---------|--------|---------|-------|-------------------|-------|------|---------------------|-------------|--------|
| Frequency | Ampl.   | Angle  | Height  | Polar | Antenna           | Cable | Amp. | Corr. Ampl.         | Limit       | Margin |
| MHz       | dBmV/m  | Degree | Meter   | H/ V  | dBmV/m            | dB    | dB   | dBmV/m              | dBmV/m      | dB     |
| 904.44    | 84.1    | 145    | 1.2     | V     | 24.8              | 3.0   | 19.8 | 92.1                |             |        |
| 904.44    | 82.9    | 100    | 2.8     | H     | 24.8              | 3.0   | 19.8 | 90.9                |             |        |
| 1808.00   | 61.0    | 90     | 1.4     | V     | 25.3              | 2.6   | 20.0 | 68.9                | 72.1        | -3.2   |
| 1808.00   | 49.2    | 270    | 1.2     | H     | 25.3              | 2.6   | 20.0 | 57.1                | 72.1        | -15.0  |
| 3616.00   | 36.7(P) | 145    | 1.4     | V     | 30.3              | 4.3   | 20.0 | 51.3                | 74.0        | -22.7  |
| 2712.00   | 41.7(P) | 180    | 1.4     | V     | 29.0              | 3.7   | 20.0 | 54.4                | 74.0        | -19.6  |
| 2712.00   | 39.7(P) | 45     | 2.6     | H     | 29.0              | 3.7   | 20.0 | 52.4                | 74.0        | -21.6  |
| 3616.00   | 35.4(P) | 45     | 1.8     | H     | 30.3              | 4.3   | 20.0 | 50.0                | 74.0        | -24.0  |
| 2712.00   | 37.3(A) | 180    | 1.0     | H     | 29.0              | 3.7   | 20.0 | 50.0                | 54.0        | -4.0   |
| 3616.00   | 30.8(A) | 145    | 1.4     | H     | 30.3              | 4.3   | 20.0 | 45.4                | 54.0        | -8.6   |
| 3616.00   | 31.8(A) | 360    | 1.4     | V     | 30.3              | 4.3   | 20.0 | 46.4                | 54.0        | -7.6   |
| 3616.00   | 31.8(A) | 360    | 1.4     | V     | 30.3              | 4.3   | 20.0 | 46.4                | 54.0        | -7.6   |

**3.6.3.d Final Scan, Handset, High Channel.**

| INDICATED     |              | TABLE        | ANTENNA      |            | CORRECTION FACTOR |          |         | CORRECTED AMPLITUDE | FCC CLASS B  |           |
|---------------|--------------|--------------|--------------|------------|-------------------|----------|---------|---------------------|--------------|-----------|
| Frequency MHz | Ampl. dBmV/m | Angle Degree | Height Meter | Polar H/ V | Antenna dBmV/m    | Cable dB | Amp. dB | Corr. Ampl. dBmV/m  | Limit dBmV/m | Margin dB |
| 926.10        | 66.6         | 145          | 3.0          | V          | 24.7              | 4.4      | 20.2    | 75.5                |              |           |
| 926.10        | 72.2         | 145          | 1.1          | H          | 24.7              | 4.4      | 20.2    | 81.1                |              |           |
| 1851.00       | 45.2         | 230          | 1.1          | V          | 25.3              | 2.6      | 20.0    | 53.1                | 61.1         | -8.0      |
| 1851.00       | 46.9         | 145          | 1.2          | H          | 25.3              | 2.6      | 20.0    | 54.8                | 61.1         | -6.3      |
| 2777.00       | 40.2(P)      | 360          | 1.5          | V          | 29.0              | 3.7      | 20.0    | 52.9                | 74.0         | -21.1     |
| 2777.00       | 32.9(A)      | 350          | 1.4          | V          | 29.0              | 3.7      | 20.0    | 45.6                | 54.0         | -8.4      |
| 3703.00       | 38.2(P)      | 190          | 1.4          | V          | 30.3              | 4.3      | 20.0    | 52.8                | 74.0         | -21.2     |
| 3703.00       | 28.9(A)      | 190          | 1.4          | V          | 30.3              | 4.3      | 20.0    | 43.5                | 54.0         | -10.5     |
| 5554.00       | 31.8(P)      | 200          | 1.4          | V          | 34.1              | 5.4      | 20.0    | 51.3                | 74.0         | -22.7     |
| 5554.00       | 23.9(A)      | 200          | 1.4          | V          | 34.1              | 5.4      | 20.0    | 43.4                | 54.0         | -10.6     |
| 2777.00       | 40.0(P)      | 70           | 1.2          | H          | 29.0              | 3.7      | 20.0    | 52.7                | 74.0         | -21.3     |
| 2777.00       | 32.8(A)      | 70           | 1.2          | H          | 29.0              | 3.7      | 20.0    | 45.5                | 54.0         | -8.5      |
| 3703.00       | 35.0(P)      | 180          | 1.2          | H          | 30.3              | 4.3      | 20.0    | 49.6                | 74.0         | -24.4     |
| 3703.00       | 28.0(A)      | 180          | 1.2          | H          | 30.3              | 4.3      | 20.0    | 42.6                | 54.0         | -11.4     |
| 5554.00       | 27.1(P)      | 245          | 1.2          | H          | 34.1              | 5.4      | 20.0    | 46.6                | 74.0         | -27.4     |
| 5554.00       | 18.0(A)      | 245          | 1.2          | H          | 34.1              | 5.4      | 20.0    | 37.5                | 54.0         | -16.5     |

**3.6.3.e Final Scan, Handset, Middle Channel.**

| INDICATED        |                 | TABLE           | ANTENNA         |               | CORRECTION FACTOR |             |            | CORRECTED<br>AMPLITUDE | FCC<br>CLASS B  |              |
|------------------|-----------------|-----------------|-----------------|---------------|-------------------|-------------|------------|------------------------|-----------------|--------------|
| Frequency<br>MHz | Ampl.<br>dBmV/m | Angle<br>Degree | Height<br>Meter | Polar<br>H/ V | Antenna<br>dBmV/m | Cable<br>dB | Amp.<br>dB | Corr. Ampl.<br>dBmV/m  | Limit<br>dBmV/m | Margin<br>dB |
| 914.69           | 65.3            | 160             | 2.9             | V             | 24.6              | 4.2         | 19.8       | 74.3                   |                 |              |
| 914.69           | 72.8            | 145             | 1.1             | H             | 24.6              | 4.2         | 19.8       | 81.8                   |                 |              |
| 1828.00          | 43.8            | 270             | 1.2             | H             | 25.3              | 2.6         | 20.0       | 51.7                   | 61.8            | -10.1        |
| 1828.00          | 46.5            | 145             | 1.8             | V             | 25.3              | 2.6         | 20.0       | 54.4                   | 61.8            | -7.4         |
| 2743.00          | 39.3(P)         | 260             | 1.2             | H             | 29.0              | 3.7         | 20.0       | 52.0                   | 74.0            | -22.0        |
| 2743.00          | 29.7(A)         | 260             | 1.2             | H             | 29.0              | 3.7         | 20.0       | 42.4                   | 54.0            | -11.6        |
| 3657.00          | 36.2(P)         | 30              | 1.5             | H             | 30.3              | 4.3         | 20.0       | 50.8                   | 74.0            | -23.2        |
| 3657.00          | 27.6(A)         | 30              | 1.5             | H             | 30.3              | 4.3         | 20.0       | 42.2                   | 54.0            | -11.8        |
| 5486.00          | 29.9(P)         | 100             | 1.5             | H             | 33.9              | 5.2         | 20.0       | 49.0                   | 74.0            | -25.0        |
| 5486.00          | 23.2(A)         | 100             | 1.5             | H             | 33.9              | 5.2         | 20.0       | 42.3                   | 54.0            | -11.7        |
| 5486.00          | 33.3(P)         | 120             | 1.8             | V             | 33.9              | 5.2         | 20.0       | 52.4                   | 74.0            | -21.6        |
| 5486.00          | 24.6(A)         | 120             | 1.8             | V             | 33.9              | 5.2         | 20.0       | 43.7                   | 54.0            | -10.3        |
| 3657.00          | 36.8(P)         | 90              | 1.8             | V             | 30.3              | 4.3         | 20.0       | 51.4                   | 74.0            | -22.6        |
| 3657.00          | 29.8(A)         | 90              | 1.8             | V             | 30.3              | 4.3         | 20.0       | 44.4                   | 54.0            | -9.6         |
| 2473.00          | 42.1(P)         | 200             | 1.8             | V             | 28.1              | 3.4         | 20.0       | 53.6                   | 74.0            | -20.5        |
| 2473.00          | 33.9(A)         | 200             | 1.8             | V             | 28.1              | 3.4         | 20.0       | 45.4                   | 54.0            | -8.7         |

**3.6.3.f Final Scan, Handset, Low Channel.**

| INDICATED     |              | TABLE        | ANTENNA      |            | CORRECTION FACTOR |          |         | CORRECTED AMPLITUDE | FCC CLASS B  |           |
|---------------|--------------|--------------|--------------|------------|-------------------|----------|---------|---------------------|--------------|-----------|
| Frequency MHz | Ampl. dBmV/m | Angle Degree | Height Meter | Polar H/ V | Antenna dBmV/m    | Cable dB | Amp. dB | Corr. Ampl. dBmV/m  | Limit dBmV/m | Margin dB |
| 904.50        | 66.2         | 340          | 2.9          | V          | 24.8              | 3.0      | 19.8    | 74.2                |              |           |
| 904.50        | 73.5         | 90           | 1.1          | H          | 24.8              | 3.0      | 19.8    | 81.5                |              |           |
| 1808.00       | 43.0         | 200          | 1.1          | V          | 25.3              | 2.6      | 20.0    | 50.9                | 61.5         | -10.6     |
| 1808.00       | 41.2         | 160          | 1.2          | H          | 25.3              | 2.6      | 20.0    | 49.1                | 61.5         | -12.4     |
| 2712.00       | 38.5(P)      | 270          | 1.2          | H          | 29.0              | 3.7      | 20.0    | 51.2                | 74.0         | -22.8     |
| 2712.00       | 28.3(A)      | 270          | 1.2          | H          | 29.0              | 3.7      | 20.0    | 41.0                | 54.0         | -13.0     |
| 3616.00       | 37.8(P)      | 360          | 1.9          | H          | 30.3              | 4.3      | 20.0    | 52.4                | 74.0         | -21.6     |
| 3616.00       | 26.5(A)      | 360          | 1.9          | H          | 30.3              | 4.3      | 20.0    | 41.1                | 54.0         | -12.9     |
| 5425.00       | 28.9(P)      | 180          | 1.8          | H          | 33.9              | 5.2      | 20.0    | 48.0                | 74.0         | -26.0     |
| 5425.00       | 22.7(A)      | 180          | 1.8          | H          | 33.9              | 5.2      | 20.0    | 41.8                | 54.0         | -12.2     |
| 2712.00       | 34.4(P)      | 180          | 1.4          | V          | 29.0              | 3.7      | 20.0    | 47.1                | 74.0         | -26.9     |
| 2712.00       | 24.0(A)      | 180          | 1.4          | V          | 29.0              | 3.7      | 20.0    | 36.7                | 54.0         | -17.3     |
| 3616.00       | 32.0(P)      | 270          | 1.4          | V          | 30.3              | 4.3      | 20.0    | 46.6                | 74.0         | -27.4     |
| 3616.00       | 26.5(A)      | 270          | 1.4          | V          | 30.3              | 4.3      | 20.0    | 41.1                | 54.0         | -12.9     |
| 5425.00       | 29.6(P)      | 145          | 1.4          | V          | 33.9              | 5.2      | 20.0    | 48.7                | 74.0         | -25.3     |
| 5425.00       | 23.3(A)      | 145          | 1.4          | V          | 33.9              | 5.2      | 20.0    | 42.4                | 54.0         | -11.6     |



### 3.7.0 Processing Gain

#### Processing Gain Measurements for GT-8310 DCT TEST report

#### 3.7.1 Introduction

##### Scope

This document is a LG Engineering test report for GT-8310C basic DCT cordless phone.  
This document details the results of measurement of the processing gain of a DCT (GT-8310C).

##### Reference Documents

This section lists documents that are referenced within or are materially relevant to this document.

Code of Federal Regulations, Title 47, Chapter 1, Part 15 Radio Frequency Devices (FCC)

##### Definitions

|       |  |
|-------|--|
| FCC   | Federal Communications Commission      |
| SNR   | Signal to Noise Ratio                  |
| JSR   | Jammer to Signal Ratio                 |
| CW    | Continuous wave (jammer)               |
| HS    | Handset                                |
| BS    | Basestation                            |
| DBPSK | Differential Binary Phase Shift Keying |

*Table 1: Definitions and Abbreviations*

#### 3.7.2 An Overview of the FCC Method for measuring Processing Gain

Two methods are specified for measuring processing gain by the FCC in 15.247 (e). The first method simply involves calculating the signal to ratio noise (SNR) with the spreading code switched on with the SNR when the spreading code is switched off. The difference between the two is the processing gain. The SNR is measured at the demodulated output of the receiver. In principle this an acceptable method to measure the processing gain of any direct sequence spread spectrum communication system, however, it does not take into consideration that the non-spread spectrum portion of the system may operate under the assumption that the signal being transmitted is a spread spectrum signal and when the spreading code is switched off the system may fail to operate or operate at greatly reduced efficiency, In either case the measurement of processing gain will be meaningless.

The second method specified by the FCC to measure processing gain is detailed in 15.247 (e)(1). This involves transmitting a CW jammer in the RF passband of the system and measuring the jammer to signal ratio (JSR) required to achieve a certain bit error rate. The choice of the actual value of the bit error rate is left up to the tester. The jammer is stepped in 50 kHz increments across the entire passband and in each case the JSR to achieve the desired bit error rate is measured. The JSR is measured at the RF input to the system under test. The lowest 20% of the JSR data (in dB) is discarded. The processing gain can then be calculated as follows:

$$G_p = \left( \frac{S}{N} \right)_{theory} + \left( \frac{J}{S} \right)_{measured} + L_{system}$$

where  $G_p$  is the processing gain, the SNR is that theoretically predicted for the system under the test to achieve the desired bit error rate, the JSR is the lowest value (in dB) in the remaining data set and  $L_{sys}$  adjusts for non-ideal system losses.  $L_{sys}$  can not be greater than 2 dB.

### **3.7.3 Processing Gain Measurement Results**

The following parameters were used in the test setup.

|   |        |   |
|---|--------|---|
| HS Tx power (dBm)   | -1.9   | Measured @ 50-ohm SMA-antenna port  |
| BS LNA gain (dB)  | 0      |   |
| Test system losses (signal)(dB)                           | -61.75 | -50dB (channel attenuation)-5.7dB (attenuator & cables), -6dB (signal combiner) |
| Received signal strength (dBm) at combiner output         | -63.65 | Measured @ combiner output  |
| Test system losses (jammer) (dB) upto the combiner output | -12.85 | -6dB (attenuator), -6dB (signal combiner), -0.85 dB (cable)                     |

*Table 2: Test Setup Parameters*

The following measurement results were taken at the base station. The desired bit error rate was set at  $10^{-3}$ .

| Jammer Frequency (MHz) | BER (BS)             | Received jammer power (dBm) | Received signal power (dBm) | Jammer/Signal ratio (dB) |
|------------------------|----------------------|-----------------------------|-----------------------------|--------------------------|
| 913.80                 | $9.4 \times 10^{-4}$ | -59.65                      | -63.65                      | 4.4                      |
| 913.85                 | $9.6 \times 10^{-4}$ | -57.95                      | -63.65                      | 5.6                      |
| 913.90                 | $9.6 \times 10^{-4}$ | -60.25                      | -63.65                      | 3.4                      |
| 913.95                 | $9.6 \times 10^{-4}$ | -64.25                      | -63.65                      | -0.3                     |
| 914.00                 | $1.1 \times 10^{-3}$ | -61.55                      | -63.65                      | 2.1                      |
| 914.05                 | $9.8 \times 10^{-4}$ | -61.45                      | -63.65                      | 2.2                      |
| 914.10                 | $1.1 \times 10^{-3}$ | -61.95                      | -63.65                      | 1.9                      |
| 914.15                 | $9.2 \times 10^{-4}$ | -62.85                      | -63.65                      | 0.8                      |
| 914.20                 | $1.0 \times 10^{-3}$ | -59.85                      | -63.65                      | 3.8                      |
| 914.25                 | $1.0 \times 10^{-3}$ | -61.15                      | -63.65                      | 2.5                      |
| 914.30                 | $1.1 \times 10^{-3}$ | -62.05                      | -63.65                      | 1.7                      |
| 914.35                 | $1.0 \times 10^{-3}$ | -57.65                      | -63.65                      | 6.1                      |
| 914.40                 | $1.1 \times 10^{-3}$ | -55.65                      | -63.65                      | 8.1                      |
| 914.45                 | $1.0 \times 10^{-3}$ | -49.35                      | -63.65                      | 14.3                     |
| 914.50                 | $1.1 \times 10^{-3}$ | -59.25                      | -63.65                      | 4.4                      |
| 914.55                 | $1.0 \times 10^{-3}$ | -62.35                      | -63.65                      | 1.4                      |
| 914.60                 | $9.7 \times 10^{-4}$ | -59.05                      | -63.65                      | 4.6                      |
| 914.65                 | $1.0 \times 10^{-3}$ | -61.05                      | -63.65                      | 2.6                      |
| 914.70                 | $1.1 \times 10^{-3}$ | -62.55                      | -63.65                      | 1.1                      |
| 914.75                 | $9.0 \times 10^{-4}$ | -61.95                      | -63.65                      | 1.7                      |
| 914.80                 | $1.0 \times 10^{-3}$ | -61.05                      | -63.65                      | 2.6                      |
| 914.85                 | $9.9 \times 10^{-4}$ | -62.25                      | -63.65                      | 1.4                      |
| 914.90                 | $1.1 \times 10^{-3}$ | -64.05                      | -63.65                      | -0.3                     |
| 914.95                 | $9.2 \times 10^{-4}$ | -56.25                      | -63.65                      | 7.4                      |
| 915.00                 | $1.0 \times 10^{-3}$ | -59.85                      | -63.65                      | 3.9                      |
| 915.05                 | $1.1 \times 10^{-3}$ | -57.25                      | -63.65                      | 6.4                      |
| 915.10                 | $9.9 \times 10^{-4}$ | -58.15                      | -63.65                      | 5.4                      |

*Table 3: Test Results*

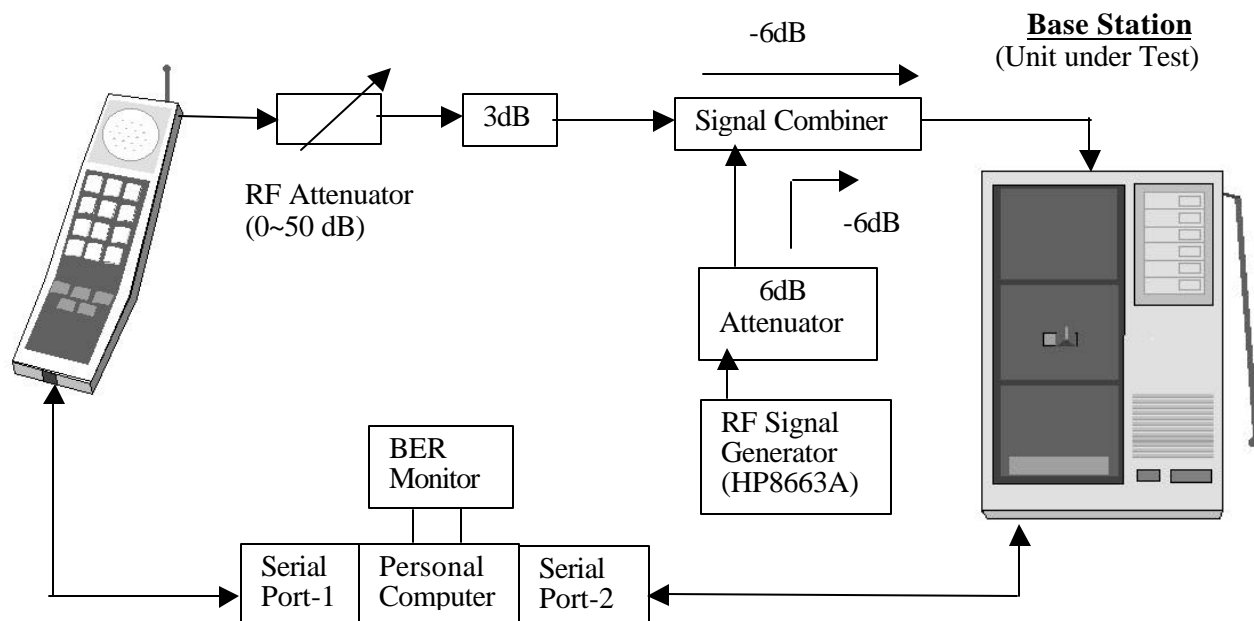


Figure 1: Bit Error Rate (BER) Test Setup

For DBPSK at  $10^{-3}$  bit error rate the required SNR is 8.0 dB. Using the results above and the data in the table below the processing gain is calculated to be **11.3 dB**.

|                                 |             |
|---------------------------------|-------------|
| required SNR (dB)               | 8.0         |
| system losses (dB)              | 2.0         |
| J/S ratio at 80% point (dB)     | 1.30        |
| <b>FCC Processing gain (dB)</b> | <b>11.3</b> |

Table 4: Processing Gain Calculation data

**General Procedure**

- Step-1: Measure the output power of the base and handset units in LO power mode. Determine attenuation and signal losses in the path to calculate the received signal strength arriving at the base station antenna port.
- Step-2: Connect the serial interface of the base and handset to the serial ports of a PC.
- Step-3: Connect the base and handset through attenuator, signal combiner etc components using 50 ohm SMA connectors and cables as shown in Figure 1. Thus, the BER test set up establishes link through wired connection.
- Step-4: Using utility test software, select the channel frequency (921.6MHz), LOW power mode, LNA attenuation for base and handset units.
- Step-5: Click on “ Start S7 HS Master” button ON. The two link is established and the BER results are displayed on monitor.
- Step-6: Feed jamming signal from the signal generator.
- Step-7: Increase the amplitude of the jamming while monitoring BER such that the BER is  $\leq 10^{-3}$ . this signal power is recorded for computing received Jammer power level J.
- Step-8: Increment the Jammer signal frequency in steps of 0kHz and repeat step 7 and determine the minimum Jammer signal power to achieve BER of  $\leq 10^{-3}$ . Calculate the processing gain.

**3.7.4 Conclusions**

The result measured for processing gain of **11.3 dB** is close to the actual processing gain due to a 12 chip spreading code of

$$10 \cdot \log_{10}(12) = 10.8 \text{ dB}$$

## 4 - CONDUCTED EMISSIONS TEST DATA

---

### 4.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is  $\pm 2.4$  dB.

### 4.2 EUT Setup

The measurement was performed at the **Open Area Test Site**, using the same setup per ANSI C63.4 - 1992 measurement procedure. The specification used was with FCC Class B limits.

### 4.3 Spectrum Analyzer Setup

The spectrum analyzer was set with the following configurations during the conduction test:

|                                   |         |
|-----------------------------------|---------|
| Start Frequency .....             | 450 kHz |
| Stop Frequency .....              | 30 MHz  |
| Sweep Speed.....                  | Auto    |
| IF Bandwidth.....                 | 100 kHz |
| Video Bandwidth.....              | 100 kHz |
| Quasi-Peak Adapter Bandwidth..... | 9 kHz   |
| Quasi-Peak Adapter Mode .....     | Normal  |

#### 4.4 Test Procedure

During the conducted emission test, the power cord of the host system was connected to the auxiliary outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of each modes tested to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (less than -4 dBμV). Quasi-peak readings are distinguished with a "QP".

#### 4.5 Summary of Test Results

According to the data in section 3.6, the EUT complied with the FCC Conducted margin for a Class B device and these test results is deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations, with the *worst* margin reading of:

**-5.2 dBmV at 0.630 MHz** in the **Line** mode power supply.


#### 4.6 Conducted Emissions Test Data

##### 4.6.1 Test Data, 0.45 - 30 MHz.

| LINE CONDUCTED EMISSIONS |           |             |              | FCC CLASS B |        |
|--------------------------|-----------|-------------|--------------|-------------|--------|
| Frequency                | Amplitude | Detector    | Phase        | Limit       | Margin |
| MHz                      | dBμV      | QP/Ave/Peak | Line/Neutral | dBμV        | DB     |
| 0.630                    | 42.8      | QP          | Line         | 48          | -5.2   |
| 0.660                    | 36.4      | QP          | Neutral      | 48          | -11.6  |
| 23.940                   | 27.9      | QP          | Neutral      | 48          | -20.1  |
| 27.930                   | 27.8      | QP          | Neutral      | 48          | -20.2  |
| 27.960                   | 27.5      | QP          | Line         | 48          | -20.5  |
| 23.970                   | 27.3      | QP          | Line         | 48          | -20.7  |

#### 4.7 Plot of Conducted Emissions Test Data

Plot(s) of Conducted Emissions Test Data is presented in the following Appendix of this report as reference.

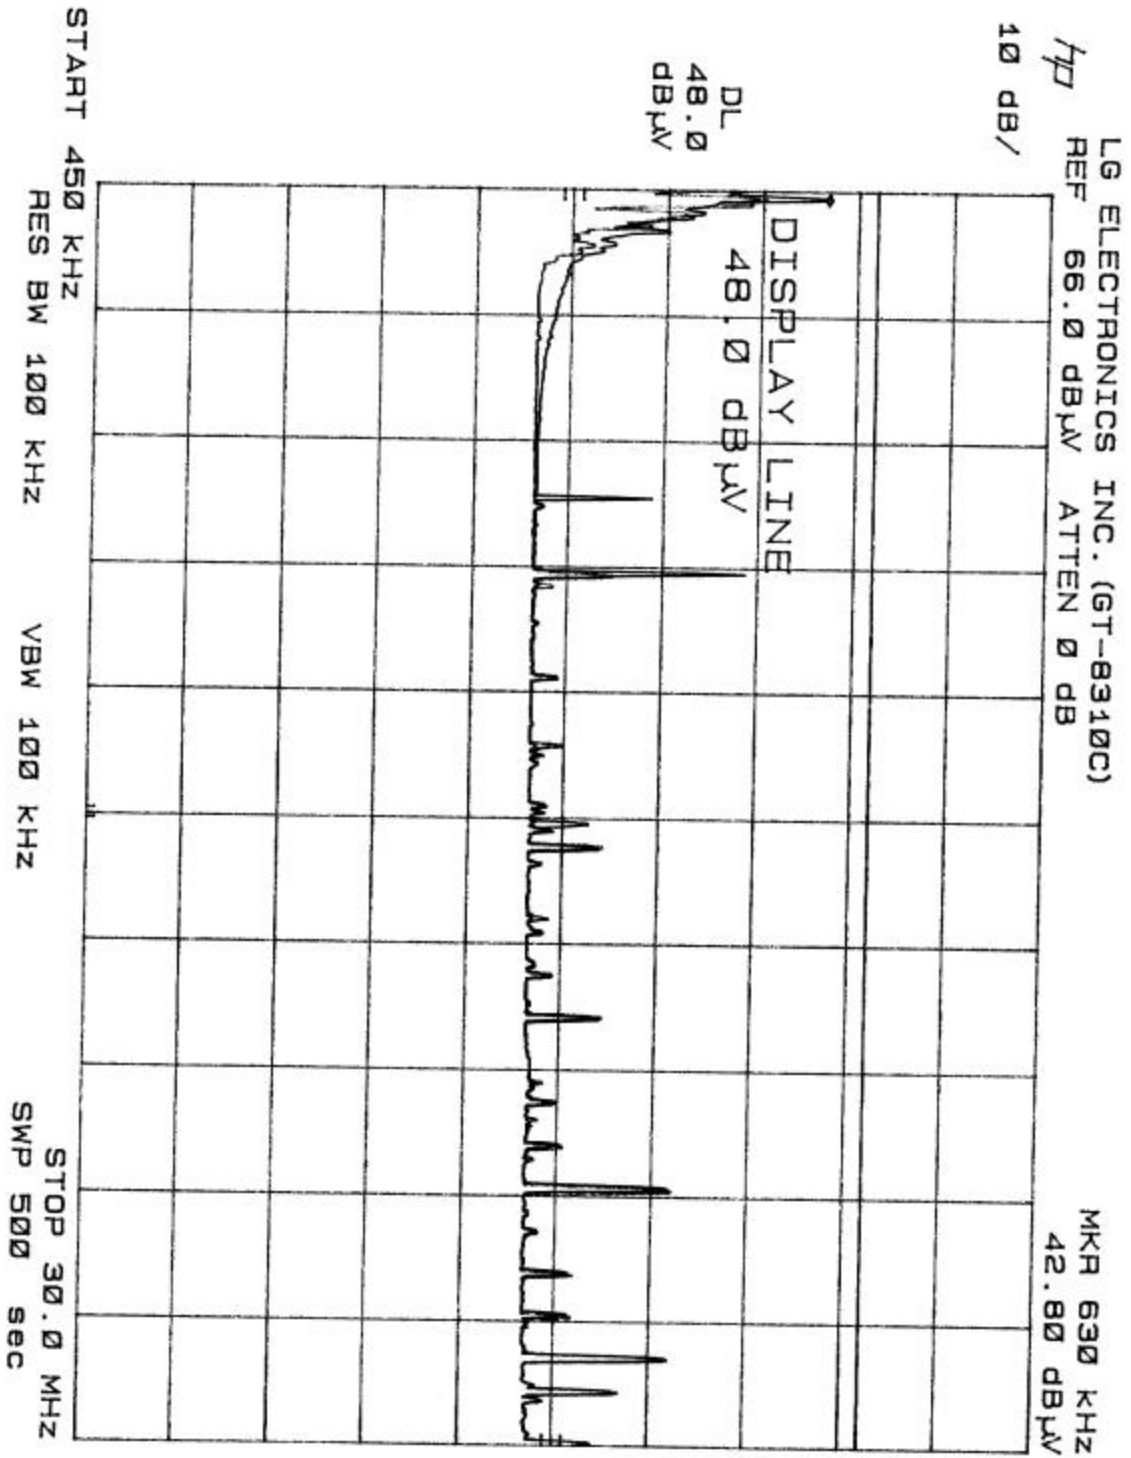



## **Appendix A – AGENT AUTHORIZATION LETTER**

---



LG Kangseo B/D 36, Munjae-Dong, 6-Ga,  
Yongdangpo-Gu, Seoul, 150-096, Korea  
Yongdangpo P.O. Box 101, Seoul, Korea  
Telephone : 82-2-2630-3651~2  
Fax : 82-2-2630-3669

### Exhibit B

## AUTHORITY TO ACT AS AGENT TO THE FEDERAL COMMUNICATIONS COMMISSION

Date : February 21, 2000

Federal Communications Commission  
Authorization and Evaluation Division  
Equipment Authorization Branch  
7435 Oakland Mills Road  
Columbia, MD 21046 U.S.A.

Dear Sir:

We, the undersigned, hereby authorize Bay Area Compliance Laboratory Corp. to act on our behalf in all matters relating to applications for approval of Telecommunication apparatus, including the signing of all documents relating to this matters.

Any and all acts carried out by Bay Area Compliance Laboratory Corp., on our behalf shall have the same effect as acts of our own.

I further appoint Bay Area Compliance Laboratory Corp., to act as agent in preparation of this application for registration of LG Information & Communications, Ltd., Model GT-8110 as Exhibit C under Part 68 of the Rules and Regulations of the Federal Communications Commission.

I certify that the exhibits properly describe the device or system for which registration is sought, that Exhibit G represents the policies of the applicant which will be followed for all units manufactured and distributed under the provisions of Part 68, that the labels described in Exhibit H will be affixed to each unit, and that the information described in Exhibit J will be provided with each unit manufactured or distributed by the applicant. We also certify that no party to the applications authorized hereunder is subject to benefits, including FCC benefits, Pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 USC 853(a).

Sincerely yours,

A handwritten signature in dark ink, appearing to read 'D. S. Kim', is written over a horizontal line.

D.S.KIM / Quality Engineering Dept.  
LG Information & Communications, Ltd.