

APPENDIX B: SAR DIPOLE VERIFICATION PLOTS

ELEMENT

DUT: Dipole 13.0 MHz; Type: CLA-13 - SN1004

Communication System: UID: 0, CW; Frequency: 13.0 MHz
Medium: 30 Head; Medium parameters used:
 $f = 13.0$ MHz; $\text{cond} = 0.725$ S/m; $\text{perm} = 53.3$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0 mm


Test Date: 01/02/2024; Ambient Temp: 21.2°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7360; ConvF:(17.98,17.98,17.98); Calibrated: 2023-03-16
Sensor-Surface: 1.4mm (All points)
Electronics: DAE4 Sn534; 2023-03-15
Phantom: ELI V6.0; Serial: 2044
Measurement SW: DASY Module SAR V16.2.0.1425

13.0 MHz System Verification at 30.0 dBm (1000 mW)

Area Scan (40.0 x 90.0): Measurement grid: $\text{dx}=10.0$ mm, $\text{dy}=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $\text{dx}=6.0$ mm, $\text{dy}=6.0$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 1.13 W/kg
SAR(1 g) = 0.574 W/kg
Deviation (1 g) = -0.69%

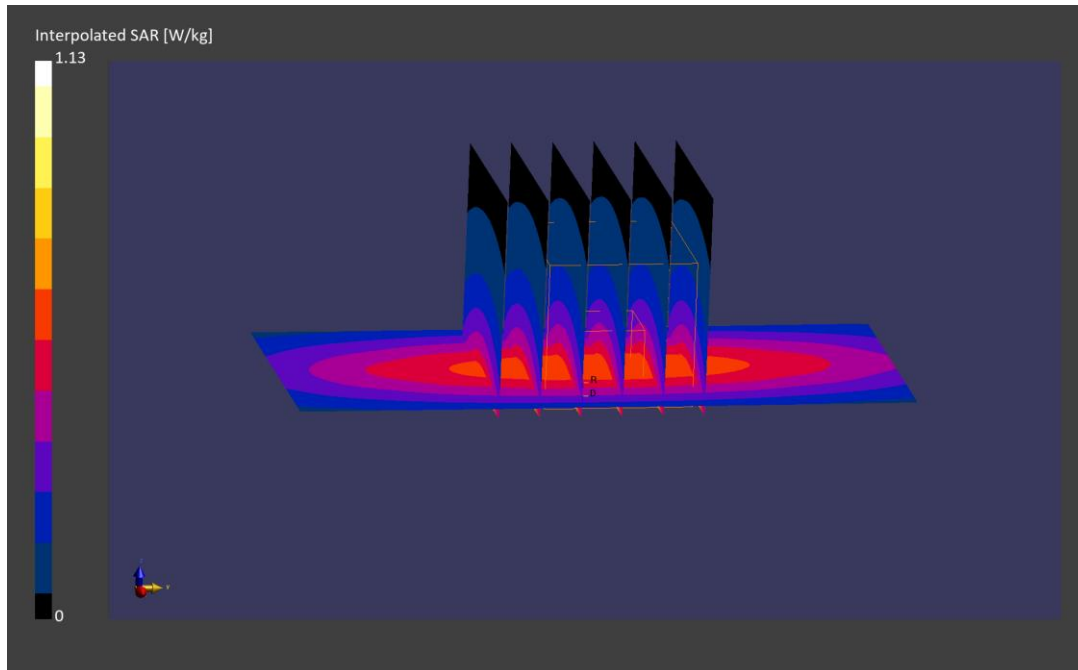

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1057

Communication System: UID: 0, CW; Frequency: 750.0 MHz

Medium: 750 Head; Medium parameters used:

f = 750.0 MHz; cond = 0.898 S/m; perm = 43.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 15 mm

Test Date: 11/30/2023; Ambient Temp: 21.9°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7682; ConvF:(11.36,11.36,11.36); Calibrated: 2023-05-11

Sensor-Surface: 1.4mm (All points)

Electronics: DAE4 Sn1683; 2023-05-11

Phantom: Twin-SAM V4.0; Serial: 1598

Measurement SW: DASY Module SAR V16.2.0.1425

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.62 W/kg

SAR(1 g) = 1.66 W/kg

Deviation (1 g) = -2.47%

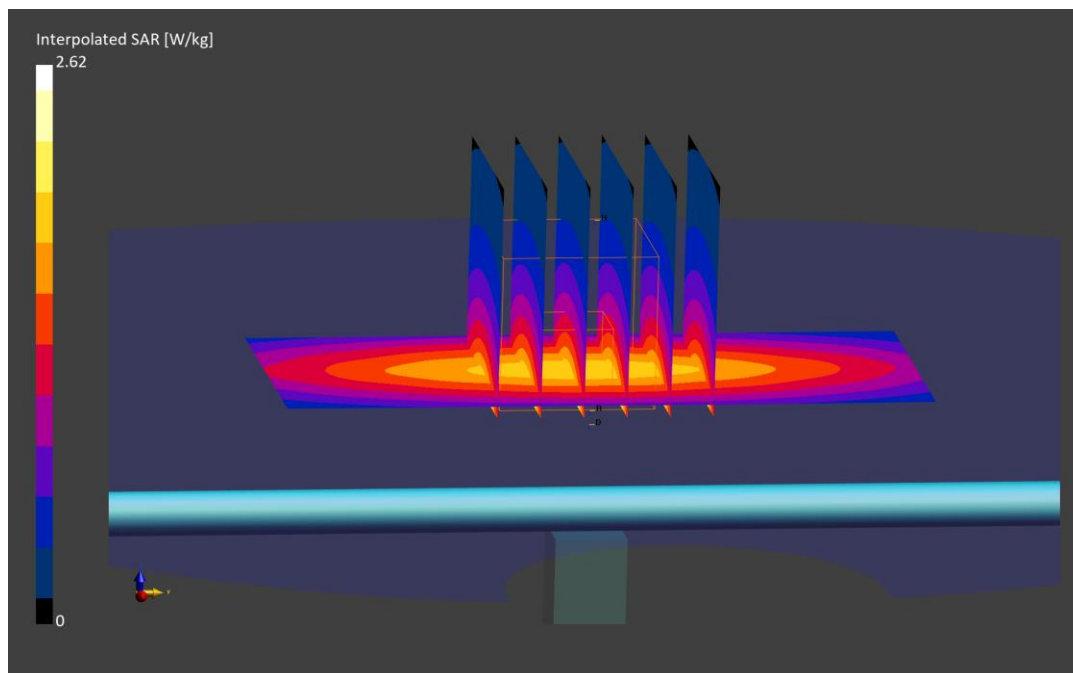

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1057

Communication System: UID: 0, CW; Frequency: 750.0 MHz

Medium: 750 Head; Medium parameters used:

f = 750.0 MHz; cond = 0.896 S/m; perm = 43.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 15 mm

Test Date: 12/02/2023; Ambient Temp: 21.2°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN7682; ConvF:(11.36,11.36,11.36); Calibrated: 2023-05-11

Sensor-Surface: 1.4mm (All points)

Electronics: DAE4 Sn1683; 2023-05-11

Phantom: Twin-SAM V4.0; Serial: 1598

Measurement SW: DASY Module SAR V16.2.0.1425

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.47 W/kg

SAR(1 g) = 1.60 W/kg

Deviation (1 g) = -5.99%

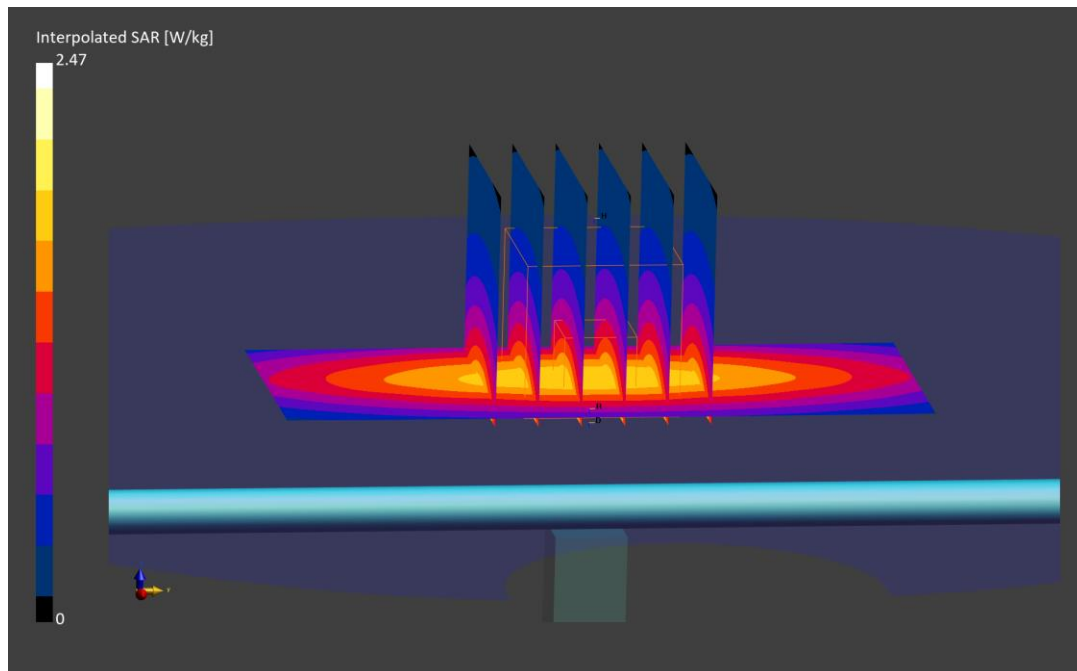

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1097

Communication System: UID: 0, CW; Frequency: 750.0 MHz

Medium: 750 Head; Medium parameters used:

f = 750.0 MHz; cond = 0.882 S/m; perm = 40.8; density = 1000 kg/m³

Phantom Section: Flat; Space: 15 mm

Test Date: 12/03/2023; Ambient Temp: 21.0°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN3949; ConvF:(10.55,10.55,10.55); Calibrated: 2023-10-02

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1684; 2023-09-12

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.2.0.1425

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 1.72 W/kg

Deviation (1 g) = 3.99%

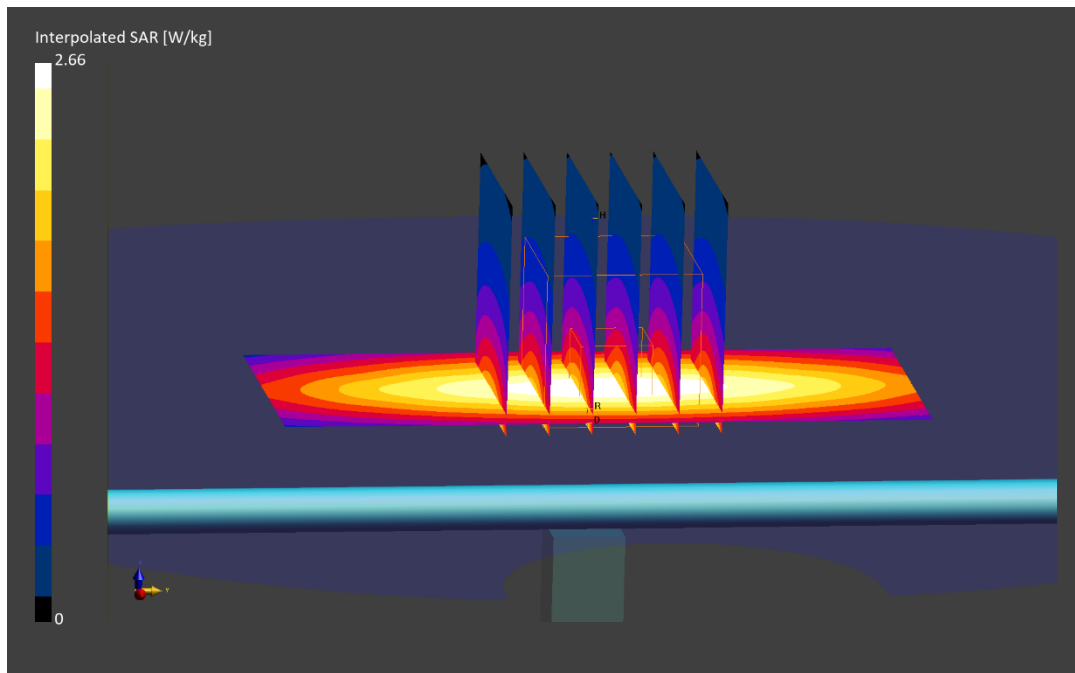

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1097

Communication System: UID: 0, CW; Frequency: 750.0 MHz

Medium: 750 Head; Medium parameters used:

f = 750.0 MHz; cond = 0.874 S/m; perm = 41.8; density = 1000 kg/m³

Phantom Section: Flat; Space: 15 mm

Test Date: 12/06/2023; Ambient Temp: 21.7°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3949; ConvF:(10.55,10.55,10.55); Calibrated: 2023-10-02

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1684; 2023-09-12

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.2.0.1425

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.72 W/kg

SAR(1 g) = 1.76 W/kg

Deviation (1 g) = 6.41%

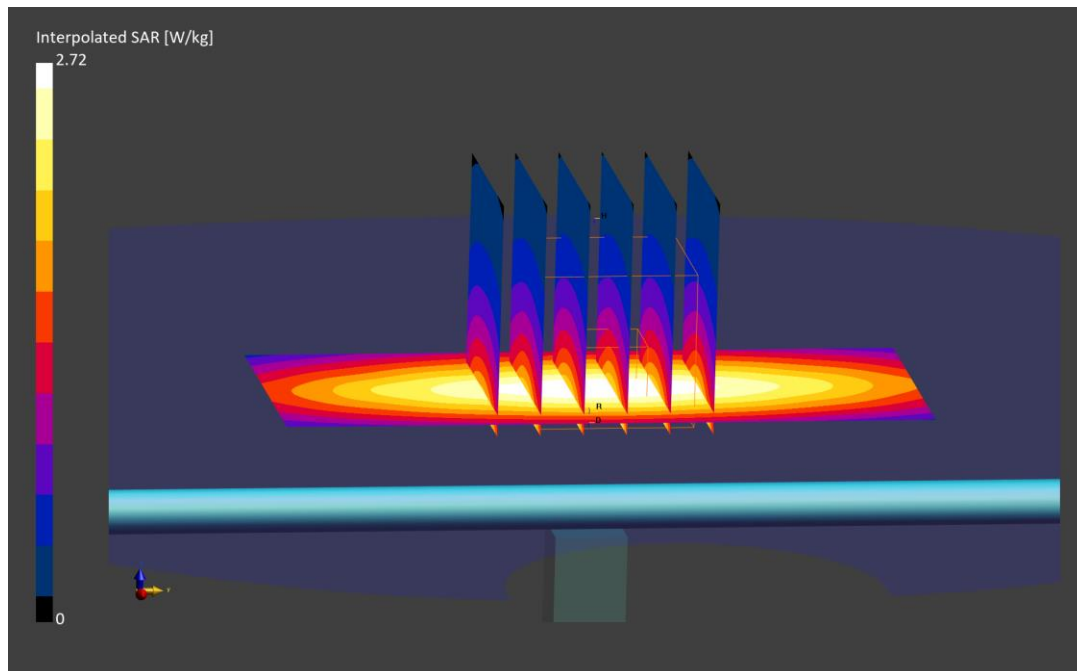

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1097

Communication System: UID: 0, CW; Frequency: 750.0 MHz

Medium: 750 Head; Medium parameters used:

f = 750.0 MHz; cond = 0.903 S/m; perm = 40.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 15 mm

Test Date: 12/10/2023; Ambient Temp: 19.7°C; Tissue Temp: 24.3°C

Probe: EX3DV4 - SN3949; ConvF:(10.55,10.55,10.55); Calibrated: 2023-10-02

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1684; 2023-09-12

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.2.0.1425

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.75 W/kg

SAR(1 g) = 1.75 W/kg

Deviation (1 g) = 5.80%

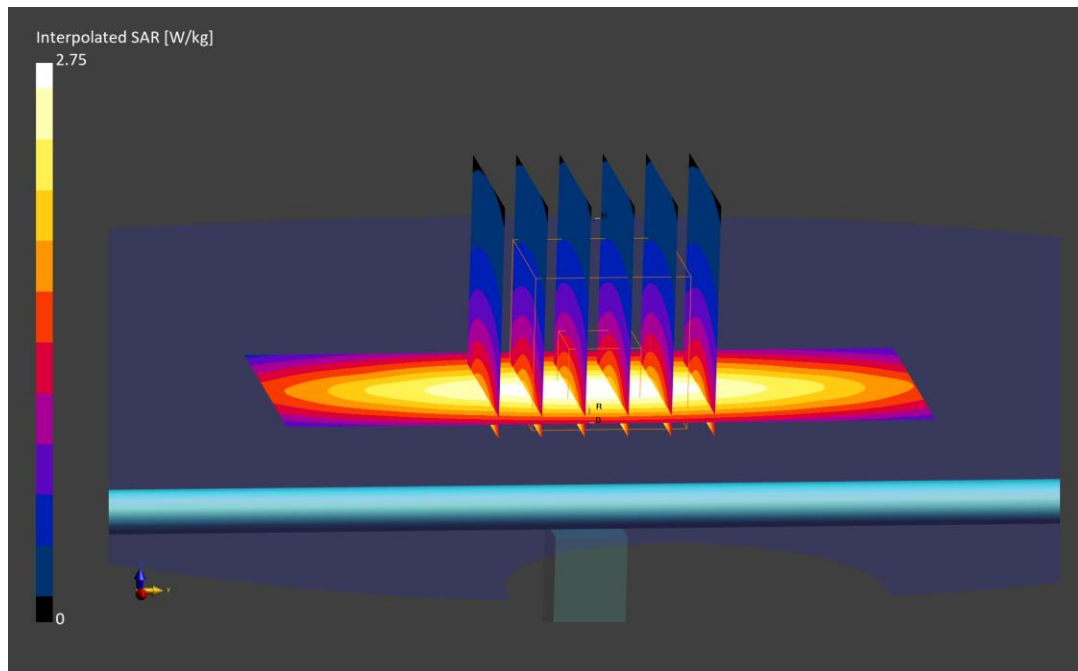

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1057

Communication System: UID: 0, CW; Frequency: 750.0 MHz

Medium: 750 Head; Medium parameters used:

f = 750.0 MHz; cond = 0.902 S/m; perm = 42.9; density = 1000 kg/m³

Phantom Section: Flat; Space: 15 mm

Test Date: 12/11/2023; Ambient Temp: 21.3°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7682; ConvF:(11.36,11.36,11.36); Calibrated: 2023-05-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1683; 2023-05-11

Phantom: Twin-SAM V4.0; Serial: 1598

Measurement SW: DASY Module SAR V16.2.0.1425

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.64 W/kg

SAR(1 g) = 1.67 W/kg

Deviation (1 g) = -1.88%

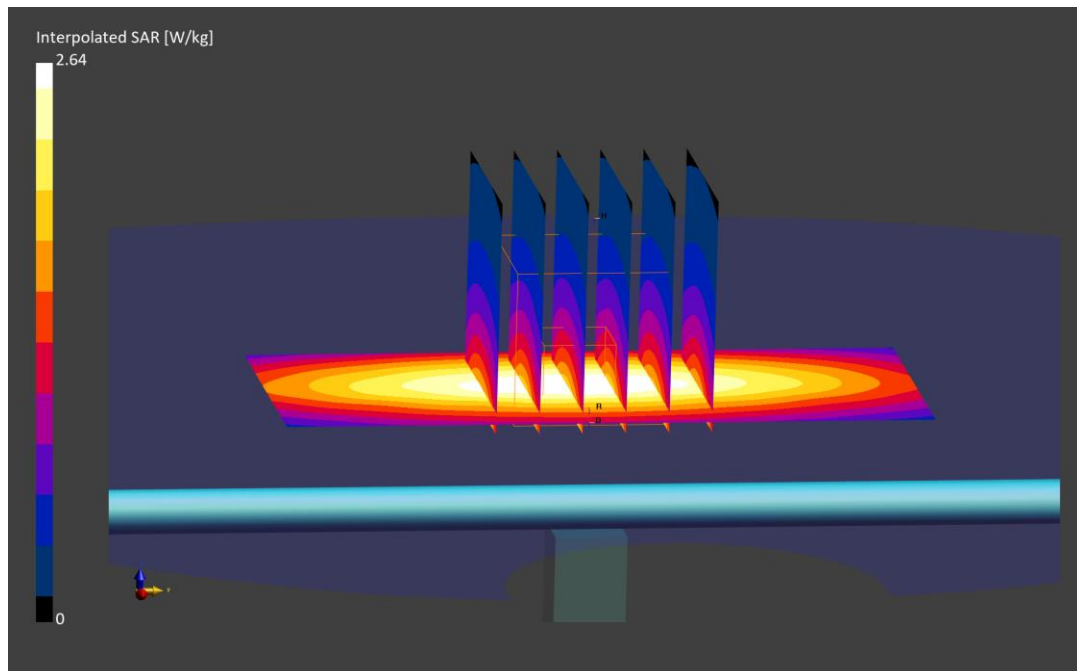

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1097

Communication System: UID: 0, CW; Frequency: 750.0 MHz

Medium: 750 Head; Medium parameters used:

f = 750.0 MHz; cond = 0.876 S/m; perm = 40.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 15 mm

Test Date: 01/18/2024; Ambient Temp: 23.0°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3949; ConvF:(10.55,10.55,10.55); Calibrated: 2023-10-02

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1684; 2023-09-12

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.2.0.1425

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 1.70 W/kg

Deviation (1 g) = 2.78%

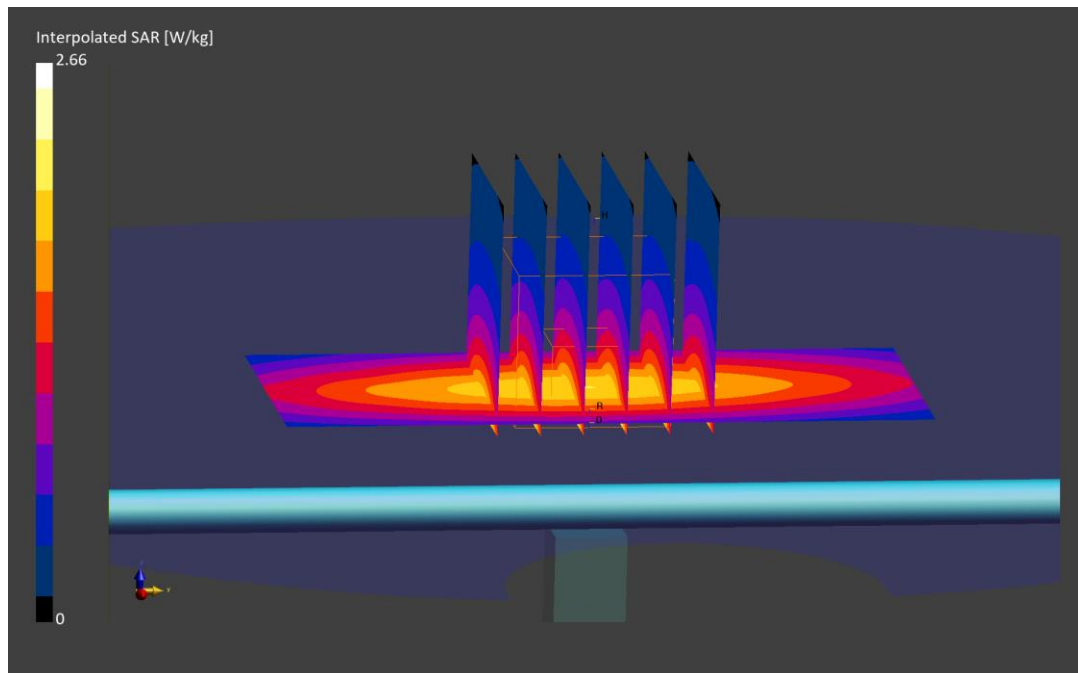

ELEMENT

DUT: Dipole 835.0 MHz; Type: D835V2 - SN460

Communication System: UID: 0, CW; Frequency: 835.0 MHz

Medium: 835 Head; Medium parameters used:

f = 835.0 MHz; cond = 0.917 S/m; perm = 42.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 15 mm

Test Date: 12/02/2023; Ambient Temp: 20.8°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7416; ConvF:(9.73,9.73,9.73); Calibrated: 2023-05-08

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn701; 2023-05-11

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.2.0.1425

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 3.03 W/kg

SAR(1 g) = 1.87 W/kg

Deviation (1 g) = -3.81%

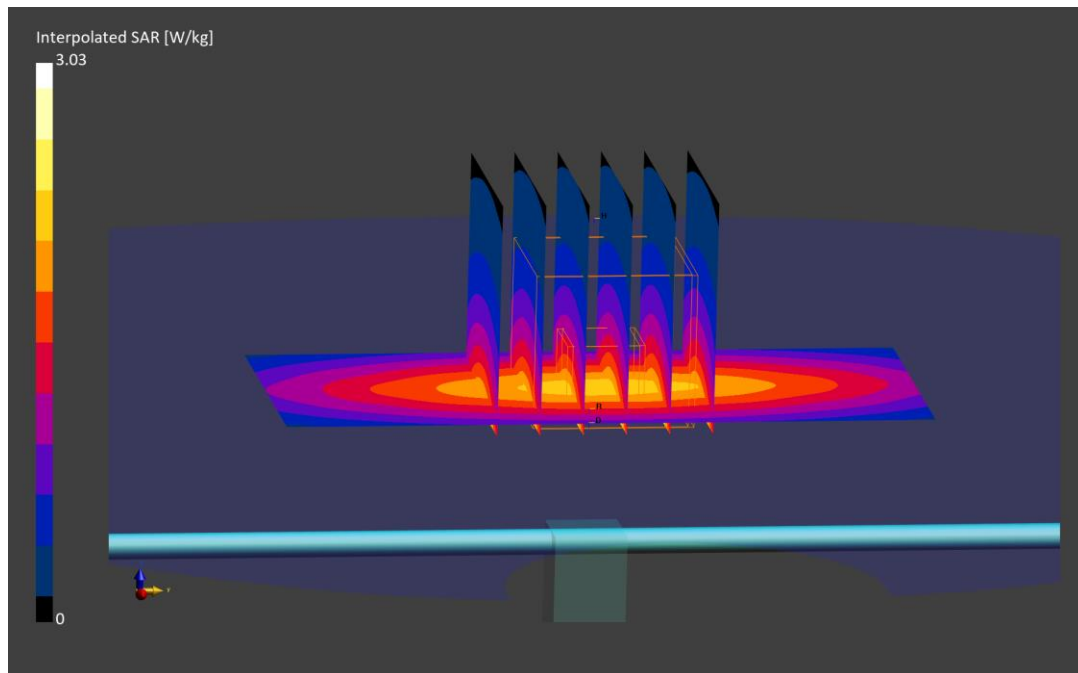

ELEMENT

DUT: Dipole 835.0 MHz; Type: D835V2 - SN460

Communication System: UID: 0, CW; Frequency: 835.0 MHz

Medium: 835 Head; Medium parameters used:

f = 835.0 MHz; cond = 0.878 S/m; perm = 40.6; density = 1000 kg/m³

Phantom Section: Flat; Space: 15 mm

Test Date: 12/04/2023; Ambient Temp: 21.1°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7416; ConvF:(9.73,9.73,9.73); Calibrated: 2023-05-08

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn701; 2023-05-11

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.2.0.1425

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.85 W/kg

SAR(1 g) = 1.82 W/kg

Deviation (1 g) = -6.38%

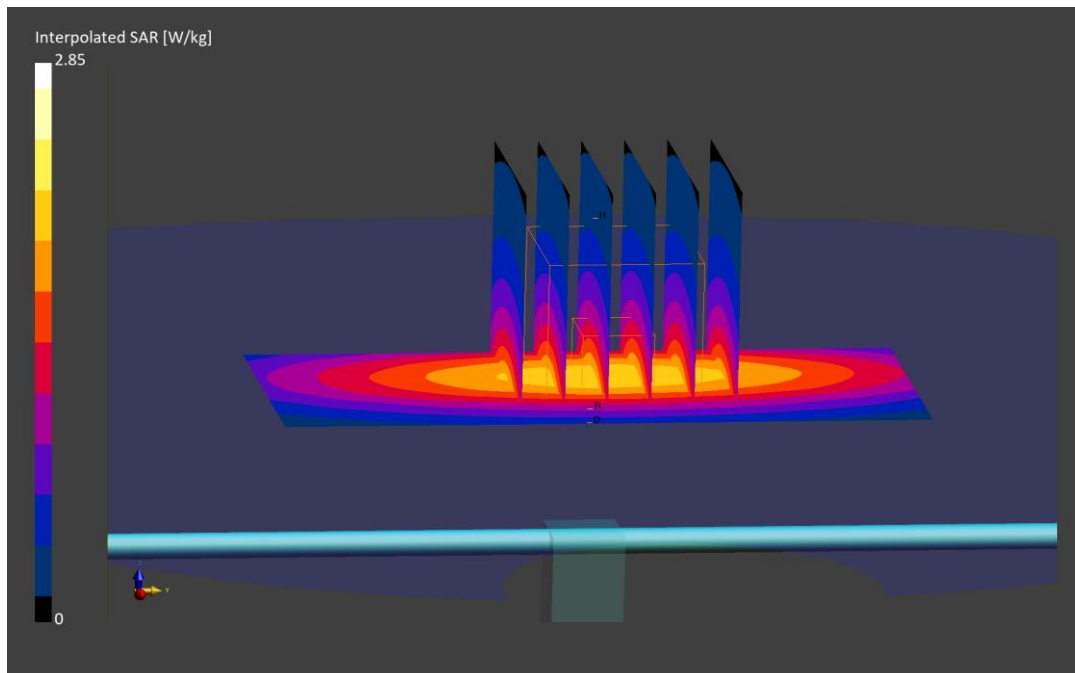

ELEMENT

DUT: Dipole 835.0 MHz; Type: D835V2 - SN4d040

Communication System: UID: 0, CW; Frequency: 835.0 MHz

Medium: 835 Head; Medium parameters used:

f = 835.0 MHz; cond = 0.880 S/m; perm = 39.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 15 mm

Test Date: 12/06/2023; Ambient Temp: 23.6°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7416; ConvF:(9.73,9.73,9.73); Calibrated: 2023-05-08

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn701; 2023-05-11

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.2.0.1425

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.95 W/kg

SAR(1 g) = 1.86 W/kg

Deviation (1 g) = -5.01%

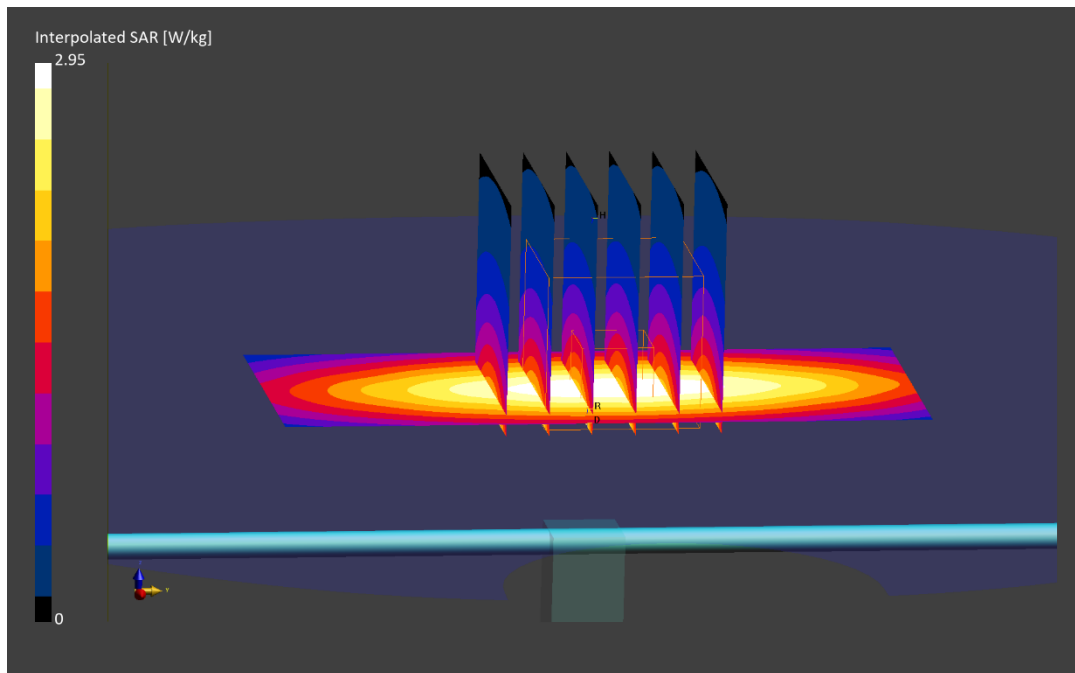

ELEMENT

DUT: Dipole 835.0 MHz; Type: D835V2 - SN4d040

Communication System: UID: 0, CW; Frequency: 835.0 MHz

Medium: 835 Head; Medium parameters used:

f = 835.0 MHz; cond = 0.909 S/m; perm = 41.6; density = 1000 kg/m³

Phantom Section: Flat; Space: 15 mm

Test Date: 12/17/2023; Ambient Temp: 20.3°C; Tissue Temp: 19.7°C

Probe: EX3DV4 - SN7416; ConvF:(9.73,9.73,9.73); Calibrated: 2023-05-08

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn701; 2023-05-11

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.2.0.1425

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 1.85 W/kg

Deviation (1 g) = -5.52%

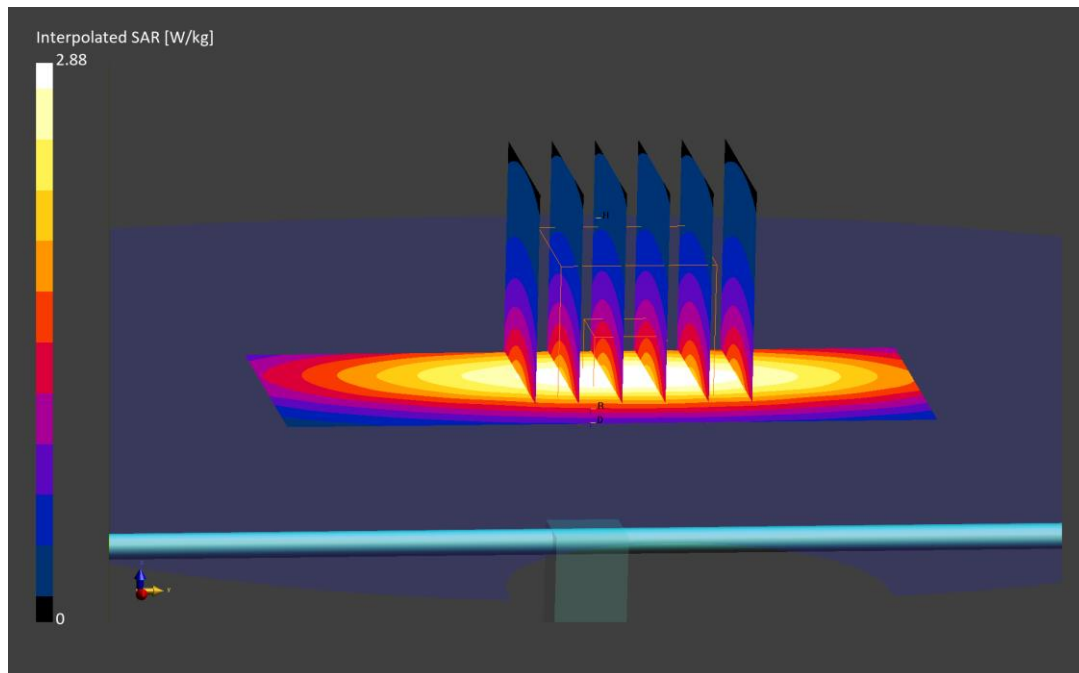

ELEMENT

DUT: Dipole 1750.0 MHz; Type: D1750V2 - SN1040

Communication System: UID: 0, CW; Frequency: 1750.0 MHz

Medium: 1750 Head; Medium parameters used:

f = 1750.0 MHz; cond = 1.35 S/m; perm = 40.8; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 11/30/2023; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7639; ConvF:(8.98,8.98,8.98); Calibrated: 2023-11-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1403; 2023-11-14

Phantom: Twin-SAM V8.0; Serial: 2034

Measurement SW: DASY Module SAR V16.2.0.1425

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 6.66 W/kg

SAR(1 g) = 3.58 W/kg

Deviation (1 g) = -1.65%

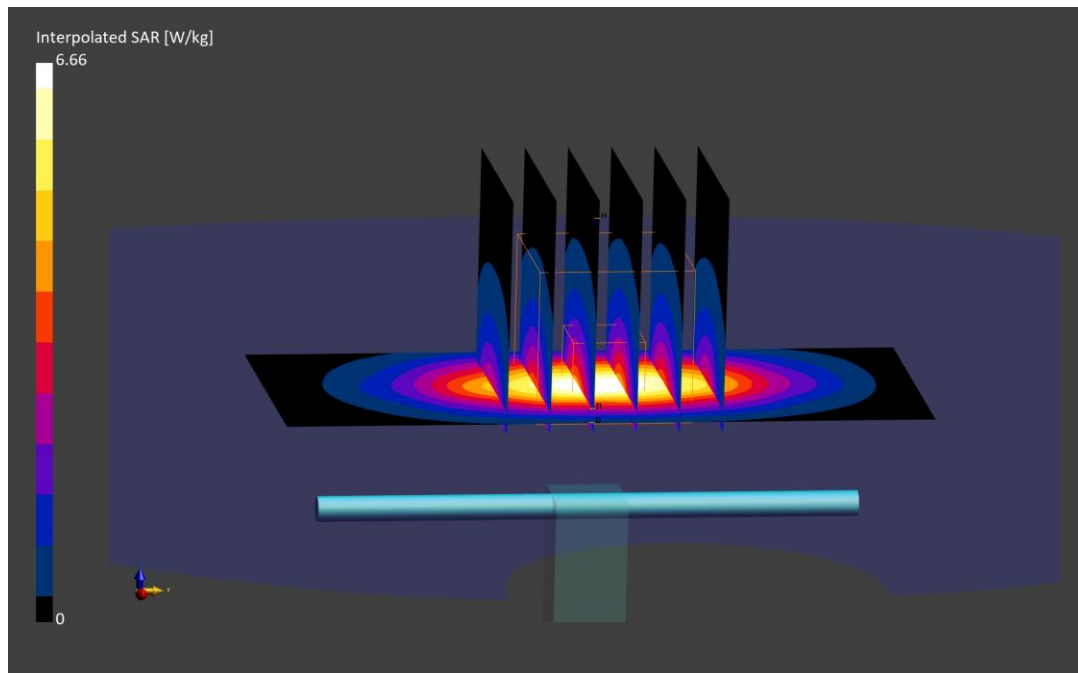

ELEMENT

DUT: Dipole 1750.0 MHz; Type: D1750V2 - SN1104

Communication System: UID: 0, CW; Frequency: 1750.0 MHz

Medium: 1750 Head; Medium parameters used:

f = 1750.0 MHz; cond = 1.36 S/m; perm = 38.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/01/2023; Ambient Temp: 20.9°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7360; ConvF:(9.15,9.15,9.15); Calibrated: 2023-03-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn534; 2023-03-15

Phantom: Twin-SAM V4.0; Serial: 1447

Measurement SW: DASY Module SAR V16.2.0.1425

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 6.52 W/kg

SAR(1 g) = 3.37 W/kg

Deviation (1 g) = -5.34%

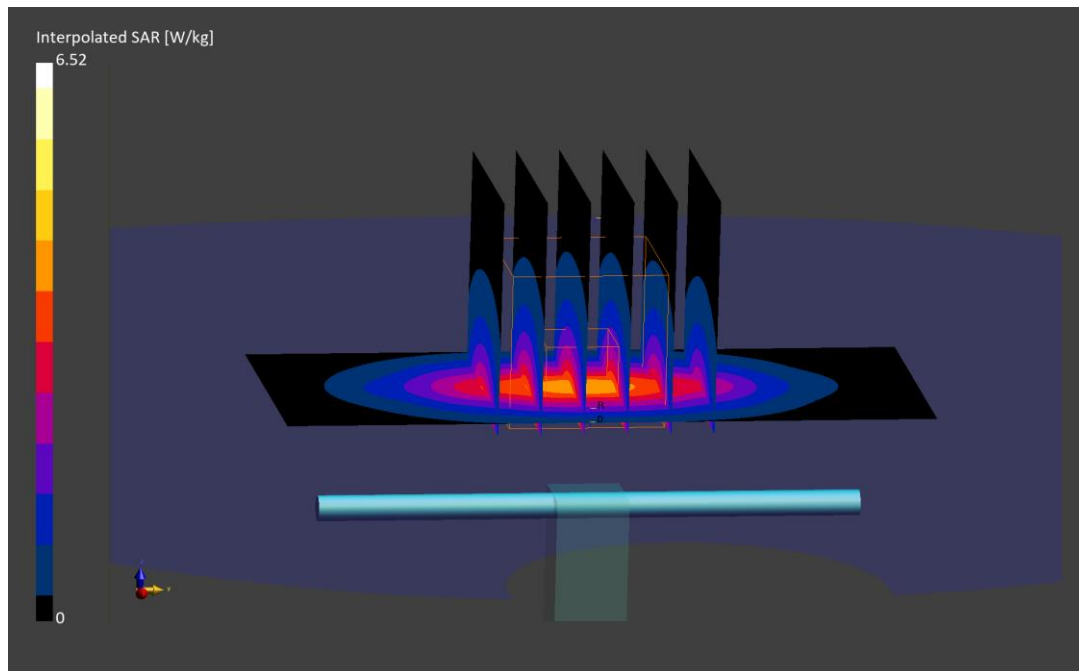

ELEMENT

DUT: Dipole 1750.0 MHz; Type: D1750V2 - SN1083

Communication System: UID: 0, CW; Frequency: 1750.0 MHz

Medium: 1750 Head; Medium parameters used:

f = 1750.0 MHz; cond = 1.31 S/m; perm = 38.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/04/2023; Ambient Temp: 23.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7639; ConvF:(8.98,8.98,8.98); Calibrated: 2023-11-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1403; 2023-11-14

Phantom: Twin-SAM V8.0; Serial: 2034

Measurement SW: DASY Module SAR V16.2.0.1425

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 6.35 W/kg

SAR(1 g) = 3.42 W/kg

Deviation (1 g) = -6.30%

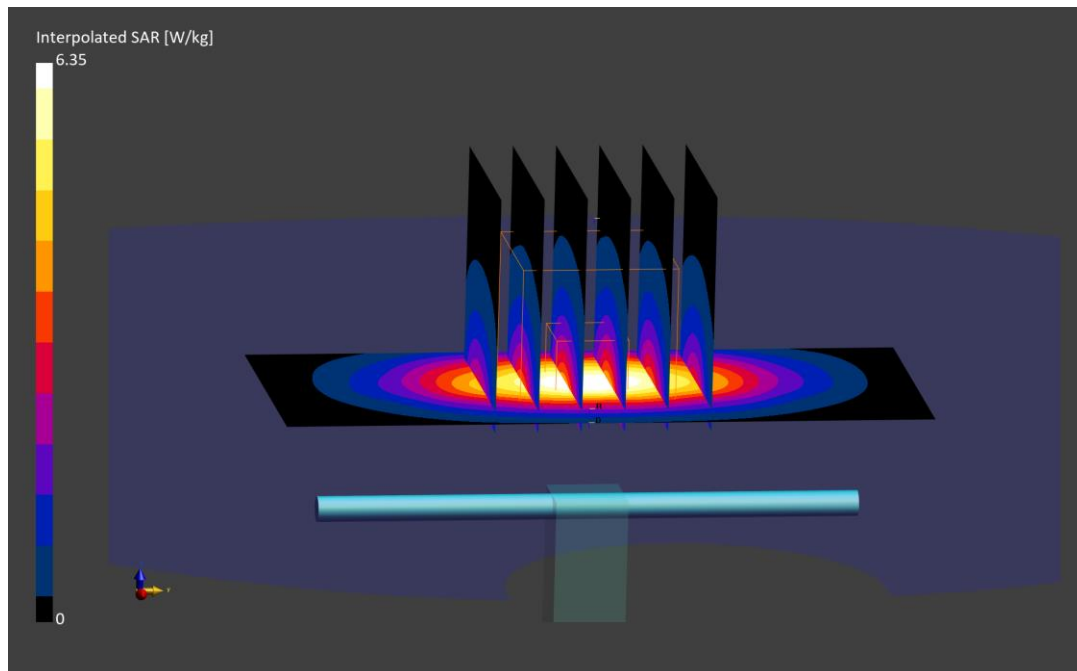

ELEMENT

DUT: Dipole 1750.0 MHz; Type: D1750V2 - SN1083

Communication System: UID: 0, CW; Frequency: 1750.0 MHz

Medium: 1750 Head; Medium parameters used:

f = 1750.0 MHz; cond = 1.36 S/m; perm = 38.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/05/2023; Ambient Temp: 21.6°C; Tissue Temp: 19.9°C

Probe: EX3DV4 - SN7360; ConvF:(9.15,9.15,9.15); Calibrated: 2023-03-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn534; 2023-03-15

Phantom: Twin-SAM V4.0; Serial: 1447

Measurement SW: DASY Module SAR V16.2.0.1425

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.06 W/kg

SAR(1 g) = 3.69 W/kg

Deviation (1 g) = 1.10%

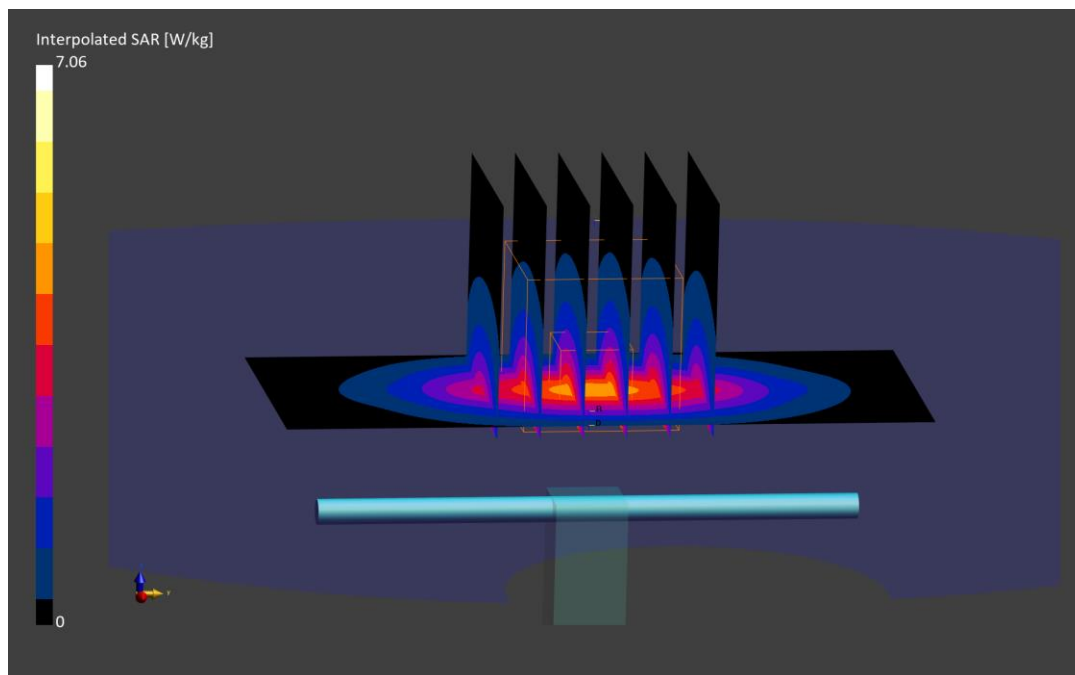

ELEMENT

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d180

Communication System: UID: 0, CW; Frequency: 1900.0 MHz

Medium: 1900 Head; Medium parameters used:

f = 1900.0 MHz; cond = 1.45 S/m; perm = 40.6; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 11/29/2023; Ambient Temp: 20.3°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7357; ConvF:(8.3,8.3,8.3); Calibrated: 2023-04-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; 2023-04-14

Phantom: Twin-SAM V8.0; Serial: 1866

Measurement SW: DASY Module SAR V16.2.0.1425

1900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.48 W/kg

SAR(1 g) = 3.85 W/kg

Deviation (1 g) = -1.79%

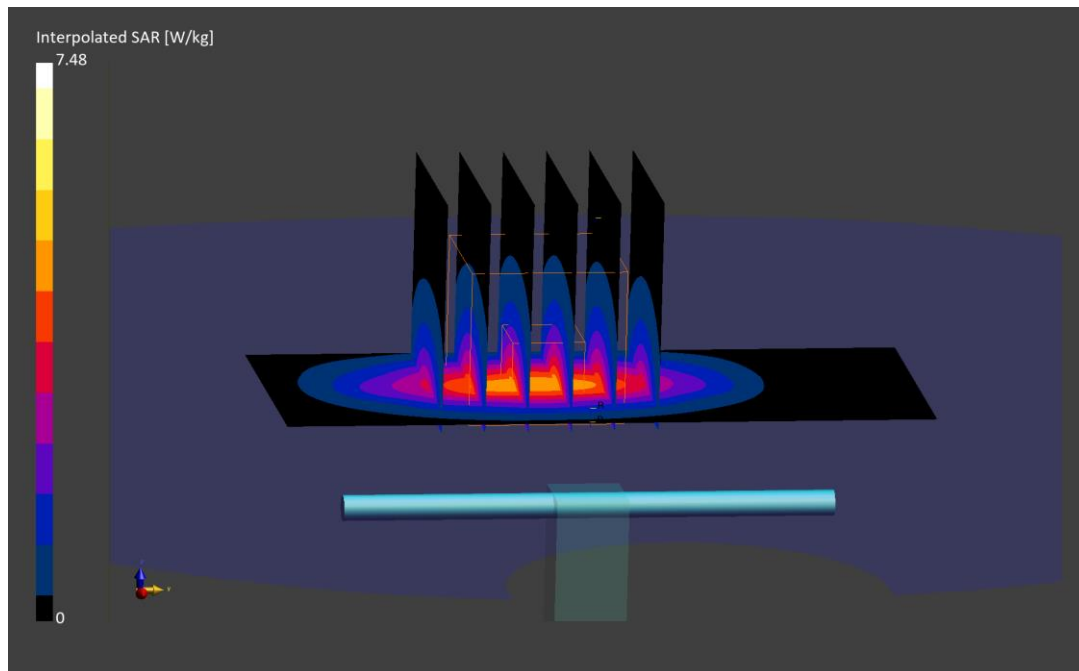

ELEMENT

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d180

Communication System: UID: 0, CW; Frequency: 1900.0 MHz

Medium: 1900 Head; Medium parameters used:

f = 1900.0 MHz; cond = 1.42 S/m; perm = 38.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/20/2023; Ambient Temp: 21.5°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7357; ConvF:(8.3,8.3,8.3); Calibrated: 2023-04-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; 2023-04-14

Phantom: Twin-SAM V8.0; Serial: 1866

Measurement SW: DASY Module SAR V16.2.0.1425

1900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.41 W/kg

SAR(1 g) = 3.86 W/kg

Deviation (1 g) = -1.53%

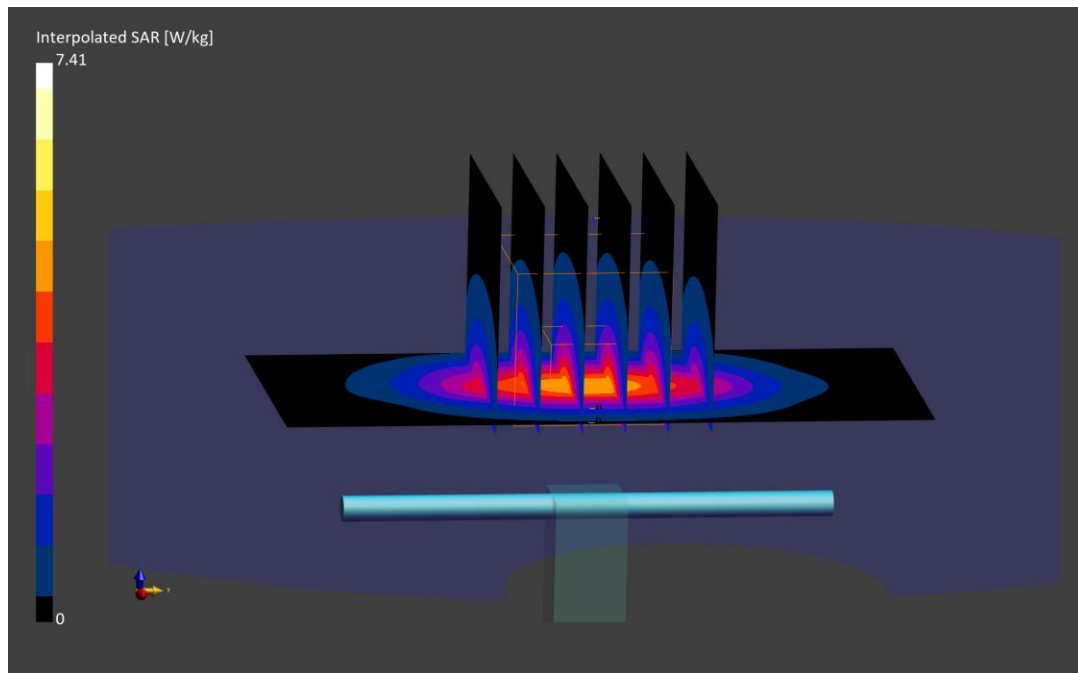

ELEMENT

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d180

Communication System: UID: 0, CW; Frequency: 1900.0 MHz

Medium: 1900 Head; Medium parameters used:

f = 1900.0 MHz; cond = 1.43 S/m; perm = 39.6; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/26/2023; Ambient Temp: 22.6 C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7357; ConvF:(8.3,8.3,8.3); Calibrated: 2023-04-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; 2023-04-14

Phantom: Twin-SAM V8.0; Serial: 1866

Measurement SW: DASY Module SAR V16.2.0.1425

1900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.69 W/kg

SAR(1 g) = 3.94 W/kg

Deviation (1 g) = 0.51%

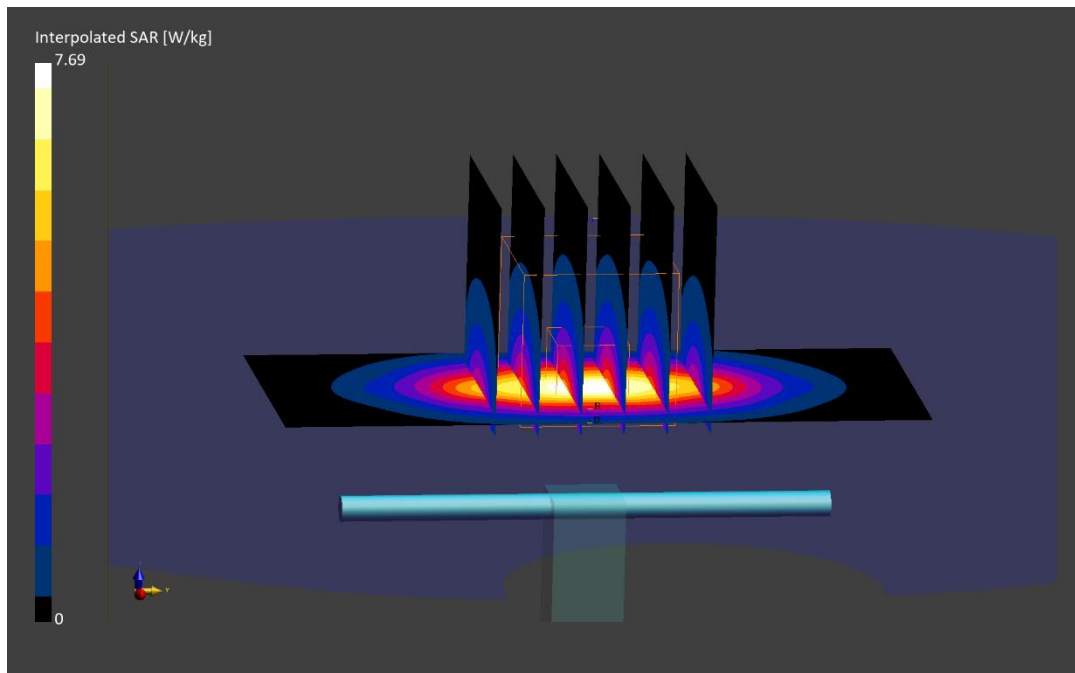

ELEMENT

DUT: Dipole 2300.0 MHz; Type: D2300V2 - SN1038

Communication System: UID: 0, CW; Frequency: 2300.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2300.0 MHz; cond = 1.69 S/m; perm = 39.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 11/30/2023; Ambient Temp: 21.9°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7532; ConvF:(8.2,8.2,8.2); Calibrated: 2023-04-18

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; 2023-04-14

Phantom: Twin-SAM V8.0; Serial: 2067

Measurement SW: DASY Module SAR V16.2.0.1425

2300.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.1 W/kg

SAR(1 g) = 4.71 W/kg

Deviation (1 g) = -3.09%

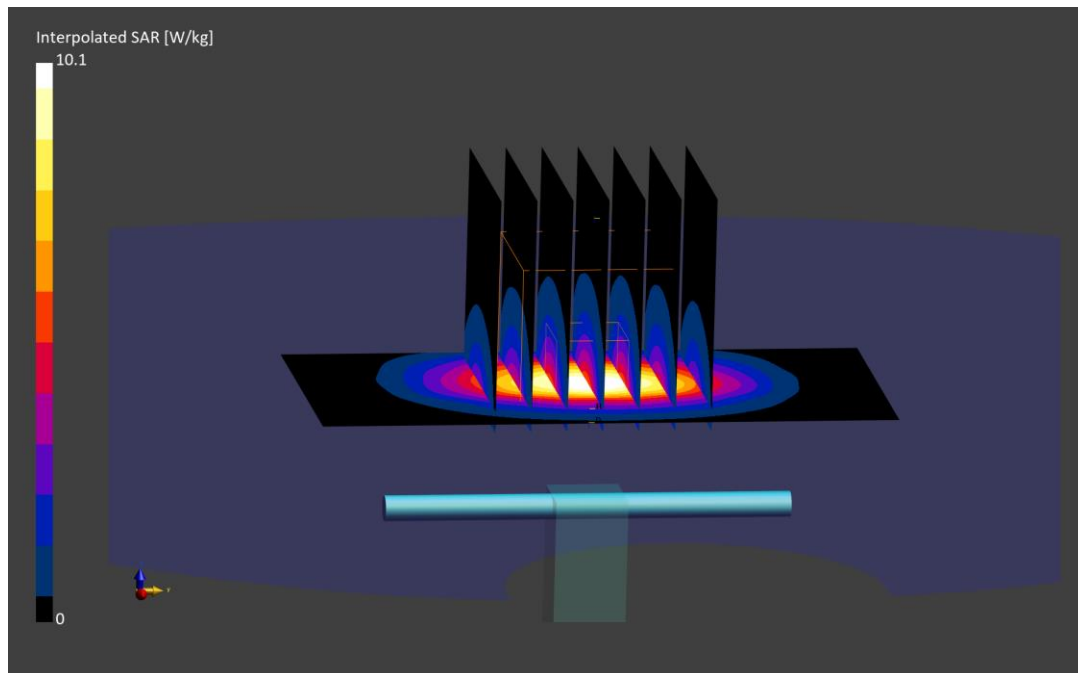

ELEMENT

DUT: Dipole 2300.0 MHz; Type: D2300V2 - SN1038

Communication System: UID: 0, CW; Frequency: 2300.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2300.0 MHz; cond = 1.66 S/m; perm = 41.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/05/2023; Ambient Temp: 21.6°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7532; ConvF:(8.2,8.2,8.2); Calibrated: 2023-04-18

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; 2023-04-14

Phantom: Twin-SAM V8.0; Serial: 2067

Measurement SW: DASY Module SAR V16.2.0.1425

2300.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 9.60 W/kg

SAR(1 g) = 4.72 W/kg

Deviation (1 g) = -2.88%

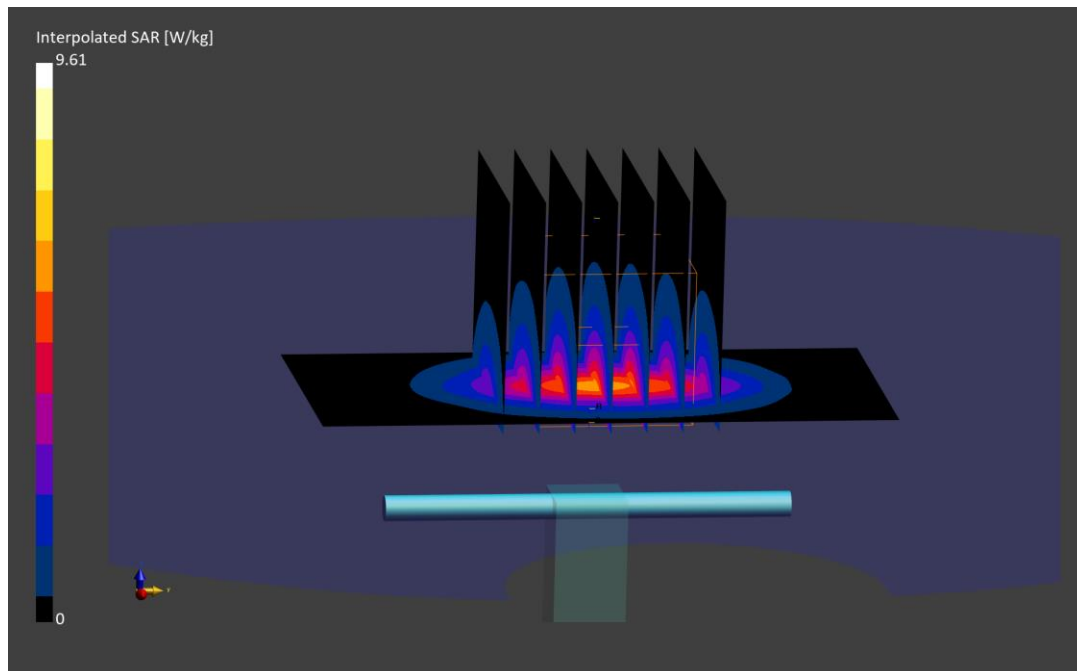

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN921

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2450.0 MHz; cond = 1.79 S/m; perm = 40.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/05/2023; Ambient Temp: 19.1°C; Tissue Temp: 19.7°C

Probe: EX3DV4 - SN7421; ConvF:(7.45,7.45,7.45); Calibrated: 2023-03-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn604; 2023-03-15

Phantom: Twin-SAM V8.0; Serial: 2070

Measurement SW: DASY Module SAR V16.2.0.1425

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.2 W/kg

SAR(1 g) = 5.43 W/kg

Deviation (1 g) = 0.18%

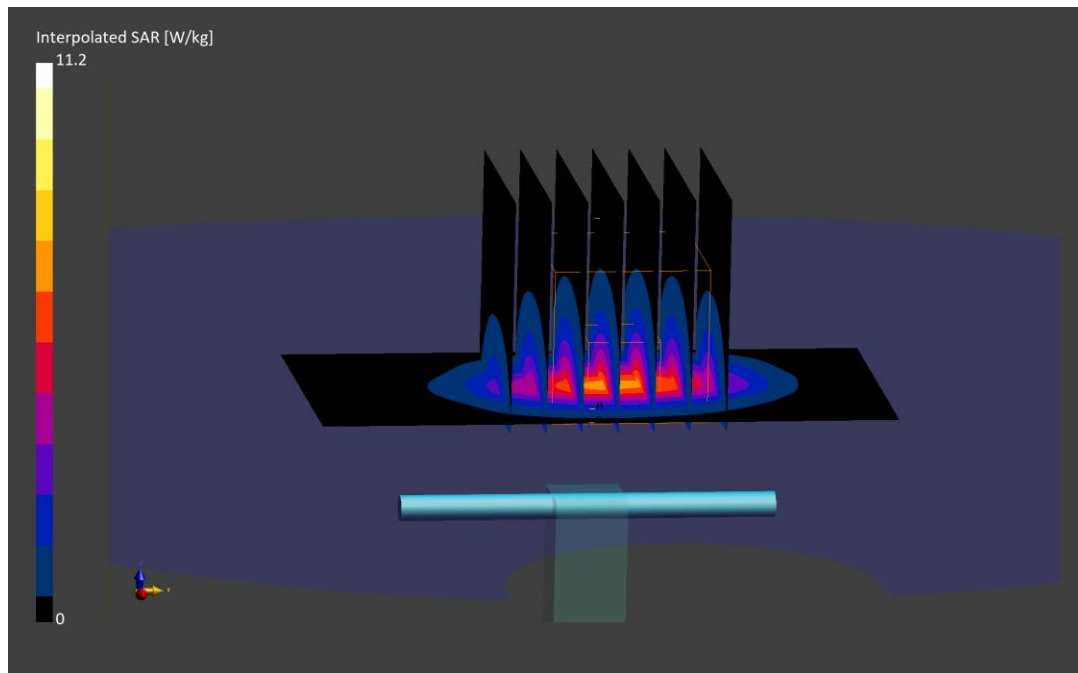

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN921

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2450.0 MHz; cond = 1.77 S/m; perm = 40.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/07/2023; Ambient Temp: 19.4°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7421; ConvF:(7.45,7.45,7.45); Calibrated: 2023-03-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn604; 2023-03-15

Phantom: Twin-SAM V8.0; Serial: 2070

Measurement SW: DASY Module SAR V16.2.0.1425

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.19 W/kg

Deviation (1 g) = -4.24%

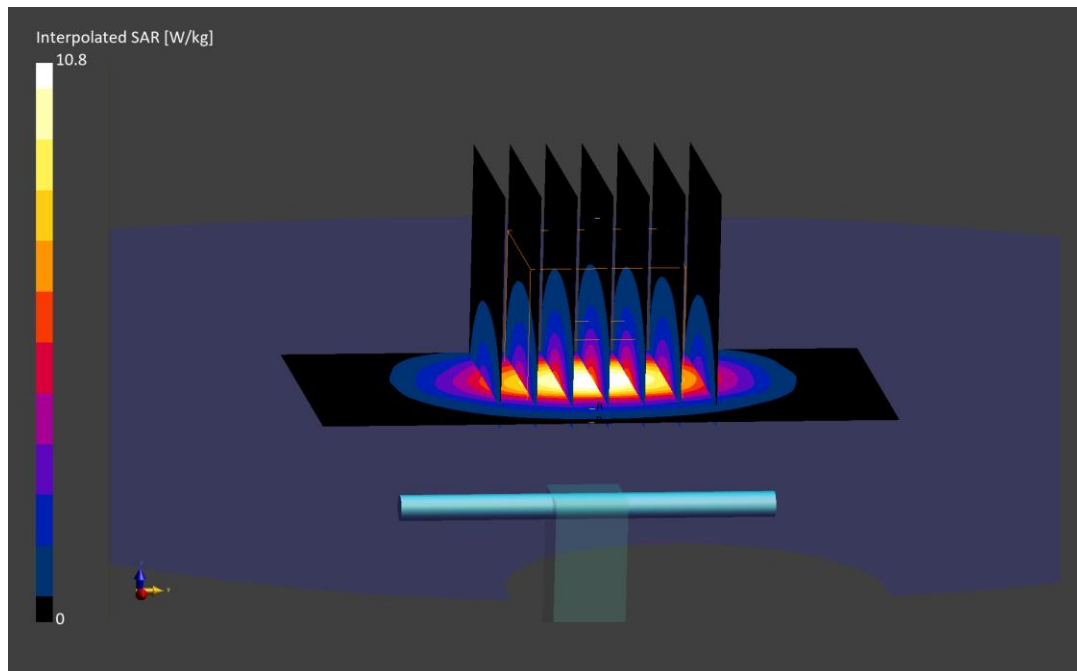

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN750

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2450.0 MHz; cond = 1.76 S/m; perm = 40.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/09/2023; Ambient Temp: 21.2°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7421; ConvF:(7.45,7.45,7.45); Calibrated: 2023-03-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn604; 2023-03-15

Phantom: Twin-SAM V8.0; Serial: 2070

Measurement SW: DASY Module SAR V16.2.0.1425

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.26 W/kg

Deviation (1 g) = 0.00%

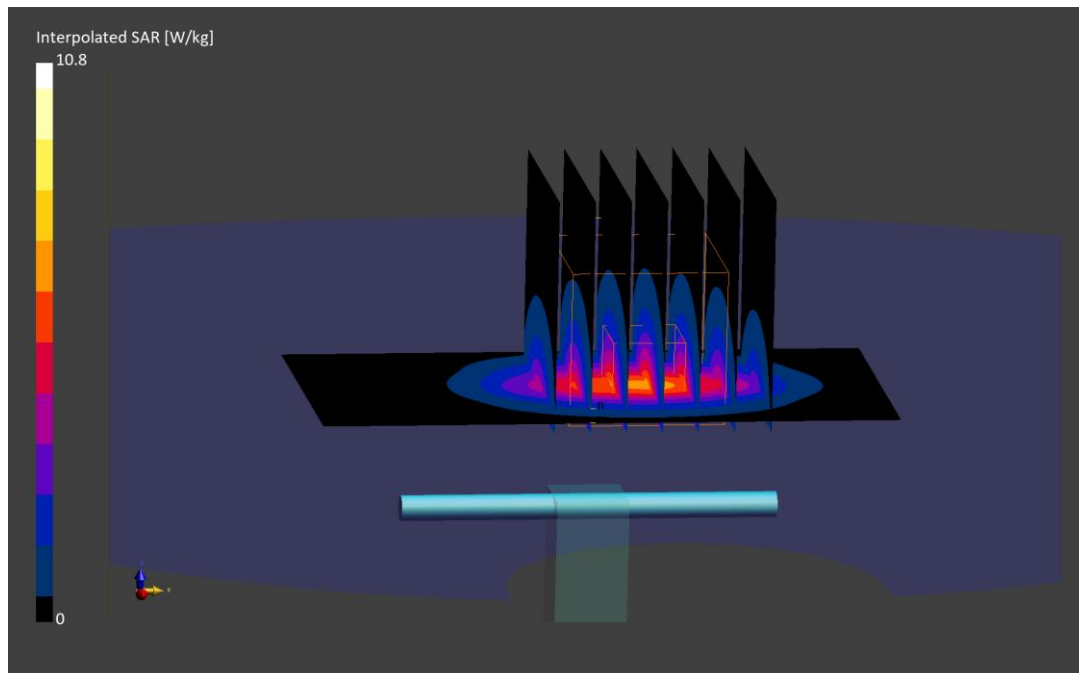

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN921

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2450.0 MHz; cond = 1.74 S/m; perm = 40.8; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 02/25/2024; Ambient Temp: 20.1°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7421; ConvF:(7.45,7.45,7.45); Calibrated: 2023-03-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn604; 2023-03-15

Phantom: Twin-SAM V8.0; Serial: 2070

Measurement SW: DASY Module SAR V16.2.0.1425

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 5.16 W/kg

Deviation (1 g) = -4.80%

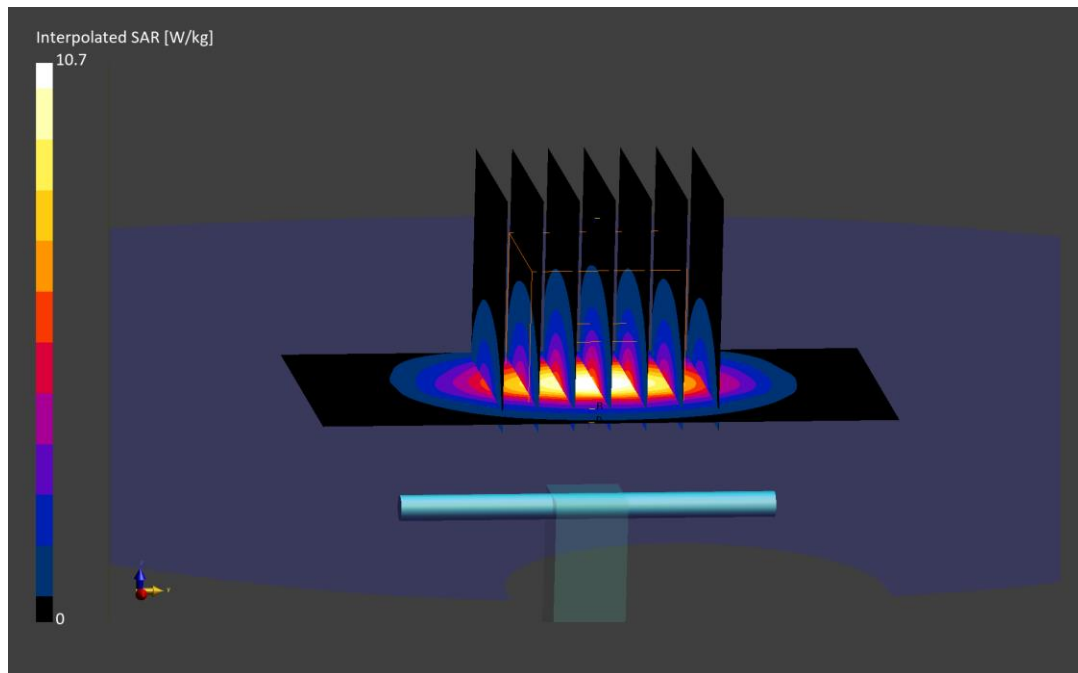

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1042

Communication System: UID: 0, CW; Frequency: 2600.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2600.0 MHz; cond = 2.04 S/m; perm = 37.4; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 11/29/2023; Ambient Temp: 22.1°C; Tissue Temp: 23.5°C

Probe: EX3DV4 - SN7546; ConvF:(7.08,7.08,7.08); Calibrated: 2023-04-14

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1402; 2023-04-14

Phantom: Twin-SAM V8.0; Serial: 1935

Measurement SW: DASY Module SAR V16.2.0.1425

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.9 W/kg

SAR(1 g) = 5.66 W/kg

Deviation (1 g) = 1.43%

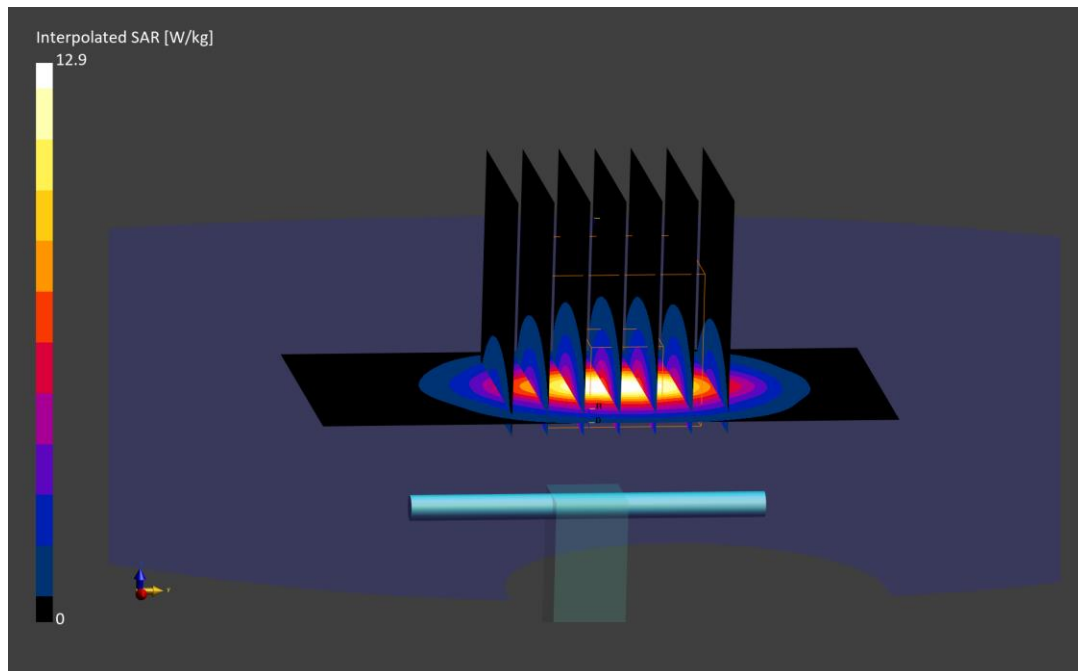

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1042

Communication System: UID: 0, CW; Frequency: 2600.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2600.0 MHz; cond = 2.04 S/m; perm = 37.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/04/2023; Ambient Temp: 20.4°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN7546; ConvF:(7.08,7.08,7.08); Calibrated: 2023-04-14

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1402; 2023-04-14

Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1935

Measurement SW: DASY Module SAR V16.2.0.1425

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.7 W/kg

SAR(1 g) = 5.64 W/kg

Deviation (1 g) = 1.08%

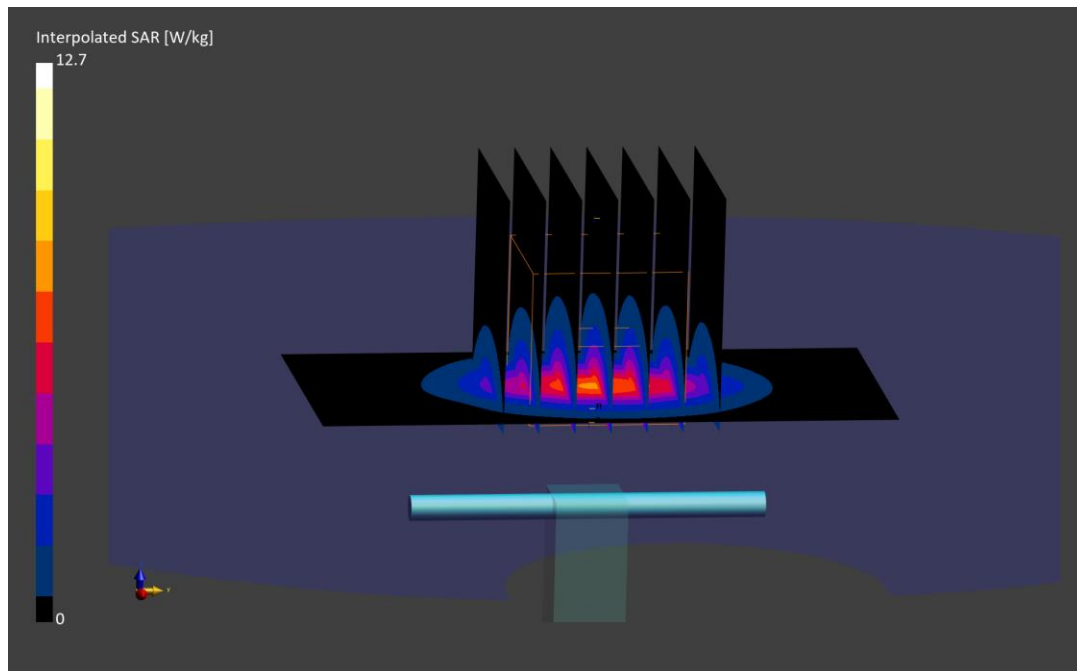

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1042

Communication System: UID: 0, CW; Frequency: 2600.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2600.0 MHz; cond = 1.89 S/m; perm = 39.9; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/11/2023; Ambient Temp: 20.3°C; Tissue Temp: 19.9°C

Probe: EX3DV4 - SN7532; ConvF:(7.53,7.53,7.53); Calibrated: 2023-04-18

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; 2023-04-14

Phantom: Twin-SAM V8.0; Serial: 2067

Measurement SW: DASY Module SAR V16.2.0.1425

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.8 W/kg

SAR(1 g) = 5.53 W/kg

Deviation (1 g) = -0.90%

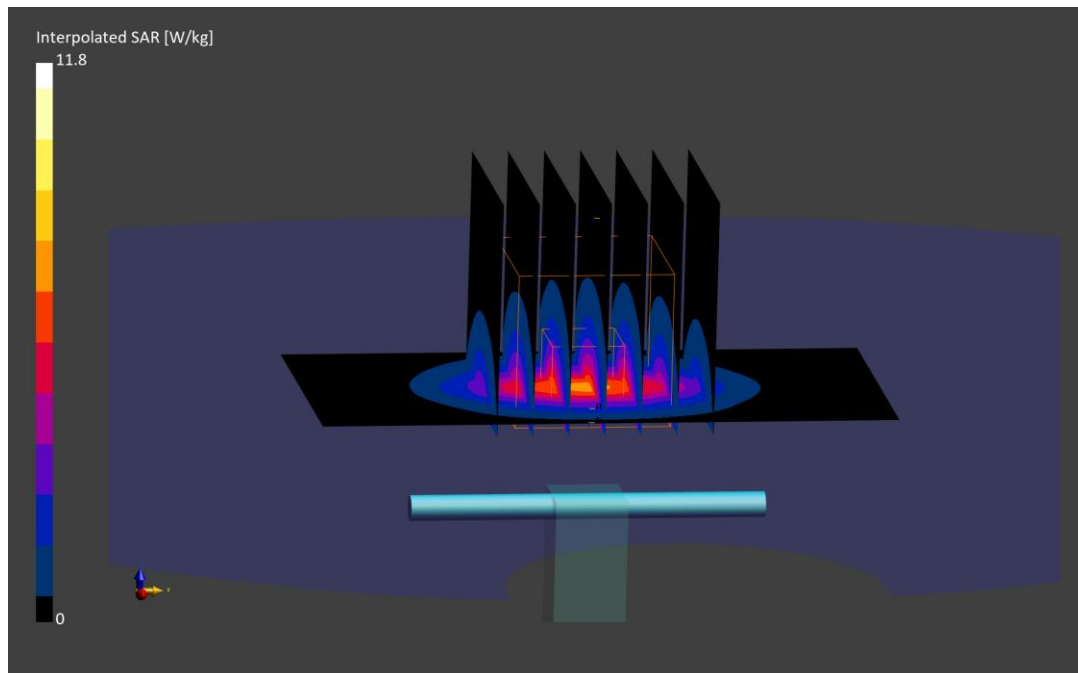

ELEMENT

DUT: Dipole 3500.0 MHz; Type: D3500V2 - SN1126

Communication System: UID: 0, CW; Frequency: 3500.0 MHz

Medium: 3600 Head; Medium parameters used:

f = 3500.0 MHz; cond = 2.99 S/m; perm = 36.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/04/2023; Ambient Temp: 20.8°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7782; ConvF:(6.19,6.19,6.19); Calibrated: 2023-09-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1646; 2023-09-08

Phantom: Twin-SAM V8.0; Serial: 1944

Measurement SW: DASY Module SAR V16.2.0.1425

3500.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 19.6 W/kg

SAR(1 g) = 6.93 W/kg

Deviation (1 g) = 3.43%

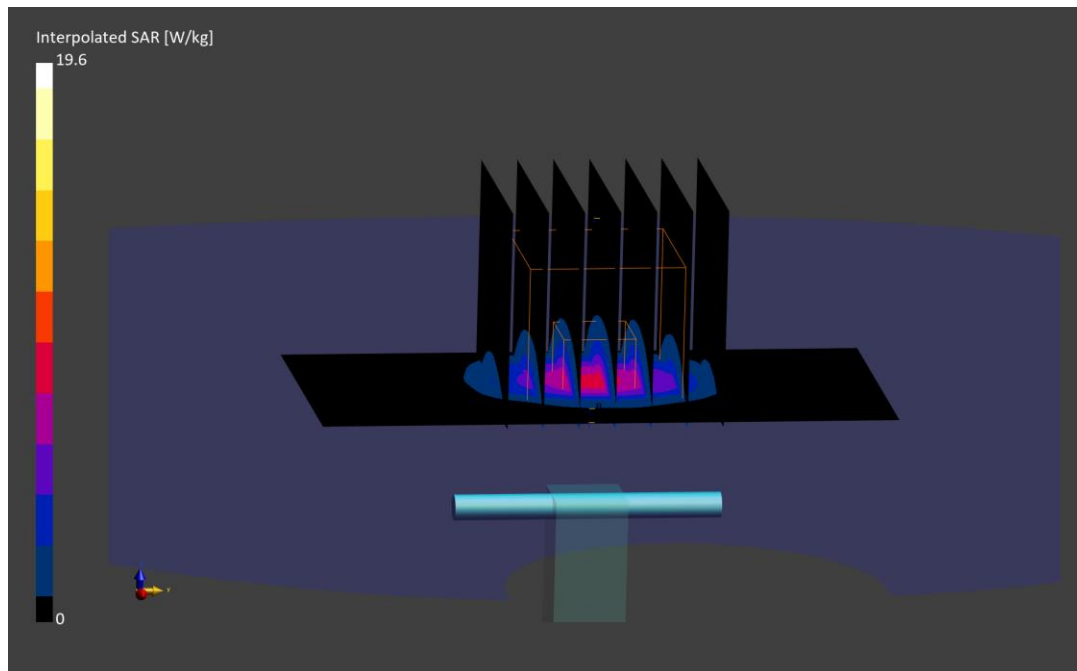

ELEMENT

DUT: Dipole 3500.0 MHz; Type: D3500V2 - SN1126

Communication System: UID: 0, CW; Frequency: 3500.0 MHz

Medium: 3600 Head; Medium parameters used:

f = 3500.0 MHz; cond = 2.94 S/m; perm = 36.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/29/2023; Ambient Temp: 22.5°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7782; ConvF:(6.19,6.19,6.19); Calibrated: 2023-09-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1646; 2023-09-08

Phantom: Twin-SAM V8.0; Serial: 1944

Measurement SW: DASY Module SAR V16.2.0.1425

3500.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 20.0 W/kg

SAR(1 g) = 7.08 W/kg

Deviation (1 g) = 5.67%

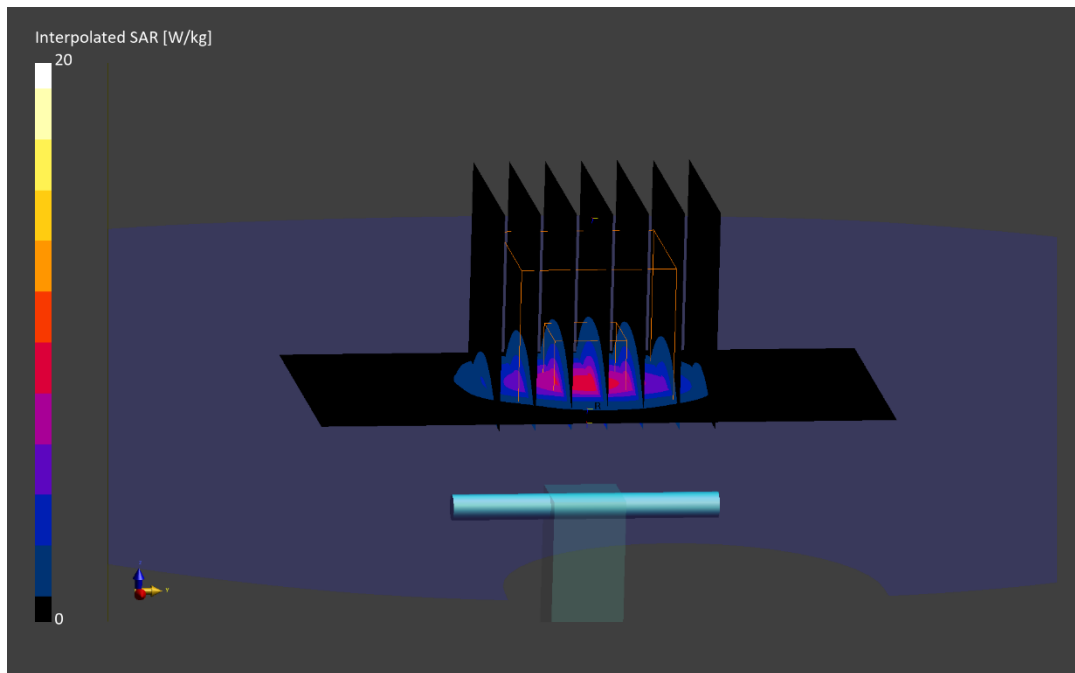

ELEMENT

DUT: Dipole 3700.0 MHz; Type: D3700V2 - SN1002

Communication System: UID: 0, CW; Frequency: 3700.0 MHz

Medium: 3600 Head; Medium parameters used:

f = 3700.0 MHz; cond = 3.08 S/m; perm = 38.6; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 01/02/2024; Ambient Temp: 19.8°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7638; ConvF:(6.99,6.99,6.99); Calibrated: 2023-03-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; 2023-03-13

Phantom: Twin-SAM V8.0; Serial: 1357

Measurement SW: DASY Module SAR V16.2.0.1425

3700.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 6.59 W/kg

Deviation (1 g) = -2.95%

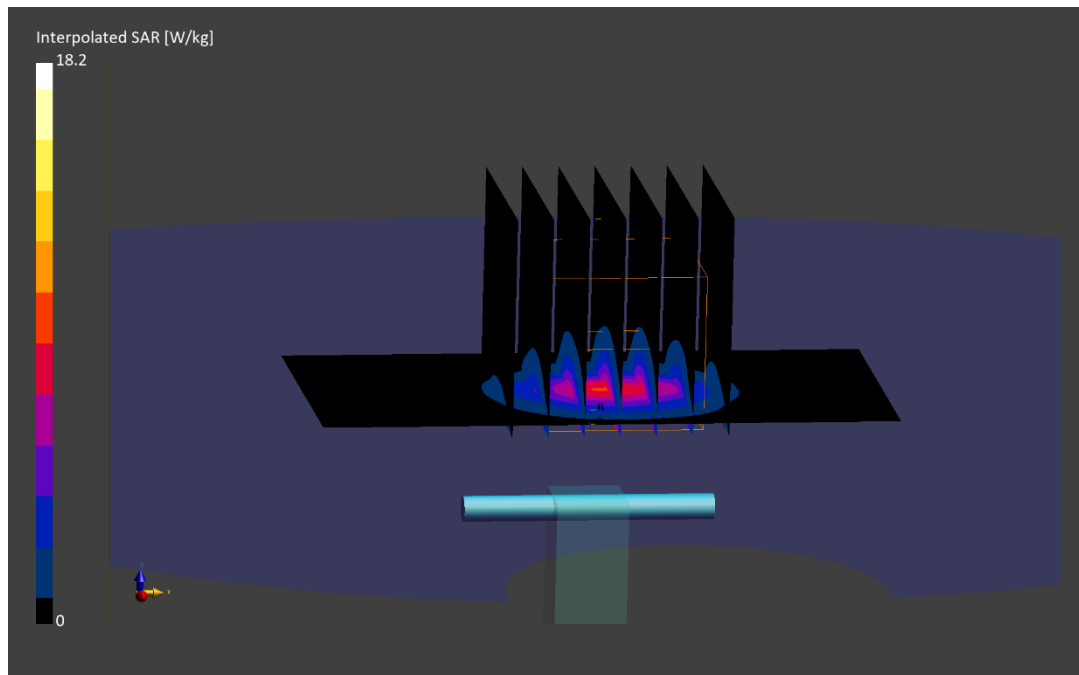

ELEMENT

DUT: Dipole 3900.0 MHz; Type: D3900V2 - SN1073

Communication System: UID: 0, CW; Frequency: 3900.0 MHz

Medium: 3600 Head; Medium parameters used:

f = 3900.0 MHz; cond = 3.31 S/m; perm = 36.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 01/05/2024; Ambient Temp: 22.5°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7782; ConvF:(5.65,5.65,5.65); Calibrated: 2023-09-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1646; 2023-09-08

Phantom: Twin-SAM V8.0; Serial: 1944

Measurement SW: DASY Module SAR V16.2.0.1425

3900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 19.7 W/kg

SAR(1 g) = 6.75 W/kg

Deviation (1 g) = -3.16%

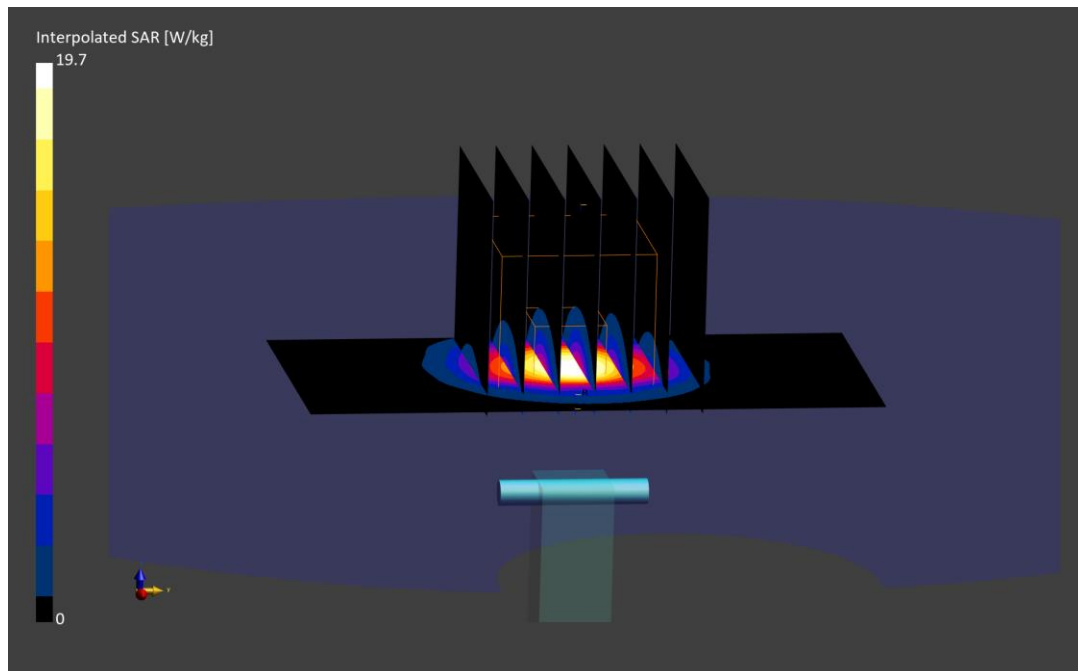

ELEMENT

DUT: Dipole 5250.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5250.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5250.0 MHz; cond = 4.50 S/m; perm = 35.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/14/2023; Ambient Temp: 20.4°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN3746; ConvF:(5.12,5.12,5.12); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; 2023-10-18

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.2.0.1425

5250.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.2 W/kg

SAR(1 g) = 3.74 W/kg

Deviation (1 g) = -7.08%

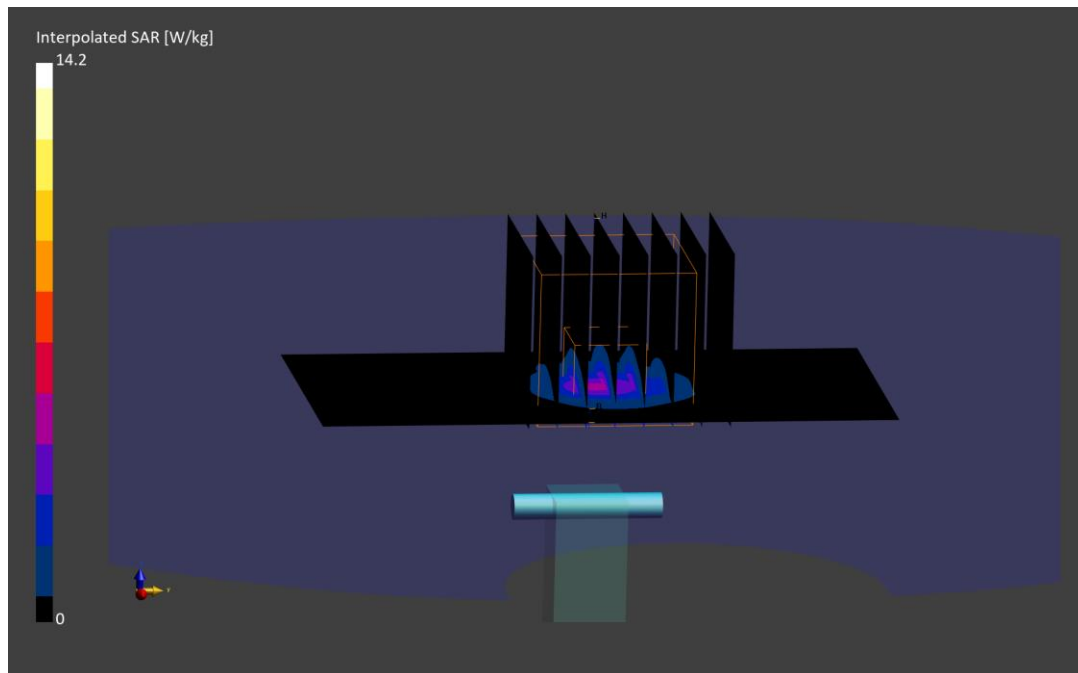

ELEMENT

DUT: Dipole 5600.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5600.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5600.0 MHz; cond = 4.88 S/m; perm = 34.4; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/09/2023; Ambient Temp: 20.1°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN3746; ConvF:(4.45,4.45,4.45); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; 2023-10-18

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.2.0.1425

5600.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.1 W/kg

SAR(1 g) = 4.39 W/kg

Deviation (1 g) = 4.90%

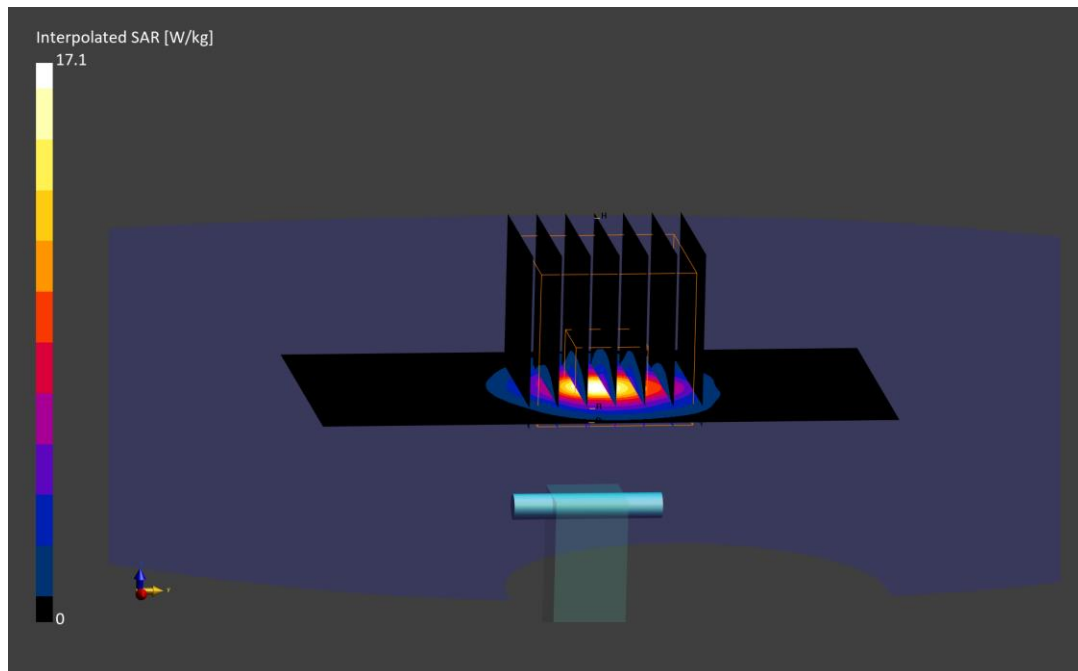

ELEMENT

DUT: Dipole 5750.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5750.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5750.0 MHz; cond = 5.04 S/m; perm = 34.1; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/09/2023; Ambient Temp: 20.1°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN3746; ConvF:(4.59,4.59,4.59); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; 2023-10-18

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.2.0.1425

5750.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.5 W/kg

SAR(1 g) = 4.07 W/kg

Deviation (1 g) = 1.12%

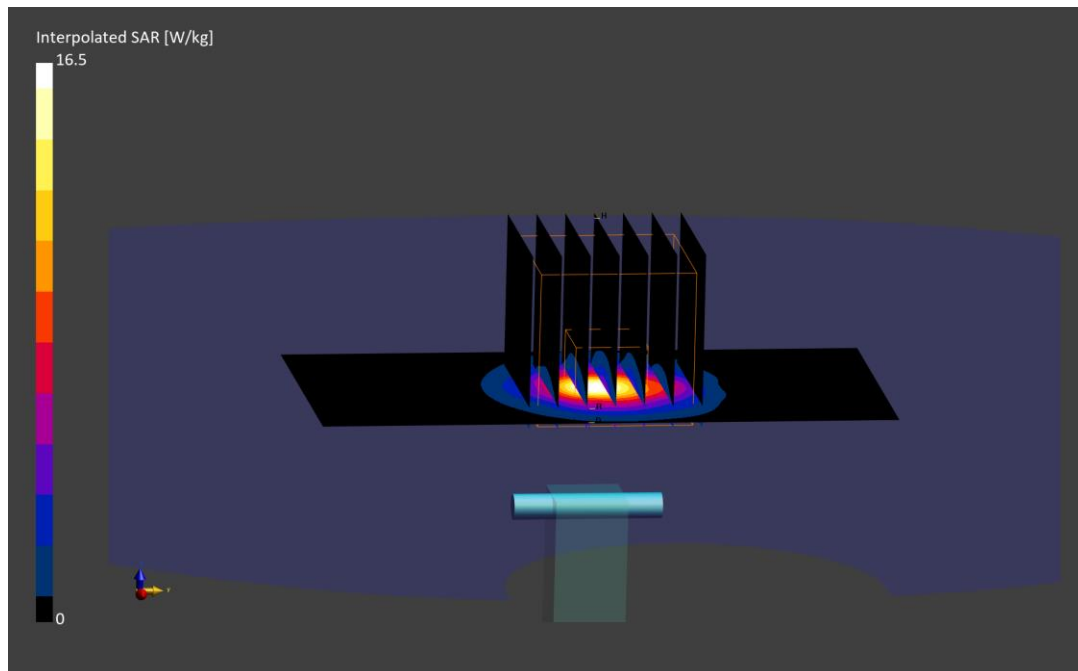

ELEMENT

DUT: Dipole 5800.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5800.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5800.0 MHz; cond = 5.10 S/m; perm = 34.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 12/09/2023; Ambient Temp: 20.1°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN3746; ConvF:(4.5,4.5,4.5); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; 2023-10-18

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.2.0.1425

5800.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 4.11 W/kg

Deviation (1 g) = 2.11%

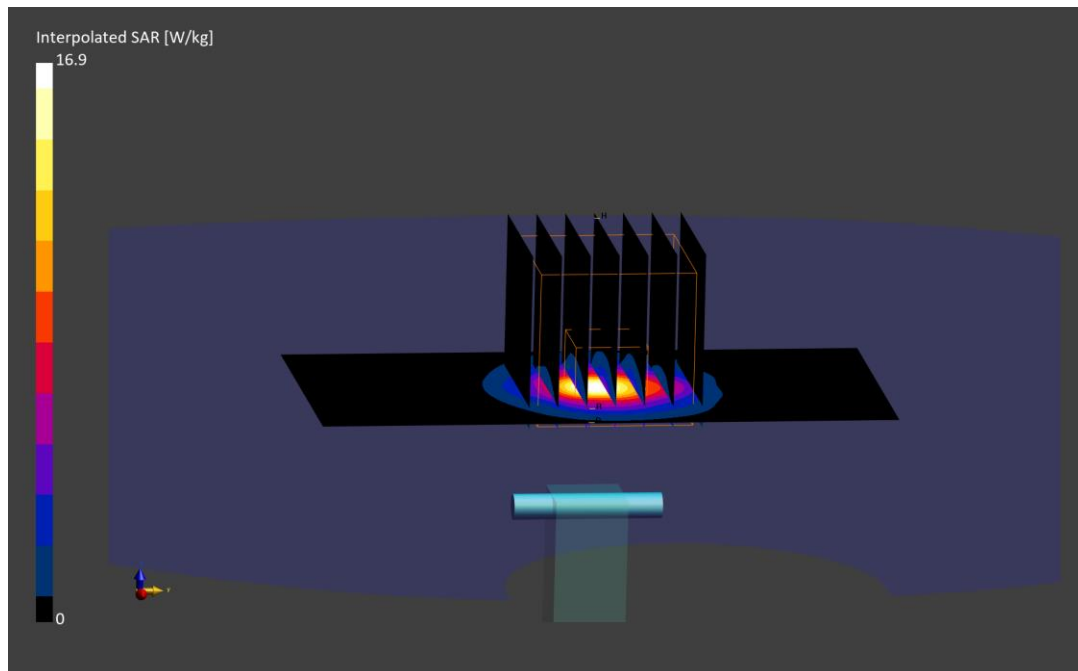

ELEMENT

DUT: Dipole 6500.0 MHz; Type: D6.5GHzV2 - SN1020

Communication System: UID: 0, CW; Frequency: 6500.0 MHz

Medium: 6000 Head; Medium parameters used:

f = 6500.0 MHz; cond = 6.07 S/m; perm = 34.1; density = 1000 kg/m³

Phantom Section: Flat; Space: 5 mm

Test Date: 12/03/2023; Ambient Temp: 21.7°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7420; ConvF:(5.21,5.12,5.28); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1333; 2023-10-18

Phantom: Twin-SAM V4.0; Serial: 1275

Measurement SW: DASY Module SAR V16.2.0.1425

6500.0 MHz System Verification at 14.0 dBm (25 mW)


Area Scan (51.0 x 85.0): Measurement grid: dx=8.5 mm, dy=8.5 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=3.4 mm, dy=3.4 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 47.6 W/kg

SAR(1 g) = 7.67 W/kg

Deviation (1 g) = 3.65%

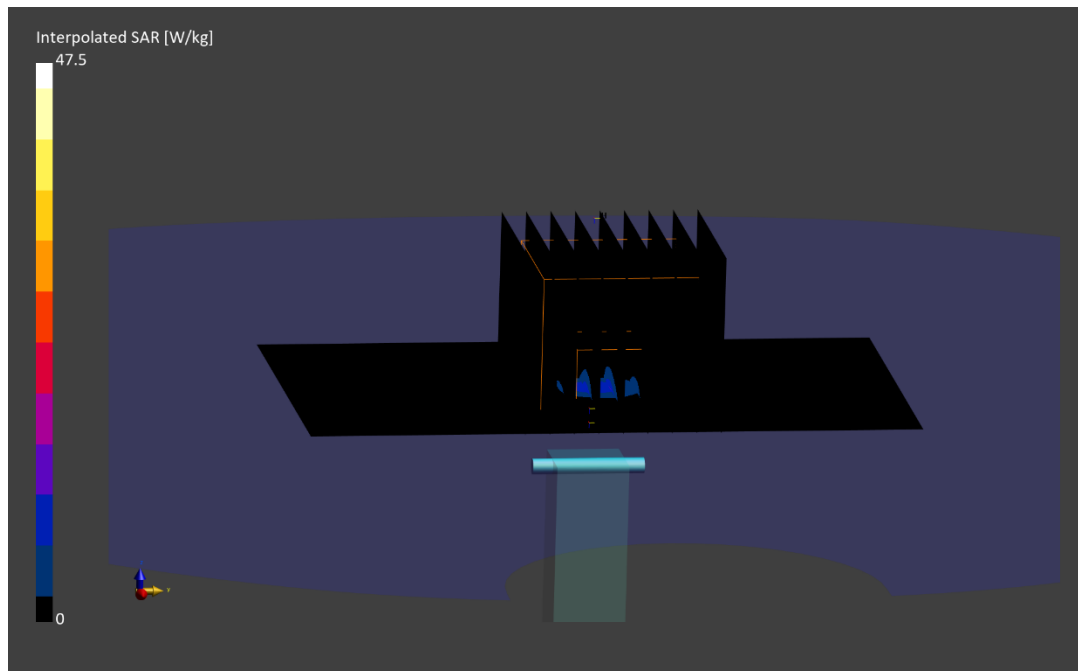



ELEMENT

Date: 11/30/2023

10 GHz System Verification

Device Under Test Properties

DUT	Serial Number
10 GHz Verification Source	1006

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Band	Frequency [MHz]
5G	FRONT	10.00	Validation band	10000.0

Hardware Setup

Probe, Calibration Date	DAE, Calibration Date
EUmmWV4 – SN9523, 01/16/2023	DAE4 – SN793, 10/18/2023

Software Setup


Software	Software Version
cDASY6 Module mmWave	3.2.0.1840

Scans Setup


Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0

Measurement Results

Scan Type	5G Scan
Avg. Area [cm²]	4.00
pS _{tot} avg [W/m²]	54.7
pS _n avg [W/m²]	54.5
E _{peak} [V/m]	151
Deviation [dB] pS _{tot}	-0.32
Deviation [dB] pS _n	-0.31

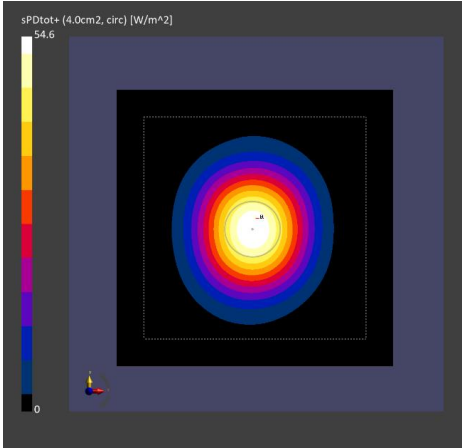

10 GHz System Verification

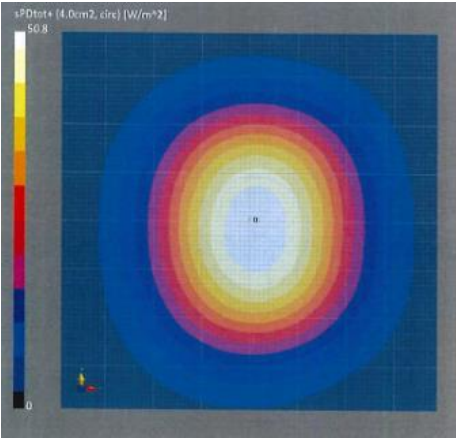

Calibration Certificate