



## EUT Photo-Internal view




**Main board – Front view**

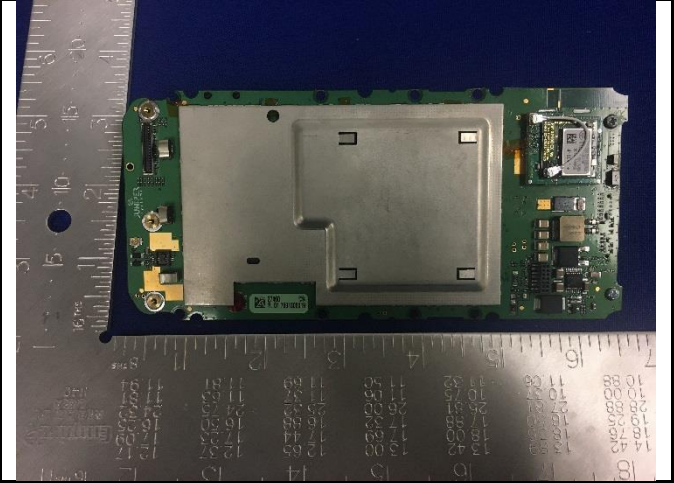


**Main board – Rear view**

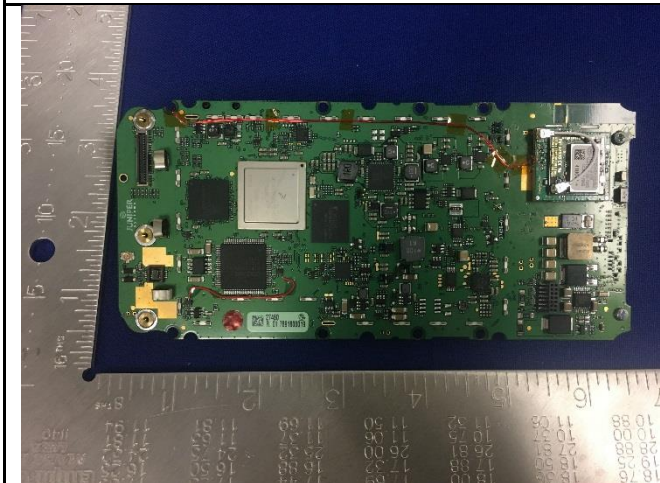


**Main board – Cover off view**

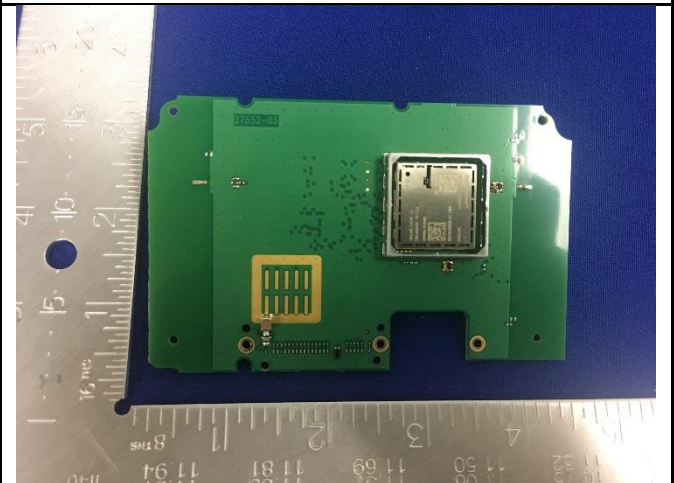

**PCB – Front View**

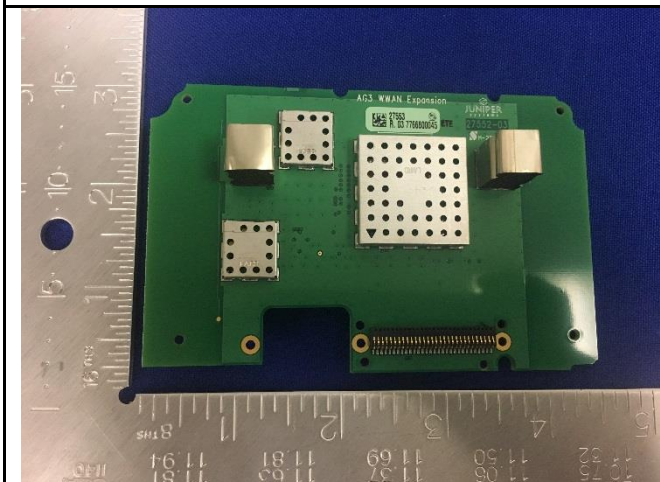


**PCB – Rear View**

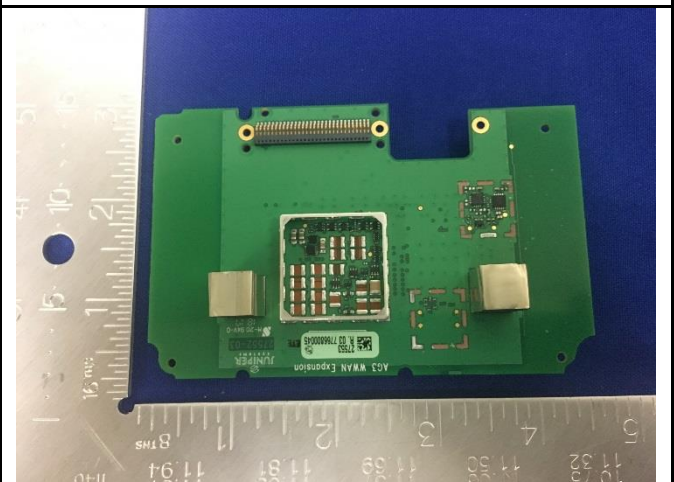


**PCB – Cover off View**




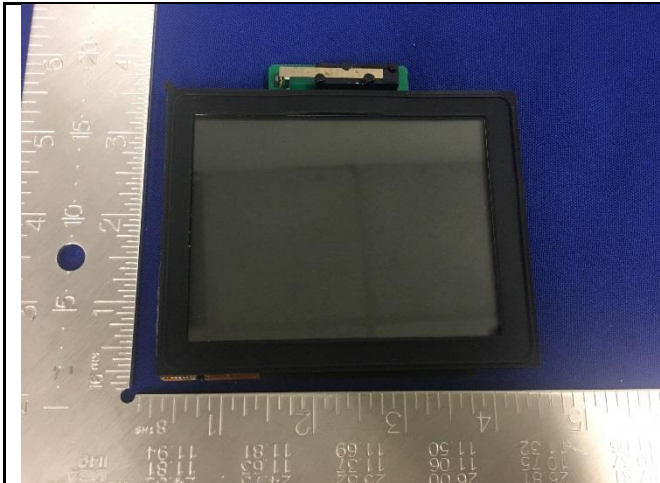


Screen – Front view

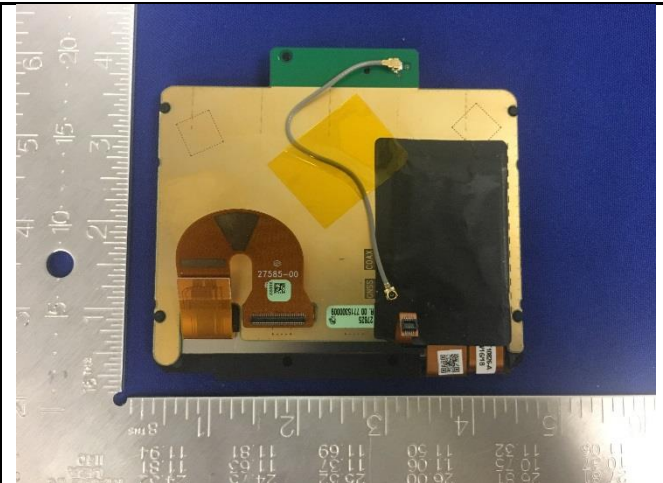

Screen –Rear view

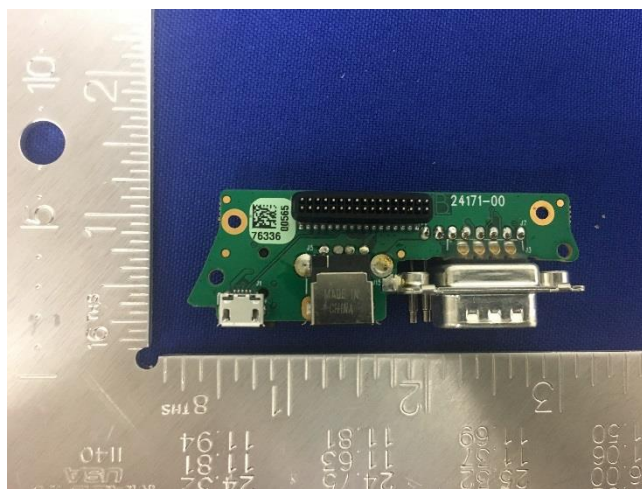


Port board – Front view

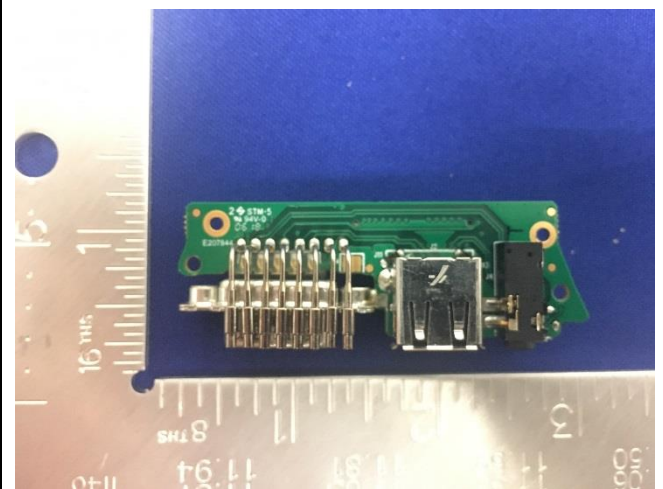


Port board – Rear view



Keyboard – Front view

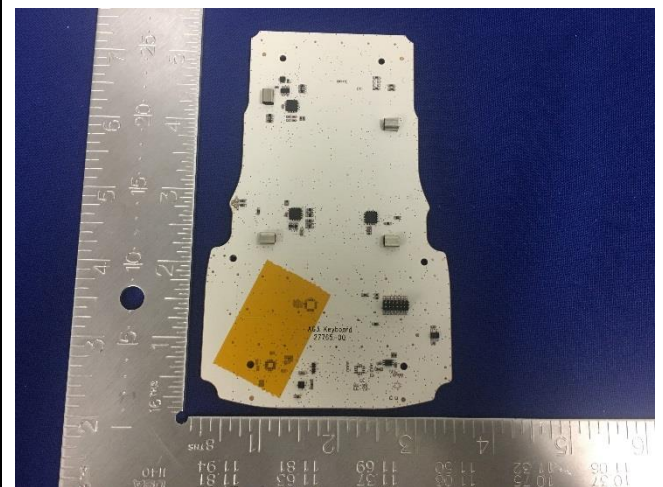

Keyboard – Rear view

 <p>Excell Battery Company JSPN- 27221 Rechargeable Li-Ion Battery Voltage 3.6V Capacity 12.0Ah Watt Hours 43.2 Wh 1.4Ah/1000mAh - EDC/PCV 200x75mm Assembled in Canada WARNING: FIRE, EXPLOSION, AND REVERSE BATTERY HAZARD. DO NOT REPAIR, CRUSH, OVERCHARGE, DISASSEMBLE, CRUSH, OR PENETRATE. BATTERY MAY LEAK OR EXPLODE IF HEATED ABOVE RATED TEMPERATURE. Must be disposed of as per local environmental or waste authorities. Li-Ion ONLY CHARGE BETWEEN 0°C TO 50°C (32°F TO 122°F)</p>	
Battery View	



Cell Diversity

GNSS

Cell Main

WiFi/ BT

