



BEC INCORPORATED

CERTIFICATION APPLICATION TEST REPORT

**TEST STANDARDS:
FCC Part 15 Subpart C Section 15.231
RSS-Gen/RSS-210 Annex A
Intentional Radiator**

**Lutron Model PD-6WCL
Caseta RF Wireless In-Wall Dimmer**

REPORT# BEC-2204-01

TEST DATES: 05/09/2022 – 05/23/2022

**CUSTOMER:
Lutron Electronics Company Incorporated
7200 Suter Road
Coopersburg, PA 18036**

PREPARED BY: 
Paul Banker, Test Engineer

REVIEWED and APPROVED BY: 
Steve Fanella, Quality Manager

The results described in this report relate only to the item(s) tested. This document shall not be reproduced except in full without prior written permission of BEC Incorporated





TABLE OF CONTENTS

Notice to Customer	4
Revision History	4
1.0 Administrative Information	5
1.1 General Project Details.....	5
1.2 Preface.....	6
1.3 Laboratory and Customer Information.....	6
1.4 Measurement Uncertainty	7
1.5 Test Result Summary Table	8
1.6 Condition of Received Sample.....	9
1.7 Climatic Environment	9
1.8 Test Equipment	9
2.0 Equipment Under Test	10
2.1 EUT Description	10
2.2 Product Category Standards.....	10
2.3 Product Classification	10
2.4 Test Configurations.....	11
2.5 Test Configuration Rationale	11
2.6 Test Setup Configuration Block Diagram.....	11
2.7 EUT Information, Interconnection Cabling and Support Equipment	12
2.8 Test Signals and Test Modulation.....	12
2.9 Grounding.....	12
2.10 EUT Power	12
2.11 EUT Modifications.....	12
3.0 Applicable Requirements, Methods, and Procedures	13
3.1 Applicable Requirements	13
3.1.1 FCC and ISED Requirements.....	13
3.1.2 Basic Test Methods and Test Procedures.....	13
3.2 Deviations or Exclusions from the Requirements.....	13
4.0 Test Results.....	14
4.1 Antenna Requirement (47 CFR 15.203) (RSS-Gen, 6.2).....	14
4.2 Antenna Construction (47 CFR 15.203) (RSS-Gen, 6.2).....	14
4.3 Radiated Emissions (47 CFR 15.209 and 15.231 (b) and 15.35(b)) (RSS-210 A.1.2) ..	14
4.3.1 Radiated Emissions Test Facility	15
4.3.2 Restricted and Non-restricted Bands Radiated Emissions Test Procedure	16
4.3.3 Radiated Emissions General Test Information.....	17
4.3.4 Radiated Emissions 9 kHz – 30 MHz Test Results (05/17/2022 & 05/20/2022).....	17
4.3.5 Radiated Emissions 30 – 6000 MHz Test Results.....	18
4.3.5.1 Field Strength of Fundamental Emissions (05/12/2022)	18
4.3.5.2 Field Strength of Spurious Emissions (05/25/2022).....	19
4.3.5.3 Spurious Radiated Emissions 1 – 5 GHz Test Results (05/17/2022)	20
4.4 Duty Cycle Measurement (ANSI C63.10).....	22
4.4.1 Duty Cycle Measurement – Test Procedure	22
4.4.2 Duty Cycle Measurement General Test Information	22
4.4.3 Duty Cycle Measurement Test Results (05/10/2022).....	23
4.4.4 Duty Cycle Correction Factor Calculation	23



4.5	20 dB Bandwidth (47 CFR 15.231(c) RSS-210 A.1.3).....	24
4.5.1	20 dB Bandwidth Measurement – Test Procedure	24
4.5.2	20 dB Bandwidth Measurement General Test Information.....	24
4.5.3	20 dB Bandwidth Measurement Test Results (05/23/2022).....	24
4.6	99% Occupied Bandwidth (RSS-Gen 6.7).....	26
4.6.1	99% Occupied Bandwidth Measurement – Test Procedure	26
4.6.2	99% Occupied Bandwidth Measurement General Test Information.....	26
4.6.3	99% Occupied Bandwidth Measurement Test Results (05/23/2022).....	26
4.7	Automatic Deactivation Testing (FCC Section 15.231(a)(1) RSS-210 A.1.1 (a))	28
4.7.1	Automatic Deactivation Testing Test Procedure.....	28
4.7.2	Automatic Deactivation Testing General Test Information	28
4.7.3	Deactivation Testing Test Results (05/10/2022)	29
4.8	Conducted Emissions	31
4.8.1	Conducted Emissions AC Power Port Test Procedure.....	31
4.8.2	Conducted Emissions AC Power Port Test Results (05/20/2022)	32
5.0	EUT and Test Setup Pictures.....	41
5.1	EUT Pictures Are Included in The Grant Submission	41
5.2	Test Setup Pictures Are Included in The Grant Submission.....	41
	Appendix A – Test Equipment.....	41
	Appendix B – Open Area Test Site Layout Diagram	43
	Appendix C – Emissions Shielded Room Layout Diagram.....	44



Notice to Customer

This report and any recommendations it contain represent the result of BEC's testing and assessment on behalf of your company. Testing has been conducted according to accepted engineering standards and practices. This report reflects testing and assessment of product samples provided by your company and may not reflect the characteristics of other samples, especially those produced at different times. Therefore, this report and its findings and recommendations, if implemented, should not be construed as an assurance or implied warranty for the continuing electromagnetic compatibility (EMC) of the product. **BEC shall not be liable for incidental or consequential damages, even if advised of the possibility thereof.**

BEC will not disseminate this report to other parties without your express permission. You may reproduce this report in its entirety including this notice and the entireties of any supplemental test reports on the same product (e.g. reports on additional testing following modification). However 'you may not reproduce portions of the report (except for the entirety of the summary section) or quote from it for any purpose without specific prior written permission from BEC'.

Revision History


Revision #	Description of Changes	Date of Changes	Date Released
0	Test Report Initial Release	N/A	05/31/2022
1	Change of the ISED HVIN from WCL-A to CCL-A	06/02/2022	06/02/2022
2	Corrected Table in Section 4.3.5.1 Fundamental to reflect the correct QP Measurements and Corrected Tables in Section 4.3.5.3 Spurious 1- 5 GHz to reflect the Corrected Average measurements using the Duty Cycle Correction Factor	06/06/2022	06/06/2022



1.0 Administrative Information

1.1 General Project Details

Project Number	BEC-2204
Manufacturer	Lutron Electronics
Model Numbers Tested	PD-6WCL
EUT Sample Type	FCC Test Code Test Sample
EUT Serial Number	0368B8C6
EUT Sample Number	2204-01
EUT Firmware Version	Version 1.01
Frequency of Operation	431 MHz to 437 MHz
Antenna Gain	-13.35 dBi (-15.5 dBd)
Antenna Type	Loop
Modulation	FSK
FCC Classification	DSR, Part 15 Remote Control/Security Device Transceiver
Date Samples Received	05/09/2022
Sample Type and Condition Received	Production Unit Ready for Test
EUT Description	Caseta RF Wireless In-Wall Dimmer
FCC ID	JPZ0142
ISED ID	2851A-JPZ0142
ISED HVIN	CCL-A
Applicable FCC and ISED Rules	FCC Rules Part 15.231: Periodic operation in the band 40.66-40.70 MHz and above 70 MHz. RSS-210 Annex A: Momentarily operated and remote-control devices.



1.2 Preface

This report documents product testing conducted to verify compliance of the specified EUT with applicable standards and requirements as identified herein. EUT, test instrument configurations, test procedures, and recorded data are generally described in this report. The reader is referred to the applicable test standards for detailed procedures. The following table summarizes the test results obtained during this evaluation.

1.3 Laboratory and Customer Information

Test Laboratory Location	BEC Incorporated 970 East High Street Pottstown, PA 19464
Test Personnel	Paul Banker / Steve Fanella / JR Fanella
BEC Laboratory Number FCC Registration	US1118
BEC Laboratory Number ISED Registration	7342A-1
Test Performed For	Lutron Electronics Co Incorporated 7200 Suter Road Coopersburg, PA 18036
Customer Technical Contact	Geri Gonzalez
Customer Reference Number	PO # 5268500




1.4 Measurement Uncertainty

Test Measurement	ETSI EN 300 220-1 Limit	BEC Value
Radio Frequency	±0.5 ppm	±0.027 ppm
RF Power, Conducted	±1.5 dB	±1.45 dB
Radiated Emission of Transmitter, Valid up to 6 GHz	±6 dB	±4.87 dB
Radiated Emission of Receiver, Valid up to 6 GHz	±6 dB	±4.87 dB
RF Level Uncertainty for a given BER	±1.5 dB	N/A
Occupied Bandwidth	±5 %	±2 %
Temperature	±2.5 °C	±0.5 °C
Humidity	±10 %	±2.5%

These uncertainties, provided for informational purposes, have a coverage factor of $k = 1.96$ or $k = 2$, (which provide confidence levels of respectively 95 % and 95.45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Principles for the calculation of measurement uncertainty are contained in ETSI TR 100 028 [i.3], in particular in annex D of ETSI TR 100 028-2 [i.3].

Measurement	Measurement Distance	Frequency Range	Measurement Limit	Expanded Uncertainty
Radiated Disturbance Open Area Test Site	3 Meter	30 MHz – 1 GHz	Class A or B	4.27
Radiated Disturbance Fully Anechoic Chamber	3 Meter	1 GHz – 18 GHz	Class A or B	4.90
Conducted Disturbance AC Mains	N/A	150 kHz – 30 MHz	Class A or B	2.69

No adjustments to measured data presented in this report are required because all values of uncertainty are less than the CISPR 16-4-2:2018 recommendations. These uncertainties have a coverage factor of $k = 2$, which yields approximately a 95% level of confidence for the near-normal distribution typical of most measurement results.




1.5 Test Result Summary Table

The Lutron Model PD-6WCL Caseta Wireless RF Wireless In-Wall Dimmer was tested and found to be compliant to the sections of the FCC Part 15 Subpart C and RSS-210/RSS-Gen standard listed below:

BEC Report Section	FCC: 47 CFR Part	RSS-210	RSS-Gen	IEEE / ANSI C63.10	Test Description	Result
4.1	15.203	-	6.8	-	Antenna Requirement	Compliant
4.2	15.203	-	6.8	-	Antenna Construction	Compliant
4.3	FCC 15.205, 15.209, 15.231(b)	A.1.2	6.13, 7.3 and 8.10	-	Radiated Emissions	PASS
4.4	IEEE/ANSI C63.10	-	-	11.6	Duty Cycle Measurement	Measured
4.5	FCC 15.231(c)	A.1.3	-	-	20 dB Bandwidth	PASS
4.6	-	-	6.7	-	99% Occupied Bandwidth	PASS
4.7	FCC 15.231(a)(1)	A.1.1 (a)	-	-	Deactivation Testing	PASS
4.8	15.207(a)	-	7.2	-	AC Mains Conducted Emissions	PASS

Interpretation of Test Results: The EUT was tested using typical radio modulation. The resultant data is presented by showing the worst-case levels for each modulation type and/or frequency. All recorded results are maintained at BEC Incorporated and are available upon request.



1.6 Condition of Received Sample

An evaluation of the EUT was conducted in order to verify test subject identity and condition and to ensure suitability for testing. No evidence of physical damage was noted. The test item condition was deemed acceptable for the performance of the requested test services.

1.7 Climatic Environment

The following were the general environmental conditions inside the laboratory during testing:


Temperature: $22^{\circ}\text{C} \pm 5^{\circ}\text{C}$

Humidity: $50\% \pm 20\%$

Barometric Pressure: $1010 - 1050\text{ mb} \pm 20\%$

1.8 Test Equipment

All test equipment is checked to manufacturer's specifications and, when applicable, have current N.I.S.T. traceable, ISO 9002 conforming certificates of calibration. Test equipment used for the tests described herein is listed in Appendix A.



2.0 Equipment Under Test

Unless otherwise noted in the individual test results sections, testing was performed on the EUT as follows.

2.1 EUT Description

The Lutron Model PD-6WCL Caseta RF Wireless In-Wall Dimmers are wall-mounted, AC lighting control. The devices can control LED and CFL lights up to 150 Watts; also, halogen and incandescent lights ranging to 600 Watts. The switch can be controlled from a smart-phone when used with the Lutron Smart Bridge.

The Lutron Model PD-6WCL use a Lutron Designed Transceiver Radio which operates momentarily in the 431 MHz to 437 MHz frequency range.

2.2 Product Category Standards

47 CFR, Part 15 Subpart C – Section 15.231

RSS-210 Annex A-Momentarily operated and remote-control devices.

2.3 Product Classification

Intentional Radiator Testing Requirements, Periodic operation in the band 40.66 MHz - 40.70 MHz and above 70 MHz. The EUT is a momentarily operated transmitter and receiver, and/or remote-control device.



2.4 Test Configurations

The Lutron Model PD-6WCL sample was programmed to provide control of the radio to enable transmission at Low Channel Frequency of 431.5 MHz or at High Channel Frequency of 436.6 MHz in multiple modes. Available transmission modes in the Standard FCC Mode were Constant Wave, Constant Packet and Streaming Data when transmitting. Receive Mode was also available in the Standard FCC Mode. Transmit Packet Mode provided a Single Packet Transmission.

Constant Packet Mode was used during Occupied Bandwidth measurements and Conducted AC Mains Tx testing.

Streaming Data Mode was used during the measurement of the transmitter fundamental frequency and spurious emissions.


The Transmit Packet Mode was used during duty-cycle and 5 second shut-off tests.

2.5 Test Configuration Rationale

The tested configurations are based on the signal types required to make proper measurements for the testing to FCC Part 15.231 and RSS-210.

2.6 Test Setup Configuration Block Diagram

A block diagram of the EUT configuration showing interconnection cables is illustrated below. The drawing shows the physical hardware layout used for the tests along with I/O cables and AC power distribution.

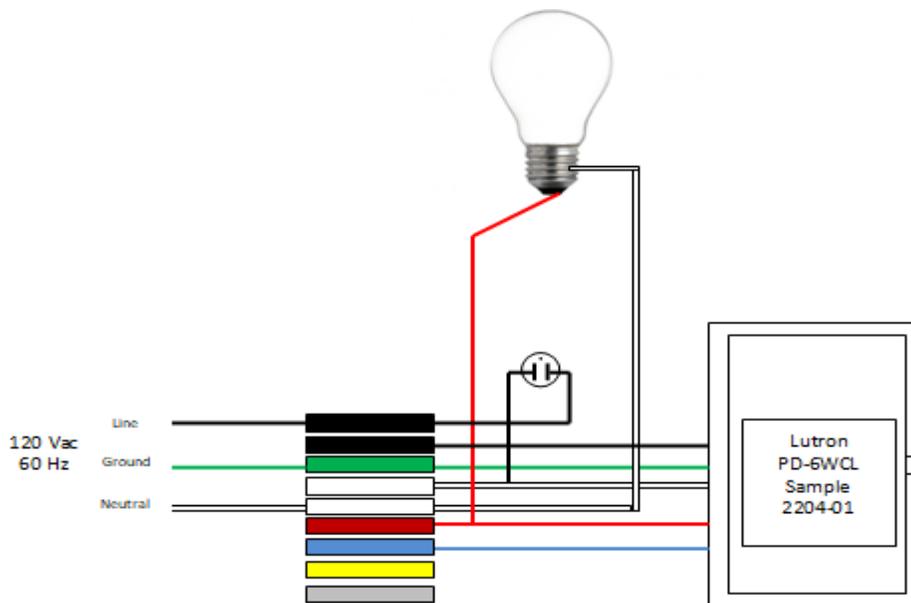



2.7 EUT Information, Interconnection Cabling and Support Equipment

EUT Hardware and Software/Firmware

EUT Description	Manufacturer	Model	Serial Number	Software Firmware Version	Sample Number
EUT Radiated Sample with FCC Test Code	Lutron	PD-6WCL	0368B8C6	1.01	2204-01

Support Equipment

EUT Description	Manufacturer	Model	Serial Number
Porcelain Bulb Socket	Lutron	NOM057	None
660-Watt Keyless Twin-Socket Lamp Holder Adapter	Leviton Co.	R52-00128-00W	None
Light Bulbs	Unknown	130V 300W	None

Interconnection Cable List

Wiring Description	Manufacturer	Model	Wire Size	Quantity	Length
AC Input Lines	Apollo	205585	14 AWG	3	8'
EUT to Load	AWM	-	18 AWG	9	1'

2.8 Test Signals and Test Modulation

Testing was performed at either 431.5 MHz Low Transmit or 436.6 MHz High Transmit or both Low and High Transmit Frequencies. Specific signal type configurations tested are detailed in the sections within this report. Continuous Wave, Constant Packet Mode, Streaming Data and Transmit Packet Mode were used during specific testing as detailed in Section 2.4 of this Report (Test Configuration). Transmission Modulation for this product utilizes FSK.

2.9 Grounding

Ground provided by AC Line cord.

2.10 EUT Power

The Lutron Model PD-6WCL was powered by 120 Vac / 60 Hz.

2.11 EUT Modifications

No physical modifications were made to the EUTs tested to achieve compliance.



3.0 Applicable Requirements, Methods, and Procedures

3.1 Applicable Requirements

The results of the measurement of the radio disturbance characteristics of the EUT described herein may be applied and where appropriate, provide a presumption of compliance to one or more of the following requirements or to other requirements at the discretion of the customer, regulatory agencies, or other entities.

3.1.1 FCC and ISED Requirements

Code of Federal Regulations: Title 47 – Telecommunication

Chapter I - Federal Communications Commission

Sub-chapter A – General

Part 15 – Radio Frequency Devices

Subpart C - Intentional Radiators

15.231 Periodic operation in the band 40.66-40.70 MHz and above 70 MHz

RSS-210 Issue 10 December 2019 License-Exempt Radio Apparatus: Annex A-Momentarily operated and remote control devices.

RSS-Gen Issue 5 April 2018, General Requirements for Compliance of Radio Apparatus

TRC-43 Issue 3 November 2012, Designation of Emissions, Class of Station and Nature of Service

3.1.2 Basic Test Methods and Test Procedures

IEEE/ANSI C63.4: 2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

IEEE/ANSI C63.10: 2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

3.2 Deviations or Exclusions from the Requirements

No deviations or exclusions were made.



4.0 Test Results

4.1 Antenna Requirement (47 CFR 15.203) (RSS-Gen, 6.2)

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The antenna used by the Lutron Model PD-6WCL is a loop antenna etched into separate PCB- magnetically coupled with an additional PCB. The Lutron Designed Transceiver Radio operates momentarily in the 431 MHz to 437 MHz frequency range. There are no detachable parts of the antenna. The antenna is not replaceable, nor changeable, and therefore complies with the antenna requirements of FCC Part 15 C Section 15.203.

4.2 Antenna Construction (47 CFR 15.203) (RSS-Gen, 6.2)

The device is equipped with permanent attached antenna, which is not displaced by any other antenna. The Antenna gain of the EUT is -13.35 dBi. Therefore, the equipment complies with the antenna requirements of FCC Part 15 C Section 15.203.

4.3 Radiated Emissions (47 CFR 15.209 and 15.231 (b) and 15.35(b)) (RSS-210 A.1.2)

According to FCC Part 15 C Section 15.231(b) and RSS-210 Annex A.1.2 the field strength of emissions from the intentional radiators operated under this section shall not exceed the following limits:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	¹ 1,250 to 3,750	¹ 125 to 375
174-260	3,750	375
260-470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250

¹Linear interpolations.

(1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

(2) Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in §15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

(3) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.



4.3.1 Radiated Emissions Test Facility

OATS

The Open Area Test Site (OATS) is an all-weather facility with a wooden enclosure that contains a ground level 4-foot diameter turntable capable of rotating equipment 360 degrees. The site is free of reflective metallic objects and extraneous electromagnetic signals. This non-metallic enclosure and the 3-meter and 10-meter test range existing outside the enclosure rest upon a protective insulating material, which in turn covers a flat, metal, continuous ground plane.

Instrumentation for remote control of the antenna mast, turntable, and other equipment are controlled by personnel indoors. The EUT and support peripherals required for EUT operation were placed on a table at a height of 80 cm for measurement of signals below 1 GHz and a table of 150 cm for measurement of signals above 1 GHz.

The test site complies with the attenuation measurements specified in ANSI C63.4.

SR#1

The Semi-Anechoic Shielded Room (SR#1) is a ferrite and absorber lined chamber which houses a 5-foot diameter turntable capable of rotating equipment 360 degrees and antenna mast for Horizontal and Vertical polarity measurements. The enclosure is free of reflective metallic objects and extraneous electromagnetic signals. This 3-meter shielded enclosure has a raised computer floor with metal tile bottoms providing a continuous ground plane.

Instrumentation for remote control of the antenna mast, turntable, and other equipment are controlled by personnel outside the chamber. The EUT and support peripherals required for EUT operation were placed on tables 80 cm high (9 kHz – 1 GHz) and 150 cm high (1 – 18 GHz) for tabletop equipment or directly on the turntable surface for floor standing equipment.

The test site complies with the attenuation measurements specified in ANSI C63.4.

See Appendix B and Appendix C for Test Site Diagrams.



4.3.2 Restricted and Non-restricted Bands Radiated Emissions Test Procedure

Radiated Emissions 9 kHz – 40 GHz

The EMI receiver was set to quasi-peak mode for frequencies from 9 kHz to 1000 MHz and the appropriate CISPR bandwidths were employed. The receiver was set to average mode for frequencies above 1 GHz with the appropriate CISPR bandwidths were employed.

Three orthogonal positions of the EUTs were evaluated for maximum emissions. The position of the EUTs placed in an upright position vertical (X Axis) with buttons facing the measurement antenna on the horizontal surface of the 80-cm table was determined to be the axis that produced the highest emissions for the Lutron Model PD-6WCL.

Significant emissions found during the preliminary scans were maximized by rotating the turntable and varying the antenna height. Both horizontal and vertical antenna polarities were also investigated for suspect emissions. The signals are maximized and measured using the in house generated RADE or off the shelf TILE software. The support equipment and test item(s) were powered off in turn to determine the source of the emissions where appropriate.

Field strengths were calculated as follows:

Field Strength (dB μ V/m) = Meter Reading (dB μ V) + Antenna Factor (dB/m) + Cable Loss (dB) – Amplifier Gain (dB) - Duty Cycle Correction Factor

The Duty Cycle measurement and calculation of the Duty Cycle Correction Factor are contained in Section 4.4 of this report.

Measurements were made with the Lutron Model PD-6WCL transmitting at low frequency of 431.5 MHz and high frequency of 436.6 MHz. The transmit frequencies were configured in Streaming Data Mode.

The following tables are the highest emissions recorded and summarized. The emissions are separated into signals in the restricted bands, described in FCC Part 15.205 and RSS-Gen, and signals not within restricted bands subject to the limits specified in 15.231 and RSS-210 A.1.2.



4.3.3 Radiated Emissions General Test Information

The following information is related to the testing performed for Radiated Emissions in the frequency range of 30 MHz to 1000 MHz.

Frequency Range	9 kHz to 5 GHz		
Test Standards	FCC Part 15.209, FCC Part 15.231 (b) and RSS-210		
Class Limits	FCC Part 15.209, FCC Part 15.231 (b) and RSS-210 A.1.2		
EUT Type	Caseta RF Wireless In-Wall Dimmer		
Manufacturer/Model	Lutron Model PD-6WCL		
Sample Number	2204-01		
Port Tested	Enclosure		
Test Date(s)	05/12/2022	05/17/2022	05/20/2022
Temperature	21°C	24°C	21°C
Humidity	48% RH	47% RH	48% RH
EUT Power	120 Vac / 60 Hz		


4.3.4 Radiated Emissions 9 kHz – 30 MHz Test Results (05/17/2022 & 05/20/2022)

Measurements were made in the frequency range of 9 kHz to 30 MHz, at three orthogonal axes, with the Lutron Model PD-6WCL transmitting at low frequency of 431.5 MHz and high frequency of 436.6 MHz. The transmit frequencies were configured in Streaming Data Mode.

The measured signals from the EUT are noise floor measurements. The table below depicts the highest measured levels, with the X axis of the loop antenna. The modulated carrier was transmitting at 436.6 MHz. All other polarizations and transmit frequencies and receive modes showed noise floor measurements.

Frequency	Peak Level	QP Level	Azimuth	Ant Height	Corr. Factor	Limit	QP Margin	Result
MHz	dBuV/m	dBuV/m	degrees	cm	dB	dBuV/m	db	
4.9057	40.56	41.62	000	100	-19.45	73.79	-32.18	Pass
5.1051	40.55	41.27	000	100	-19.42	73.62	-32.35	Pass
5.7961	39.37	39.96	000	100	-19.42	73.00	-33.05	Pass
6.1810	39.67	39.24	000	100	-19.44	72.66	-33.41	Pass
16.1096	30.40	29.88	000	100	-19.13	63.81	-33.92	Pass
16.4578	28.90	29.48	000	100	-19.13	63.50	-34.02	Pass

Test Results: The Lutron, Model PD-6WCL Caseta Wireless RF Switch, complies with the requirements of 47 CFR Part 15.205, RSS-Gen Sections 6.13 and 7.3 and 47 CFR Part 15.231 RSS-210 A.1.2 for radiated emissions in the frequency range of 9 kHz to 30 MHz. The margin of compliance is 32.18 dB.



4.3.5 Radiated Emissions 30 – 6000 MHz Test Results

Measurements were made in the frequency range of 30 MHz to 6000 MHz with the Lutron Model PD-6WCL transmitting at low frequency of 431.5 MHz and high frequency of 436.6 MHz. The transmit frequencies were configured in Streaming Data Mode.

4.3.5.1 Field Strength of Fundamental Emissions (05/12/2022)

The table below shows the measured field strength of the fundamental frequencies. Comparison measurements were made with no modulation and Streaming Data Mode with FSK modulation. The application of the Duty Cycle Correction Factor was required to demonstrate compliance. The signals are compared to the limits of 47 CFR Part 15.231(b) and RSS-210 A.1.2 for Fundamental Emissions.

Axis	Transmit Mode	Fundamental Frequency	Peak	QP	Polarity	TT angle	Antenna Height	Antenna Amplifier Cable C/F	Duty Cycle Correction Factor	Corrected Average	FCC Part 15.231 Limit	Margin	Result
		MHz	dBuV/m	dBuV/m	H/V	degrees	cm	dB	dB	dBuV/m	dBuV/m	(dB)	
X	Streaming Data Mode	431.5	86.47	86.24	H	057	100	-2.96	-19.95	66.52	80.75	-14.23	Pass
X	Streaming Data Mode	431.5	98.65	98.49	V	005	112	-2.96	-19.95	78.70	80.75	-2.05	Pass
X	CW Mode	431.5	86.32	86.11	H	200	182	-2.96	-19.95	66.37	80.75	-14.38	Pass
X	CW Mode	431.5	98.45	98.22	V	344	112	-2.96	-19.95	78.50	80.75	-2.25	Pass
X	Streaming Data Mode	436.6	91.58	91.41	H	272	260	-2.78	-19.95	71.63	80.91	-9.28	Pass
X	Streaming Data Mode	436.6	94.77	94.62	V	000	102	-2.78	-19.95	74.82	80.91	-6.09	Pass
X	CW Mode	436.6	91.02	90.91	H	184	179	-2.78	-19.95	71.07	80.91	-9.84	Pass
X	CW Mode	436.6	93.99	93.72	V	320	110	-2.78	-19.95	74.04	80.91	-6.87	Pass

Test Results: The Lutron Model PD-6WCL Caseta Wireless RF Switch, BEC Sample #2204-01, complies with the requirements of 47 CFR Part 15.231 RSS-210 A.1.2 for fundamental radiated emissions in the frequency range of 30 MHz to 1000 MHz. The measured levels of the fundamental emissions compared to the Limits of 15.231 and RSS-210 A1.2 Table A1 have a margin of 2.05 dB.



4.3.5.2 Field Strength of Spurious Emissions (05/25/2022)

Measurements were made in the frequency range of 30 MHz to 1000 MHz with the Lutron Model PD-6WCL transmitting at low frequency of 431.5 MHz and high frequency of 436.6 MHz. The transmit frequencies were configured in Streaming Data Mode. Also, the EUT was measured in Receive Mode.

The following tables show the second harmonic signals of the low and high channel transmission frequencies. There were no other spurious signals between 30 MHz and 1000 MHz. The signals are compared to the limits of 47 CFR Part 15.231(b) and RSS-210 A.1.2 for spurious Emissions.

TX FREQUENCY OF 431.5 MHZ LIMIT: FCC PART 15.231 and RSS-102 A.1.2

Frequency	Peak Level	QP Level	Polarity	TT angle	Ant Height	Antenna Amplifier Cable C/F	FCC Part 15.231 / RSS-102 A.1.2		Result
							Limit	Margin	
MHz	dBuV/m	dBuV/m	H/V	degrees	cm	dB	dBuV/m	dB	
863.00	31.80	26.85	H	145	100.2	3.369	60.7	-33.851	Pass
863.00	31.60	26.79	V	335.7	100.7	3.369	60.7	-33.911	Pass

TX FREQUENCY OF 436.6 MHZ LIMIT: FCC PART 15.231 and RSS-102 A.1.2

Frequency	Peak Level	QP Level	Polarity	TT angle	Ant Height	Antenna Amplifier Cable C/F	FCC Part 15.231 / RSS-102 A.1.2		Result
							Limit	Margin	
MHz	dBuV/m	dBuV/m	H/V	degrees	cm	dB	dBuV/m	dB	
873.20	37.90	34.68	H	283	100	3.442	60.9	-26.218	Pass
873.20	36.80	33.51	V	26.6	105.3	3.442	60.9	-27.388	Pass

Test Results: The Lutron Model PD-6WCL Caseta Wireless RF Switch, BEC Sample #2204-01, complies with the requirements of 47 CFR Part 15.231 RSS-210 A.1.2 for spurious radiated emissions in the frequency range of 30 MHz to 1000 MHz. The measured levels of the spurious emissions compared to the Quasi-Peak limits of 15.231 and RSS-210 A1.2 Table A1 have a margin of 26.21 dB.



4.3.5.3 Spurious Radiated Emissions 1 – 5 GHz Test Results (05/17/2022)

Measurements were made in the frequency range of 1 GHz to 5 GHz with the Lutron Model PD-6WCL transmitting at low frequency of 431.5 MHz and high frequency of 436.6 MHz. The transmit frequencies were configured in Streaming Data Mode. Also, the EUT was measured in Receive Mode.

The tables below show the measured levels of non-restricted, spurious emissions compared to Table 1 of 47CFR Part 15.231 and RSS A.1.2. The measured levels of restricted, spurious emissions (marked with an asterisk) compared to the average limit of 15.209, as directed by 15.205.

TX FREQUENCY OF 431.5 MHZ FCC PART 15.231 RSS-210 A.1.2 LIMITS

Frequency GHz	Peak Level dBuV/m	Corrected Average dBuV/m	Antenna Polarity H/V	Turntable Angle degrees	Antenna Height cm	Correction Factor dB	Duty Cycle Correction Factor dB	FCC 15.231 or 15.205 Limit		Margin		Result
								Peak dBuV/m	Average dBuV/m	Peak dB	Average dB	
1.29439	41.20	21.25	H	070	123	-11.47	-19.95	80.75	60.75	-39.55	-39.50	PASS
1.29461	43.57	23.62	V	172	129	-11.47	-19.95	80.75	60.75	-37.18	-37.13	PASS
2.15722	47.08	27.13	V	227	101	-6.51	-19.95	80.75	60.75	-33.67	-33.62	PASS
2.15736	52.24	32.29	H	316	156	-6.51	-19.95	80.75	60.75	-28.51	-28.46	PASS
3.88312	46.22	26.27	H	161	105	0.39	-19.95	73.98	53.98	-27.76	-27.71	PASS
3.88314	48.00	28.05	V	139	201	0.39	-19.95	73.98	53.98	-25.98	-25.93	PASS
4.74608	54.73	34.78	H	036	165	1.43	-19.95	73.98	53.98	-19.25	-19.20	PASS
4.74694	51.91	31.96	V	150	211	1.44	-19.95	73.98	53.98	-22.07	-22.02	PASS

*Restricted Band (compared to 15.205/15.35(b) limits)(RSS-GEN 8.1, 8.9, 8.10)


Non-Restricted Band (compared to 15.231 & RSS-210)

TX FREQUENCY OF 436.6 MHZ FCC PART 15.231 RSS-210 A.1.2 LIMITS

Frequency GHz	Peak Level dBuV/m	Corrected Average dBuV/m	Antenna Polarity H/V	Turntable Angle degrees	Antenna Height cm	Correction Factor dB	Duty Cycle Correction Factor dB	FCC 15.231 or 15.205 Limit		Margin		Result
								Peak dBuV/m	Average dBuV/m	Peak dB	Average dB	
1.30980	38.09	18.14	H	056	102	-11.56	-19.95	73.98	53.98	-35.89	-35.84	Pass
1.30990	43.42	23.47	V	133	120	-11.56	-19.95	73.98	53.98	-30.56	-30.51	Pass
2.18300	39.85	19.90	V	327	101	-6.58	-19.95	80.91	60.91	-41.07	-41.02	Pass
2.18313	42.49	22.54	H	044	140	-6.58	-19.95	80.91	60.91	-38.42	-38.37	Pass
3.92917	51.65	31.70	H	199	173	0.57	-19.95	73.98	53.98	-22.33	-22.28	Pass
3.92983	46.48	26.53	V	164	114	0.57	-19.95	73.98	53.98	-27.50	-27.45	Pass
4.80296	55.23	35.28	H	359	150	1.49	-19.95	73.98	53.98	-18.75	-18.70	Pass
4.80300	57.66	37.71	V	154	236	1.49	-19.95	73.98	53.98	-16.32	-16.27	Pass

*Restricted Band (compared to 15.205/15.35(b) limits)(RSS-GEN 8.1, 8.9, 8.10)


Non-Restricted Band (compared to 15.231 & RSS-210)



RECEIVE MODE (RX) PART 15.205 AND RSS-GEN 8.9

Frequency	Peak Level	Corrected Average	Antenna Polarity	Turntable Angle	Antenna Height	Correction Factor	Duty Cycle Correction Factor	FCC 15.205 Limit		Margin		Result
								Peak	Average	Peak	Average	
GHz	dBuV/m	dBuV/m	H/V	degrees	cm	dB	dB	dBuV/m	dBuV/m	dB	dB	
1.29889	30.10	10.15	H	243	152	-11.47	-19.95	73.98	53.98	-43.88	-43.83	PASS
1.30259	30.78	10.83	V	241	108	-11.45	-19.95	73.98	53.98	-43.20	-43.15	PASS
2.17764	32.76	12.81	H	099	153	-6.48	-19.95	73.98	53.98	-41.22	-41.17	PASS
2.19178	31.53	11.58	V	242	101	-6.47	-19.95	73.98	53.98	-42.45	-42.40	PASS
3.92300	36.77	16.82	V	039	152	0.51	-19.95	73.98	53.98	-37.21	-37.16	PASS
3.93165	37.90	17.95	H	113	100	0.54	-19.95	73.98	53.98	-36.08	-36.03	PASS
4.81031	36.96	17.01	V	050	118	1.68	-19.95	73.98	53.98	-37.02	-36.97	PASS
4.81343	38.45	18.50	H	166	181	1.69	-19.95	73.98	53.98	-35.53	-35.48	PASS
*Restricted Band (compared to 15.205/15.35(b) limits)(RSS-GEN 8.1, 8.9, 8.10)												
Non-Restricted Band (compared to 15.231 & RSS-210)												

Test Results: The Lutron Model PD-6WCL BEC Sample #2204-01 complies with the requirements of 47 CFR Part 15.231 RSS-210 A.1.2 for non-restricted radiated emissions and Part 47 CFR Part 15.209 RSS-Gen restricted radiated emissions in the frequency range of 1 GHz to 5 GHz. The measured levels of restricted, spurious emissions (marked with an asterisk) were compared to the average limit of 15.209, as directed by 15.205. The margin, from the spurious emission limit is 0.90 dB at 4.803 GHz.



4.4 Duty Cycle Measurement (ANSI C63.10)

4.4.1 Duty Cycle Measurement – Test Procedure

The duty cycle was measured by using the methods of ANSI C63.10. The spectrum analyzer screen images and tables related to the duty cycle measurements are shown below. The Lutron Model PD-6WCL transmitted at 431.5 MHz using Transmit Packet Mode of the FCC Test Software and activating the EUT transmitter by tapping the OFF button located on the Model PD-6WCL Sample 2204-01.



4.4.2 Duty Cycle Measurement General Test Information

The following information is related to the testing performed for Duty Cycle.

Frequency Tested	431.5 MHz
Test Standards	ANSI C63.10, 11.6
Class Limits	None
EUT Type	Caseta Wireless RF Dimmer
Manufacturer/Model	Lutron Model PD-6WCL
Sample Number	2204-01
Temperature	20°C
Humidity	42% RH
EUT Power	120 Vac / 60 Hz



4.4.3 Duty Cycle Measurement Test Results (05/10/2022)

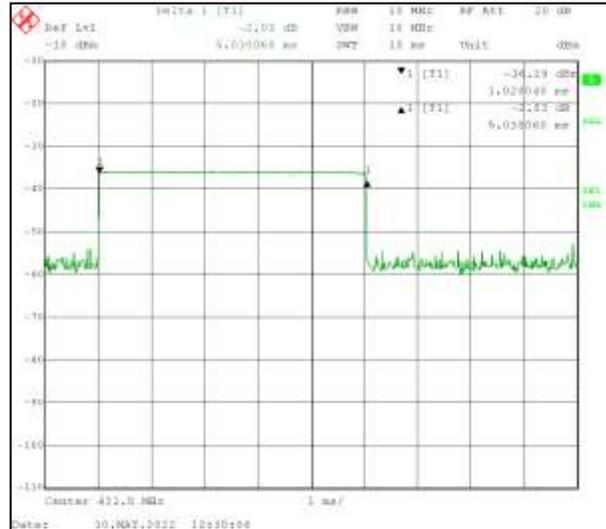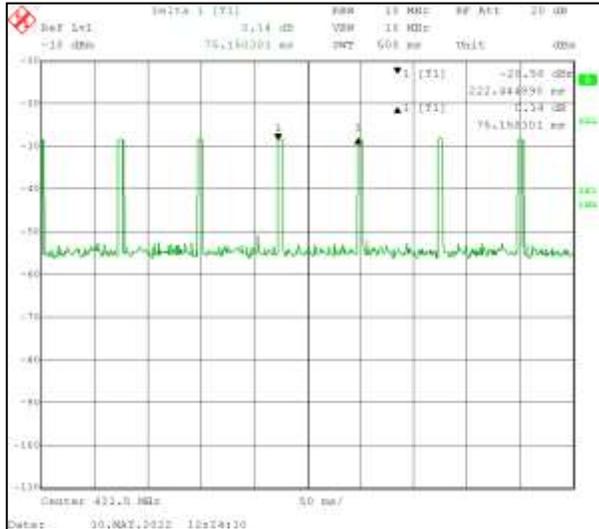


The measured on-times depicted on the spectrum analyzer screens above are used to calculate the Duty Cycle Correction Factor. This factor is used to reduce the emission level of spurious emissions measured and displayed in Section 4.3.

4.4.4 Duty Cycle Correction Factor Calculation

Test Results: The duty cycle measurement of the Lutron Model PD-6WCL Eagle Owl Remote Blind Controller BEC Sample #2204-01 produces a value of 10.06 %. The calculated Duty Cycle Correction Factor is 19.95 dB.

On Time	5.03	ms
Repetition (within 100 ms window)	2	
Total (in 100 ms)	10.06	ms
Period (T)	100	ms
Duty Cycle = On Time / T (100 ms)	0.1006	
	10.06	%
Duty Cycle Correction = 20*Log(On Time/Period)	-19.95	dB



4.5 20 dB Bandwidth (47 CFR 15.231(c) RSS-210 A.1.3)

4.5.1 20 dB Bandwidth Measurement – Test Procedure


The 20 dB Bandwidth was measured by using the methods called out for in FCC Part 15.231(c) and RSS-210 A.1.23. The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. The Transmit frequencies of 431.5 MHz and 436.6 MHz were tested with the radio programmed to transmit in Constant Packet Mode.

4.5.2 20 dB Bandwidth Measurement General Test Information

Fundamental Frequencies	431.5 MHz and 436.6 MHz
Test Standards	47 CFR 15.231(c) and RSS-210 A.1.3
Limit	.25 % of Fundamental Center Frequency
EUT Type	Caseta Wireless RF Wireless In-Wall Dimmer
Manufacturer/Model	Lutron Model PD-6WCL
Sample Number	2204-01
Temperature / Humidity	21°C / 47% RH
EUT Power	120 Vac / 60 Hz


4.5.3 20 dB Bandwidth Measurement Test Results (05/23/2022)

TX FREQUENCY OF 431.5 MHz CONSTANT PACKET MODE

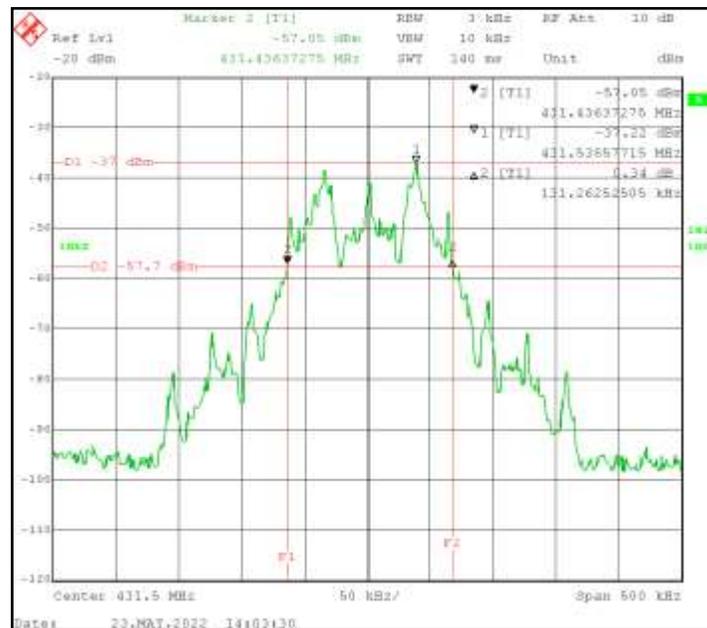



TX FREQUENCY OF 436.6 MHZ CONSTANT PACKET MODE

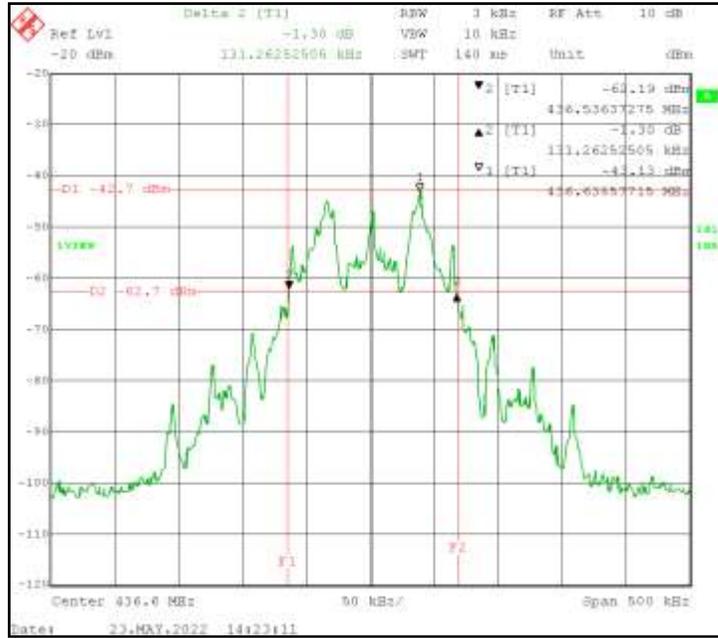

Frequency	Modulation	Measured BW	FCC 15.231 20 dB BW Limit	BW Margin	Result
MHz		kHz	kHz	kHz	
431.5	Constant	131.263	1078.75	-947.4875	Pass
436.6	Packet	131.263	1091.50	-960.2370	Pass

Test Results: The Lutron Model PD-6WCL, BEC Sample #2204-01, complies with the requirements of 47 CFR Part 15.231 RSS-210 A.1.3 for 20 dB Bandwidth Measurement.



4.6 99% Occupied Bandwidth (RSS-Gen 6.7)

4.6.1 99% Occupied Bandwidth Measurement – Test Procedure


The 99% Occupied Bandwidth was measured using the specifications of RSS-Gen Section 6.7. Below are the screen captures and tables related to the 99% Occupied Bandwidth measurements. The Transmit frequencies of 431.5 MHz and 436.6 MHz were tested with the radio programmed to transmit in Constant Packet Mode.

4.6.2 99% Occupied Bandwidth Measurement General Test Information

Channel Frequencies	431.5 MHz and 436.6 MHz
Test Standards	RSS-Gen Section 6.7, ANSI C63.10, 6.9.3
EUT Type	Caseta Wireless RF Switch
Manufacturer/Model	Lutron Model PD-6WCL
Sample Number	2204-01
Temperature / Humidity	23°C / 51% RH
EUT Power	120 Vac / 60 Hz
Test Date	05/23/2022


4.6.3 99% Occupied Bandwidth Measurement Test Results (05/23/2022)

TX FREQUENCY OF 431.5 MHz CONSTANT PACKET MODE

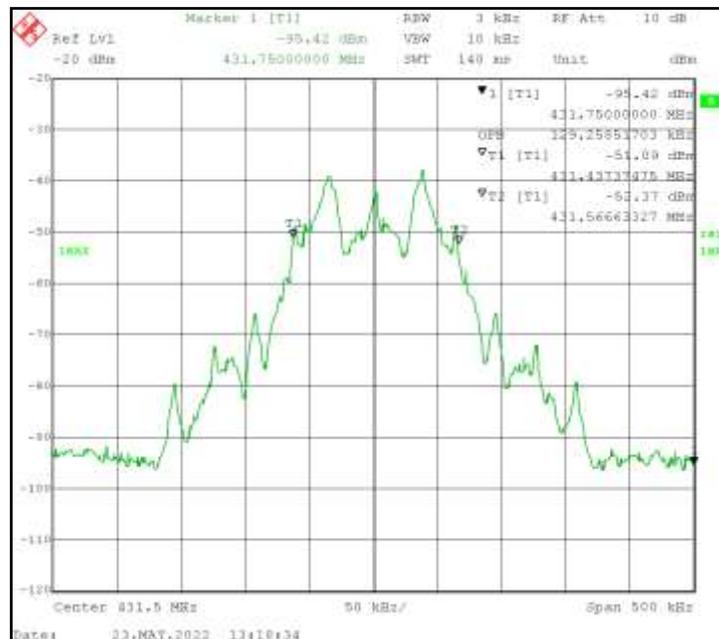



TX FREQUENCY OF 436.6 MHz CONSTANT PACKET MODE

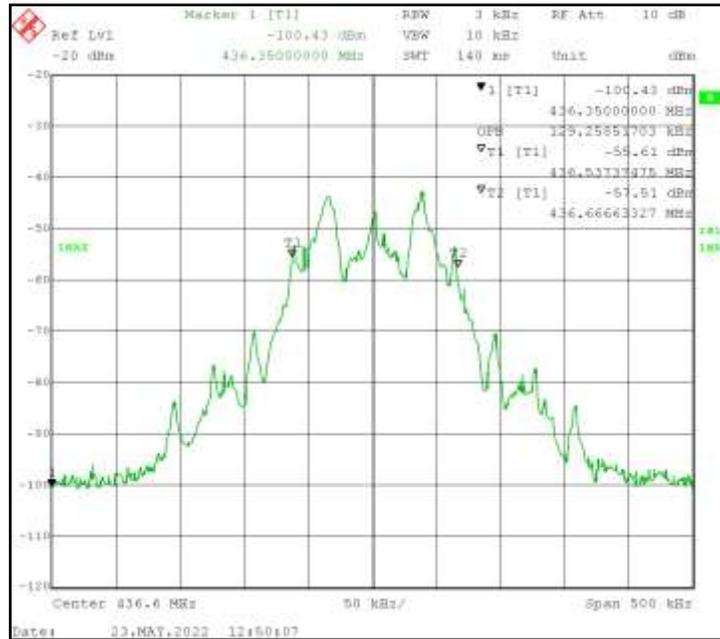

Frequency	Modulation	99% Measured BW
MHz		kHz
431.5	Constant	129.26
436.6	Packet	129.26

Test Results: The Lutron Model PD-6WCL, BEC Sample #2204-01 has a maximum 99% Occupied Bandwidth of 129.26 kHz.



4.7 Automatic Deactivation Testing (FCC Section 15.231(a)(1) RSS-210 A.1.1 (a))

4.7.1 Automatic Deactivation Testing Test Procedure

The Automatic Deactivation Testing was measured by using the methods called out for in FCC Part 15.231(a)(1) and RSS-210 A.1.1 (a).

FCC Part 15.231(a)(1)

A manually operated transmitter shall employ a switch that will automatically de-activated the transmitter within not more than 5 seconds of being released.

RSS-210 A.1.1 (a).

A manually operated transmitter shall be equipped with a push-to-operate switch and be under manual control at all times during transmission. When released, the transmitter shall cease transmission within no more than 5 seconds of being released.

The Lutron Model PD-6WCL transmitted at 431.5 MHz and 436.6 MHz using the Transmit Packet Mode of the FCC Test Software and activating the EUT transmitter by tapping the OFF button located on the Model PD-6WCL Sample 2204-01.

4.7.2 Automatic Deactivation Testing General Test Information


The following information is related to the testing performed for Automatic Deactivation.

Frequency Range	431.5 MHz and 436.6 MHz
Test Standards	47 CFR 15.231(a)(1) and RSS-210 A.1.1 (a)
Limits	Automatic Deactivation 5 Seconds
EUT Type	Caseta Wireless RF Switch
Manufacturer/Model	Lutron Model PD-6WCL
Sample Number	2204-01
Temperature	20°C
Humidity	40% RH
EUT Power	120 Vac / 60 Hz
Test Date	05/10/2022




4.7.3 Deactivation Testing Test Results (05/10/2022)

TX FREQUENCY 431.5 MHZ FCC PART 15.231(a)(1) RSS-210 A.1.1(a) 5 SECOND DEACTIVATION

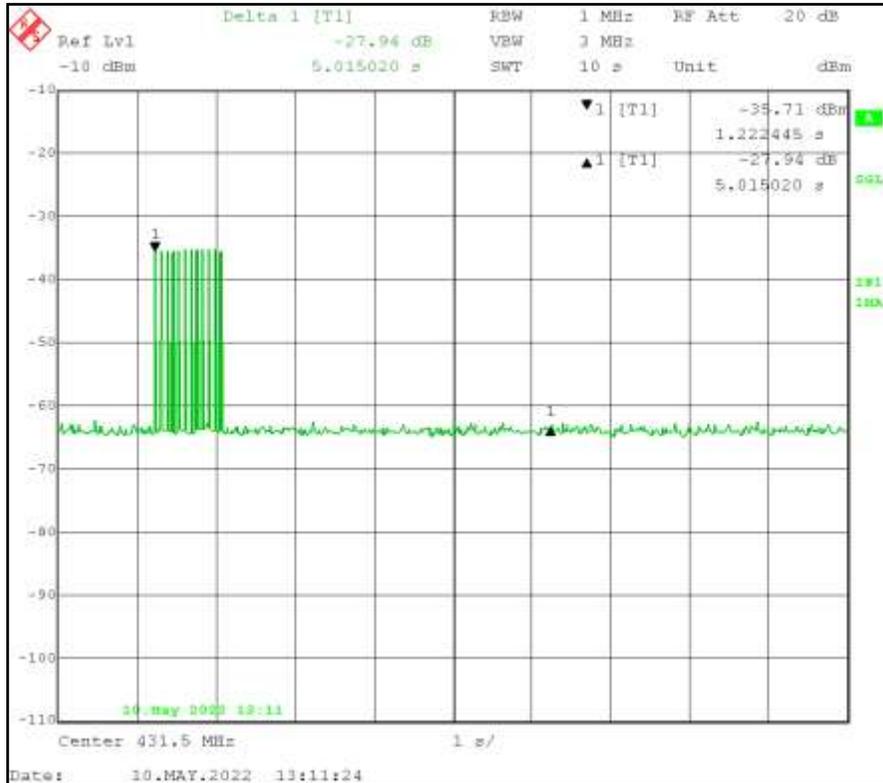



TX FREQUENCY 436.6 MHZ FCC PART 15.231(a)(1) RSS-210 A.1.1(a) 5 SECOND DEACTIVATION

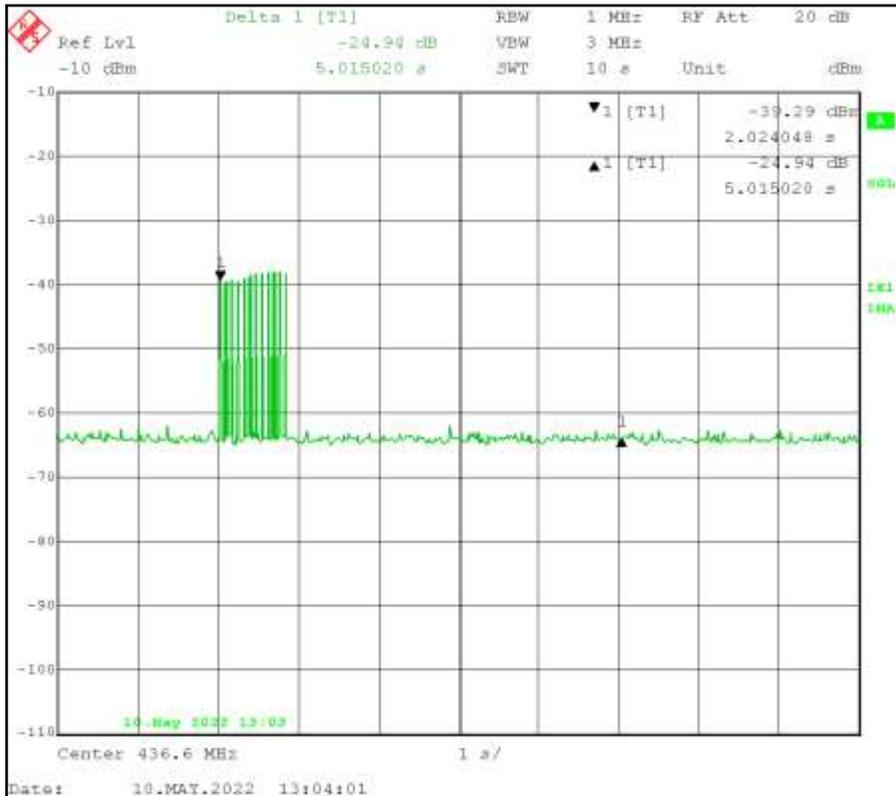

Test Results: The Lutron Model PD-6WCL Caseta RF Wireless Switch, BEC Sample #2204-01 complies with the 5 second deactivation requirements of 47 CFR Part 15.231 (a)(1) for Automatic Deactivation Measurement.



4.8 Conducted Emissions

4.8.1 Conducted Emissions AC Power Port Test Procedure

AC Power Line

Conducted emissions at the power line input of the EUT were measured with an EMI receiver set to the appropriate detector and CISPR bandwidth, which was connected to the RF output of a 50 Ω , 50 μ H Line Impedance Stabilization Network (LISN) installed in each power line. Measurements were made over the frequency range of 150 kHz to 30 MHz while the EUT was operating as described in the EUT section of this report. The significant amplitudes of emissions measured on the AC power lines of the EUT were recorded as follows:

Emission (dB μ V) = Meter Reading (dB μ v) + Cable Loss (dB) + LISN Factor (dB) + Limiter Loss (dB)

The Lutron PD-6WCL was powered by 120 Vac / 60 Hz. The Test Sample 2204-01 actively transmitted on the low channel of 431.5 MHz and high channel of 436.6 MHz using Constant Packet Mode and tested while operated in Receive Mode (Rx).

Fundamental Frequencies	Tx Low and High Channels at 431.5 and 436.6 MHz	Receive Mode (Rx)
Test Standards / Limits	47 CFR 15.207 and RSS-Gen, 8.8	
EUT Type	Caseta Wireless RF Wireless In-Wall Dimmer, Constant Packet Mode	Caseta Wireless RF Wireless In-Wall Dimmer, Receive Mode
Manufacturer Model	Lutron Model PD-6WCL	
Sample Numbers	2204-01	
EUT Power	120 Vac / 60 Hz	
Test Date	05/20/2022	
Temperature / Humidity	23°C / 52% RH	



4.8.2 Conducted Emissions AC Power Port Test Results (05/20/2022)

Tx @ Low Channel, 431.5 MHz, Neutral Line

BEC Incorporated Neutral Line Conducted Emissions 03:46:32 PM, Friday, May 20, 2022							
	1	2	3	4	5	6	7
Frequency	AVG	AVG	AVG	QP	QP	QP	Corr
MHz	dBuV	Limit	Margin	dBuV	Limit	Margin	Factor
201.207 KHz	48.18	54.54	-6.35	63.12	64.54	-1.42	10.170
262.855 KHz	47.13	52.78	-5.65	61.61	62.78	-1.17	10.170
296.250 KHz	44.30	51.82	-7.52	58.80	61.82	-3.02	10.170
333.164 KHz	44.40	50.77	-6.36	58.32	60.77	-2.45	10.170
395.283 KHz	42.80	48.99	-6.19	56.60	58.99	-2.39	10.179
447.469 KHz	39.90	47.50	-7.60	53.97	57.50	-3.53	10.180
468.172 KHz	40.72	46.91	-6.19	54.23	56.91	-2.68	10.176
500.572 KHz	40.89	46.00	-5.11	53.27	56.00	-2.73	10.170
508.716 KHz	38.96	46.00	-7.04	52.11	56.00	-3.89	10.171
535.623 KHz	39.90	46.00	-6.10	52.19	56.00	-3.81	10.174
593.602 KHz	38.55	46.00	-7.45	51.04	56.00	-4.96	10.188
653.320 KHz	38.80	46.00	-7.20	50.25	56.00	-5.75	10.190
710.060 KHz	38.62	46.00	-7.38	49.82	56.00	-6.18	10.191
732.210 KHz	37.06	46.00	-8.94	48.41	56.00	-7.59	10.193
784.790 KHz	37.13	46.00	-8.87	47.62	56.00	-8.38	10.198
806.950 KHz	37.33	46.00	-8.67	48.13	56.00	-7.87	10.200
867.920 KHz	36.23	46.00	-9.77	46.97	56.00	-9.03	10.200
908.920 KHz	37.06	46.00	-8.94	46.74	56.00	-9.26	10.200
972.490 KHz	36.78	46.00	-9.22	45.55	56.00	-10.45	10.200
1.016 MHz	36.39	46.00	-9.61	45.54	56.00	-10.46	10.200
Project# - BEC-2204							
Sample# - 2204-01							
EUT - Lutron PD-6WCL							
Volt/Freq - 120Vac/60Hz							
Tx Frequency - Low Channel @ 431.5 MHz							





Tx @ Low Channel, 431.5 MHz, Phase Line

BEC Incorporated							
Line 1 Conducted Emissions							
03:59:20 PM, Friday, May 20, 2022							
	1	2	3	4	5	6	7
Frequency	AVG	AVG	AVG	QP	QP	QP	Corr
MHz	dBuV	Limit	Margin	dBuV	Limit	Margin	Factor
190.720 KHz	43.13	54.84	-11.71	60.58	64.84	-4.26	10.180
233.537 KHz	45.36	53.61	-8.25	61.86	63.61	-1.75	10.180
259.424 KHz	45.73	52.87	-7.15	61.08	62.87	-1.79	10.180
296.783 KHz	44.06	51.81	-7.74	59.56	61.81	-2.25	10.180
325.972 KHz	44.42	50.97	-6.55	59.41	60.97	-1.56	10.180
379.034 KHz	40.11	49.46	-9.35	53.25	59.46	-6.21	10.186
463.708 KHz	40.71	47.04	-6.32	54.12	57.04	-2.92	10.197
502.157 KHz	40.62	46.00	-5.38	53.67	56.00	-2.33	10.190
524.464 KHz	40.04	46.00	-5.96	52.67	56.00	-3.33	10.192
574.090 KHz	39.02	46.00	-6.98	51.74	56.00	-4.26	10.197
600.122 KHz	38.69	46.00	-7.31	51.29	56.00	-4.71	10.200
668.051 KHz	38.06	46.00	-7.94	49.77	56.00	-6.23	10.200
702.890 KHz	38.54	46.00	-7.46	49.66	56.00	-6.34	10.200
723.020 KHz	37.51	46.00	-8.49	49.23	56.00	-6.77	10.202
786.190 KHz	36.87	46.00	-9.13	47.22	56.00	-8.78	10.209
852.060 KHz	36.06	46.00	-9.94	46.88	56.00	-9.12	10.210
916.360 KHz	35.66	46.00	-10.34	46.08	56.00	-9.92	10.220
942.210 KHz	35.73	46.00	-10.27	46.13	56.00	-9.87	10.220
980.920 KHz	35.66	46.00	-10.34	45.22	56.00	-10.78	10.220
1.003 MHz	35.66	46.00	-10.34	45.64	56.00	-10.36	10.220
Project# - BEC-2204							
Sample# - 2204-01							
EUT - Lutron PD-6WCL							
Volt/Freq - 120Vac/60Hz							
Tx Frequency - Low Channel @ 431.5 MHz							



Tx @ Low Channel, 431.5 MHz Graphs Neutral and Phase Lines

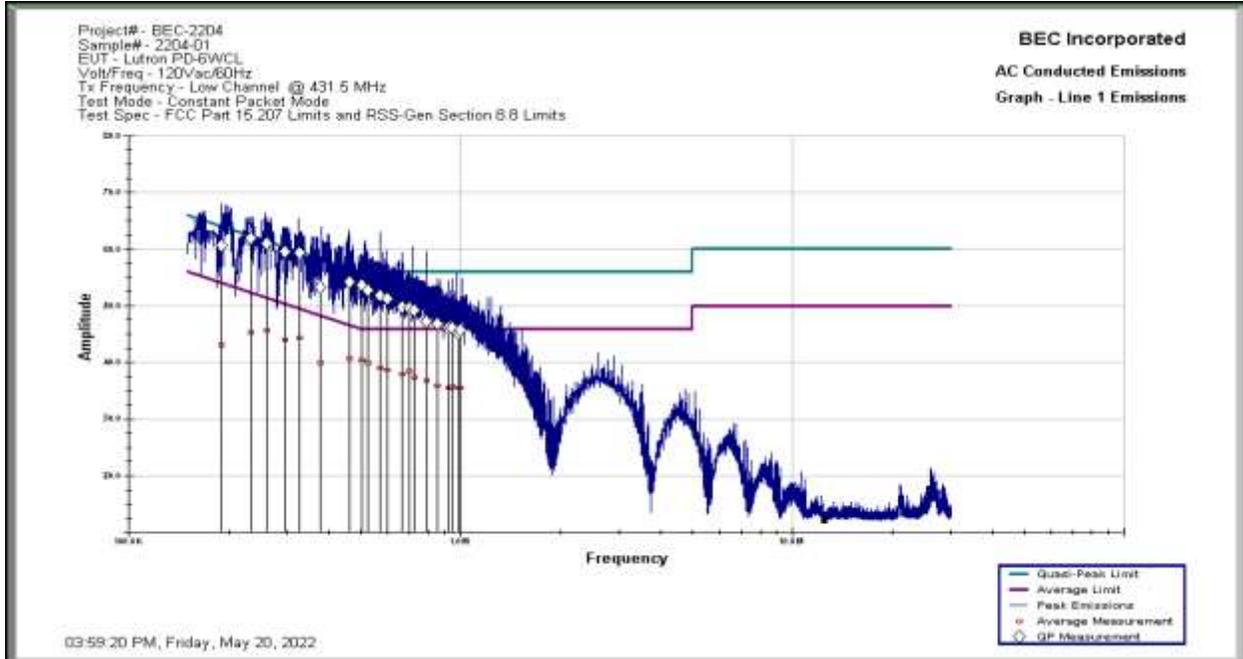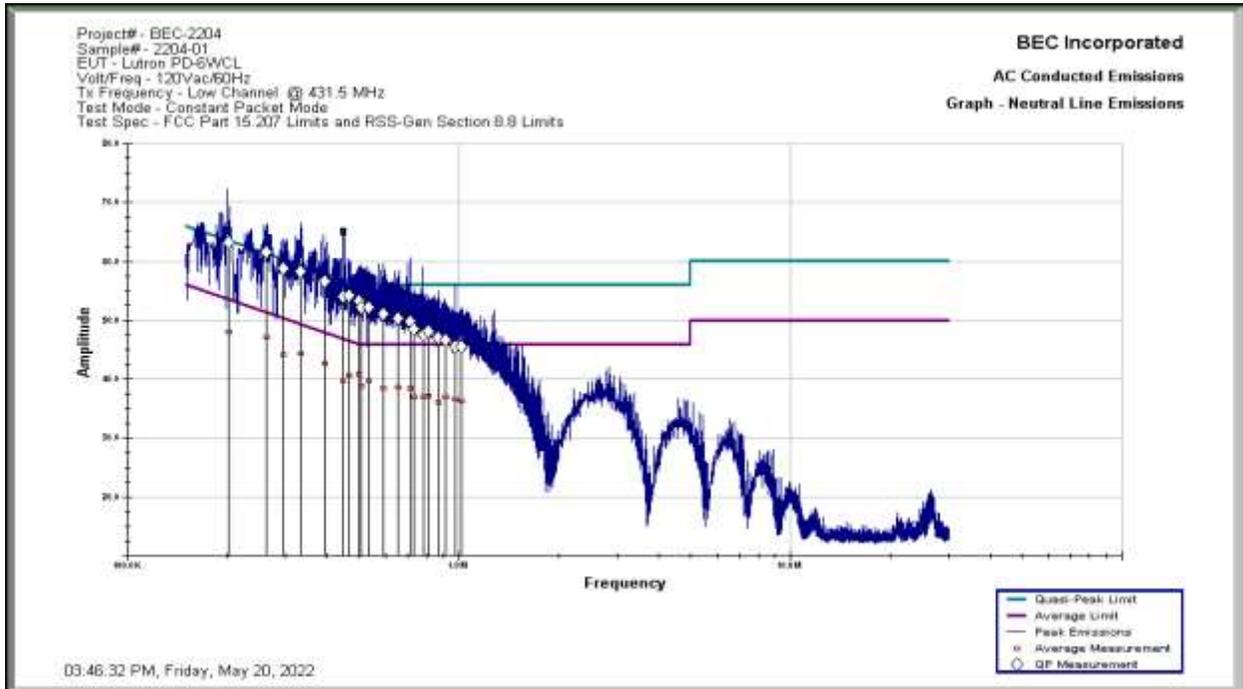



Tx @ High Channel, 436.6 MHz, Neutral Line

BEC Incorporated							
Neutral Line Conducted Emissions							
04:20:16 PM, Friday, May 20, 2022							
	1	2	3	4	5	6	7
Frequency	AVG	AVG	AVG	QP	QP	QP	Corr
MHz	dBuV	Limit	Margin	dBuV	Limit	Margin	Factor
194.204 KHz	47.39	54.74	-7.35	63.40	64.74	-1.34	10.170
263.879 KHz	46.96	52.75	-5.78	61.14	62.75	-1.61	10.170
317.459 KHz	40.86	51.22	-10.36	56.27	61.22	-4.95	10.170
362.580 KHz	43.05	49.93	-6.88	57.47	59.93	-2.45	10.173
388.609 KHz	42.45	49.18	-6.74	57.11	59.18	-2.07	10.178
450.158 KHz	41.21	47.42	-6.21	54.71	57.42	-2.71	10.180
470.496 KHz	40.58	46.84	-6.26	53.60	56.84	-3.25	10.176
499.698 KHz	41.05	46.01	-4.96	53.26	56.01	-2.75	10.170
519.753 KHz	40.71	46.00	-5.29	53.04	56.00	-2.96	10.172
584.259 KHz	40.04	46.00	-5.96	51.49	56.00	-4.51	10.185
600.028 KHz	38.74	46.00	-7.26	50.80	56.00	-5.20	10.190
651.231 KHz	39.06	46.00	-6.94	50.38	56.00	-5.62	10.190
699.030 KHz	38.91	46.00	-7.09	49.68	56.00	-6.32	10.190
720.140 KHz	37.83	46.00	-8.17	48.90	56.00	-7.10	10.192
767.490 KHz	38.12	46.00	-7.88	48.55	56.00	-7.45	10.197
793.150 KHz	36.48	46.00	-9.52	47.27	56.00	-8.73	10.199
850.680 KHz	36.37	46.00	-9.63	47.00	56.00	-9.00	10.200
891.680 KHz	35.91	46.00	-10.09	46.27	56.00	-9.73	10.200
927.880 KHz	35.46	46.00	-10.54	45.50	56.00	-10.50	10.200
1.053 MHz	35.32	46.00	-10.68	44.32	56.00	-11.68	10.201
Project# - BEC-2204							
Sample# - 2204-01							
EUT - Lutron PD-6WCL							
Volt/Freq - 120Vac/60Hz							
Tx Frequency - High Channel @ 436.6 MHz							





Tx @ High Channel, 436.6 MHz, Phase Line

BEC Incorporated							
Line 1 Conducted Emissions							
04:33:06 PM, Friday, May 20, 2022							
	1	2	3	4	5	6	7
Frequency	AVG	AVG	AVG	QP	QP	QP	Corr
MHz	dBuV	Limit	Margin	dBuV	Limit	Margin	Factor
169.003 KHz	45.77	55.46	-9.69	62.92	65.46	-2.54	10.180
197.111 KHz	48.90	54.65	-5.76	63.30	64.65	-1.35	10.180
264.323 KHz	47.00	52.73	-5.74	61.19	62.73	-1.54	10.180
326.834 KHz	44.53	50.95	-6.42	58.87	60.95	-2.08	10.180
387.596 KHz	42.09	49.21	-7.12	56.57	59.21	-2.64	10.188
468.186 KHz	40.70	46.91	-6.21	54.29	56.91	-2.62	10.196
504.717 KHz	40.12	46.00	-5.88	53.31	56.00	-2.69	10.190
519.895 KHz	40.91	46.00	-5.09	53.71	56.00	-2.29	10.192
580.912 KHz	39.66	46.00	-6.34	51.61	56.00	-4.39	10.198
630.978 KHz	39.13	46.00	-6.87	50.60	56.00	-5.40	10.200
657.020 KHz	38.12	46.00	-7.88	50.46	56.00	-5.54	10.200
726.190 KHz	37.20	46.00	-8.80	48.65	56.00	-7.35	10.203
764.510 KHz	37.73	46.00	-8.27	48.37	56.00	-7.63	10.206
825.790 KHz	36.39	46.00	-9.61	47.50	56.00	-8.50	10.210
861.150 KHz	36.16	46.00	-9.84	46.24	56.00	-9.76	10.212
914.250 KHz	36.29	46.00	-9.71	45.80	56.00	-10.20	10.220
974.850 KHz	36.56	46.00	-9.44	45.48	56.00	-10.52	10.220
987.840 KHz	34.60	46.00	-11.40	44.41	56.00	-11.59	10.220
1.054 MHz	35.39	46.00	-10.61	44.51	56.00	-11.49	10.221
1.107 MHz	33.95	46.00	-12.05	43.38	56.00	-12.62	10.222
Project# - BEC-2204							
Sample# - 2204-01							
EUT - Lutron PD-6WCL							
Volt/Freq - 120Vac/60Hz							
Tx Frequency - High Channel @ 436.6 MHz							



Tx @ High Channel, 436.6 MHz Graphs Neutral and Phase Lines

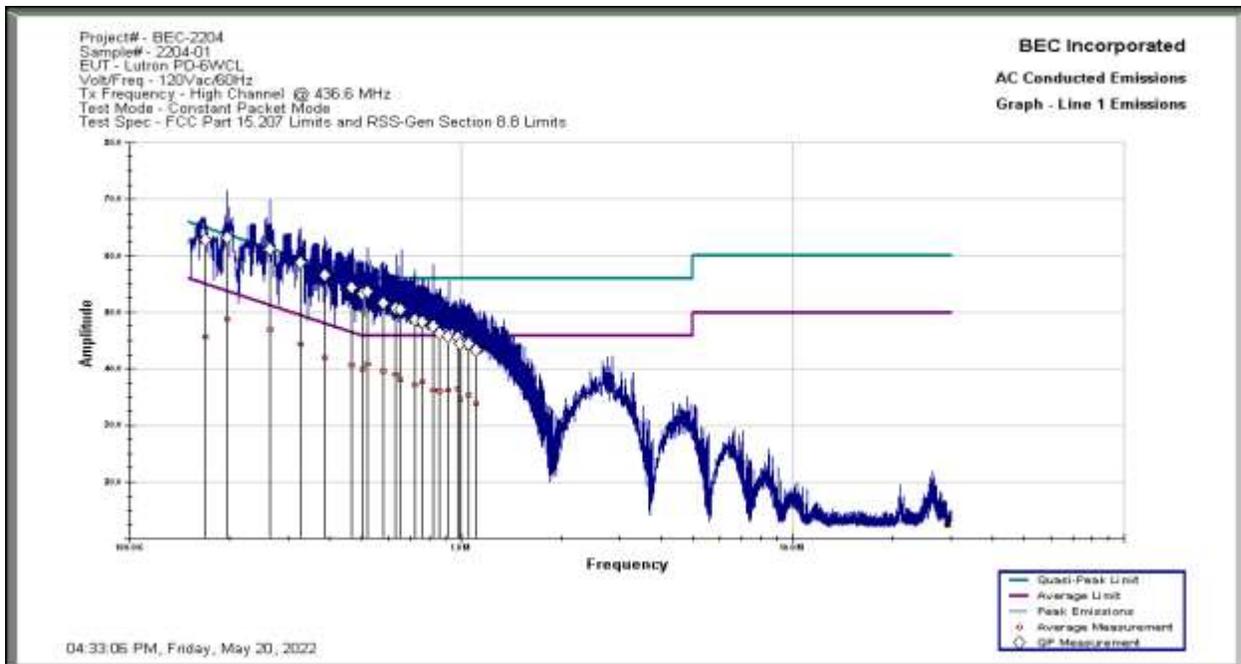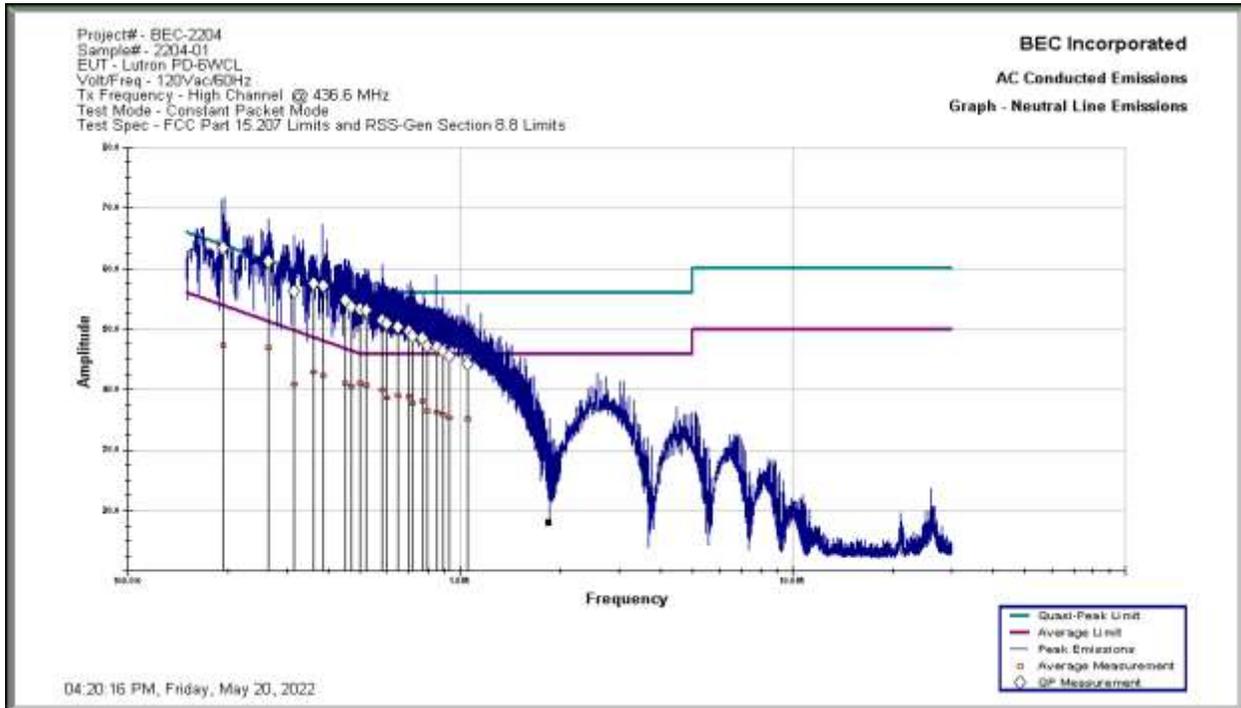



Rx Mode Neutral Line

BEC Incorporated							
Neutral Line Conducted Emissions							
01:34:30 PM, Friday, May 20, 2022							
	1	2	3	4	5	6	7
Frequency	AVG	AVG	AVG	QP	QP	QP	Corr
MHz	dBuV	Limit	Margin	dBuV	Limit	Margin	Factor
163.278 KHz	42.64	55.62	-12.98	60.05	65.62	-5.57	10.170
194.764 KHz	43.81	54.72	-10.91	59.14	64.72	-5.58	10.170
234.401 KHz	41.93	53.59	-11.66	56.17	63.59	-7.42	10.170
269.699 KHz	41.94	52.58	-10.64	55.85	62.58	-6.73	10.170
325.204 KHz	40.91	50.99	-10.09	54.84	60.99	-6.15	10.170
356.761 KHz	40.45	50.09	-9.64	52.97	60.09	-7.12	10.171
387.051 KHz	39.42	49.23	-9.80	52.35	59.23	-6.88	10.177
426.484 KHz	39.54	48.10	-8.56	50.98	58.10	-7.12	10.180
465.286 KHz	37.67	46.99	-9.32	49.09	56.99	-7.90	10.177
492.516 KHz	38.68	46.21	-7.53	49.98	56.21	-6.23	10.171
495.417 KHz	38.78	46.13	-7.35	50.40	56.13	-5.73	10.171
554.577 KHz	37.43	46.00	-8.57	47.08	56.00	-8.92	10.176
584.198 KHz	37.51	46.00	-8.49	48.03	56.00	-7.97	10.185
619.737 KHz	35.90	46.00	-10.10	47.10	56.00	-8.90	10.190
712.280 KHz	35.92	46.00	-10.08	45.37	56.00	-10.63	10.191
740.030 KHz	35.50	46.00	-10.50	45.63	56.00	-10.37	10.194
782.720 KHz	34.88	46.00	-11.12	44.63	56.00	-11.37	10.198
833.880 KHz	34.51	46.00	-11.49	44.58	56.00	-11.42	10.200
894.220 KHz	33.81	46.00	-12.19	42.97	56.00	-13.03	10.200
1.009 MHz	33.99	46.00	-12.01	42.97	56.00	-13.03	10.200
Project# - BEC-2204							
Sample# - 2204-01							
EUT - Lutron PD-6WCL							
Volt/Freq - 120Vac/60Hz							
Tx Frequency - No Tx Channel Active							





Rx Mode Phase Line

BEC Incorporated							
Line 1 Conducted Emissions							
01:46:49 PM, Friday, May 20, 2022							
	1	2	3	4	5	6	7
Frequency	AVG	AVG	AVG	QP	QP	QP	Corr
MHz	dBuV	Limit	Margin	dBuV	Limit	Margin	Factor
160.465 KHz	42.94	55.70	-12.76	57.98	65.70	-7.72	10.180
195.464 KHz	44.37	54.70	-10.33	60.29	64.70	-4.41	10.180
228.906 KHz	42.81	53.75	-10.93	56.41	63.75	-7.34	10.180
261.897 KHz	43.19	52.80	-9.61	56.89	62.80	-5.91	10.180
297.296 KHz	41.15	51.79	-10.64	54.66	61.79	-7.13	10.180
331.666 KHz	40.86	50.81	-9.95	55.23	60.81	-5.58	10.180
366.162 KHz	40.19	49.82	-9.64	52.78	59.82	-7.04	10.183
398.690 KHz	39.16	48.89	-9.73	52.49	58.89	-6.40	10.190
439.110 KHz	38.08	47.74	-9.66	49.19	57.74	-8.55	10.198
462.617 KHz	37.98	47.07	-9.09	50.67	57.07	-6.40	10.197
503.719 KHz	37.40	46.00	-8.60	48.44	56.00	-7.56	10.190
529.092 KHz	36.50	46.00	-9.50	48.83	56.00	-7.17	10.193
557.545 KHz	37.54	46.00	-8.46	49.15	56.00	-6.85	10.196
599.301 KHz	36.97	46.00	-9.03	46.66	56.00	-9.34	10.200
627.086 KHz	37.09	46.00	-8.91	47.49	56.00	-8.51	10.200
673.870 KHz	36.20	46.00	-9.80	46.57	56.00	-9.43	10.200
701.350 KHz	36.05	46.00	-9.95	45.62	56.00	-10.38	10.200
780.620 KHz	34.99	46.00	-11.01	45.00	56.00	-11.00	10.208
829.820 KHz	34.45	46.00	-11.55	43.90	56.00	-12.10	10.210
1.021 MHz	33.79	46.00	-12.21	42.51	56.00	-13.49	10.220
Project# - BEC-2204							
Sample# - 2204-01							
EUT - Lutron PD-6WCL							
Volt/Freq - 120Vac/60Hz							
Tx Frequency - No Tx Channel Active							



Rx Mode Graphs Neutral and Phase Lines

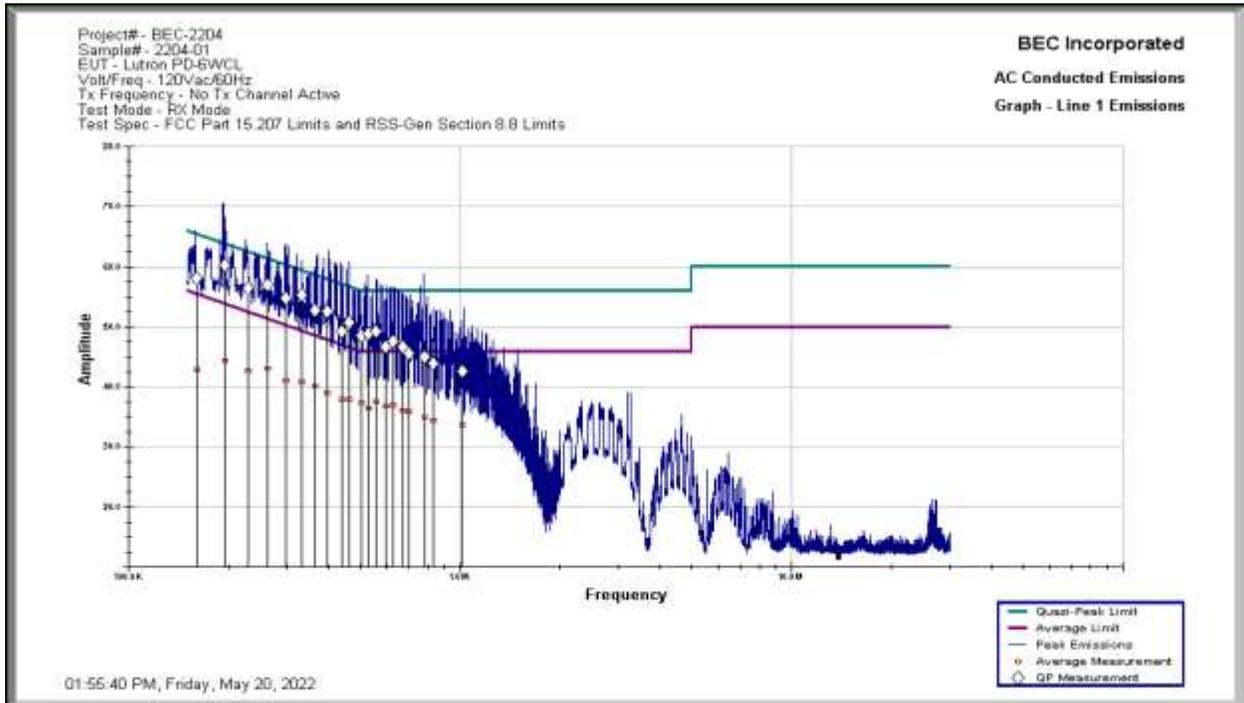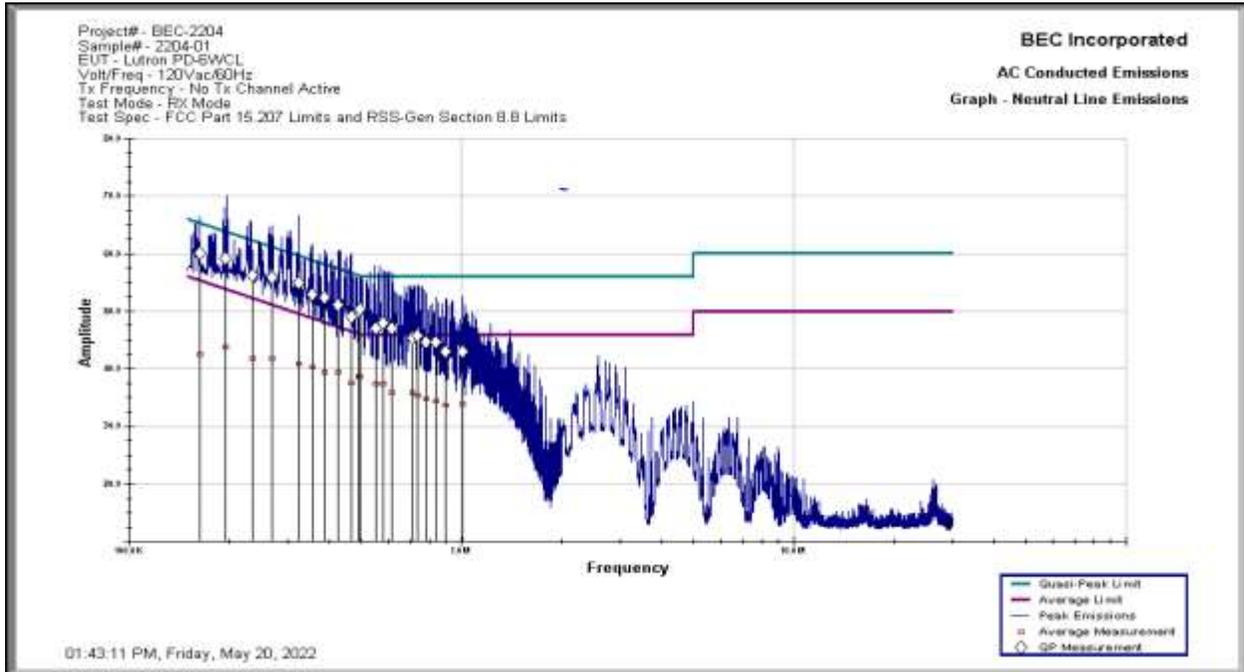

Results: The Lutron Model PD-6WCL Samples 2204-01 and 2197-02 comply with the requirements of FCC Part 15.207 and RSS-Gen Section 8.8. The margin is 1.17 dB @ 262.855 kHz with Sample #2204-01 transmitting Low Channel, 431.5 MHz, Neutral Line.



5.0 EUT and Test Setup Pictures

5.1 EUT Pictures Are Included in The Grant Submission

5.2 Test Setup Pictures Are Included in The Grant Submission

Appendix A – Test Equipment


Equipment	Manufacturer	Model #	Serial #	BEC #	Calibration Date	Calibration Cycle	Calibration Due Date
Antenna (30 MHz - 6 GHz)	Sunol Sciences	JB6	A022108	712	06/21/21	3 Years	06/21/24
EMI Receiver (20 Hz – 26.5 GHz)	Rohde & Schwarz	ESIB 26	836119/006	1010	07/02/19	3 Years	07/02/22
OATS Site (30 MHz – 1 GHz)	BEC	N/A	N/A	705	09/30/21	1 Year	09/30/22
Antenna (30 MHz - 6 GHz)	Sunol Sciences	JB6	A020714	882	05/24/21	3 Years	05/24/24
EMC Analyzer (9 kHz - 3 GHz)	Agilent	E7402A	US39440162	883	06/21/21	3 Years	06/21/24
Amplifier (.09 – 1300 MHz)	Hewlett Packard	8447F	3313A06658	807	01/13/21	2 Years	01/13/23
EMC Analyzer (9 kHz - 26.5 GHz)	Hewlett Packard	8593EM	3710A00214	1026	03/23/20	3 Years	03/23/23
Amplifier System (0.5 – 50 GHz)	Hewlett Packard	83015A 83017A	3123A00360 & 3332A00219	1027	10/13/20	2 Years	10/13/22
Double Ridged Horn Antenna (1 - 18 GHz)	EMCO	3115	9705-5225	1028	11/24/21	3 Years	11/24/24



EMI Receiver (9 kHz - 6.5 GHz)	Hewlett Packard	8546A	3325A00158	761	12/20/19	3 Years	12/20/22
Amplifier (.1 – 1300 MHz)	Hewlett Packard	8447D Opt 010	2944A08512	887	01/14/21	2 Years	01/14/23
Conducted Emissions Cable	Pasternack	CE-01	N/A	802	10/15/20	3 Years	10/15/23
Four Line V-LISN	TESEQ	NNB 52	253551	950	06/18/19	3 Years	06/18/22
Shielded Room #1	ETS Lindgren	12-2/2-0	4078	859	08/17/19	3 Years	08/17/22
Software (TILE)	Quantum Change/EMC Systems	Version 3	N/A	N/A	No Cal. Required	No Cal. Required	No Cal. Required
Radiated Emissions Test Software	BEC	RADE	2.2	N/A	No Cal. Required	No Cal. Required	No Cal. Required



Appendix B – Open Area Test Site Layout Diagram

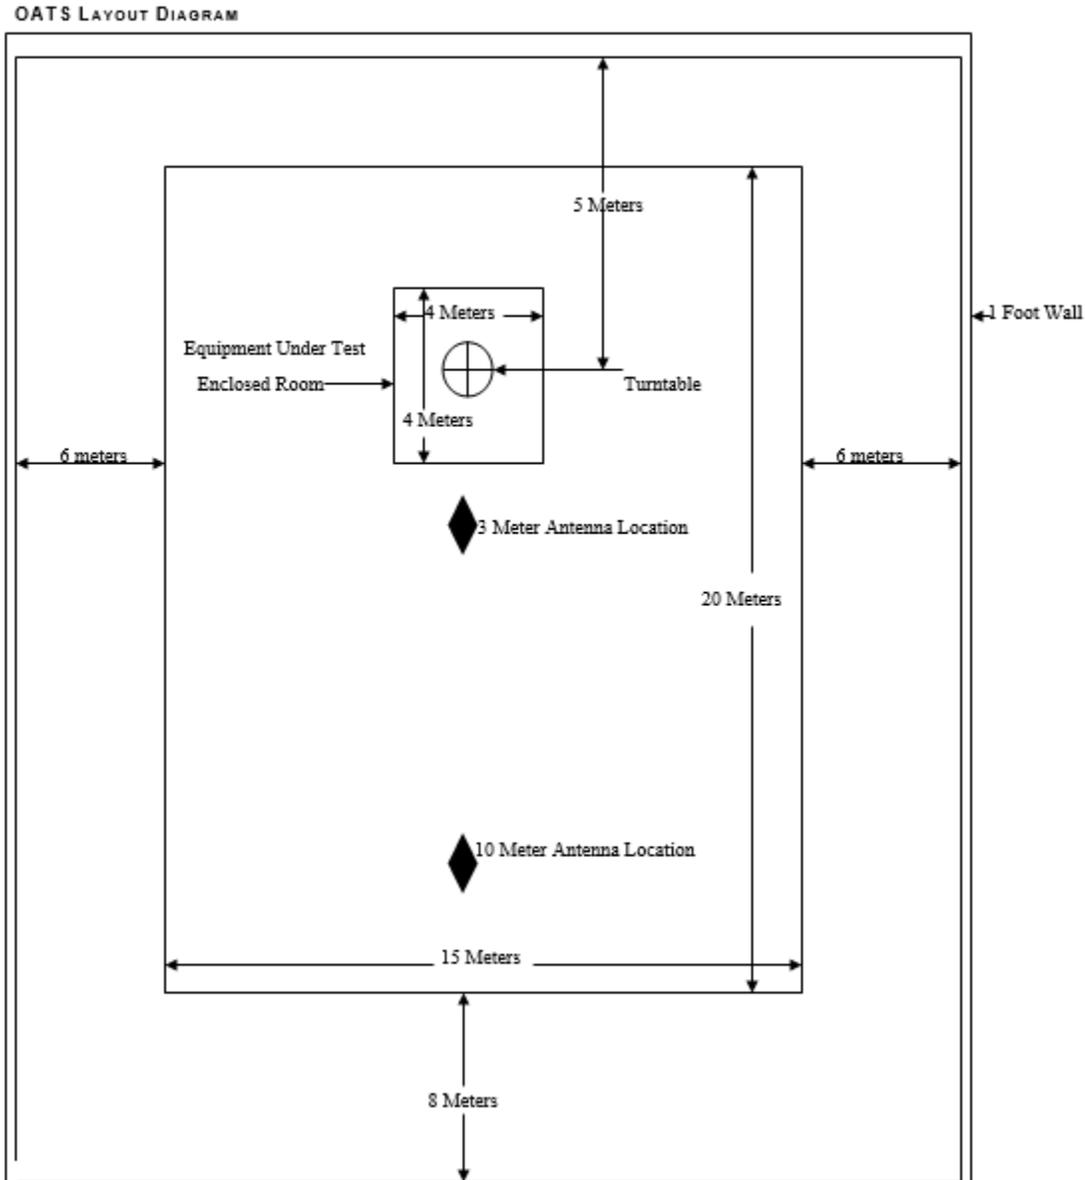



Appendix C – Emissions Shielded Room Layout Diagram

SITE DESCRIPTION

The chamber is a 3 Meter semi-anechoic chamber with the ferrite absorbers on all walls and ceiling and is re-categorized as a Fully anechoic chamber when absorbers are added in between the test area and measurement antenna. The turn-table and mast are controlled externally by the ETS Lindgren 2090 Controller. The metal computer floor provides the ground plane for the site. Inside room dimensions are 22' Long by 13' Wide by 11'5" High. Outside room dimensions are 22'8" Long by 14' Wide by 12'9" High.

