



FCC RF Test Report

APPLICANT : Quectel Wireless Solutions Co., Ltd.
EQUIPMENT : 5G NR Module
BRAND NAME : QUECTEL
MODEL NAME : AG555Q-GL
FCC ID : XMR2024AG555QGL
STANDARD : 47 CFR Part 2, and 90(S)
CLASSIFICATION : PCS Licensed Transmitter (PCB)
TEST DATE(S) : Feb. 01, 2024 ~ Mar. 10, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Maximum Conducted Power and Emission Designator	6
1.7 Testing Site.....	6
1.8 Test Software	6
1.9 Applied Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration and system	9
2.4 Measurement Results Explanation Example	10
2.5 Frequency List of Low/Middle/High Channels	10
3 TEST RESULT	11
3.1 Conducted Output Power Measurement.....	11
3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	12
3.3 Emissions Mask Measurement	13
3.4 Emissions Mask – Out Of Band Emissions Measurement.....	15
3.5 Field Strength of Spurious Radiation Measurement	16
3.6 Frequency Stability Measurement.....	19
4 LIST OF MEASURING EQUIPMENT	21
5 MEASUREMENT UNCERTAINTY	22
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG3D1801M	Rev. 01	Initial issue of report	Jun. 06, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	—	Report only	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	—	Report only	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	$< 50+10\log_{10}(P[\text{Watts}])$	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 46.95 dB at 2448.000 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	$< 2.5 \text{ ppm}$	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China

1.2 Manufacturer

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	5G NR Module
Brand Name	QUECTEL
Model Name	AG555Q-GL
FCC ID	XMR2024AG555QGL
IMEI Code	Conducted: 868637060025178 Radiation: 868637060025087
HW Version	R1.0
SW Version	BYA555QGLABR01A01M8G_OCPU
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The four model names are only for market segment, no other difference

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	814 ~ 824 MHz
Rx Frequency	859 ~ 869 MHz
Bandwidth	5MHz / 10MHz / 15MHz / 20MHz
SCS	15kHz
Antenna Gain	2.87 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark: 5G NR n26 supports SA mode only.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum Conducted Power and Emission Designator

5G NR n26		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power(W)	Emission Designator (99%OBW)	Maximum Conducted power(W)	Emission Designator (99%OBW)
5	816.5 ~ 821.5	0.2198	4M46G7D	0.1758	4M48W7D
10	819	0.2228	9M27G7D	0.1791	9M29W7D
15	821.5	0.2213	14M1G7D	0.1742	14M1W7D
20	824	0.2239	18M9G7D	0.1734	18M9W7D

Note: All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	SPORTON	FCC LTE_Ver2.0 Auto_china_210503	2.0
2.	03CH04-KS	AUDIX	E3	210616



1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 90(S)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission. (X plane).

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

Test Items	Band	Bandwidth (MHz)				Modulation					RB #			Test Channel		
		5	10	15	20	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	n26	v	v	v	v	v	v	v	v	v	v		v	v	v	v
26dB and 99% Bandwidth	n26	v	v	v	v		v	v	v	v			v		v	
Emission masks In-band emissions	n26	v				v	v				v			v	v	v
			v		v	v	v				v				v	
Emission masks – Out of band emissions	n26	v				v	v				v		v	v	v	v
			v		v	v	v				v		v		v	
Frequency Stability	n26				v		v						v		v	
Radiated Spurious Emission	n26	Worst Case												v	v	v
Note	1. The mark “v” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. 5G n26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies. 4. Frequency Stability : Normal Voltage = 3.80V ; Low Voltage =3.30V. ; High Voltage =4.30V															

2.2 Connection Diagram of Test System

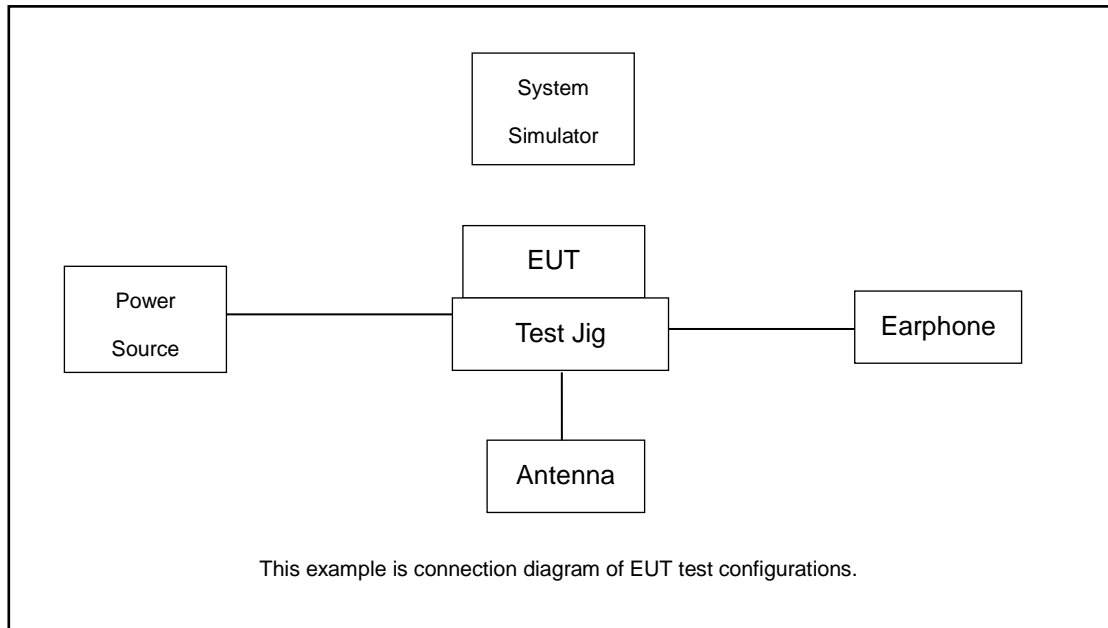

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	Adapter	N/A	N/A	N/A	N/A	N/A
4.	Test Jig	N/A	N/A	N/A	N/A	N/A
5.	Antenna	N/A	N/A	N/A	N/A	N/A
6.	Earphone	N/A	N/A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with RF cable loss 20 dB and cable loss 4.8 dB

Example :

Offset(dB) = RF cable loss + attenuator factor.

= 20 + 4.8

= 24.8 (dB)

2.5 Frequency List of Low/Middle/High Channels

5G NR n26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	163800	-
	Frequency	-	819	-
5	Channel	163300	163800	164300
	Frequency	816.5	819	821.5

5G NR n26 Cross-rule Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	-	Middle	-
20	Channel	-	164800	-
	Frequency	-	824	-
15	Channel	-	164300	-
	Frequency	-	821.5	-

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.1.4 Test Setup

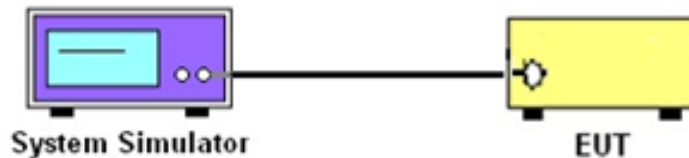

3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

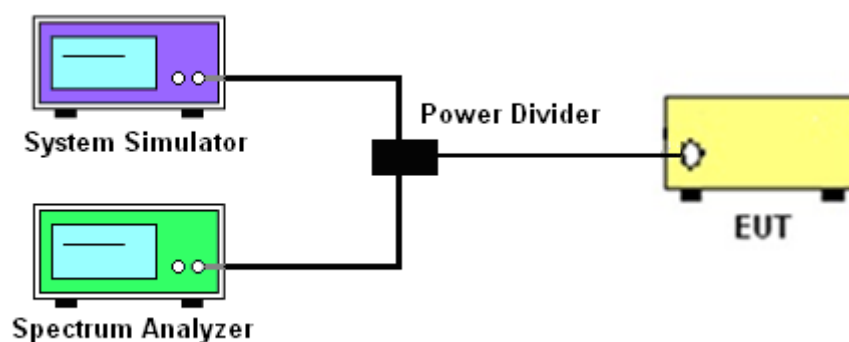

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The emissions mask of low and high channels for the highest RF powers were measured.
3. The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor $10 \log (1\% \text{ of OBW/measured RBW})(\text{dB})$ was compensated, if required.
4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

3.3.4 Test Setup

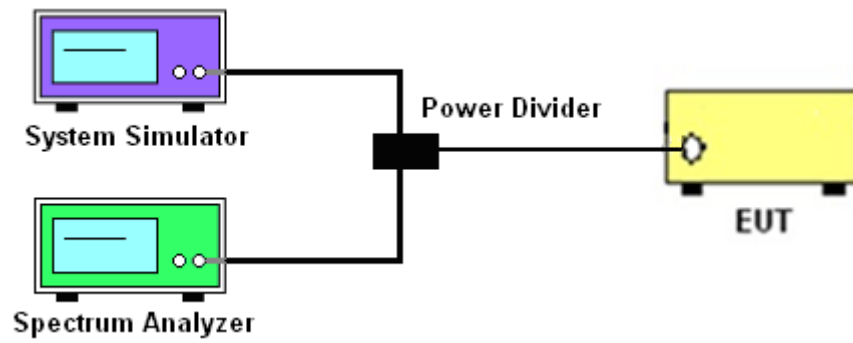

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

3.4 Emissions Mask – Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least $43 + 10 \log (P)$ dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.4.4 Test Setup

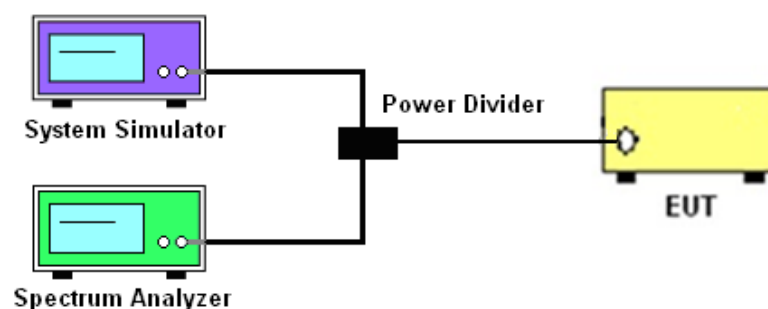

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log_{10}(P[\text{Watts}])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
11. $\text{ERP (dBm)} = \text{EIRP} - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)

3.5.4 Test Setup


For radiated test from 30MHz

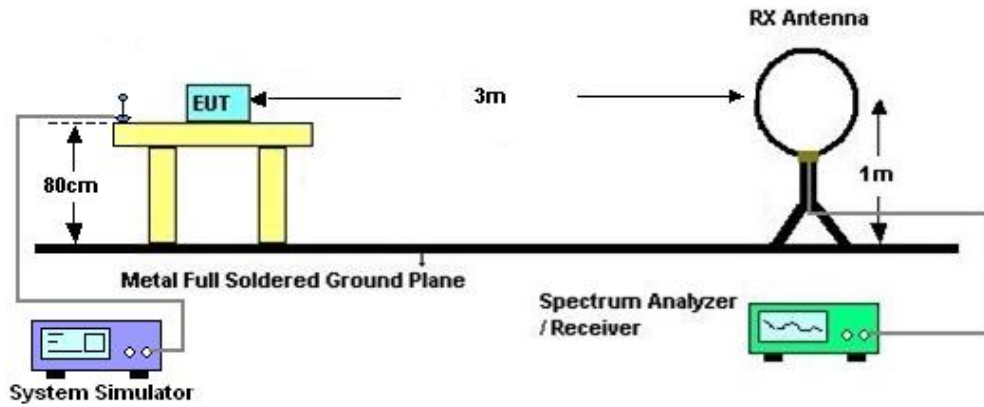

For radiated test from 30MHz to 1GHz

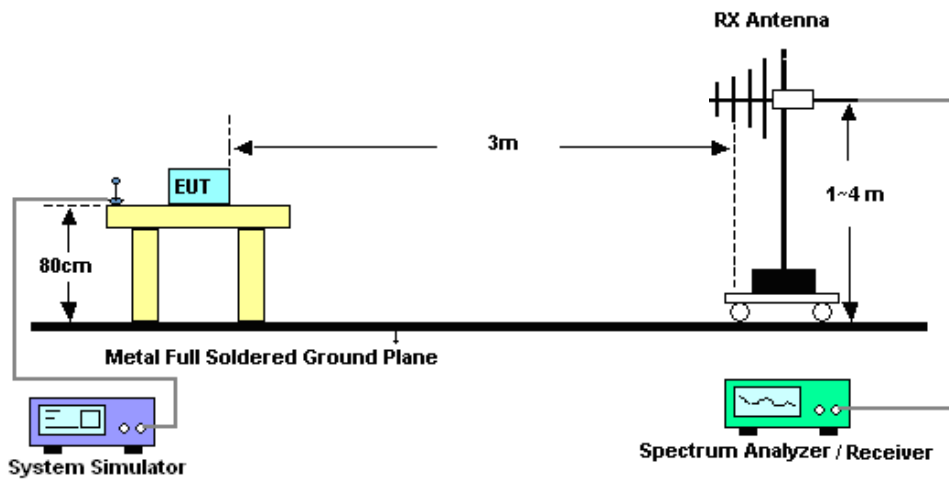

For radiated test above 1GHz

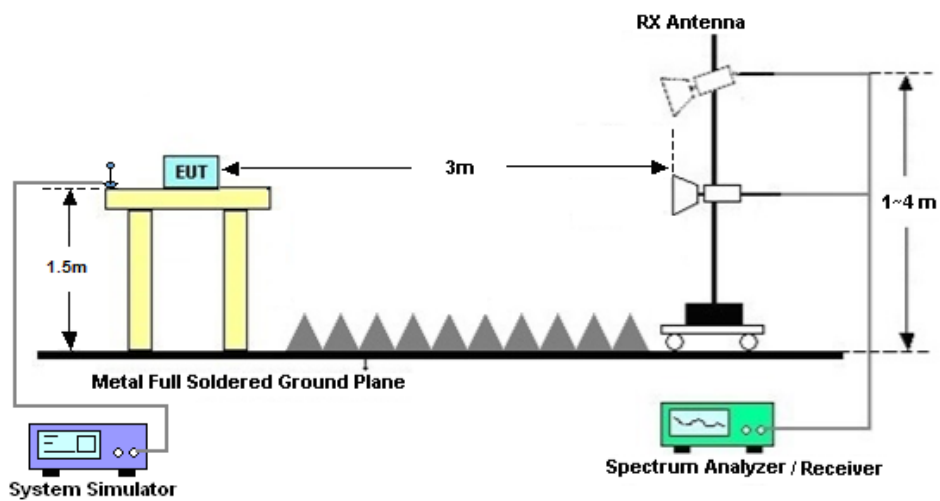



3.5.5 Test Result of Field Strength of Spurious Radiated

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.6.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.6.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
4. battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

3.6.5 Test Setup

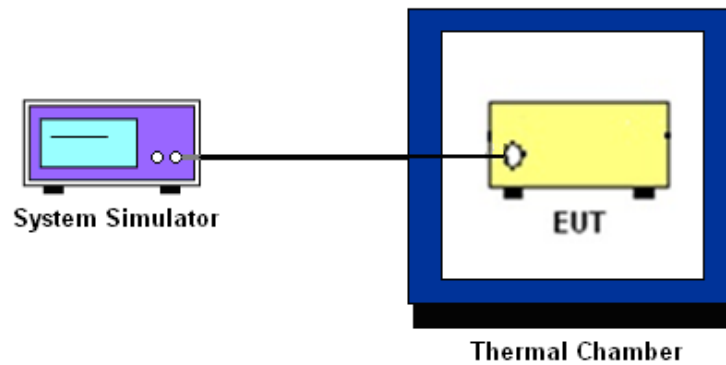

3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 10, 2023	Feb. 01, 2024	Oct. 09, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Feb. 01, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 06, 2023	Feb. 01, 2024	Jul. 05, 2024	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 10, 2023	Mar. 10, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Mar. 10, 2024	Sep. 10, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Apr. 09, 2023	Mar. 10, 2024	Apr. 08, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00251694	1GHz~18GHz	Jul. 12, 2023	Mar. 10, 2024	Jul. 11, 2024	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	380827	9KHz-1GHz	Jul. 06, 2023	Mar. 10, 2024	Jul. 05, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 10, 2023	Mar. 10, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 10, 2023	Mar. 10, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 10, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 10, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 10, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 2.26 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.46 dB
Frequency Stability	± 0.4 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.82 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.56 dB
--	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 N26

Transmitter Conducted Output Power

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	Conducted Power(W)
26	15	20	164800	824	DFT-s-OFDM PI/2 BPSK	50@25	23.43	0.2203
26	15	20	164800	824	DFT-s-OFDM PI/2 BPSK	1@1	23.5	0.2239
26	15	20	164800	824	DFT-s-OFDM PI/2 BPSK	1@104	23.32	0.2148
26	15	20	164800	824	DFT-s-OFDM QPSK	50@25	23.39	0.2183
26	15	20	164800	824	DFT-s-OFDM QPSK	1@1	23.37	0.2173
26	15	20	164800	824	DFT-s-OFDM QPSK	1@104	23.21	0.2094
26	15	20	164800	824	DFT-s-OFDM 16 QAM	50@25	22.39	0.1734
26	15	20	164800	824	DFT-s-OFDM 16 QAM	1@1	22.22	0.1667
26	15	20	164800	824	DFT-s-OFDM 16 QAM	1@104	22.25	0.1679
26	15	20	164800	824	DFT-s-OFDM 64 QAM	50@25	20.96	0.1247
26	15	20	164800	824	DFT-s-OFDM 64 QAM	1@1	20.83	0.1211
26	15	20	164800	824	DFT-s-OFDM 64 QAM	1@104	20.78	0.1197
26	15	20	164800	824	DFT-s-OFDM 256 QAM	50@25	18.87	0.0771
26	15	20	164800	824	DFT-s-OFDM 256 QAM	1@1	18.94	0.0783
26	15	20	164800	824	DFT-s-OFDM 256 QAM	1@104	18.9	0.0776
26	15	20	164800	824	CP-OFDM QPSK	53@26	21.86	0.1535
26	15	20	164800	824	CP-OFDM QPSK	1@1	21.78	0.1507
26	15	20	164800	824	CP-OFDM QPSK	1@104	21.71	0.1483
26	15	5	163300	816.5	DFT-s-OFDM PI/2 BPSK	1@1	23.34	0.2158
26	15	5	163300	816.5	DFT-s-OFDM QPSK	1@1	23.42	0.2198
26	15	5	163300	816.5	DFT-s-OFDM 16 QAM	1@1	22.45	0.1758
26	15	5	163800	819	DFT-s-OFDM PI/2 BPSK	1@1	23.33	0.2153
26	15	5	163800	819	DFT-s-OFDM QPSK	1@1	23.4	0.2188
26	15	5	163800	819	DFT-s-OFDM 16 QAM	1@1	22.4	0.1738
26	15	5	164300	821.5	DFT-s-OFDM PI/2 BPSK	1@1	23.23	0.2104

26	15	5	164300	821.5	DFT-s-OFDM QPSK	1@1	23.17	0.2075
26	15	5	164300	821.5	DFT-s-OFDM 16 QAM	1@1	22.39	0.1734
26	15	10	163800	819	DFT-s-OFDM PI/2 BPSK	1@1	23.35	0.2163
26	15	10	163800	819	DFT-s-OFDM QPSK	1@1	23.48	0.2228
26	15	10	163800	819	DFT-s-OFDM 16 QAM	1@1	22.53	0.1791
26	15	15	164300	821.5	DFT-s-OFDM PI/2 BPSK	1@1	23.42	0.2198
26	15	15	164300	821.5	DFT-s-OFDM QPSK	1@1	23.45	0.2213
26	15	15	164300	821.5	DFT-s-OFDM 16 QAM	1@1	22.41	0.1742


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
26	15	20	164800	824.0	DFT-s-OFDM QPSK	100@0	-0.0026	PASS	NV
26	15	20	164800	824.0	DFT-s-OFDM QPSK	100@0	0.0027	PASS	LV
26	15	20	164800	824.0	DFT-s-OFDM QPSK	100@0	0.0032	PASS	HV
26	15	20	164800	824.0	DFT-s-OFDM QPSK	100@0	0.0045	PASS	-30°C
26	15	20	164800	824.0	DFT-s-OFDM QPSK	100@0	-0.0043	PASS	-20°C
26	15	20	164800	824.0	DFT-s-OFDM QPSK	100@0	0.0047	PASS	-10°C
26	15	20	164800	824.0	DFT-s-OFDM QPSK	100@0	0.0025	PASS	0°C
26	15	20	164800	824.0	DFT-s-OFDM QPSK	100@0	-0.0034	PASS	10°C
26	15	20	164800	824.0	DFT-s-OFDM QPSK	100@0	0.0032	PASS	20°C
26	15	20	164800	824.0	DFT-s-OFDM QPSK	100@0	-0.0040	PASS	30°C
26	15	20	164800	824.0	DFT-s-OFDM QPSK	100@0	0.0023	PASS	40°C
26	15	20	164800	824.0	DFT-s-OFDM QPSK	100@0	-0.0046	PASS	50°C


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
26	15	5	163800	819.0	CP-OFDM QPSK	25@0	4.4617	4.928
26	15	5	163800	819.0	CP-OFDM 16 QAM	25@0	4.4753	4.913
26	15	5	163800	819.0	CP-OFDM 64 QAM	25@0	4.4579	4.944
26	15	5	163800	819.0	CP-OFDM 256 QAM	25@0	4.4663	4.876
26	15	10	163800	819.0	CP-OFDM QPSK	52@0	9.266	9.813
26	15	10	163800	819.0	CP-OFDM 16 QAM	52@0	9.2866	9.802
26	15	10	163800	819.0	CP-OFDM 64 QAM	52@0	9.2655	9.811
26	15	10	163800	819.0	CP-OFDM 256 QAM	52@0	9.2807	9.82
26	15	15	164300	821.5	CP-OFDM QPSK	79@0	14.089	14.84
26	15	15	164300	821.5	CP-OFDM 16 QAM	79@0	14.075	14.82
26	15	15	164300	821.5	CP-OFDM 64 QAM	79@0	14.108	14.75
26	15	15	164300	821.5	CP-OFDM 256 QAM	79@0	14.096	14.75
26	15	20	164800	824.0	CP-OFDM QPSK	106@0	18.877	19.61
26	15	20	164800	824.0	CP-OFDM 16 QAM	106@0	18.89	19.71
26	15	20	164800	824.0	CP-OFDM 64 QAM	106@0	18.837	19.7
26	15	20	164800	824.0	CP-OFDM 256 QAM	106@0	18.867	19.68


N26(5M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

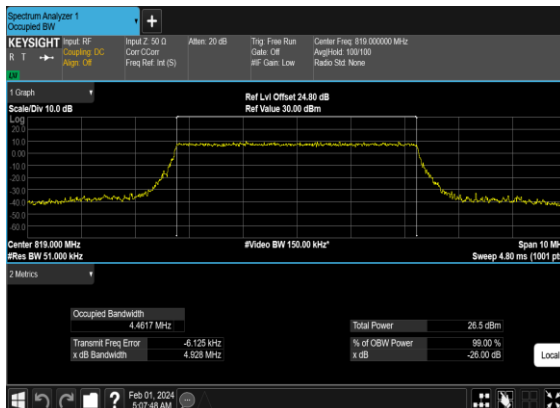


N26(5M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

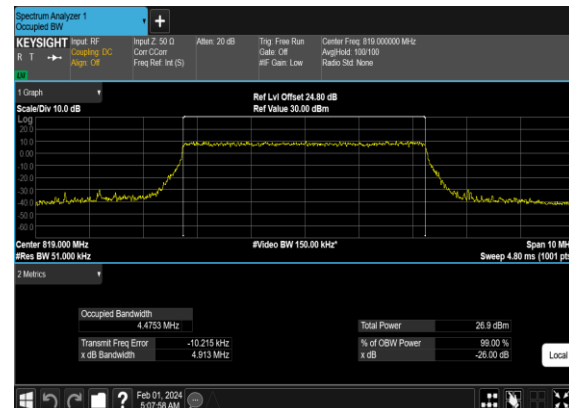


N26(5M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

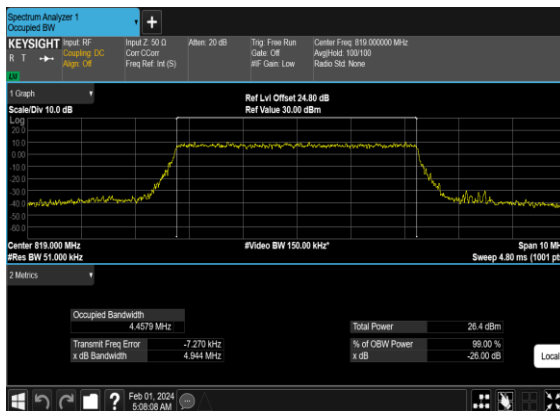


N26(5M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

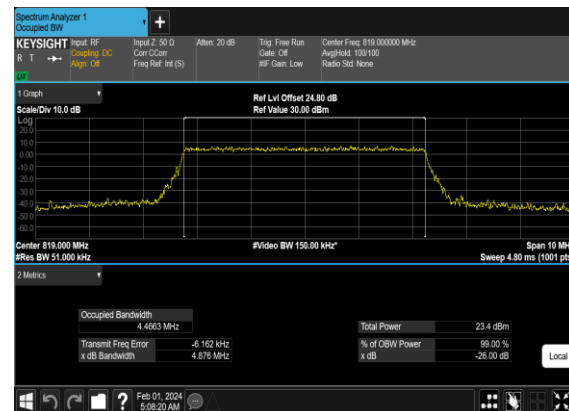


N26(10M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

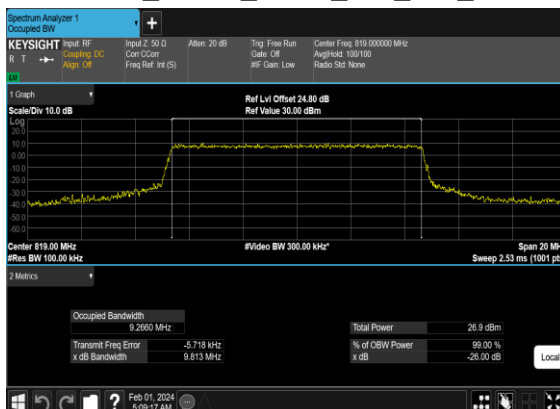


N26(10M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

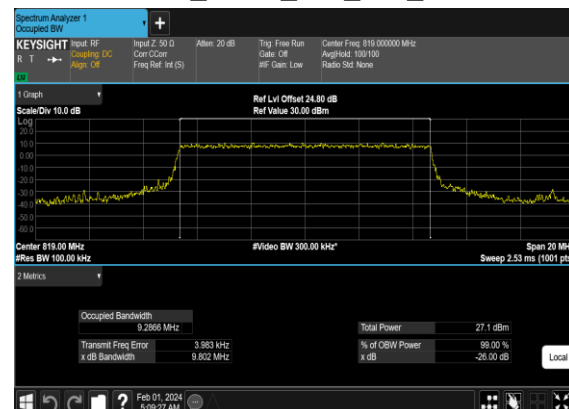


N26(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

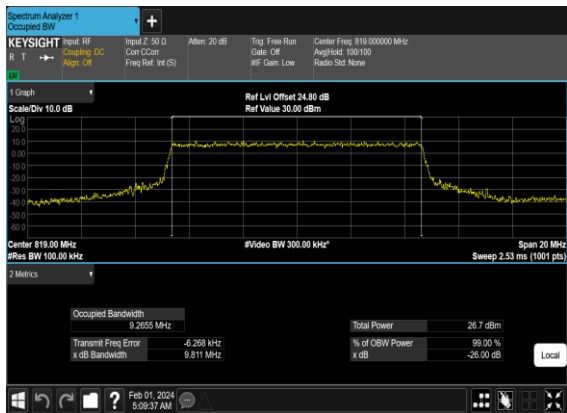


N26(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

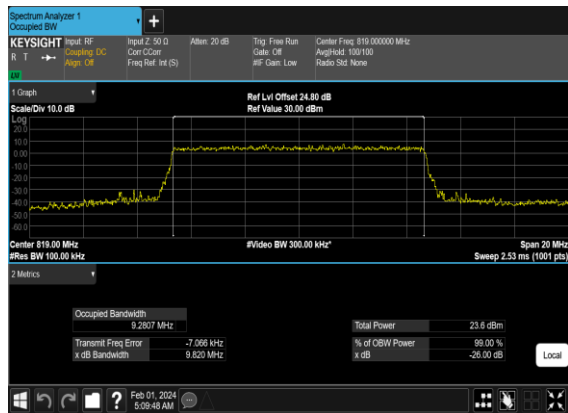


N26(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

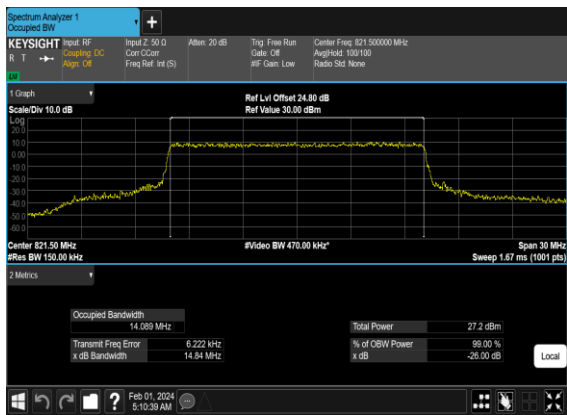


N26(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

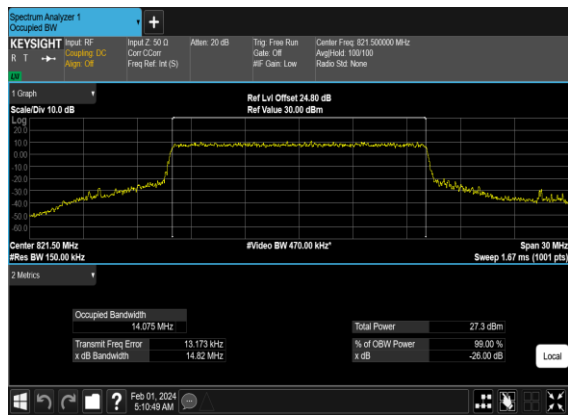

N26(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

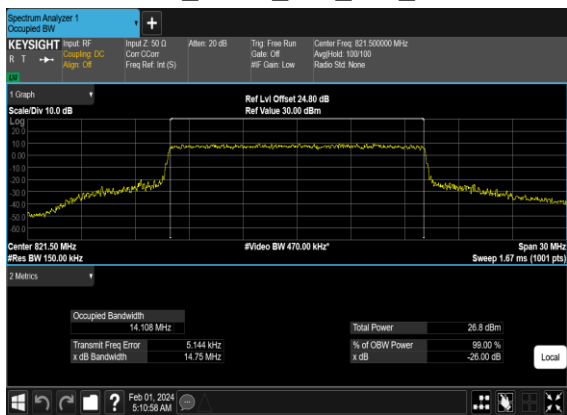

N26(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

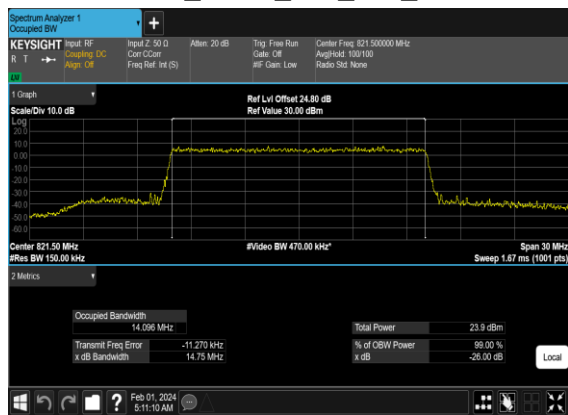

Spectrum Analyzer 1
Occupied BW

KEYSTIM Input RF
R T →
Residuals DC
Align Off

Input Z: 50 Ω
Cen Freq: 824.000000 MHz
Freq Ref: Int (S)

Att: 20 dB
Trig Freq: 824.000000 MHz
Gate: Off
RF Gain: Low

Center Freq: 824.000000 MHz
Appl Freq: 824.000000 MHz
Radio Std: None

1 Graph
Scale/Div 10.0 dB
Ref Lvl Offset 24.80 dB
Ref Value 30.00 dBm

Center 824.00 MHz
Span 40.00 MHz
BW 200.00 kHz
Video BW 620.00 kHz
Sweep 1.27 ms (1001 pts)

2 Metrics

Occupied Bandwidth		Total Power	
18.877 MHz		27.1 dBm	
Transmit Freq Error	8.170 1552	% of OSW Power	98.00 %
% dB Bandwidth	19.61 MHz	% dB	-25.50 dB

Spectrum Analyzer 1
Occupied BW

KEYSIGHT Input RF: **624.000 MHz** Span: **40.000 MHz**
 R T → Input Z: **50.0 Ω** Center Freq: **624.000 MHz**
 Avg: **Off** Corr: **Off** Freq Ref: **100.000 MHz**

Trig: **Free Run** Gain: **0 dB** Center Freq: **624.000000 MHz**
 JFF: **Gain Low** Aql: **100.000 MHz** Radio Std: **None**

1 Graph
 Scale/Div: **10.0 dB**
 Ref Lvl Offset: **24.80 dB**
 Ref Value: **30.00 dBm**

Center 624.00 MHz
#Video BW 620.0 kHz
Span 40.0 MHz
Sweep 1.27 ms (1001 p)

2 Metrics

Occupied Bandwidth		Total Power	
10.890 MHz		27.3 dBm	
Transmit Freq Error	8.223 KHz	% of OBW Power	98.00 %
3 dB Bandwidth	19.71 MHz	% of OBW Power	-26.50 dB

Spectrum Analyzer 1
Occupied BW

KEYSIGHT
R T → Input RF: 50 Ω
Coupling DC
Agt Off: Off

Input Z: 50 Ω
Corr CCOR
Ref Freq: Int (S)

Attenu: 20 dB

Trig Freq Run
Gate: Off
RF Gain: Low

Center Freq: 824.000000 MHz
Avg/Ref: 100/100
Radio Std: None

1 Graph
Scale/Div 10.0 dB
Log
Ref Level Offset 24.00 dB
Ref Value 30.00 dBm

Center 824.00 MHz
#Res BW 200.00 kHz
#Video BW 620.00 kHz
Span 40 MHz
Sweep 1.27 ms (1001 pts)

2 Metrics

Occupied Bandwidth		Total Power	
18.837 MHz		27.0 dBm	
Transmit Freq Error x dB Bandwidth		% of OSW Power x dB	
-2.151 kHz 19.70 MHz		99.00 % -26.00 dB	

Local

Spectrum Analyzer 1
Occupied BW

KEYSIGHT
R T → Input RF: Coupling: DC
Amp: Cal

Input 2: 50.0
Corr: Corr
Freq Ref: 1e6 (S)

Att: 20 dB

Trig: Free Run
Gate: Off
Ref: Gain: Low

Center Freq: 824.000000 MHz
AmpHold: 100.00
Radio Stc: None

1 Graph
Scale/Div 10.0 dB
Log
20
10
0
-10
-20
-30
-40
-50
-60

Ref Lvl Offset: 14.88 dB
Ref Value: 30.00 dBm

Center 824.00 MHz
#Res BW 200.00 kHz
#Video BW 620.00 kHz

Span 40 MHz
Sweep 1.27 ms (1000)

2 Metrics

Occupied Bandwidth	18.867 MHz	Total Power	23.9 dBm
Transmit Freq Error	-3.632 KHz	% of CBW Power	99.00 %
x dB Bandwidth	19.68 MHz	x dB	-26.00 dB

Feb 01, 2004
6:12:06 AM


Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
26	15	5	163300	816.5	DFT-s-OFDM BPSK	1@0	see graph	---
26	15	5	163300	816.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	5	163300	816.5	DFT-s-OFDM QPSK	1@0	see graph	---
26	15	5	163300	816.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
26	15	5	163800	819.0	DFT-s-OFDM BPSK	1@0	see graph	---
26	15	5	163800	819.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	5	163800	819.0	DFT-s-OFDM QPSK	1@0	see graph	---
26	15	5	163800	819.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
26	15	5	164300	821.5	DFT-s-OFDM BPSK	1@0	see graph	---
26	15	5	164300	821.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	5	164300	821.5	DFT-s-OFDM QPSK	1@0	see graph	---
26	15	5	164300	821.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
26	15	10	163800	819.0	DFT-s-OFDM BPSK	1@0	see graph	---
26	15	10	163800	819.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	10	163800	819.0	DFT-s-OFDM QPSK	1@0	see graph	---
26	15	10	163800	819.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
26	15	20	164800	824.0	DFT-s-OFDM BPSK	1@0	see graph	---
26	15	20	164800	824.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	20	164800	824.0	DFT-s-OFDM QPSK	1@0	see graph	---
26	15	20	164800	824.0	DFT-s-OFDM QPSK	1@0	see graph	PASS

N26(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




N26(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

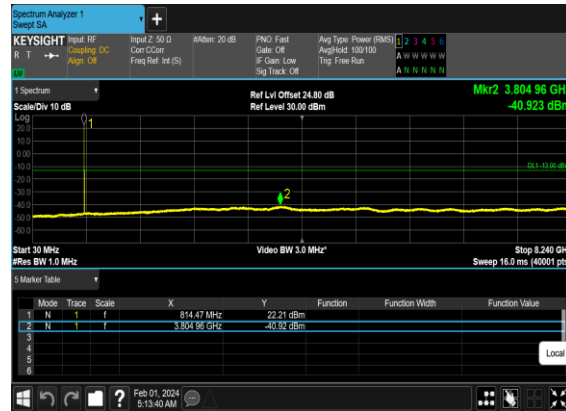


N26(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH




N26(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

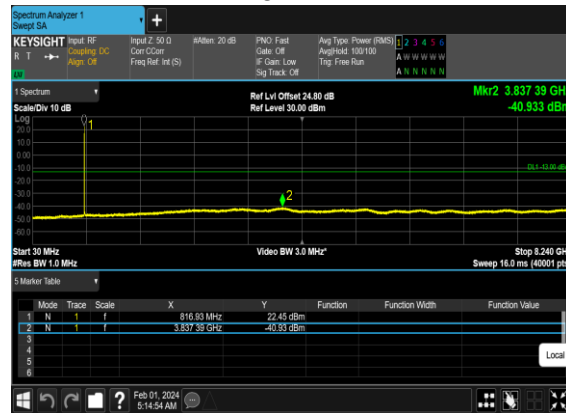

N26(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

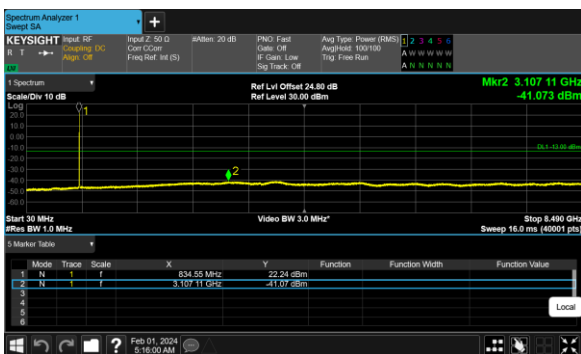


N26(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

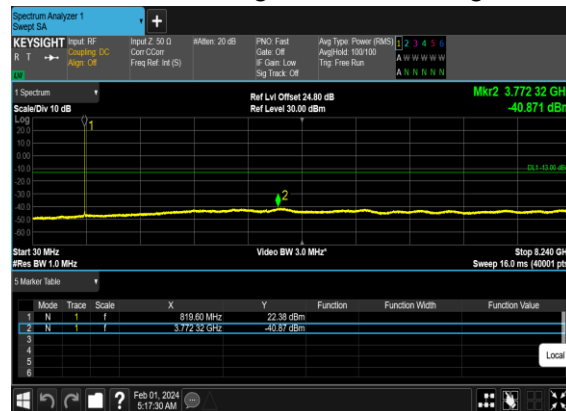


N26(10M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH




N26(10M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

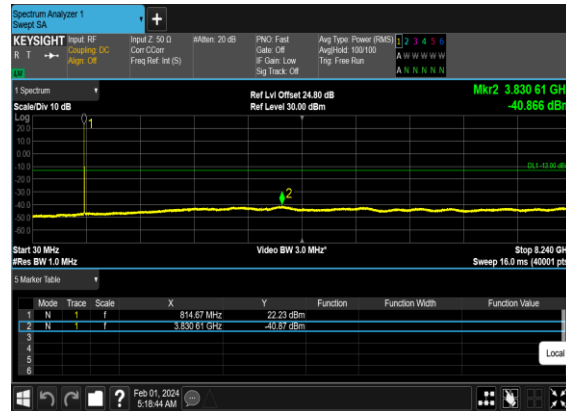

N26(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH

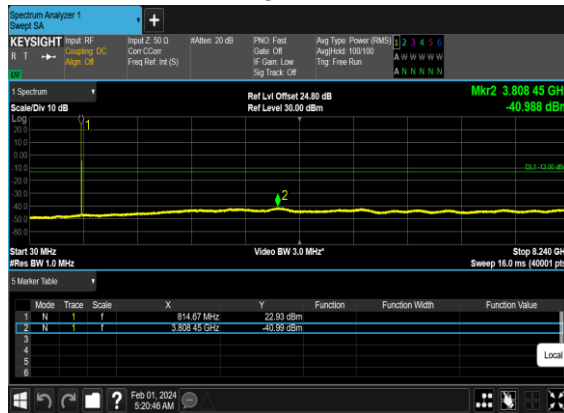


N26(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

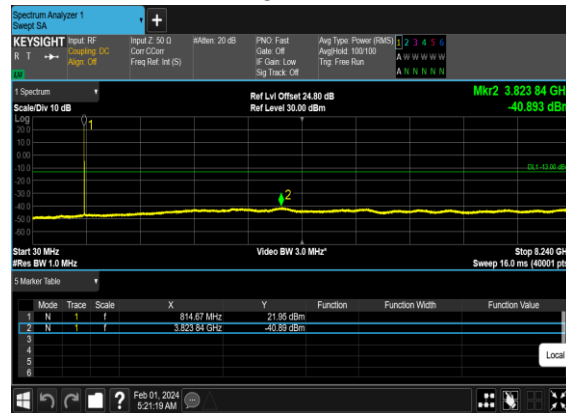


Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
26	15	5	163300	816.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	5	163300	816.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
26	15	5	163300	816.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
26	15	5	163300	816.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
26	15	5	164300	821.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
26	15	5	164300	821.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
26	15	5	164300	821.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
26	15	5	164300	821.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
26	15	10	163800	819.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	10	163800	819.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
26	15	10	163800	819.0	DFT-s-OFDM BPSK	1@51	see graph	PASS
26	15	10	163800	819.0	DFT-s-OFDM QPSK	1@51	see graph	PASS
26	15	10	163800	819.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
26	15	10	163800	819.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
26	15	20	164800	824.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
26	15	20	164800	824.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
26	15	20	164800	824.0	DFT-s-OFDM BPSK	1@105	see graph	PASS
26	15	20	164800	824.0	DFT-s-OFDM QPSK	1@105	see graph	PASS
26	15	20	164800	824.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
26	15	20	164800	824.0	DFT-s-OFDM QPSK	100@0	see graph	PASS


N26(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

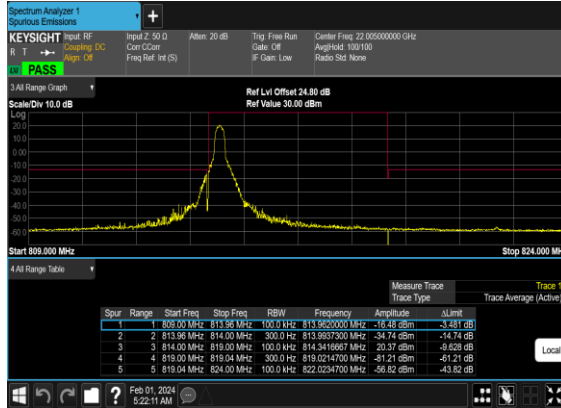


N26(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

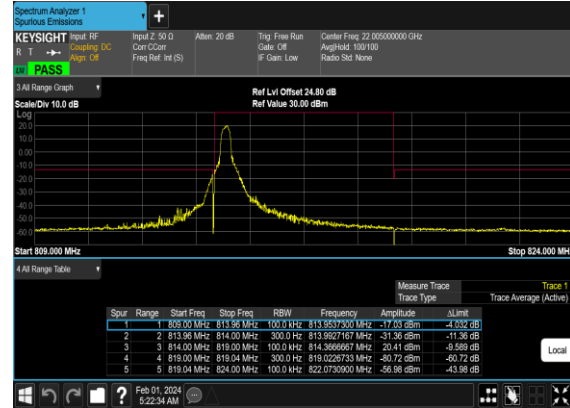


N26(5M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

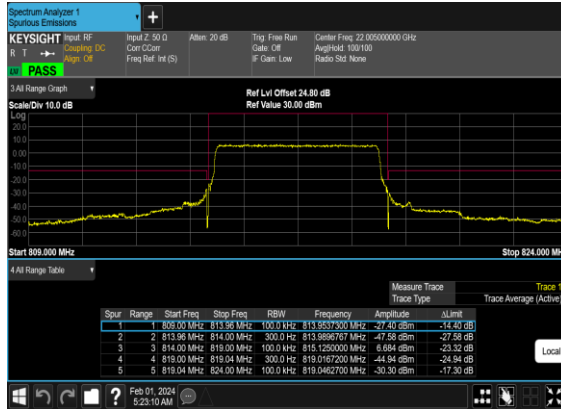


N26(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

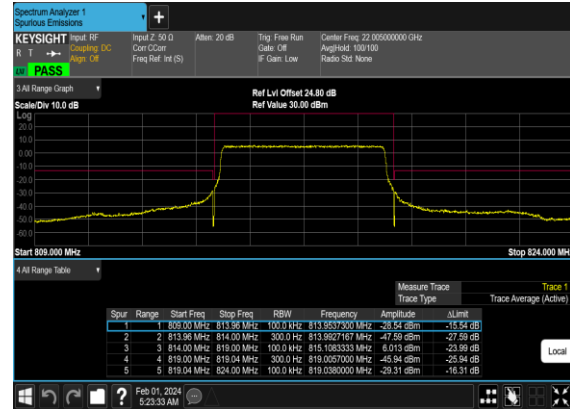


N26(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

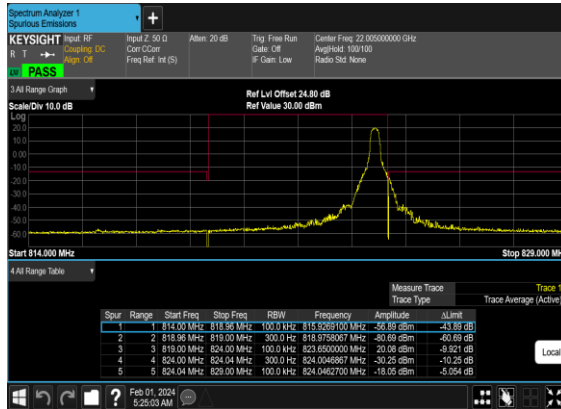


N26(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

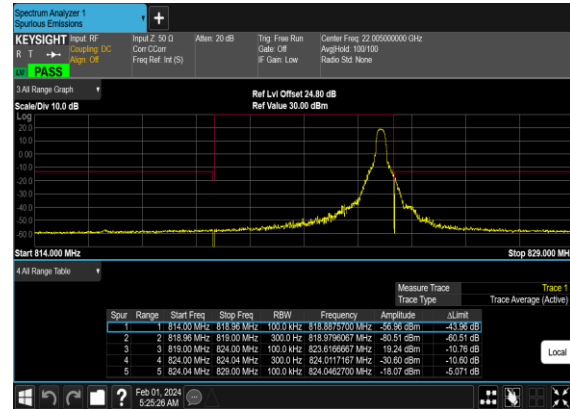


N26(5M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH

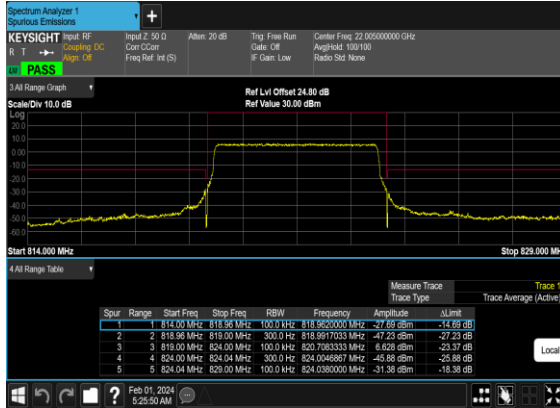


N26(5M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

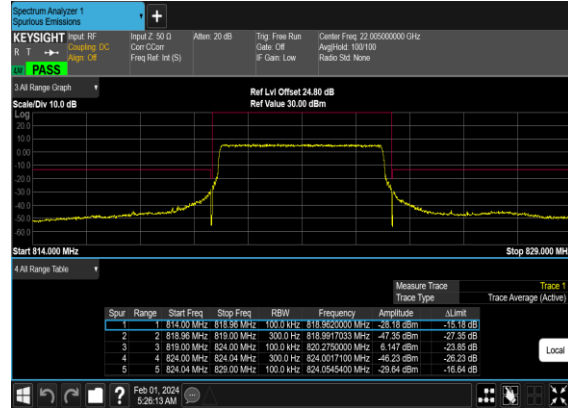


N26(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

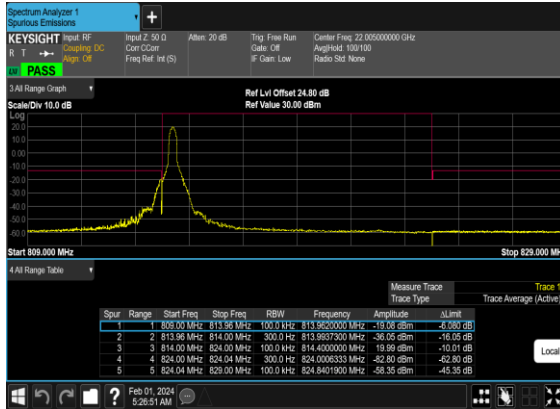


N26(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

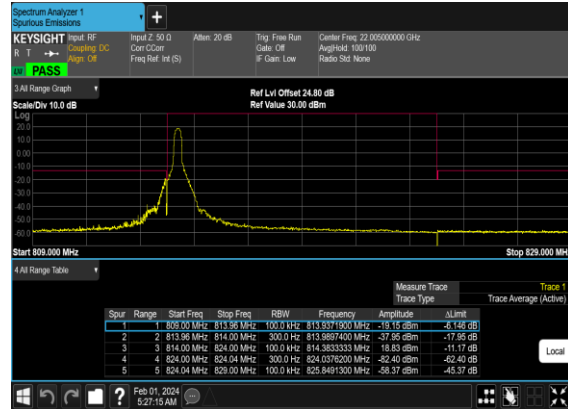


N26(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_Mid_CH

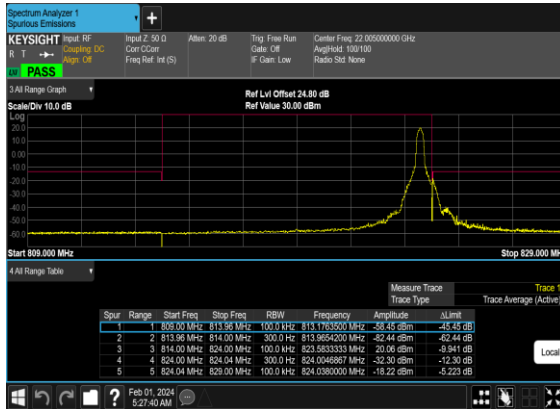


N26(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

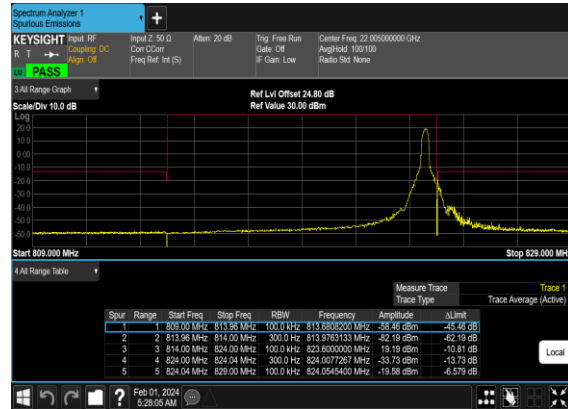


N26(10M)_DFT-s-
OFDM_BPSK_Outer_Full_Mid_CH

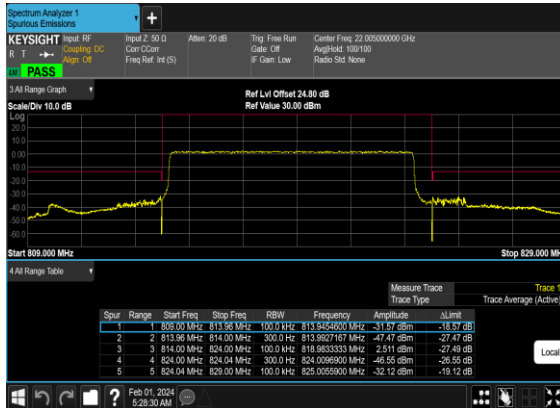


N26(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

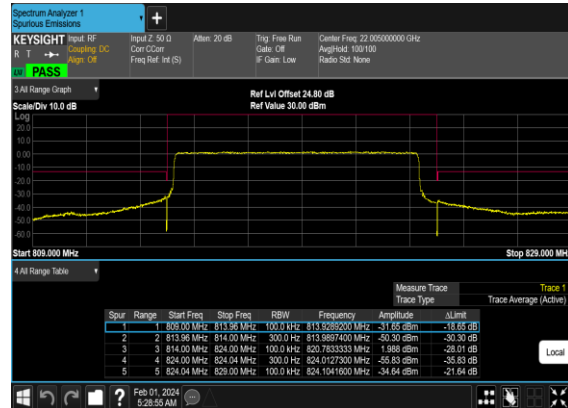


N26(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

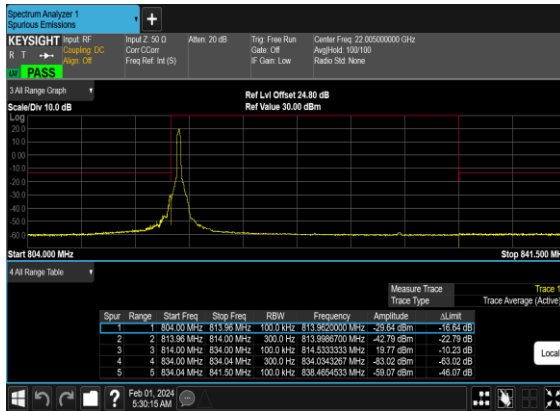


N26(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

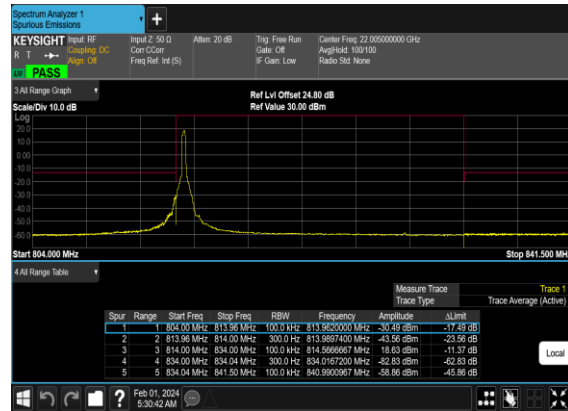


N26(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_Mid_CH

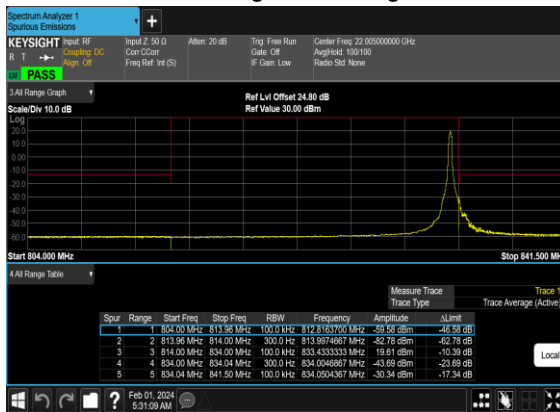


N26(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_Mid_CH

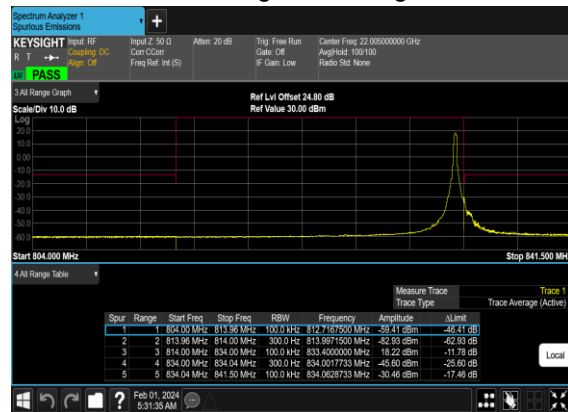

N26(20M)_DFT-s- OFDM_BPSK_Outer_Full_Mid_CH

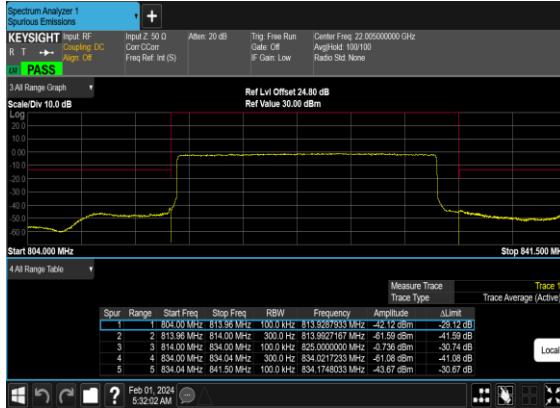

N26(20M)_DFT-s- OFDM_QPSK_Outer_Full_Mid_CH

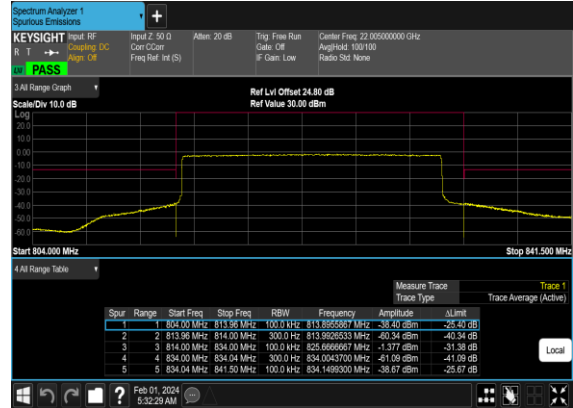



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Carl Ni	Temperature :	22~23°C
		Relative Humidity :	40~42%

n26 SA / NR 20MHz / QPSK								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1632	-65.80	-13	-52.80	-72.77	1.58	10.70	H
	2448	-61.91	-13	-48.91	-70.16	2.102	12.50	H
	3264	-60.19	-13	-47.19	-69.08	2.856	13.90	H
	1632	-65.17	-13	-52.17	-72.14	1.58	10.70	V
	2448	-59.95	-13	-46.95	-68.20	2.10	12.50	V
	3264	-60.23	-13	-47.23	-69.12	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.