

	    CERTIFICATE 2518.08 MS ISO/IEC 17025 TESTING SAMM NO. 0825																																						
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn. Bhd. Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.	FCC / ISCED TEST REPORT Report Revision : Rev.A																																						
<table border="0"> <tr> <td>Date/s Tested</td> <td>: 18-Sep-2020 - 04-Nov-2020</td> <td rowspan="10">  </td> </tr> <tr> <td>Report Issue Date</td> <td>: 05-Nov-2020</td> </tr> <tr> <td>Manufacturer/Location</td> <td>: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900, Bayan Lepas, Penang, Malaysia</td> </tr> <tr> <td>Requestor</td> <td>: NUR AYUNI BINTI ALBAKRI</td> </tr> <tr> <td>Product Type</td> <td>: Mobile</td> </tr> <tr> <td>Product Version (PMN)</td> <td>: XPR 5550e</td> </tr> <tr> <td>Model Number (HVIN)</td> <td>: AAM28JNN9RA1AN (PMUD2566C)(IC MODEL: PMUD2566CBMNA)</td> </tr> <tr> <td>Frequency Band</td> <td>: 2.412-2.462 GHz</td> </tr> <tr> <td>Max RF Output Power</td> <td>: 802.11b - 17.8 mWatts 802.11g - 13.2mWatts 802.11n - 8.3 mWatts</td> </tr> <tr> <td>Applicant Name</td> <td>: Motorola Solutions Inc</td> </tr> <tr> <td>Applicant Address</td> <td colspan="2">8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322</td> </tr> <tr> <td>FCC Registrations</td> <td colspan="2">: 461337</td> </tr> <tr> <td>ISCED Registrations</td> <td colspan="2">: MY0001</td> </tr> <tr> <td>Firmware Version (FVIN)</td> <td colspan="2">: D02.20.02.0111</td> </tr> <tr> <td colspan="3"> The equipment was tested accordance to the requirement listed below: <table border="0"> <tr> <td>(2.4GHz Wifi) 47CFR Part 15C ISCED RSS 247 Issue 2 February 2017</td> <td>PASS</td> </tr> </table> </td> </tr> </table>		Date/s Tested	: 18-Sep-2020 - 04-Nov-2020		Report Issue Date	: 05-Nov-2020	Manufacturer/Location	: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900, Bayan Lepas, Penang, Malaysia	Requestor	: NUR AYUNI BINTI ALBAKRI	Product Type	: Mobile	Product Version (PMN)	: XPR 5550e	Model Number (HVIN)	: AAM28JNN9RA1AN (PMUD2566C)(IC MODEL: PMUD2566CBMNA)	Frequency Band	: 2.412-2.462 GHz	Max RF Output Power	: 802.11b - 17.8 mWatts 802.11g - 13.2mWatts 802.11n - 8.3 mWatts	Applicant Name	: Motorola Solutions Inc	Applicant Address	8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322		FCC Registrations	: 461337		ISCED Registrations	: MY0001		Firmware Version (FVIN)	: D02.20.02.0111		The equipment was tested accordance to the requirement listed below: <table border="0"> <tr> <td>(2.4GHz Wifi) 47CFR Part 15C ISCED RSS 247 Issue 2 February 2017</td> <td>PASS</td> </tr> </table>			(2.4GHz Wifi) 47CFR Part 15C ISCED RSS 247 Issue 2 February 2017	PASS
Date/s Tested	: 18-Sep-2020 - 04-Nov-2020																																						
Report Issue Date	: 05-Nov-2020																																						
Manufacturer/Location	: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900, Bayan Lepas, Penang, Malaysia																																						
Requestor	: NUR AYUNI BINTI ALBAKRI																																						
Product Type	: Mobile																																						
Product Version (PMN)	: XPR 5550e																																						
Model Number (HVIN)	: AAM28JNN9RA1AN (PMUD2566C)(IC MODEL: PMUD2566CBMNA)																																						
Frequency Band	: 2.412-2.462 GHz																																						
Max RF Output Power	: 802.11b - 17.8 mWatts 802.11g - 13.2mWatts 802.11n - 8.3 mWatts																																						
Applicant Name	: Motorola Solutions Inc																																						
Applicant Address	8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322																																						
FCC Registrations	: 461337																																						
ISCED Registrations	: MY0001																																						
Firmware Version (FVIN)	: D02.20.02.0111																																						
The equipment was tested accordance to the requirement listed below: <table border="0"> <tr> <td>(2.4GHz Wifi) 47CFR Part 15C ISCED RSS 247 Issue 2 February 2017</td> <td>PASS</td> </tr> </table>			(2.4GHz Wifi) 47CFR Part 15C ISCED RSS 247 Issue 2 February 2017	PASS																																			
(2.4GHz Wifi) 47CFR Part 15C ISCED RSS 247 Issue 2 February 2017	PASS																																						
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																																							
Prepared By:  GAN BOON TEONG Test Personnel	Approved Signatory: VINCENT FOONG CHUEN KIT Responsible Engineer																																						

Table of Contents

1.0. General Information.....	3
1.1. Channel number and frequency information:	3
2.0. Summary of Test Results	4
3.0. Measurement Uncertainty	4
4.0. Equipment List.....	5
5.0. Test Mode Applicability and Test Channel Detail	6
6.0. Transmitter Test Parameters.....	9
6.1. 6dB Channel Bandwidth.....	9
6.1.1. Test Setup	9
6.1.2. Test Limits:	9
6.1.3. Test Data:.....	10
6.2. Conducted RF Output Power	16
6.2.1. Test Setup	16
6.2.2. Test Limits:	16
6.2.3. Test Data:.....	17
6.3. Duty Cycle of the test signal	20
6.3.1. Test Setup	20
6.3.2. Test Data	21
6.4. Maximum Peak Power Spectral Density	24
6.4.1. Test Setup	24
6.4.2. Test Limits	24
6.4.3. Test Result	24
6.5. Conducted Spurious Emission	25
6.5.1. Test Setup	25
6.5.2. Test Limits:	25
6.5.3. Test Result	25
6.6. Band edge Conducted Spurious Emission	26
6.6.1. Test Setup	26
6.6.2. Test Limits:	26
6.6.3. Test Result	26
6.7. Radiated Emission within restricted Bands	27
6.7.1. Test Setup	27
6.7.2. Test Limits:	28
6.7.3. Test Data:.....	29
6.8. AC Powerline Conducted Emission.....	36
6.8.1. Test Setup	36
6.8.2. Test Limits:	36
6.8.3. Test Result	37

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	04-Nov-2020	Gan Boon Teong

1.0. General Information

EUT Description:

Technologies	2.4GHz Wi-Fi
TX Frequency range	2412MHz – 2462MHz
Modulation Type	DSSS, OFDM
Connector type	PROGRAMMING, TEST & ALIGNMENT CABLE
Antenna type	INVERTED FANTENNA

1.1. Channel number and frequency information:

There are two bandwidth systems.

For 20MHz Bandwidth systems (802.11b, 802.11g, 802.11n), use channel 1 ~ channel 11

For 40MHz Bandwidth systems (802.11n), use channel 3 ~ channel 9

Channel	Frequency	Channel	Frequency
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
IMPRES 4-WAY NAVIGATION KEYPAD MICROPHONE WITH ENHANCED AUDIO	MOTOROLA	RMN5127C-C1
POWER CABLE TO BATTERY, 6M (20 FT.), 20 AMP (1- 45W)	MOTOROLA	13921-HKN4192B-1

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

FCC 47 CFR Part 15 Subpart C
KDB 558074 D01 15.247 Meas Guidance v05
ANSI C63.10-2013

Deviation from standard

Not applicable as no deviation from standard test method

Modifications to EUT

A pigtail was soldered out of the board to enable conducted measurements. Radiated measurements were done with the unit unmodified.

2.0. Summary of Test Results

FCC Clause	IC Clause	Test Item	Result	Remark	Serial number tested	Tested by
15.247 (a)(2)	RSS-247 5.2(a)	DTS & 99% Channel Bandwidth	Pass	Highest 99% OCB: 802.11b: 13.455 MHz(13M5G1D) 802.11g: 16.791 MHz(16M8D1D) 802.11n: 17.920 MHz(17M9D1D)	511TWP5900	Gan
15.247 (b)(3)	RSS-247 5.4(d)	Conducted RF Output Power (Average)	NA	Highest output power: 802.11b: 11.937 dBm (15.62 mW) 802.11g: 10.446 dBm(11.08 mW) 802.11n: 8.328 dBm(6.80 mW)	NA	NA
15.247(e)	RSS-247 5.2(b)	Maximum Power Spectral Density	NA	References data from FCC ID AZ492FT7138 / ISED 109U-92FT7138	NA	NA
15.247(d)	RSS-247 5.5	Conducted Spurious Emissions	NA	References data from FCC ID AZ492FT7138 / ISED 109U-92FT7138	NA	NA
15.247 (d)	RSS-247 5.5	Band edge Conducted Spurious Emission	NA	References data from FCC ID AZ492FT7138 / ISED 109U-92FT7138	NA	NA
15.205, 15.209, 15.247 (d)	RSS-247 5.5	Radiated Emission within Restricted Bands	Pass	Worst case emission: 802.11n: 46.77dBuV/m	511TWP7151, 511TWP5907	Nazrin& Qawiman& Fendi
15.207	RSS-Gen 8.8	AC Power Line Conducted Emission	NA	Testing is not required, radio shall turn off during charging mode	NA	NA
15.203		Antenna requirement	NA	Internal antenna is not accessible to the enduser	NA	NA

***NOTE: The WiFi chipset is identical to FCC ID AZ492FT7138 / ISED 109U-92FT7138. The rest of conducted measurements are by similarity. Only worst case configuration of radiated emission based on FCC ID AZ492FT7138 / ISED 109U-92FT7138 is tested. As per KDB 484596 D01v01, the applicant takes full responsibility that data referenced represents compliance to the relevant rules for this current FCC ID.**

3.0. Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±dB)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	4.25
	200MHz ~ 1000MHz	4.25
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	4.96
	18GHz ~ 25GHz	4.96
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82

4.0. Equipment List

Bluetooth ATE # 1 (SW Version: Ate Main_3.1.10_R2)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SPECTRUM ANALYZER	FSEK30	838495/014	19-Jan-20	19-Jan-21
POWER SUPPLY	6652A	3541A02565	26-Jun-20	26-Jun-21
SPECTRUM ANALYZER	E4445A	MY45301089	07-Sep-20	07-Sep-21
CHAMBER	SH-641	92002639	9-Dec-19	9-Dec-20
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA

Radiated Emission Station (SW Version: EMC FCC RE v1.6.2)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	720	21-Mar-19	21-Mar-21
DRG HORN FREQ.	SAS-571	1143	14-Feb-19	14-Feb-21
POWER SUPPLY	6032A	2615A01178	21-May-20	21-May-21
SIGNAL GENERATOR	SMB 100A	181117	8-Nov-18	8-Nov-21
EMI TEST RECEIVER	ESW44	101750	24-Jul-19	24-Nov-20
EMI TEST RECEIVER	ESIB26	100017	19-Jul-19	19-Nov-20
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	Not Required	Not Required
BILOG ANTENNA	CBL6112B	2964	23-Apr-19	23-Apr-21
BILOG ANTENNA	CBL6112B	2950	8-Jul-19	8-Jul-21
DATA LOGGER	SDL500	A.016776	4-Jun-20	4-Jun-21
SYSTEM CONTROLLER	SC104V	050806-1	Not Required	Not Required
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	Not Required	Not Required
ANTENNA POSITIONING TOWER	TLT2	NA	Not Required	Not Required
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	27-Jan-20	27-Jan-21
18 - 40GHz PREAMPLIFIER	MITEQ Hi GAIN SUCOFLEX	001	Not Required	Not Required
PREAMPLIFIER	PAM-0118	269	24-May-19	24-May-22
LOOP ANTENNA	6502	00203479	21-Jan-20	21-Jan-21

5.0. Test Mode Applicability and Test Channel Detail

The device employs MIMO technology. Below are the possible configurations.

WLAN Configurations		Mode					
		SISO		Spatial Diversity Multiplexing (MIMO)		Cyclic Delay Diversity (MIMO)	
2.4GHz	Antenna	Primary	Secondary	Primary	Secondary	Primary	Secondary
	802.11b	√	√	x	x	x	x
	802.11g	√	√	x	x	x	x
	802.11n (HT20)	√	√	x	x	x	x
	802.11n (HT40)	x	x	x	x	x	x

√ = Support;
 x = NOT Support

Note: This Device supports simultaneous transmission operation, which allows for two SISO or two MIMO channels to operate independent of one another in the 2.4GHz band on each antenna. 802.11n mode is capable of transmitting simultaneously on two antennas using Cyclic Delay Diversity and Spatial Diversity Multiplexing (2x2 MIMO).

The following tables show the worst case configurations determined during testing. The data for these configurations is contained in this test report.

Radiated Emission Test (Above 1GHz)

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Modulation	Available Channel	Tested Channel	Modulation Technology	Data Modulation Type	Date Rate (Mbps)	Mode	Environmental Conditions
Test Mode	802.11b	1 to 11	1,6,11	DSSS	QPSK	1	SISO	23.3°C, 69.6%RH
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6	SISO	23.3°C, 69.6%RH
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5	SISO CDD (MIMO)	23.3°C, 69.6%RH
Test Mode	802.11n (HT40)	3 to 9	3,6,9	OFDM	BPSK	6.5	SISO CDD (MIMO)	NA

Radiated Emission Test (Below 1GHz)

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Modulation	Available Channel	Tested Channel	Modulation Technology	Data Modulation Type	Date Rate (Mbps)	Mode	Environmental Conditions
Test Mode	802.11b	1 to 11	1,6,11	DSSS	QPSK	1	SISO	23.3°C, 69.6%RH
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6	SISO	23.3°C, 69.6%RH
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5	SISO CDD (MIMO)	23.3°C, 69.6%RH
Test Mode	802.11n (HT40)	3 to 9	3,6,9	OFDM	BPSK	6.5	SISO CDD (MIMO)	NA

Power Line Conducted Emission Test

☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☐ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Modulation	Available Channel	Tested Channel	Modulation Technology	Data Modulation Type	Data Rate (Mbps)	Environmental Conditions
Application Mode	802.11bgn mixed	1 to 11	AUTO	DSSS, OFDM	AUTO	AUTO	NA

Antenna Port Conducted Measurement:

☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Modulation	Available Channel	Tested Channel	Modulation Technology	Data Modulation Type	Data Rate (Mbps)	Mode	Environmental Conditions
Test Mode	802.11b	1 to 11	1,6,11	DSSS	QPSK	1	SISO	25°C, 54.8%RH
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6	SISO	25°C, 54.8%RH
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5	SISO CDD (MIMO)	25°C, 54.8%RH
Test Mode	802.11n (HT40)	1 to 11	3,6,9	OFDM	BPSK	6.5	SISO CDD (MIMO)	NA


Duty Cycle of Test Signal

802.11b, 802.11g and 802.11n : Duty cycle of test signal is $\geq 98\%$. (Refer to Clause 6.3 for duty cycle test signal)

6.0. Transmitter Test Parameters

6.1. 6dB Channel Bandwidth

6.1.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max hold
 - e. Sweep = auto
- e) Measure the freq different of two frequencies that were attenuated 6dB from peak of the emission & record the frequency difference as the emission bandwidth.
- f) Measure every antenna port by repeat the step above for MIMO measurement.


6.1.2. Test Limits:


Normal Condition (25 ° C)
≥ 500 kHz

6.1.3. Test Data:

802.11 b


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11b	DSSS	DBPSK	1	2412	9.846	13.455	Pass
802.11b	DSSS	DBPSK	1	2437	9.854	13.446	Pass
802.11b	DSSS	DBPSK	1	2462	9.988	13.451	Pass

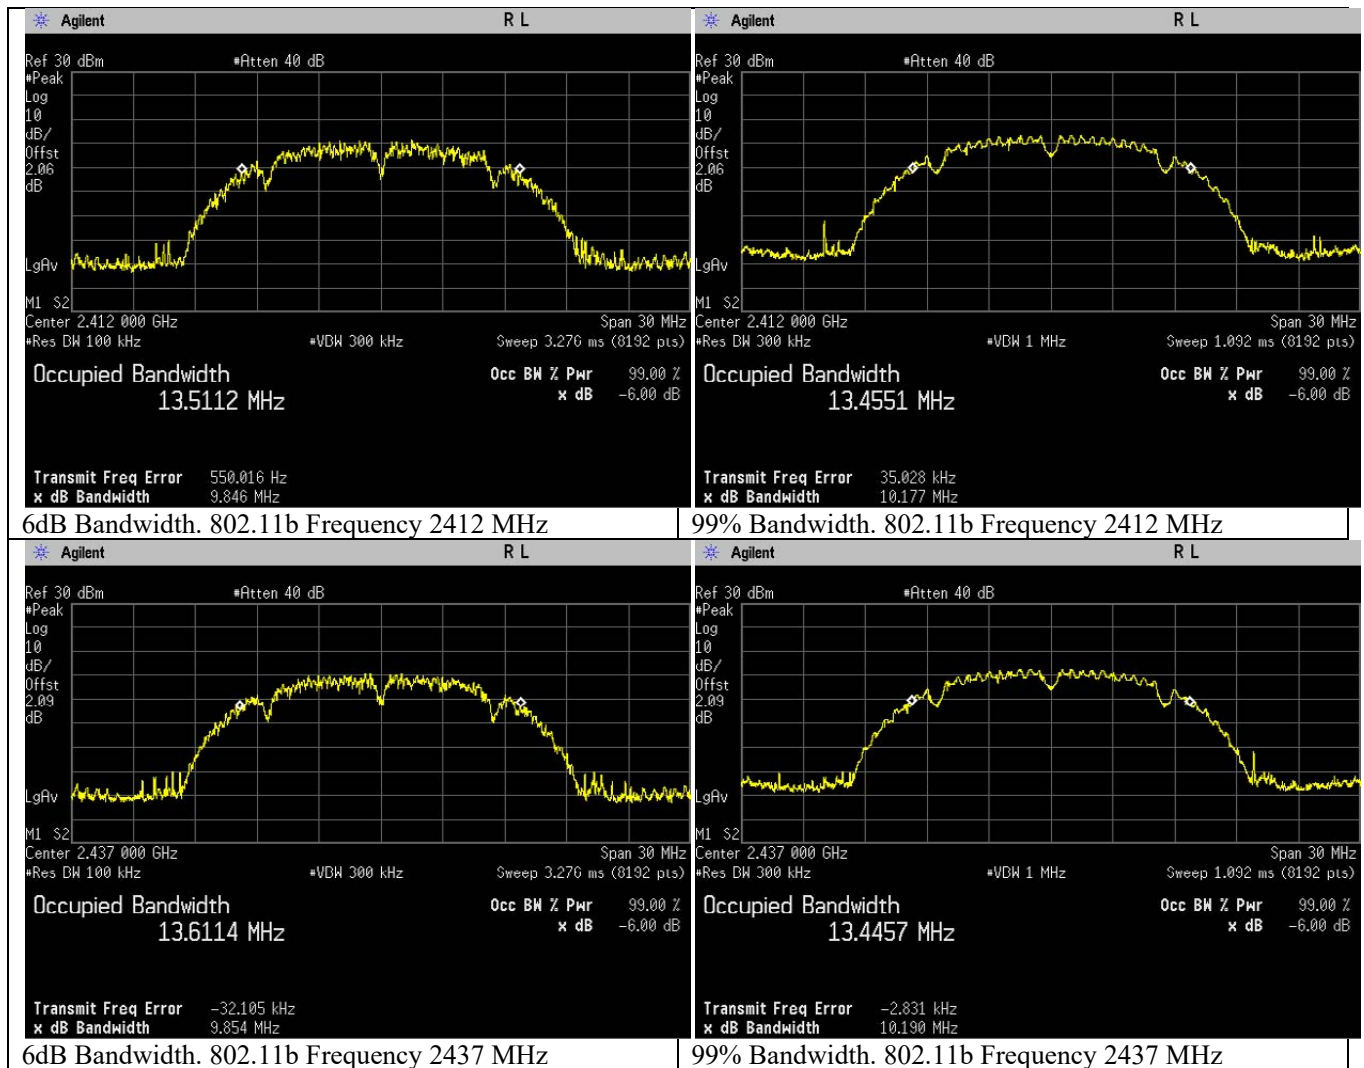


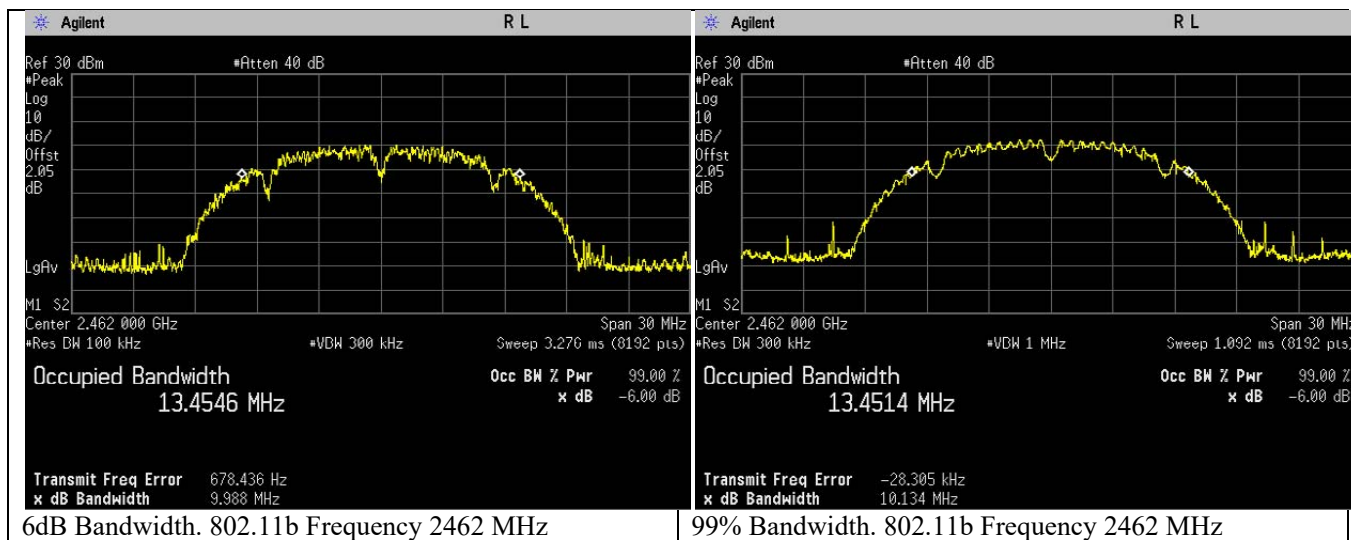

802.11 g


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11g	OFDM	BPSK	6	2412	16.360	16.789	Pass
802.11g	OFDM	BPSK	6	2437	16.383	16.791	Pass
802.11g	OFDM	BPSK	6	2462	16.371	16.780	Pass

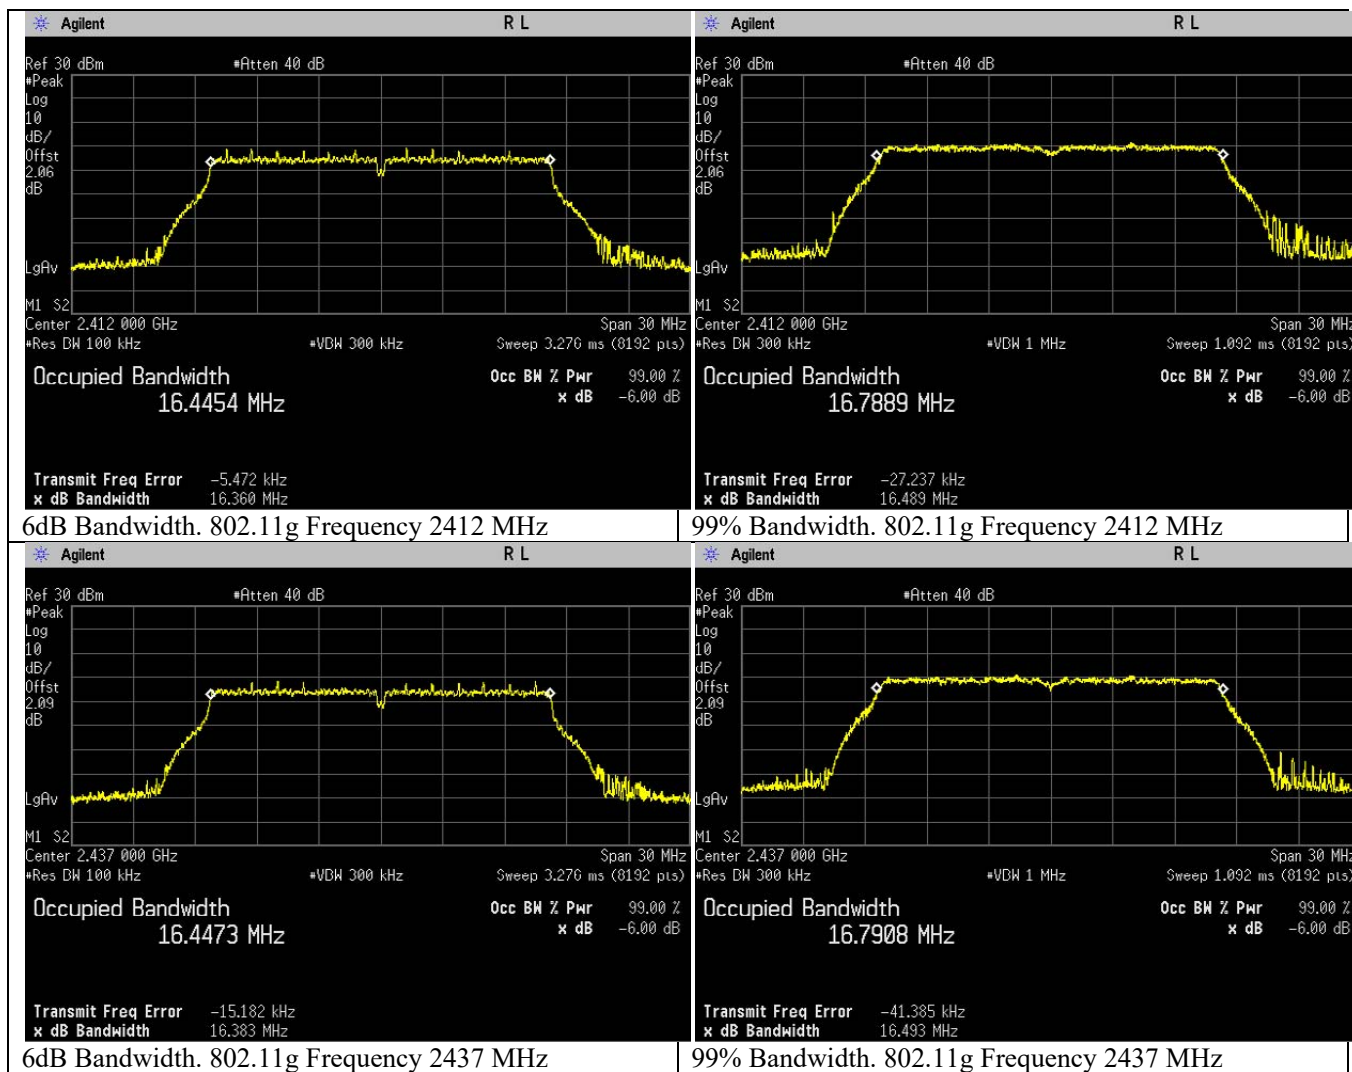

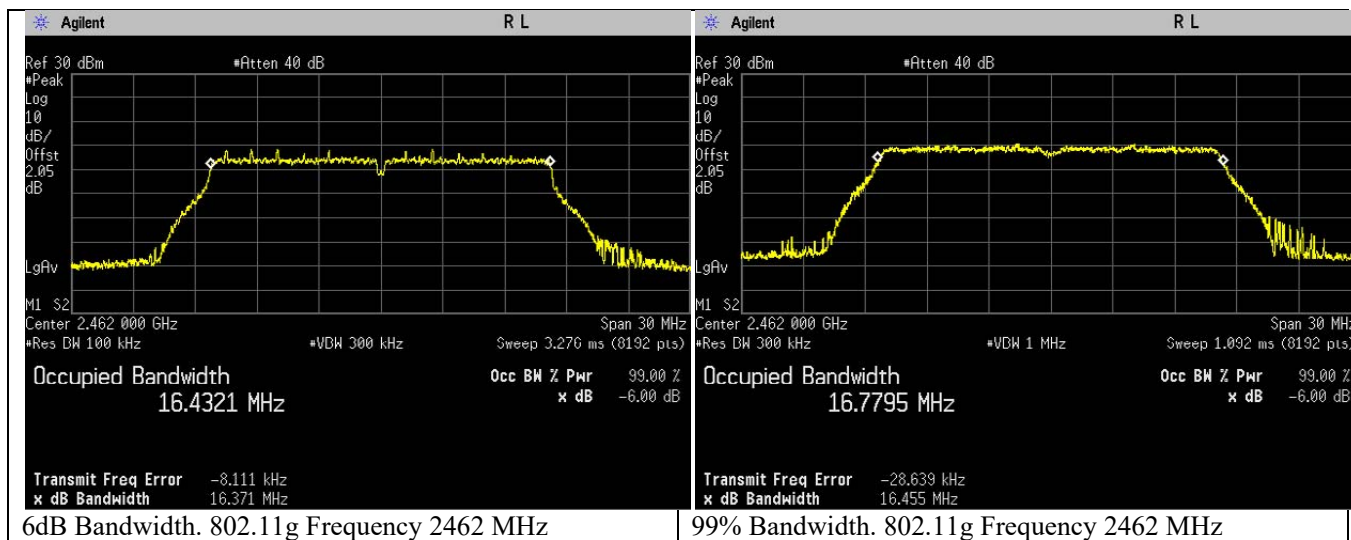


802.11n (HT20)


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11n	OFDM	BPSK	6.5	2412	17.622	17.893	Pass
802.11n	OFDM	BPSK	6.5	2437	17.600	17.920	Pass
802.11n	OFDM	BPSK	6.5	2462	17.590	17.898	Pass

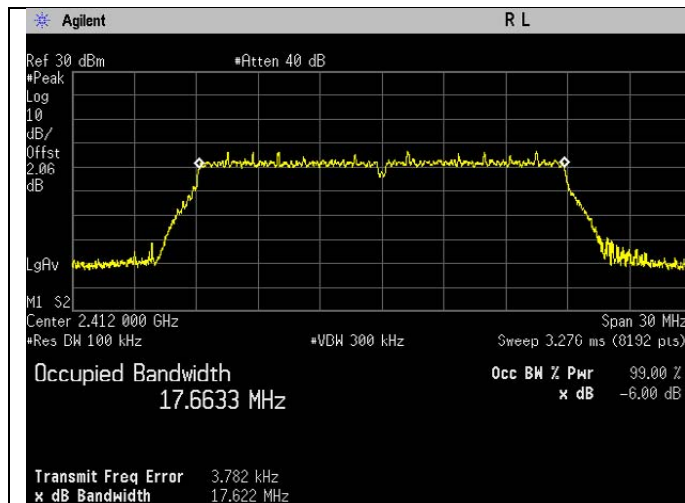


6dB Bandwidth. 802.11n Frequency 2412 MHz

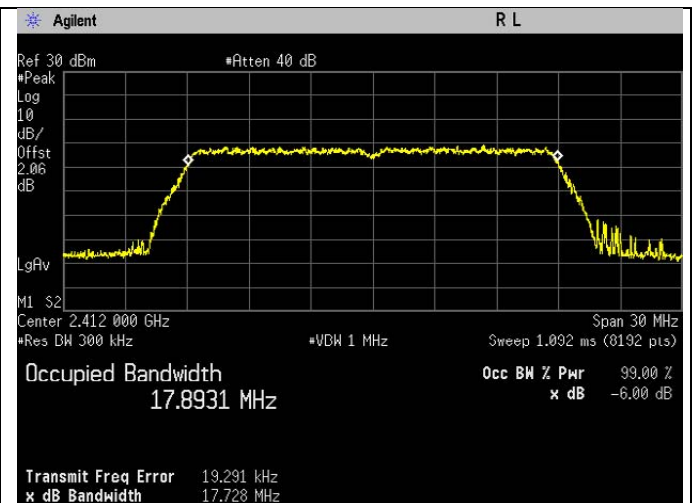


99% Bandwidth. 802.11n Frequency 2412 MHz

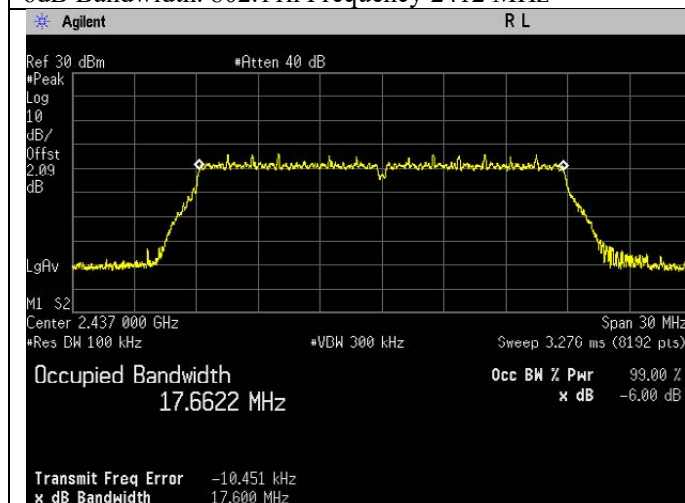

6dB Bandwidth. 802.11n Frequency 2437 MHz

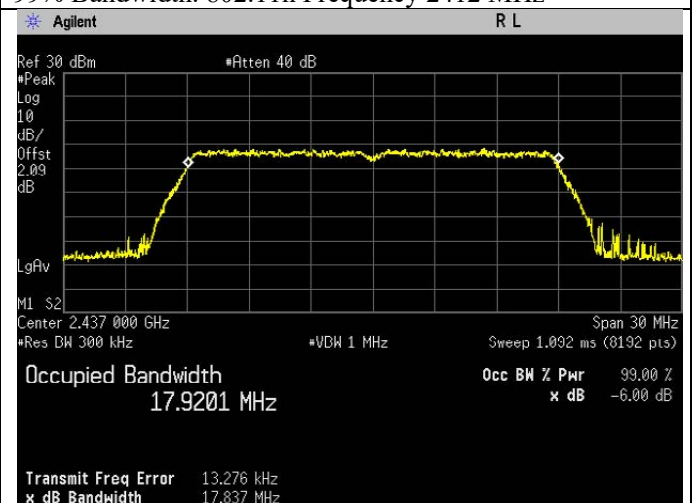


99% Bandwidth. 802.11n Frequency 2437 MHz

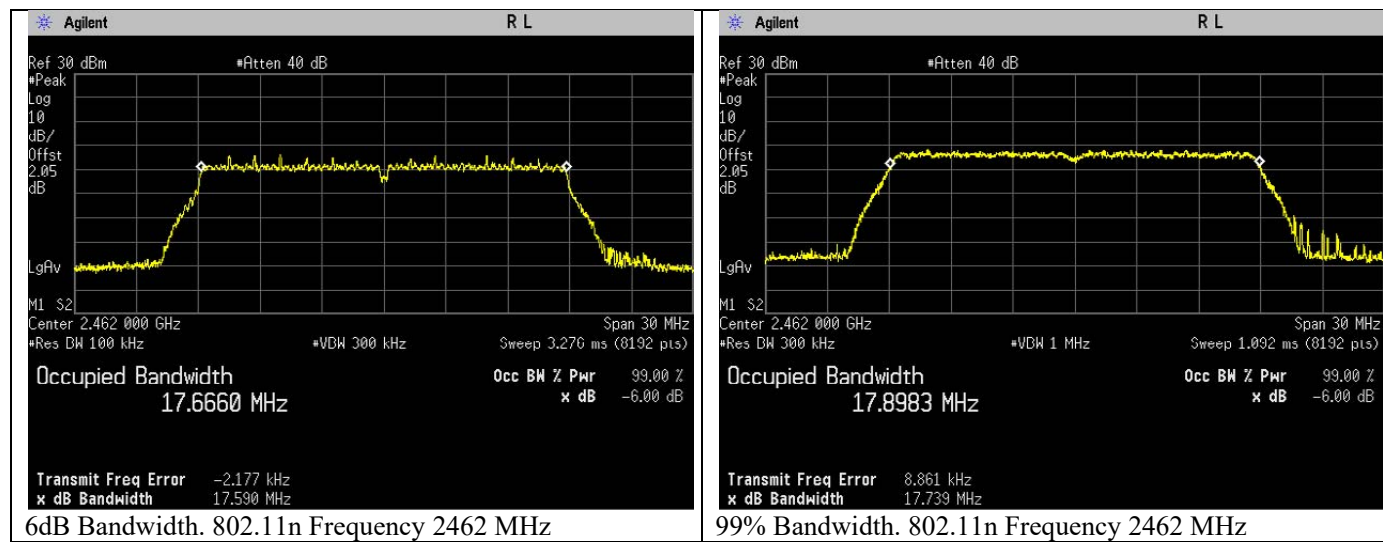

6.2. Conducted RF Output Power

6.2.1. Test Setup



Average

- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Measure the duty cycle of transmitter output signal.
- d) Setting of Spectrum analyzer :
 - a. Set the RBW = 300 kHz.
 - b. Set the VBW $\geq [3 \times \text{RBW}]$.
 - c. Set the span $\geq [1.5 \times \text{OBW bandwidth}]$.
 - d. Detector = average.
 - e. Sweep time = auto couple.
 - f. Trace mode = free run.
 - g. Allow trace to fully stabilize.
- e) Add in duty cycle correction into final test result.
- f) Duty cycle correction is calculated as below:
 $10 \log (1/x)$
- g) Measure every antenna port by repeat the step above for MIMO measurement.

6.2.2. Test Limits:


Normal Condition (25 ° C)
$\leq 1 \text{ Watt}(30 \text{ dBm})$

6.2.3. Test Data:


802.11b

Output Power = Band Power + Duty Cycle Factor
= Band Power + 0.057dBm


Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Output Power (dBm)	Status
802.11b	DSSS	DBPSK	1	2412	11.937	Pass
802.11b	DSSS	DBPSK	1	2437	11.530	Pass
802.11b	DSSS	DBPSK	1	2462	11.113	Pass

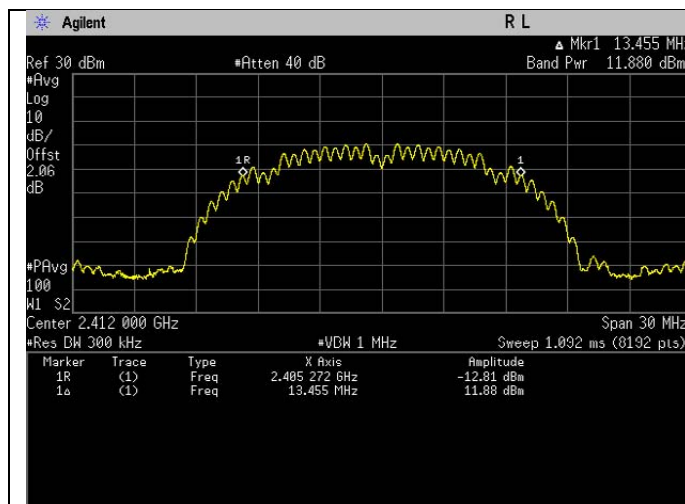


Frequency 802.11b 2412MHz

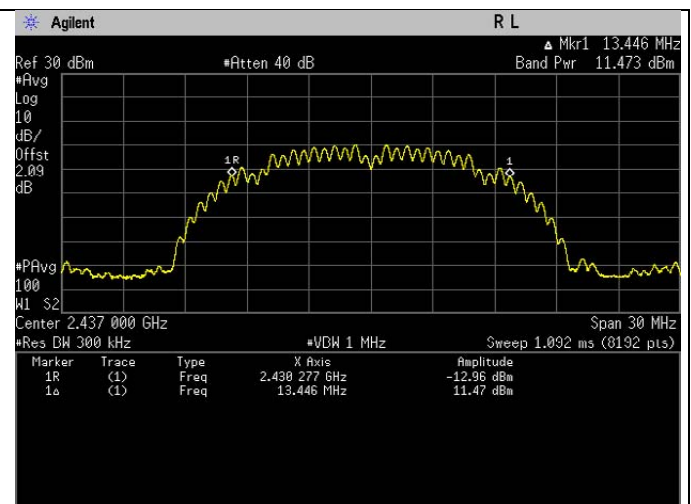

Frequency 802.11b 2437MHz

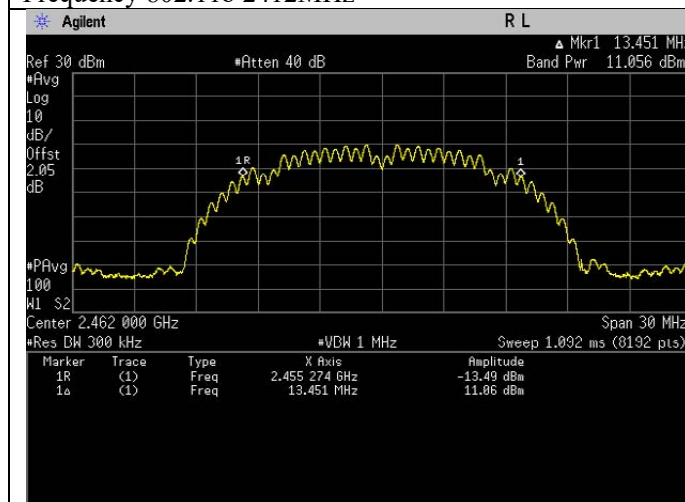

Frequency 802.11b 2462MHz

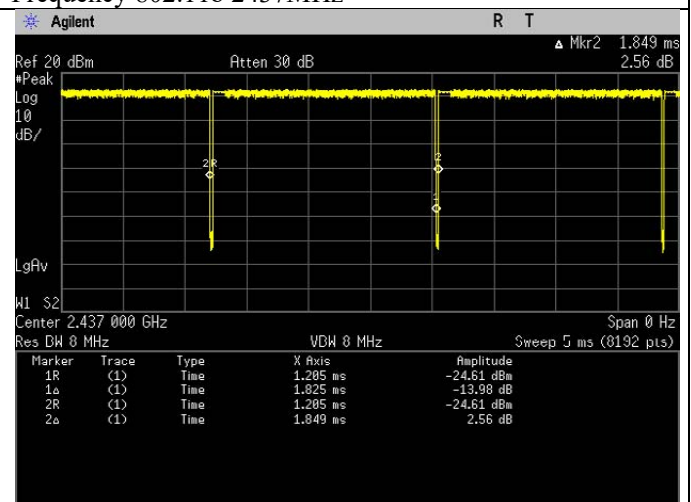


Duty Cycle


802.11g

Output Power = Band Power + Duty Cycle Factor
= Band Power + 0.033dBm


Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Output Power (dBm)	Status
802.11g	OFDM	BPSK	6	2412	10.446	Pass
802.11g	OFDM	BPSK	6	2437	10.058	Pass
802.11g	OFDM	BPSK	6	2462	9.767	Pass

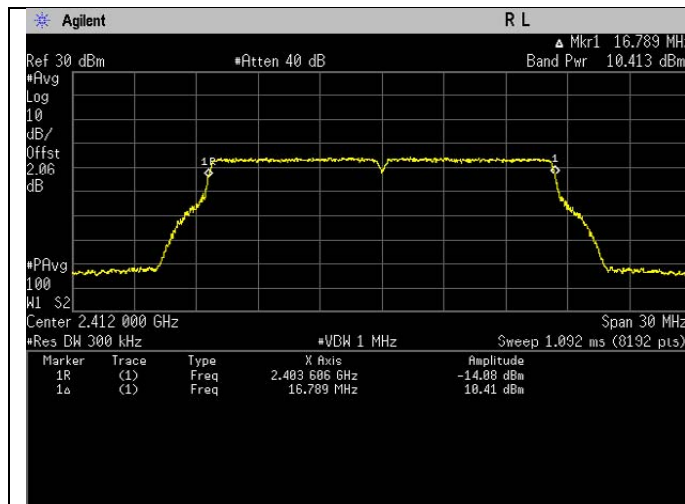


Frequency 802.11g 2412MHz

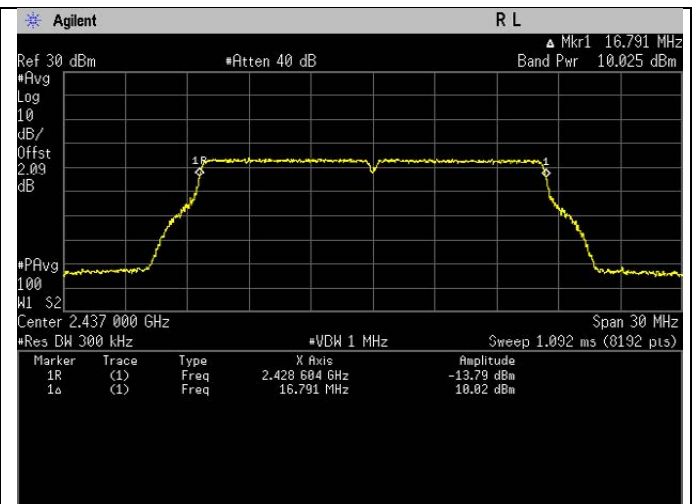

Frequency 802.11g 2437MHz

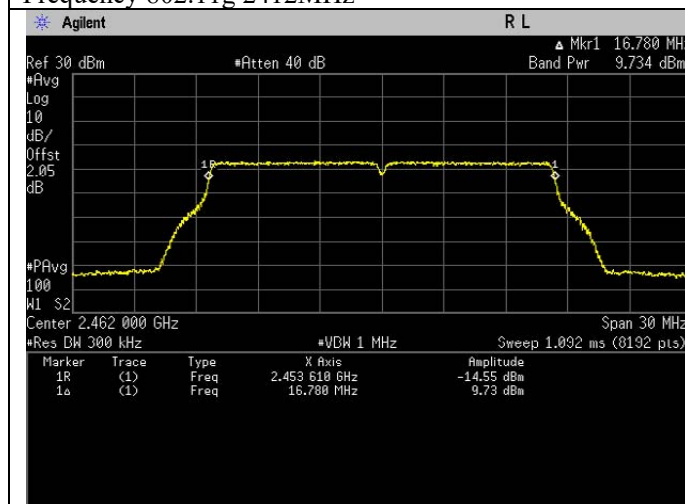

Frequency 802.11g 2462MHz

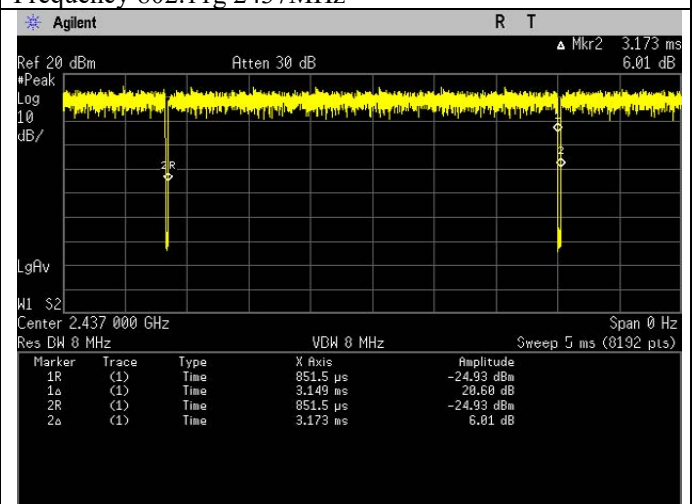


Duty Cycle


802.11n (HT20)

Output Power = Band Power + Duty Cycle Factor
= Band Power + 0.034dBm


Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Output Power (dBm)	Status
802.11n	OFDM	BPSK	6.5	2412	8.328	Pass
802.11n	OFDM	BPSK	6.5	2437	7.855	Pass
802.11n	OFDM	BPSK	6.5	2462	7.746	Pass

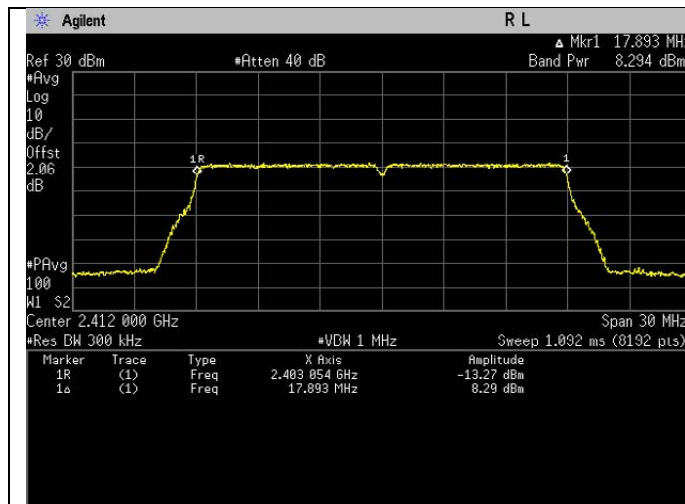


Frequency 802.11n 2412MHz

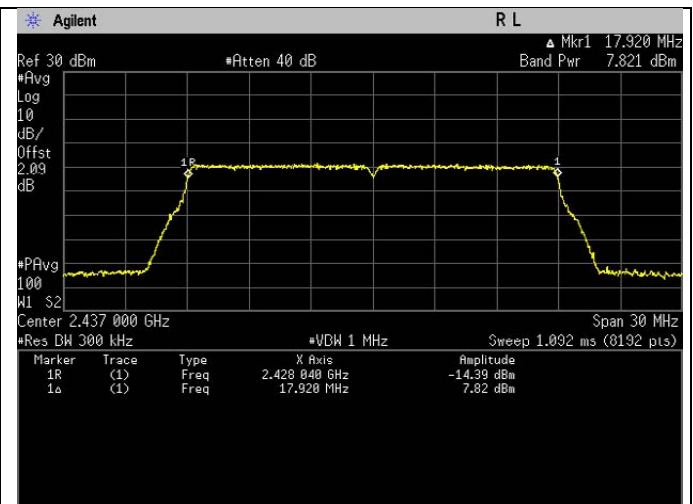

Frequency 802.11n 2437MHz

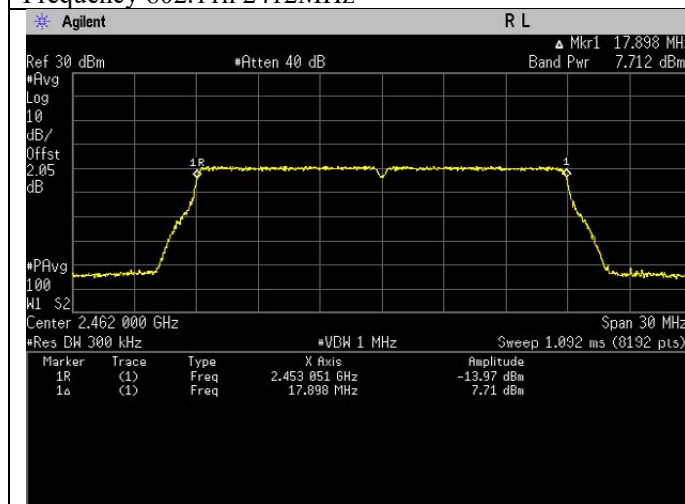


Frequency 802.11n 2462MHz

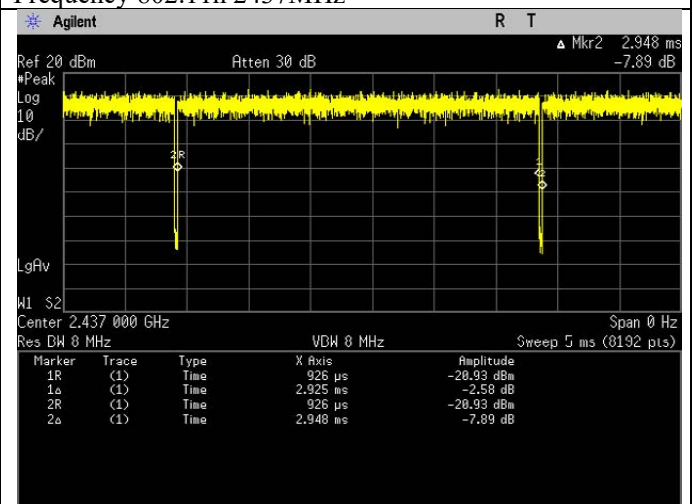

Duty Cycle

6.3.Duty Cycle of the test signal


6.3.1. Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. Set the RBW = 10 MHz or the highest RBW available on spectrum analyzer.
 - b. Set the VBW $\geq$ RBW.
 - c. Set the span $\geq$ $[1.5 \times \text{DTS bandwidth}]$.
 - d. Detector = Peak.
 - e. Sweep time = 10ms or others that allow to measure accurate duty cycle.
 - f. Trace mode = max hold.
 - g. Allow trace to fully stabilize.
- 5) Record the duty cycle as X and save the plot.
- 6) Measure every antenna port by repeat the step above for MIMO measurement.

6.3.2. Test Data

802.11b

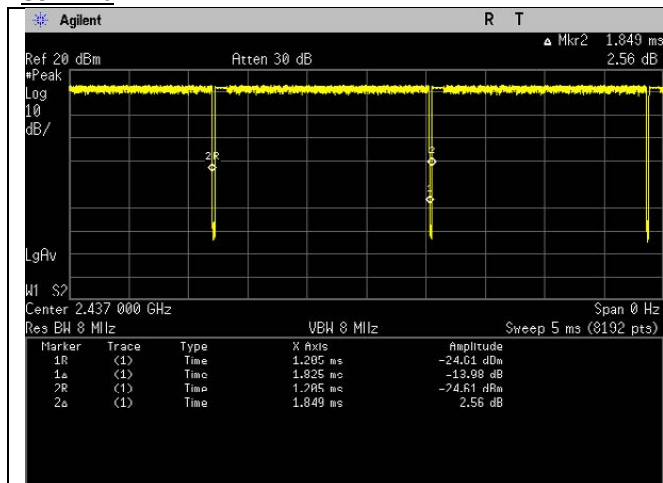


Duty Cycle

On time (ms)	1.825
On + Off Time (ms)	1.849
Duty cycle	0.9870
Duty Cycle factor	0.057

*Duty cycle = On time/ On +off time

*Duty Cycle factor = $10 \cdot \log(1/\text{Duty Cycle})$

802.11g

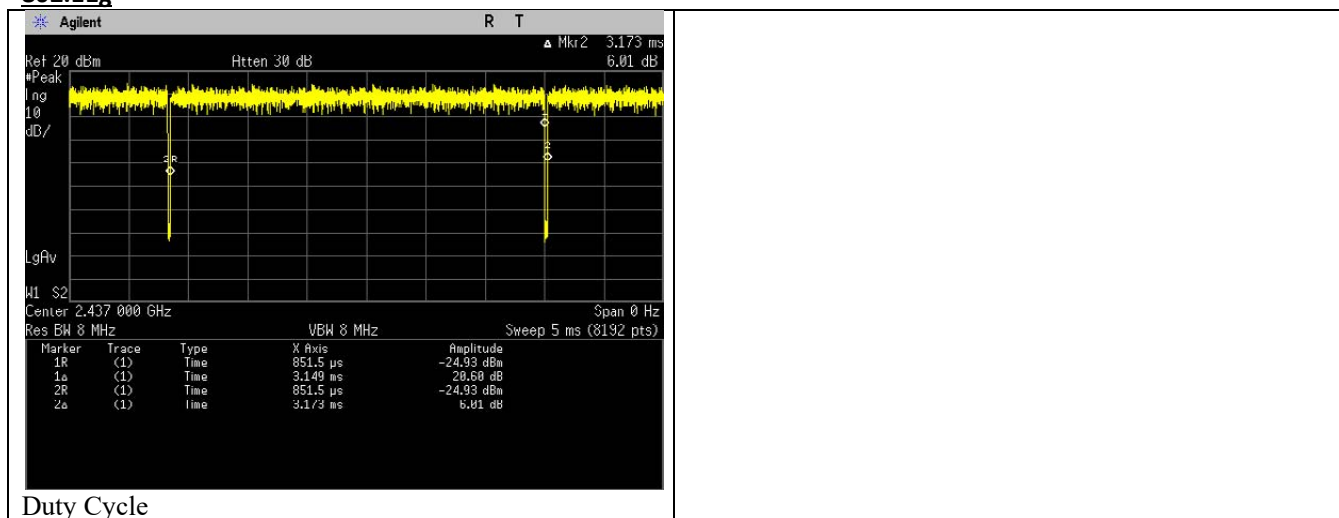


On time (ms)	3.149
On + Off Time (ms)	3.173
Duty cycle	0.9924
Duty Cycle factor	0.033

*Duty cycle = On time/ On +off time

*Duty Cycle factor = $10 \cdot \log(1/\text{Duty Cycle})$

802.11n (HT20)

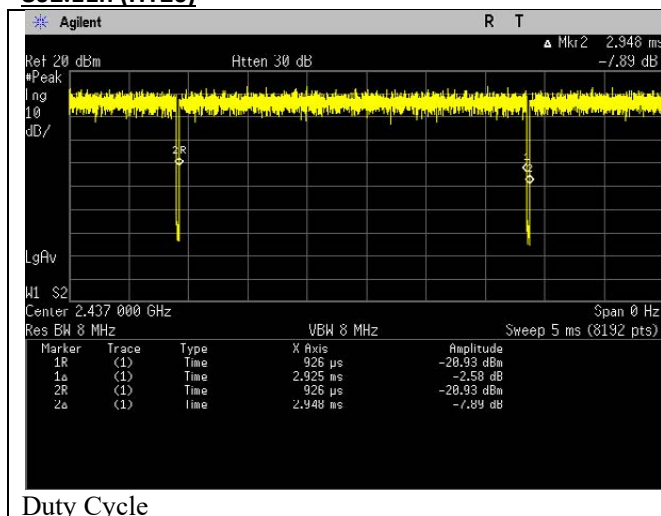

Duty Cycle


On time (ms)	2.925
On + Off Time (ms)	2.948
Duty cycle	0.9922
Duty Cycle factor	0.034

*Duty cycle = On time/ On +off time

*Duty Cycle factor = $10 \cdot \log(1/\text{Duty Cycle})$

6.4. Maximum Peak Power Spectral Density

6.4.1. Test Setup



Maximum Peak

- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. Set analyzer center frequency to DTS channel center frequency.
 - b. Set the span to 1.5 times the DTS bandwidth.
 - c. Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - d. Set the VBW $\geq [3 \times \text{RBW}]$.
 - e. Detector = peak.
 - f. Sweep time = auto couple.
 - g. Trace mode = max hold.
 - h. Allow trace to fully stabilize.
 - i. Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
- e) Measure every antenna port by repeat the step above for MIMO measurement.

6.4.2. Test Limits


Normal Condition (25 ° C)
$\leq 8 \text{ dBm/3kHz}$

6.4.3. Test Result

N/A

6.5. Conducted Spurious Emission

6.5.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- e) Use the peak marker function to measure highest emission and scan up to 10th harmonic.
- f) Measure every antenna port by repeat the step above for MIMO measurement.

6.5.2. Test Limits:


Normal Condition (25 ° C)
Shall be at least 30 dB below peak (max) power.

6.5.3. Test Result

N/A

6.6. Band edge Conducted Spurious Emission

6.6.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- e) Use the peak marker function to measure highest emission.
- f) Measure every antenna port by repeat the step above for MIMO measurement.

6.6.2. Test Limits:


Normal Condition (25 ° C)
Shall be at least 30 dB below peak (max) power.

6.6.3. Test Result

N/A

6.7. Radiated Emission within restricted Bands

6.7.1. Test Setup

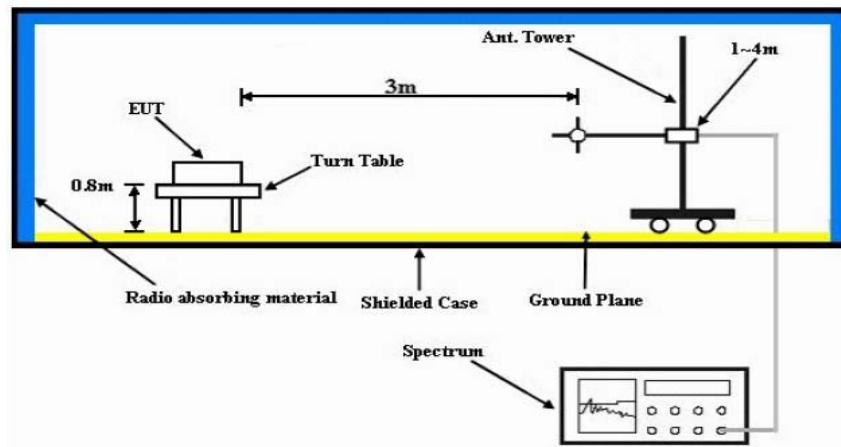

- The EUT is placed on the top of a rotating table 0.8m above the ground (<1GHz) and 1.5m above the ground (>1GHz) at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

6.7.2. Test Limits:


Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.


VERTICAL, QPK

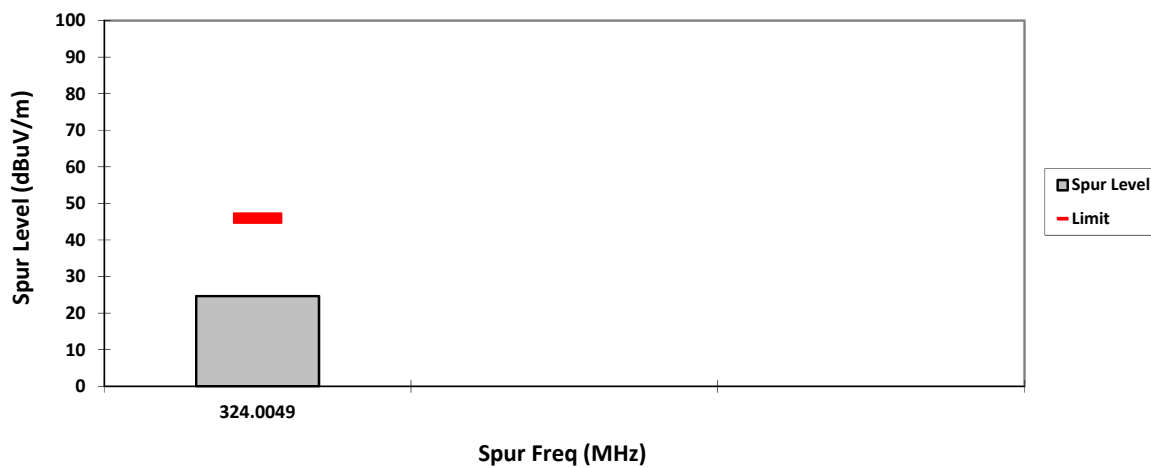


HORIZONTAL, QPK

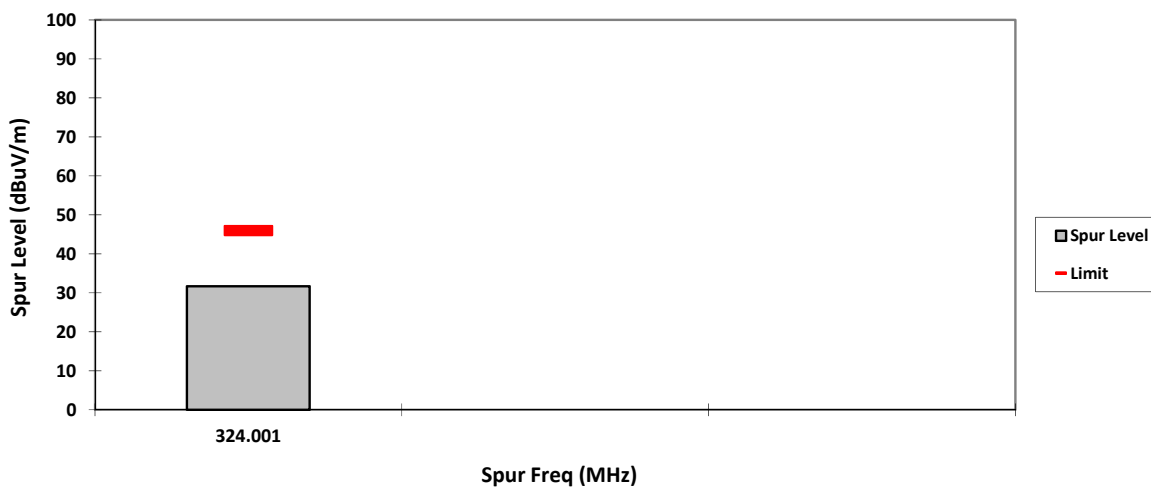

VERTICAL, PK

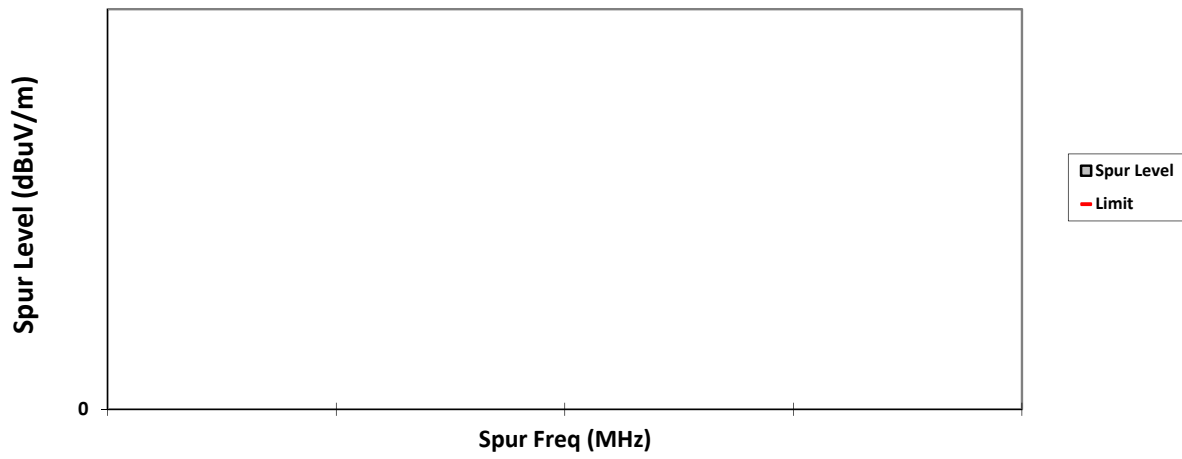


HORIZONTAL, PK

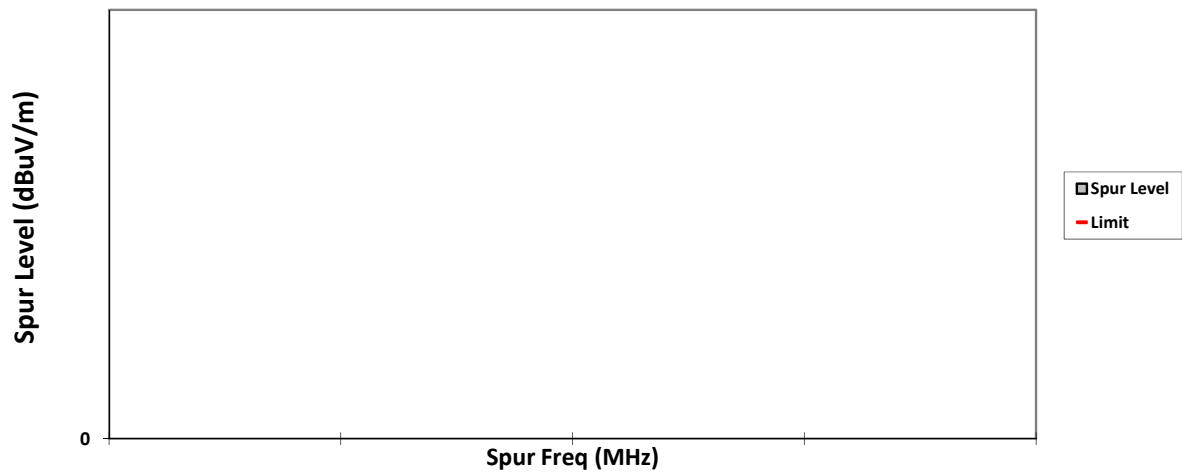


VERTICAL, AV




HORIZONTAL, AV

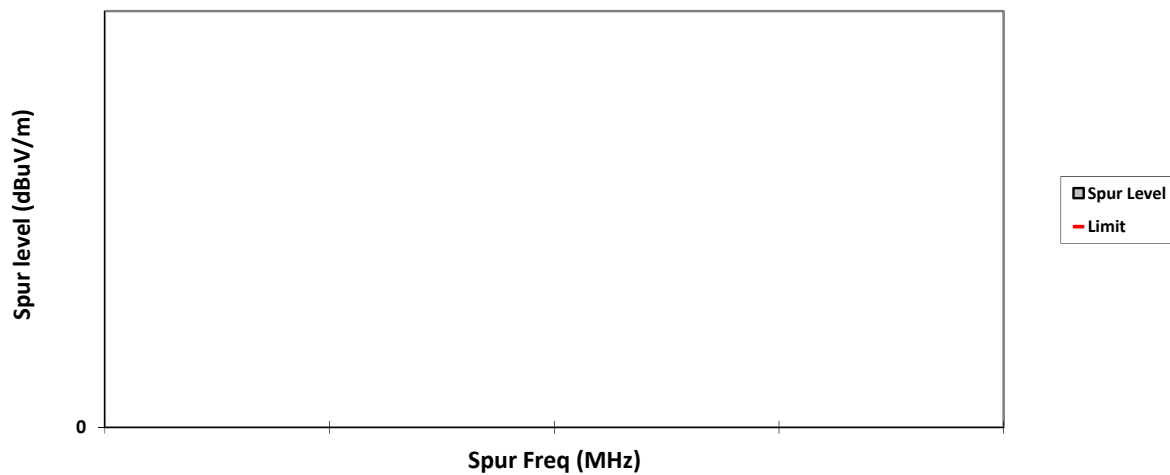


Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

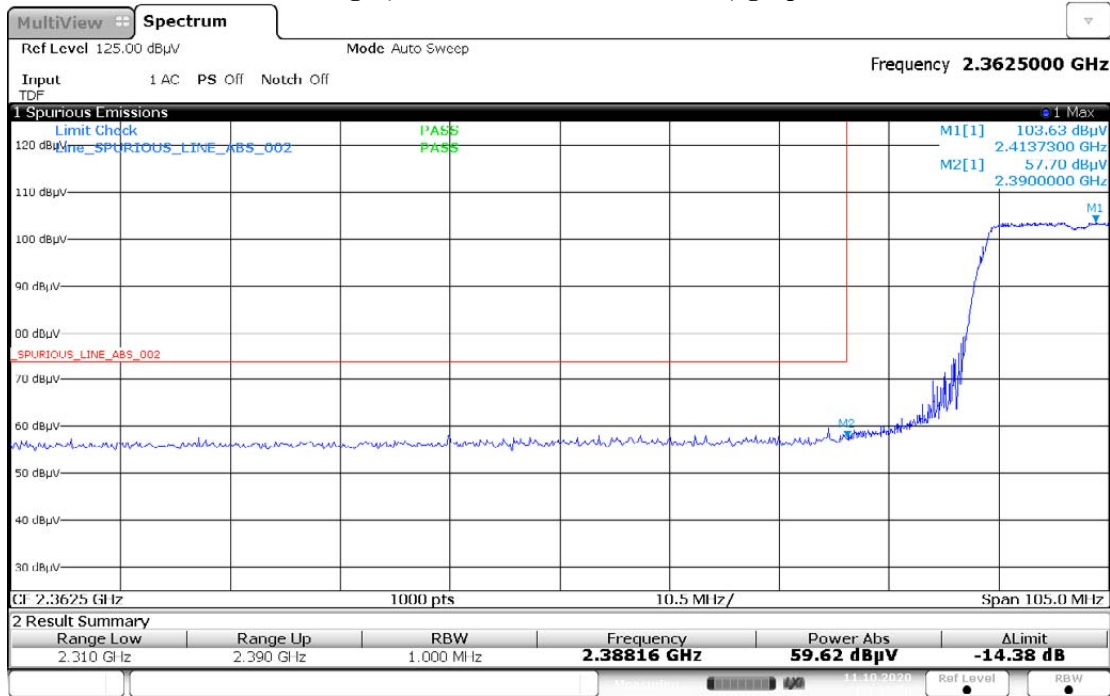

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

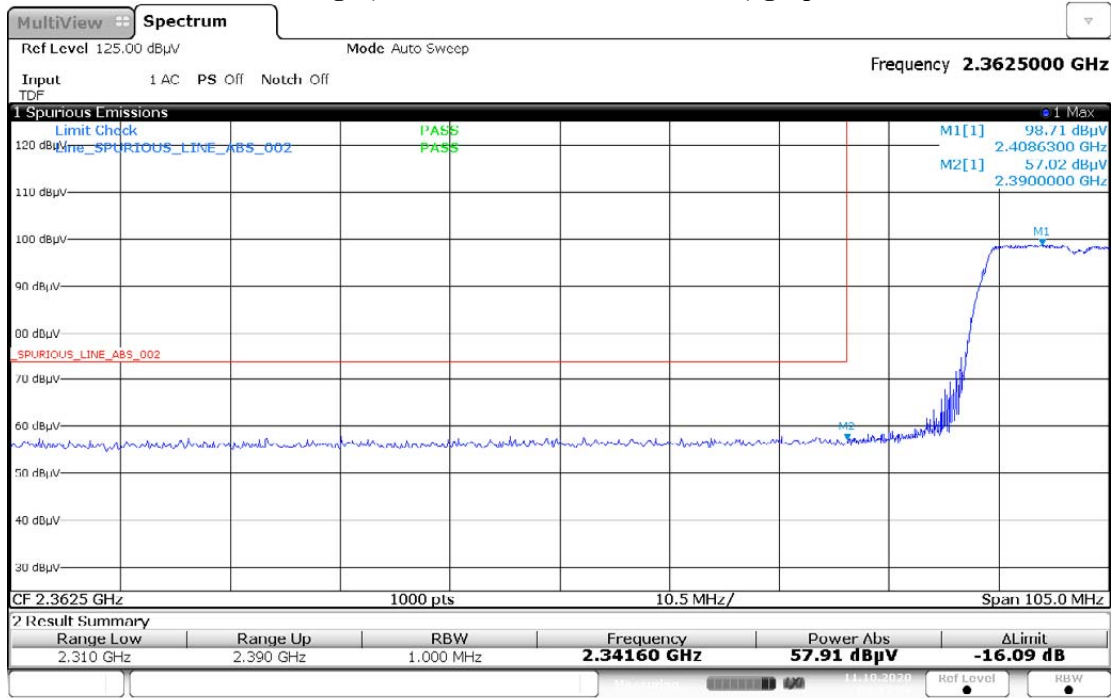


Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

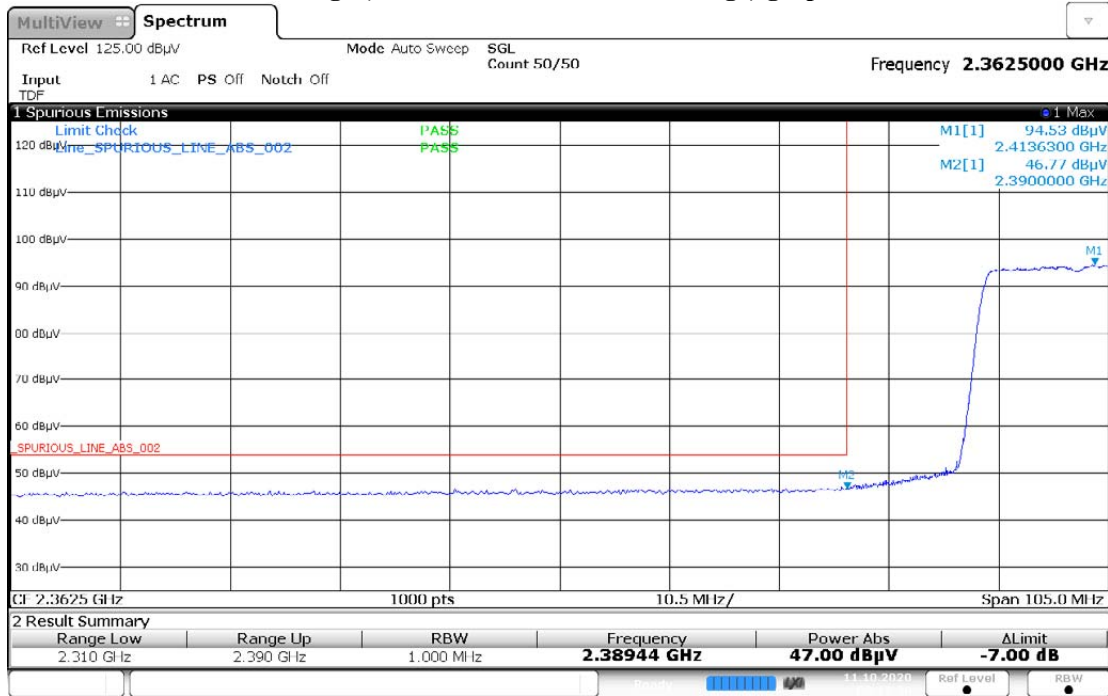

03:17:37 11.10.2020


Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

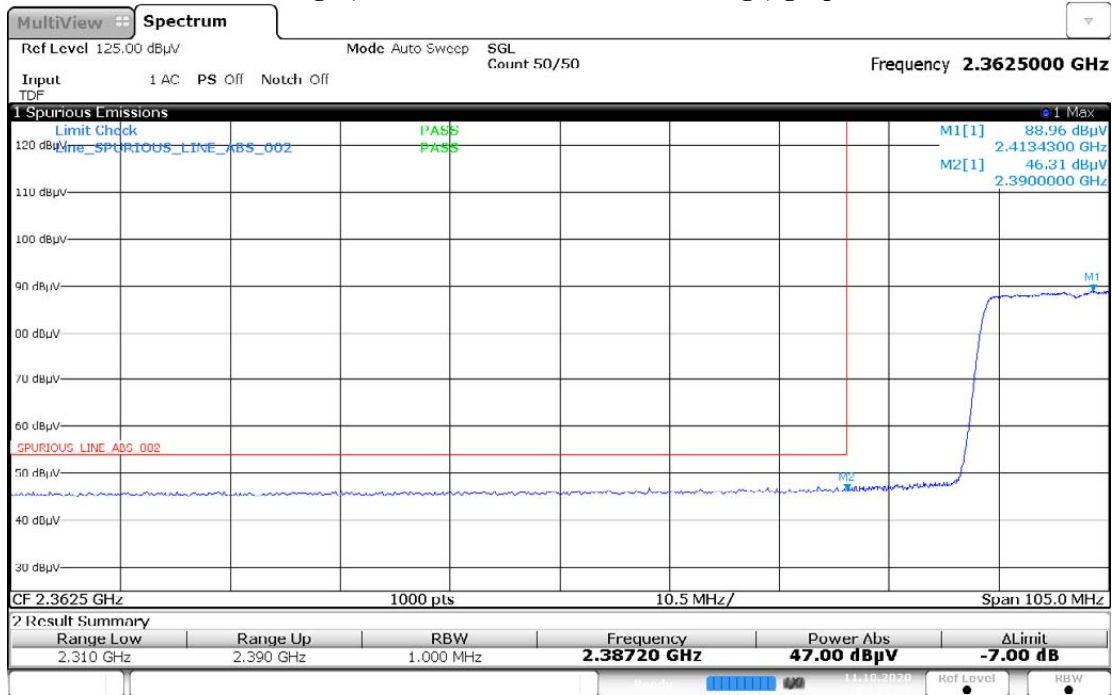

03:21:01 11.10.2020

6.8. AC Powerline Conducted Emission

6.8.1. Test Setup

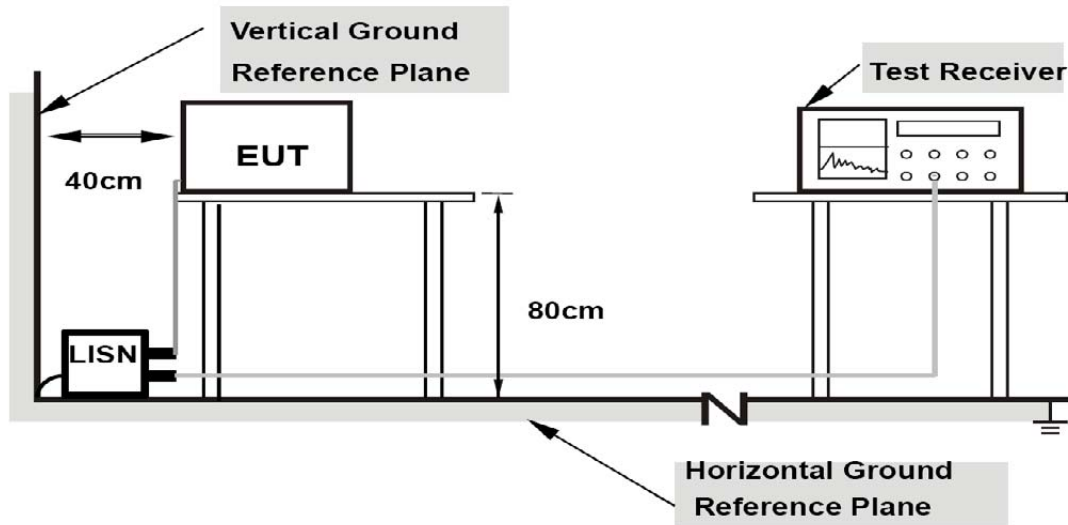

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.8.2. Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports
of class A ITE

Frequency range MHz	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

**Limits for conducted disturbance at the mains ports
of class B ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50
NOTE 1 The lower limit shall apply at the transition frequencies.		
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE

6.8.3. Test Result

Not Applicable. Testing is not required, radio shall turn off during charging mode.

END OF TEST REPORT