Report No.: SHE23120009-02CE Date: 2024-02-01 Page 1 of 11

Applicant: Ehong Technology Co.,Ltd

Address of Applicant : Room 501, No.485 Xingmei Road,

Minhang Dis, Shanghai, China.

Product Name : BLE Module

Brand Name : Ehong

Model Name : EQM100-1B, EQM100-1P, EQM100-1U

Sample Acquisition Method : Sent by Client Sample No. : E23120009-01#02

FCC ID : 2ACCREQM1001

Standard : FCC Part 2.1091

Date of Receipt : 2023-12-07

Date of Test : 2023-12-08~ 2024-02-01

Date of Issue : 2024-02-01

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by:

| The last property of the last prope

Report No.: SHE23120009-02CE Date: 2024-02-01 Page 2 of 11

Contents

L	GENERAL INFORMATION	J
1.1	TESTING LABORATORY	3
1.2	ENVIRONMENTAL CONDITIONS	3
1.3	DETAILS OF APPLICATION	3
1.4	DETAILS OF EUT	3
2	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	4
2.1	LIMITS	4
2.2	Assessment methods	5
2.3	TEST RESULT	5
	CONCLUSION	
3	APPENDIXES	6
3.1	SAMPLE PHOTOGRAPH	6

Report No.: SHE23120009-02CE Date: 2024-02-01 Page 3 of 11

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Service (Shanghai) Co., Ltd.			
Address	No.1298, Pingan Road, Minhang District, Shanghai, China			
Telephone	0086 21-51682999			
Fax	0086 21-54711112			
Homepage	www.icasiso.com			

1.2 Environmental conditions

Temperature (°C)	18-25
Humidity (%RH)	40-65
Barometric Pressure (mbar)	960-1060
Ambient noise & Reflection (W/kg)	< 0.012

1.3 Details of Application

Applicant Company Name	Ehong Technology Co.,Ltd			
Address	Room 501, No.485 Xingmei Road, Minhang Dis, Shanghai, China.			
Contact Person	Rik Tang			
Telephone	02164769993			
Email	rik.tang@ehonglink.com			
Manufacturer Company Name	Ehong Technology Co.,Ltd			
Address	Room 501, No.485 Xingmei Road, Minhang Dis,Shanghai, China.			
Factory Company Name	Ehong Technology Co.,Ltd			
Address	Room 501, No.485 Xingmei Road, Minhang Dis, Shanghai, China.			

1.4 Details of EUT

Product Name	BLE Module
Brand Name	Ehong
Test Model Name	EQM100-1B
Series Model Name	EQM100-1P, EQM100-1U
Difference Description	All the same except for the antenna type: EQM100-1B Model is the pcb antenna EQM100-1P Model is the pin antenna EQM100-1U Model is the external antenna
FCC ID	2ACCREQM1001
Mode of Operation	Bluetooth BLE Version 5.4
Frequency Range	2402MHz ~ 2480MHz

Report No.: SHE23120009-02CE Date: 2024-02-01 Page 4 of 11

Modulation Type	BLE ⊠GFSK 1Mbps ⊠GFSK 2Mbps		
Max RF Output Power-Conducted	6.44dBm		
Antenna Type	EQM100-1B (PCB Antenna) EQM100-1U (External Antenna) EQM100-1P (PIN Antenna)		
Antenna Gain	EQM100-1B (-1.34dBi) EQM100-1U (3.0dBi) EQM100-1P (1.99dBi)		
Hardware Version	V2.0		
Software Version	V1.0		

2 Maximum Permissible Exposure (MPE)

2.1 Limits

According to FCC Part 1.1307, systems operating under the provisions of this section shall be operated in a manner the ensures that the public is not exposed to radio frequency energy level in excess of the commission's guidelines.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)						
	(A) Limits for Occupational/Controlled Exposure									
0.3-3.0	614	1.63	*100	6						
3.0-30	1842/f	4.89/f	*900/f ²	6						
30-300	61.4	0.163	1.0	6						
300-1,500			f/300	6						
1,500-100,000			5	6						
	(B) Limits for Gener	al Population/Uncontrolled	d Exposure							
0.3-1.34	614	1.63	*100	30						
1.34-30	824/f	2.19/f	*180/f ²	30						
30-300	27.5	0.073	0.2	30						
300-1,500			f/1500	30						
1,500-100,000			1.0	30						

f = frequency in MHz * = Plane-wave equivalent power density

Report No.: SHE23120009-02CE Date: 2024-02-01 Page 5 of 11

2.2 Assessment methods

Calculation Formula from FCC OET 65:

$$S = \frac{P * G}{4 * \pi * R^2}$$

Where:

S = Power Density (mW/cm2)

P = Input Power of the Antenna (mW)

G = Antenna Gain Relative to an Isotropic Antenna

R = Distance from the Antenna to the Point of Investigation (cm)

2.3 Test Result

Model: EQM100-1B

Operation Mode	Frequency Range (MHz)	Max Conducted Power (dBm)	Antenna Gain (dBi)	Max EIRP (mW)	Power Density at R = 20 cm (mW/cm²)	Limit (mW/cm²)
BLE	2402 ~ 2480	6.44	-1.34	3.24	0.000645	1.0

Model: EQM100-1P

Operation Mode	Frequency Range (MHz)	Max Conducted Power (dBm)	Antenna Gain (dBi)	Max EIRP (mW)	Power Density at R = 20 cm (mW/cm²)	Limit (mW/cm²)
BLE	2402 ~ 2480	6.44	1.99	6.97	0.001387	1.0

Model: EQM100-1U

Operation Mode	Frequency Range (MHz)	Max Conducted Power (dBm)	Antenna Gain (dBi)	Max EIRP (mW)	Power Density at R = 20 cm (mW/cm²)	Limit (mW/cm²)
BLE	2402 ~ 2480	6.44	3.00	8.79	0.001749	1.0

Note(s):

1. For 300 - 1,500MHz: Power Density limit is f/1500 mW/cm2

2. For 1,500 - 100,000MHz: Power Density limit is 1.0 mW/cm²

2.4 Conclusion

The Power Density at the position which is 20 cm far from the EUT is smaller than the General Population/Uncontrolled


Exposure limit.

Report No.: SHE23120009-02CE Date: 2024-02-01 Page 6 of 11


3 Appendixes

3.1 Sample Photograph

Model: EQM100-1B

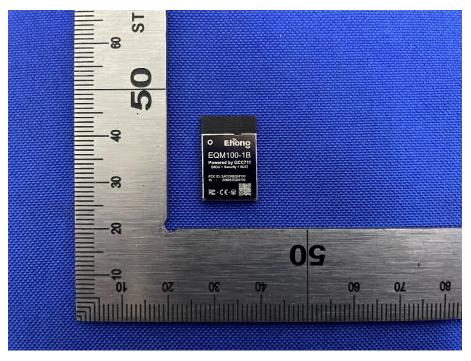


Front of the sample

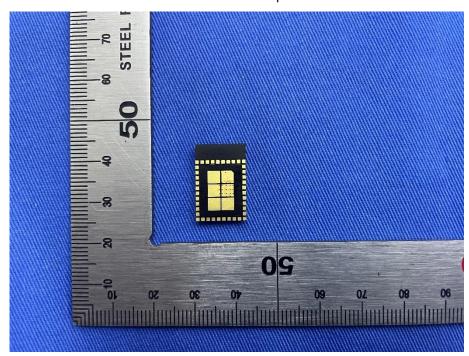


Rear of the sample

Report No.: SHE23120009-02CE Date: 2024-02-01 Page 7 of 11

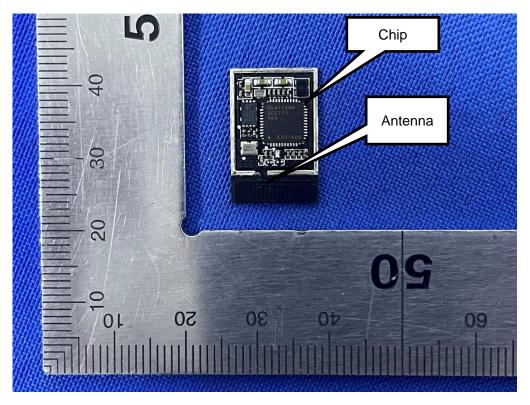


Remove the shield cover and Antenna Position



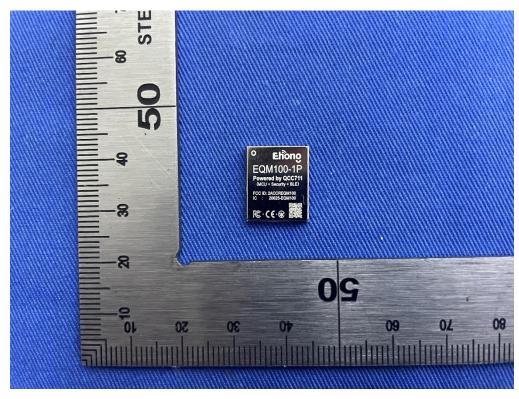


Front of the sample

Report No.: SHE23120009-02CE Date: 2024-02-01 Page 8 of 11

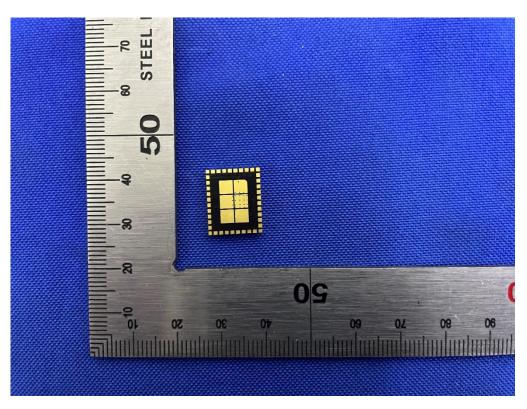


Rear of the sample

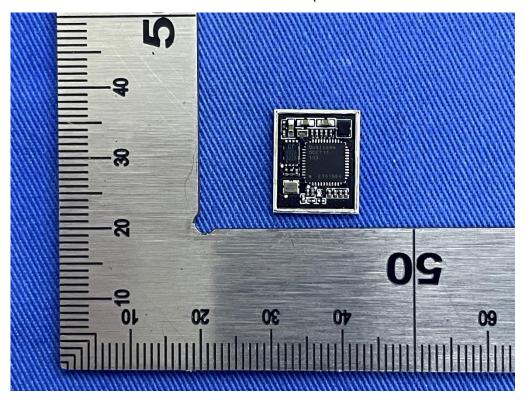



Remove the shield cover

Report No.: SHE23120009-02CE Date: 2024-02-01 Page 9 of 11

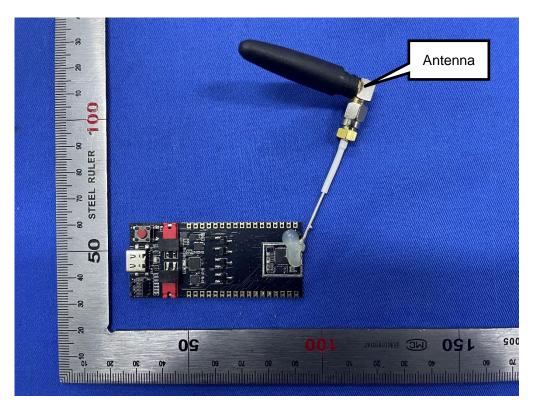


Antenna Position



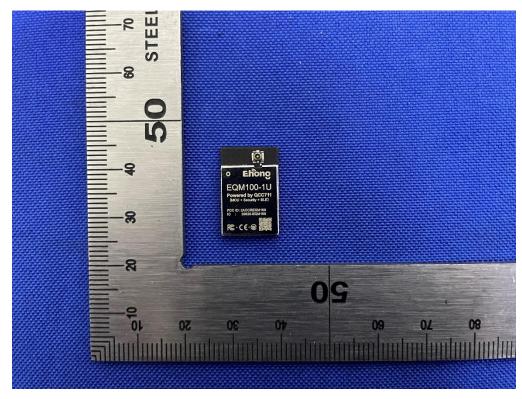


Front of the sample

Report No.: SHE23120009-02CE Date: 2024-02-01 Page 10 of 11

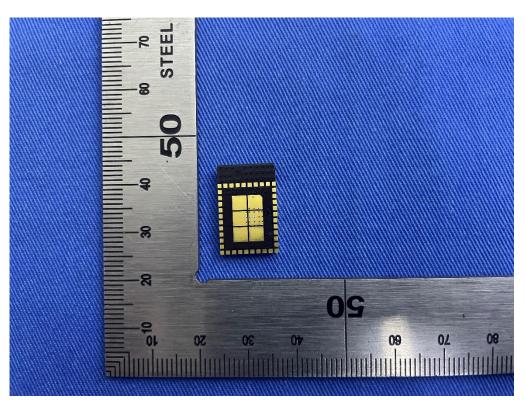


Rear of the sample

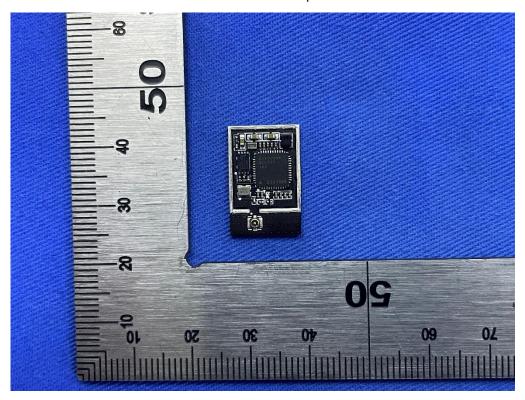

Remove the shield cover

Report No.: SHE23120009-02CE Date: 2024-02-01 Page 11 of 11

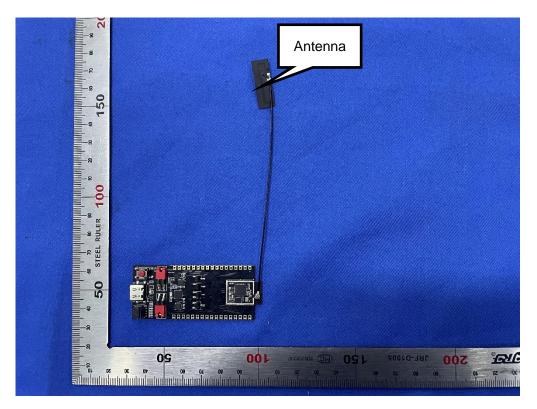

Antenna Position

End of the report