



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR241200056201

Rev.: 01

Appendix B

Detailed Test Results

1. WCDMA
WCDMA Band II
WCDMA Band V
2. LTE
LTE Band 2
LTE Band 7
LTE Band 12
LTE Band 14
LTE Band 25
LTE Band 26
LTE Band 30
LTE Band 38
LTE Band 40
LTE Band 41
LTE Band 66
LTE Band 71
3. NR
NR Band n5
NR Band n25
NR Band n30
NR Band n41
NR Band n48
NR Band n66
NR Band n70
NR Band n71
NR Band n77
4. WIFI
WIFI 2.4G
WIFI 5G
5. BT
BT

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, RunSheng Road, Suzhou Industrial Park,
Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

t (86-512) 6229 2980
www.sgsgroup.com.cn

Test Laboratory: SGS-SAR Lab

T715DS WCDMA II RMC Ch9400 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.337$ S/m; $\epsilon_r = 39.016$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.5, 8.5, 8.5); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.47 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.59 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.892 W/kg; SAR(10 g) = 0.450 W/kg

Maximum value of SAR (measured) = 1.25 W/kg

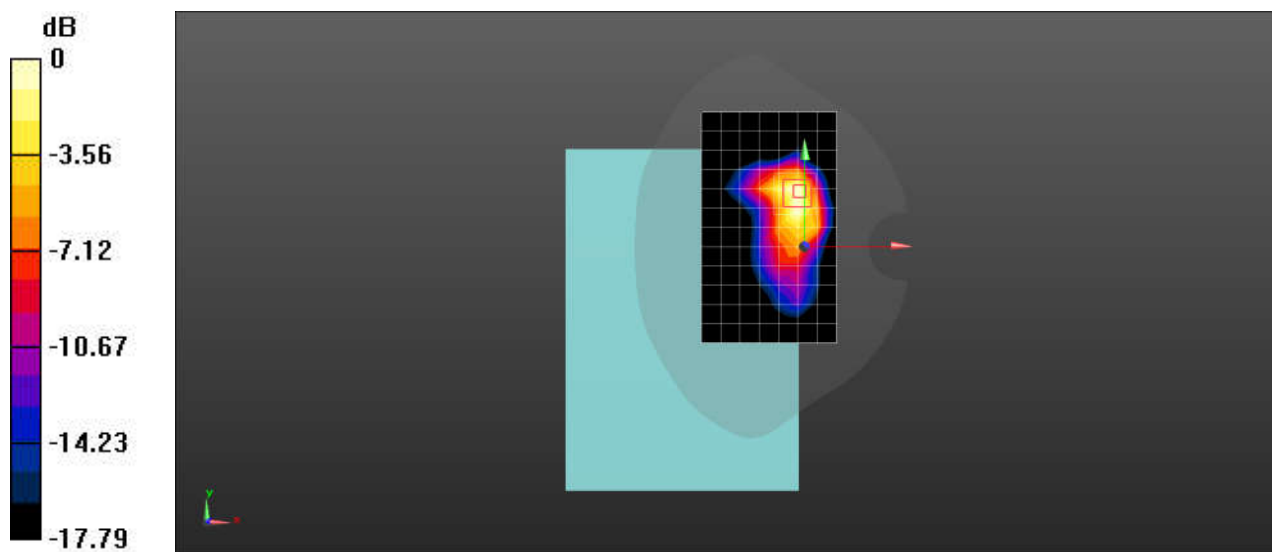

0 dB = 1.25 W/kg = 0.97 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS WCDMA V RMC Ch4182 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 42.078$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.35, 10.35, 10.35); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.877 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.84 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.77 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.472 W/kg

Maximum value of SAR (measured) = 2.54 W/kg

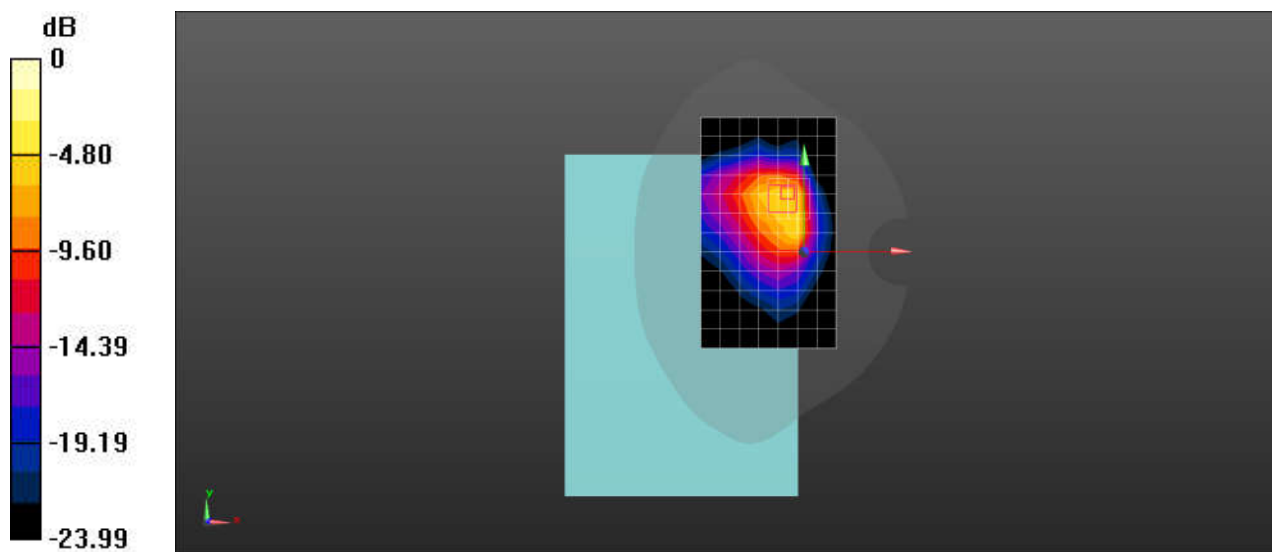

0 dB = 2.54 W/kg = 4.05 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS LTE Band 2 20M QPSK 1RB0 Ch18900 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: HSL1950;Medium parameters used: $f = 1880$ MHz; $\sigma = 1.337$ S/m; $\epsilon_r = 39.016$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.5, 8.5, 8.5); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.457 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.613 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.446 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.984 W/kg

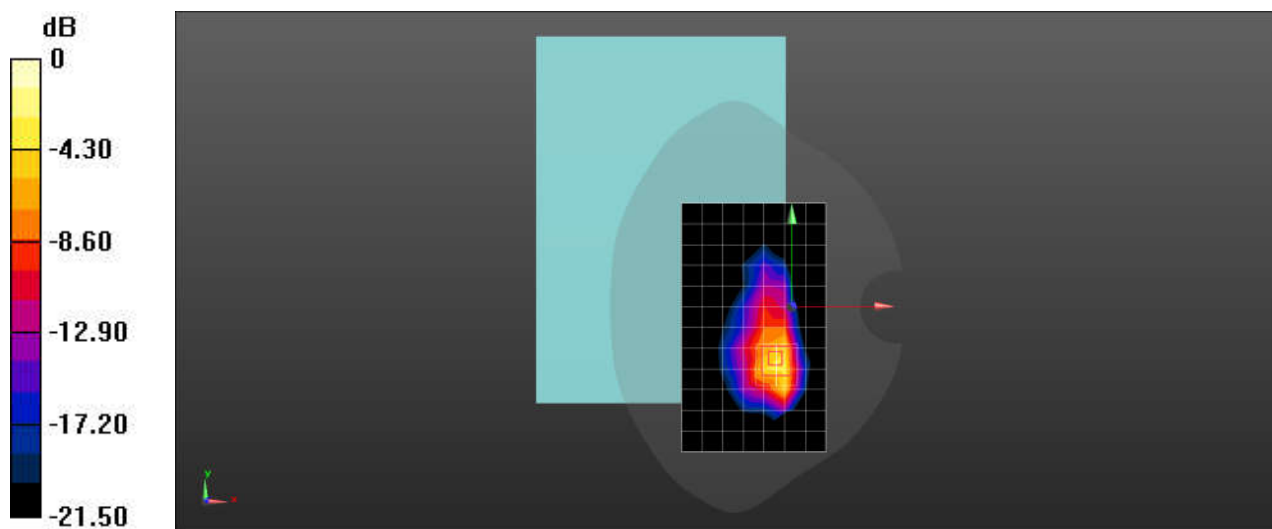

0 dB = 0.984 W/kg = -0.07 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS LTE Band 7 20M QPSK 1RB0 Ch21100 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium: HSL2600;Medium parameters used: $f = 2535$ MHz; $\sigma = 1.957$ S/m; $\epsilon_r = 38.519$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.1, 8.1, 8.1); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x15x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.68 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.978 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 0.855 W/kg; SAR(10 g) = 0.332 W/kg

Maximum value of SAR (measured) = 1.65 W/kg

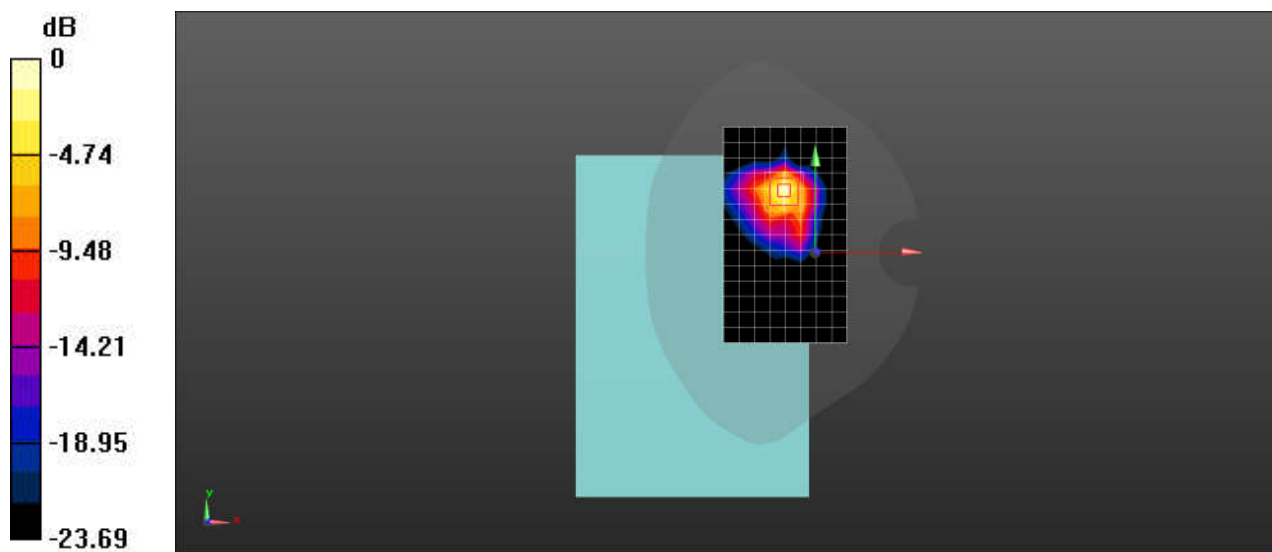

0 dB = 1.65 W/kg = 2.17 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS LTE Band 12 10M QPSK 1RB0 Ch23095 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 42.066$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.66, 10.66, 10.66); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.900 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.36 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.92 W/kg

SAR(1 g) = 0.917 W/kg; SAR(10 g) = 0.389 W/kg

Maximum value of SAR (measured) = 2.23 W/kg

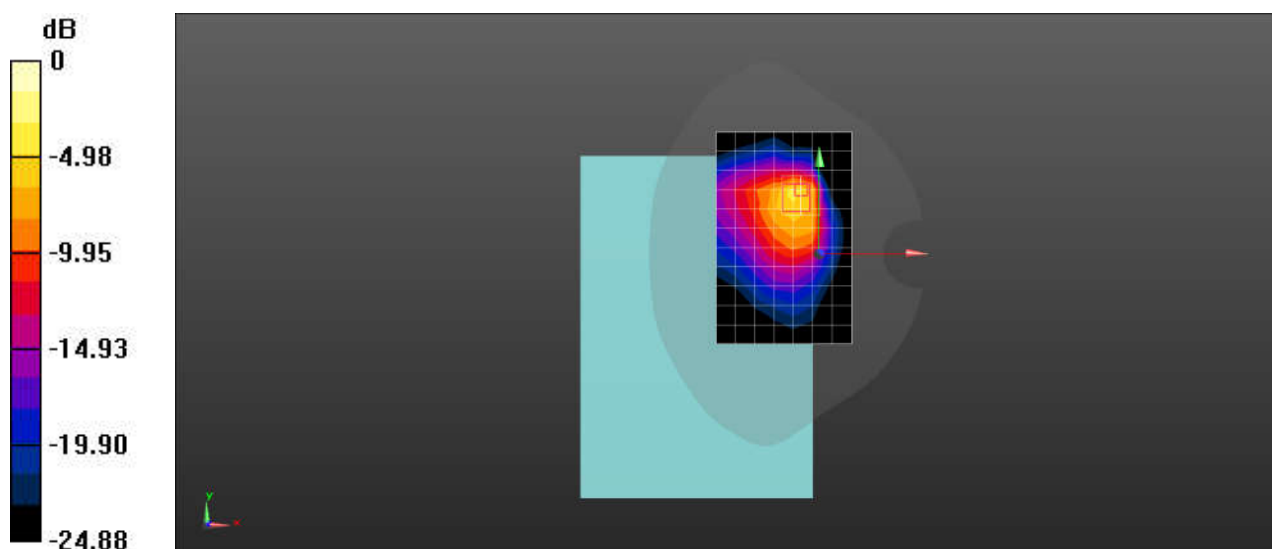

0 dB = 2.23 W/kg = 3.48 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS LTE Band 14 10M QPSK 1RB0 Ch23330 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 793 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 793 \text{ MHz}$; $\sigma = 0.886 \text{ S/m}$; $\epsilon_r = 41.177$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.66, 10.66, 10.66); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.955 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.86 V/m ; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.96 W/kg

SAR(1 g) = 0.944 W/kg ; SAR(10 g) = 0.392 W/kg

Maximum value of SAR (measured) = 2.38 W/kg

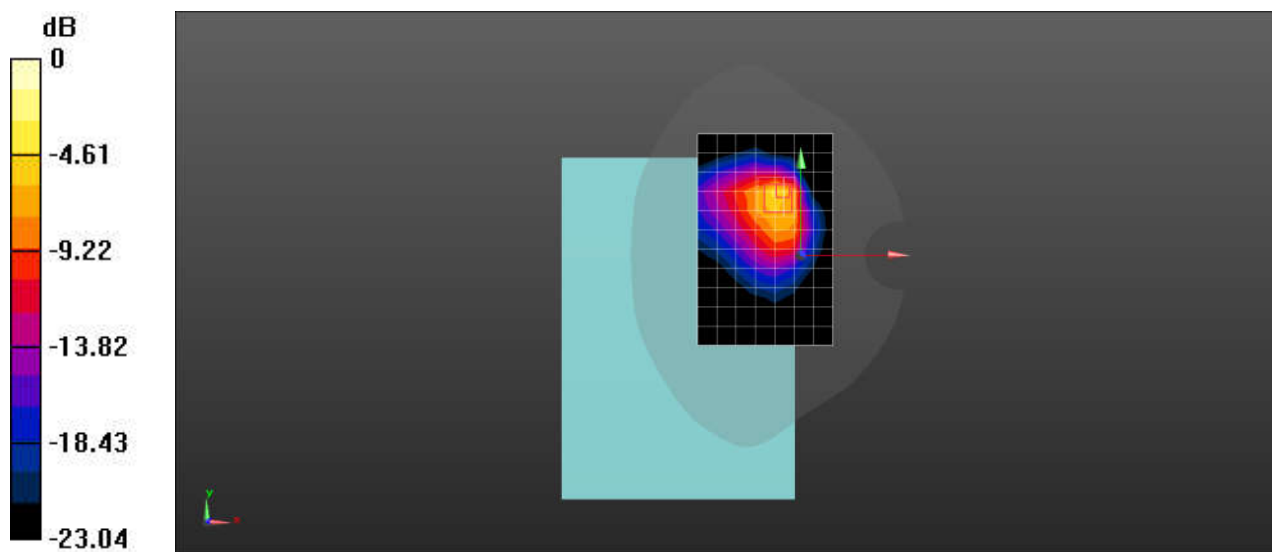

0 dB = 2.38 W/kg = 3.77 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS LTE Band 25 20M QPSK 1RB0 Ch26365 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.337$ S/m; $\epsilon_r = 38.981$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.5, 8.5, 8.5); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.11 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.90 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.870 W/kg; SAR(10 g) = 0.427 W/kg

Maximum value of SAR (measured) = 1.57 W/kg

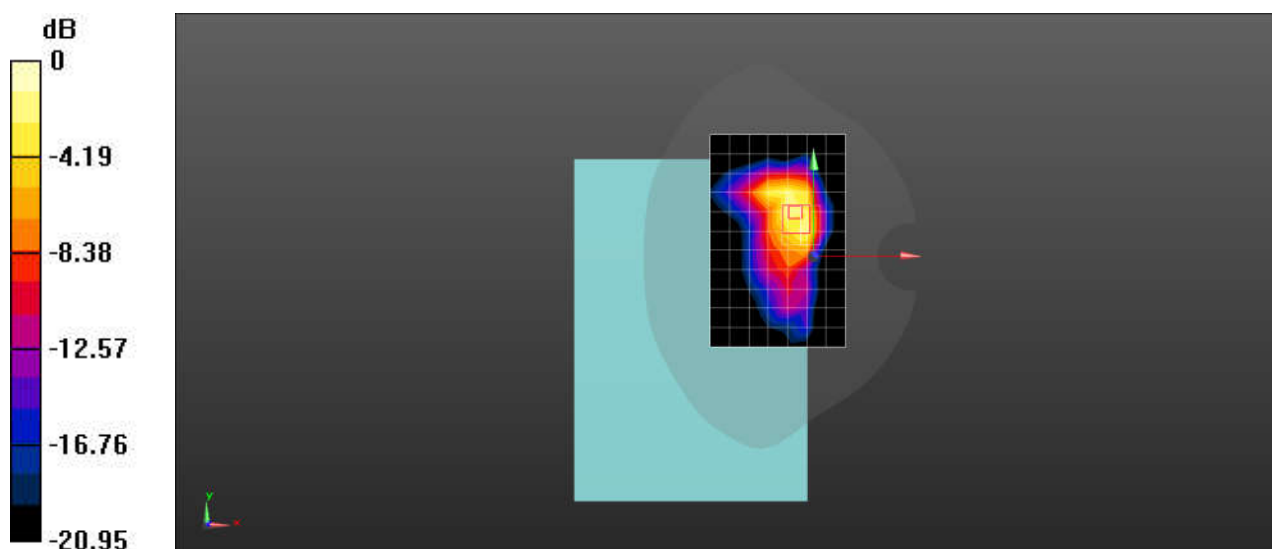

0 dB = 1.57 W/kg = 1.96 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS LTE Band 26 15M QPSK 1RB0 Ch26865 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium: HSL835;Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 42.139$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.35, 10.35, 10.35); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.23 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.34 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 4.01 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.516 W/kg

Maximum value of SAR (measured) = 2.18 W/kg

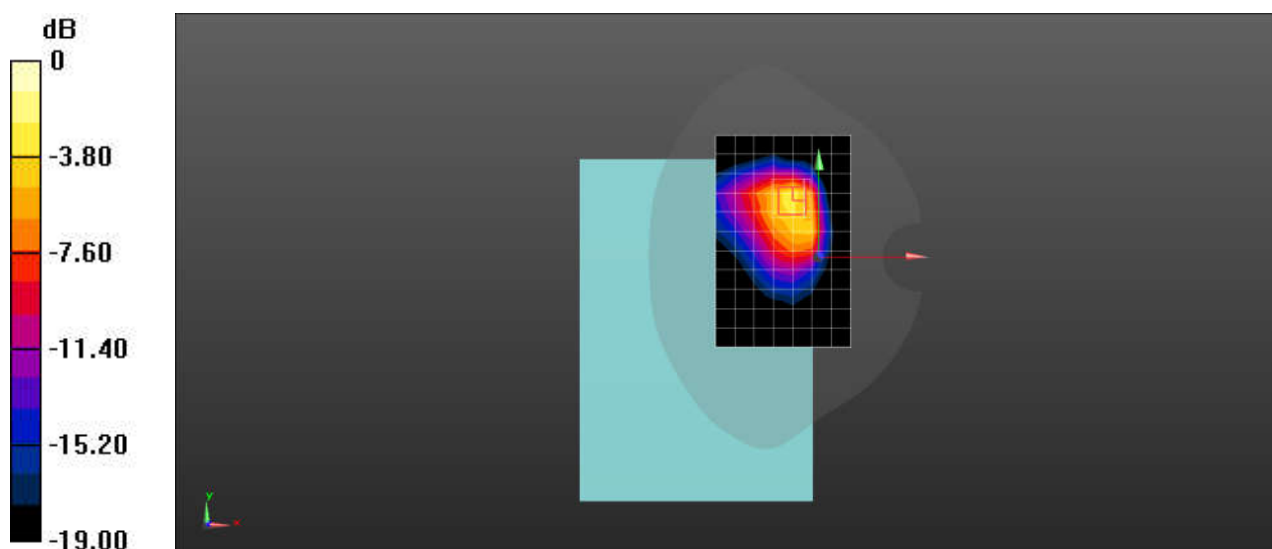

0 dB = 2.18 W/kg = 3.38 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS LTE Band 30 10M QPSK 1RB0 Ch27710 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz;Duty Cycle: 1:1

Medium: HSL2300;Medium parameters used: $f = 2310$ MHz; $\sigma = 1.688$ S/m; $\epsilon_r = 38.581$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.29, 8.29, 8.29); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x15x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.47 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.972 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.901 W/kg; SAR(10 g) = 0.355 W/kg

Maximum value of SAR (measured) = 1.66 W/kg

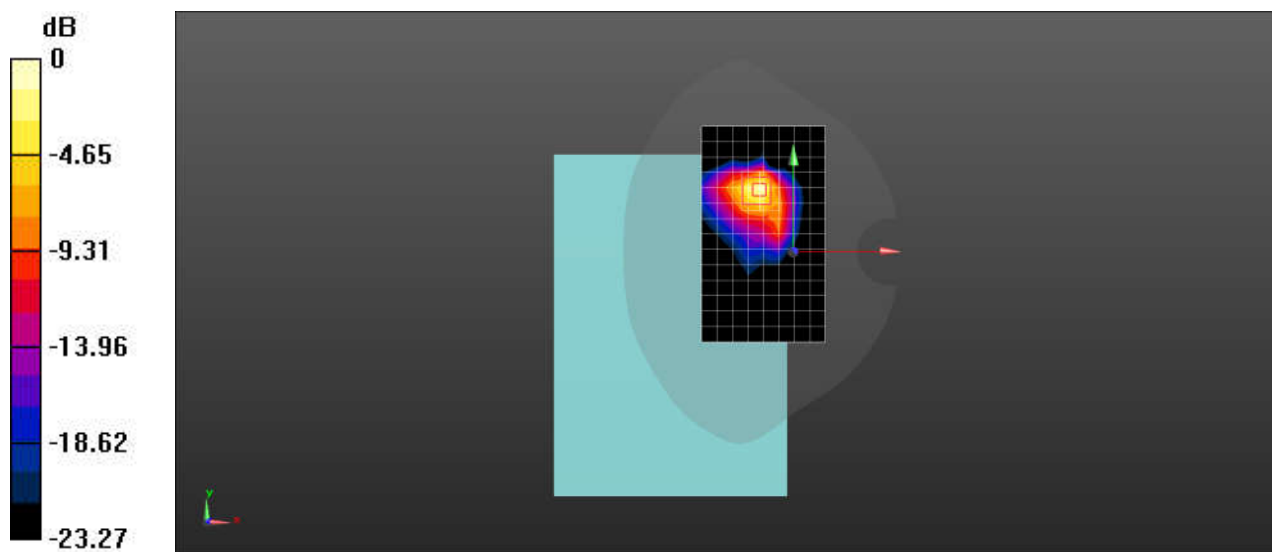

0 dB = 1.66 W/kg = 2.20 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS LTE Band 38 20M QPSK 1RB0 Ch38000 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium: HSL2600;Medium parameters used: $f = 2595$ MHz; $\sigma = 2.022$ S/m; $\epsilon_r = 38.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.85, 7.85, 7.85); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x15x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.80 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.079 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 0.883 W/kg; SAR(10 g) = 0.349 W/kg

Maximum value of SAR (measured) = 1.78 W/kg

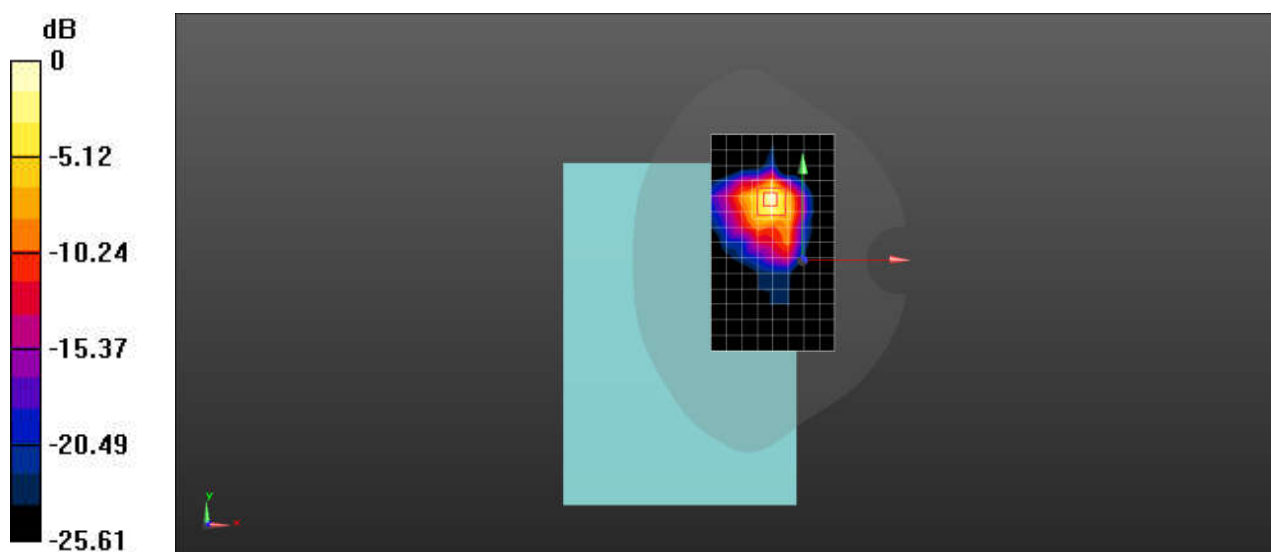

0 dB = 1.78 W/kg = 2.50 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS LTE Band 40 20M QPSK 1RB0 Ch38750 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, LTE-TDD BW 20MHZ (0); Frequency: 2310 MHz;Duty Cycle: 1:4.25

Medium: HSL2300;Medium parameters used: $f = 2310$ MHz; $\sigma = 1.688$ S/m; $\epsilon_r = 38.581$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.29, 8.29, 8.29); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x15x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.46 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.959 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.26 W/kg

SAR(1 g) = 0.898 W/kg; SAR(10 g) = 0.351 W/kg

Maximum value of SAR (measured) = 1.65 W/kg

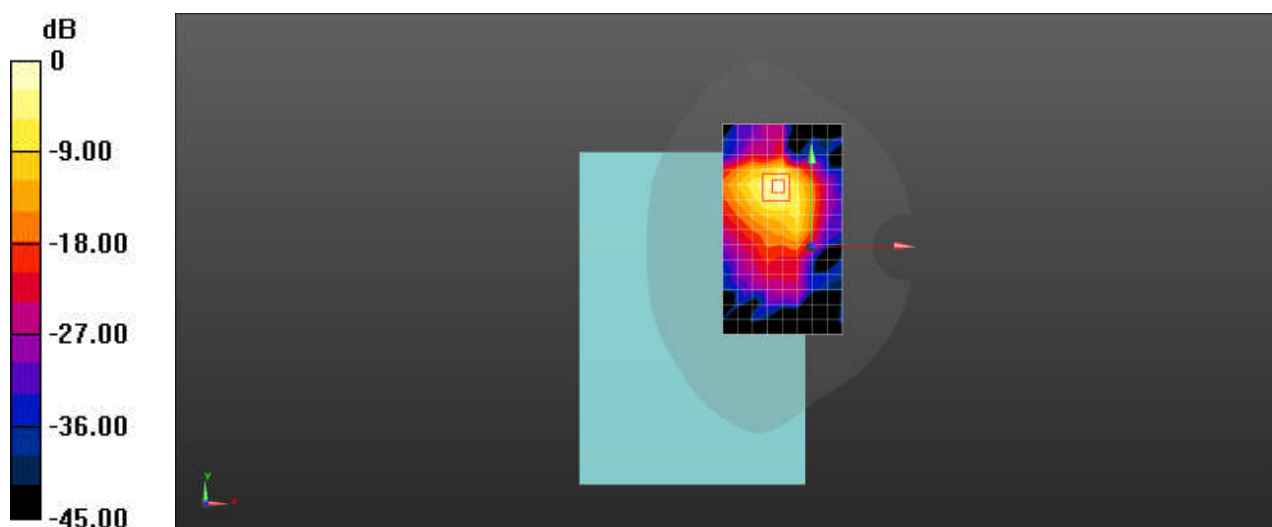

Test Laboratory: SGS-SAR Lab

T715DS LTE Band 41 20M QPSK 1RB0 Ch40620 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium: HSL2600;Medium parameters used: $f = 2593$ MHz; $\sigma = 2.025$ S/m; $\epsilon_r = 38.291$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.85, 7.85, 7.85); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x15x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.48 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.844 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.909 W/kg; SAR(10 g) = 0.354 W/kg

Maximum value of SAR (measured) = 1.67 W/kg

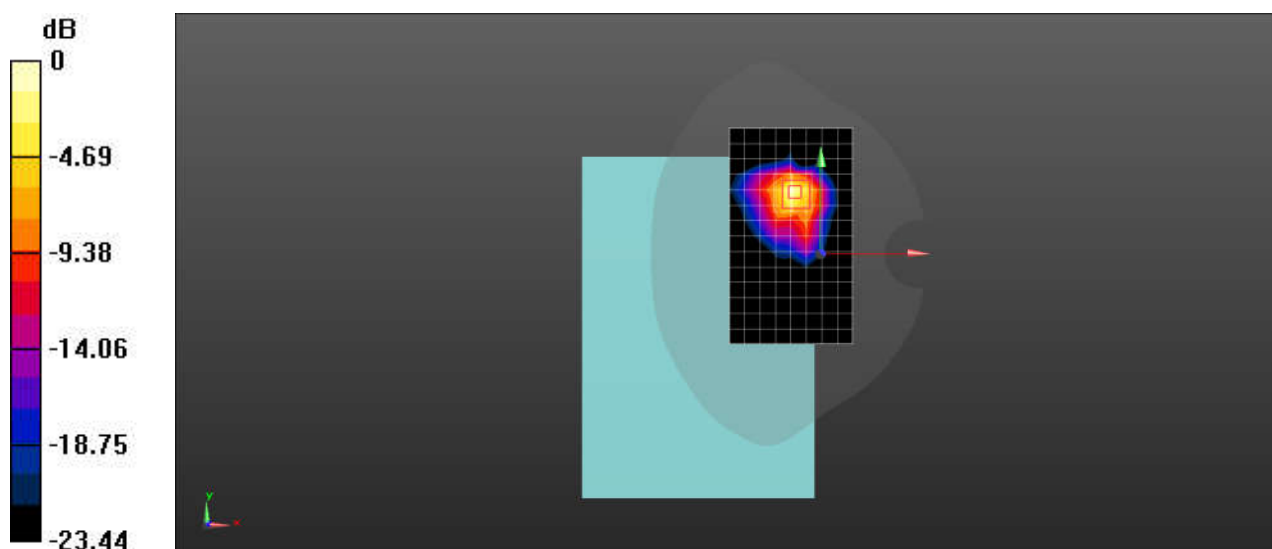

0 dB = 1.67 W/kg = 2.23 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS LTE Band 66 20M QPSK 1RB0 Ch132322 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1745$ MHz; $\sigma = 1.325$ S/m; $\epsilon_r = 38.607$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.86, 8.86, 8.86); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.20 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.45 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 0.958 W/kg; SAR(10 g) = 0.499 W/kg

Maximum value of SAR (measured) = 1.53 W/kg

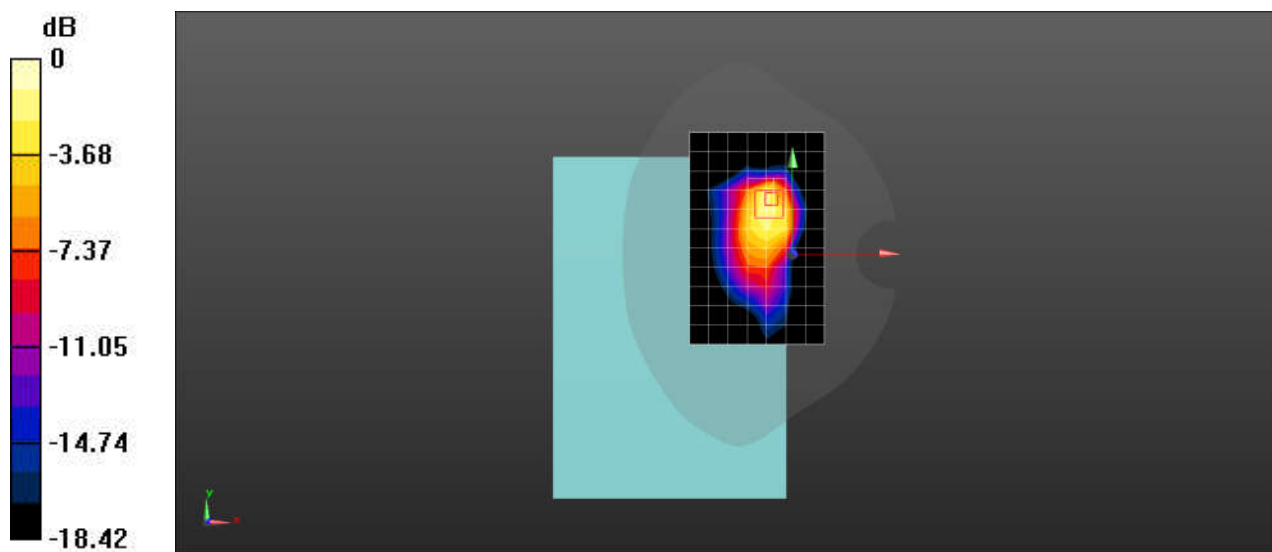

0 dB = 1.53 W/kg = 1.85 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS LTE Band 71 20M QPSK 1RB0 Ch133322 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 683 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 683 \text{ MHz}$; $\sigma = 0.875 \text{ S/m}$; $\epsilon_r = 42.456$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.66, 10.66, 10.66); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.16 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.16 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.35 W/kg

SAR(1 g) = 0.959 W/kg ; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 2.32 W/kg

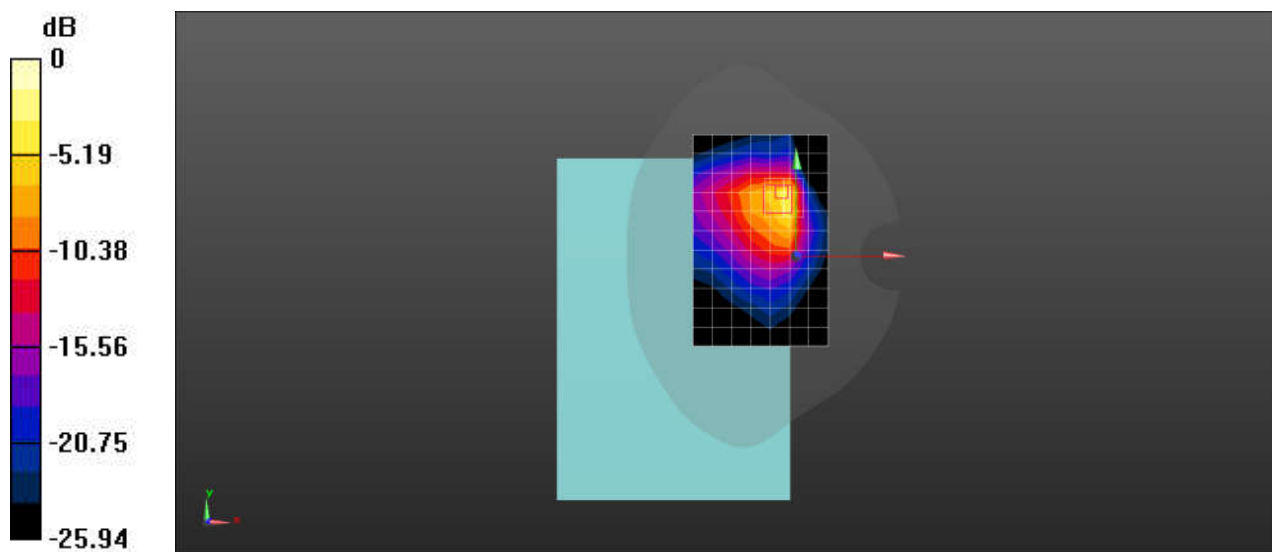

0 dB = 2.32 W/kg = 3.65 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS NR n2 40M QPSK 1RB1 Ch376000 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.337$ S/m; $\epsilon_r = 39.016$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.5, 8.5, 8.5); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.381 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.264 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.862 W/kg

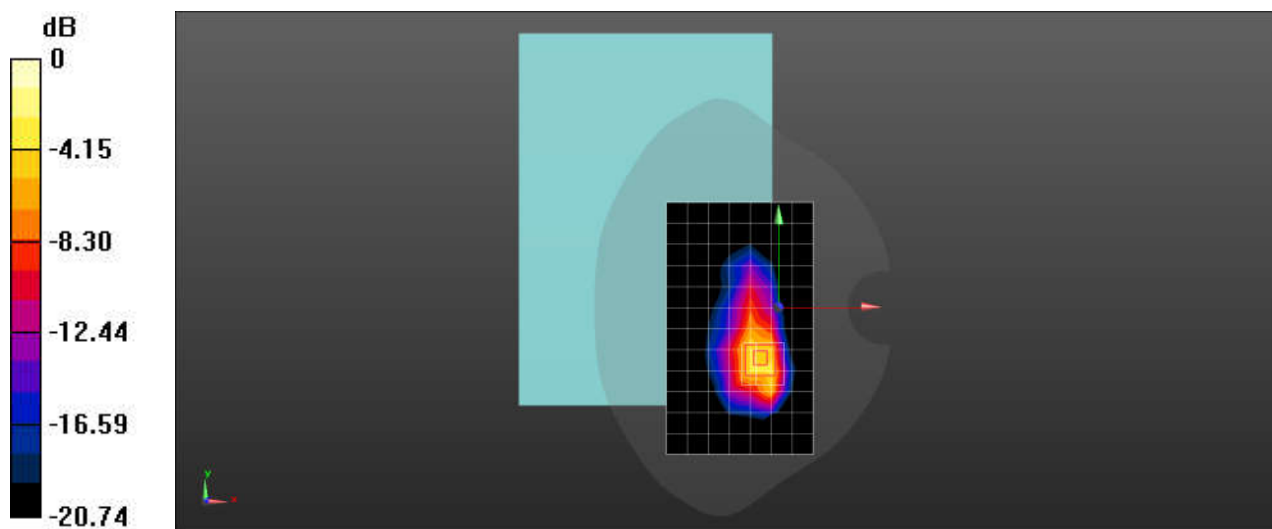

0 dB = 0.862 W/kg = -0.64 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS NR n5 25M QPSK 1RB1 Ch167300 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.055$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.35, 10.35, 10.35); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.29 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.54 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.69 W/kg

SAR(1 g) = 0.980 W/kg; SAR(10 g) = 0.472 W/kg

Maximum value of SAR (measured) = 2.15 W/kg

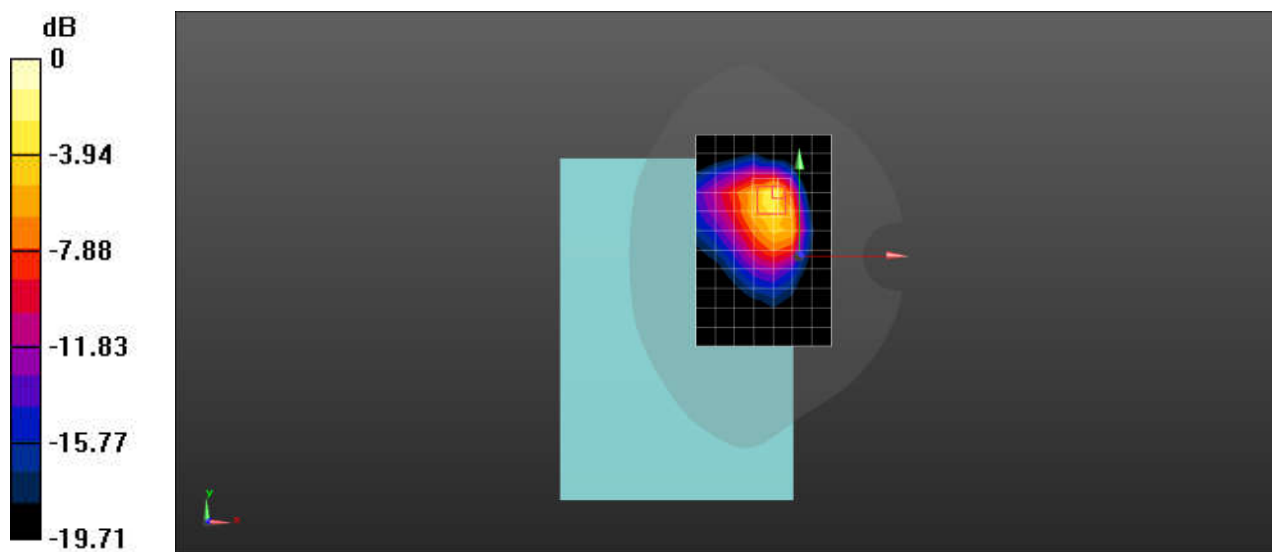

0 dB = 2.15 W/kg = 3.32 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS NR n25 40M QPSK 1RB1 Ch376500 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.337$ S/m; $\epsilon_r = 38.981$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.5, 8.5, 8.5); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.07 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.15 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.820 W/kg; SAR(10 g) = 0.420 W/kg

Maximum value of SAR (measured) = 1.36 W/kg

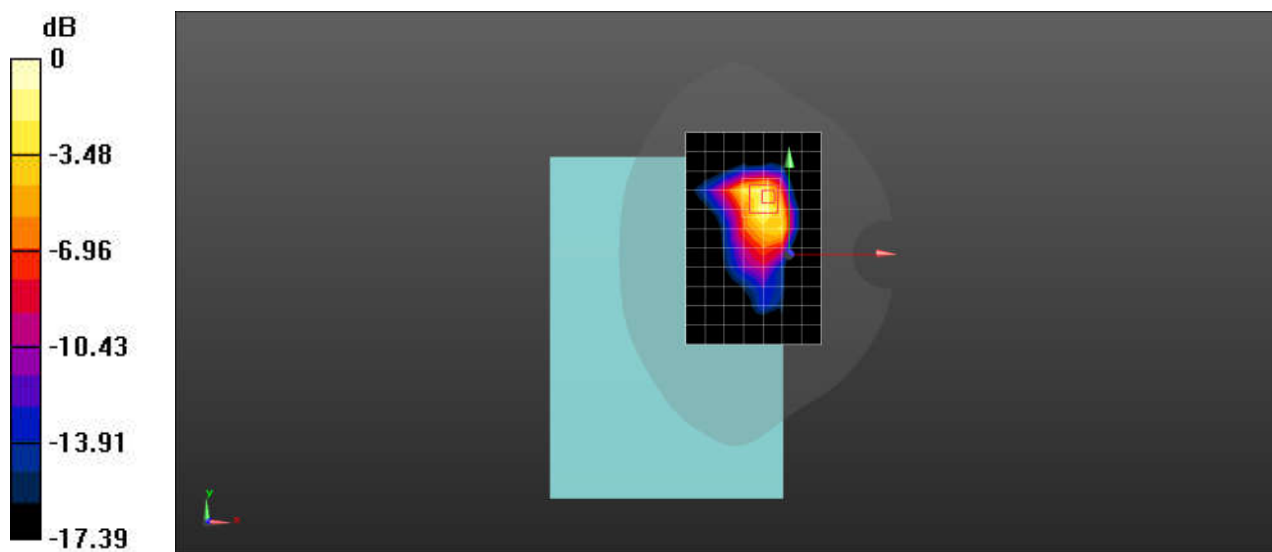

0 dB = 1.36 W/kg = 1.34 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS NR n30 10M QPSK 1RB1 Ch462000 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.688$ S/m; $\epsilon_r = 38.581$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.29, 8.29, 8.29); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x15x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.73 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.415 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 0.892 W/kg; SAR(10 g) = 0.350 W/kg

Maximum value of SAR (measured) = 1.68 W/kg

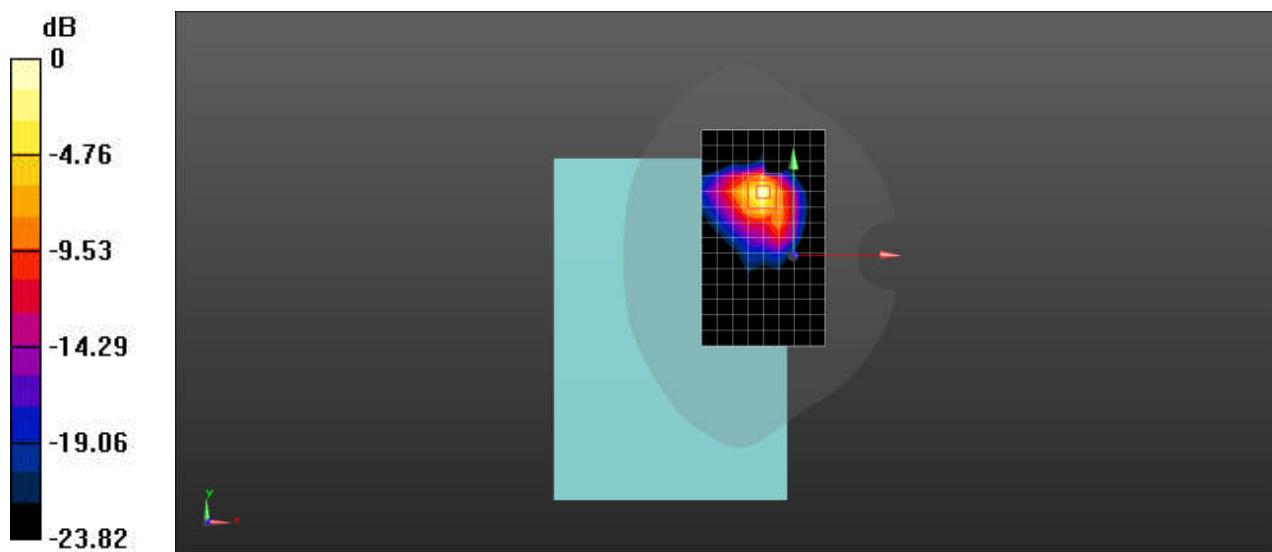

0 dB = 1.68 W/kg = 2.25 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS NR n41 100M QPSK 1RB1 Ch518598 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 39.916$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.85, 7.85, 7.85); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x15x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.66 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.009 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.864 W/kg; SAR(10 g) = 0.331 W/kg

Maximum value of SAR (measured) = 1.64 W/kg

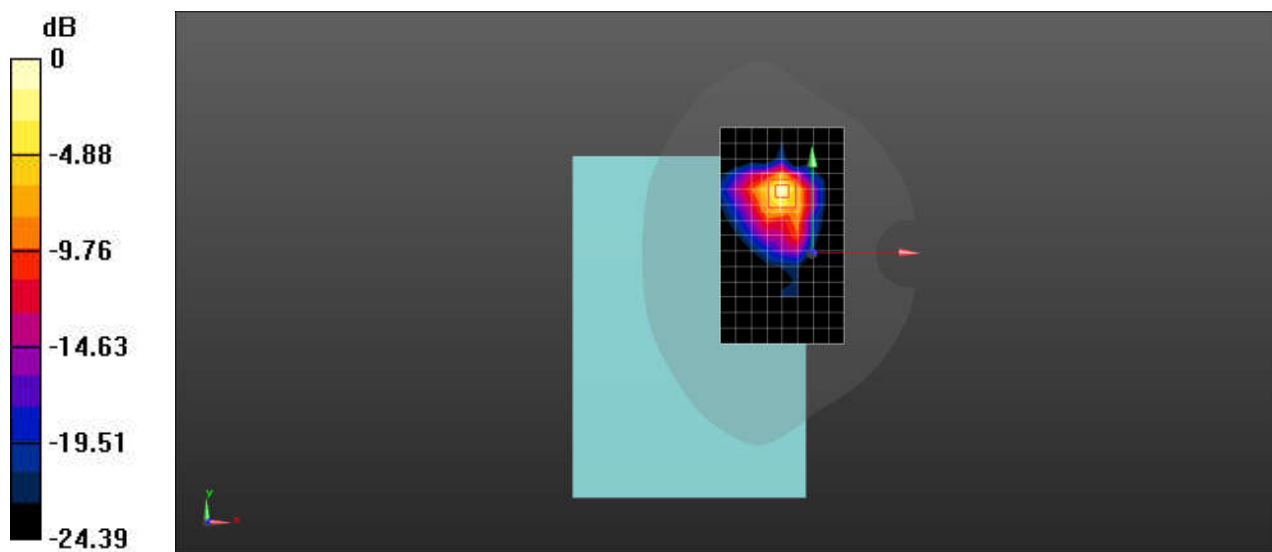

0 dB = 1.64 W/kg = 2.15 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS NR n48 100M QPSK 1RB1 Ch641666 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 2.957$ S/m; $\epsilon_r = 38.513$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.08, 7.08, 7.08); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.59 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.607 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.61 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 1.50 W/kg

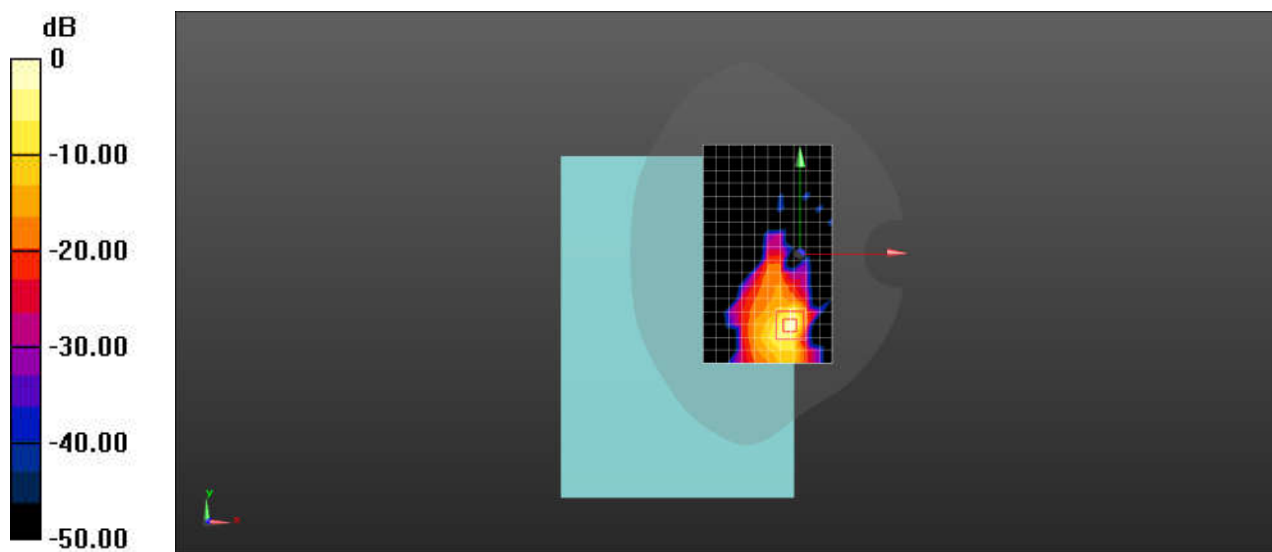

Test Laboratory: SGS-SAR Lab

T715DS NR n66 40M QPSK 1RB1 Ch349000 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.325$ S/m; $\epsilon_r = 38.607$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.86, 8.86, 8.86); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.967 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.84 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.398 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

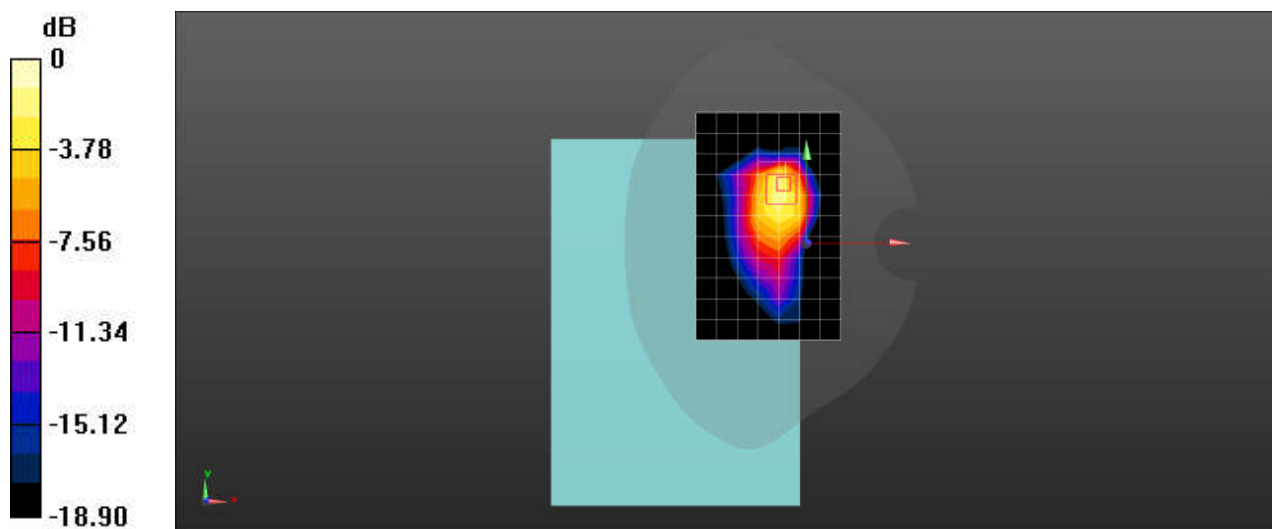

0 dB = 1.27 W/kg = 1.04 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS NR n70 15M QPSK 1RB1 Ch340500 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, NR (0); Frequency: 1702.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1702.5$ MHz; $\sigma = 1.287$ S/m; $\epsilon_r = 38.728$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.86, 8.86, 8.86); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.04 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.73 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.412 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

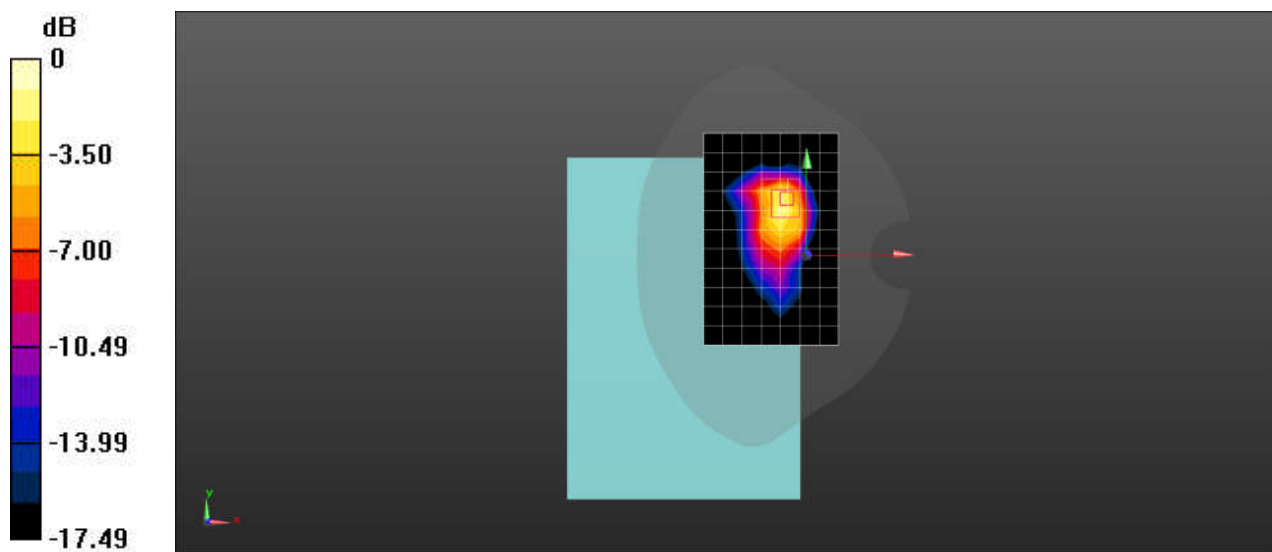

0 dB = 1.32 W/kg = 1.21 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS NR n71 30M QPSK 1RB1 Ch136100 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.481$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.66, 10.66, 10.66); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 1.02 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.88 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 5.71 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.473 W/kg

Maximum value of SAR (measured) = 2.93 W/kg

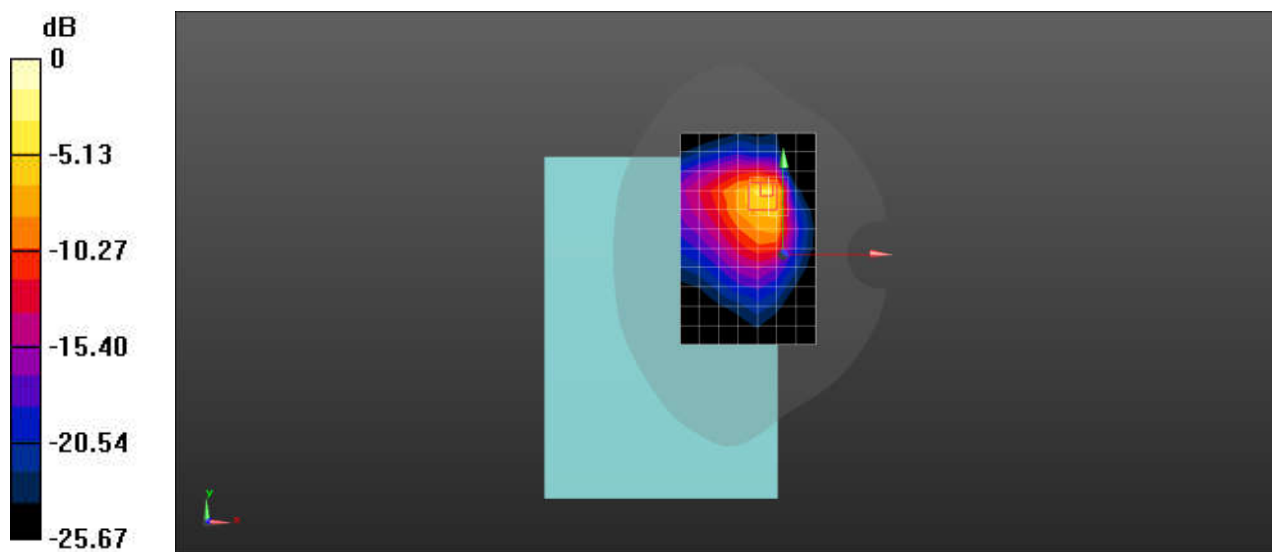

0 dB = 2.93 W/kg = 4.67 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS NR n77 100M QPSK 1RB1 Ch633334 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.855$ S/m; $\epsilon_r = 38.588$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.28, 7.28, 7.28); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.10 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.67 W/kg

SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 1.72 W/kg

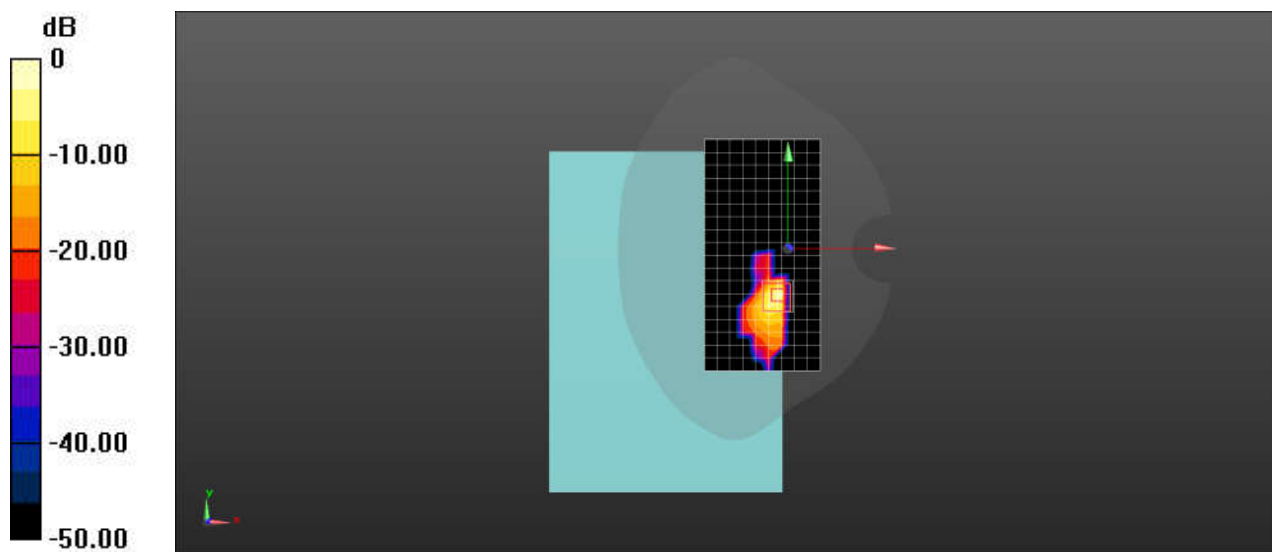

0 dB = 1.72 W/kg = 2.36 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS NR n77 100M QPSK 1RB1 Ch656000 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL3900; Medium parameters used: $f = 3840$ MHz; $\sigma = 3.205$ S/m; $\epsilon_r = 38.258$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.01, 7.01, 7.01); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.59 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.7120 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 4.34 W/kg

SAR(1 g) = 0.982 W/kg; SAR(10 g) = 0.244 W/kg

Maximum value of SAR (measured) = 2.52 W/kg

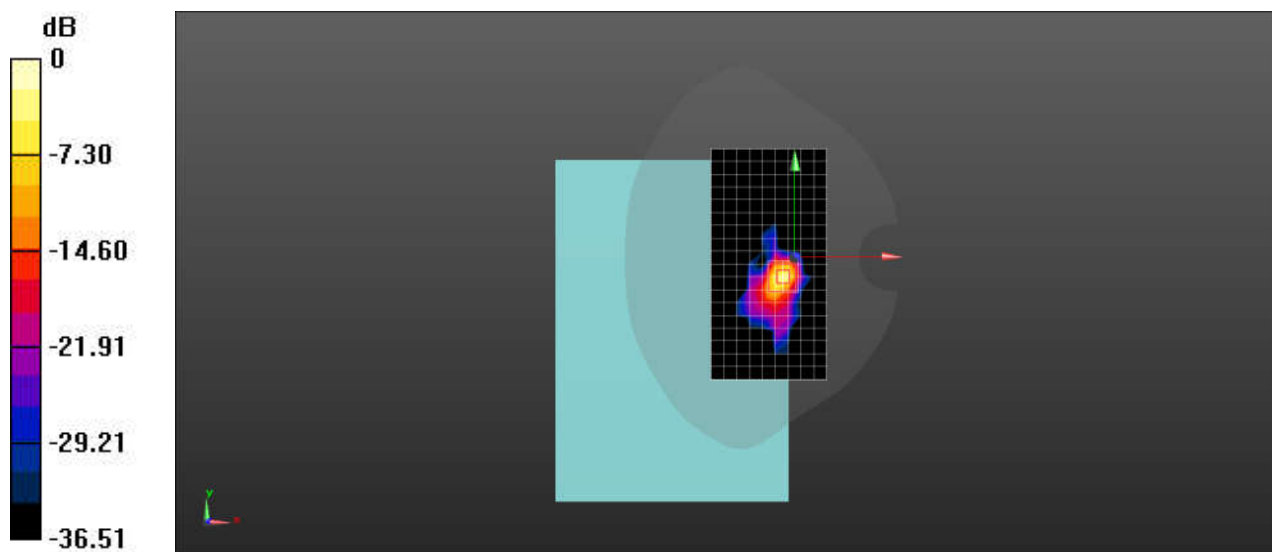

0 dB = 2.52 W/kg = 4.01 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS WIFI2.4G 802.11b Ch6 Back side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1.004

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.805$ S/m; $\epsilon_r = 38.604$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.1, 8.1, 8.1); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.789 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.124 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.56 W/kg

SAR(1 g) = 0.782 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 1.72 W/kg

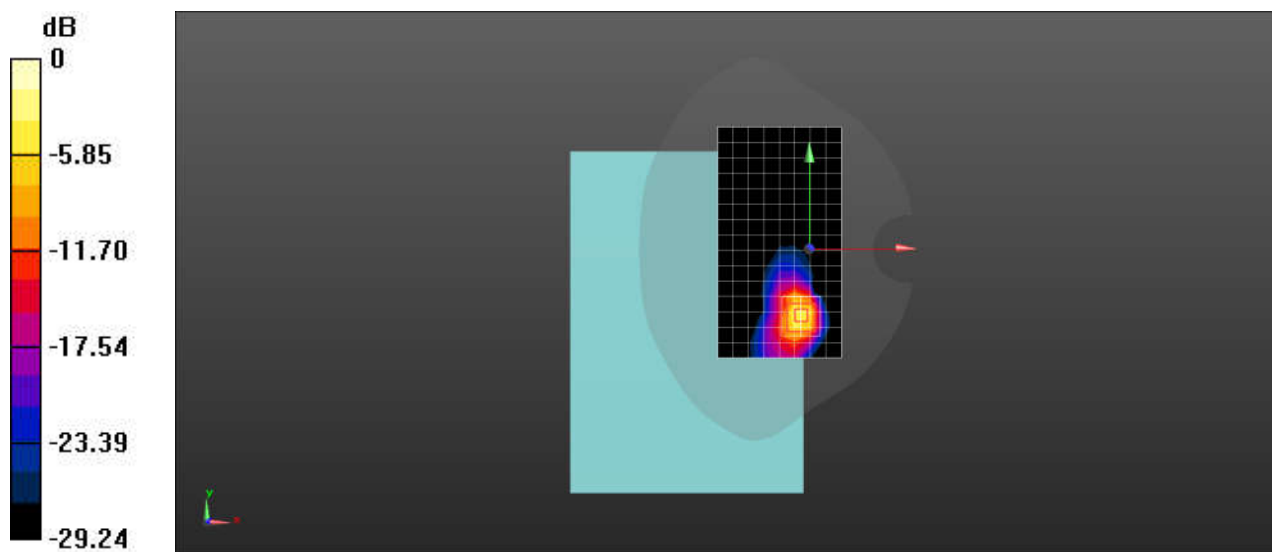

0 dB = 1.72 W/kg = 2.36 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS WIFI5G 802.11n-HT40 Ch62 Top side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5310 MHz; Duty Cycle: 1:1.052

Medium: HSL5000; Medium parameters used: $f = 5310$ MHz; $\sigma = 4.909$ S/m; $\epsilon_r = 36.17$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.72, 5.72, 5.72); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.81 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.267 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 5.01 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 2.89 W/kg

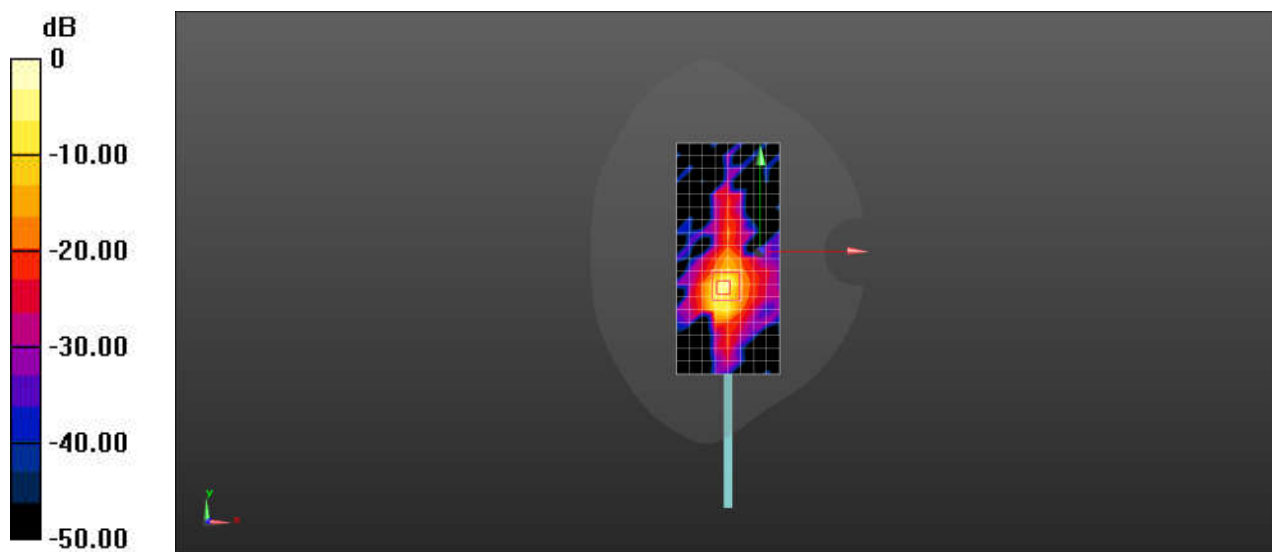

Test Laboratory: SGS-SAR Lab

T715DS WIFI5G 802.11n-HT40 Ch110 Top side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5550 MHz; Duty Cycle: 1:1.052

Medium: HSL5000; Medium parameters used: $f = 5550$ MHz; $\sigma = 5.183$ S/m; $\epsilon_r = 35.74$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.1, 5.1, 5.1); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x18x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.45 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.965 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.20 W/kg

SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 1.96 W/kg

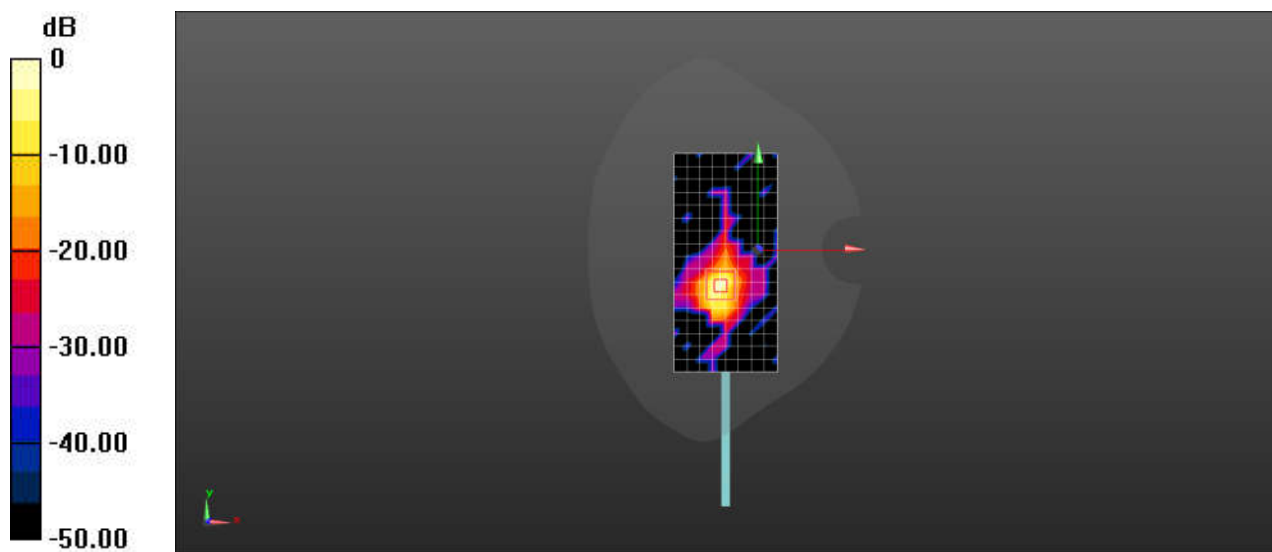

Test Laboratory: SGS-SAR Lab

T715DS WIFI5G 802.11n-HT40 Ch151 Top side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5755 MHz;Duty Cycle: 1:1.052

Medium: HSL5000;Medium parameters used: $f = 5755$ MHz; $\sigma = 5.444$ S/m; $\epsilon_r = 35.503$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.23, 5.23, 5.23); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x18x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.46 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 4.13 W/kg

SAR(1 g) = 0.793 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 2.23 W/kg

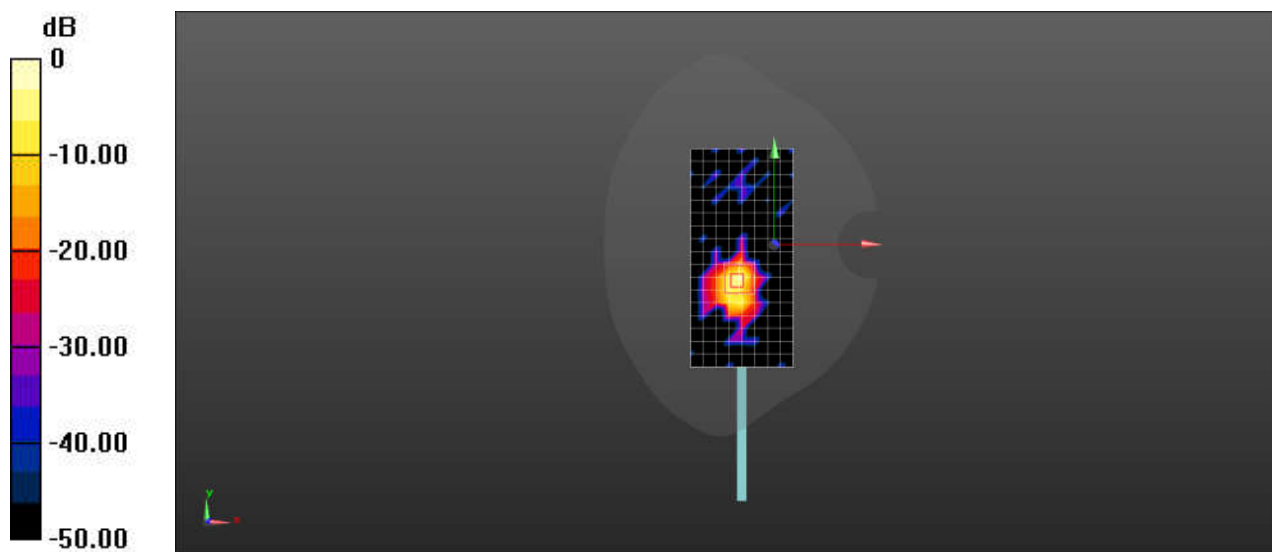

0 dB = 2.23 W/kg = 3.48 dBW/kg

Test Laboratory: SGS-SAR Lab

T715DS Bluetooth DH5 Ch0 Top side 0mm

DUT: T715DS; Type: Android Tablet; Serial: 863287070007790

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.283

Medium: HSL2450; Medium parameters used: $f = 2402$ MHz; $\sigma = 1.762$ S/m; $\epsilon_r = 38.726$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.1, 8.1, 8.1); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.237 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.002 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.408 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.302 W/kg

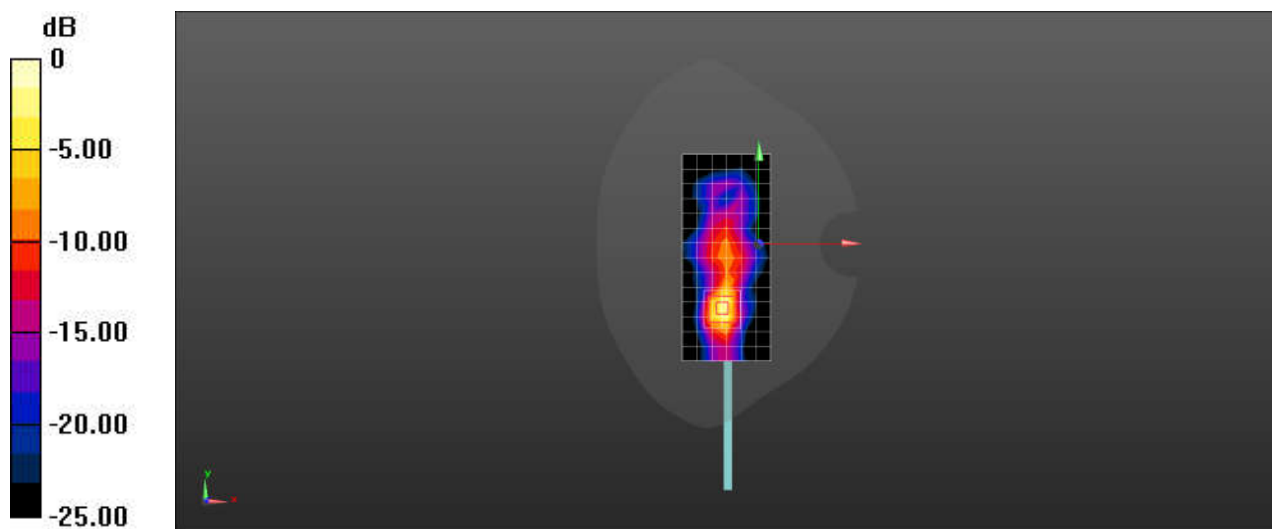

0 dB = 0.302 W/kg = -5.20 dBW/kg