



FCC RF Test Report

APPLICANT : Quectel Wireless Solutions Co., Ltd.
EQUIPMENT : Wi-Fi & Bluetooth Module
BRAND NAME : Quectel
MODEL NAME : FCS850R-B
FCC ID : XMR2023FCS850RB
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Apr. 11, 2023 ~ May 09, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2 Maximum Conducted Output Power Measurement	16
3.3 Power Spectral Density Measurement	17
3.4 Unwanted Emissions Measurement	19
3.5 AC Conducted Emission Measurement.....	23
3.6 Antenna Requirements	25
4 LIST OF MEASURING EQUIPMENT	26
5 MEASUREMENT UNCERTAINTY	27
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2D2912E	Rev. 01	Initial issue of report	May 31, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 7.52 dB at 11490.00 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 15.82 dB at 0.168 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

1.2 Manufacturer

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wi-Fi & Bluetooth Module
Brand Name	Quectel
Model Name	FCS850R-B
FCC ID	XMR2023FCS850RB
SN	Conducted: YY230217000024 Conduction: YY230217000010 Radiation: YY230217000033
HW Version	R1.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	MIMO Ant 0+1 <5745 MHz ~ 5825 MHz> 802.11a : 21.27 dBm / 0.1340 W 802.11n HT20 : 19.74 dBm / 0.0942 W 802.11n HT40 : 19.88 dBm / 0.0973 W 802.11ac VHT20: 19.81 dBm / 0.0957 W 802.11ac VHT40: 19.96 dBm / 0.0991 W 802.11ac VHT80: 19.26 dBm / 0.0843 W
99% Occupied Bandwidth	802.11a : 17.13 MHz 802.11ac VHT20 : 17.98 MHz 802.11ac VHT40 : 36.36 MHz 802.11ac VHT80 : 74.66 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

Antenna Type / Gain	<Ant. 0> : Dipole Antenna with gain 0.95 dBi <Ant. 1> : Dipole Antenna with gain 0.95 dBi		
Antenna Function Description		Ant. 0	Ant. 1
	802.11 a/n/ac SISO	V	V
	802.11 a/n/ac MIMO	V	V

Note:

1. WLAN MIMO only support CDD mode.
2. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to the higher normal conducted power.
3. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11ac VHT20/VHT40 by referring to their maximum conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : WLAN Link(5G) + Charging from Notebook
--------------------------------------	---

Ch. #		U-NII-3 : 5745-5825 MHz			
		802.11a	802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System

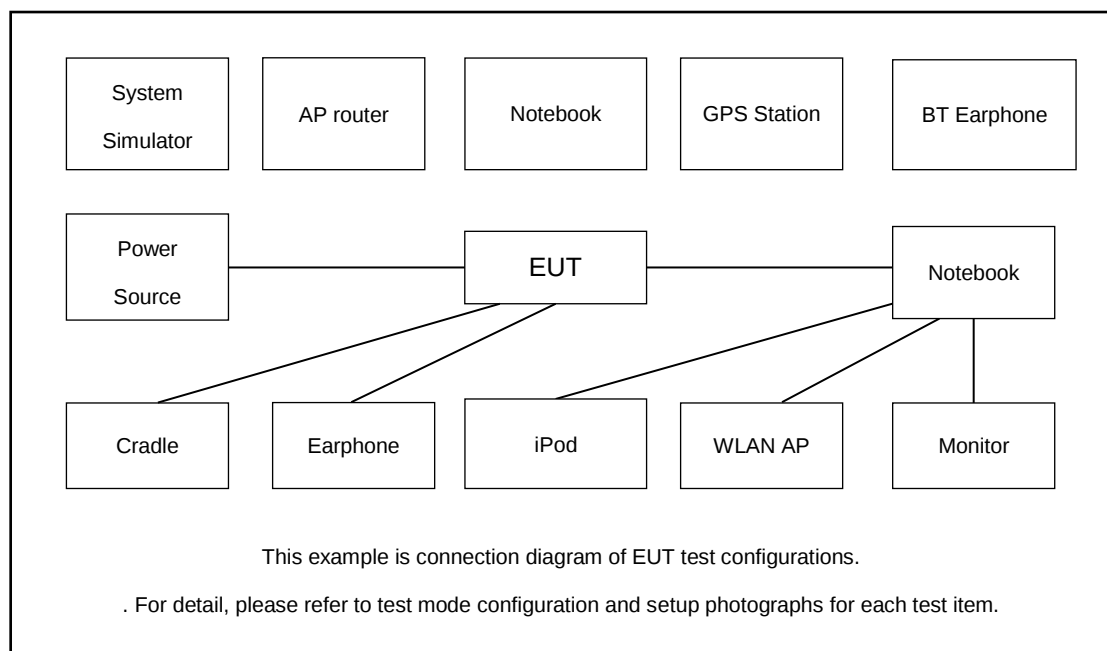

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	PC	Lenovo	Yangtian M4900c	Fcc DoC	N/A	Unshielded, 1.8m
4.	Monitor	Lenovo	LS2033wA	Fcc DoC	N/A	Unshielded, 1.8m
5.	Hard Disk	WD	C6B	N/A	N/A	N/A
6.	Test Jig	N/A	N/A	N/A	N/A	N/A
7.	Adapter	N/A	N/A	N/A	N/A	N/A
8.	Antenna	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 7.5 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 7.5 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. For 6dB BW, Set RBW = 100kHz.
For 26dB BW, Set RBW = approximately 1% of the emission bandwidth.
For 99% OBW, Set RBW = 1% to 5% of the OBW.
3. For 26dB BW, Set the VBW > RBW.
For 6dB BW & 99% OBW, Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



3.1.4 Test Setup






3.1.5 Test Result of 6dB and 26dB and 99% Bandwidth

Please refer to Appendix A.

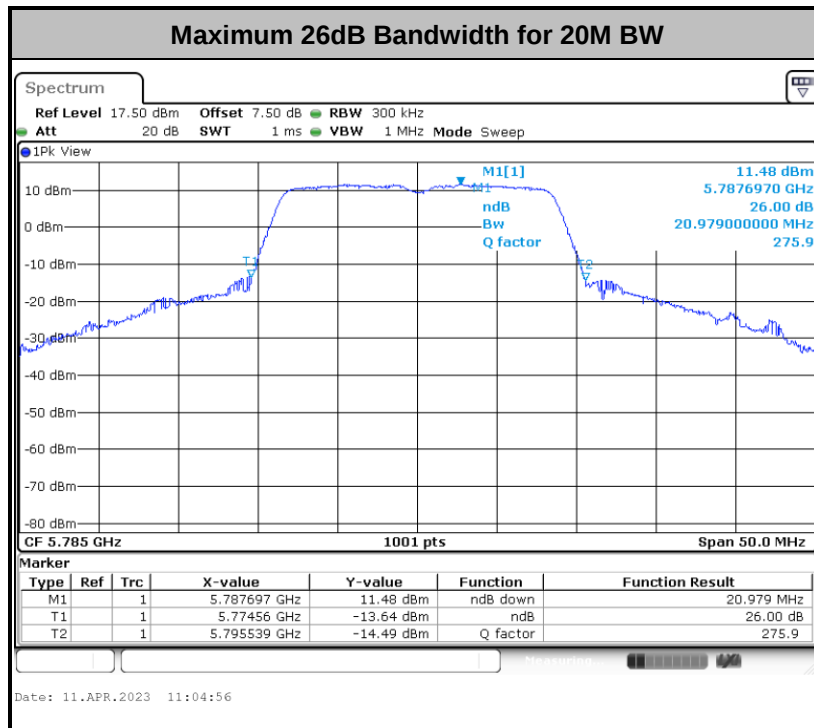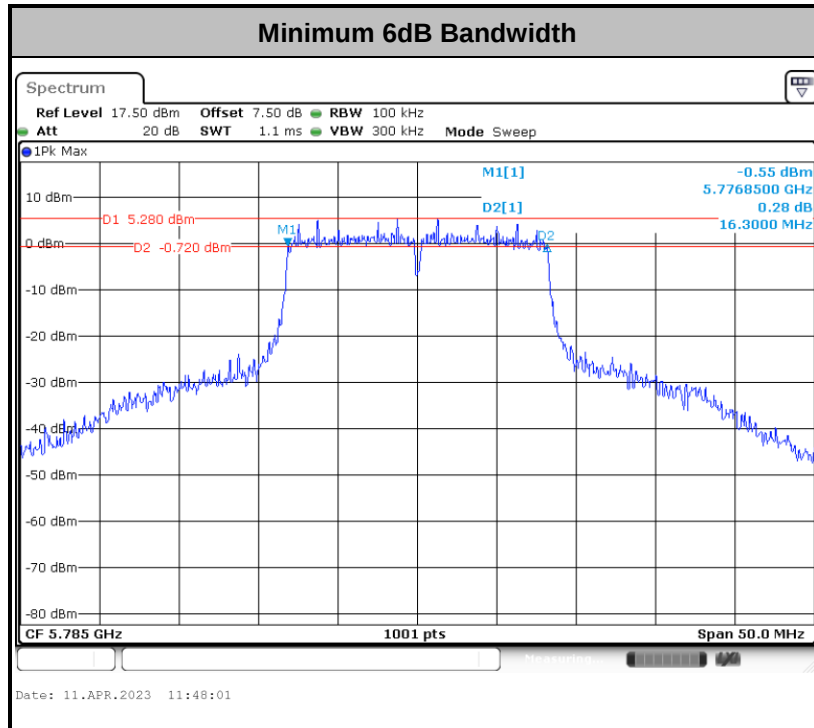

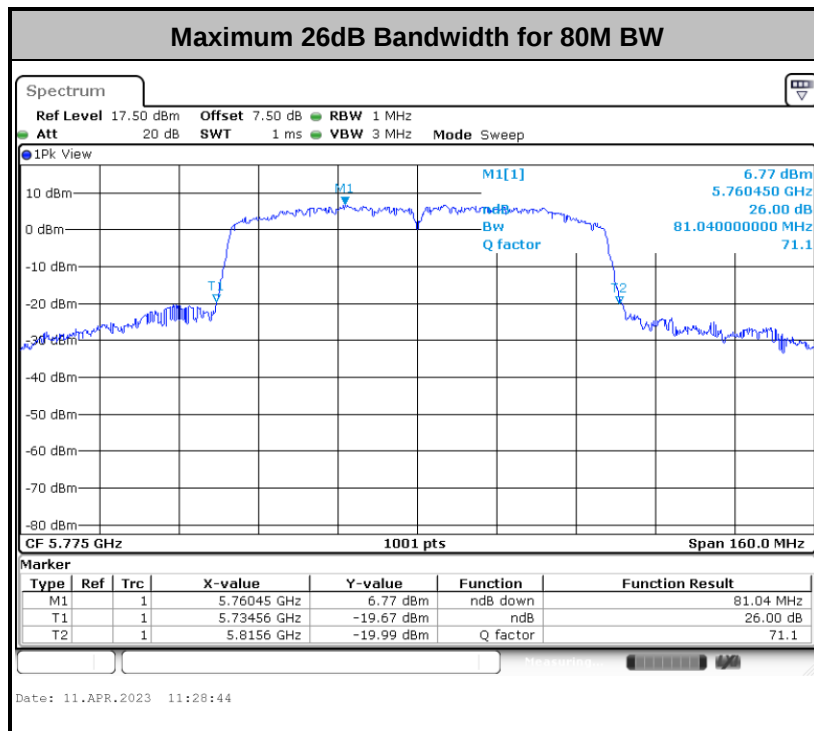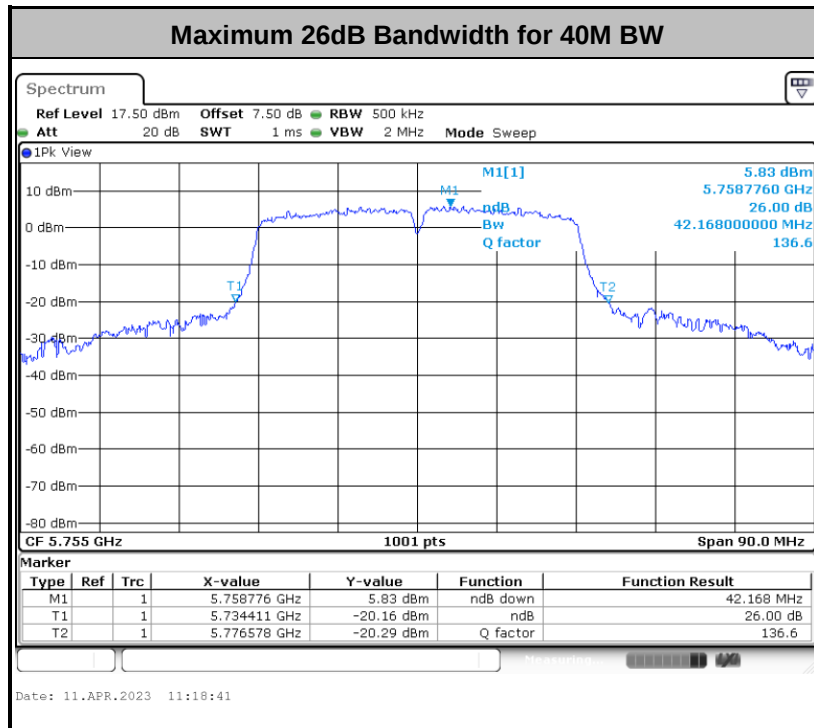

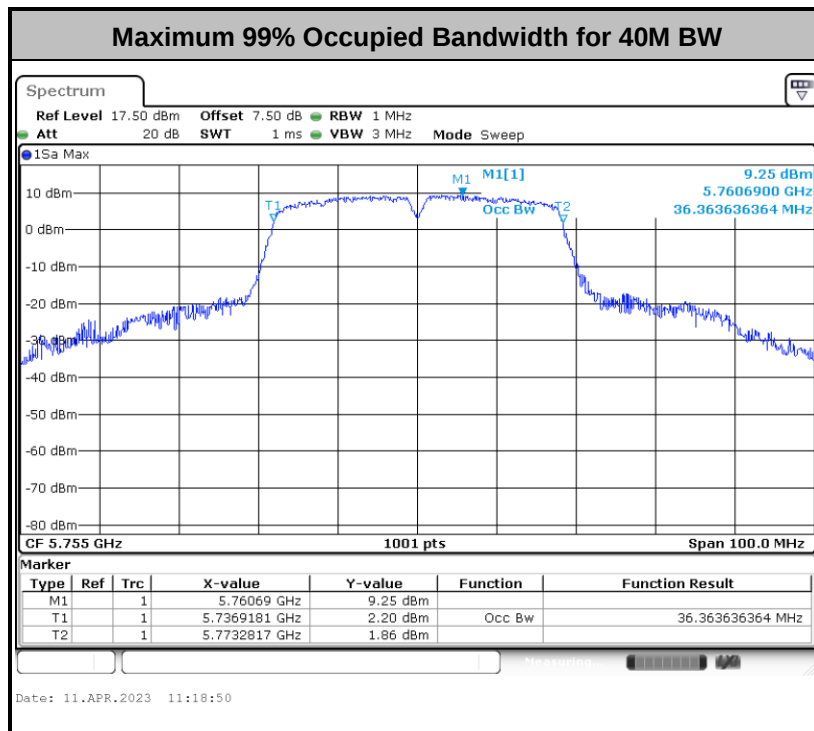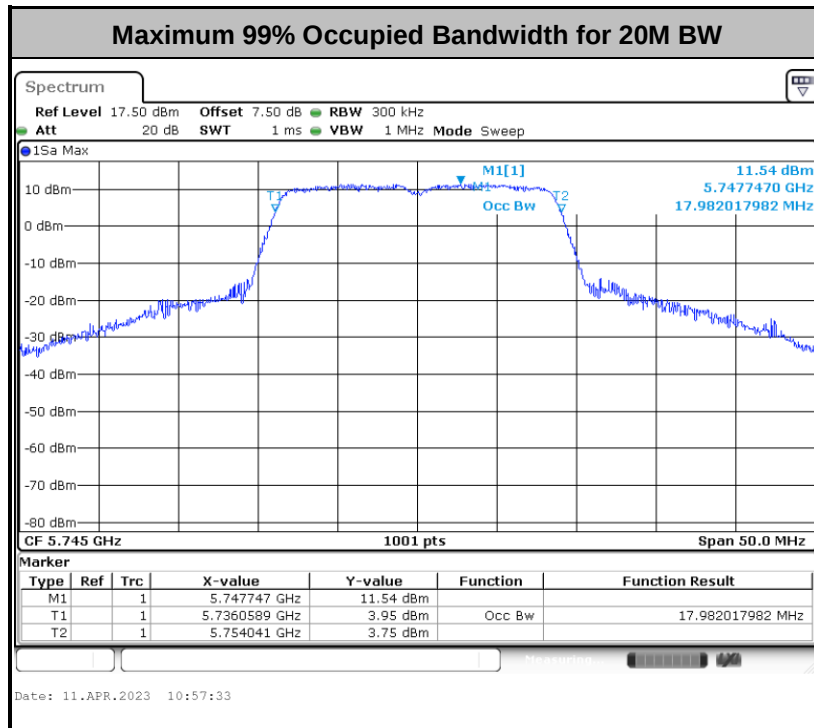

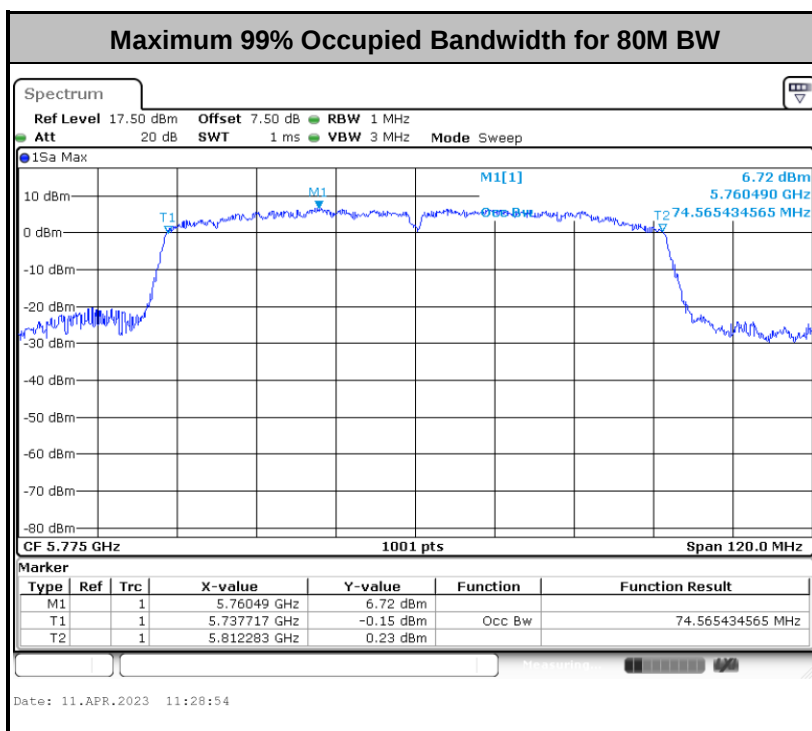

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

3.2.4 Test Setup

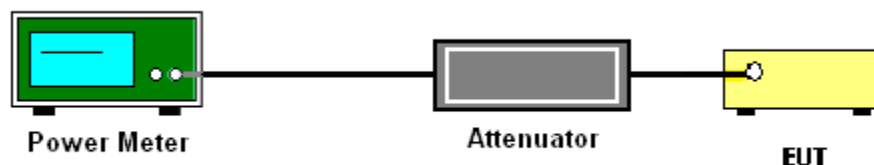

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
 - Set VBW $\geq$ 1 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
Method (c): Measure and add $10 \log(N_{\text{ANT}})$ dB.
With this technique, spectrum measurements are performed at each output of the device, but


rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{\text{ANT}})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{\text{ANT}}^{\text{th}}$ of the PSD limit.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

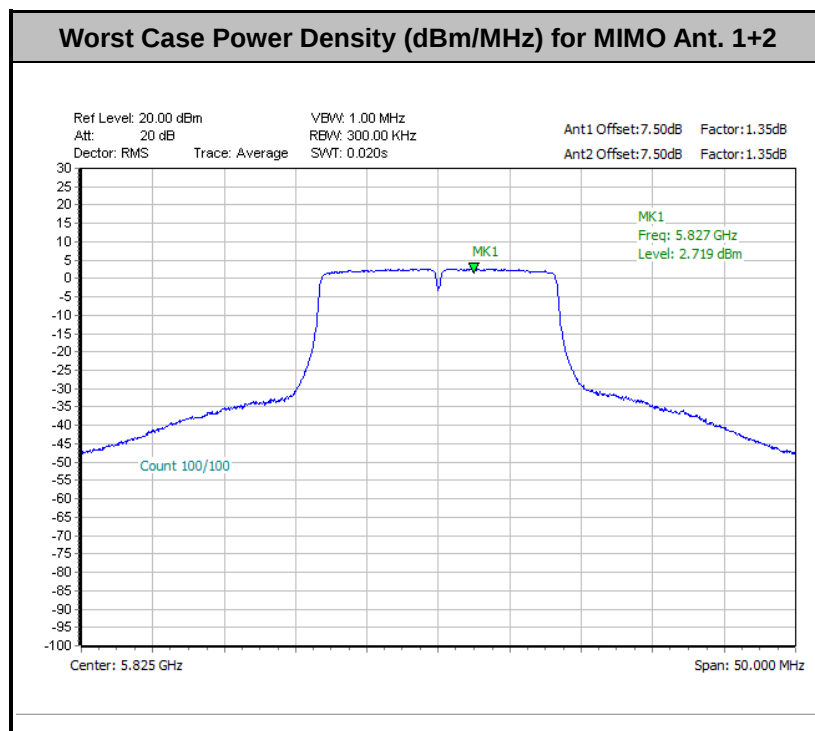

Note: Average Power Density (dB) = Measured value+ Duty Factor + RBW offset.



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

- (3) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that

complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the

limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.


7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

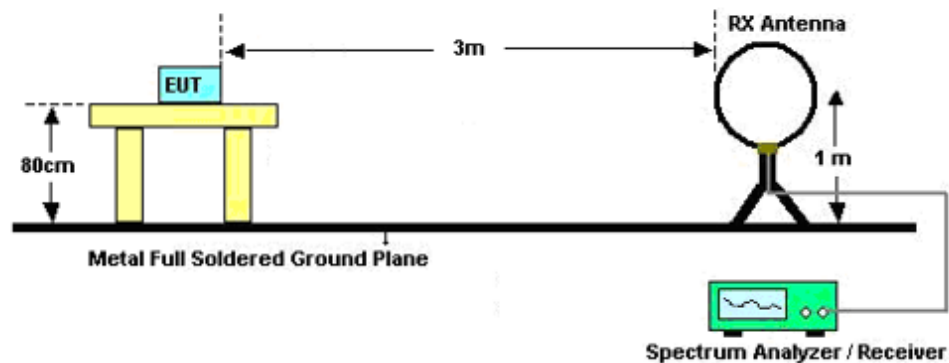

For radiated emissions from 30MHz to 1GHz

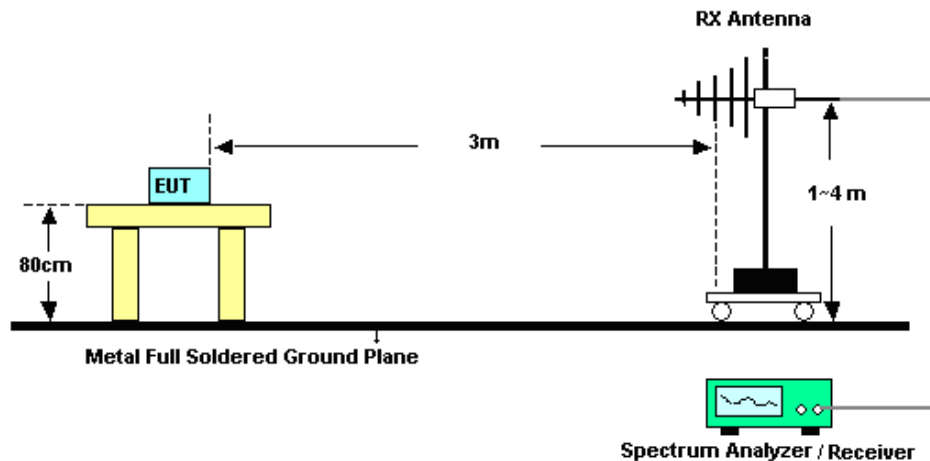

For radiated emissions above 1GHz

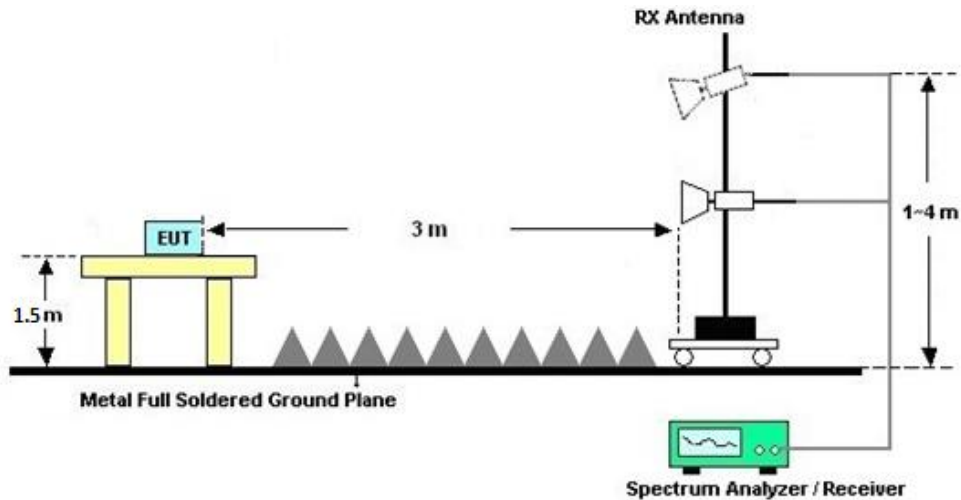

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

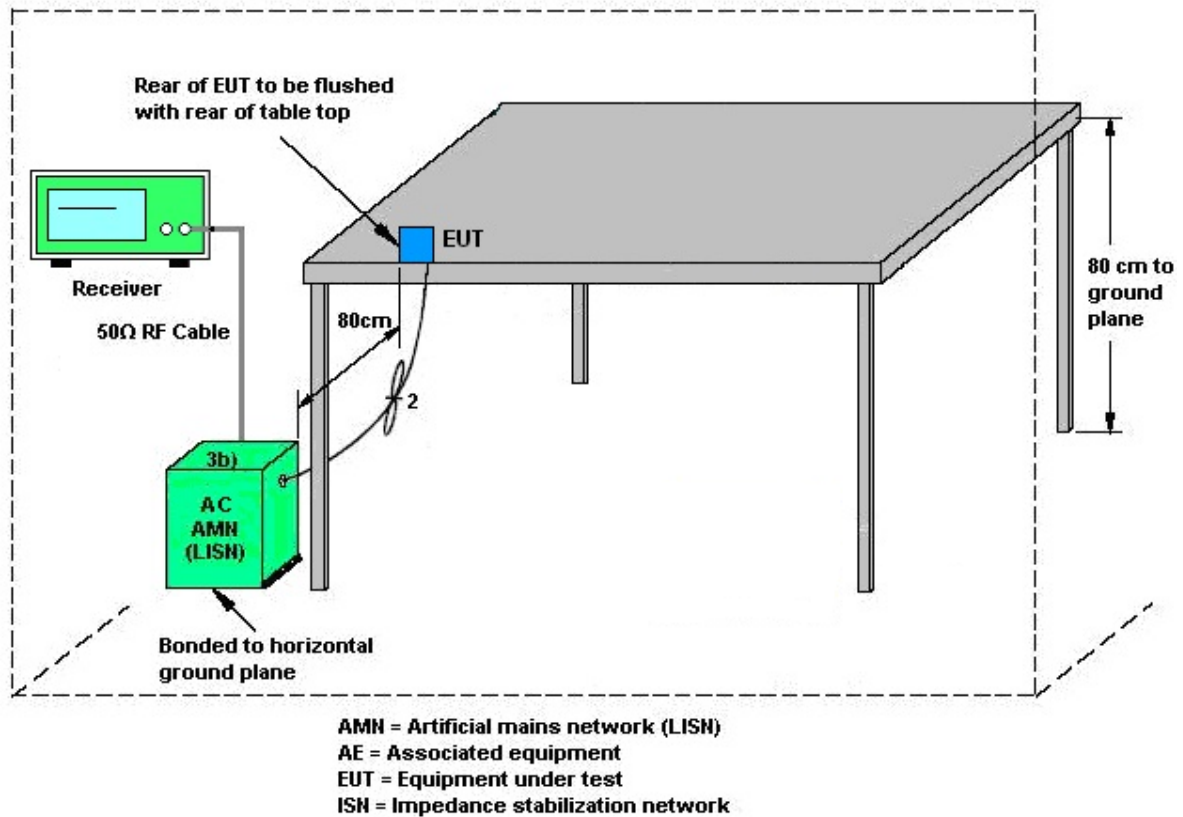

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Antenna Requirements

3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 0 (dBi)	Ant. 1 (dBi)				
U NII-3	0.95	0.95	0.95	3.96	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Apr. 11, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Apr. 11, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Apr. 11, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 13, 2022	Apr. 19, 2023	Oct. 12, 2023	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G, MAX 30dB	Mar. 24, 2023	Apr. 19, 2023	Mar. 23, 2024	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Apr. 19, 2023	Oct. 15, 2023	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 24, 2022	Apr. 19, 2023	May 23, 2023	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 06, 2023	Apr. 19, 2023	Apr. 05, 2024	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 08, 2023	Apr. 19, 2023	Jan. 07, 2024	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9kHz~1GHz	Jul. 11, 2022	Apr. 19, 2023	Jul. 10, 2023	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060852	18~40GHz	Jan. 05, 2023	Apr. 19, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060839	1Ghz~18Ghz	Oct. 12, 2022	Apr. 19, 2023	Oct. 11, 2023	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Jan. 05, 2023	Apr. 19, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 19, 2023	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 19, 2023	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 19, 2023	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	May 09, 2023	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	May 09, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	May 09, 2023	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	May 09, 2023	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power Spectral Density	±0.40 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.28dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2023.4.11	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	2	149	5745	17.08	16.98	18.93	18.63	16.35	16.35	0.5	Pass
11a	6Mbps	2	157	5785	17.13	16.93	19.48	18.68	16.30	16.30	0.5	Pass
11a	6Mbps	2	165	5825	17.03	16.98	19.23	18.58	16.30	16.35	0.5	Pass
VHT20	MCS0	2	149	5745	17.98	17.93	20.88	20.83	17.55	17.30	0.5	Pass
VHT20	MCS0	2	157	5785	17.98	17.88	20.98	20.88	17.55	17.30	0.5	Pass
VHT20	MCS0	2	165	5825	17.93	17.93	20.93	20.78	17.55	17.30	0.5	Pass
VHT40	MCS0	2	151	5755	36.36	36.16	42.17	41.36	33.19	35.10	0.5	Pass
VHT40	MCS0	2	159	5795	36.36	36.16	41.90	41.27	35.10	35.10	0.5	Pass
VHT80	MCS0	2	155	5775	74.57	74.45	81.04	80.56	75.20	75.20	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	149	5745	18.36	17.67	21.04	30.00		0.95		Pass
11a	6Mbps	2	157	5785	18.47	18.02	21.27	30.00		0.95		Pass
11a	6Mbps	2	165	5825	18.33	18.09	21.23	30.00		0.95		Pass
HT20	MCS0	2	149	5745	16.98	16.45	19.74	30.00		0.95		Pass
HT20	MCS0	2	157	5785	16.95	16.12	19.57	30.00		0.95		Pass
HT20	MCS0	2	165	5825	16.79	16.43	19.63	30.00		0.95		Pass
HT40	MCS0	2	151	5755	17.06	16.33	19.72	30.00		0.95		Pass
HT40	MCS0	2	159	5795	17.38	16.31	19.88	30.00		0.95		Pass
VHT20	MCS0	2	149	5745	17.07	16.52	19.81	30.00		0.95		Pass
VHT20	MCS0	2	157	5785	17.03	16.18	19.64	30.00		0.95		Pass
VHT20	MCS0	2	165	5825	16.86	16.50	19.69	30.00		0.95		Pass
VHT40	MCS0	2	151	5755	17.10	16.36	19.76	30.00		0.95		Pass
VHT40	MCS0	2	159	5795	17.48	16.33	19.96	30.00		0.95		Pass
VHT80	MCS0	2	155	5775	16.50	15.99	19.26	30.00		0.95		Pass

TEST RESULTS DATA
Power Spectral Density


U-NII-3 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	149	5745	2.22		0.97	2.06	5.07	30.00		3.96		Pass
11a	6Mbps	2	157	5785	2.22		1.20	2.38	5.39	30.00		3.96		Pass
11a	6Mbps	2	165	5825	2.22		1.38	2.55	5.56	30.00		3.96		Pass
VHT20	MCS0	2	149	5745	2.22		0.48	-0.57	3.49	30.00		3.96		Pass
VHT20	MCS0	2	157	5785	2.22		-0.73	0.42	3.43	30.00		3.96		Pass
VHT20	MCS0	2	165	5825	2.22		0.76	-0.30	3.77	30.00		3.96		Pass
VHT40	MCS0	2	151	5755	2.22		-2.51	-1.05	1.96	30.00		3.96		Pass
VHT40	MCS0	2	159	5795	2.22		-0.98	-2.32	2.03	30.00		3.96		Pass
VHT80	MCS0	2	155	5775	2.22		-4.97	-3.84	-0.83	30.00		3.96		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (2)



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

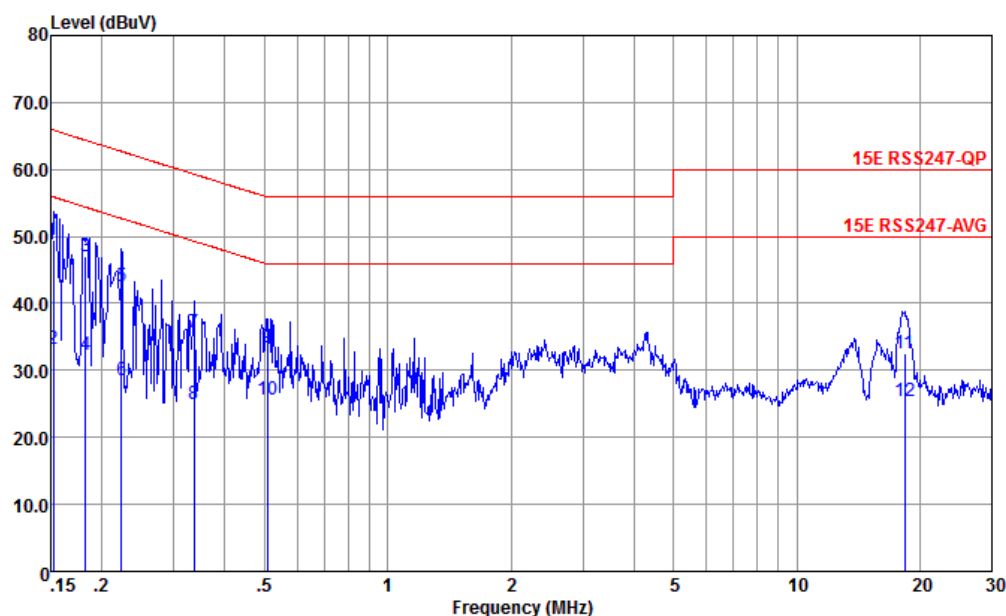


Site : CO01-KS
Condition : 15E RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.152	49.40	-16.47	65.87	38.90	0.07	10.43	QP
2	0.152	33.10	-22.77	55.87	22.60	0.07	10.43	Average
3	0.182	47.06	-17.31	64.37	36.60	0.04	10.42	QP
4	0.182	32.36	-22.01	54.37	21.90	0.04	10.42	Average
5	0.223	42.63	-20.07	62.70	32.20	0.03	10.40	QP
6	0.223	28.63	-24.07	52.70	18.20	0.03	10.40	Average
7	0.336	35.67	-23.64	59.31	25.30	0.04	10.33	QP
8	0.336	24.93	-24.38	49.31	14.56	0.04	10.33	Average
9	0.507	33.47	-22.53	56.00	23.29	-0.03	10.21	QP
10	0.507	25.67	-20.33	46.00	15.49	-0.03	10.21	Average
11	18.328	32.57	-27.43	60.00	21.56	-0.29	11.30	QP
12	18.328	25.31	-24.69	50.00	14.30	-0.29	11.30	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

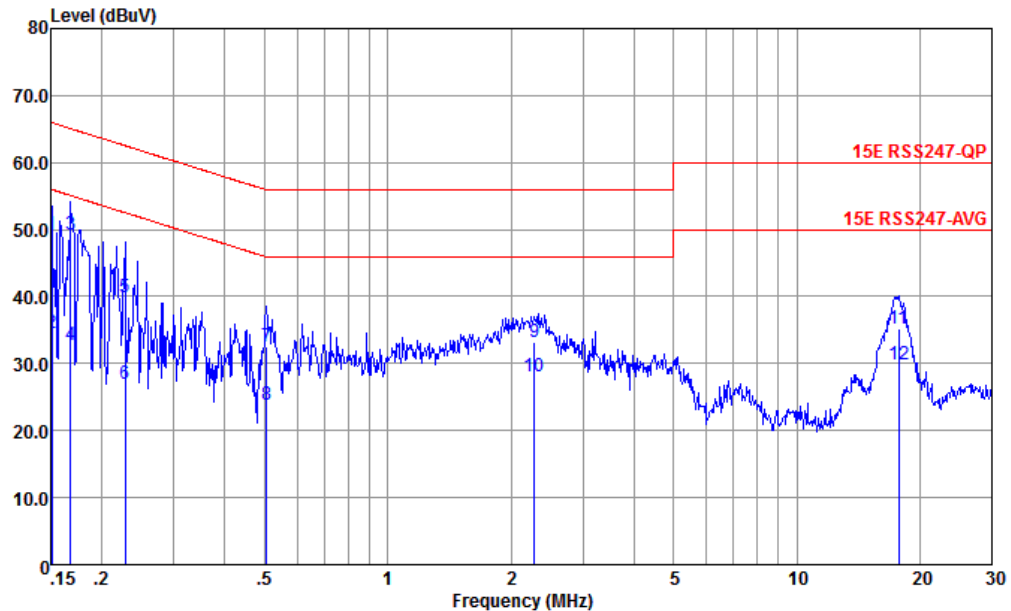

Site : CO01-KS
Condition : 15E RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.151	49.26	-16.70	65.96	38.80	0.03	10.43	QP
2	0.151	34.86	-21.40	55.96	24.10	0.03	10.43	Average
3 *	0.168	49.26	-15.82	65.08	38.79	0.04	10.43	QP
4	0.168	32.76	-22.32	55.08	22.29	0.04	10.43	Average
5	0.228	39.92	-22.60	62.52	29.50	0.02	10.40	QP
6	0.228	27.02	-25.50	52.52	16.60	0.02	10.40	Average
7	0.505	32.63	-23.37	56.00	22.50	-0.08	10.21	QP
8	0.505	23.93	-22.07	46.00	13.80	-0.08	10.21	Average
9	2.285	33.14	-22.86	56.00	23.20	-0.12	10.06	QP
10	2.285	28.14	-17.86	46.00	18.20	-0.12	10.06	Average
11	17.755	35.25	-24.75	60.00	24.20	-0.24	11.29	QP
12	17.755	29.95	-20.05	50.00	18.90	-0.24	11.29	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Carry Xu	Relative Humidity :	22~23℃
		Temperature :	41~42%

Radiated Spurious Emission Test Modes




Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	Remark
Mode 30	U-NII-3	5.725-5.85	CDD 0+1	802.11a	149	5745	6Mbps	-
Mode 31	U-NII-3	5.725-5.85	CDD 0+1	802.11a	157	5785	6Mbps	-
Mode 32	U-NII-3	5.725-5.85	CDD 0+1	802.11a	165	5825	6Mbps	-
Mode 33	U-NII-3	5.725-5.85	CDD 0+1	802.11ac VHT20	149	5745	MCS0	-
Mode 34	U-NII-3	5.725-5.85	CDD 0+1	802.11ac VHT20	157	5785	MCS0	-
Mode 35	U-NII-3	5.725-5.85	CDD 0+1	802.11ac VHT20	165	5825	MCS0	-
Mode 36	U-NII-3	5.725-5.85	CDD 0+1	802.11ac VHT40	151	5755	MCS0	-
Mode 37	U-NII-3	5.725-5.85	CDD 0+1	802.11ac VHT40	159	5795	MCS0	-
Mode 38	U-NII-3	5.725-5.85	CDD 0+1	802.11ac VHT80	155	5775	MCS0	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
30	802.11a	149	5639.20	50.26	68.30	-18.04	H	PEAK	Pass	Band Edge
	802.11a	149	11490.00	46.48	54.00	-7.52	V	AVERAGE	Pass	Harmonic
31	802.11a	157	-	-	-	-	-	-	-	Band Edge
	802.11a	157	11570.00	42.51	54.00	-11.49	V	AVERAGE	Pass	Harmonic
32	802.11a	165	5991.20	50.74	68.30	-17.56	H	PEAK	Pass	Band Edge
	802.11a	165	11650.00	44.41	54.00	-9.59	V	AVERAGE	Pass	Harmonic
33	802.11ac VHT20	149	5647.60	51.18	68.30	-17.12	H	PEAK	Pass	Band Edge
	802.11ac VHT20	149	17226.33	55.90	68.30	-12.40	V	Peak	Pass	Harmonic
34	802.11ac VHT20	157	-	-	-	-	-	-	-	Band Edge
	802.11ac VHT20	157	17362.73	54.20	68.30	-14.10	V	Peak	Pass	Harmonic
35	802.11ac VHT20	165	5931.60	48.78	68.30	-19.52	H	PEAK	Pass	Band Edge
	802.11ac VHT20	165	17470.53	56.84	68.30	-11.46	V	Peak	Pass	Harmonic
36	802.11ac VHT40	151	5640.61	50.56	68.30	-17.74	H	PEAK	Pass	Band Edge
	802.11ac VHT40	151	17271.80	52.63	68.30	-15.67	V	Peak	Pass	Harmonic
37	802.11ac VHT40	159	5942.40	50.28	68.30	-18.02	H	PEAK	Pass	Band Edge
	802.11ac VHT40	159	17389.13	52.19	68.30	-16.11	V	Peak	Pass	Harmonic
38	802.11ac VHT80	155	5651.20	52.69	69.19	-16.50	H	PEAK	Pass	Band Edge
	802.11ac VHT80	155	7962.13	51.46	68.30	-16.84	V	Peak	Pass	Harmonic
30	802.11a	149	45.52	28.05	40.00	-11.95	V	Peak	Pass	LF


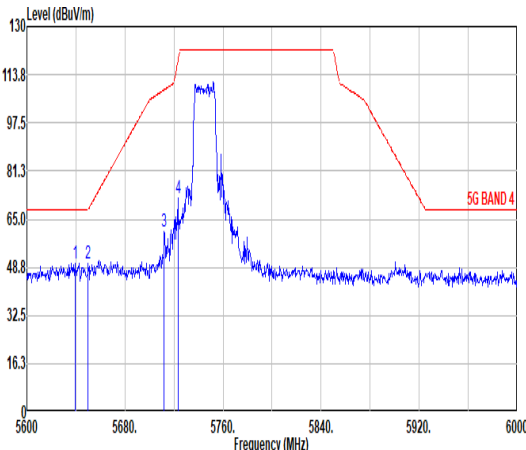
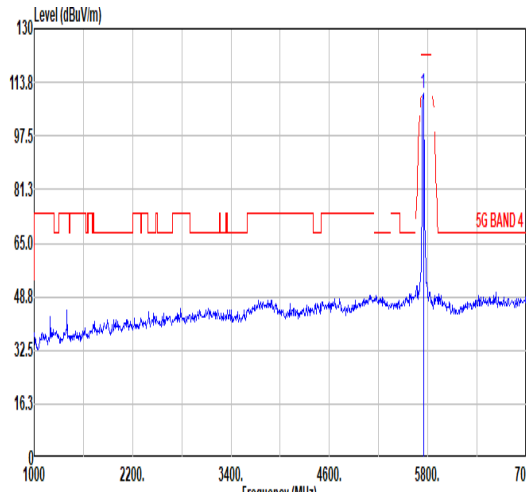
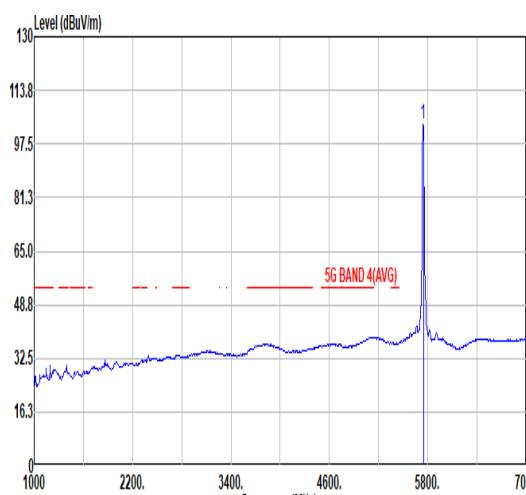


Mode	30																																																																																																																																									
	Band Edge																																																																																																																																									
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																									
ANT	CDD 0+1																																																																																																																																									
Pol.	Horizontal						Fundamental																																																																																																																																			
Peak																																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5639.20</td><td>50.26</td><td>68.30</td><td>-18.04</td><td>40.82</td><td>34.50</td><td>11.06</td><td>36.12</td><td>0.00</td><td>100</td><td>181</td><td>PEAK</td></tr><tr><td>2</td><td>5650.00</td><td>50.12</td><td>68.30</td><td>-18.18</td><td>40.83</td><td>34.50</td><td>11.07</td><td>36.28</td><td>0.00</td><td>100</td><td>181</td><td>PEAK</td></tr><tr><td>3</td><td>5712.00</td><td>60.69</td><td>108.66</td><td>-47.97</td><td>52.39</td><td>34.52</td><td>11.16</td><td>37.38</td><td>0.00</td><td>100</td><td>181</td><td>PEAK</td></tr><tr><td>4</td><td>5723.20</td><td>71.91</td><td>118.20</td><td>-46.29</td><td>63.77</td><td>34.55</td><td>11.17</td><td>37.58</td><td>0.00</td><td>100</td><td>181</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5639.20	50.26	68.30	-18.04	40.82	34.50	11.06	36.12	0.00	100	181	PEAK	2	5650.00	50.12	68.30	-18.18	40.83	34.50	11.07	36.28	0.00	100	181	PEAK	3	5712.00	60.69	108.66	-47.97	52.39	34.52	11.16	37.38	0.00	100	181	PEAK	4	5723.20	71.91	118.20	-46.29	63.77	34.55	11.17	37.58	0.00	100	181	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>110.25</td><td>-----</td><td>-----</td><td>102.44</td><td>34.59</td><td>11.21</td><td>37.99</td><td>0.00</td><td>100</td><td>181</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	110.25	-----	-----	102.44	34.59	11.21	37.99	0.00	100	181
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5639.20	50.26	68.30	-18.04	40.82	34.50	11.06	36.12	0.00	100	181	PEAK																																																																																																																														
2	5650.00	50.12	68.30	-18.18	40.83	34.50	11.07	36.28	0.00	100	181	PEAK																																																																																																																														
3	5712.00	60.69	108.66	-47.97	52.39	34.52	11.16	37.38	0.00	100	181	PEAK																																																																																																																														
4	5723.20	71.91	118.20	-46.29	63.77	34.55	11.17	37.58	0.00	100	181	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5745.00	110.25	-----	-----	102.44	34.59	11.21	37.99	0.00	100	181	PEAK																																																																																																																														
Avg	Blank																																																																																																																																									
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>103.66</td><td>-----</td><td>-----</td><td>95.76</td><td>34.58</td><td>11.20</td><td>37.88</td><td>0.00</td><td>100</td><td>181</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	103.66	-----	-----	95.76	34.58	11.20	37.88	0.00	100	181	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5745.00	103.66	-----	-----	95.76	34.58	11.20	37.88	0.00	100	181	AVERAGE																																																																																																																														



Mode	30																																																																																																																																				
	Band Edge																																																																																																																																				
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																				
ANT	CDD 0+1																																																																																																																																				
Pol.	Vertical						Fundamental																																																																																																																														
Peak																																																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5617.20</td><td>49.07</td><td>68.30</td><td>-19.23</td><td>39.71</td><td>34.50</td><td>11.03</td><td>36.17</td><td>0.00</td><td>295</td><td>77 PEAK</td></tr><tr><td>2</td><td>5650.40</td><td>46.98</td><td>68.60</td><td>-21.62</td><td>37.70</td><td>34.50</td><td>11.07</td><td>36.29</td><td>0.00</td><td>295</td><td>77 PEAK</td></tr><tr><td>3</td><td>5719.20</td><td>56.94</td><td>110.68</td><td>-53.74</td><td>48.74</td><td>34.54</td><td>11.17</td><td>37.51</td><td>0.00</td><td>295</td><td>77 PEAK</td></tr><tr><td>4</td><td>5720.40</td><td>57.02</td><td>111.81</td><td>-54.79</td><td>48.84</td><td>34.54</td><td>11.17</td><td>37.53</td><td>0.00</td><td>295</td><td>77 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5617.20	49.07	68.30	-19.23	39.71	34.50	11.03	36.17	0.00	295	77 PEAK	2	5650.40	46.98	68.60	-21.62	37.70	34.50	11.07	36.29	0.00	295	77 PEAK	3	5719.20	56.94	110.68	-53.74	48.74	34.54	11.17	37.51	0.00	295	77 PEAK	4	5720.40	57.02	111.81	-54.79	48.84	34.54	11.17	37.53	0.00	295	77 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>103.32</td><td>-----</td><td>-----</td><td>95.51</td><td>34.59</td><td>11.21</td><td>37.99</td><td>0.00</td><td>295</td><td>77 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	103.32	-----	-----	95.51	34.59	11.21	37.99	0.00	295
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5617.20	49.07	68.30	-19.23	39.71	34.50	11.03	36.17	0.00	295	77 PEAK																																																																																																																										
2	5650.40	46.98	68.60	-21.62	37.70	34.50	11.07	36.29	0.00	295	77 PEAK																																																																																																																										
3	5719.20	56.94	110.68	-53.74	48.74	34.54	11.17	37.51	0.00	295	77 PEAK																																																																																																																										
4	5720.40	57.02	111.81	-54.79	48.84	34.54	11.17	37.53	0.00	295	77 PEAK																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5745.00	103.32	-----	-----	95.51	34.59	11.21	37.99	0.00	295	77 PEAK																																																																																																																										
Avg																																																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>95.60</td><td>-----</td><td>-----</td><td>87.70</td><td>34.58</td><td>11.20</td><td>37.88</td><td>0.00</td><td>295</td><td>77 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	95.60	-----	-----	87.70	34.58	11.20	37.88	0.00	295	77 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>95.60</td><td>-----</td><td>-----</td><td>87.70</td><td>34.58</td><td>11.20</td><td>37.88</td><td>0.00</td><td>295</td><td>77 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	95.60	-----	-----	87.70	34.58	11.20	37.88	0.00	295	77 AVERAGE																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5745.00	95.60	-----	-----	87.70	34.58	11.20	37.88	0.00	295	77 AVERAGE																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5745.00	95.60	-----	-----	87.70	34.58	11.20	37.88	0.00	295	77 AVERAGE																																																																																																																										

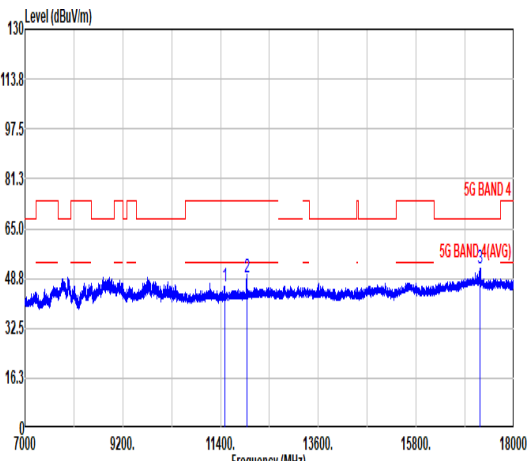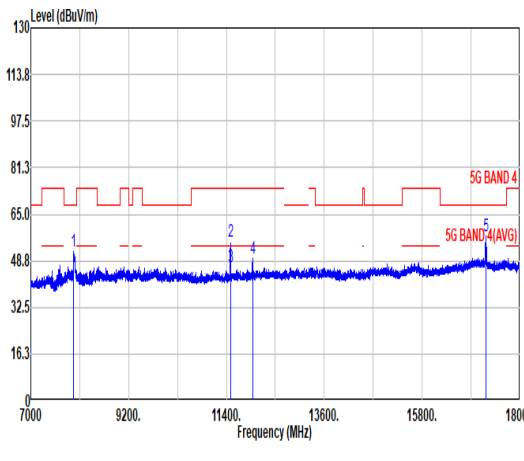
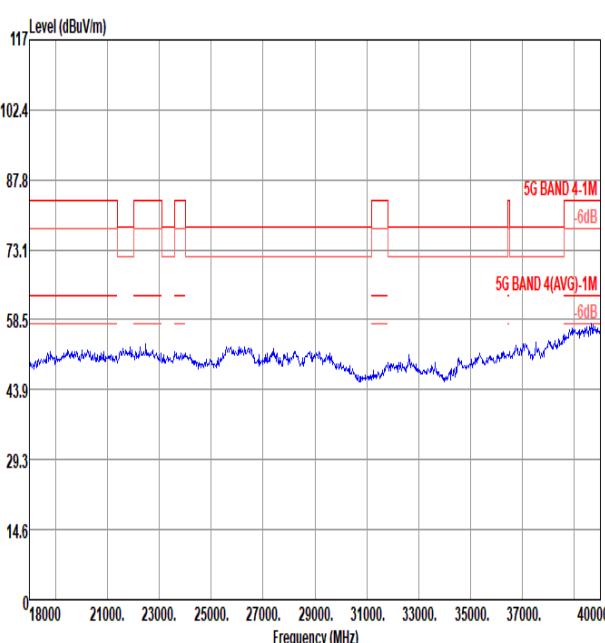
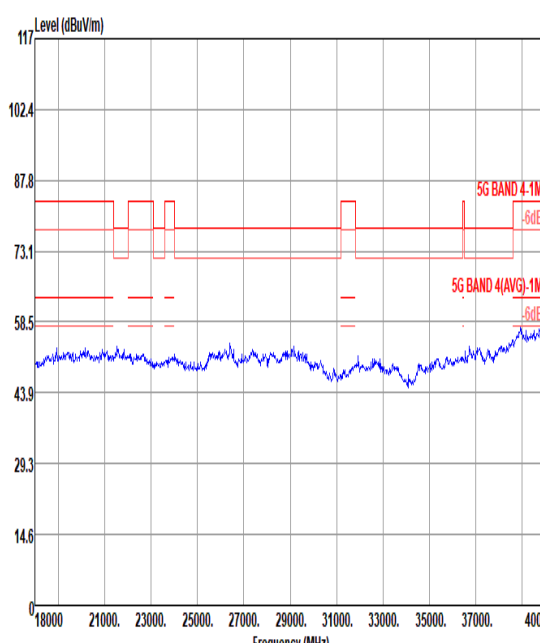


Mode	30																																																																																																																																																																																
	Harmonic																																																																																																																																																																																
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																																																																
ANT	CDD 0+1																																																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																																																										
Peak Avg																																																																																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.20</td><td>46.35</td><td>74.00</td><td>-27.65</td><td>58.44</td><td>38.29</td><td>16.36</td><td>66.74</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11985.93</td><td>49.18</td><td>74.00</td><td>-24.82</td><td>60.18</td><td>38.50</td><td>16.67</td><td>66.17</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>17228.53</td><td>52.14</td><td>68.30</td><td>-16.16</td><td>54.06</td><td>42.49</td><td>20.15</td><td>64.56</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11490.20	46.35	74.00	-27.65	58.44	38.29	16.36	66.74	0.00	---	---	Peak	2	11985.93	49.18	74.00	-24.82	60.18	38.50	16.67	66.17	0.00	---	---	Peak	3	17228.53	52.14	68.30	-16.16	54.06	42.49	20.15	64.56	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7962.13</td><td>51.94</td><td>68.30</td><td>-16.36</td><td>69.83</td><td>35.00</td><td>13.32</td><td>67.01</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11490.00</td><td>55.61</td><td>74.00</td><td>-18.39</td><td>67.70</td><td>38.29</td><td>16.36</td><td>66.74</td><td>0.00</td><td>289</td><td>260</td><td>PEAK</td></tr><tr><td>3</td><td>11490.00</td><td>46.48</td><td>54.00</td><td>-7.52</td><td>58.57</td><td>38.29</td><td>16.36</td><td>66.74</td><td>0.00</td><td>289</td><td>260</td><td>AVERAGE</td></tr><tr><td>4</td><td>11994.73</td><td>49.56</td><td>74.00</td><td>-24.44</td><td>60.54</td><td>38.50</td><td>16.68</td><td>66.16</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>17228.53</td><td>57.16</td><td>68.30</td><td>-11.14</td><td>59.08</td><td>42.49</td><td>20.15</td><td>64.56</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7962.13	51.94	68.30	-16.36	69.83	35.00	13.32	67.01	0.00	---	---	Peak	2	11490.00	55.61	74.00	-18.39	67.70	38.29	16.36	66.74	0.00	289	260	PEAK	3	11490.00	46.48	54.00	-7.52	58.57	38.29	16.36	66.74	0.00	289	260	AVERAGE	4	11994.73	49.56	74.00	-24.44	60.54	38.50	16.68	66.16	0.00	---	---	Peak	5	17228.53	57.16	68.30	-11.14	59.08	42.49	20.15	64.56	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	11490.20	46.35	74.00	-27.65	58.44	38.29	16.36	66.74	0.00	---	---	Peak																																																																																																																																																																					
2	11985.93	49.18	74.00	-24.82	60.18	38.50	16.67	66.17	0.00	---	---	Peak																																																																																																																																																																					
3	17228.53	52.14	68.30	-16.16	54.06	42.49	20.15	64.56	0.00	---	---	Peak																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	7962.13	51.94	68.30	-16.36	69.83	35.00	13.32	67.01	0.00	---	---	Peak																																																																																																																																																																					
2	11490.00	55.61	74.00	-18.39	67.70	38.29	16.36	66.74	0.00	289	260	PEAK																																																																																																																																																																					
3	11490.00	46.48	54.00	-7.52	58.57	38.29	16.36	66.74	0.00	289	260	AVERAGE																																																																																																																																																																					
4	11994.73	49.56	74.00	-24.44	60.54	38.50	16.68	66.16	0.00	---	---	Peak																																																																																																																																																																					
5	17228.53	57.16	68.30	-11.14	59.08	42.49	20.15	64.56	0.00	---	---	Peak																																																																																																																																																																					
Peak Avg																																																																																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.20</td><td>46.35</td><td>74.00</td><td>-27.65</td><td>58.44</td><td>38.29</td><td>16.36</td><td>66.74</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11985.93</td><td>49.18</td><td>74.00</td><td>-24.82</td><td>60.18</td><td>38.50</td><td>16.67</td><td>66.17</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>17228.53</td><td>52.14</td><td>68.30</td><td>-16.16</td><td>54.06</td><td>42.49</td><td>20.15</td><td>64.56</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11490.20	46.35	74.00	-27.65	58.44	38.29	16.36	66.74	0.00	---	---	Peak	2	11985.93	49.18	74.00	-24.82	60.18	38.50	16.67	66.17	0.00	---	---	Peak	3	17228.53	52.14	68.30	-16.16	54.06	42.49	20.15	64.56	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.20</td><td>46.35</td><td>74.00</td><td>-27.65</td><td>58.44</td><td>38.29</td><td>16.36</td><td>66.74</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11985.93</td><td>49.18</td><td>74.00</td><td>-24.82</td><td>60.18</td><td>38.50</td><td>16.67</td><td>66.17</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>17228.53</td><td>52.14</td><td>68.30</td><td>-16.16</td><td>54.06</td><td>42.49</td><td>20.15</td><td>64.56</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11490.20	46.35	74.00	-27.65	58.44	38.29	16.36	66.74	0.00	---	---	Peak	2	11985.93	49.18	74.00	-24.82	60.18	38.50	16.67	66.17	0.00	---	---	Peak	3	17228.53	52.14	68.30	-16.16	54.06	42.49	20.15	64.56	0.00	---	---	Peak																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	11490.20	46.35	74.00	-27.65	58.44	38.29	16.36	66.74	0.00	---	---	Peak																																																																																																																																																																					
2	11985.93	49.18	74.00	-24.82	60.18	38.50	16.67	66.17	0.00	---	---	Peak																																																																																																																																																																					
3	17228.53	52.14	68.30	-16.16	54.06	42.49	20.15	64.56	0.00	---	---	Peak																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	11490.20	46.35	74.00	-27.65	58.44	38.29	16.36	66.74	0.00	---	---	Peak																																																																																																																																																																					
2	11985.93	49.18	74.00	-24.82	60.18	38.50	16.67	66.17	0.00	---	---	Peak																																																																																																																																																																					
3	17228.53	52.14	68.30	-16.16	54.06	42.49	20.15	64.56	0.00	---	---	Peak																																																																																																																																																																					



		31																																																																																																																																																																																																																																																													
Mode		Harmonic																																																																																																																																																																																																																																																													
		U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																																																																																																																																																													
ANT		CDD 0+1																																																																																																																																																																																																																																																													
Pol.		Horizontal										Vertical																																																																																																																																																																																																																																																			
Peak Avg																																																																																																																																																																																																																																																															
	<table><tr><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>11565.00</td><td>46.81</td><td>74.00</td><td>-27.19</td><td>58.70</td><td>38.37</td><td>16.40</td><td>66.66</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11981.53</td><td>49.16</td><td>74.00</td><td>-24.84</td><td>60.16</td><td>38.50</td><td>16.67</td><td>66.17</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>17362.00</td><td>51.38</td><td>68.30</td><td>-16.92</td><td>53.33</td><td>42.39</td><td>20.24</td><td>64.58</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></table> <table><tr><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>7981.93</td><td>50.17</td><td>68.30</td><td>-18.13</td><td>68.03</td><td>35.80</td><td>13.33</td><td>66.99</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11570.00</td><td>51.64</td><td>74.00</td><td>-22.36</td><td>63.51</td><td>38.37</td><td>16.41</td><td>66.65</td><td>0.00</td><td>343</td><td>261</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>11570.00</td><td>42.51</td><td>54.00</td><td>-11.49</td><td>54.38</td><td>38.37</td><td>16.41</td><td>66.65</td><td>0.00</td><td>343</td><td>261</td><td>---</td><td>---</td><td>---</td><td>---</td><td>AVERAGE</td></tr><tr><td>4</td><td>11979.33</td><td>49.36</td><td>74.00</td><td>-24.64</td><td>60.36</td><td>38.50</td><td>16.67</td><td>66.17</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>17351.73</td><td>56.78</td><td>68.30</td><td>-11.52</td><td>58.68</td><td>42.44</td><td>20.24</td><td>64.58</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></table>																		Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor									MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg						1	11565.00	46.81	74.00	-27.19	58.70	38.37	16.40	66.66	0.00	---	---	---	---	---	---	Peak	2	11981.53	49.16	74.00	-24.84	60.16	38.50	16.67	66.17	0.00	---	---	---	---	---	---	Peak	3	17362.00	51.38	68.30	-16.92	53.33	42.39	20.24	64.58	0.00	---	---	---	---	---	---	Peak	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor									MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg						1	7981.93	50.17	68.30	-18.13	68.03	35.80	13.33	66.99	0.00	---	---	---	---	---	---	Peak	2	11570.00	51.64	74.00	-22.36	63.51	38.37	16.41	66.65	0.00	343	261	---	---	---	---	Peak	3	11570.00	42.51	54.00	-11.49	54.38	38.37	16.41	66.65	0.00	343	261	---	---	---	---	AVERAGE	4	11979.33	49.36	74.00	-24.64	60.36	38.50	16.67	66.17	0.00	---	---	---	---	---	---	Peak	5	17351.73	56.78	68.30	-11.52	58.68	42.44	20.24	64.58	0.00	---	---	---	---	---	---
Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark																																																																																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																				
1	11565.00	46.81	74.00	-27.19	58.70	38.37	16.40	66.66	0.00	---	---	---	---	---	---	Peak																																																																																																																																																																																																																																															
2	11981.53	49.16	74.00	-24.84	60.16	38.50	16.67	66.17	0.00	---	---	---	---	---	---	Peak																																																																																																																																																																																																																																															
3	17362.00	51.38	68.30	-16.92	53.33	42.39	20.24	64.58	0.00	---	---	---	---	---	---	Peak																																																																																																																																																																																																																																															
Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark																																																																																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																				
1	7981.93	50.17	68.30	-18.13	68.03	35.80	13.33	66.99	0.00	---	---	---	---	---	---	Peak																																																																																																																																																																																																																																															
2	11570.00	51.64	74.00	-22.36	63.51	38.37	16.41	66.65	0.00	343	261	---	---	---	---	Peak																																																																																																																																																																																																																																															
3	11570.00	42.51	54.00	-11.49	54.38	38.37	16.41	66.65	0.00	343	261	---	---	---	---	AVERAGE																																																																																																																																																																																																																																															
4	11979.33	49.36	74.00	-24.64	60.36	38.50	16.67	66.17	0.00	---	---	---	---	---	---	Peak																																																																																																																																																																																																																																															
5	17351.73	56.78	68.30	-11.52	58.68	42.44	20.24	64.58	0.00	---	---	---	---	---	---	Peak																																																																																																																																																																																																																																															

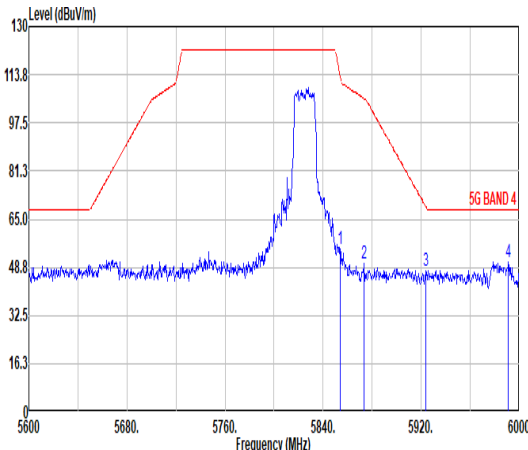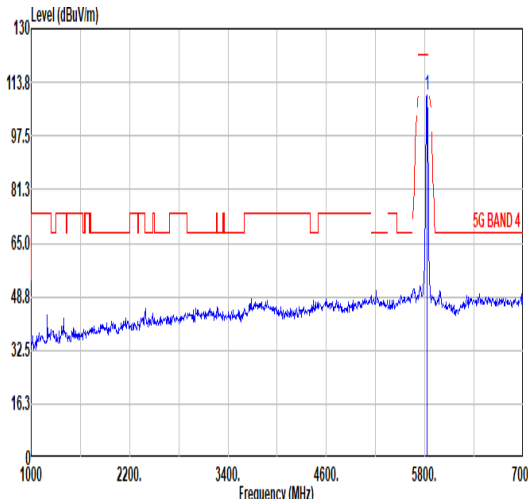
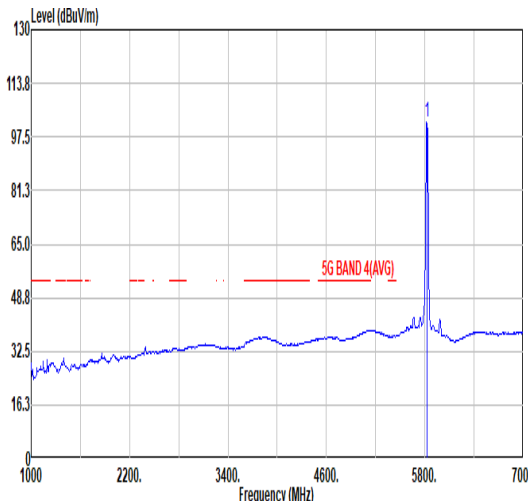


Mode	32																																																																																																																											
	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																											
ANT	CDD 0+1																																																																																																																											
Pol.	Horizontal						Fundamental																																																																																																																					
Peak																																																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5854.00</td><td>55.08</td><td>113.18 -58.10</td><td>48.85</td><td>34.81</td><td>11.33</td><td>39.91</td><td>0.00</td><td>100</td><td>180 PEAK</td></tr><tr><td>2 5873.60</td><td>50.22</td><td>105.69 -55.47</td><td>44.04</td><td>34.85</td><td>11.35</td><td>40.02</td><td>0.00</td><td>100</td><td>180 PEAK</td></tr><tr><td>3 5923.60</td><td>47.75</td><td>69.33 -21.58</td><td>41.25</td><td>34.99</td><td>11.40</td><td>39.89</td><td>0.00</td><td>100</td><td>180 PEAK</td></tr><tr><td>4 5991.20</td><td>50.74</td><td>68.30 -17.56</td><td>43.82</td><td>35.18</td><td>11.46</td><td>39.72</td><td>0.00</td><td>100</td><td>180 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5854.00	55.08	113.18 -58.10	48.85	34.81	11.33	39.91	0.00	100	180 PEAK	2 5873.60	50.22	105.69 -55.47	44.04	34.85	11.35	40.02	0.00	100	180 PEAK	3 5923.60	47.75	69.33 -21.58	41.25	34.99	11.40	39.89	0.00	100	180 PEAK	4 5991.20	50.74	68.30 -17.56	43.82	35.18	11.46	39.72	0.00	100	180 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5825.00</td><td>109.94</td><td>-----</td><td>-----</td><td>103.25</td><td>34.75</td><td>11.31</td><td>39.37</td><td>0.00</td><td>100</td><td>180 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5825.00	109.94	-----	-----	103.25	34.75	11.31	39.37	0.00	100	180 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1 5854.00	55.08	113.18 -58.10	48.85	34.81	11.33	39.91	0.00	100	180 PEAK																																																																																																																			
2 5873.60	50.22	105.69 -55.47	44.04	34.85	11.35	40.02	0.00	100	180 PEAK																																																																																																																			
3 5923.60	47.75	69.33 -21.58	41.25	34.99	11.40	39.89	0.00	100	180 PEAK																																																																																																																			
4 5991.20	50.74	68.30 -17.56	43.82	35.18	11.46	39.72	0.00	100	180 PEAK																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1 5825.00	109.94	-----	-----	103.25	34.75	11.31	39.37	0.00	100	180 PEAK																																																																																																																		
Avg	Blank																																																																																																																											
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5825.00</td><td>101.87</td><td>-----</td><td>-----</td><td>95.10</td><td>34.74</td><td>11.30</td><td>39.27</td><td>0.00</td><td>100</td><td>180 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5825.00	101.87	-----	-----	95.10	34.74	11.30	39.27	0.00	100	180 AVERAGE																																																																						
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1 5825.00	101.87	-----	-----	95.10	34.74	11.30	39.27	0.00	100	180 AVERAGE																																																																																																																		






Mode	32																																																																																																																																									
	Band Edge																																																																																																																																									
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																																									
ANT	CDD 0+1																																																																																																																																									
Pol.	Vertical						Fundamental																																																																																																																																			
Peak																																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5854.80</td><td>47.03</td><td>111.36</td><td>-64.33</td><td>40.80</td><td>34.81</td><td>11.34</td><td>39.92</td><td>0.00</td><td>300</td><td>65</td><td>PEAK</td></tr><tr><td>2</td><td>5874.80</td><td>45.51</td><td>105.36</td><td>-59.85</td><td>39.33</td><td>34.85</td><td>11.35</td><td>40.02</td><td>0.00</td><td>300</td><td>65</td><td>PEAK</td></tr><tr><td>3</td><td>5923.20</td><td>47.16</td><td>69.63</td><td>-22.47</td><td>40.66</td><td>34.99</td><td>11.40</td><td>39.89</td><td>0.00</td><td>300</td><td>65</td><td>PEAK</td></tr><tr><td>4</td><td>5972.00</td><td>47.09</td><td>68.30</td><td>-21.21</td><td>40.27</td><td>35.14</td><td>11.45</td><td>39.77</td><td>0.00</td><td>300</td><td>65</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	47.03	111.36	-64.33	40.80	34.81	11.34	39.92	0.00	300	65	PEAK	2	5874.80	45.51	105.36	-59.85	39.33	34.85	11.35	40.02	0.00	300	65	PEAK	3	5923.20	47.16	69.63	-22.47	40.66	34.99	11.40	39.89	0.00	300	65	PEAK	4	5972.00	47.09	68.30	-21.21	40.27	35.14	11.45	39.77	0.00	300	65	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>102.56</td><td>-----</td><td>-----</td><td>95.87</td><td>34.75</td><td>11.31</td><td>39.37</td><td>0.00</td><td>300</td><td>65</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	102.56	-----	-----	95.87	34.75	11.31	39.37	0.00	300	65
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5854.80	47.03	111.36	-64.33	40.80	34.81	11.34	39.92	0.00	300	65	PEAK																																																																																																																														
2	5874.80	45.51	105.36	-59.85	39.33	34.85	11.35	40.02	0.00	300	65	PEAK																																																																																																																														
3	5923.20	47.16	69.63	-22.47	40.66	34.99	11.40	39.89	0.00	300	65	PEAK																																																																																																																														
4	5972.00	47.09	68.30	-21.21	40.27	35.14	11.45	39.77	0.00	300	65	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5825.00	102.56	-----	-----	95.87	34.75	11.31	39.37	0.00	300	65	PEAK																																																																																																																														
Avg	Blank																																																																																																																																									
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>93.98</td><td>-----</td><td>-----</td><td>87.29</td><td>34.75</td><td>11.31</td><td>39.37</td><td>0.00</td><td>300</td><td>65</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	93.98	-----	-----	87.29	34.75	11.31	39.37	0.00	300	65	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5825.00	93.98	-----	-----	87.29	34.75	11.31	39.37	0.00	300	65	AVERAGE																																																																																																																														


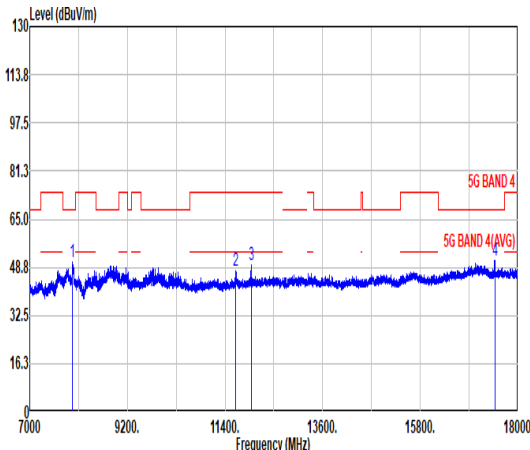
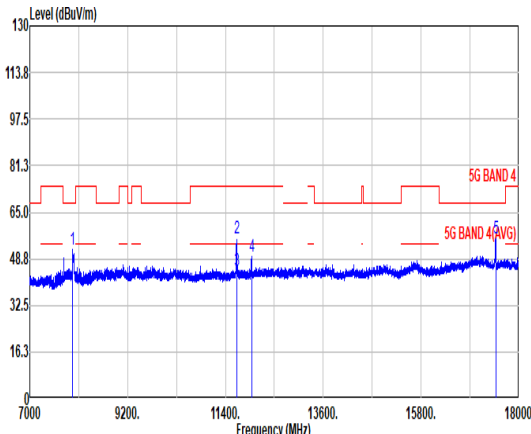


Mode	32																																																																																																																																																																																													
	Harmonic																																																																																																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																																																																																													
ANT	CDD 0+1																																																																																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																																																																																							
Peak Avg																																																																																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7961.40</td><td>50.51</td><td>68.30</td><td>-17.79</td><td>68.40</td><td>35.80</td><td>13.32</td><td>67.01</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11637.60</td><td>47.57</td><td>74.00</td><td>-26.43</td><td>59.26</td><td>38.44</td><td>16.45</td><td>66.58</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>11996.93</td><td>49.78</td><td>74.00</td><td>-24.22</td><td>60.75</td><td>38.50</td><td>16.68</td><td>66.15</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>17488.80</td><td>50.89</td><td>68.30</td><td>-17.41</td><td>53.13</td><td>42.04</td><td>20.32</td><td>64.60</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7961.40	50.51	68.30	-17.79	68.40	35.80	13.32	67.01	0.00	---	---	Peak	2	11637.60	47.57	74.00	-26.43	59.26	38.44	16.45	66.58	0.00	---	---	Peak	3	11996.93	49.78	74.00	-24.22	60.75	38.50	16.68	66.15	0.00	---	---	Peak	4	17488.80	50.89	68.30	-17.41	53.13	42.04	20.32	64.60	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7962.13</td><td>51.98</td><td>68.30</td><td>-16.32</td><td>69.87</td><td>35.80</td><td>13.32</td><td>67.01</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11650.00</td><td>56.17</td><td>74.00</td><td>-17.83</td><td>67.82</td><td>38.45</td><td>16.46</td><td>66.56</td><td>0.00</td><td>330</td><td>126</td><td>PEAK</td></tr><tr><td>3</td><td>11650.00</td><td>44.41</td><td>54.00</td><td>-9.59</td><td>56.06</td><td>38.45</td><td>16.46</td><td>66.56</td><td>0.00</td><td>330</td><td>126</td><td>AVERAGE</td></tr><tr><td>4</td><td>11985.93</td><td>49.77</td><td>74.00</td><td>-24.23</td><td>60.77</td><td>38.50</td><td>16.67</td><td>66.17</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>17485.20</td><td>55.71</td><td>68.30</td><td>-12.59</td><td>57.96</td><td>42.03</td><td>20.32</td><td>64.60</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7962.13	51.98	68.30	-16.32	69.87	35.80	13.32	67.01	0.00	---	---	Peak	2	11650.00	56.17	74.00	-17.83	67.82	38.45	16.46	66.56	0.00	330	126	PEAK	3	11650.00	44.41	54.00	-9.59	56.06	38.45	16.46	66.56	0.00	330	126	AVERAGE	4	11985.93	49.77	74.00	-24.23	60.77	38.50	16.67	66.17	0.00	---	---	Peak	5	17485.20	55.71	68.30	-12.59	57.96	42.03	20.32	64.60	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																				
1	7961.40	50.51	68.30	-17.79	68.40	35.80	13.32	67.01	0.00	---	---	Peak																																																																																																																																																																																		
2	11637.60	47.57	74.00	-26.43	59.26	38.44	16.45	66.58	0.00	---	---	Peak																																																																																																																																																																																		
3	11996.93	49.78	74.00	-24.22	60.75	38.50	16.68	66.15	0.00	---	---	Peak																																																																																																																																																																																		
4	17488.80	50.89	68.30	-17.41	53.13	42.04	20.32	64.60	0.00	---	---	Peak																																																																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																				
1	7962.13	51.98	68.30	-16.32	69.87	35.80	13.32	67.01	0.00	---	---	Peak																																																																																																																																																																																		
2	11650.00	56.17	74.00	-17.83	67.82	38.45	16.46	66.56	0.00	330	126	PEAK																																																																																																																																																																																		
3	11650.00	44.41	54.00	-9.59	56.06	38.45	16.46	66.56	0.00	330	126	AVERAGE																																																																																																																																																																																		
4	11985.93	49.77	74.00	-24.23	60.77	38.50	16.67	66.17	0.00	---	---	Peak																																																																																																																																																																																		
5	17485.20	55.71	68.30	-12.59	57.96	42.03	20.32	64.60	0.00	---	---	Peak																																																																																																																																																																																		

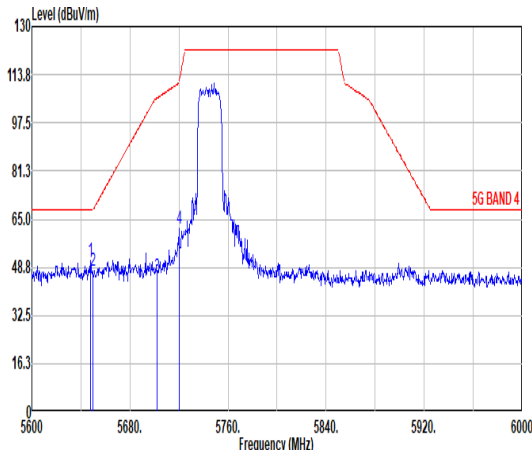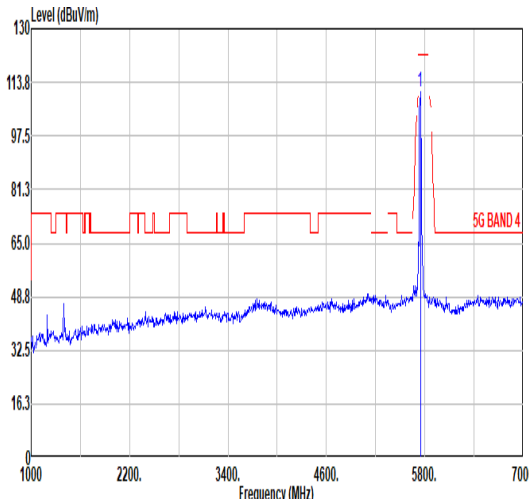
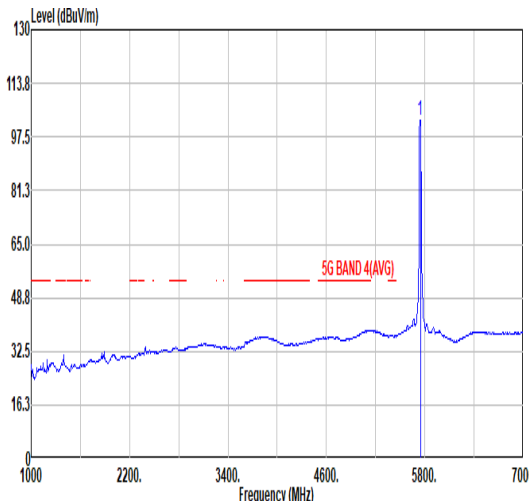


Mode	33																																																																																																																				
	Band Edge																																																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																				
ANT	CDD 0+1																																																																																																																				
Pol.	Horizontal						Fundamental																																																																																																														
Peak	 Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 5600 to 6000 MHz. The plot shows a red limit line for 5G BAND 4 and a blue measured signal with a peak at 5745 MHz. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><td>1</td><td>5647.60</td><td>51.18</td><td>68.30</td><td>-17.12</td><td>41.85</td><td>34.50</td><td>11.07</td><td>36.24</td><td>0.00</td><td>100</td><td>181</td><td>PEAK</td></tr><tr><td>2</td><td>5650.00</td><td>47.51</td><td>68.30</td><td>-20.79</td><td>38.22</td><td>34.50</td><td>11.07</td><td>36.28</td><td>0.00</td><td>100</td><td>181</td><td>PEAK</td></tr><tr><td>3</td><td>5702.00</td><td>45.54</td><td>105.86</td><td>-60.32</td><td>37.10</td><td>34.50</td><td>11.14</td><td>37.20</td><td>0.00</td><td>100</td><td>181</td><td>PAEK</td></tr><tr><td>4</td><td>5720.00</td><td>61.82</td><td>110.90</td><td>-49.08</td><td>53.63</td><td>34.54</td><td>11.17</td><td>37.52</td><td>0.00</td><td>100</td><td>181</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	1	5647.60	51.18	68.30	-17.12	41.85	34.50	11.07	36.24	0.00	100	181	PEAK	2	5650.00	47.51	68.30	-20.79	38.22	34.50	11.07	36.28	0.00	100	181	PEAK	3	5702.00	45.54	105.86	-60.32	37.10	34.50	11.14	37.20	0.00	100	181	PAEK	4	5720.00	61.82	110.90	-49.08	53.63	34.54	11.17	37.52	0.00	100	181	PEAK	 Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a red limit line for 5G BAND 4 and a blue measured signal with a peak at 5745 MHz. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><td>1</td><td>5745.00</td><td>110.88</td><td>122.30</td><td>-11.42</td><td>103.16</td><td>34.60</td><td>11.21</td><td>38.09</td><td>0.00</td><td>100</td><td>181</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	1	5745.00	110.88	122.30	-11.42	103.16	34.60	11.21	38.09	0.00	100	181	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																												
1	5647.60	51.18	68.30	-17.12	41.85	34.50	11.07	36.24	0.00	100	181	PEAK																																																																																																									
2	5650.00	47.51	68.30	-20.79	38.22	34.50	11.07	36.28	0.00	100	181	PEAK																																																																																																									
3	5702.00	45.54	105.86	-60.32	37.10	34.50	11.14	37.20	0.00	100	181	PAEK																																																																																																									
4	5720.00	61.82	110.90	-49.08	53.63	34.54	11.17	37.52	0.00	100	181	PEAK																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																												
1	5745.00	110.88	122.30	-11.42	103.16	34.60	11.21	38.09	0.00	100	181	PEAK																																																																																																									
Avg	Blank						 Fundamental Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a red limit line for 5G BAND 4(AVG) and a blue measured signal with a peak at 5745 MHz. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><td>1</td><td>5745.00</td><td>102.55</td><td>122.30</td><td>-19.75</td><td>94.65</td><td>34.58</td><td>11.20</td><td>37.88</td><td>0.00</td><td>100</td><td>181</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	1	5745.00	102.55	122.30	-19.75	94.65	34.58	11.20	37.88	0.00	100	181	AVERAGE																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																												
1	5745.00	102.55	122.30	-19.75	94.65	34.58	11.20	37.88	0.00	100	181	AVERAGE																																																																																																									

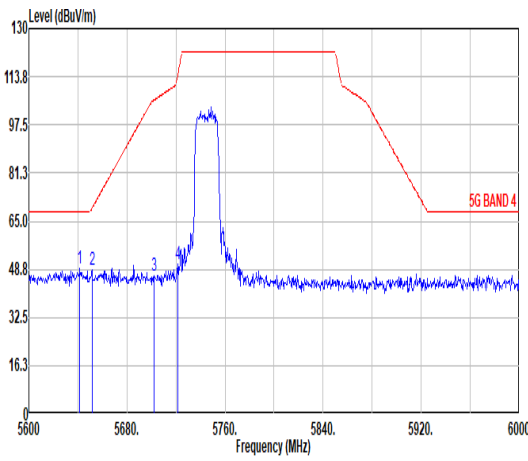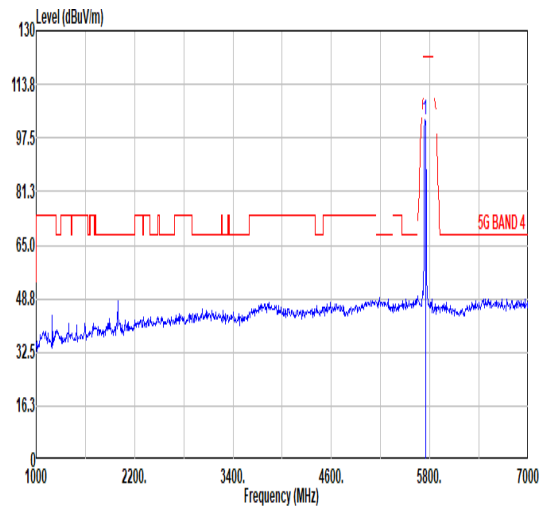
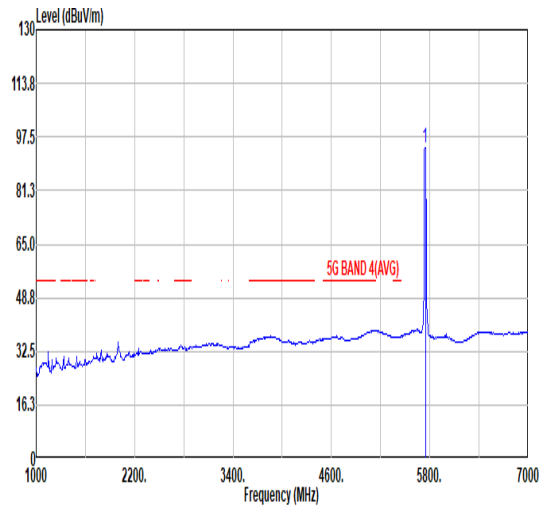


Mode	33																																																																																																																							
	Band Edge																																																																																																																							
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																							
ANT	CDD 0+1																																																																																																																							
Pol.	Vertical					Fundamental																																																																																																																		
Peak	 Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 5600 to 6000 MHz. The plot shows a red limit line for 5G BAND 4 and a blue measured signal line. Three peaks are identified and numbered 1, 2, and 3. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5641.60</td><td>48.83</td><td>68.30</td><td>-19.47</td><td>39.40</td><td>34.50</td><td>11.06</td><td>36.13</td><td>0.00</td><td>295 77 PEAK</td></tr><tr><td>2 5651.60</td><td>48.39</td><td>69.49</td><td>-21.10</td><td>39.13</td><td>34.50</td><td>11.07</td><td>36.31</td><td>0.00</td><td>295 77 PEAK</td></tr><tr><td>3 5702.00</td><td>46.84</td><td>105.86</td><td>-59.02</td><td>38.40</td><td>34.50</td><td>11.14</td><td>37.20</td><td>0.00</td><td>295 77 PEAK</td></tr><tr><td>4 5721.20</td><td>50.43</td><td>113.64</td><td>-63.21</td><td>42.27</td><td>34.54</td><td>11.17</td><td>37.55</td><td>0.00</td><td>295 77 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5641.60	48.83	68.30	-19.47	39.40	34.50	11.06	36.13	0.00	295 77 PEAK	2 5651.60	48.39	69.49	-21.10	39.13	34.50	11.07	36.31	0.00	295 77 PEAK	3 5702.00	46.84	105.86	-59.02	38.40	34.50	11.14	37.20	0.00	295 77 PEAK	4 5721.20	50.43	113.64	-63.21	42.27	34.54	11.17	37.55	0.00	295 77 PEAK	 Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a red limit line for 5G BAND 4 and a blue measured signal line. A single peak is identified and numbered 1. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5745.00</td><td>103.09</td><td>122.30</td><td>-19.21</td><td>95.19</td><td>34.58</td><td>11.20</td><td>37.88</td><td>0.00</td><td>295 77 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5745.00	103.09	122.30	-19.21	95.19	34.58	11.20	37.88	0.00	295 77 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1 5641.60	48.83	68.30	-19.47	39.40	34.50	11.06	36.13	0.00	295 77 PEAK																																																																																																															
2 5651.60	48.39	69.49	-21.10	39.13	34.50	11.07	36.31	0.00	295 77 PEAK																																																																																																															
3 5702.00	46.84	105.86	-59.02	38.40	34.50	11.14	37.20	0.00	295 77 PEAK																																																																																																															
4 5721.20	50.43	113.64	-63.21	42.27	34.54	11.17	37.55	0.00	295 77 PEAK																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1 5745.00	103.09	122.30	-19.21	95.19	34.58	11.20	37.88	0.00	295 77 PEAK																																																																																																															
Avg	Blank					 Fundamental Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a red limit line for 5G BAND 4 (AVG) and a blue measured signal line. A single peak is identified and numbered 1. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5745.00</td><td>94.43</td><td>122.30</td><td>-27.87</td><td>86.62</td><td>34.59</td><td>11.21</td><td>37.99</td><td>0.00</td><td>295 77 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5745.00	94.43	122.30	-27.87	86.62	34.59	11.21	37.99	0.00	295 77 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1 5745.00	94.43	122.30	-27.87	86.62	34.59	11.21	37.99	0.00	295 77 AVERAGE																																																																																																															


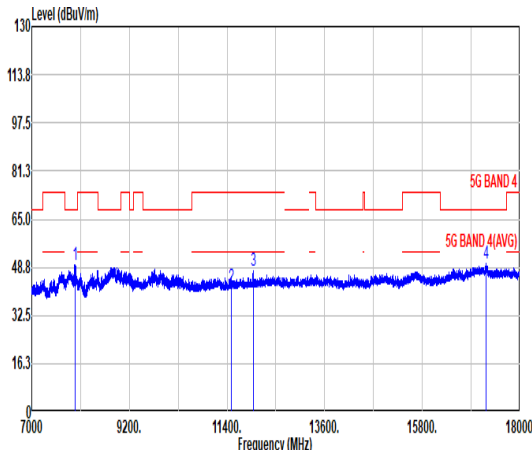
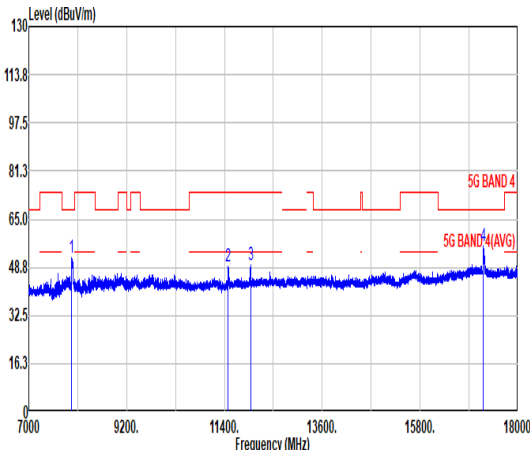


Mode	33																																																																																																																																																																																												
	Harmonic																																																																																																																																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																																																																																												
ANT	CDD 0+1																																																																																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																																																																																						
Peak Avg																																																																																																																																																																																													
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>7979.73</td><td>49.48</td><td>68.30</td><td>-18.82</td><td>67.35</td><td>35.80</td><td>13.33</td><td>67.00</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11490.00</td><td>42.23</td><td>74.00</td><td>-31.77</td><td>54.32</td><td>38.29</td><td>16.36</td><td>66.74</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>11996.20</td><td>47.60</td><td>74.00</td><td>-26.40</td><td>58.57</td><td>38.50</td><td>16.68</td><td>66.15</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>17238.80</td><td>50.12</td><td>68.30</td><td>-18.18</td><td>52.00</td><td>42.52</td><td>20.16</td><td>64.56</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7979.73	49.48	68.30	-18.82	67.35	35.80	13.33	67.00	0.00	---	---	Peak	2	11490.00	42.23	74.00	-31.77	54.32	38.29	16.36	66.74	0.00	---	---	PEAK	3	11996.20	47.60	74.00	-26.40	58.57	38.50	16.68	66.15	0.00	---	---	Peak	4	17238.80	50.12	68.30	-18.18	52.00	42.52	20.16	64.56	0.00	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>7962.13</td><td>51.87</td><td>68.30</td><td>-16.43</td><td>69.76</td><td>35.80</td><td>13.32</td><td>67.01</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11486.53</td><td>49.04</td><td>74.00</td><td>-24.96</td><td>61.14</td><td>38.29</td><td>16.35</td><td>66.74</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>11999.13</td><td>49.76</td><td>74.00</td><td>-24.24</td><td>60.73</td><td>38.50</td><td>16.68</td><td>66.15</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>17226.33</td><td>55.90</td><td>68.30</td><td>-12.40</td><td>57.83</td><td>42.48</td><td>20.15</td><td>64.56</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7962.13	51.87	68.30	-16.43	69.76	35.80	13.32	67.01	0.00	---	---	Peak	2	11486.53	49.04	74.00	-24.96	61.14	38.29	16.35	66.74	0.00	---	---	Peak	3	11999.13	49.76	74.00	-24.24	60.73	38.50	16.68	66.15	0.00	---	---	Peak	4	17226.33	55.90	68.30	-12.40	57.83	42.48	20.15	64.56	0.00	---	---
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																			
1	7979.73	49.48	68.30	-18.82	67.35	35.80	13.33	67.00	0.00	---	---	Peak																																																																																																																																																																																	
2	11490.00	42.23	74.00	-31.77	54.32	38.29	16.36	66.74	0.00	---	---	PEAK																																																																																																																																																																																	
3	11996.20	47.60	74.00	-26.40	58.57	38.50	16.68	66.15	0.00	---	---	Peak																																																																																																																																																																																	
4	17238.80	50.12	68.30	-18.18	52.00	42.52	20.16	64.56	0.00	---	---	Peak																																																																																																																																																																																	
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																			
1	7962.13	51.87	68.30	-16.43	69.76	35.80	13.32	67.01	0.00	---	---	Peak																																																																																																																																																																																	
2	11486.53	49.04	74.00	-24.96	61.14	38.29	16.35	66.74	0.00	---	---	Peak																																																																																																																																																																																	
3	11999.13	49.76	74.00	-24.24	60.73	38.50	16.68	66.15	0.00	---	---	Peak																																																																																																																																																																																	
4	17226.33	55.90	68.30	-12.40	57.83	42.48	20.15	64.56	0.00	---	---	Peak																																																																																																																																																																																	


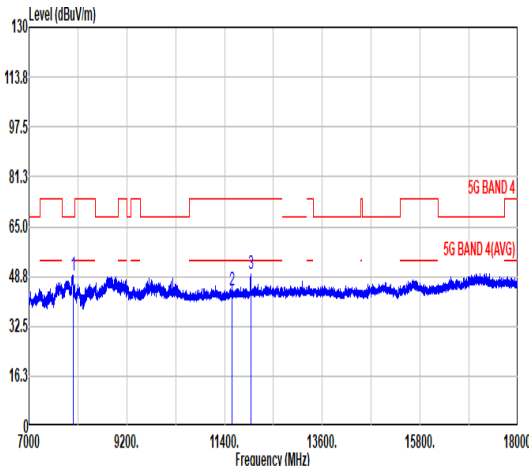
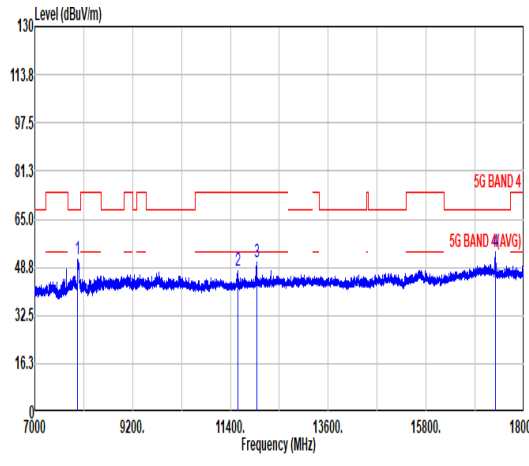


Mode	34																																																																																																																																																																			
	Harmonic																																																																																																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT20_CH157_5785MHz																																																																																																																																																																			
ANT	CDD 0+1																																																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																																																													
Peak Avg																																																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7992.93</td><td>49.16</td><td>68.30</td><td>-19.14</td><td>67.01</td><td>35.00</td><td>13.34</td><td>66.99</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11570.13</td><td>44.33</td><td>74.00</td><td>-29.67</td><td>56.20</td><td>38.37</td><td>16.41</td><td>66.65</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>11992.53</td><td>49.59</td><td>74.00</td><td>-24.41</td><td>60.58</td><td>38.50</td><td>16.67</td><td>66.16</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7992.93	49.16	68.30	-19.14	67.01	35.00	13.34	66.99	0.00	---	---	Peak	2	11570.13	44.33	74.00	-29.67	56.20	38.37	16.41	66.65	0.00	---	---	Peak	3	11992.53	49.59	74.00	-24.41	60.58	38.50	16.67	66.16	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7961.40</td><td>51.53</td><td>68.30</td><td>-16.77</td><td>69.42</td><td>35.00</td><td>13.32</td><td>67.01</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11565.00</td><td>47.77</td><td>74.00</td><td>-26.23</td><td>59.66</td><td>38.37</td><td>16.40</td><td>66.66</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>12000.00</td><td>50.43</td><td>74.00</td><td>-23.57</td><td>61.40</td><td>38.50</td><td>16.68</td><td>66.15</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>17362.73</td><td>54.20</td><td>68.30</td><td>-14.10</td><td>56.15</td><td>42.39</td><td>20.24</td><td>64.58</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7961.40	51.53	68.30	-16.77	69.42	35.00	13.32	67.01	0.00	---	---	Peak	2	11565.00	47.77	74.00	-26.23	59.66	38.37	16.40	66.66	0.00	---	---	Peak	3	12000.00	50.43	74.00	-23.57	61.40	38.50	16.68	66.15	0.00	---	---	Peak	4	17362.73	54.20	68.30	-14.10	56.15	42.39	20.24	64.58	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																										
1	7992.93	49.16	68.30	-19.14	67.01	35.00	13.34	66.99	0.00	---	---	Peak																																																																																																																																																								
2	11570.13	44.33	74.00	-29.67	56.20	38.37	16.41	66.65	0.00	---	---	Peak																																																																																																																																																								
3	11992.53	49.59	74.00	-24.41	60.58	38.50	16.67	66.16	0.00	---	---	Peak																																																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																										
1	7961.40	51.53	68.30	-16.77	69.42	35.00	13.32	67.01	0.00	---	---	Peak																																																																																																																																																								
2	11565.00	47.77	74.00	-26.23	59.66	38.37	16.40	66.66	0.00	---	---	Peak																																																																																																																																																								
3	12000.00	50.43	74.00	-23.57	61.40	38.50	16.68	66.15	0.00	---	---	Peak																																																																																																																																																								
4	17362.73	54.20	68.30	-14.10	56.15	42.39	20.24	64.58	0.00	---	---	Peak																																																																																																																																																								

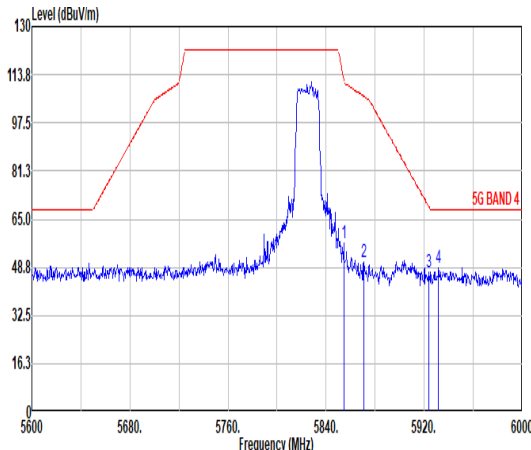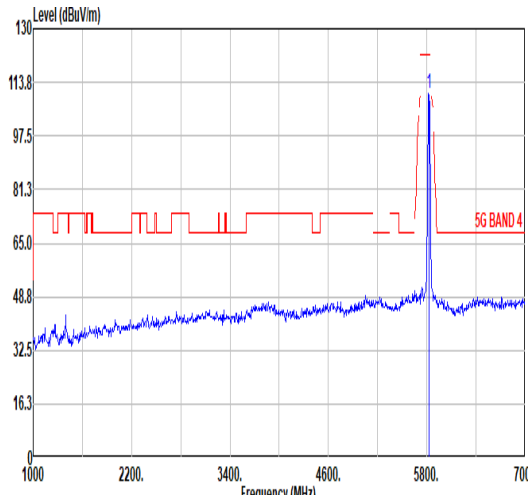
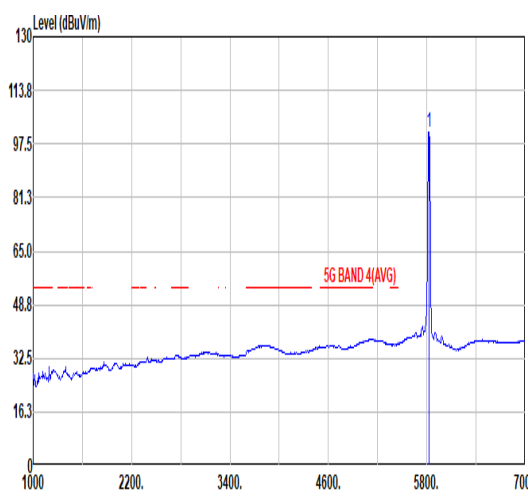


Mode	35																																																																																																																																										
	Band Edge																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																																																										
ANT	CDD 0+1																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak																																																																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5854.40</td><td>56.70</td><td>112.27</td><td>-55.57</td><td>50.47</td><td>34.81</td><td>11.33</td><td>39.91</td><td>0.00</td><td>100</td><td>178</td><td>PEAK</td></tr><tr><td>2</td><td>5870.80</td><td>50.76</td><td>106.47</td><td>-55.71</td><td>44.60</td><td>34.84</td><td>11.35</td><td>40.03</td><td>0.00</td><td>100</td><td>178</td><td>PEAK</td></tr><tr><td>3</td><td>5923.60</td><td>47.05</td><td>69.33</td><td>-22.28</td><td>40.55</td><td>34.99</td><td>11.40</td><td>39.89</td><td>0.00</td><td>100</td><td>178</td><td>PEAK</td></tr><tr><td>4</td><td>5931.60</td><td>48.78</td><td>68.30</td><td>-19.52</td><td>42.21</td><td>35.03</td><td>11.41</td><td>39.87</td><td>0.00</td><td>100</td><td>178</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.40	56.70	112.27	-55.57	50.47	34.81	11.33	39.91	0.00	100	178	PEAK	2	5870.80	50.76	106.47	-55.71	44.60	34.84	11.35	40.03	0.00	100	178	PEAK	3	5923.60	47.05	69.33	-22.28	40.55	34.99	11.40	39.89	0.00	100	178	PEAK	4	5931.60	48.78	68.30	-19.52	42.21	35.03	11.41	39.87	0.00	100	178	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>110.42</td><td>-----</td><td>-----</td><td>103.65</td><td>34.74</td><td>11.30</td><td>39.27</td><td>0.00</td><td>100</td><td>178</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	110.42	-----	-----	103.65	34.74	11.30	39.27	0.00	100	178	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5854.40	56.70	112.27	-55.57	50.47	34.81	11.33	39.91	0.00	100	178	PEAK																																																																																																																															
2	5870.80	50.76	106.47	-55.71	44.60	34.84	11.35	40.03	0.00	100	178	PEAK																																																																																																																															
3	5923.60	47.05	69.33	-22.28	40.55	34.99	11.40	39.89	0.00	100	178	PEAK																																																																																																																															
4	5931.60	48.78	68.30	-19.52	42.21	35.03	11.41	39.87	0.00	100	178	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5825.00	110.42	-----	-----	103.65	34.74	11.30	39.27	0.00	100	178	PEAK																																																																																																																															
Avg	Blank																																																																																																																																										
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>101.00</td><td>-----</td><td>-----</td><td>94.23</td><td>34.74</td><td>11.30</td><td>39.27</td><td>0.00</td><td>100</td><td>178</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	101.00	-----	-----	94.23	34.74	11.30	39.27	0.00	100	178	AVERAGE																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5825.00	101.00	-----	-----	94.23	34.74	11.30	39.27	0.00	100	178	AVERAGE																																																																																																																															

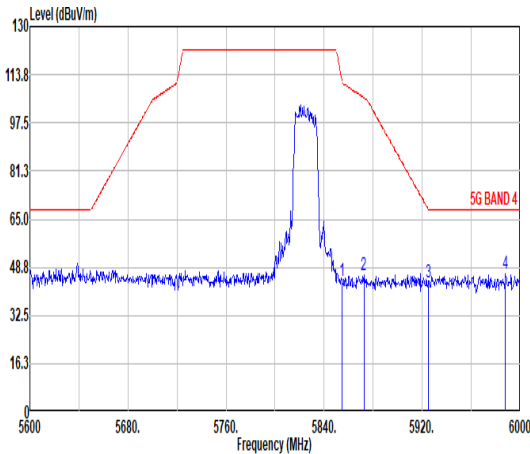
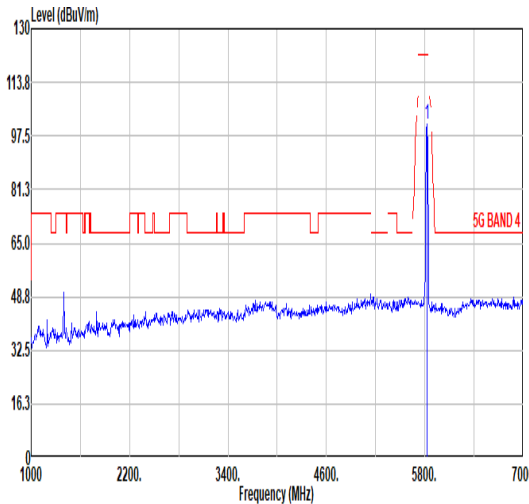
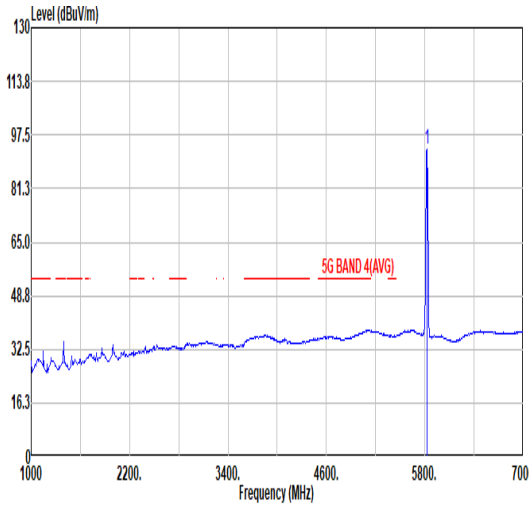


Mode	35																																																																																																																																										
	Band Edge																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																																																										
ANT	CDD 0+1																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak																																																																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5854.00</td><td>44.16</td><td>111.36</td><td>-67.20</td><td>37.93</td><td>34.81</td><td>11.34</td><td>39.92</td><td>0.00</td><td>305</td><td>68</td><td>PEAK</td></tr><tr><td>2</td><td>5872.40</td><td>46.04</td><td>106.03</td><td>-59.99</td><td>39.87</td><td>34.84</td><td>11.35</td><td>40.02</td><td>0.00</td><td>305</td><td>68</td><td>PEAK</td></tr><tr><td>3</td><td>5924.00</td><td>43.46</td><td>68.45</td><td>-24.99</td><td>36.95</td><td>35.00</td><td>11.40</td><td>39.89</td><td>0.00</td><td>305</td><td>68</td><td>PEAK</td></tr><tr><td>4</td><td>5988.00</td><td>46.40</td><td>68.30</td><td>-21.90</td><td>39.49</td><td>35.18</td><td>11.46</td><td>39.73</td><td>0.00</td><td>305</td><td>68</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.00	44.16	111.36	-67.20	37.93	34.81	11.34	39.92	0.00	305	68	PEAK	2	5872.40	46.04	106.03	-59.99	39.87	34.84	11.35	40.02	0.00	305	68	PEAK	3	5924.00	43.46	68.45	-24.99	36.95	35.00	11.40	39.89	0.00	305	68	PEAK	4	5988.00	46.40	68.30	-21.90	39.49	35.18	11.46	39.73	0.00	305	68	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>100.82</td><td>-----</td><td>-----</td><td>94.13</td><td>34.75</td><td>11.31</td><td>39.37</td><td>0.00</td><td>305</td><td>68</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	100.82	-----	-----	94.13	34.75	11.31	39.37	0.00	305	68	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5854.00	44.16	111.36	-67.20	37.93	34.81	11.34	39.92	0.00	305	68	PEAK																																																																																																																															
2	5872.40	46.04	106.03	-59.99	39.87	34.84	11.35	40.02	0.00	305	68	PEAK																																																																																																																															
3	5924.00	43.46	68.45	-24.99	36.95	35.00	11.40	39.89	0.00	305	68	PEAK																																																																																																																															
4	5988.00	46.40	68.30	-21.90	39.49	35.18	11.46	39.73	0.00	305	68	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5825.00	100.82	-----	-----	94.13	34.75	11.31	39.37	0.00	305	68	PEAK																																																																																																																															
Avg	Blank																																																																																																																																										
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>93.05</td><td>-----</td><td>-----</td><td>86.36</td><td>34.75</td><td>11.31</td><td>39.37</td><td>0.00</td><td>305</td><td>68</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	93.05	-----	-----	86.36	34.75	11.31	39.37	0.00	305	68	AVERAGE																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5825.00	93.05	-----	-----	86.36	34.75	11.31	39.37	0.00	305	68	AVERAGE																																																																																																																															

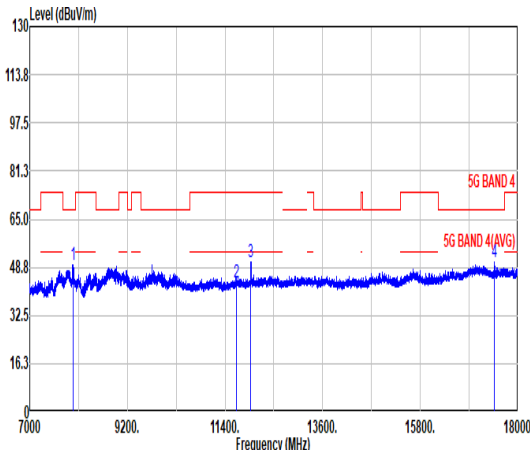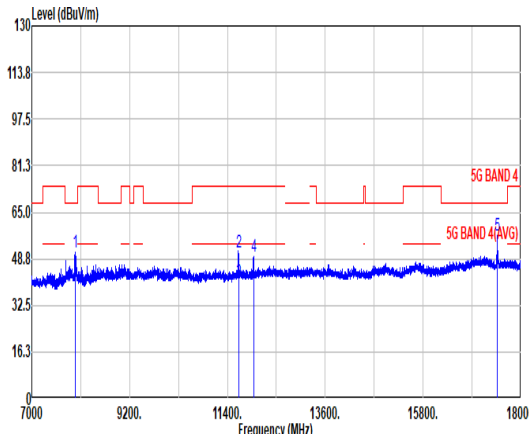


Mode	35																																																																																																																																																																																													
	Harmonic																																																																																																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																																																																																																													
ANT	CDD 0+1																																																																																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																																																																																							
Peak Avg																																																																																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7972.40</td><td>49.75</td><td>68.30</td><td>-18.55</td><td>67.62</td><td>35.80</td><td>13.33</td><td>67.00</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11650.00</td><td>43.84</td><td>74.00</td><td>-30.16</td><td>55.49</td><td>38.45</td><td>16.46</td><td>66.56</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>11983.73</td><td>50.61</td><td>74.00</td><td>-23.39</td><td>61.61</td><td>38.50</td><td>16.67</td><td>66.17</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>17463.20</td><td>50.55</td><td>68.30</td><td>-17.75</td><td>52.76</td><td>42.07</td><td>20.31</td><td>64.59</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7972.40	49.75	68.30	-18.55	67.62	35.80	13.33	67.00	0.00	---	---	Peak	2	11650.00	43.84	74.00	-30.16	55.49	38.45	16.46	66.56	0.00	---	---	PEAK	3	11983.73	50.61	74.00	-23.39	61.61	38.50	16.67	66.17	0.00	---	---	Peak	4	17463.20	50.55	68.30	-17.75	52.76	42.07	20.31	64.59	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7984.13</td><td>51.04</td><td>68.30</td><td>-17.26</td><td>68.90</td><td>35.80</td><td>13.33</td><td>66.99</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11650.00</td><td>50.94</td><td>74.00</td><td>-23.06</td><td>62.59</td><td>38.45</td><td>16.46</td><td>66.56</td><td>0.00</td><td>356</td><td>117</td><td>PEAK</td></tr><tr><td>3</td><td>11650.00</td><td>40.94</td><td>54.00</td><td>-13.06</td><td>52.59</td><td>38.45</td><td>16.46</td><td>66.56</td><td>0.00</td><td>356</td><td>117</td><td>AVERAGE</td></tr><tr><td>4</td><td>11998.40</td><td>49.34</td><td>74.00</td><td>-24.66</td><td>60.31</td><td>38.50</td><td>16.68</td><td>66.15</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>17470.53</td><td>56.84</td><td>68.30</td><td>-11.46</td><td>59.07</td><td>42.06</td><td>20.31</td><td>64.60</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7984.13	51.04	68.30	-17.26	68.90	35.80	13.33	66.99	0.00	---	---	Peak	2	11650.00	50.94	74.00	-23.06	62.59	38.45	16.46	66.56	0.00	356	117	PEAK	3	11650.00	40.94	54.00	-13.06	52.59	38.45	16.46	66.56	0.00	356	117	AVERAGE	4	11998.40	49.34	74.00	-24.66	60.31	38.50	16.68	66.15	0.00	---	---	Peak	5	17470.53	56.84	68.30	-11.46	59.07	42.06	20.31	64.60	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																				
1	7972.40	49.75	68.30	-18.55	67.62	35.80	13.33	67.00	0.00	---	---	Peak																																																																																																																																																																																		
2	11650.00	43.84	74.00	-30.16	55.49	38.45	16.46	66.56	0.00	---	---	PEAK																																																																																																																																																																																		
3	11983.73	50.61	74.00	-23.39	61.61	38.50	16.67	66.17	0.00	---	---	Peak																																																																																																																																																																																		
4	17463.20	50.55	68.30	-17.75	52.76	42.07	20.31	64.59	0.00	---	---	Peak																																																																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																				
1	7984.13	51.04	68.30	-17.26	68.90	35.80	13.33	66.99	0.00	---	---	Peak																																																																																																																																																																																		
2	11650.00	50.94	74.00	-23.06	62.59	38.45	16.46	66.56	0.00	356	117	PEAK																																																																																																																																																																																		
3	11650.00	40.94	54.00	-13.06	52.59	38.45	16.46	66.56	0.00	356	117	AVERAGE																																																																																																																																																																																		
4	11998.40	49.34	74.00	-24.66	60.31	38.50	16.68	66.15	0.00	---	---	Peak																																																																																																																																																																																		
5	17470.53	56.84	68.30	-11.46	59.07	42.06	20.31	64.60	0.00	---	---	Peak																																																																																																																																																																																		

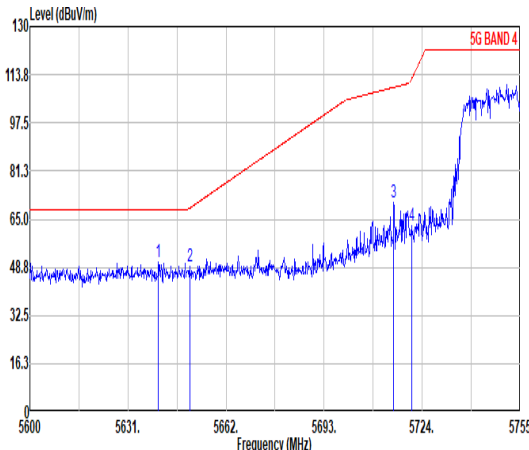
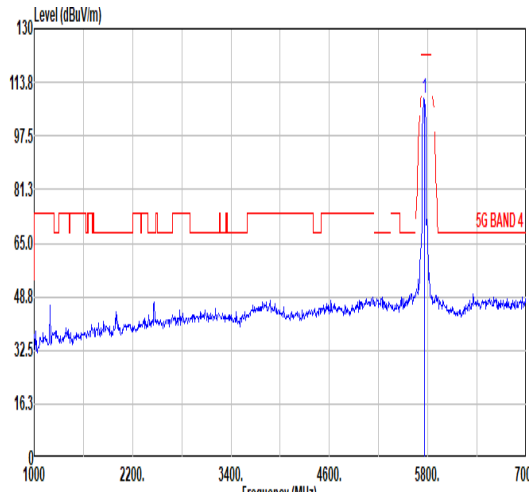
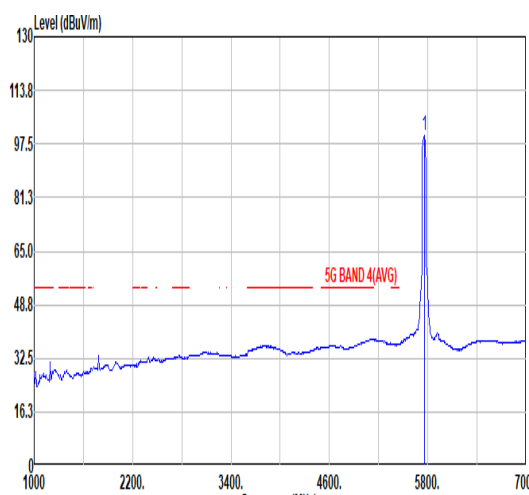


Mode	36																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																																																										
ANT	CDD 0+1																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5640.61</td><td>50.56</td><td>68.30</td><td>-17.74</td><td>41.12</td><td>34.50</td><td>11.06</td><td>36.12</td><td>0.00</td><td>111</td><td>177</td><td>PEAK</td></tr><tr><td>2</td><td>5650.53</td><td>49.24</td><td>68.69</td><td>-19.45</td><td>39.96</td><td>34.50</td><td>11.07</td><td>36.29</td><td>0.00</td><td>111</td><td>177</td><td>PEAK</td></tr><tr><td>3</td><td>5715.01</td><td>70.63</td><td>109.50</td><td>-38.87</td><td>62.38</td><td>34.53</td><td>11.16</td><td>37.44</td><td>0.00</td><td>111</td><td>177</td><td>PEAK</td></tr><tr><td>4</td><td>5728.59</td><td>63.00</td><td>112.25</td><td>-49.25</td><td>54.83</td><td>34.54</td><td>11.17</td><td>37.54</td><td>0.00</td><td>111</td><td>177</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5640.61	50.56	68.30	-17.74	41.12	34.50	11.06	36.12	0.00	111	177	PEAK	2	5650.53	49.24	68.69	-19.45	39.96	34.50	11.07	36.29	0.00	111	177	PEAK	3	5715.01	70.63	109.50	-38.87	62.38	34.53	11.16	37.44	0.00	111	177	PEAK	4	5728.59	63.00	112.25	-49.25	54.83	34.54	11.17	37.54	0.00	111	177	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>108.92</td><td>-----</td><td>-----</td><td>101.20</td><td>34.60</td><td>11.21</td><td>38.09</td><td>0.00</td><td>111</td><td>177</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	108.92	-----	-----	101.20	34.60	11.21	38.09	0.00	111	177	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5640.61	50.56	68.30	-17.74	41.12	34.50	11.06	36.12	0.00	111	177	PEAK																																																																																																																															
2	5650.53	49.24	68.69	-19.45	39.96	34.50	11.07	36.29	0.00	111	177	PEAK																																																																																																																															
3	5715.01	70.63	109.50	-38.87	62.38	34.53	11.16	37.44	0.00	111	177	PEAK																																																																																																																															
4	5728.59	63.00	112.25	-49.25	54.83	34.54	11.17	37.54	0.00	111	177	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5755.00	108.92	-----	-----	101.20	34.60	11.21	38.09	0.00	111	177	PEAK																																																																																																																															
Avg	Blank						<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>99.87</td><td>-----</td><td>-----</td><td>92.23</td><td>34.62</td><td>11.22</td><td>38.20</td><td>0.00</td><td>111</td><td>177</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	99.87	-----	-----	92.23	34.62	11.22	38.20	0.00	111	177	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5755.00	99.87	-----	-----	92.23	34.62	11.22	38.20	0.00	111	177	AVERAGE																																																																																																																															

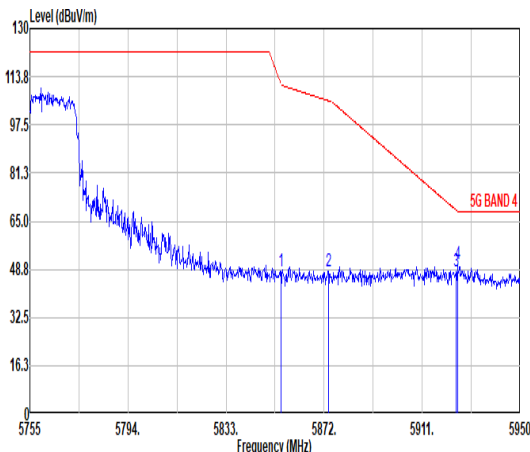


Mode	36																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																				
ANT	CDD 0+1																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.84</td><td>47.89</td><td>111.26</td><td>-63.37</td><td>41.66</td><td>34.81</td><td>11.34</td><td>39.92</td><td>0.00</td><td>111</td><td>177</td><td>PEAK</td></tr><tr><td>2</td><td>5873.76</td><td>47.83</td><td>105.65</td><td>-57.82</td><td>41.65</td><td>34.85</td><td>11.35</td><td>40.02</td><td>0.00</td><td>111</td><td>177</td><td>PEAK</td></tr><tr><td>3</td><td>5924.46</td><td>48.14</td><td>68.70</td><td>-20.56</td><td>41.63</td><td>35.00</td><td>11.40</td><td>39.89</td><td>0.00</td><td>111</td><td>177</td><td>PEAK</td></tr><tr><td>4</td><td>5925.04</td><td>50.44</td><td>68.30</td><td>-17.86</td><td>43.93</td><td>35.00</td><td>11.40</td><td>39.89</td><td>0.00</td><td>111</td><td>177</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.84	47.89	111.26	-63.37	41.66	34.81	11.34	39.92	0.00	111	177	PEAK	2	5873.76	47.83	105.65	-57.82	41.65	34.85	11.35	40.02	0.00	111	177	PEAK	3	5924.46	48.14	68.70	-20.56	41.63	35.00	11.40	39.89	0.00	111	177	PEAK	4	5925.04	50.44	68.30	-17.86	43.93	35.00	11.40	39.89	0.00	111	177	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor		Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5854.84	47.89	111.26	-63.37	41.66	34.81	11.34	39.92	0.00	111	177	PEAK																																																																									
2	5873.76	47.83	105.65	-57.82	41.65	34.85	11.35	40.02	0.00	111	177	PEAK																																																																									
3	5924.46	48.14	68.70	-20.56	41.63	35.00	11.40	39.89	0.00	111	177	PEAK																																																																									
4	5925.04	50.44	68.30	-17.86	43.93	35.00	11.40	39.89	0.00	111	177	PEAK																																																																									

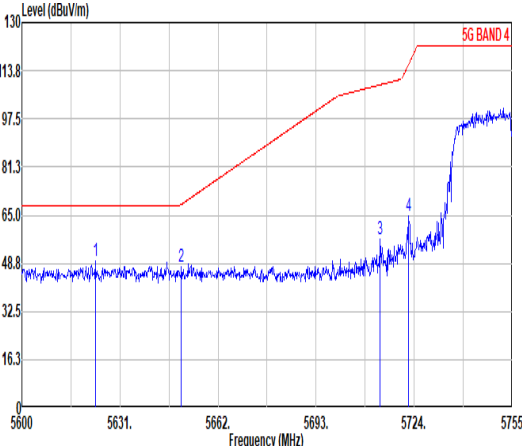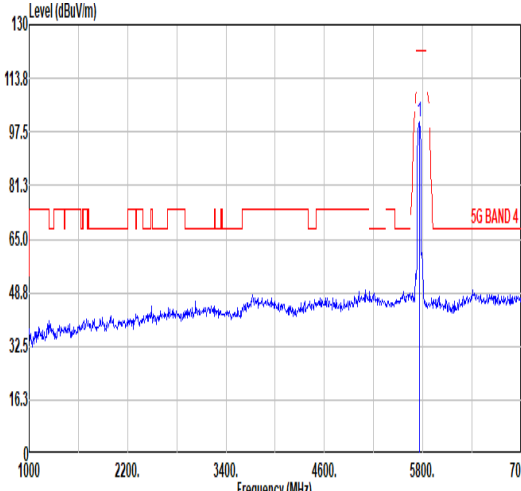
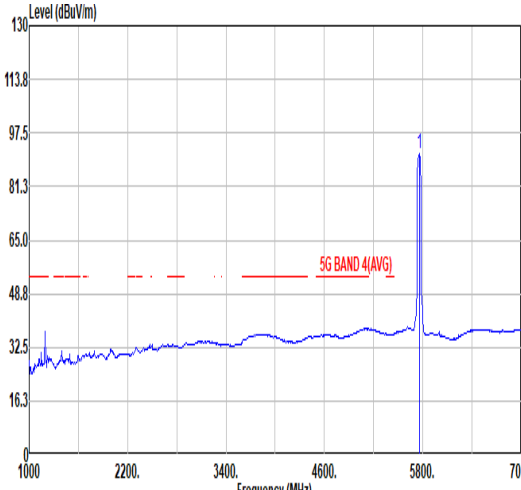


Mode	36																																																																																																																																									
	Band Edge - L																																																																																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																																																									
ANT	CDD 0+1																																																																																																																																									
Pol.	Vertical						Fundamental																																																																																																																																			
Peak																																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5623.25</td><td>49.33</td><td>68.30</td><td>-18.97</td><td>39.94</td><td>34.50</td><td>11.04</td><td>36.15</td><td>0.00</td><td>370</td><td>284</td><td>PEAK</td></tr><tr><td>2</td><td>5650.38</td><td>47.41</td><td>68.58</td><td>-21.17</td><td>38.13</td><td>34.50</td><td>11.07</td><td>36.29</td><td>0.00</td><td>370</td><td>284</td><td>PEAK</td></tr><tr><td>3</td><td>5713.31</td><td>56.88</td><td>109.03</td><td>-52.15</td><td>48.60</td><td>34.53</td><td>11.16</td><td>37.41</td><td>0.00</td><td>370</td><td>284</td><td>PEAK</td></tr><tr><td>4</td><td>5722.14</td><td>64.54</td><td>115.78</td><td>-51.24</td><td>56.39</td><td>34.54</td><td>11.17</td><td>37.56</td><td>0.00</td><td>370</td><td>284</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5623.25	49.33	68.30	-18.97	39.94	34.50	11.04	36.15	0.00	370	284	PEAK	2	5650.38	47.41	68.58	-21.17	38.13	34.50	11.07	36.29	0.00	370	284	PEAK	3	5713.31	56.88	109.03	-52.15	48.60	34.53	11.16	37.41	0.00	370	284	PEAK	4	5722.14	64.54	115.78	-51.24	56.39	34.54	11.17	37.56	0.00	370	284	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>100.78</td><td>-----</td><td>-----</td><td>93.14</td><td>34.62</td><td>11.22</td><td>38.20</td><td>0.00</td><td>370</td><td>284</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	100.78	-----	-----	93.14	34.62	11.22	38.20	0.00	370	284
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5623.25	49.33	68.30	-18.97	39.94	34.50	11.04	36.15	0.00	370	284	PEAK																																																																																																																														
2	5650.38	47.41	68.58	-21.17	38.13	34.50	11.07	36.29	0.00	370	284	PEAK																																																																																																																														
3	5713.31	56.88	109.03	-52.15	48.60	34.53	11.16	37.41	0.00	370	284	PEAK																																																																																																																														
4	5722.14	64.54	115.78	-51.24	56.39	34.54	11.17	37.56	0.00	370	284	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5755.00	100.78	-----	-----	93.14	34.62	11.22	38.20	0.00	370	284	PEAK																																																																																																																														
Avg	Blank																																																																																																																																									
							<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>91.19</td><td>-----</td><td>-----</td><td>83.55</td><td>34.62</td><td>11.22</td><td>38.20</td><td>0.00</td><td>370</td><td>284</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	91.19	-----	-----	83.55	34.62	11.22	38.20	0.00	370	284	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5755.00	91.19	-----	-----	83.55	34.62	11.22	38.20	0.00	370	284	AVERAGE																																																																																																																														



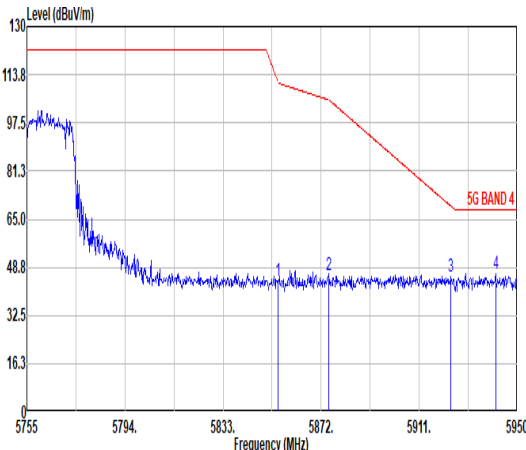


Mode	36																																																																																														
	Band Edge - R																																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																														
ANT	CDD 0+1																																																																																														
Pol.	Vertical						Fundamental																																																																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.84</td><td>44.04</td><td>111.26</td><td>-67.22</td><td>37.81</td><td>34.81</td><td>11.34</td><td>39.92</td><td>0.00</td><td>370</td><td>284</td><td>PEAK</td></tr><tr><td>2</td><td>5874.93</td><td>46.26</td><td>105.32</td><td>-59.06</td><td>40.08</td><td>34.85</td><td>11.35</td><td>40.02</td><td>0.00</td><td>370</td><td>284</td><td>PEAK</td></tr><tr><td>3</td><td>5923.68</td><td>45.48</td><td>69.28</td><td>-23.80</td><td>38.98</td><td>34.99</td><td>11.40</td><td>39.89</td><td>0.00</td><td>370</td><td>284</td><td>PEAK</td></tr><tr><td>4</td><td>5941.42</td><td>46.53</td><td>68.30</td><td>-21.77</td><td>39.89</td><td>35.07</td><td>11.42</td><td>39.85</td><td>0.00</td><td>370</td><td>284</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.84	44.04	111.26	-67.22	37.81	34.81	11.34	39.92	0.00	370	284	PEAK	2	5874.93	46.26	105.32	-59.06	40.08	34.85	11.35	40.02	0.00	370	284	PEAK	3	5923.68	45.48	69.28	-23.80	38.98	34.99	11.40	39.89	0.00	370	284	PEAK	4	5941.42	46.53	68.30	-21.77	39.89	35.07	11.42	39.85	0.00	370	284	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1	5854.84	44.04	111.26	-67.22	37.81	34.81	11.34	39.92	0.00	370	284	PEAK																																																																																			
2	5874.93	46.26	105.32	-59.06	40.08	34.85	11.35	40.02	0.00	370	284	PEAK																																																																																			
3	5923.68	45.48	69.28	-23.80	38.98	34.99	11.40	39.89	0.00	370	284	PEAK																																																																																			
4	5941.42	46.53	68.30	-21.77	39.89	35.07	11.42	39.85	0.00	370	284	PEAK																																																																																			

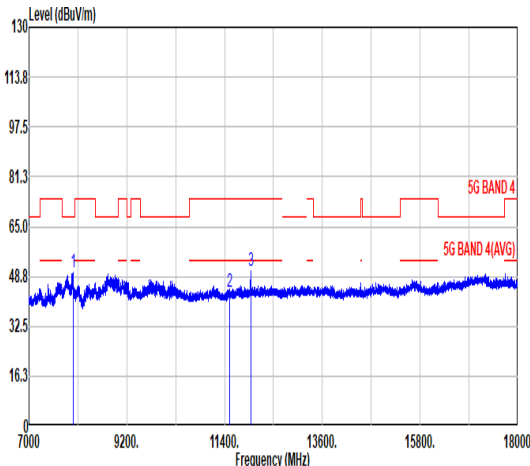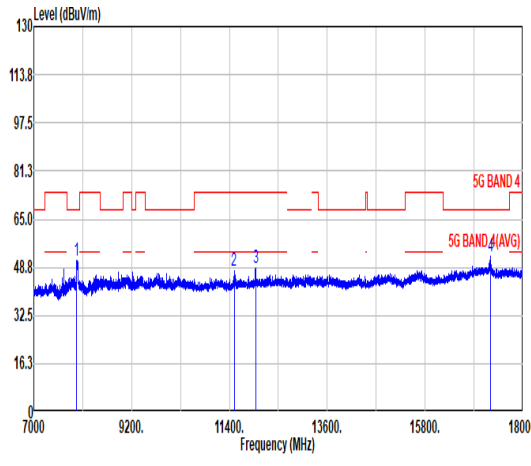


Mode	36																																																																																																																																																																																																																																												
	Harmonic																																																																																																																																																																																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																																																																																																																																																												
ANT	CDD 0+1																																																																																																																																																																																																																																												
Pol.	Horizontal										Vertical																																																																																																																																																																																																																																		
Peak Avg																																																																																																																																																																																																																																													
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th colspan="3"></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="3"></th></tr><tr><td>1</td><td>7996.60</td><td>50.28</td><td>68.30</td><td>-18.02</td><td>68.12</td><td>35.80</td><td>13.34</td><td>66.98</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11510.00</td><td>43.82</td><td>74.00</td><td>-30.18</td><td>55.87</td><td>38.31</td><td>16.37</td><td>66.73</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>11998.40</td><td>50.38</td><td>74.00</td><td>-23.62</td><td>61.35</td><td>38.50</td><td>16.68</td><td>66.15</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Factor	Factor	cm	deg				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg				1	7996.60	50.28	68.30	-18.02	68.12	35.80	13.34	66.98	0.00	---	---	---	---	---	---	Peak	2	11510.00	43.82	74.00	-30.18	55.87	38.31	16.37	66.73	0.00	---	---	---	---	---	---	Peak	3	11998.40	50.38	74.00	-23.62	61.35	38.50	16.68	66.15	0.00	---	---	---	---	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">Aux</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th colspan="3"></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="3"></th></tr><tr><td>1</td><td>7965.80</td><td>51.21</td><td>68.30</td><td>-17.09</td><td>69.09</td><td>35.80</td><td>13.32</td><td>67.00</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11505.60</td><td>47.59</td><td>74.00</td><td>-26.41</td><td>59.64</td><td>38.31</td><td>16.37</td><td>66.73</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>11996.20</td><td>48.67</td><td>74.00</td><td>-25.33</td><td>59.64</td><td>38.50</td><td>16.68</td><td>66.15</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>17271.80</td><td>52.63</td><td>68.30</td><td>-15.67</td><td>54.39</td><td>42.62</td><td>20.18</td><td>64.56</td><td>0.00</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Factor	Factor	cm	deg				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg				1	7965.80	51.21	68.30	-17.09	69.09	35.80	13.32	67.00	0.00	---	---	---	---	---	---	Peak	2	11505.60	47.59	74.00	-26.41	59.64	38.31	16.37	66.73	0.00	---	---	---	---	---	---	Peak	3	11996.20	48.67	74.00	-25.33	59.64	38.50	16.68	66.15	0.00	---	---	---	---	---	---	Peak	4	17271.80	52.63	68.30	-15.67	54.39	42.62	20.18	64.56	0.00	---	---	---	---	---	---	Peak
			Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark																																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Factor	Factor	cm	deg																																																																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																																
1	7996.60	50.28	68.30	-18.02	68.12	35.80	13.34	66.98	0.00	---	---	---	---	---	---	Peak																																																																																																																																																																																																																													
2	11510.00	43.82	74.00	-30.18	55.87	38.31	16.37	66.73	0.00	---	---	---	---	---	---	Peak																																																																																																																																																																																																																													
3	11998.40	50.38	74.00	-23.62	61.35	38.50	16.68	66.15	0.00	---	---	---	---	---	---	Peak																																																																																																																																																																																																																													
		Limit		Read		Ant		Cable Preamp		Aux		APos		TPos		Remark																																																																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Factor	Factor	cm	deg																																																																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																																
1	7965.80	51.21	68.30	-17.09	69.09	35.80	13.32	67.00	0.00	---	---	---	---	---	---	Peak																																																																																																																																																																																																																													
2	11505.60	47.59	74.00	-26.41	59.64	38.31	16.37	66.73	0.00	---	---	---	---	---	---	Peak																																																																																																																																																																																																																													
3	11996.20	48.67	74.00	-25.33	59.64	38.50	16.68	66.15	0.00	---	---	---	---	---	---	Peak																																																																																																																																																																																																																													
4	17271.80	52.63	68.30	-15.67	54.39	42.62	20.18	64.56	0.00	---	---	---	---	---	---	Peak																																																																																																																																																																																																																													

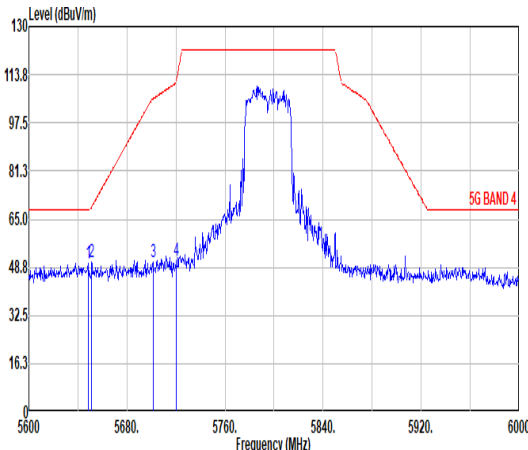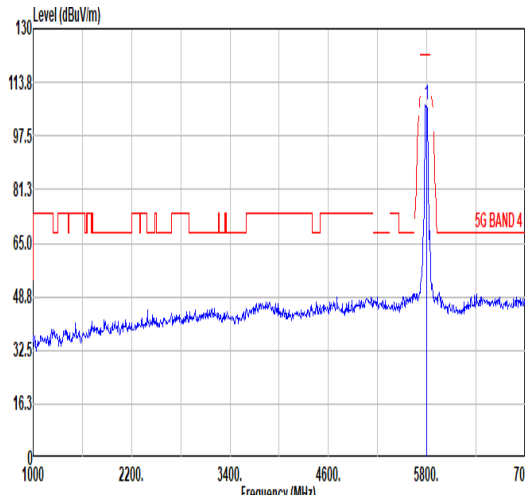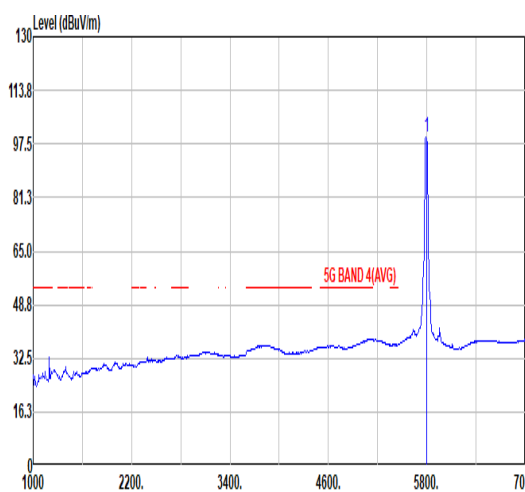

Mode	37																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																																																																										
ANT	CDD 0+1																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak																																																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5648.40</td><td>50.13</td><td>68.30</td><td>-18.17</td><td>40.81</td><td>34.50</td><td>11.07</td><td>36.25</td><td>0.00</td><td>100</td><td>180</td><td>PEAK</td></tr><tr><td>2</td><td>5651.20</td><td>50.29</td><td>69.19</td><td>-18.90</td><td>41.02</td><td>34.50</td><td>11.07</td><td>36.30</td><td>0.00</td><td>100</td><td>180</td><td>PEAK</td></tr><tr><td>3</td><td>5701.20</td><td>50.46</td><td>105.64</td><td>-55.18</td><td>42.01</td><td>34.50</td><td>11.14</td><td>37.19</td><td>0.00</td><td>100</td><td>180</td><td>PEAK</td></tr><tr><td>4</td><td>5720.00</td><td>50.80</td><td>110.90</td><td>-60.10</td><td>42.61</td><td>34.54</td><td>11.17</td><td>37.52</td><td>0.00</td><td>100</td><td>180</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5648.40	50.13	68.30	-18.17	40.81	34.50	11.07	36.25	0.00	100	180	PEAK	2	5651.20	50.29	69.19	-18.90	41.02	34.50	11.07	36.30	0.00	100	180	PEAK	3	5701.20	50.46	105.64	-55.18	42.01	34.50	11.14	37.19	0.00	100	180	PEAK	4	5720.00	50.80	110.90	-60.10	42.61	34.54	11.17	37.52	0.00	100	180	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>106.98</td><td>-----</td><td>-----</td><td>99.60</td><td>34.65</td><td>11.25</td><td>38.52</td><td>0.00</td><td>100</td><td>180</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5795.00	106.98	-----	-----	99.60	34.65	11.25	38.52	0.00	100	180	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5648.40	50.13	68.30	-18.17	40.81	34.50	11.07	36.25	0.00	100	180	PEAK																																																																																																																															
2	5651.20	50.29	69.19	-18.90	41.02	34.50	11.07	36.30	0.00	100	180	PEAK																																																																																																																															
3	5701.20	50.46	105.64	-55.18	42.01	34.50	11.14	37.19	0.00	100	180	PEAK																																																																																																																															
4	5720.00	50.80	110.90	-60.10	42.61	34.54	11.17	37.52	0.00	100	180	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5795.00	106.98	-----	-----	99.60	34.65	11.25	38.52	0.00	100	180	PEAK																																																																																																																															
Avg	Blank																																																																																																																																										
							<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>99.40</td><td>-----</td><td>-----</td><td>92.19</td><td>34.68</td><td>11.26</td><td>38.73</td><td>0.00</td><td>100</td><td>180</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5795.00	99.40	-----	-----	92.19	34.68	11.26	38.73	0.00	100	180	AVERAGE																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5795.00	99.40	-----	-----	92.19	34.68	11.26	38.73	0.00	100	180	AVERAGE																																																																																																																															

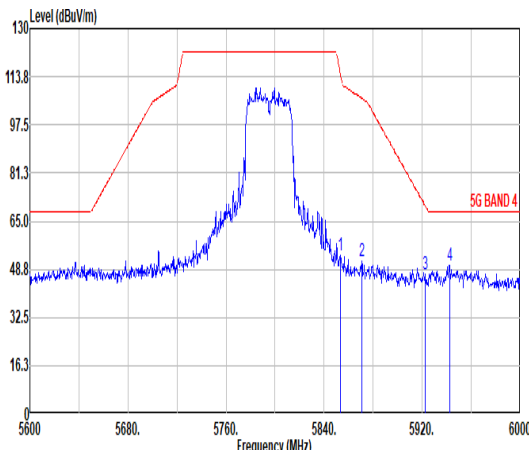


Mode	37																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																			
ANT	CDD 0+1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5853.60</td><td>53.41</td><td>114.09</td><td>-60.68</td><td>47.17</td><td>34.81</td><td>11.33</td><td>39.90</td><td>0.00</td><td>100</td><td>180</td><td>PEAK</td></tr><tr><td>2</td><td>5870.80</td><td>51.43</td><td>106.47</td><td>-55.04</td><td>45.27</td><td>34.84</td><td>11.35</td><td>40.03</td><td>0.00</td><td>100</td><td>180</td><td>PEAK</td></tr><tr><td>3</td><td>5922.40</td><td>46.86</td><td>70.22</td><td>-23.36</td><td>40.36</td><td>34.99</td><td>11.40</td><td>39.89</td><td>0.00</td><td>100</td><td>180</td><td>PEAK</td></tr><tr><td>4</td><td>5942.40</td><td>50.28</td><td>68.30</td><td>-18.02</td><td>43.63</td><td>35.07</td><td>11.42</td><td>39.84</td><td>0.00</td><td>100</td><td>180</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5853.60	53.41	114.09	-60.68	47.17	34.81	11.33	39.90	0.00	100	180	PEAK	2	5870.80	51.43	106.47	-55.04	45.27	34.84	11.35	40.03	0.00	100	180	PEAK	3	5922.40	46.86	70.22	-23.36	40.36	34.99	11.40	39.89	0.00	100	180	PEAK	4	5942.40	50.28	68.30	-18.02	43.63	35.07	11.42	39.84	0.00	100	180	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor		Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5853.60	53.41	114.09	-60.68	47.17	34.81	11.33	39.90	0.00	100	180	PEAK																																																																								
2	5870.80	51.43	106.47	-55.04	45.27	34.84	11.35	40.03	0.00	100	180	PEAK																																																																								
3	5922.40	46.86	70.22	-23.36	40.36	34.99	11.40	39.89	0.00	100	180	PEAK																																																																								
4	5942.40	50.28	68.30	-18.02	43.63	35.07	11.42	39.84	0.00	100	180	PEAK																																																																								





Mode	37																																																																																																																																									
	Band Edge - L																																																																																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																																																																									
ANT	CDD 0+1																																																																																																																																									
Pol.	Vertical						Fundamental																																																																																																																																			
Peak																																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5622.40</td><td>48.71</td><td>68.30</td><td>-19.59</td><td>39.34</td><td>34.50</td><td>11.03</td><td>36.16</td><td>0.00</td><td>331</td><td>292</td><td>PEAK</td></tr><tr><td>2</td><td>5650.00</td><td>46.46</td><td>68.30</td><td>-21.84</td><td>37.17</td><td>34.50</td><td>11.07</td><td>36.28</td><td>0.00</td><td>331</td><td>292</td><td>PEAK</td></tr><tr><td>3</td><td>5704.40</td><td>48.35</td><td>106.53</td><td>-58.18</td><td>39.94</td><td>34.51</td><td>11.15</td><td>37.25</td><td>0.00</td><td>331</td><td>292</td><td>PEAK</td></tr><tr><td>4</td><td>5720.00</td><td>45.14</td><td>110.90</td><td>-65.76</td><td>36.95</td><td>34.54</td><td>11.17</td><td>37.52</td><td>0.00</td><td>331</td><td>292</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5622.40	48.71	68.30	-19.59	39.34	34.50	11.03	36.16	0.00	331	292	PEAK	2	5650.00	46.46	68.30	-21.84	37.17	34.50	11.07	36.28	0.00	331	292	PEAK	3	5704.40	48.35	106.53	-58.18	39.94	34.51	11.15	37.25	0.00	331	292	PEAK	4	5720.00	45.14	110.90	-65.76	36.95	34.54	11.17	37.52	0.00	331	292	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5795.00</td><td>99.83</td><td>-----</td><td>-----</td><td>92.80</td><td>34.70</td><td>11.28</td><td>38.95</td><td>0.00</td><td>331</td><td>292</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	99.83	-----	-----	92.80	34.70	11.28	38.95	0.00	331	292
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5622.40	48.71	68.30	-19.59	39.34	34.50	11.03	36.16	0.00	331	292	PEAK																																																																																																																														
2	5650.00	46.46	68.30	-21.84	37.17	34.50	11.07	36.28	0.00	331	292	PEAK																																																																																																																														
3	5704.40	48.35	106.53	-58.18	39.94	34.51	11.15	37.25	0.00	331	292	PEAK																																																																																																																														
4	5720.00	45.14	110.90	-65.76	36.95	34.54	11.17	37.52	0.00	331	292	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5795.00	99.83	-----	-----	92.80	34.70	11.28	38.95	0.00	331	292	PEAK																																																																																																																														
Avg																																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5795.00</td><td>91.04</td><td>-----</td><td>-----</td><td>83.83</td><td>34.68</td><td>11.26</td><td>38.73</td><td>0.00</td><td>331</td><td>292</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	91.04	-----	-----	83.83	34.68	11.26	38.73	0.00	331	292	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5795.00</td><td>91.04</td><td>-----</td><td>-----</td><td>83.83</td><td>34.68</td><td>11.26</td><td>38.73</td><td>0.00</td><td>331</td><td>292</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	91.04	-----	-----	83.83	34.68	11.26	38.73	0.00	331	292	AVERAGE																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5795.00	91.04	-----	-----	83.83	34.68	11.26	38.73	0.00	331	292	AVERAGE																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5795.00	91.04	-----	-----	83.83	34.68	11.26	38.73	0.00	331	292	AVERAGE																																																																																																																														



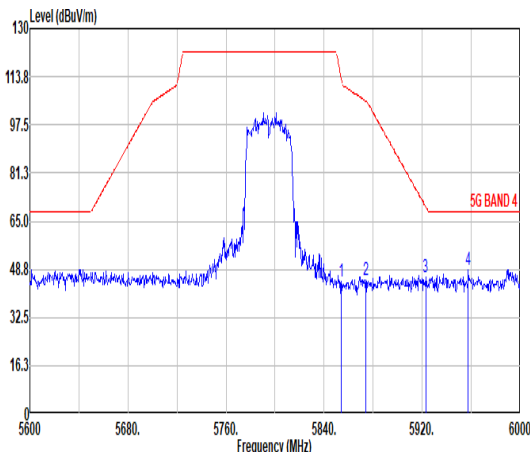


Mode	37																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																				
ANT	CDD 0+1																																																																																				
Pol.	Vertical	Fundamental																																																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.00</td><td>44.74</td><td>113.18</td><td>-68.44</td><td>38.51</td><td>34.81</td><td>11.33</td><td>39.91</td><td>0.00</td><td>331</td><td>292</td><td>PEAK</td></tr><tr><td>2</td><td>5874.00</td><td>44.96</td><td>105.58</td><td>-60.62</td><td>38.78</td><td>34.85</td><td>11.35</td><td>40.02</td><td>0.00</td><td>331</td><td>292</td><td>PEAK</td></tr><tr><td>3</td><td>5922.00</td><td>45.91</td><td>69.92</td><td>-24.01</td><td>39.41</td><td>34.99</td><td>11.40</td><td>39.89</td><td>0.00</td><td>331</td><td>292</td><td>PEAK</td></tr><tr><td>4</td><td>5957.60</td><td>48.67</td><td>68.30</td><td>-19.63</td><td>41.92</td><td>35.12</td><td>11.43</td><td>39.80</td><td>0.00</td><td>331</td><td>292</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.00	44.74	113.18	-68.44	38.51	34.81	11.33	39.91	0.00	331	292	PEAK	2	5874.00	44.96	105.58	-60.62	38.78	34.85	11.35	40.02	0.00	331	292	PEAK	3	5922.00	45.91	69.92	-24.01	39.41	34.99	11.40	39.89	0.00	331	292	PEAK	4	5957.60	48.67	68.30	-19.63	41.92	35.12	11.43	39.80	0.00	331	292	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1	5854.00	44.74	113.18	-68.44	38.51	34.81	11.33	39.91	0.00	331	292	PEAK																																																																									
2	5874.00	44.96	105.58	-60.62	38.78	34.85	11.35	40.02	0.00	331	292	PEAK																																																																									
3	5922.00	45.91	69.92	-24.01	39.41	34.99	11.40	39.89	0.00	331	292	PEAK																																																																									
4	5957.60	48.67	68.30	-19.63	41.92	35.12	11.43	39.80	0.00	331	292	PEAK																																																																									

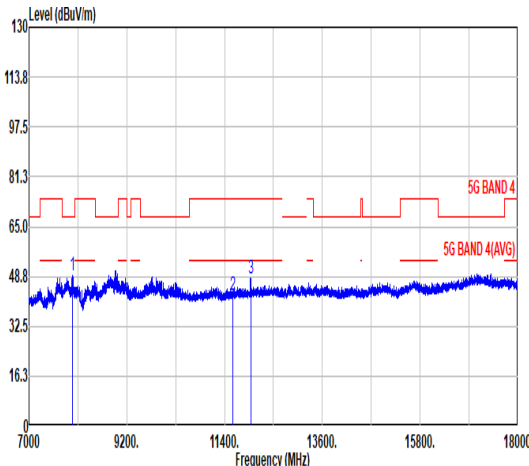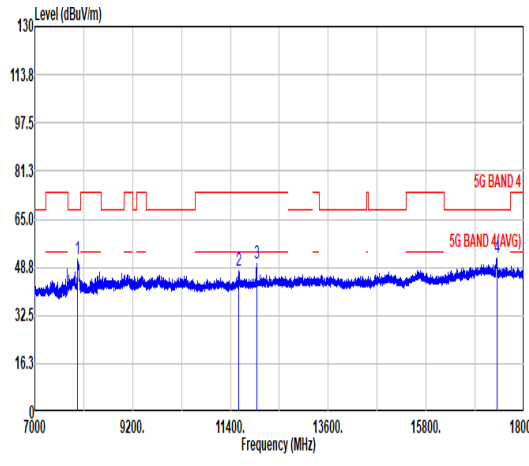


Mode	37																																																																																																																																																																			
	Harmonic																																																																																																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																																																																																																			
ANT	CDD 0+1																																																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																																																													
Peak Avg																																																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7972.40</td><td>49.22</td><td>68.30</td><td>-19.08</td><td>67.09</td><td>35.00</td><td>13.33</td><td>67.00</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11590.00</td><td>42.67</td><td>74.00</td><td>-31.33</td><td>54.49</td><td>38.39</td><td>16.42</td><td>66.63</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>11988.13</td><td>48.25</td><td>74.00</td><td>-25.75</td><td>59.24</td><td>38.50</td><td>16.67</td><td>66.16</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7972.40	49.22	68.30	-19.08	67.09	35.00	13.33	67.00	0.00	---	---	Peak	2	11590.00	42.67	74.00	-31.33	54.49	38.39	16.42	66.63	0.00	---	---	Peak	3	11988.13	48.25	74.00	-25.75	59.24	38.50	16.67	66.16	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7962.13</td><td>51.41</td><td>68.30</td><td>-16.89</td><td>69.30</td><td>35.00</td><td>13.32</td><td>67.01</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11587.00</td><td>47.62</td><td>74.00</td><td>-26.38</td><td>59.44</td><td>38.39</td><td>16.42</td><td>66.63</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>11985.93</td><td>49.91</td><td>74.00</td><td>-24.09</td><td>60.91</td><td>38.50</td><td>16.67</td><td>66.17</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>17389.13</td><td>52.19</td><td>68.30</td><td>-16.11</td><td>54.26</td><td>42.25</td><td>20.26</td><td>64.58</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7962.13	51.41	68.30	-16.89	69.30	35.00	13.32	67.01	0.00	---	---	Peak	2	11587.00	47.62	74.00	-26.38	59.44	38.39	16.42	66.63	0.00	---	---	Peak	3	11985.93	49.91	74.00	-24.09	60.91	38.50	16.67	66.17	0.00	---	---	Peak	4	17389.13	52.19	68.30	-16.11	54.26	42.25	20.26	64.58	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																										
1	7972.40	49.22	68.30	-19.08	67.09	35.00	13.33	67.00	0.00	---	---	Peak																																																																																																																																																								
2	11590.00	42.67	74.00	-31.33	54.49	38.39	16.42	66.63	0.00	---	---	Peak																																																																																																																																																								
3	11988.13	48.25	74.00	-25.75	59.24	38.50	16.67	66.16	0.00	---	---	Peak																																																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																										
1	7962.13	51.41	68.30	-16.89	69.30	35.00	13.32	67.01	0.00	---	---	Peak																																																																																																																																																								
2	11587.00	47.62	74.00	-26.38	59.44	38.39	16.42	66.63	0.00	---	---	Peak																																																																																																																																																								
3	11985.93	49.91	74.00	-24.09	60.91	38.50	16.67	66.17	0.00	---	---	Peak																																																																																																																																																								
4	17389.13	52.19	68.30	-16.11	54.26	42.25	20.26	64.58	0.00	---	---	Peak																																																																																																																																																								

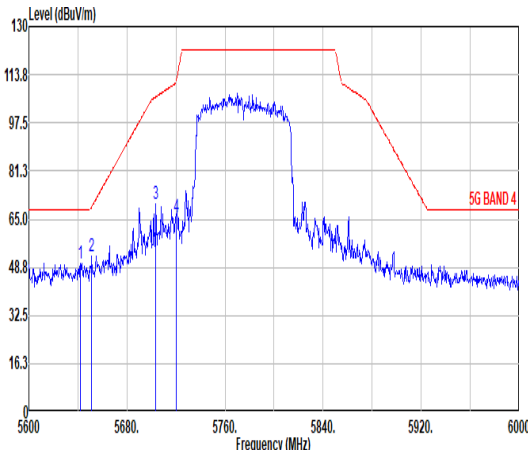
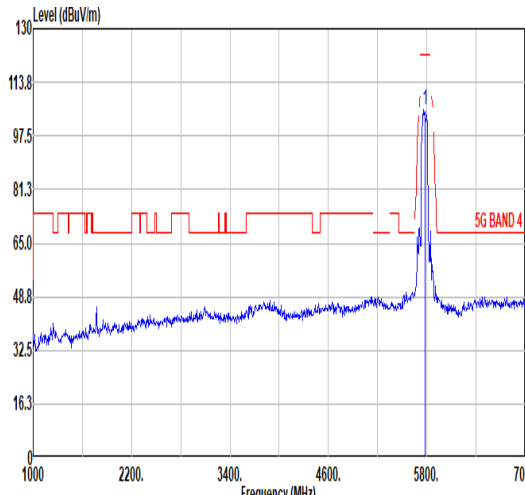
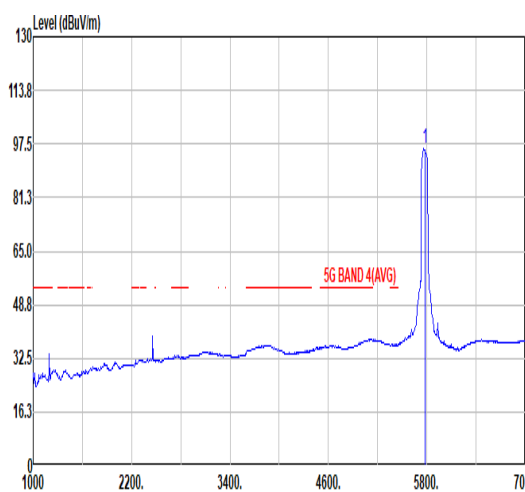


Mode	38																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																										
ANT	CDD 0+1																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak																																																																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5642.00</td><td>50.26</td><td>68.30</td><td>-18.04</td><td>40.84</td><td>34.50</td><td>11.06</td><td>36.14</td><td>0.00</td><td>111</td><td>181</td><td>PEAK</td></tr><tr><td>2</td><td>5651.20</td><td>52.69</td><td>69.19</td><td>-16.50</td><td>43.42</td><td>34.50</td><td>11.07</td><td>36.30</td><td>0.00</td><td>111</td><td>181</td><td>PEAK</td></tr><tr><td>3</td><td>5703.60</td><td>69.96</td><td>106.31</td><td>-36.35</td><td>61.53</td><td>34.51</td><td>11.15</td><td>37.23</td><td>0.00</td><td>111</td><td>181</td><td>PEAK</td></tr><tr><td>4</td><td>5720.00</td><td>65.86</td><td>110.90</td><td>-45.04</td><td>57.67</td><td>34.54</td><td>11.17</td><td>37.52</td><td>0.00</td><td>111</td><td>181</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5642.00	50.26	68.30	-18.04	40.84	34.50	11.06	36.14	0.00	111	181	PEAK	2	5651.20	52.69	69.19	-16.50	43.42	34.50	11.07	36.30	0.00	111	181	PEAK	3	5703.60	69.96	106.31	-36.35	61.53	34.51	11.15	37.23	0.00	111	181	PEAK	4	5720.00	65.86	110.90	-45.04	57.67	34.54	11.17	37.52	0.00	111	181	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>105.52</td><td>-----</td><td>-----</td><td>97.88</td><td>34.62</td><td>11.22</td><td>38.20</td><td>0.00</td><td>111</td><td>181</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	105.52	-----	-----	97.88	34.62	11.22	38.20	0.00	111	181	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5642.00	50.26	68.30	-18.04	40.84	34.50	11.06	36.14	0.00	111	181	PEAK																																																																																																																															
2	5651.20	52.69	69.19	-16.50	43.42	34.50	11.07	36.30	0.00	111	181	PEAK																																																																																																																															
3	5703.60	69.96	106.31	-36.35	61.53	34.51	11.15	37.23	0.00	111	181	PEAK																																																																																																																															
4	5720.00	65.86	110.90	-45.04	57.67	34.54	11.17	37.52	0.00	111	181	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5775.00	105.52	-----	-----	97.88	34.62	11.22	38.20	0.00	111	181	PEAK																																																																																																																															
Avg	Blank																																																																																																																																										
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>96.02</td><td>-----</td><td>-----</td><td>88.47</td><td>34.63</td><td>11.23</td><td>38.31</td><td>0.00</td><td>111</td><td>181</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	96.02	-----	-----	88.47	34.63	11.23	38.31	0.00	111	181	AVERAGE																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5775.00	96.02	-----	-----	88.47	34.63	11.23	38.31	0.00	111	181	AVERAGE																																																																																																																															

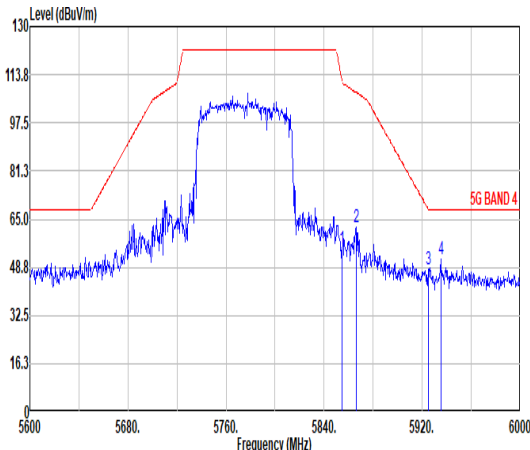


Mode	38																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																				
ANT	CDD 0+1																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.00</td><td>55.08</td><td>111.36</td><td>-56.28</td><td>48.85</td><td>34.81</td><td>11.34</td><td>39.92</td><td>0.00</td><td>111</td><td>181</td><td>PEAK</td></tr><tr><td>2</td><td>5866.00</td><td>62.54</td><td>107.82</td><td>-45.28</td><td>56.40</td><td>34.83</td><td>11.35</td><td>40.04</td><td>0.00</td><td>111</td><td>181</td><td>PEAK</td></tr><tr><td>3</td><td>5924.00</td><td>48.10</td><td>68.45</td><td>-20.35</td><td>41.59</td><td>35.00</td><td>11.40</td><td>39.89</td><td>0.00</td><td>111</td><td>181</td><td>PEAK</td></tr><tr><td>4</td><td>5935.20</td><td>51.58</td><td>68.30</td><td>-16.72</td><td>44.99</td><td>35.04</td><td>11.41</td><td>39.86</td><td>0.00</td><td>111</td><td>181</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.00	55.08	111.36	-56.28	48.85	34.81	11.34	39.92	0.00	111	181	PEAK	2	5866.00	62.54	107.82	-45.28	56.40	34.83	11.35	40.04	0.00	111	181	PEAK	3	5924.00	48.10	68.45	-20.35	41.59	35.00	11.40	39.89	0.00	111	181	PEAK	4	5935.20	51.58	68.30	-16.72	44.99	35.04	11.41	39.86	0.00	111	181	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1	5854.00	55.08	111.36	-56.28	48.85	34.81	11.34	39.92	0.00	111	181	PEAK																																																																									
2	5866.00	62.54	107.82	-45.28	56.40	34.83	11.35	40.04	0.00	111	181	PEAK																																																																									
3	5924.00	48.10	68.45	-20.35	41.59	35.00	11.40	39.89	0.00	111	181	PEAK																																																																									
4	5935.20	51.58	68.30	-16.72	44.99	35.04	11.41	39.86	0.00	111	181	PEAK																																																																									

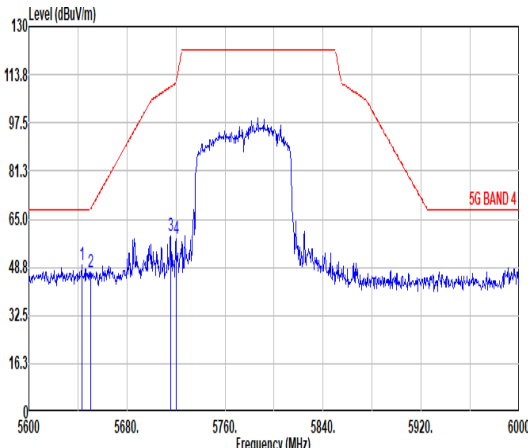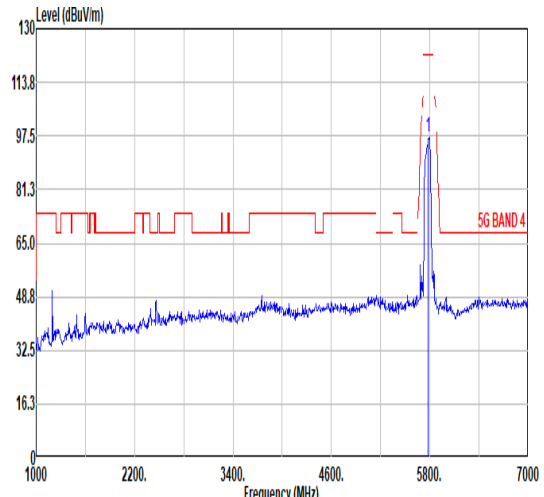
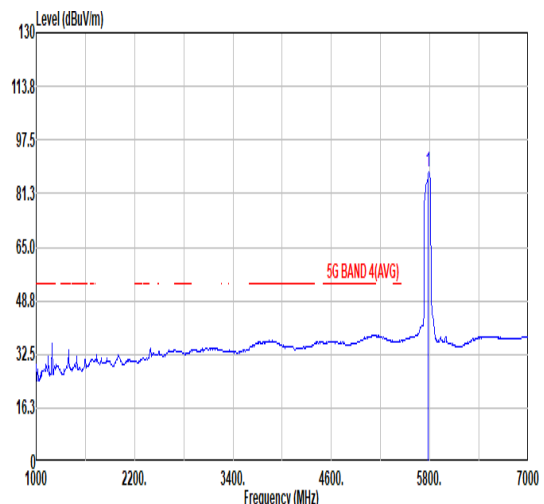


Mode	38																																																																																																																																									
	Band Edge - L																																																																																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																									
ANT	CDD 0+1																																																																																																																																									
Pol.	Vertical						Fundamental																																																																																																																																			
Peak																																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5643.20</td><td>49.36</td><td>68.30</td><td>-18.94</td><td>39.96</td><td>34.50</td><td>11.06</td><td>36.16</td><td>0.00</td><td>329</td><td>288</td><td>PEAK</td></tr><tr><td>2</td><td>5650.40</td><td>47.09</td><td>68.60</td><td>-21.51</td><td>37.81</td><td>34.50</td><td>11.07</td><td>36.29</td><td>0.00</td><td>329</td><td>288</td><td>PEAK</td></tr><tr><td>3</td><td>5715.60</td><td>59.51</td><td>109.67</td><td>-50.16</td><td>51.27</td><td>34.53</td><td>11.16</td><td>37.45</td><td>0.00</td><td>329</td><td>288</td><td>PEAK</td></tr><tr><td>4</td><td>5720.00</td><td>58.51</td><td>110.90</td><td>-52.39</td><td>50.32</td><td>34.54</td><td>11.17</td><td>37.52</td><td>0.00</td><td>329</td><td>288</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5643.20	49.36	68.30	-18.94	39.96	34.50	11.06	36.16	0.00	329	288	PEAK	2	5650.40	47.09	68.60	-21.51	37.81	34.50	11.07	36.29	0.00	329	288	PEAK	3	5715.60	59.51	109.67	-50.16	51.27	34.53	11.16	37.45	0.00	329	288	PEAK	4	5720.00	58.51	110.90	-52.39	50.32	34.54	11.17	37.52	0.00	329	288	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>96.92</td><td>-----</td><td>-----</td><td>89.80</td><td>34.69</td><td>11.27</td><td>38.84</td><td>0.00</td><td>329</td><td>288</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	96.92	-----	-----	89.80	34.69	11.27	38.84	0.00	329	288
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5643.20	49.36	68.30	-18.94	39.96	34.50	11.06	36.16	0.00	329	288	PEAK																																																																																																																														
2	5650.40	47.09	68.60	-21.51	37.81	34.50	11.07	36.29	0.00	329	288	PEAK																																																																																																																														
3	5715.60	59.51	109.67	-50.16	51.27	34.53	11.16	37.45	0.00	329	288	PEAK																																																																																																																														
4	5720.00	58.51	110.90	-52.39	50.32	34.54	11.17	37.52	0.00	329	288	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5775.00	96.92	-----	-----	89.80	34.69	11.27	38.84	0.00	329	288	PEAK																																																																																																																														
Avg	Blank																																																																																																																																									
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>87.76</td><td>-----</td><td>-----</td><td>80.55</td><td>34.68</td><td>11.26</td><td>38.73</td><td>0.00</td><td>329</td><td>288</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	87.76	-----	-----	80.55	34.68	11.26	38.73	0.00	329	288	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5775.00	87.76	-----	-----	80.55	34.68	11.26	38.73	0.00	329	288	AVERAGE																																																																																																																														

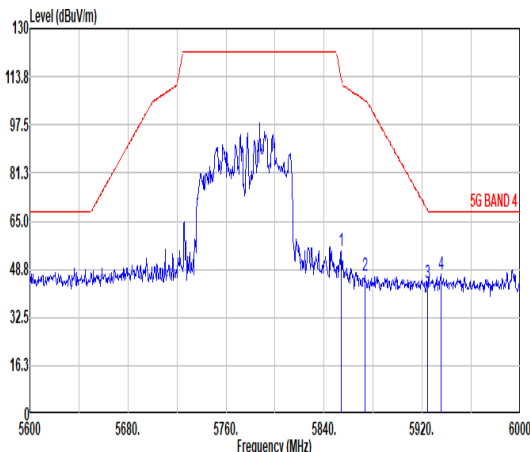

Mode	38																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																				
ANT	CDD 0+1																																																																																				
Pol.	Vertical	Fundamental																																																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.00</td><td>55.05</td><td>113.18</td><td>-58.13</td><td>48.82</td><td>34.81</td><td>11.33</td><td>39.91</td><td>0.00</td><td>329</td><td>288</td><td>PEAK</td></tr><tr><td>2</td><td>5873.20</td><td>46.62</td><td>105.80</td><td>-59.18</td><td>40.44</td><td>34.85</td><td>11.35</td><td>40.02</td><td>0.00</td><td>329</td><td>288</td><td>PEAK</td></tr><tr><td>3</td><td>5924.40</td><td>44.06</td><td>68.74</td><td>-24.68</td><td>37.55</td><td>35.00</td><td>11.40</td><td>39.89</td><td>0.00</td><td>329</td><td>288</td><td>PEAK</td></tr><tr><td>4</td><td>5935.20</td><td>47.15</td><td>68.30</td><td>-21.15</td><td>40.56</td><td>35.04</td><td>11.41</td><td>39.86</td><td>0.00</td><td>329</td><td>288</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.00	55.05	113.18	-58.13	48.82	34.81	11.33	39.91	0.00	329	288	PEAK	2	5873.20	46.62	105.80	-59.18	40.44	34.85	11.35	40.02	0.00	329	288	PEAK	3	5924.40	44.06	68.74	-24.68	37.55	35.00	11.40	39.89	0.00	329	288	PEAK	4	5935.20	47.15	68.30	-21.15	40.56	35.04	11.41	39.86	0.00	329	288	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1	5854.00	55.05	113.18	-58.13	48.82	34.81	11.33	39.91	0.00	329	288	PEAK																																																																									
2	5873.20	46.62	105.80	-59.18	40.44	34.85	11.35	40.02	0.00	329	288	PEAK																																																																									
3	5924.40	44.06	68.74	-24.68	37.55	35.00	11.40	39.89	0.00	329	288	PEAK																																																																									
4	5935.20	47.15	68.30	-21.15	40.56	35.04	11.41	39.86	0.00	329	288	PEAK																																																																									

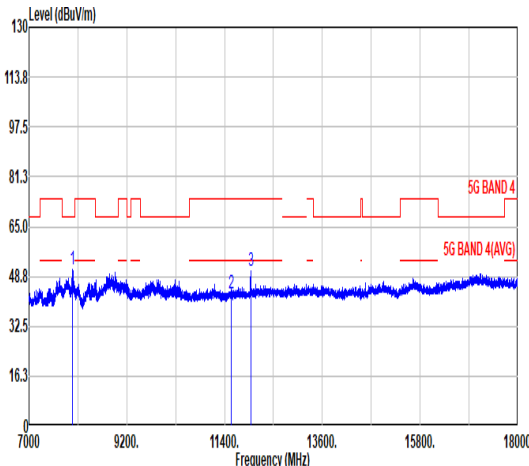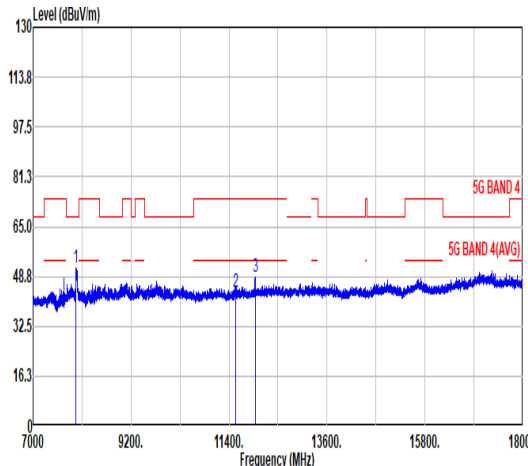

Mode	38																																																																																																																																																														
	Harmonic																																																																																																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																																														
ANT	CDD 0+1																																																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																																																								
Peak Avg																																																																																																																																																															
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7985.60</td><td>51.26</td><td>68.30</td><td>-17.04</td><td>69.11</td><td>35.00</td><td>13.34</td><td>66.99</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11550.00</td><td>42.99</td><td>74.00</td><td>-31.01</td><td>54.93</td><td>38.35</td><td>16.39</td><td>66.68</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>11994.00</td><td>50.28</td><td>74.00</td><td>-23.72</td><td>61.26</td><td>38.50</td><td>16.68</td><td>66.16</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	7985.60	51.26	68.30	-17.04	69.11	35.00	13.34	66.99	0.00	---	---	Peak	2	11550.00	42.99	74.00	-31.01	54.93	38.35	16.39	66.68	0.00	---	---	Peak	3	11994.00	50.28	74.00	-23.72	61.26	38.50	16.68	66.16	0.00	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7962.13</td><td>51.46</td><td>68.30</td><td>-16.84</td><td>69.35</td><td>35.00</td><td>13.32</td><td>67.01</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>11550.00</td><td>43.71</td><td>74.00</td><td>-30.29</td><td>55.65</td><td>38.35</td><td>16.39</td><td>66.68</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>11992.53</td><td>48.41</td><td>74.00</td><td>-25.59</td><td>59.40</td><td>38.50</td><td>16.67</td><td>66.16</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	7962.13	51.46	68.30	-16.84	69.35	35.00	13.32	67.01	0.00	---	---	Peak	2	11550.00	43.71	74.00	-30.29	55.65	38.35	16.39	66.68	0.00	---	---	Peak	3	11992.53	48.41	74.00	-25.59	59.40	38.50	16.67	66.16	0.00	---	---
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																				
1	7985.60	51.26	68.30	-17.04	69.11	35.00	13.34	66.99	0.00	---	---	Peak																																																																																																																																																			
2	11550.00	42.99	74.00	-31.01	54.93	38.35	16.39	66.68	0.00	---	---	Peak																																																																																																																																																			
3	11994.00	50.28	74.00	-23.72	61.26	38.50	16.68	66.16	0.00	---	---	Peak																																																																																																																																																			
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																				
1	7962.13	51.46	68.30	-16.84	69.35	35.00	13.32	67.01	0.00	---	---	Peak																																																																																																																																																			
2	11550.00	43.71	74.00	-30.29	55.65	38.35	16.39	66.68	0.00	---	---	Peak																																																																																																																																																			
3	11992.53	48.41	74.00	-25.59	59.40	38.50	16.67	66.16	0.00	---	---	Peak																																																																																																																																																			




Mode	30																																																																																																																																																																																																																																			
	Emission below 1GHz																																																																																																																																																																																																																																			
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																																																																																																																			
ANT	CDD 0+1																																																																																																																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																																																																																																																													
Peak QP	Site : 03CH05-KS Condition : 5G BAND4 3m CBL6111D SN23188 HORIZONTAL Project : 2D2912 mode : IMEI : #5 <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>22.03</td><td>-17.97</td><td>40.00</td><td>29.77</td><td>24.57</td><td>0.71</td><td>33.02</td><td>---</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>184.23</td><td>16.95</td><td>-26.55</td><td>43.50</td><td>31.99</td><td>15.73</td><td>2.06</td><td>32.83</td><td>---</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>3</td><td>313.24</td><td>18.30</td><td>-27.70</td><td>46.00</td><td>28.83</td><td>19.62</td><td>2.70</td><td>32.85</td><td>---</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>4</td><td>463.59</td><td>23.93</td><td>-22.07</td><td>46.00</td><td>30.84</td><td>22.82</td><td>3.29</td><td>33.02</td><td>---</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>5</td><td>830.25</td><td>30.10</td><td>-15.90</td><td>46.00</td><td>31.76</td><td>26.46</td><td>4.40</td><td>32.52</td><td>---</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>6</td><td>984.48</td><td>31.93</td><td>-22.07</td><td>54.00</td><td>30.86</td><td>27.41</td><td>4.80</td><td>31.14</td><td>---</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr></table>													Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	30.00	22.03	-17.97	40.00	29.77	24.57	0.71	33.02	---	---	Peak	HORIZONTAL	2	184.23	16.95	-26.55	43.50	31.99	15.73	2.06	32.83	---	---	Peak	HORIZONTAL	3	313.24	18.30	-27.70	46.00	28.83	19.62	2.70	32.85	---	---	Peak	HORIZONTAL	4	463.59	23.93	-22.07	46.00	30.84	22.82	3.29	33.02	---	---	Peak	HORIZONTAL	5	830.25	30.10	-15.90	46.00	31.76	26.46	4.40	32.52	---	---	Peak	HORIZONTAL	6	984.48	31.93	-22.07	54.00	30.86	27.41	4.80	31.14	---	---	Peak	HORIZONTAL	Site : 03CH05-KS Condition : 5G BAND4 3m CBL6111D SN23188 VERTICAL Project : 2D2912 mode : IMEI : #5 <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>45.52</td><td>28.05</td><td>-11.95</td><td>40.00</td><td>43.93</td><td>16.11</td><td>0.98</td><td>32.97</td><td>---</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>104.69</td><td>21.41</td><td>-22.09</td><td>43.50</td><td>35.74</td><td>17.00</td><td>1.54</td><td>32.87</td><td>---</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>3</td><td>250.19</td><td>19.86</td><td>-26.14</td><td>46.00</td><td>31.79</td><td>18.42</td><td>2.42</td><td>32.77</td><td>---</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>4</td><td>565.44</td><td>24.09</td><td>-21.91</td><td>46.00</td><td>28.50</td><td>25.06</td><td>3.63</td><td>33.10</td><td>---</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>5</td><td>765.26</td><td>29.62</td><td>-16.38</td><td>46.00</td><td>32.20</td><td>25.96</td><td>4.23</td><td>32.77</td><td>---</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>6</td><td>972.84</td><td>31.81</td><td>-22.19</td><td>54.00</td><td>30.89</td><td>27.46</td><td>4.77</td><td>31.31</td><td>---</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr></table>													Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	45.52	28.05	-11.95	40.00	43.93	16.11	0.98	32.97	---	---	Peak	VERTICAL	2	104.69	21.41	-22.09	43.50	35.74	17.00	1.54	32.87	---	---	Peak	VERTICAL	3	250.19	19.86	-26.14	46.00	31.79	18.42	2.42	32.77	---	---	Peak	VERTICAL	4	565.44	24.09	-21.91	46.00	28.50	25.06	3.63	33.10	---	---	Peak	VERTICAL	5	765.26	29.62	-16.38	46.00	32.20	25.96	4.23	32.77	---	---	Peak	VERTICAL	6	972.84	31.81	-22.19	54.00	30.89	27.46	4.77	31.31	---	---	Peak	VERTICAL
		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																										
1	30.00	22.03	-17.97	40.00	29.77	24.57	0.71	33.02	---	---	Peak	HORIZONTAL																																																																																																																																																																																																																								
2	184.23	16.95	-26.55	43.50	31.99	15.73	2.06	32.83	---	---	Peak	HORIZONTAL																																																																																																																																																																																																																								
3	313.24	18.30	-27.70	46.00	28.83	19.62	2.70	32.85	---	---	Peak	HORIZONTAL																																																																																																																																																																																																																								
4	463.59	23.93	-22.07	46.00	30.84	22.82	3.29	33.02	---	---	Peak	HORIZONTAL																																																																																																																																																																																																																								
5	830.25	30.10	-15.90	46.00	31.76	26.46	4.40	32.52	---	---	Peak	HORIZONTAL																																																																																																																																																																																																																								
6	984.48	31.93	-22.07	54.00	30.86	27.41	4.80	31.14	---	---	Peak	HORIZONTAL																																																																																																																																																																																																																								
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																																																									
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																										
1	45.52	28.05	-11.95	40.00	43.93	16.11	0.98	32.97	---	---	Peak	VERTICAL																																																																																																																																																																																																																								
2	104.69	21.41	-22.09	43.50	35.74	17.00	1.54	32.87	---	---	Peak	VERTICAL																																																																																																																																																																																																																								
3	250.19	19.86	-26.14	46.00	31.79	18.42	2.42	32.77	---	---	Peak	VERTICAL																																																																																																																																																																																																																								
4	565.44	24.09	-21.91	46.00	28.50	25.06	3.63	33.10	---	---	Peak	VERTICAL																																																																																																																																																																																																																								
5	765.26	29.62	-16.38	46.00	32.20	25.96	4.23	32.77	---	---	Peak	VERTICAL																																																																																																																																																																																																																								
6	972.84	31.81	-22.19	54.00	30.89	27.46	4.77	31.31	---	---	Peak	VERTICAL																																																																																																																																																																																																																								


Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	73.21	1.362	0.734	0.75kHz
802.11ac VHT20	71.60	1.275	0.784	0.82kHz
802.11ac VHT40	56.05	0.638	1.568	1.6kHz
802.11ac VHT80	38.94	0.319	3.136	3.3kHz


802.11a

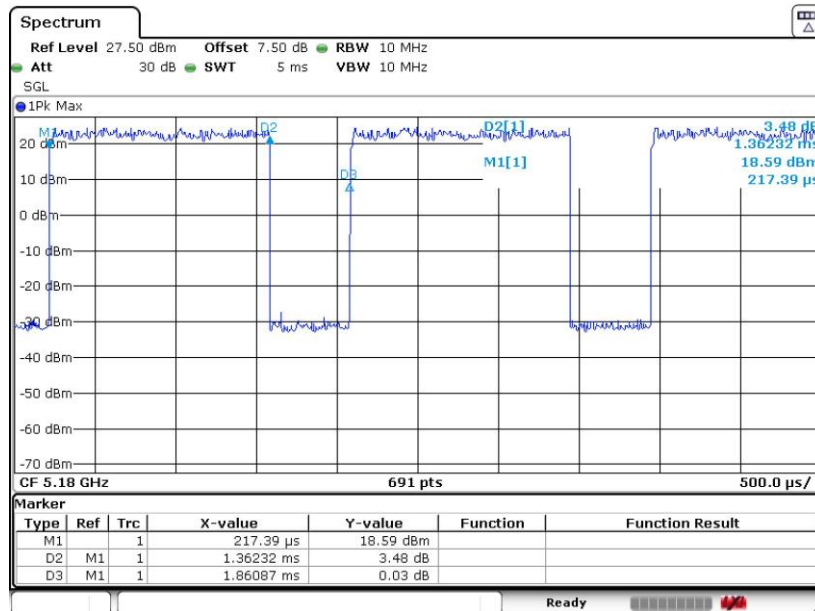

802.11ac VHT20

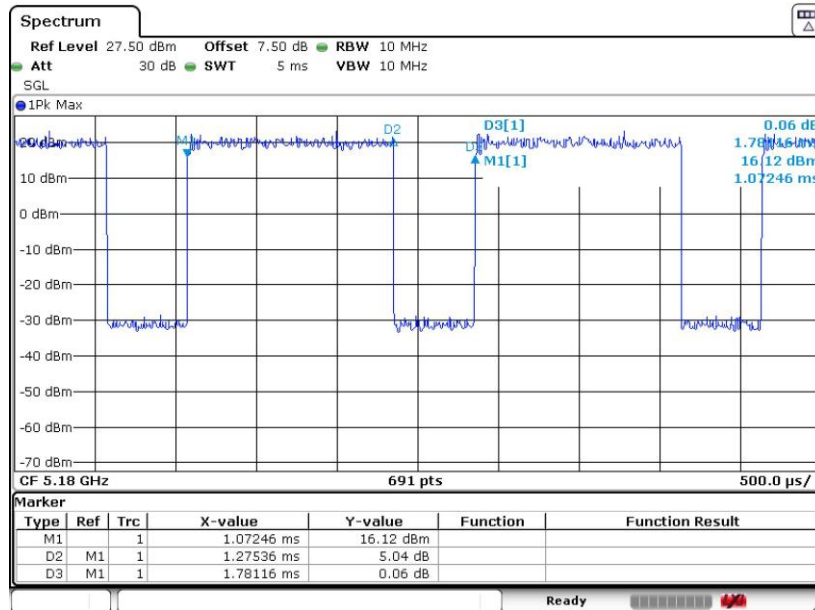

802.11ac VHT40

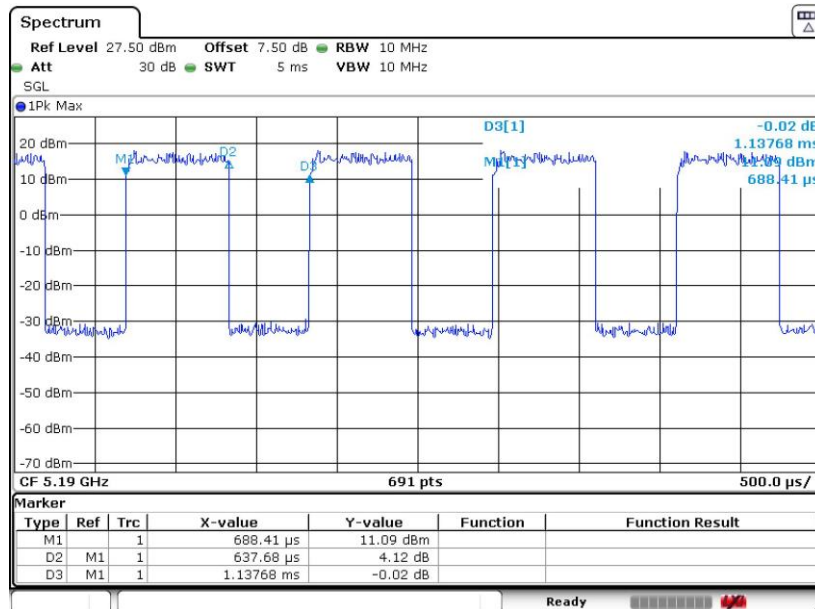

802.11ac VHT80

