



## FCC PART 22 AND 90 TEST REPORT

For

**Sepura plc**

Radio House, St. Andrews Road, Cambridge CB4 1GR, UK

**FCC ID: XX6SER8010**

<b>Report Type:</b> Original Report	<b>Product Type:</b> DMR Repeater
<b>Test Engineer:</b> <u>Dean Liu</u>	
<b>Report Number:</b> <u>RDG140724008-00</u>	
<b>Report Date:</b> <u>2014-08-18</u>	
<b>Reviewed By:</b> <u>Sula Huang</u> RF Engineer	
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EQUIPMENT MODIFICATIONS .....	6
BLOCK DIAGRAM OF TEST SETUP .....	6
<b>SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>FCC §1.1310 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b>	<b>8</b>
APPLICABLE STANDARD .....	8
<b>FCC §2.1046 &amp; § 22.727 &amp; §90.205- RF OUTPUT POWER .....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
TEST PROCEDURE .....	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST DATA .....	9
<b>FCC §2.1047 &amp; §90.207 - MODULATION CHARACTERISTIC.....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
TEST PROCEDURE .....	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA .....	11
<b>FCC §2.1049&amp; §22.357 &amp; § 22.731 &amp; §90.209 &amp; §90.210 – OCCUPIED BANDWIDTH &amp; EMISSION MASK</b>	<b>17</b>
APPLICABLE STANDARD .....	17
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA .....	18
<b>FCC §2.1051 &amp; §22.861 &amp; §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....</b>	<b>26</b>
APPLICABLE STANDARD .....	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST PROCEDURE .....	27
TEST DATA .....	27
<b>FCC §2.1053 &amp; §22.861 &amp; §90.210 - RADIATED SPURIOUS EMISSIONS .....</b>	<b>32</b>
APPLICABLE STANDARD .....	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST PROCEDURE .....	32
TEST DATA .....	33
<b>FCC §2.1055 &amp; § 22.355 &amp; §90.213- FREQUENCY STABILITY .....</b>	<b>35</b>
APPLICABLE STANDARD .....	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST PROCEDURE .....	35
TEST DATA .....	35

**FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....38**

    APPLICABLE STANDARD .....38

    TEST EQUIPMENT LIST AND DETAILS.....38

    TEST PROCEDURE .....38

    TEST DATA .....39

FINAL

## GENERAL INFORMATION

---

### Product Description for Equipment Under Test (EUT)

*Sepura plc's* product, model number: SER8010 (FCC ID: XX6SER8010) the "EUT" in this report is a *DMR Repeater*, which was measured approximately: 48.5 cm (L) x 41.5 cm (W) x 13.0 cm (H), rated input voltage: 13.6 VDC or AC100-240V 50/60Hz.

*\* All measurement and test data in this report was gathered from production sample serial number: 7PR231428GE0004.(Assigned by Applicant). The EUT was received on 2014-07-29.*

### Objective

This test report is prepared on behalf of *Sepura plc* in accordance with Part 2, Part 22 and Part 90 of the Federal Communications Commission rules.

### Related Submittal(s)/Grant(s)

No related submittal(s).

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 22 – Public Mobile Service  
Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-D and ANSI 63.4-2003.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in a test mode.

### EUT Specification:


Test Software Version	DMR Manager-V1.89		
Test Frequency(MHz)	136.025	155	173.975
Set	High Power Level: 45 W, Low Power Level: 25 W		

Operating Frequency Band	136-174 MHz
Modulation Mode	FM/4FSK
Channel Separation	12.5 kHz
Modulation Type	Analog(FM); Digital(4FSK)
Rated Output Power	45 W(High); 25 W(Low)

### Equipment Modifications

No modifications were made to the unit tested.

### Block Diagram of Test Setup

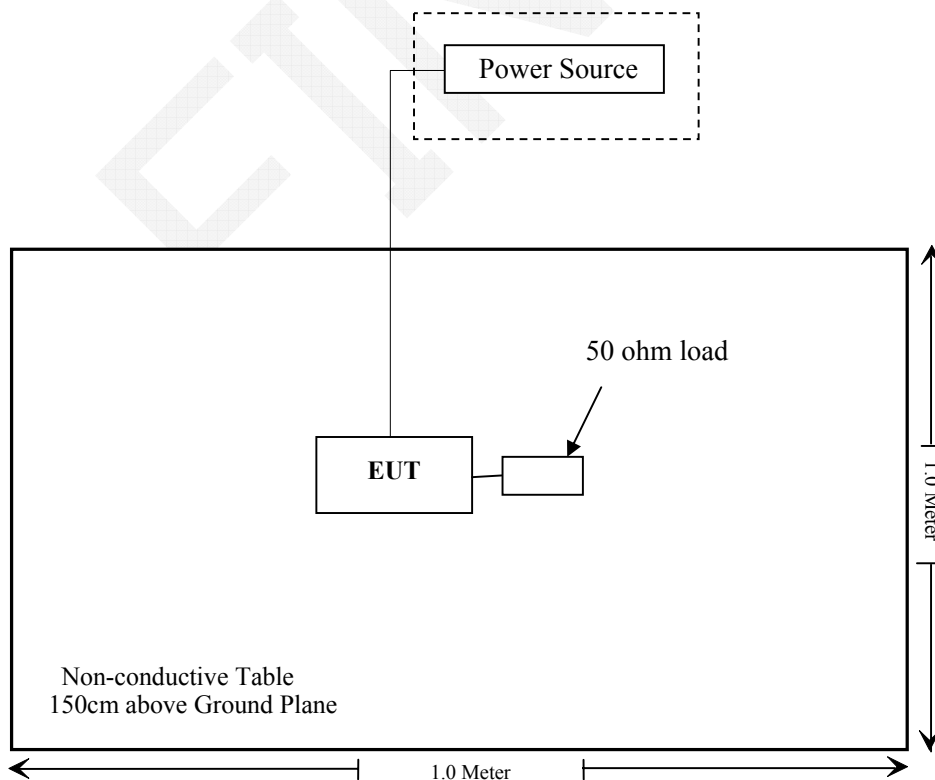

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Results
FCC §1.1310	Maximum Permissible Exposure(MPE)	Compliance
§2.1046; § 22.727;§90.205	RF Output Power	Compliance
§2.1047;§90.207	Modulation Characteristic	Compliance
§2.1049;§22.357;§ 22.731;§90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
§2.1051; §22.861;§90.210	Spurious Emission at Antenna Terminal	Compliance
§2.1053; §22.861;§90.210	Spurious Radiated Emissions	Compliance
§2.1055; § 22.355;§90.213	Frequency Stability	Compliance
§90.214	Transient Frequency Behavior	Compliance

## FCC §1.1310 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

### Applicable Standard

According to 1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for Occupational/Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E ,  H  or S (minutes)
0.3- 3.0	614	1.63	(100)*	6
3.0 - 30	1842/f	4.89/f	(900/f <sup>2</sup> )*	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6

f = frequency in MHz

\* = Plane-wave equivalent power density

### MPE Calculation

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where: S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Frequency	Conducted Output Power	Typical Antenna Gain		Distance	Power Density	Limit
MHz	mW	dBi	numeric	cm	mW/cm <sup>2</sup>	mW/cm <sup>2</sup>
155	45000	0	1.0	120	0.249	1.0

Radio Exposure Statement:

To comply with FCC RF exposure requirements, a minimum separation distance of 1.2m is required between antenna and people.

Result: Compliant.

**FCC §2.1046 & § 22.727 & §90.205- RF OUTPUT POWER****Applicable Standard**

FCC §2.1046, § 22.727 and §90.205.

**Test Procedure**

Conducted RF Output Power:

TIA-603-D section 2.2.1

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer setting:

RBW	Video B/W
100 kHz	300 kHz

**Test Equipment List and Details**

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

Temperature:	30.3 °C
Relative Humidity:	64 %
ATM Pressure:	99.7 kPa

*The testing was performed by Dean Liu on 2014-08-11.*

Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables.

FCC Part 90:

Modulation mode	Channel Separation	f <sub>c</sub>	Conducted Output Power		Note
		MHz	W	W	
FM	12.5 kHz	136.025	45.19	24.95	Not for FCC Review
		155	44.86	24.89	/
		173.975	44.68	24.89	/
4FSK		136.025	45.22	24.98	Not for FCC Review
		155	44.90	24.92	/
		173.975	44.65	24.92	/

FCC Part 22:

Modulation mode	Channel Separation	$f_c$	Conducted Output Power		Note
		MHz	W	W	
FM	12.5 kHz	161.65	44.77	24.82	/
4FSK		161.65	44.83	24.86	/

**FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC****Applicable Standard**

FCC§2.1047 &amp; §90.207:

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

**Test Procedure**

Test Method: TIA/EIA-603 2.2.3

**Test Equipment List and Details**

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	RF Communications Test Set	8920A	00 235	2014-05-09	2015-05-08
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-08

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

<b>Temperature:</b>	30.3 °C
<b>Relative Humidity:</b>	64 %
<b>ATM Pressure:</b>	99.7 kPa


*The testing was performed by Dean Liu on 2014-08-11.*

*Test Result: Compliant. Please refer to the following table and plots.*

**MODULATION LIMITING (High Power)**

Carrier Frequency: 155MHz, Channel Separation = 12.5 kHz


Audio Input Level [dB]	Frequency Deviation (kHz)			FCC Limit [kHz]
	@ 300 Hz	@ 1kHz	@ 3 kHz	
20.0	1.766	2.359	2.184	2.5
15.0	1.751	2.351	2.175	2.5
10.0	1.406	2.349	2.172	2.5
5.0	0.805	2.341	2.167	2.5
0.0	0.472	1.500	2.164	2.5
-5.0	0.291	0.853	1.845	2.5
-10.0	0.136	0.513	1.080	2.5
-15.0	0.101	0.312	0.624	2.5
-20.0	0.087	0.194	0.371	2.5

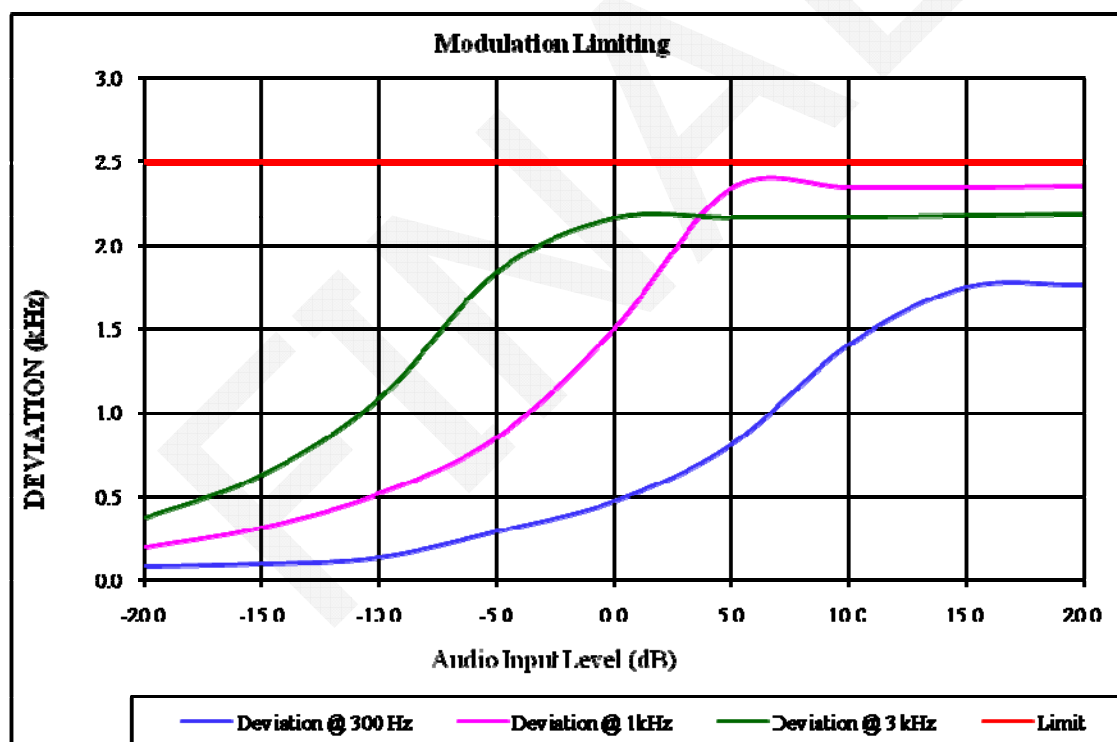

**MODULATION LIMITING (Low Power)**

Carrier Frequency: 155MHz, Channel Separation = 12.5 kHz


Audio Input Level [dB]	Frequency Deviation (kHz)			FCC Limit [kHz]
	@ 300 Hz	@ 1kHz	@ 3 kHz	
20.0	1.776	2.352	2.214	2.5
15.0	1.761	2.348	2.195	2.5
10.0	1.416	2.349	2.162	2.5
5.0	0.785	2.336	2.167	2.5
0.0	0.442	1.500	2.144	2.5
-5.0	0.271	0.903	1.885	2.5
-10.0	0.166	0.513	1.120	2.5
-15.0	0.151	0.292	0.664	2.5
-20.0	0.127	0.184	0.351	2.5

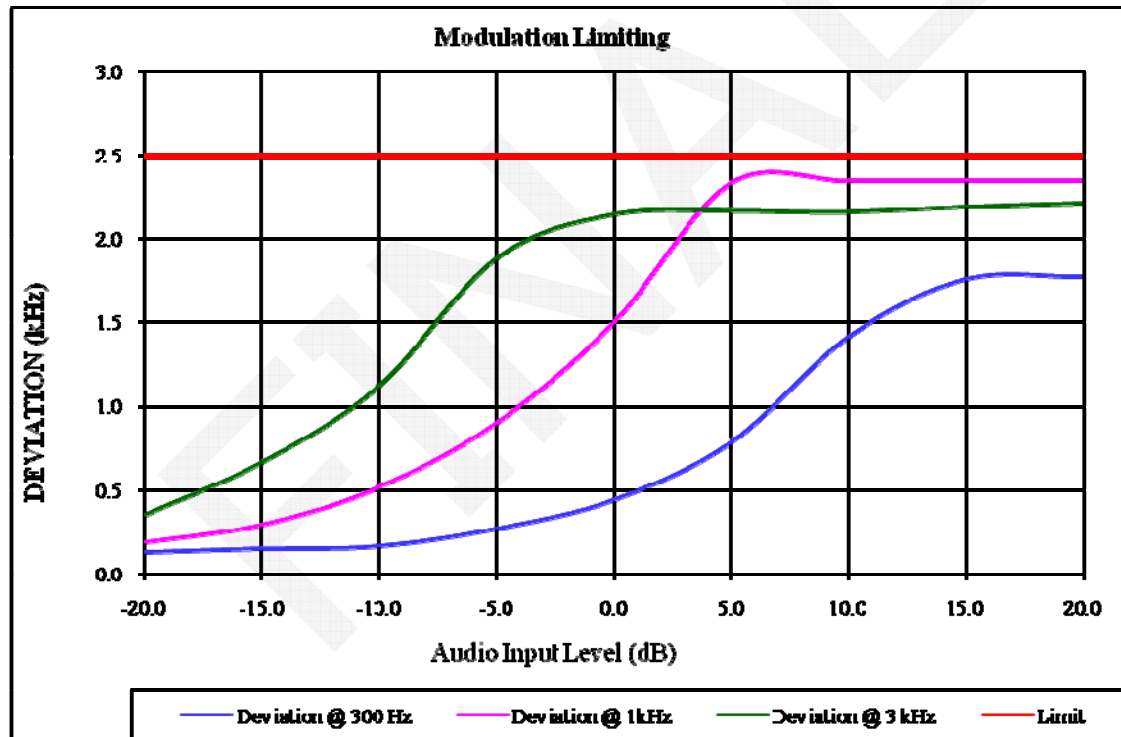

**Audio Frequency Response (High Power)**

Carrier Frequency: 155 MHz, Channel Separation = 12.5 kHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-10.60
400	-8.10
500	-6.50
600	-5.50
700	-4.10
800	-3.00
900	-1.50
1000	0.00
1200	1.50
1400	3.00
1600	3.90
1800	3.90
2000	3.90
2200	5.30
2400	5.90
2600	6.80
2800	7.80
3000	7.00

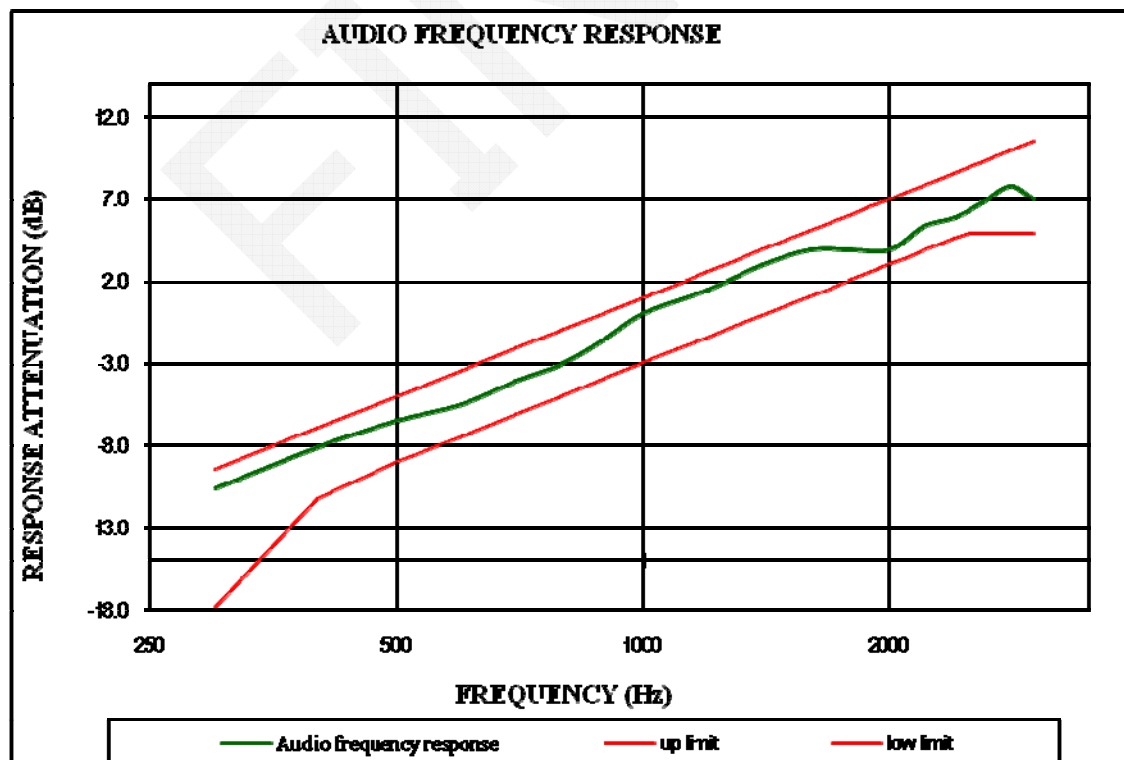

**Audio Frequency Response (Low Power)**

Carrier Frequency: 155 MHz, Channel Separation = 12.5 kHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-10.84
400	-8.36
500	-6.43
600	-5.56
700	-4.34
800	-3.20
900	-1.52
1000	0.13
1200	1.79
1400	2.80
1600	3.72
1800	3.74
2000	4.13
2200	5.60
2400	5.72
2600	6.86
2800	7.93
3000	7.19

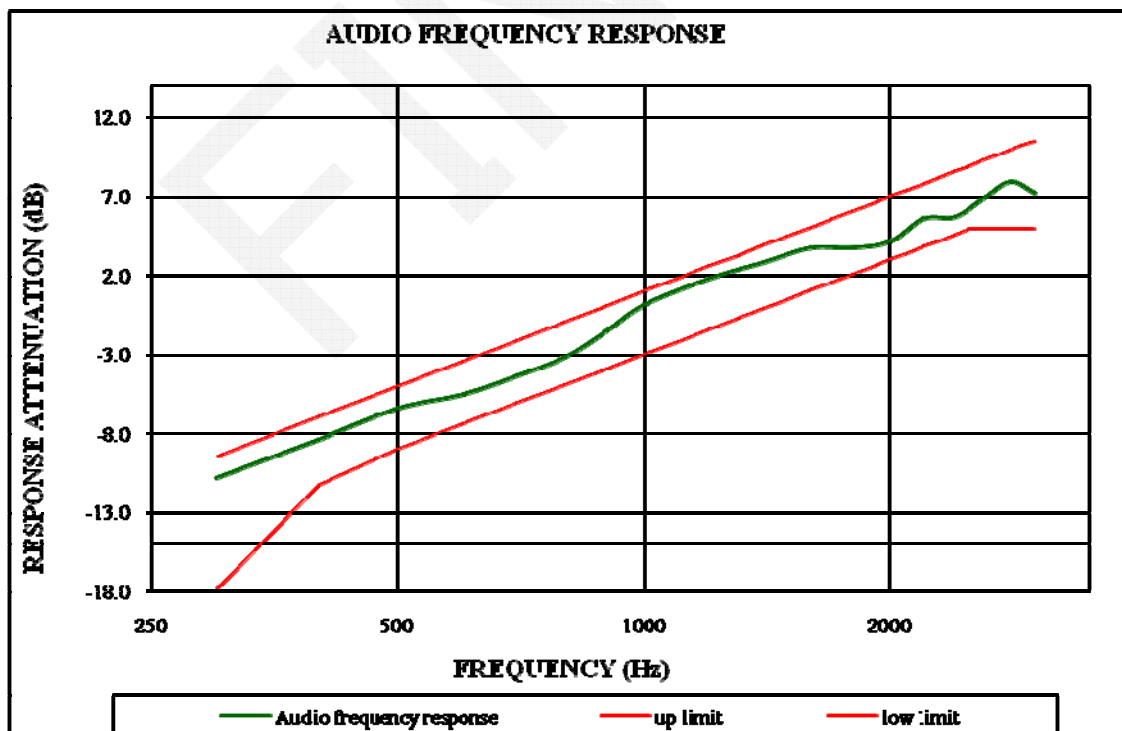

**Audio Frequency Low Pass Filter Response**

Carrier Frequency: 155 MHz, Channel Separation = 12.5 kHz

Audio Frequency	Response Attenuation	Limit
kHz	dB	dB
3.0	-1.2	0.0
3.5	-11.2	-6.7
4.0	-18.6	-12.5
5.0	-29.8	-22.2
7.0	-49.6	-36.8
10.0	-62.3	-52.3
15.0	-77.2	-69.9
20.0	-84.5	-82.5
30.0	-84.5	-82.5
50.0	-84.5	-82.5
70.0	-84.5	-82.5

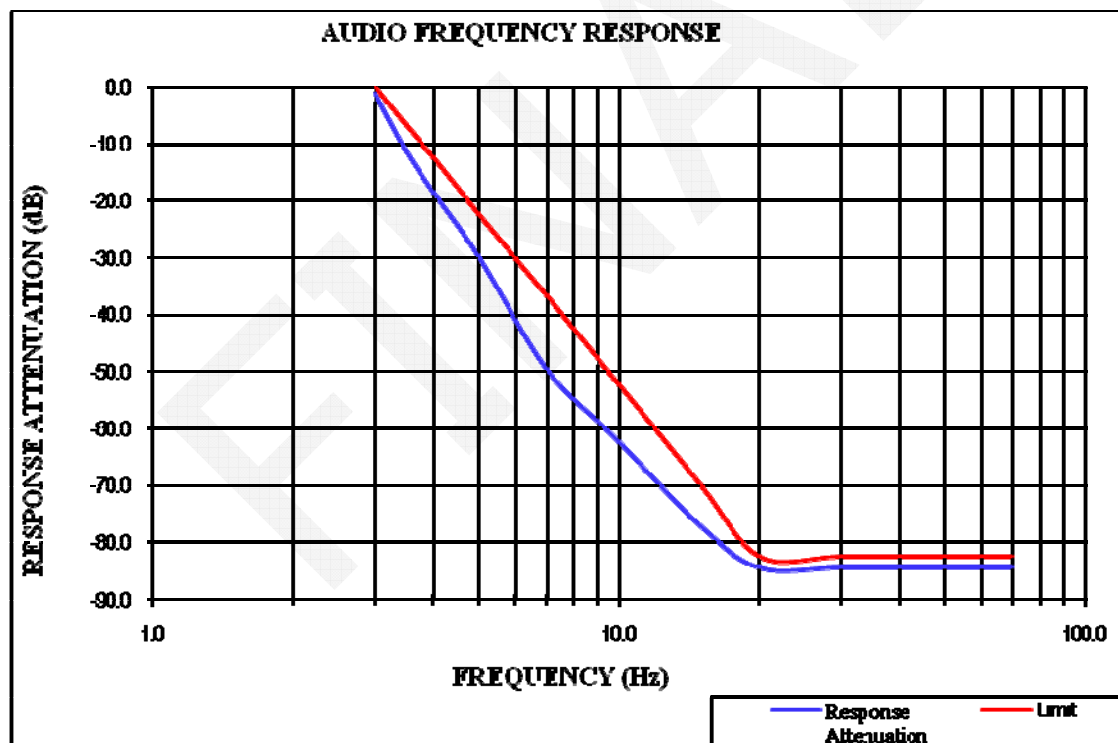

## FCC §2.1049 & §22.357 & § 22.731 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK

### Applicable Standard

FCC §2.1049, §22.357, § 22.731, §90.209 and §90.210

Applicable Emission Masks		
Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
Below 25	A or B	A or C
25-50	B	C
72-76	B	C
150-174	B, D, or E	C, D or E
150 paging only	B	C
220-222	F	F
421-512	B, D, or E	C, D, or E
450 paging only	B	G
806-809/851-854	B	H
809-824/854-869	B	G
896-901/935-940	I	J
902-928	K	K
929-930	B	G
4940-4990 MHz	L or M	L or M
5850-5925		
All other bands	B	C

**Emission Mask D**—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27(f_d - 2.88 \text{ kHz})$  dB.

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log (P)$  dB or 70 dB, whichever is the lesser attenuation.

(4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

#### §22.357 Emission types.

Any authorized station in the Public Mobile Services may transmit emissions of any type(s) that comply with the applicable emission rule, i.e. §22.359, §22.861 or §22.917

#### §22.731 Emission limitations.

Upon application for multichannel operation, the FCC may authorize emission bandwidths wider than those specified in §22.357, provided that spectrum utilization is equal to or better than that achieved by single channel operation.

### Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	RF Communications Test Set	8920A	00 235	2014-05-09	2015-05-08
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	28.4°C
<b>Relative Humidity:</b>	57 %
<b>ATM Pressure:</b>	99.7 kPa

*The testing was performed by Dean Liu on 2014-08-10.*

*Test Mode: Transmitting*



*Test Result: Compliant. Please refer to the following tables and plots.*



*FCC Part 90:*



Modulation Mode	Channel Separation	$f_c$	99% Occupied Bandwidth	26 dB Bandwidth	Power Level
	kHz		kHz	kHz	
FM	12.5	155	9.92	10.31	High
4FSK			7.41	9.90	
FM			9.91	10.30	Low
4FSK			7.41	9.90	

*FCC Part 22:*



Modulation Mode	Channel Separation	$f_c$	99% Occupied Bandwidth	26 dB Bandwidth	Power Level
	kHz		kHz	kHz	
FM	12.5	161.65	9.92	10.30	High
4FSK			7.41	10.00	
FM			9.92	10.30	Low
4FSK			7.41	10.01	

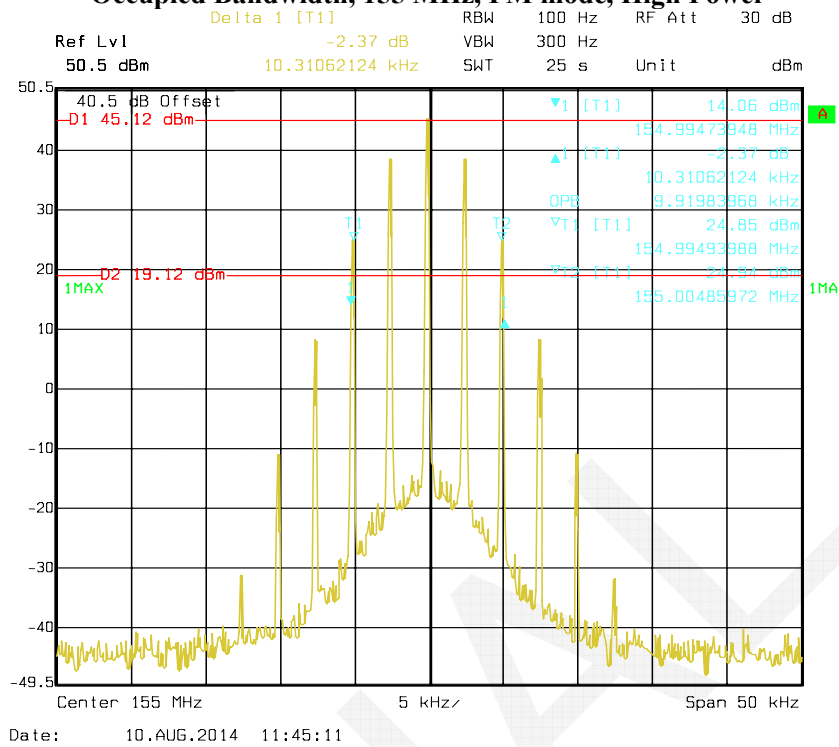
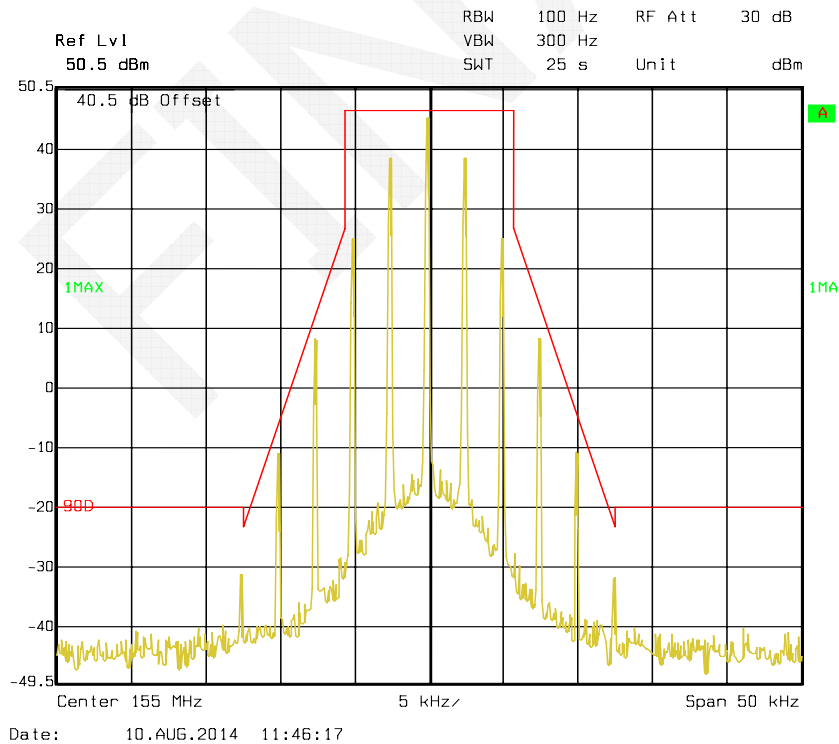
**FCC Part 90  
Occupied Bandwidth, 155 MHz, FM mode, High Power****Emission Mask- Channel – Type D, High Power**

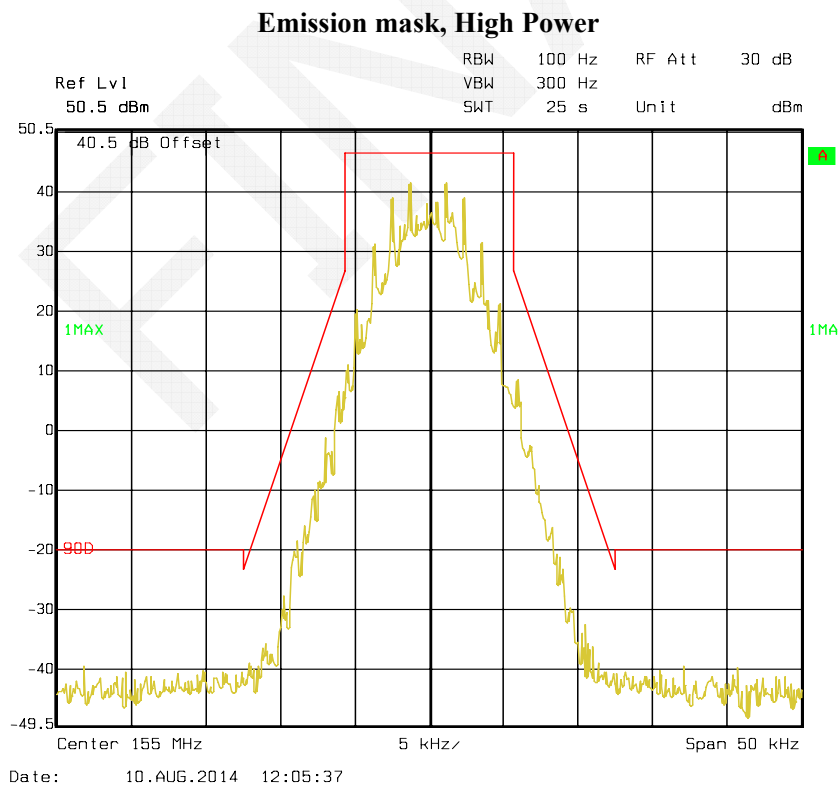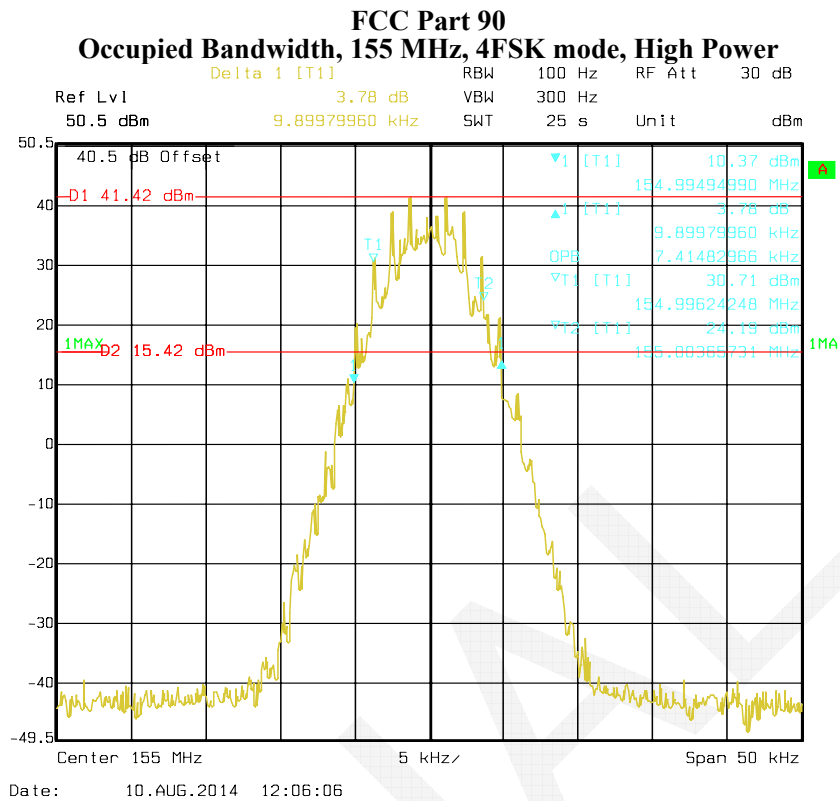

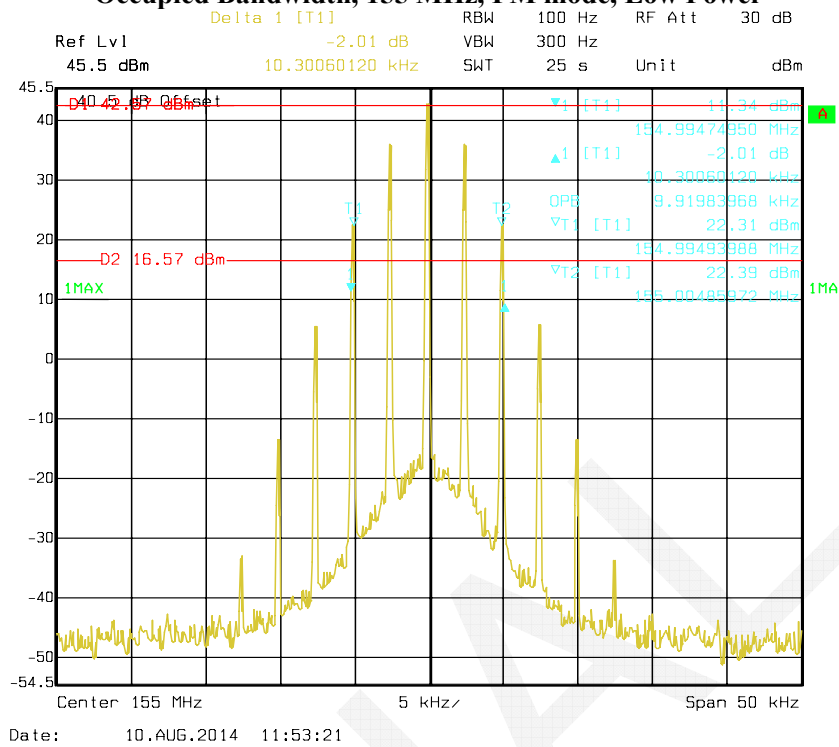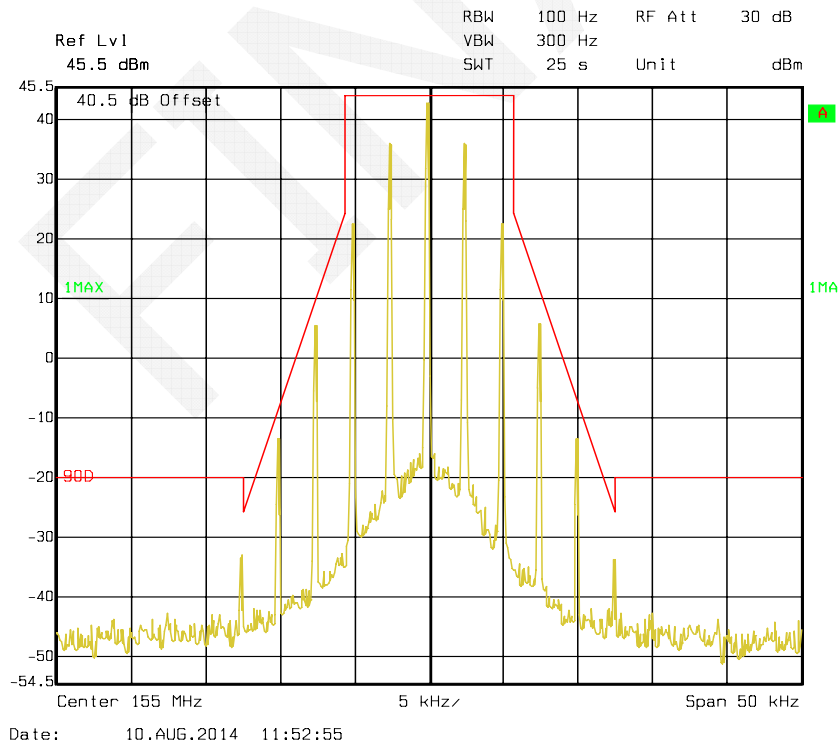**FCC Part 90  
Occupied Bandwidth, 155 MHz, FM mode, Low Power****Emission Mask- Channel – Type D, Low Power**

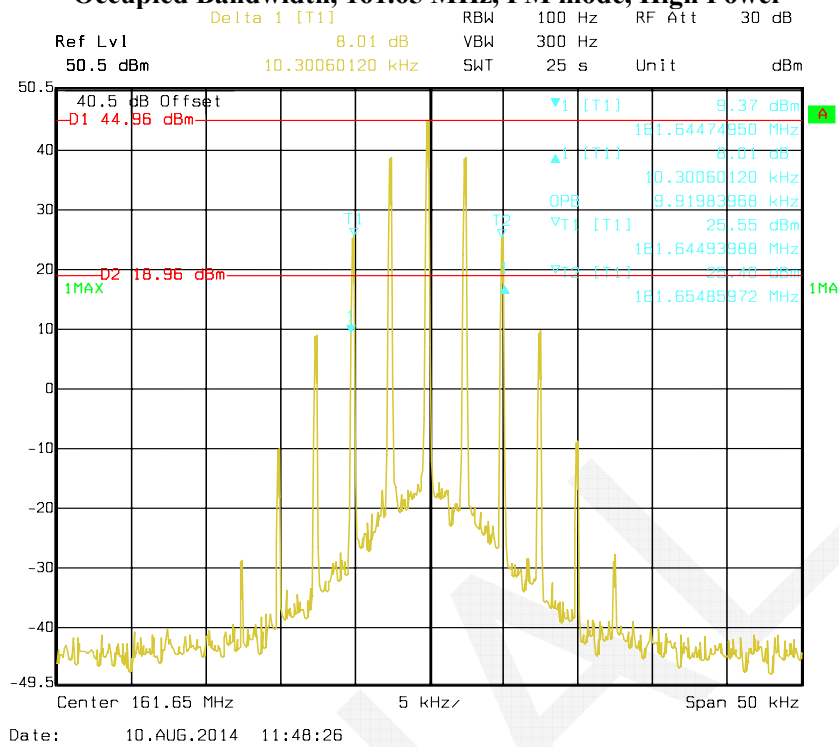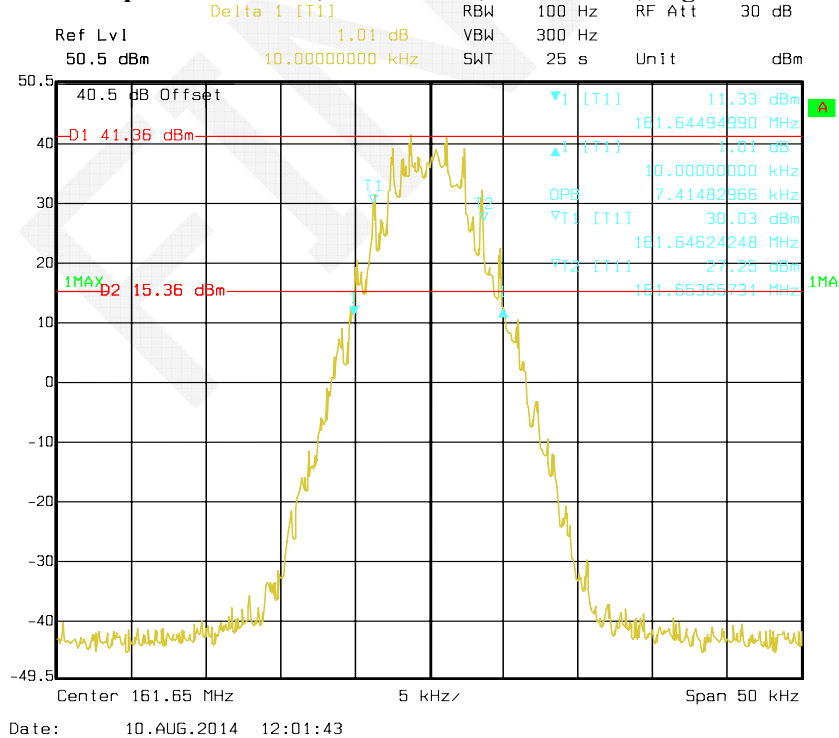

**FCC Part 22  
Occupied Bandwidth, 161.65 MHz, FM mode, High Power****FCC Part 22  
Occupied Bandwidth, 161.65 MHz, 4FSK mode, High Power**

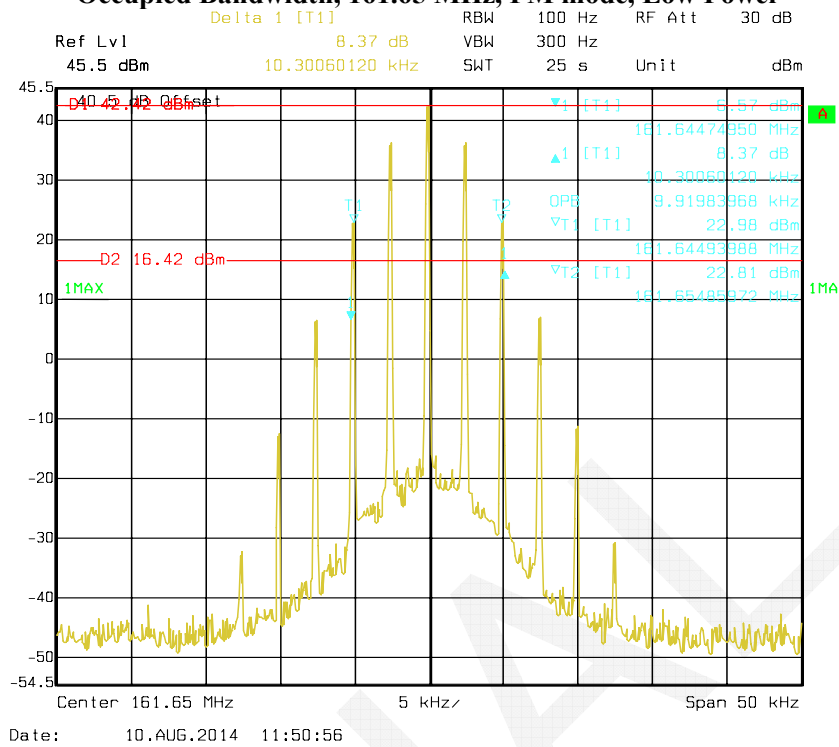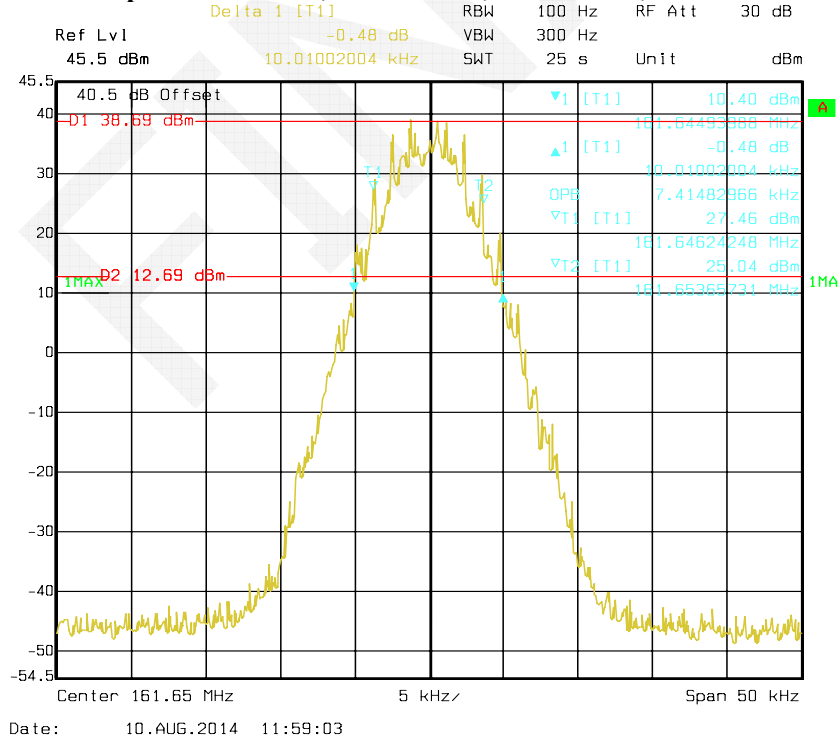**FCC Part 22  
Occupied Bandwidth, 161.65 MHz, FM mode, Low Power****FCC Part 22  
Occupied Bandwidth, 161.65 MHz, 4FSK mode, Low Power**

## FCC §2.1051 & §22.861 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### Applicable Standard

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27(f_d - 2.88 \text{ kHz})$  dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log (P)$  dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

§22.861 Emission limitations.

- (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Procedure

Spectrum analyzer settings:

- 1) Resolution Bandwidth = 100 kHz for spurious emissions below 1 GHz, and 1 MHz for spurious emissions above 1 GHz.
- 2) Video Bandwidth  $\geq 3$  times the resolution bandwidth.
- 3) Sweep Speed  $\leq 2000$  Hz per second.
- 4) Detector Mode = mean or average power.

## Test Data


### Environmental Conditions

<b>Temperature:</b>	28.4°C
<b>Relative Humidity:</b>	57 %
<b>ATM Pressure:</b>	99.7 kPa


*The testing was performed by Dean Liu on 2014-08-10.*

Please refer to the following plots.



# FCC Part 90 155MHz –FM mode, High Power

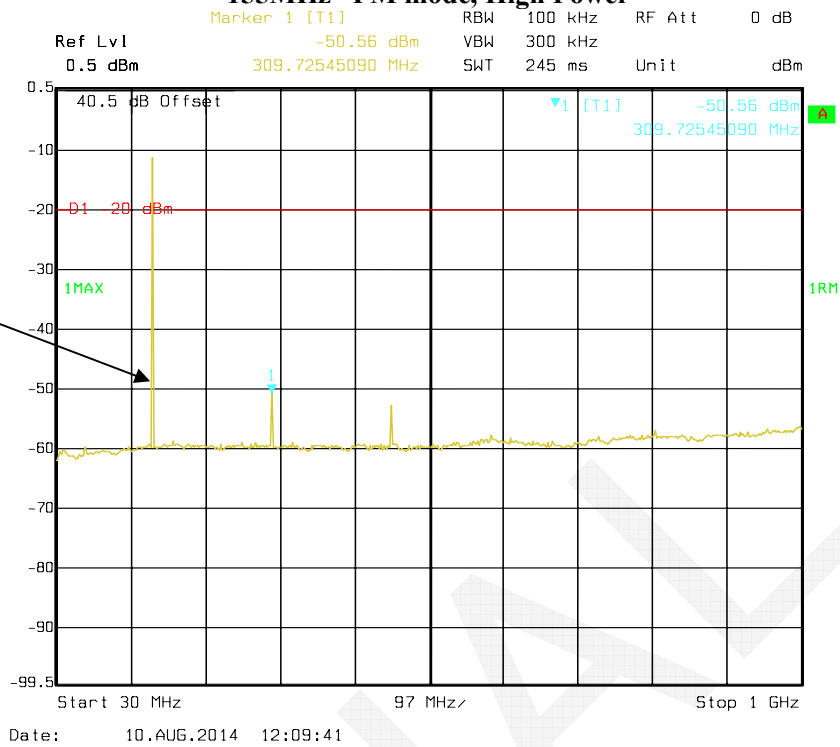



Fundamental test with Band Reject Filter

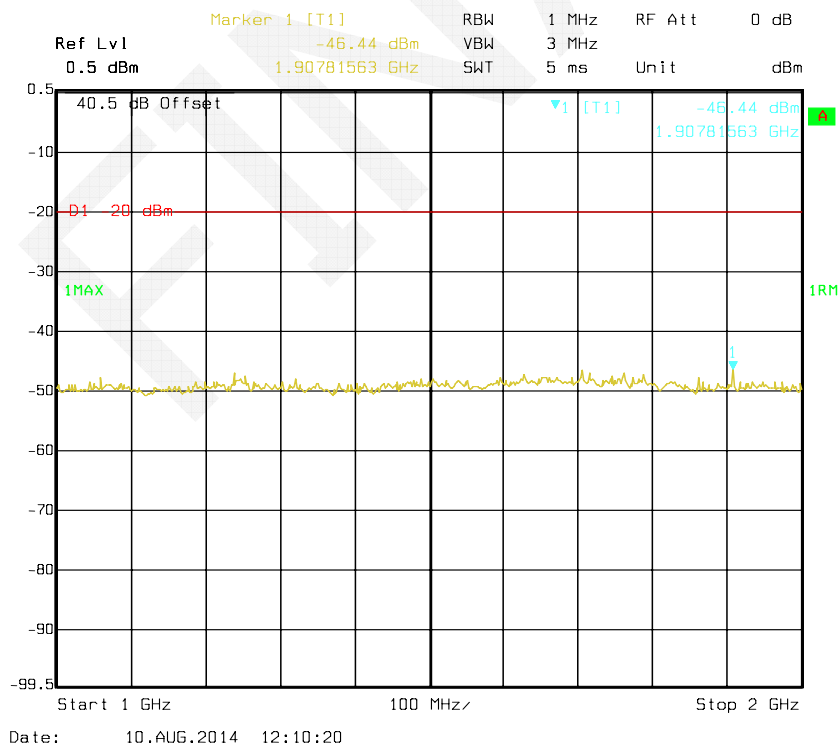



# FCC Part 22 161.65MHz – FM mode, High Power

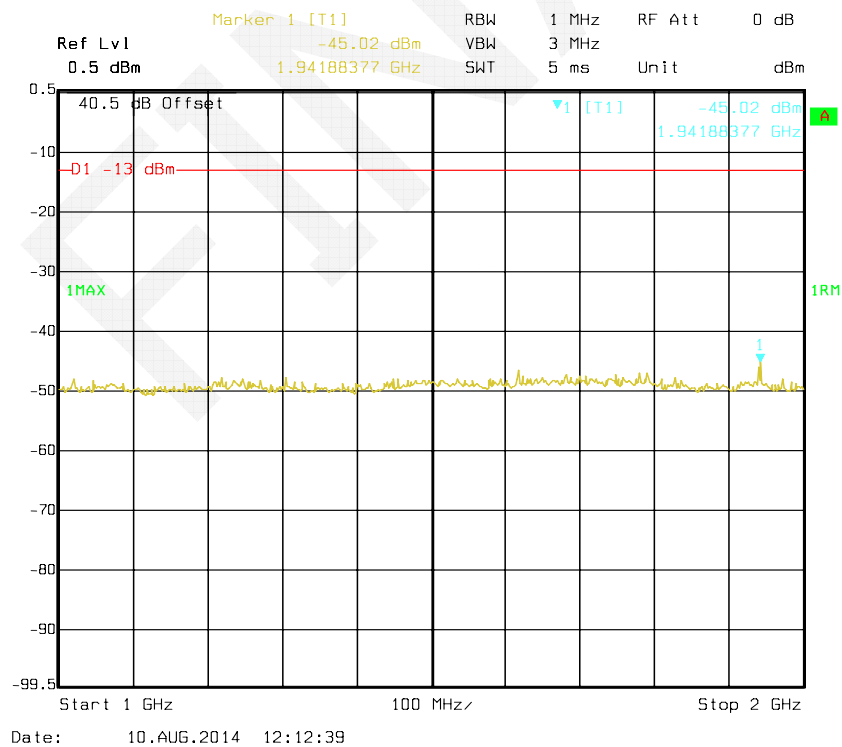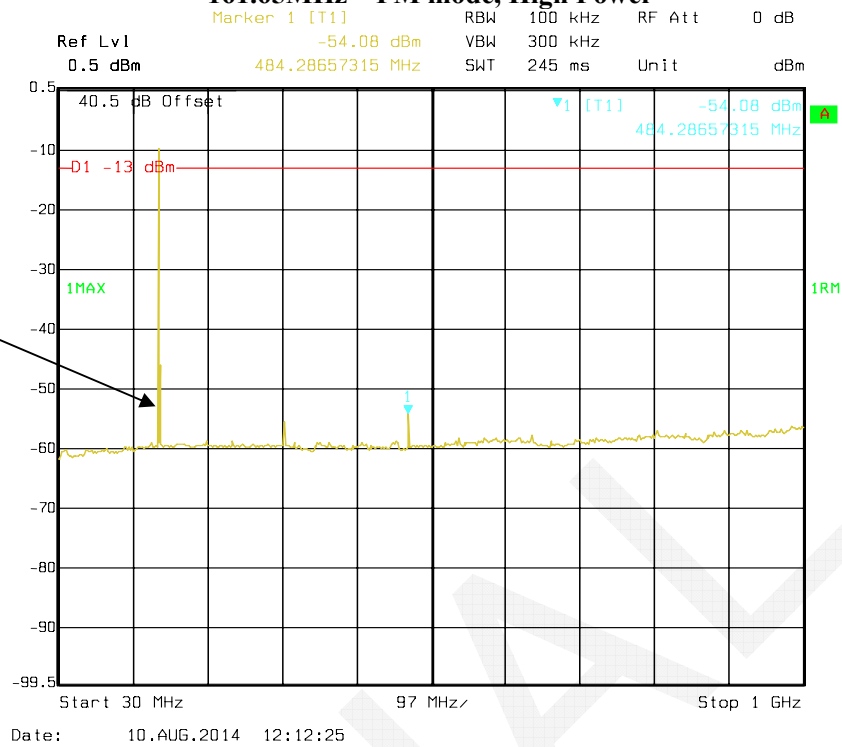

# FCC Part 90 155 MHz – 4FSK mode, High Power

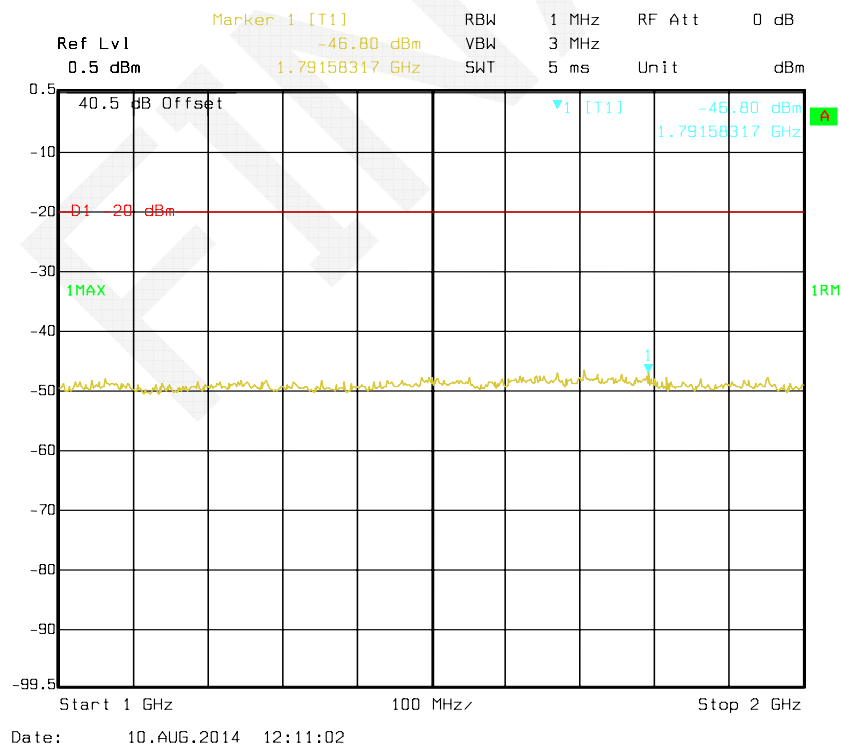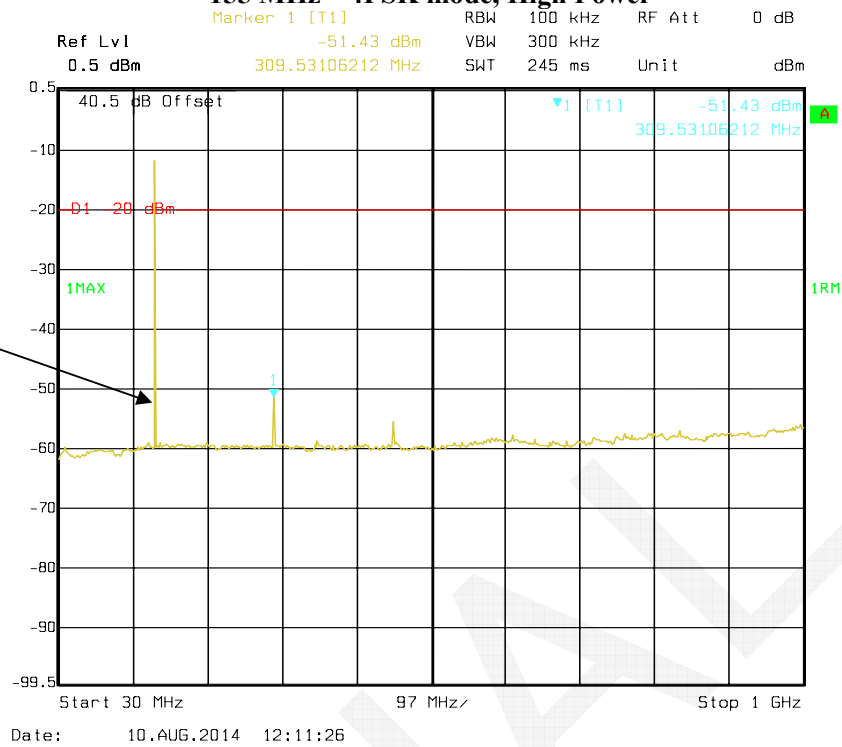

**FCC Part 22  
161.65 MHz – 4FSK mode, High Power**

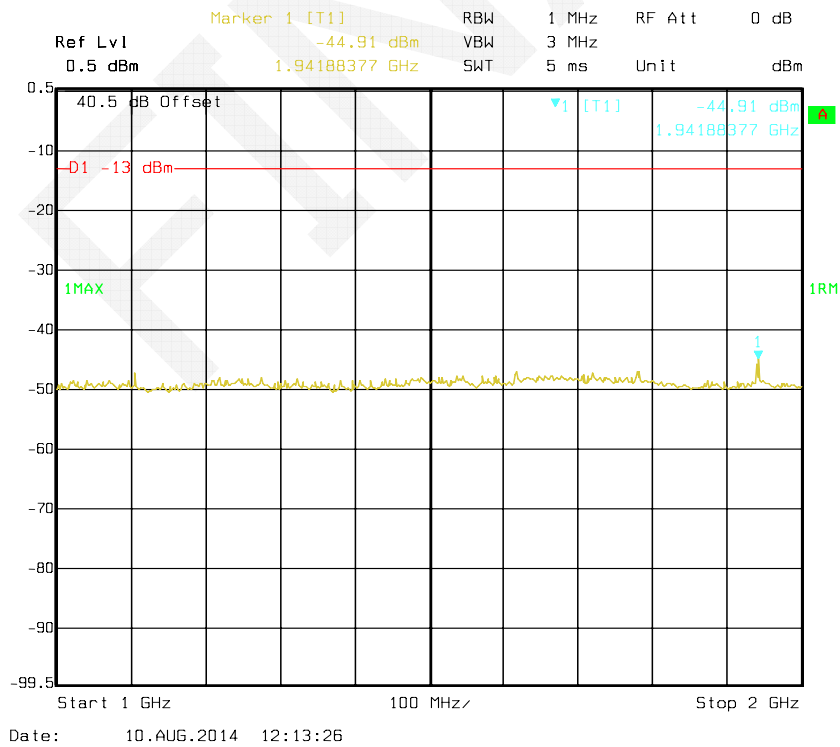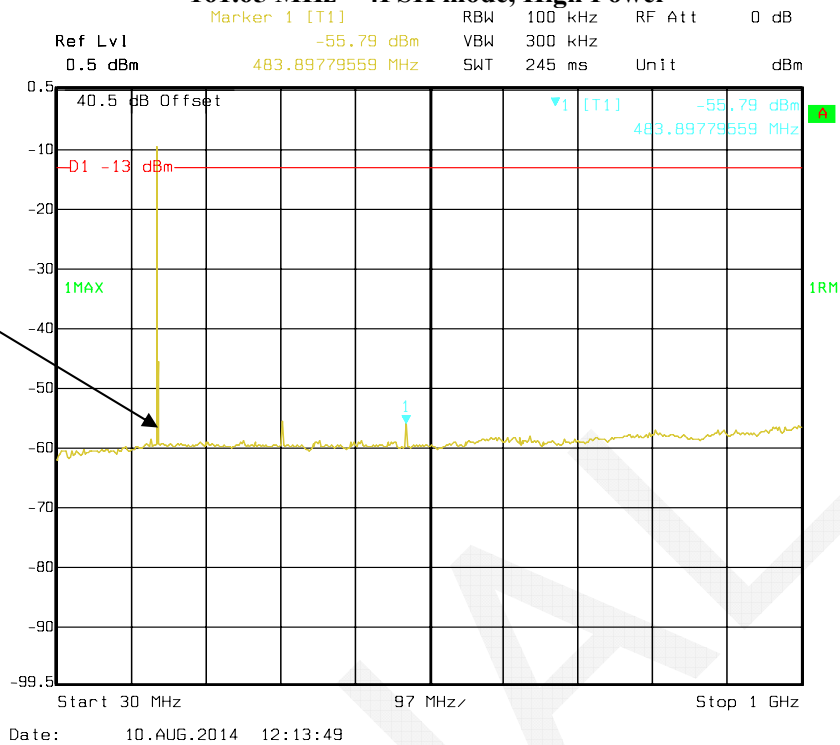

## FCC §2.1053 & §22.861 & §90.210 - RADIATED SPURIOUS EMISSIONS

### Applicable Standard

FCC §2.1053 and §22.861 and §90.210

### Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	Signal Generator	8648A	3426A00831	2013-11-06	2014-11-06
Sunol Sciences	Antenna	JB3	A060611-1	2011-09-06	2014-09-05
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
HP	Amplifier	8447E	2434A02181	2013-09-06	2014-09-06
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Agilent	Signal Generator	E8247C	MY43321350	2012-10-15	2014-10-15
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-19
TDK RF	Horn Antenna	HRN-0118	130 084	2012-09-06	2015-09-06
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

For part 90:

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 50 + 10 Log<sub>10</sub> (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

For part 22:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	28.4°C
<b>Relative Humidity:</b>	57 %
<b>ATM Pressure:</b>	99.7 kPa

The testing was performed by Dean Liu on 2014-08-11.

FM Modulation mode (worst case):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
operation frequency: 155 MHz; FCC part 90								
310.000	H	30.12	-54.5	0.0	0.5	-55.0	-20.0	35.0
310.000	V	30.38	-52.5	0.0	0.5	-53.0	-20.0	33.0
465.000	H	31.26	-50	0.0	0.7	-50.7	-20.0	30.7
465.000	V	30.45	-47.9	0.0	0.7	-48.6	-20.0	28.6
1085.000	H	23.15	-49.6	7.5	1.1	-43.2	-20.0	23.2
1085.000	V	23.07	-50.3	7.5	1.1	-43.9	-20.0	23.9
operation frequency:161.65 MHz; FCC part 22								
323.300	H	31.26	-53.1	0.0	0.5	-53.6	-13.0	40.6
323.300	V	30.58	-51.9	0.0	0.5	-52.4	-13.0	39.4
484.950	H	30.88	-49.9	0.0	0.7	-50.6	-13.0	37.6
484.950	V	30.54	-47.1	0.0	0.7	-47.8	-13.0	34.8
1131.550	H	22.97	-49.9	7.4	1.1	-43.6	-13.0	30.6
1131.550	V	23.27	-49.9	7.4	1.1	-43.6	-13.0	30.6

4FSK Modulation mode (worst case):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
operation frequency: 155 MHz; FCC part 90								
310.000	H	30.24	-54.4	0.0	0.5	-54.9	-20.0	34.9
310.000	V	30.37	-52.5	0.0	0.5	-53.0	-20.0	33.0
465.000	H	31.23	-50	0.0	0.7	-50.7	-20.0	30.7
465.000	V	30.46	-47.8	0.0	0.7	-48.5	-20.0	28.5
1085.000	H	23.25	-49.5	7.5	1.1	-43.1	-20.0	23.1
1085.000	V	22.92	-50.4	7.5	1.1	-44.0	-20.0	24.0
operation frequency:161.65 MHz; FCC part 22								
323.300	H	31.17	-53.2	0.0	0.5	-53.7	-13.0	40.7
323.300	V	30.72	-51.8	0.0	0.5	-52.3	-13.0	39.3
484.950	H	31.06	-49.7	0.0	0.7	-50.4	-13.0	37.4
484.950	V	30.62	-47.1	0.0	0.7	-47.8	-13.0	34.8
1131.550	H	23.02	-49.9	7.4	1.1	-43.6	-13.0	30.6
1131.550	V	23.14	-50.1	7.4	1.1	-43.8	-13.0	30.8

**Note:**

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = SG Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

**FCC §2.1055 & § 22.355 & §90.213- FREQUENCY STABILITY****Applicable Standard**

FCC §2.1055, § 22.355, §90.213

**Test Equipment List and Details**

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-3	2014-08-01	2015-08-01
UNI-T	Multimeter	UT39A	M130199938	2014-04-10	2015-04-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Procedure**

Frequency Stability vs. Temperature: The equipment under test was connected to DC or AC power supply and the RF output were connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The power leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

**Test Data****Environmental Conditions**

Temperature:	30.3 °C
Relative Humidity:	64 %
ATM Pressure:	99.7 kPa

*The testing was performed by Dean Liu on 2014-08-11.*

*Test Mode: Transmitting*

FCC Part 90:

Reference Frequency: 155MHz, Limit: 2.5 ppm			
Temperature	Voltage	Reading	Frequency Error
°C	V <sub>AC</sub>	MHz	ppm
-30	120	154.999858	-0.92
-20	120	154.999872	-0.83
-10	120	154.999897	-0.66
0	120	154.999849	-0.97
10	120	154.999884	-0.75
20	120	154.999899	-0.65
30	120	154.999868	-0.85
40	120	154.999847	-0.99
50	120	154.999868	-0.85
25	102	154.999904	-0.62
25	138	154.999847	-0.99

Reference Frequency: 155 MHz, Limit: 2.5 ppm			
Temperature	Voltage	Reading	Frequency Error
°C	V <sub>DC</sub>	MHz	ppm
-30	13.6	154.999852	-0.95
-20	13.6	154.999878	-0.79
-10	13.6	154.999862	-0.89
0	13.6	154.999883	-0.75
10	13.6	154.999875	-0.81
20	13.6	154.999884	-0.75
30	13.6	154.999881	-0.77
40	13.6	154.999868	-0.85
50	13.6	154.999873	-0.82
25	10.8	154.999872	-0.83
25	15.6	154.999879	-0.78

Note: The EUT is a base station

FCC Part 22:

Reference Frequency: 161.65 MHz, Limit: 5.0 ppm			
Temperature	Voltage	Reading	Frequency Error
°C	V <sub>AC</sub>	MHz	ppm
-30	120	161.649863	-0.85
-20	120	161.649857	-0.88
-10	120	161.649861	-0.86
0	120	161.649878	-0.75
10	120	161.649864	-0.84
20	120	161.649872	-0.79
30	120	161.649858	-0.88
40	120	161.649874	-0.78
50	120	161.649857	-0.88
25	102	161.649871	-0.80
25	138	161.649883	-0.72

Reference Frequency: 161.65 MHz, Limit: 5.0 ppm			
Temperature	Voltage	Reading	Frequency Error
°C	V <sub>DC</sub>	MHz	ppm
-30	13.6	161.649887	-0.70
-20	13.6	161.649875	-0.77
-10	13.6	161.649882	-0.73
0	13.6	161.649888	-0.69
10	13.6	161.649895	-0.65
20	13.6	161.649894	-0.66
30	13.6	161.649892	-0.67
40	13.6	161.649886	-0.71
50	13.6	161.649875	-0.77
25	10.8	161.649881	-0.74
25	15.6	161.649878	-0.75

Note: The EUT is a base station

## FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR

### Applicable Standard

Regulations: FCC §90.214

Test method: ANSI/TIA-603-D 2010, section 2.2.19.3


### Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-09
HP	Signal Generator	8648A	3426A00831	2013-11-06	2014-11-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

- Connect the EUT and test equipment as shown on the following block diagram.
- Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at  $\pm 12.5$  kHz deviation and set its output level to -100dBm.
- Turn on the transmitter.
- Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as  $P_0$ .
- Turn off the transmitter.
- Adjust the RF level of the signal generator to provide RF power equal to  $P_0$ . This signal generator RF level shall be maintained throughout the rest of the measurement.
- Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at  $\pm 4$  divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be  $t_{on}$ . The trace should be maintained within the allowed divisions during the period  $t_1$  and  $t_2$ .
- Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period  $t_3$ .

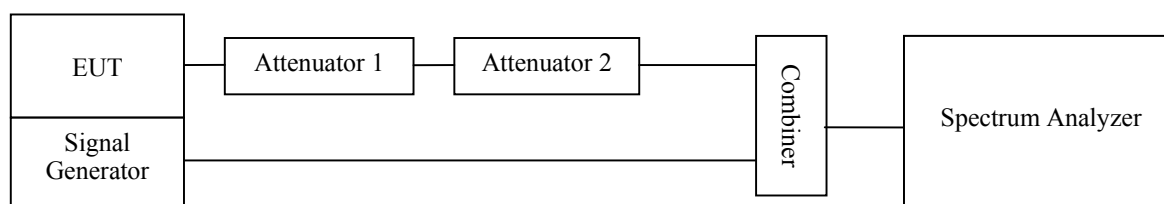

**Test Data****Environmental Conditions**

<b>Temperature:</b>	28.4°C
<b>Relative Humidity:</b>	57 %
<b>ATM Pressure:</b>	99.7 kPa


*The testing was performed by Dean Liu on 2014-08-10.*

<b>Channel Separation (kHz)</b>	<b>Transient Period (ms)</b>	<b>Maximum frequency difference</b>	<b>Result</b>
12.5	$<5(t_1)$	$\pm 12.5$ kHz	Pass
	$<20(t_2)$	$\pm 6.25$ kHz	
	$<5(t_3)$	$\pm 12.5$ kHz	

Please refer to the following plots.


# High Power:

## 155 MHz – Turn on

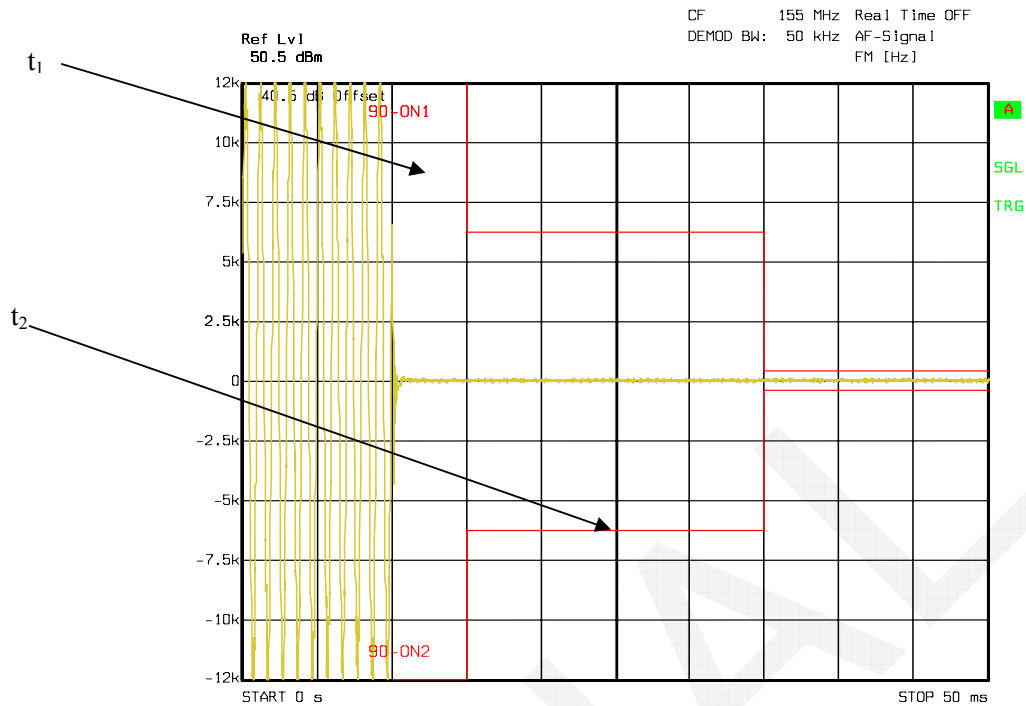

Date: 10.AUG.2014 12:26:12


## 155 MHz – Turn off

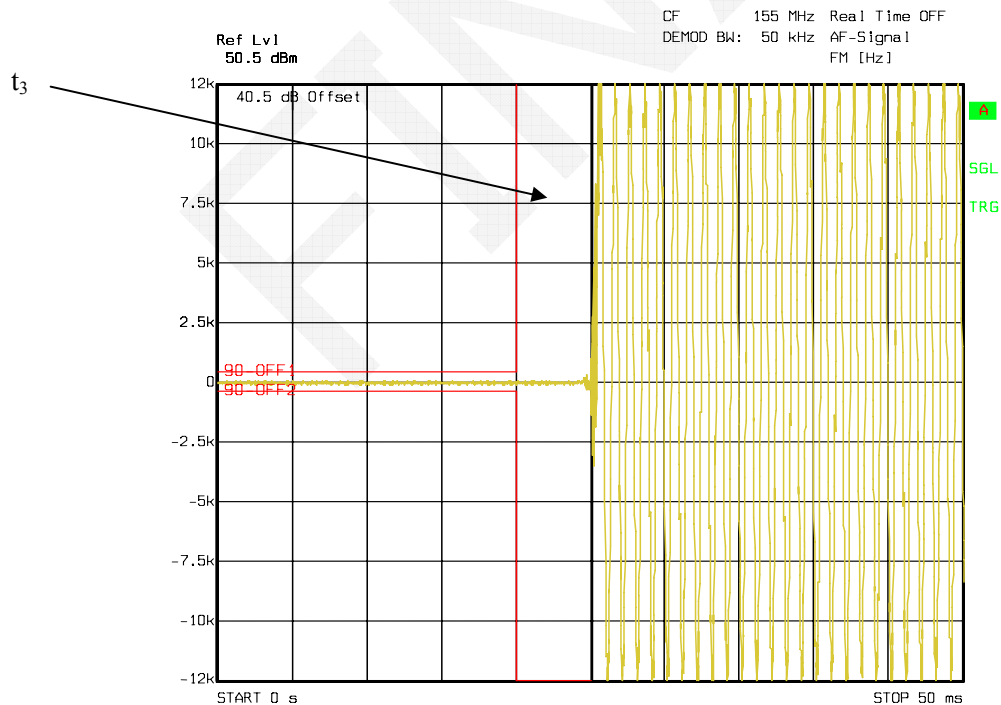


Date: 10.AUG.2014 12:29:50

**Low Power:**

**155 MHz – Turn on**

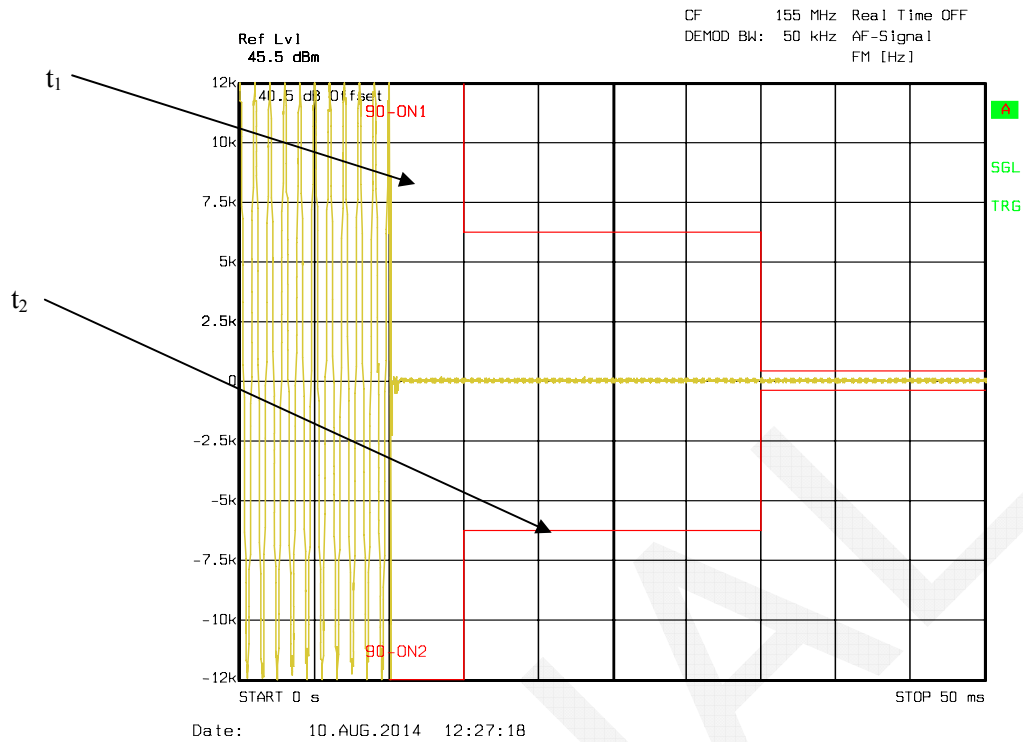

**155 MHz – Turn off**

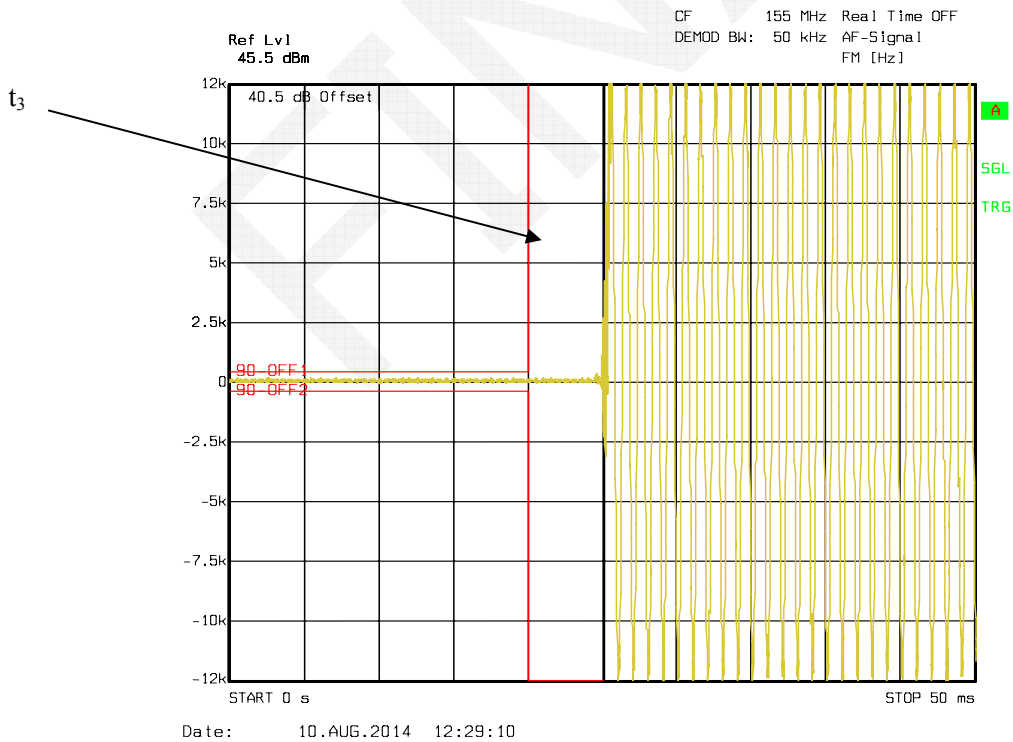

\*\*\*\*\* END OF REPORT \*\*\*\*\*