


## Appendix C. Radiated Emission Co-location Report

## 1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	2.4GHz + 5GHz

### Horizontal

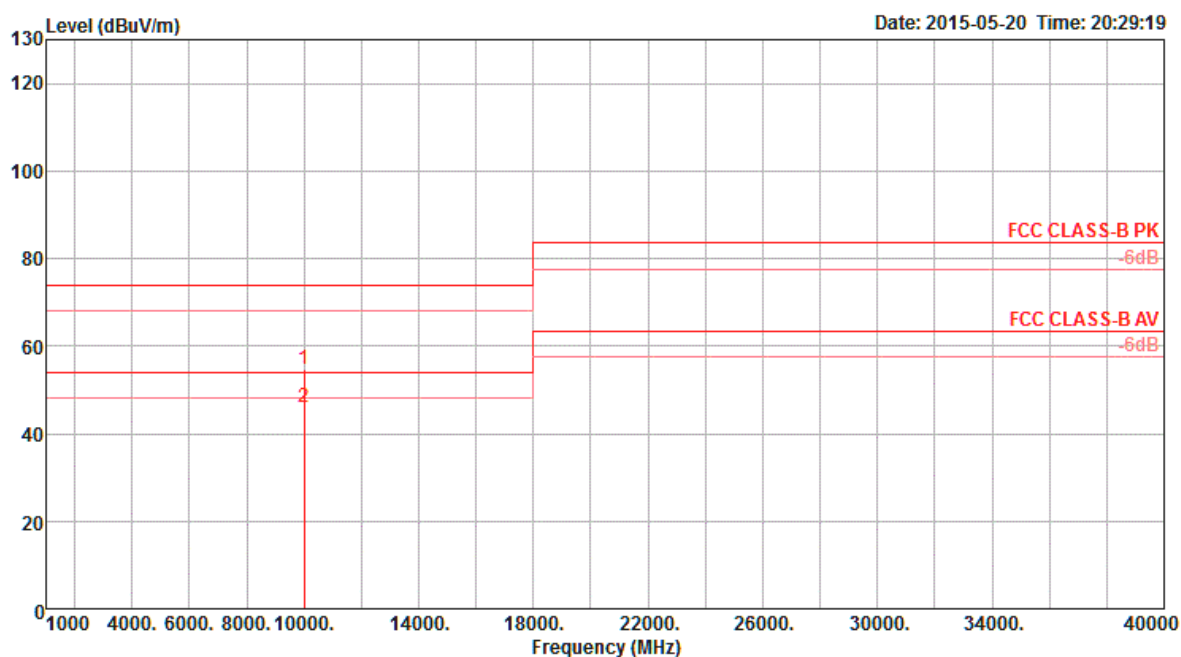

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	9999.79	54.66	74.00	-19.34	45.96	6.05	38.10	35.45	61	106	Peak	HORIZONTAL
2	9999.93	45.84	54.00	-8.16	37.14	6.05	38.10	35.45	61	106	Average	HORIZONTAL

## Vertical

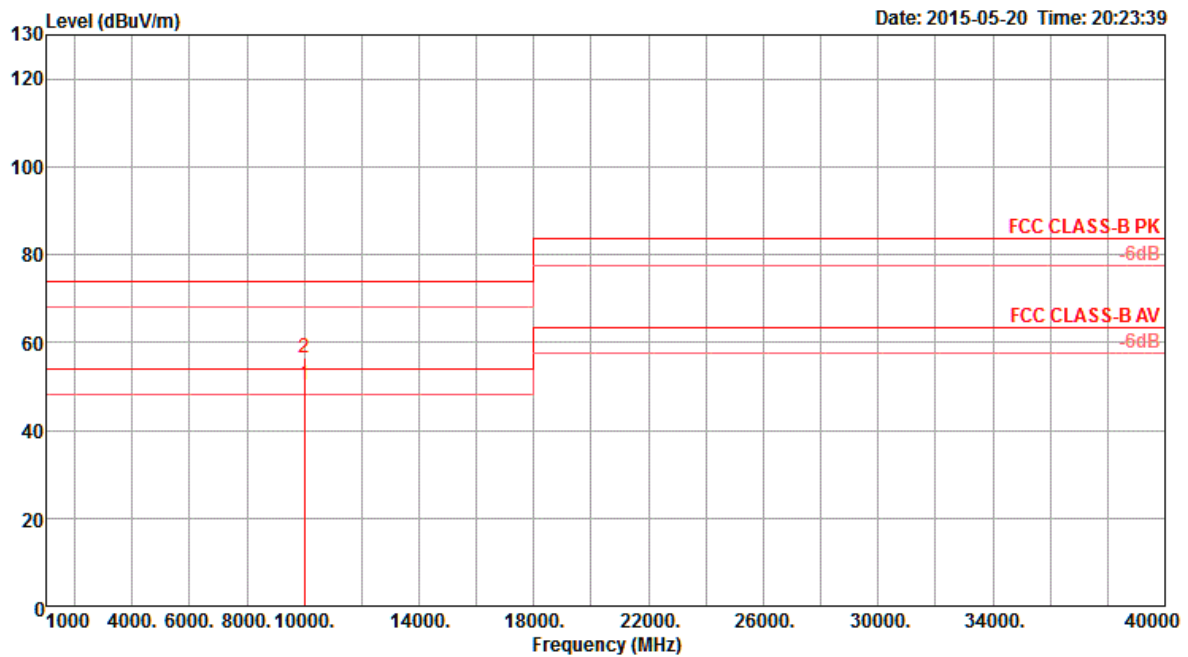

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	9999.90	50.35	54.00	-3.65	41.65	6.05	38.10	35.45	0	105 Average	VERTICAL
2	9999.95	56.60	74.00	-17.40	47.90	6.05	38.10	35.45	0	105 Peak	VERTICAL