



Test report issued under the responsibility of:
EMITECH MONTPELLIER laboratory
MRA US-EU Designation Number: FR0006
Canadian CAB Identifier: FR0003

RADIO TEST REPORT

FCC 47 CFR PART 15.247
RSS-247_Issue 2, February 2017

Company : **XPLORER**
Address..... : 40 chemin du Moulin
31320 MERVILLA
FRANCE

Test item description. : **Wireless metal detection sensor**
Trade Mark. : FMF
Manufacturer..... : XPLORER
Model/Type reference..... : XPMF / FMF22
FCC ID..... : XFJMF
IC : 8392A-MF
Ratings..... : 3.45Vdc to 4.2Vdc

Testing Laboratory : **EMITECH MONTPELLIER laboratory**
Address..... : 145 rue de Massacan
34740 VENDARGUES
FRANCE

Report Reference No. : **RR410-20-101751-11A**
Test procedure. : FCC IC Certification
Diffusion..... : Mr LOUBET
Applicant's name. : XPLORER
Date of issue..... : October 21, 2021
Total number of pages..... : 120
Revision..... : 0
Modified page(s)..... : Creation
Compiled by..... : Alexis TOUZET
Approved by (+ signature)..... : Olivier HEYER (Laboratory Manager)

*Duplication of this test report is only permitted for an integral photographic facsimile. It includes the number of pages referenced here above.
This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of
the whole manufactured products of the tested sample.*

REPORT INDEX:

1. GENERAL INFORMATIONS	3
2. REFERENCE DOCUMENT(S)	4
3. EQUIPMENT TECHNICAL DESCRIPTION	5
3.1. TEST CONDITIONS	5
3.2. EUT MARKING PLATE	5
3.3. EUT GENERAL VIEW	6
3.4. EUT MECHANICAL AND ELECTRICAL DESIGN	6
3.5. EUT INPUT/OUTPUT PORTS	7
3.6. SUPPORTING EQUIPMENT USED DURING TEST	7
3.7. EUT RADIO SPECIFICATIONS	9
4. OPINION(S) AND INTERPRETATION(S)	10
5. RESULT SUMMARY	11
6. MEASUREMENT UNCERTAINTY	14
7. RF EXPOSURE	15
8. TEST CONDITIONS AND RESULTS	15
8.1. CONDUCTED EMISSION (MEASUREMENT)	15
8.2. 6dB BANDWIDTH	23
8.3. OCCUPIED BANDWIDTH	28
8.4. MAXIMUM EFFECTIVE ISOTROPIC RADIATED POWER	33
8.5. BAND-EDGE COMPLIANCE	39
8.6. POWER SPECTRAL DENSITY	45
8.7. TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES <30MHZ	54
8.8. TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHZ	77
8.9. RADIATED SPURIOUS EMISSIONS (RECEIVER)	101
8.10. FREQUENCY ERROR	118

REVISION HISTORY:

Revision	Date	Modified pages	Modifications
0	October 21, 2021	/	Creation

1. GENERAL INFORMATION

This document submits the results of Radio tests performed on the equipment **Wireless metal detection sensor Disk FMF 22cm** (denominated hereafter E.U.T.: equipment under test) according to document(s) listed in §2 of this test report.

TESTING PROCEDURE AND TESTING LOCATION:					
Testing Location : EMITECH MONTPELLIER laboratory Address : 145 rue de Massacan 34740 VENDARGUES FRANCE Test procedure : FCC IC Certification Tested by : Olivier AELBRECHT & Alexis TOUZET Test supervisor : Olivier AELBRECHT Date of receipt of test item : N/A Date (s) of performance of tests : From February the 15 th of 2021 to April the 30 th of 2021					
APPLICANT'S GENERAL INFORMATION:					
Company name : XPLOER Company address : 40 chemin du Moulin 31320 MERVILLA FRANCE Person(s) present during the tests : No representative for company attended the tests. Responsible : Mr LOUBET					
GENERAL REMARKS:					
The information in italics is declared by the manufacturer and is under his responsibility The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. "(see Enclosure #)" refers to additional information appended to the report. "(see appended table)" refers to a table appended to the report. Throughout this report the decimal separator is point.					
POSSIBLE TEST CASE VERDICTS:					
Test case does not apply to the test object .: N/A Test case not performed : N/P Test object does meet the requirement : P (Pass) Test object does not meet the requirement : F (Fail)					
DEFINITIONS AND ABBREVIATIONS:					
E.U.T.	Equipment under test	AE	Ancillary equipment	Pk	Peak detector
RBW	Resolution bandwidth	VBW	Video bandwidth	QP	Quasi-peak detector
OATS	Open area test site	FAR	Full anechoic room	Av	Average detector
VP	Vertical Polarization	HP	Horizontal Polarization	RMS	Root Mean Square
RF	Radio frequency	NTR	Nothing to report	N/C	Not communicated

2. REFERENCE DOCUMENT(S)

NORMATIVE REFERENCES:

The following referenced documents are necessary for the application of the present test report.

FCC 47 CFR PART 15: 2017

Code of federal regulations – Title 47 telecommunication
Part 15- Radio frequency devices

FCC part 15.247

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850MHz. (frequency hopping and digitally modulated)

RSS-247_Issue 2, February 2017

Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence Exempt Local Area Network (LE-LAN) Devices

RSS/CNR-Gen, Issue 5, April 2018, Amd1: 2019, Amd2: 2021

Exigences générales et information relatives à la certification du matériel de radiocommunication

ANSI C 63.10:2013

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

ANSI C 63.4:2014

American National Standard for Methods of measurement of Radio-Noise from low-voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

Although the product standard uses obsolete technical standards, the latest versions of standards achievable by the laboratory will be used for testing.

INFORMATIVE REFERENCES:

The following referenced documents are not necessary for the application of the present test report but they assist the user with regard to a particular subject area.

3. EQUIPMENT TECHNICAL DESCRIPTION

3.1. Test Conditions

Test item description. : Wireless metal detection sensor
Model/Type reference..... : XPMF / FMF22
Trade Mark. : FMF
FCC ID..... : XFJMF
IC. : 8392A-MF
Serial number (S/N)..... : 513046
Part number (P/N). : Not communicated
Software version..... : 20210126
Firmware version. : *Not communicated*
Type of sample. : Pre-serial
Function(s)..... : Wireless object detection sensor
Manufacturer name. : XPLOER
Address. : 8 rue du Développement - ZI de Vic
31320 CASTANET-TOLOSAN
FRANCE

General product information:

N/A

3.2. EUT Marking plate



3.3.EUT General view



3.4.EUT Mechanical and Electrical Design

Power supply	3.7Vdc
Power supply range.....	3.45Vdc to 4.2Vdc
Power type.....	Battery powered
Power (W).....	5
Nominal current (A).	1
Dimensions (L x W x H) (m).	0.225x0.225x0.04
Weight (kg).	0.323
Temperature range (°C).	-5°C to +40°C
Ground bounding strap.....	No

Comments:

N/A

3.5.EUT Input/Output ports



PORT	NAME	TYPE	LENGTH	CABLE TYPE	COMMENTS
0	Main frame	N/E	N/A	Plastic	
1	Battery	DC	N/A	N/A	
2	AC power source	AC/DC	1m	2P	
3	RF antenna	RF	N/A	N/A	2.4GHz
4	RF antenna	RF	N/A	N/A	Metal detector

AC/DC : AC/DC Converter port AC.....: Alternative current port DC.....: Discontinuous current port
I/O: Input or Output port TP: Telecommunication port RF: Radio frequency port
N/E: Non Electrical port

3.6.Supporting Equipment Used During Test

Sample subject to the tests was tested with following equipment.

PRODUCT TYPE	MANUFACTURER	MODEL	N°EMITECH / COMMENTS
Battery charger (AC/DC)	Sinohero Industrial Ltd.	SJ-0510-E	Used for conducted emission

BATTERY CHARGER (AC/DC) (AE)



3.7. EUT Radio Specifications

a) GENERAL INFORMATIONS	
According to manufacturer's declarations :	
EUT type.....	Transmitter
Technology	SRD (Metal and object detection sensors) SRD 2.4GHz
Environmental profile.....	Data transmissions
Temperature range.....	-5°C to +40°C
Antenna type	Integral
Antenna Gain.....	Not communicated
Comments:	
N/A	
b) TRANSMITTER PARAMETERS (Tx)	
Frequency bands.....	1kHz to 148.5kHz 2400 MHz to 2483.5MHz
RF Power.....	Not communicated
Number of channels / Separation.....	Multiple
Modulation type	GFSK
Duty cycle	Not communicated
Tested frequency.....	4.1kHz Low Channel 45.19kHz High Channel 2404MHz Low channel 2440MHz Mid channel 2476 High channel
c) RECEIVER PARAMETERS (Rx)	
Frequency bands.....	1kHz to 148.5kHz 2400 MHz to 2483.5MHz
Category/Class	N/A Category 2
Bandwidth	N/A 2404MHz to 2476MHz

4. OPINION(S) AND INTERPRETATION(S)

TEST(S) PERFORMED	DEVIATION(S) TO TEST METHOD(S)
FCC part 15.247 subclause d) and RSS-247	N/A
FCC part 15.247 and RSS-247	N/A
FCC part 15.109, 15.209, 15.205, 15.215, CNR-Gen	N/A
FCC part 15.109, 15.209, 15.205, 15.215, CNR-Gen	The EUT is encapsulated in a casing. We were not able to measure its voltage supply during radiated tests
FCC part 15.109, 15.209, 15.205, 15.215 RSS-247, CNR Gen	N/A
FCC part 15 Radio part 15.215 and RSS Gen	N/A
ANSI C63.4: 2014	N/A

Comments: N/A

5. RESULT SUMMARY

TEST DESIGNATION	SEVERITY	VERDICT	BASIC STANDARDS / COMMENTS
SUBPART A - GENERAL			
Labeling requirements		PASS	15.19 / See certification documents
Information to user		PASS	15.21 / See certification documents
Home-built devices		N/A	15.23
Kits		N/A	15.25
Special Accessories		PASS	15.27 / See certification documents
Inspection by the Commission		N/A	15.29
Measurement standards		PASS	15.31
Test procedure for CPU boards and computer power supplies		N/A	15.32
Frequency range of radiated measurements		PASS	15.33
Measurement detector functions and bandwidths		PASS	15.35
Transition provisions for compliance with the rules		PASS	15.37 / See certification documents
SUBPART B – UNINTENTIONAL RADIATORS			
Equipment authorization			15.101
- Verification		N/A	
- Declaration of Conformity		N/A	
CPU boards and power supplies used in personal computers		N/A	15.102
Exempted device		N/A	15.103
Information to the user		PASS	15.105 / See certification documents
Conducted limits	Class B	PASS	15.107
Radiated emission limits	Class B	PASS	15.109
Antenna power conduction limits for receivers		N/A	15.111
Power line carrier systems		N/A	15.113
TV interface devices, including cable system terminal devices		N/A	15.115
TV broadcast receivers		N/A	15.117
Cable ready consumer electronics equipment		N/A	15.118
Program blocking technology requirements for TV receivers		N/A	15.120
Scanning receivers and frequency converters used with scanning receivers		N/A	15.121
Labeling of digital cable ready products		N/A	15.123

TEST DESIGNATION	SEVERITY	VERDICT	BASIC STANDARDS / COMMENTS
SUBPART C –INTENTIONAL RADIATORS			
Equipment authorization requirement		PASS	15.201 / Transmitter part is subject to Certification procedure
Certified operating frequency range		N/A	15.202
Antenna requirement		PASS	15.203 / Dedicated and glued antenna
External radio frequency power amplifiers and antenna modifications		N/A	15.204
Restricted bands of operation		PASS	15.204
Conducted limits	Class B	PASS	15.207
Radiated emission limits; general requirements	Class B	PASS	15.209
Tunnel radio systems		N/A	15.211
Modular transmitters		N/A	15.212
Cable locating equipment		N/A	15.213
Cordless telephones		N/A	15.214
Additional provisions to the general radiated emission limits		PASS	15.215
Operation within the band 902-928MHz, 2400-2483.5MHz and 5725-5850MHz			15.247
- Frequency hopping and digitally modulated		-	a)
- Frequency hopping system		N/A	a) (1)
- Digital modulation system		PASS	a) (2)
- Maximum peak conducted output power		-	b)
- For hopping system in the 2400-2483.5 MHz and 5725-5850 MHz bands		N/A	b) (1)
- For hopping system in the 902-928MHz band		N/A	b) (2)
- For system using digital modulation in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands		PASS	b) (3)
- Operation with directional antenna gains > 6 dBi		N/A	c)
- Out-of-band emissions		PASS	d)
- Power spectral density conducted		PASS	e)
- Hybrid system		N/A	f)
- Frequency hopping additional requirements		N/A	g)
- Frequency hopping intelligence		N/A	h)
- RF exposure compliance		PASS	i)

Sample subject to the test complies with the requirements of the reference document(s) listed in §2 of this test report and, where applicable, with deviation(s) specified in this document.

To declare, or not, the compliance with the specifications, it was not explicitly taken account of uncertainty associated with the results.

Opinion(s) and interpretation(s): N/A

TEST(S) PERFORMED	MODIFICATION(S)
FCC part 15.247 subclause d) and RSS-247	N/A
FCC part 15.247 and RSS-247	N/A
FCC part 15.109, 15.209, 15.205, 15.215, CNR-Gen	N/A
FCC part 15.109, 15.209, 15.205, 15.215 RSS-247, CNR Gen	N/A
FCC part 15 Radio part 15.215 and RSS Gen	N/A
ANSI C63.4: 2014	N/A

6. MEASUREMENT UNCERTAINTY

PARAMETER	MAXIMAL EMITECH UNCERTAINTY	MINIMAL STANDARD UNCERTAINTY
Radio frequency	$\pm 1 \times 10^{-7}$	$\pm 1 \times 10^{-7}$
RF power, conducted		
RF power	$\pm 0.8\text{dB}$	$\pm 1 \text{ dB}$
RF power (EN 300328 / EN 301893)	$\pm 1.3\text{dB}$	$\pm 1.5 \text{ dB}$
Power spectral density	$\pm 2.3\text{dB}$	$\pm 3 \text{ dB}$
Occupied bandwidth		
RF power	$\pm 3.8 \%$	$\pm 5 \%$
RF power (EN 300328 / EN 301893)	$\pm 3.8 \%$	$\pm 5 \%$
Maximum frequency deviation		
300 Hz < audio frequency < 6 kHz	$\pm 1.2 \%$	$\pm 5 \%$
6 kHz < audio frequency < 25 kHz	$\pm 1.2 \%$	$\pm 3 \text{ dB}$
Adjacent channel power	$\pm 1.6 \text{ dB}$	$\pm 3 \text{ dB}$
Sensibility of receiver (conducted)	$\pm 2.0 \text{ dB}$	$\pm 3 \text{ dB}$
Blocking	$\pm 4.0 \text{ dB}$	$\pm 4 \text{ dB}$
Transient		
Amplitude	$\pm 8.5 \%$	$\pm 20 \%$
At the frequency	$\pm 166 \text{ Hz}$	$\pm 250 \text{ Hz}$
Conducted emission (spurious)		
$f \leq 1 \text{ GHz}$	$\pm 0.8 \text{ dB}$	$\pm 3 \text{ dB}$
1 GHz - 12.75 GHz	$\pm 1.6 \text{ dB}$	
Radiated emission (PAR / PIRE / RNE)		
$f \leq 62.5 \text{ MHz}$	$\pm 5.1 \text{ dB}$	$\pm 6 \text{ dB}$
62.5 MHz - 1 GHz	$\pm 5.1 \text{ dB}$	$\pm 6 \text{ dB}$
1 GHz - 18 GHz	$\pm 5.2 \text{ dB}$	$\pm 6 \text{ dB}$
18 GHz – 26 GHz	$\pm 5.1 \text{ dB}$	$\pm 6 \text{ dB}$
26 GHz – 40 GHz	$\pm 5.4 \text{ dB}$	$\pm 6 \text{ dB}$
180-1000 MHz / 1 – 12.75 GHz (EN 301 908-1)	$\pm 3.0 / 2.9 \text{ dB}$	$\pm 3 \text{ dB}$
RF power (EN 300328 / EN 301893)	$\pm 5.3 \text{ dB}$	$\pm 6 \text{ dB}$
PIRE and power spectral density with diode	$\pm 5.2 \text{ dB}$	$\pm 6 \text{ dB}$
Radiated emission (magnetic field)		
9kHz – 30MHz	$\pm 3 \text{ dB}$	$\pm 6 \text{ dB}$
RF level for a given BER	$\pm 0.8 \text{ dB}$	$\pm 1.5 \text{ dB}$
Supply voltages	$\pm 3 \%$	$\pm 3 \%$
Temperature	$\pm 1 \text{ }^{\circ}\text{C}$	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5 \%$	$\pm 5 \%$
Time / Duty cycle	$\pm 4.4 \%$	$\pm 5 \%$
Adaptivity	$\pm 2.9 \text{ dB}$	/
Conducted emission (FCC)		
(Artificial Mains Network) 150kHz – 30MHz	$\pm 3.4 \text{ dB}$	$\pm 3.4 \text{ dB}$
Radiated emission (electric field for FCC standard)		
9kHz – 30MHz	$\pm 2.7 \text{ dB}$	/
30MHz – 1GHz	$\pm 5.0 \text{ dB}$	/
1GHz – 18GHz	$\pm 5.6 \text{ dB}$	/
18GHz – 26GHz	$\pm 5.7 \text{ dB}$	/
26GHz – 40GHz	$\pm 5.7 \text{ dB}$	/

For the calculation of expanded uncertainty, the confidence interval is 95 % (k=2).

7. RF EXPOSURE

Maximum EIRP = 0.251dBm (1.78 mW) at 2404MHz

In accordance with KDB 447498 D01 General RF Exposure Guidance v06:

$PSD = EIRP / (4 * \pi * R^2) = 1.78 / (4 * \pi * (20 \text{ cm})^2) = 0.00035 \text{ mW/cm}^2$

Limit= 1 mW/cm²

8. TEST CONDITIONS AND RESULTS

8.1. Conducted emission (measurement)

Reference standard:	FCC part 15.107, 15.207 and RSS-Gen
Test method:	ANSI C63.4: 2014
General test setup: EUT is set on an insulating support at 80cm from the ground reference plane. All power was connected to the system through Artificial Mains Network (AMN). The AMN is placed at 80cm from the boundary of the EUT and bonded to a ground reference plane. All tested telecommunications lines (if applicable) were connected to an Asymmetric Artificial Network (AAN) and conducted voltage measurements on telecommunications lines were made at the output of the AAN. Where an AAN was not appropriate or available, measurements were made using a Capacitive Voltage Probe and/or a Current probe. Additional ground terminals (if any) are connected to earth terminal of the AMN.	

TESTED CABLE	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
120Vac/60Hz power supply / All channels	150kHz-30MHz	Class B	EMI5889	PASS
120Vac/60Hz power supply / Standby mode	150kHz-30MHz	Class B	EMI5891	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(s)
Relative Humidity	30 to 60 %	See Graph(s)
Atmospheric pressure	N/A	See Graph(s)
Test method deviation: N/A		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
AC power source	CHROMA	61603	12532	25/07/2019	25/09/2021
Cable	N	3m	16422	04/05/2019	04/07/2021
Cable	EMITECH	Current absorber sheath	9491	23/06/2020	23/08/2022
Cable	C&C	N-3m	14331	18/03/2021	18/05/2023
Ground plane	EMITECH	Test area	11569		
LISN	PMM	L2-16	1209	08/06/2020	08/08/2022
LISN	AFJ	LT32C\10	12007	11/01/2019	11/03/2021
Multimeter	FLUKE	8808A	12446	29/09/2020	29/11/2021
Receiver	Rohde & Schwarz	ESHS10	3371	27/04/2020	27/06/2021
Receiver	Rohde & Schwarz	FPL1003	16027	14/08/2020	14/10/2021
Software	Nexio		0000		
Surges Suppressor	Hewlett Packard	11947A	0238	20/12/2019	20/02/2023
Thermohygrometer	Testo	608-H1	7562	26/01/2019	26/09/2021
Thermohygrometer	Testo	608-H2	12268	07/05/2020	07/07/2022
Thermohygrometer	Bioblock Scientific	Météostar	0963	26/01/2019	26/09/2021
TV	DESIMET	TVC 2437B	0903		

BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity

TEST SETUP PHOTO(S) - 120VAC/60HZ POWER SUPPLY / LOW CHANNEL





CONDUCTED EMISSION (MEASUREMENT) - TABULATED RESULTS						
120VAC/60Hz POWER SUPPLY / TX MODE ALL CHANNELS						EMI5889
Terminal	Test Frequency (MHz)	Gain/Loss Factor (dB)	Level Pk (dBµV)	Level Avg (dBµV)	Limit Avg (dBµV)	Margin Lvl Avg - Limit Avg (dB)
Neutral	0.431	10.39	41.13	27.72	47.23	-19.51
Neutral	0.459	10.4	40.6	28.7	46.72	-18.02
Neutral	0.475	10.4	41.14	30.01	46.43	-16.42
Neutral	0.506	10.4	48.05	36.02	46	-9.98
Neutral	0.522	10.4	40.49	31.09	46	-14.91
Neutral	0.593	10.41	40.06	24.62	46	-21.38
Neutral	1.203	10.45	41.44	26.74	46	-19.26
Neutral	1.315	10.45	41.37	27.54	46	-18.46
Neutral	1.330	10.46	41.96	27.05	46	-18.95
Neutral	1.347	10.46	42.22	26.44	46	-19.56
Neutral	1.478	10.46	40.87	23.91	46	-22.09
Neutral	1.704	10.47	41.87	28.61	46	-17.39
Neutral	1.816	10.48	44.89	31.11	46	-14.89
Neutral	1.833	10.48	45.63	31.06	46	-14.94
Neutral	1.851	10.48	44.13	30.81	46	-15.19
Neutral	1.886	10.48	42.73	30.33	46	-15.67
Neutral	1.955	10.48	44.02	28.44	46	-17.56
Neutral	2.597	10.5	39.57	25.93	46	-20.07
Neutral	2.616	10.5	41.03	25.75	46	-20.25
Neutral	2.631	10.5	41.03	25.46	46	-20.54
Neutral	2.748	10.51	39.97	24.75	46	-21.25
Neutral	2.785	10.51	41.05	24.35	46	-21.65
Phase	0.351	10.38	42.31	25.52	48.94	-23.42
Phase	0.432	10.39	45.8	26.25	47.2	-20.95
Phase	0.450	10.39	45.34	27.26	46.88	-19.62
Phase	0.461	10.4	44.87	27.42	46.68	-19.26
Phase	0.480	10.4	44.28	26.75	46.34	-19.59
Phase	0.502	10.4	50.98	32.98	46	-13.02
Phase	0.517	10.4	50.52	32.41	46	-13.59
Phase	0.571	10.41	43.15	22.57	46	-23.43
Phase	0.588	10.41	44.33	24.33	46	-21.67
Phase	0.610	10.41	42.46	23.79	46	-22.21
Phase	0.628	10.41	41.84	22.72	46	-23.28
Phase	0.646	10.41	39.31	21.55	46	-24.45
Phase	0.692	10.42	43.28	24.68	46	-21.32
Phase	0.710	10.42	45.01	23.86	46	-22.14
Phase	1.040	10.44	42.29	21.98	46	-24.02
Phase	1.055	10.44	42.74	22.19	46	-23.81
Phase	1.071	10.44	42.88	22.68	46	-23.32
Phase	1.096	10.44	41.66	23.08	46	-22.92
Phase	1.203	10.45	45.3	25.66	46	-20.34
Phase	1.263	10.45	42.28	24.85	46	-21.15
Phase	1.275	10.45	42.16	25.05	46	-20.95
Phase	1.281	10.45	42.56	25.2	46	-20.8
Phase	1.317	10.45	45.69	25.68	46	-20.32

CONDUCTED EMISSION (MEASUREMENT) - TABULATED RESULTS						
120VAC/60Hz POWER SUPPLY / TX MODE ALL CHANNELS						EMI5889
Terminal	Test Frequency (MHz)	Gain/Loss Factor (dB)	Level Pk (dBµV)	Level Avg (dBµV)	Limit Avg (dBµV)	Margin Lvl Avg - Limit Avg (dB)
Phase	1.328	10.45	46.49	25.53	46	-20.47
Phase	1.335	10.46	45.98	25.45	46	-20.55
Phase	1.346	10.46	46.83	25.02	46	-20.98
Phase	1.364	10.46	45.54	24.31	46	-21.69
Phase	1.381	10.46	43.95	23.48	46	-22.52
Phase	1.399	10.46	42.53	22.55	46	-23.45
Phase	1.417	10.46	42.19	22.14	46	-23.86
Phase	1.435	10.46	42.51	21.9	46	-24.1
Phase	1.452	10.46	43.94	21.75	46	-24.25
Phase	1.469	10.46	43.69	21.54	46	-24.46
Phase	1.487	10.46	43.69	21.05	46	-24.95
Phase	1.505	10.46	43.49	20.46	46	-25.54
Phase	1.560	10.47	40.02	19.71	46	-26.29
Phase	1.689	10.47	45.72	25.54	46	-20.46
Phase	1.823	10.48	48.23	28.56	46	-17.44
Phase	1.841	10.48	49.37	28.13	46	-17.87
Phase	1.877	10.48	46.56	26.76	46	-19.24
Phase	1.895	10.48	46.38	26.48	46	-19.52
Phase	1.913	10.48	47.17	26.35	46	-19.65
Phase	1.948	10.48	46.92	25.07	46	-20.93
Phase	1.965	10.48	47.48	23.88	46	-22.12
Phase	2.150	10.49	44.11	23.24	46	-22.76
Phase	2.283	10.49	41.87	21.64	46	-24.36
Phase	2.388	10.5	39.74	20.55	46	-25.45
Phase	2.457	10.5	42.73	23.05	46	-22.95
Phase	2.494	10.5	42.97	22.86	46	-23.14
Phase	2.508	10.5	43.66	22.81	46	-23.19
Phase	2.526	10.5	42.25	22.94	46	-23.06
Phase	2.548	10.5	41.95	23.31	46	-22.69
Phase	2.562	10.5	41.93	23.77	46	-22.23
Phase	2.585	10.5	44.29	24.15	46	-21.85
Phase	2.603	10.5	45.36	24.04	46	-21.96
Phase	2.614	10.5	44.59	23.78	46	-22.22
Phase	2.629	10.5	45.32	23.48	46	-22.52
Phase	2.647	10.5	44.08	23.02	46	-22.98
Phase	2.658	10.5	45.07	22.83	46	-23.17
Phase	2.711	10.51	42.08	23.22	46	-22.78
Phase	2.750	10.51	45.32	22.8	46	-23.2
Phase	2.782	10.51	44.82	22.44	46	-23.56
Phase	2.831	10.51	42.07	21.79	46	-24.21
Phase	2.895	10.51	43.83	22.46	46	-23.54
Phase	2.911	10.51	42.71	22.12	46	-23.88
Phase	2.952	10.51	42.61	21.81	46	-24.19
Phase	3.122	10.52	44.34	22.45	46	-23.55
Phase	3.243	10.52	44.02	23.02	46	-22.98
Phase	3.264	10.52	45.55	22.96	46	-23.04

CONDUCTED EMISSION (MEASUREMENT) - TABULATED RESULTS						
120VAC/60Hz POWER SUPPLY / TX MODE ALL CHANNELS						EMI5889
Terminal	Test Frequency (MHz)	Gain/Loss Factor (dB)	Level Pk (dBµV)	Level Avg (dBµV)	Limit Avg (dBµV)	Margin Lvl Avg - Limit Avg (dB)
Phase	3.284	10.52	43.74	22.61	46	-23.39
Phase	3.304	10.52	43.23	22.07	46	-23.93
Phase	3.345	10.52	42.69	22.84	46	-23.16
Phase	3.384	10.52	43.58	22.43	46	-23.57
Phase	3.404	10.52	44.1	22.49	46	-23.51
Phase	3.706	10.53	41.45	21.98	46	-24.02
Phase	3.887	10.53	42.37	22.27	46	-23.73
Phase	4.069	10.54	40.55	22.06	46	-23.94
Phase	4.248	10.54	41.18	21.81	46	-24.19
Phase	4.342	10.54	41.2	21.63	46	-24.37
Phase	4.519	10.55	42.27	22.87	46	-23.13
Phase	4.700	10.55	41.48	23.18	46	-22.82
Phase	4.881	10.55	41.08	23.04	46	-22.96
Phase	4.971	10.55	41.03	23.09	46	-22.91
Phase	26.532	10.57	43.91	29.82	50	-20.18

CONDUCTED EMISSION (MEASUREMENT) - TABULATED RESULTS						
120VAC/60Hz POWER SUPPLY / STANDBY MODE						EMI5891
Terminal	Test Frequency (MHz)	Gain/Loss Factor (dB)	Level Pk (dBµV)	Level Avg (dBµV)	Limit Avg (dBµV)	Margin Lvl Avg - Limit Avg (dB)
Neutre	0.494	10.40	40.78	16.30	46.10	-29.80
Neutre	0.510	10.40	42.70	18.33	46.00	-27.67
Neutre	0.523	10.40	38.15	13.45	46.00	-32.55
Phase 1	0.497	10.40	45.37	13.96	46.04	-32.08
Phase 1	0.507	10.40	46.35	14.46	46.00	-31.54
Phase 1	0.520	10.40	42.58	10.49	46.00	-35.51
Phase 1	1	10.44	36.63	8.97	46.00	-37.03
Phase 1	1.036	10.44	37.17	9.12	46.00	-36.88
Phase 1	1.053	10.44	36.33	8.74	46.00	-37.26
Phase 1	1.156	10.45	37.39	9.00	46.00	-37.00
Phase 1	1.180	10.45	38.06	9.15	46.00	-36.85
Phase 1	1.195	10.45	37.63	9.07	46.00	-36.93
Phase 1	1.490	10.46	37.47	9.07	46.00	-36.93
Phase 1	1.515	10.46	38.30	8.92	46.00	-37.08
Phase 1	1.827	10.48	39.11	9.01	46.00	-36.99
Phase 1	1.849	10.48	38.80	8.71	46.00	-37.29
Phase 1	1.935	10.48	37.88	8.62	46.00	-37.38
Phase 1	1.959	10.48	39.36	8.95	46.00	-37.05
Phase 1	2.460	10.50	36.74	8.71	46.00	-37.29
Phase 1	2.480	10.50	36.04	8.37	46.00	-37.63
Phase 1	2.787	10.51	36.15	8.46	46.00	-37.54
Phase 1	2.931	10.51	36.99	8.74	46.00	-37.26
Phase 1	3.087	10.51	36.38	8.71	46.00	-37.29
Phase 1	3.105	10.51	36.68	8.37	46.00	-37.63
Phase 1	3.253	10.52	36.67	8.48	46.00	-37.52

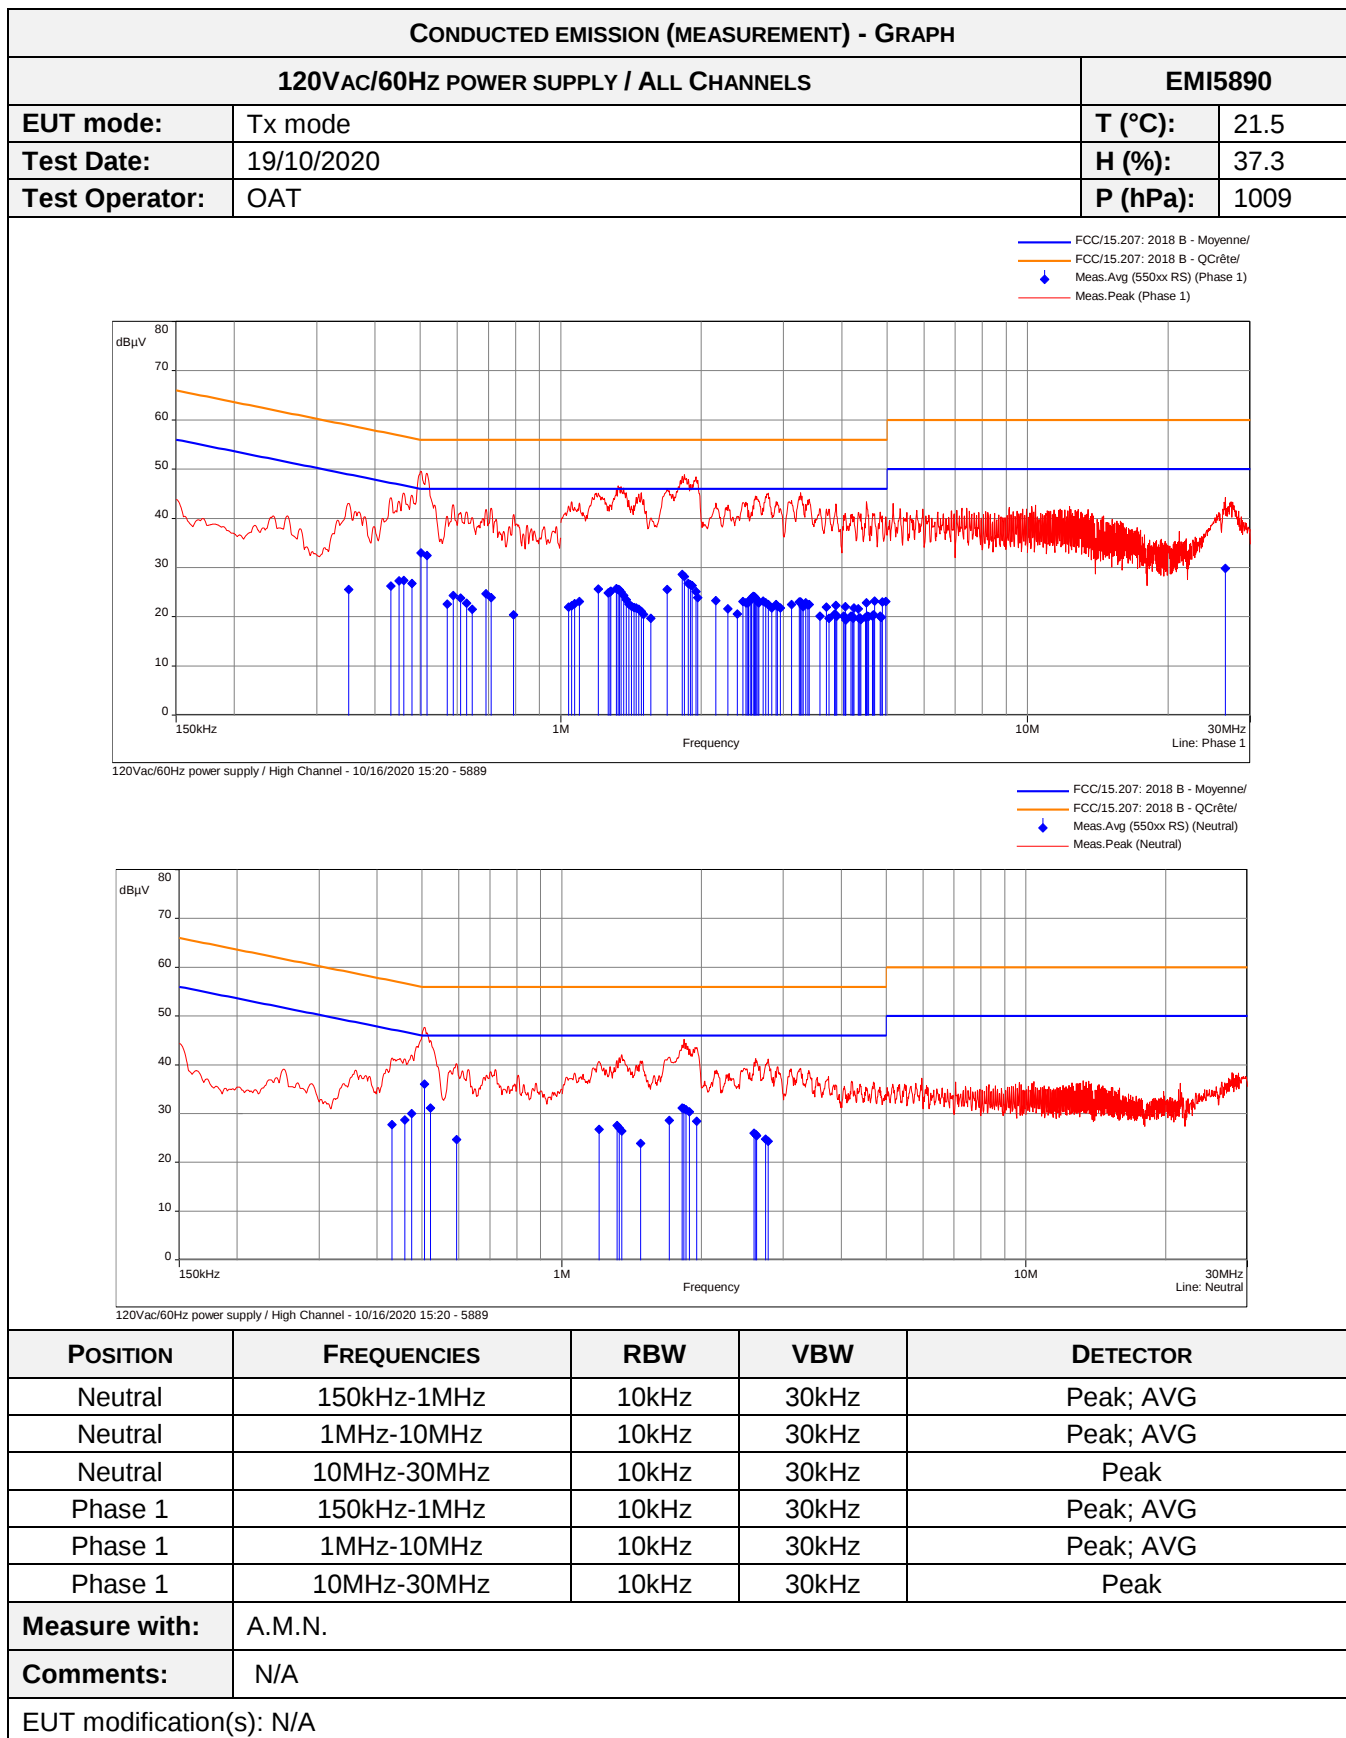

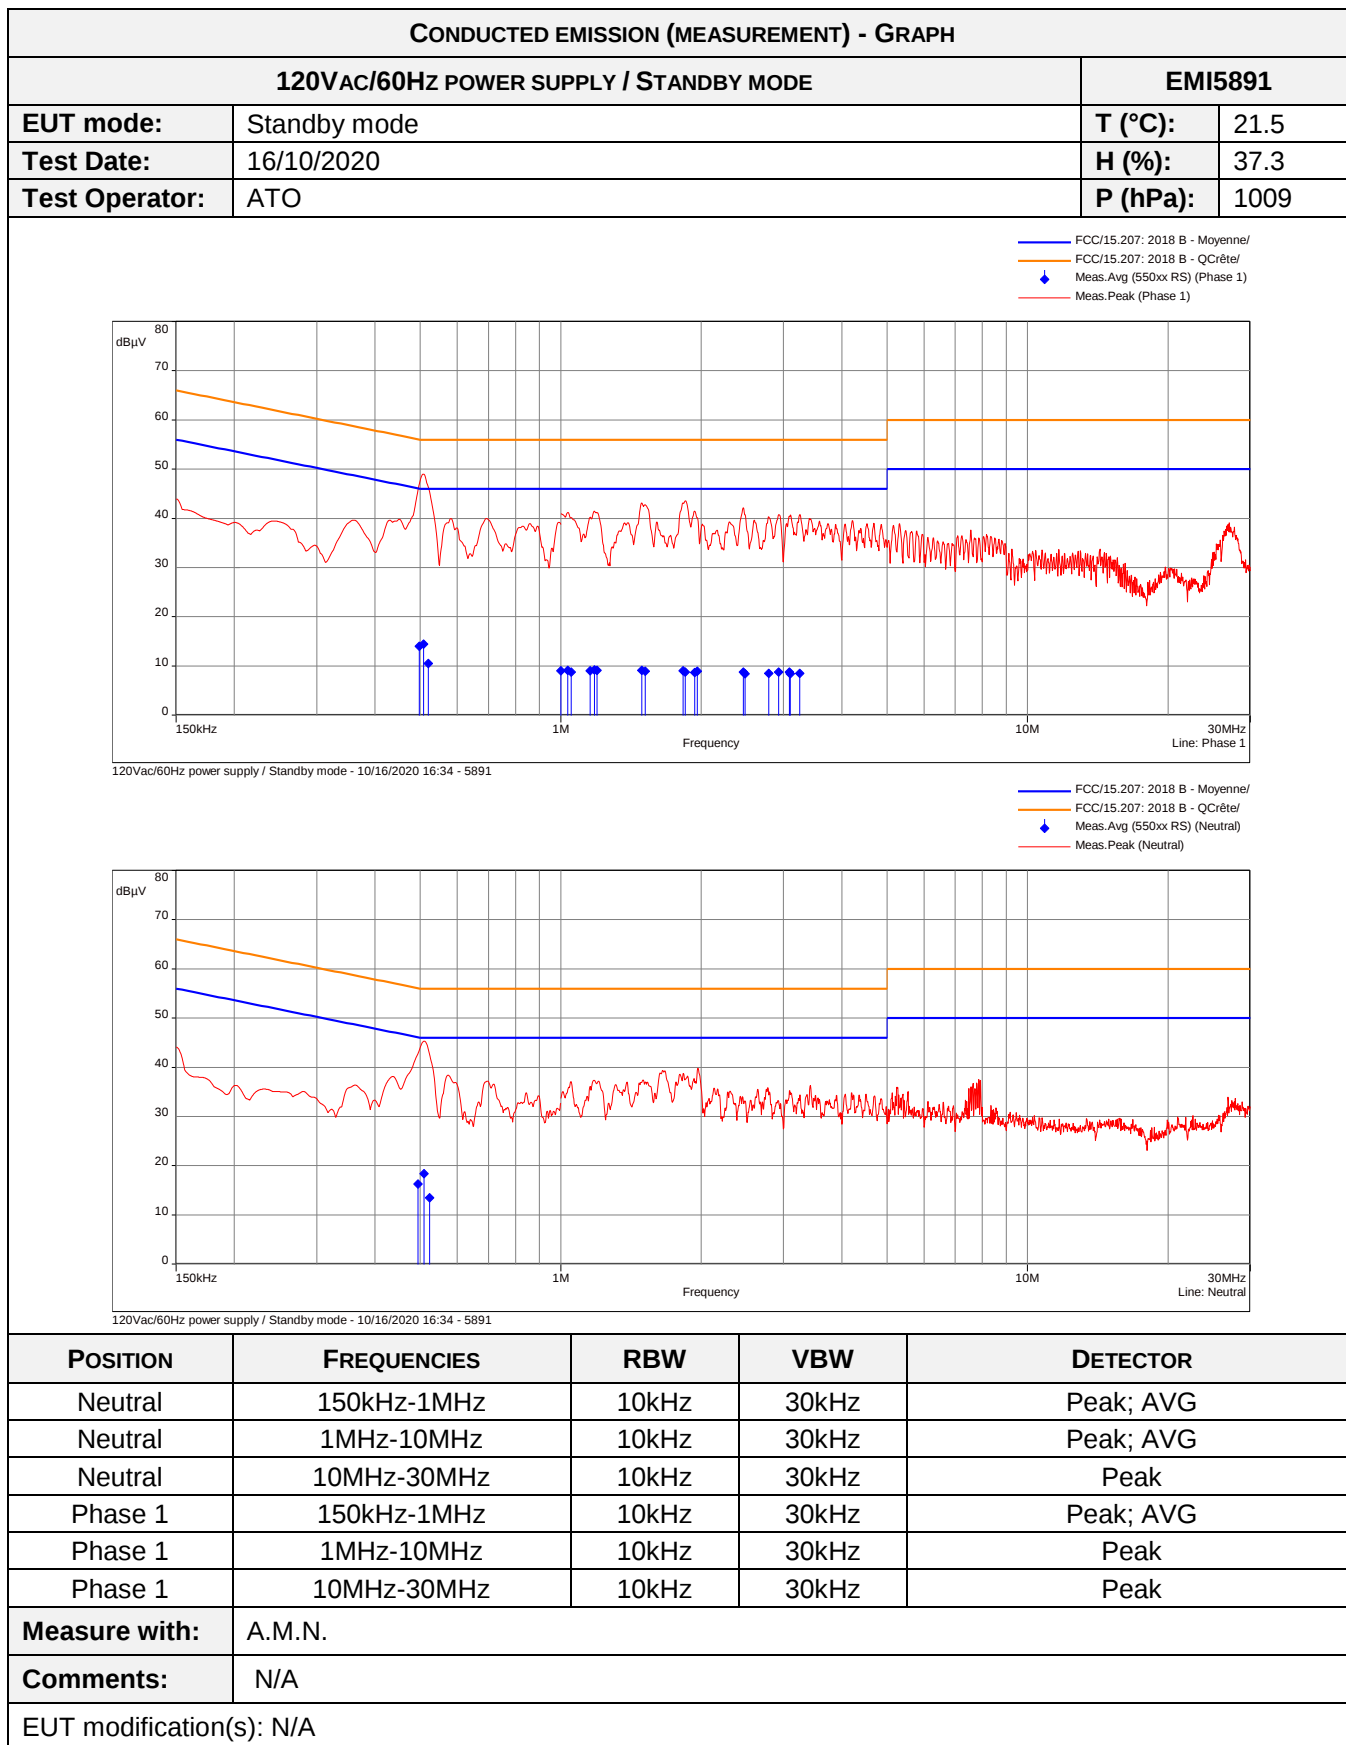

8.2.6dB bandwidth

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	FCC part 15.247 and RSS-247
Test description: a) (2): Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz. EUT is connected to the measuring receiver via 50Ω attenuator(s). Tests are done in max-hold mode in order to capture all channels.	

TEST CASE AND CONDITIONS	SEVERITY	RESULT TAB.	VERDICT
Low Channel	>500kHz	EMI8049	PASS
Mid Channel	>500kHz	EMI8050	PASS
High Channel	>500kHz	EMI8051	PASS


LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	22.1 °C
Relative Humidity	20 to 75 %	47.3 %
Atmospheric pressure	N/A	999 hPa
Test method deviation: N/A		
Supplementary information:		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Cable	SUCOFLEX	N-3m	14379	25/06/2019	25/08/2021
Cable	SUCOFLEX	N-5,5m	14381	25/06/2019	25/08/2021
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Receiver	Rohde & Schwarz	FSW43	14830	29/07/2020	29/09/2021
Shielded enclosure	RAY PROOF	C.V2	1423	04/10/2019	04/12/2022
Software	Nexio		0000		
Thermohygrometer	Testo	608-H1	7562	25/01/2019	25/03/2021
Thermohygrometer	Bioblock Scientific	Météostar	0963	26/01/2019	26/09/2021


Blank cells = Permanent validity

TEST SETUP PHOTO(S) – 6dB BANDWIDTH



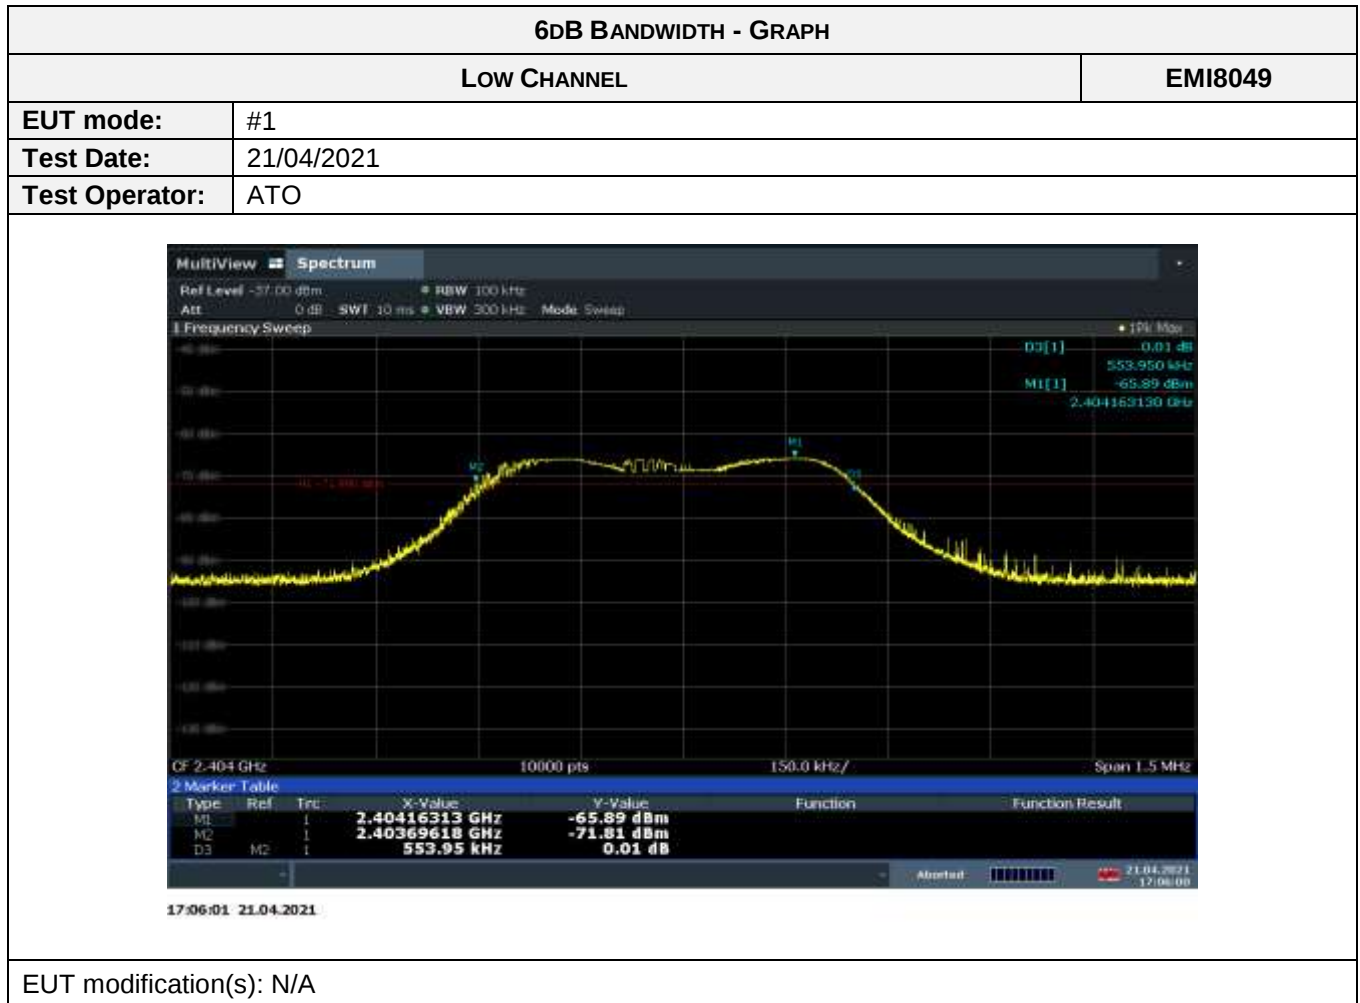

6dB BANDWIDTH - TABULATED RESULTS			
LOW CHANNEL			
Frequency	RBW	6 dB Bandwidth	Limit
2404 MHz	100kHz	553.95 kHz	>500kHz

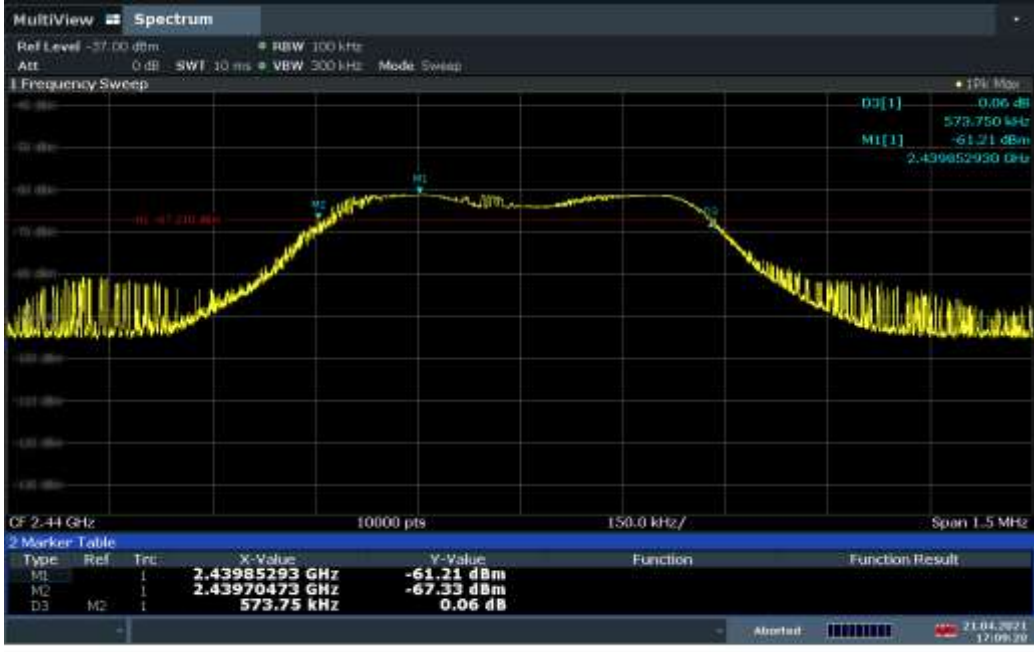6dB BANDWIDTH - GRAPH	
MID CHANNEL	
EUT mode:	#1
Test Date:	21/04/2021
Test Operator:	ATO
 17:09:20 21.04.2021	
EUT modification(s): N/A	

6dB BANDWIDTH - TABULATED RESULTS			
MID CHANNEL			
Frequency	RBW	6 dB Bandwidth	Limit
2440 MHz	100kHz	573.75 kHz	>500kHz

6DB BANDWIDTH - GRAPH																															
HIGH CHANNEL			EMI8051																												
EUT mode:	#1																														
Test Date:	21/04/2021																														
Test Operator:	ATO																														
MultiView Spectrum Ref Level: -37.00 dBm RBW: 100 kHz Att: 0 dB SWF: 10 ms VBW: 300 kHz Mode: Sweep Frequency Sweep Y-axis: dBm X-axis: GHz Span: 1.5 MHz Resolution: 150.0 kHz Points: 10000 Marker Table <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td></td><td>1</td><td>2.47614678 GHz</td><td>-59.83 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.47571868 GHz</td><td>-65.66 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M2</td><td>1</td><td>518.55 kHz</td><td>-0.28 dB</td><td></td><td></td></tr></tbody></table> 17:13:18 21.04.2021 Alerted: 21.04.2021 17:13:18				Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1		1	2.47614678 GHz	-59.83 dBm			M2		1	2.47571868 GHz	-65.66 dBm			D3	M2	1	518.55 kHz	-0.28 dB		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																									
M1		1	2.47614678 GHz	-59.83 dBm																											
M2		1	2.47571868 GHz	-65.66 dBm																											
D3	M2	1	518.55 kHz	-0.28 dB																											
EUT modification(s): N/A																															

6dB BANDWIDTH - TABULATED RESULTS			
HIGH CHANNEL			
Frequency	RBW	6 dB Bandwidth	Limit
2476 MHz	100kHz	518.55 kHz	>500kHz

8.3. Occupied bandwidth

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	FCC part 15.247 and RSS-247
Test description: The occupied bandwidth (OBW) is the Frequency Range in which 99 % of the total mean power of a given emission falls. The residual part of the total power being denoted as β , which, in cases of symmetrical spectra, splits up into $\beta/2$ on each side of the spectrum. Unless otherwise specified, $\beta/2$ is taken as 0,5 %. The maximum occupied bandwidth includes all associated side bands above the appropriate emissions level and the frequency error or drift under extreme test conditions.	

TEST CASE AND CONDITIONS	SEVERITY	RESULT TAB.	VERDICT
Low Channel	>500kHz	EMI8052	PASS
Mid Channel	>500kHz	EMI8053	PASS
High Channel	>500kHz	EMI8054	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	21.8 °C
Relative Humidity	20 to 75 %	42.1 %
Atmospheric pressure	N/A	1005 hPa
Test method deviation: N/A		
Supplementary information:		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Cable	SUCOFLEX	N-3m	14379	25/06/2019	25/08/2021
Cable	SUCOFLEX	N-5,5m	14381	25/06/2019	25/08/2021
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Receiver	Rohde & Schwarz	FSW43	14830	29/07/2020	29/09/2021
Shielded enclosure	RAY PROOF	C.V2	1423	04/10/2019	04/12/2022
Software	Nexio		0000		
Thermohygrometer	Testo	608-H1	7562	25/01/2019	25/03/2021
Thermohygrometer	Bioblock Scientific	Météostar	0963	26/01/2019	26/09/2021


Blank cells = Permanent validity

TEST SETUP PHOTO(S) – OCCUPIED BANDWIDTH



OCCUPIED BANDWIDTH - GRAPH	
LOW CHANNEL	
EUT mode:	#1
Test Date:	30/04/2021
Test Operator:	ATO
 11:23:43 30.04.2021	
EUT modification(s): N/A	

OCCUPIED BANDWIDTH - TABULATED RESULTS			
LOW CHANNEL			
Frequency	RBW	OBW 99%	Limit
2404 MHz	100 kHz	631.3 kHz	> 500kHz

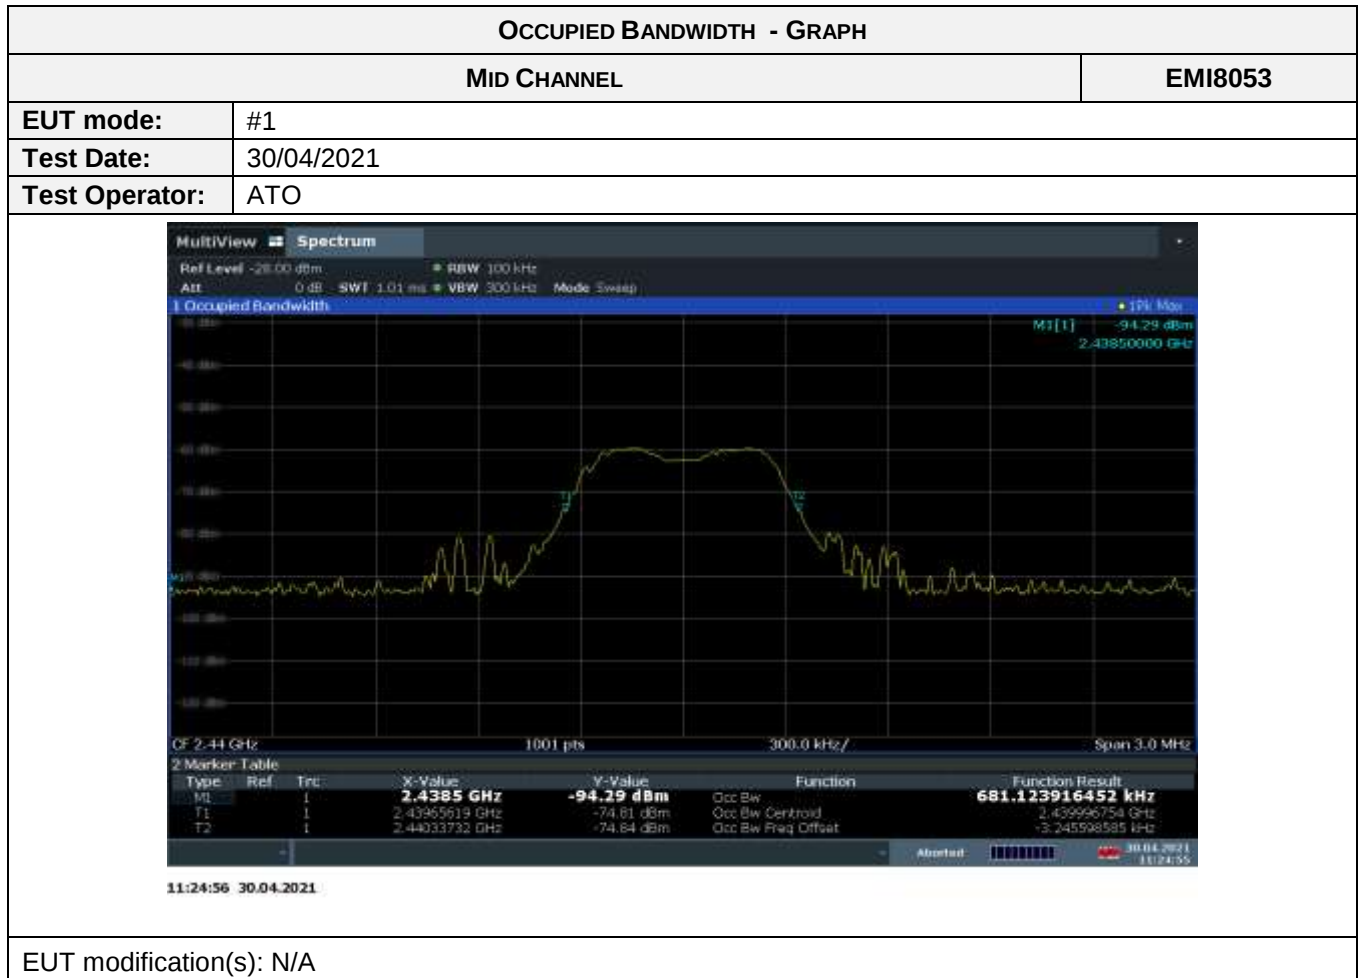

OCCUPIED BANDWIDTH - TABULATED RESULTS			
MID CHANNEL			
Frequency	RBW	OBW 99%	Limit
2440 MHz	100 kHz	681.12 MHz	> 500kHz



OCCUPIED BANDWIDTH - TABULATED RESULTS			
HIGH CHANNEL			
Frequency	RBW	OBW 99%	Limit
2476 MHz	100 kHz	1021.26 kHz	> 500kHz

8.4. Maximum effective isotropic radiated power

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	FCC part 15.247 and RSS-247
Test description: EUT is set on an insulating support at 150cm above the ground reference plane. Measurement are done on a normalized test site by the substitution method. The test antenna is oriented in the two polarizations (vertical and horizontal), and the product is rotated at 360° in the horizontal plane (See photo(s) for initial position of the EUT(0°)). If applicable the test antenna was raised and lowered through the specified range of height until a maximum signal level is detected. For portable equipments a research of maximum level is done on the 3 axes. Only the highest levels are recorded.	

TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
EIRP / All Positions / Low channel	2.402GHz- 2.406GHz	30dBm	EMI6688	PASS
EIRP / All Positions / Mid channel	2.438GHz- 2.442GHz	30dBm	EMI6689	PASS
EIRP / All Positions / High channel	2.474GHz- 2.478GHz	30dBm	EMI6690	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(es)
Relative Humidity	20 to 75 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
Test method deviation: N/A		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Attenuator	EMITECH	SUB.V2-H	14495	13/01/2021	13/03/2022
Attenuator	EMITECH	SUB.V2-V	14496	13/01/2021	13/03/2022
Cable	MegaPhase	N-3m	14852	30/10/2018	30/06/2021
Cable	SUCOFLEX	N-5,5m	14381	25/06/2019	25/08/2021
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Receiver	Rohde & Schwarz	FSW43	14830	29/07/2020	29/09/2021
Shielded enclosure	RAY PROOF	C.V2	1423	04/10/2019	04/12/2022
Software	Nexio		0000		
Thermohygrometer	Testo	608-H1	7562	25/01/2019	25/03/2021
Thermohygrometer	Bioblock Scientific	Météostar	0963	25/01/2019	25/03/2021

Blank cells = Permanent validity

TEST SETUP PHOTO(S) - POSITION 1




TEST SETUP PHOTO(S) - POSITION 2




TEST SETUP PHOTO(S) - POSITION 3




TEST SETUP PHOTO(S) - EIRP

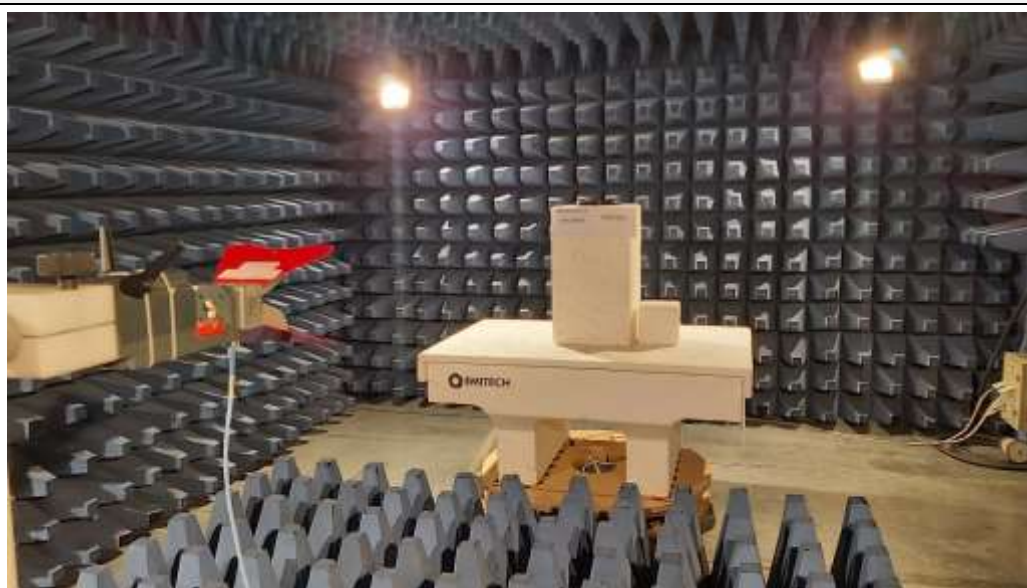


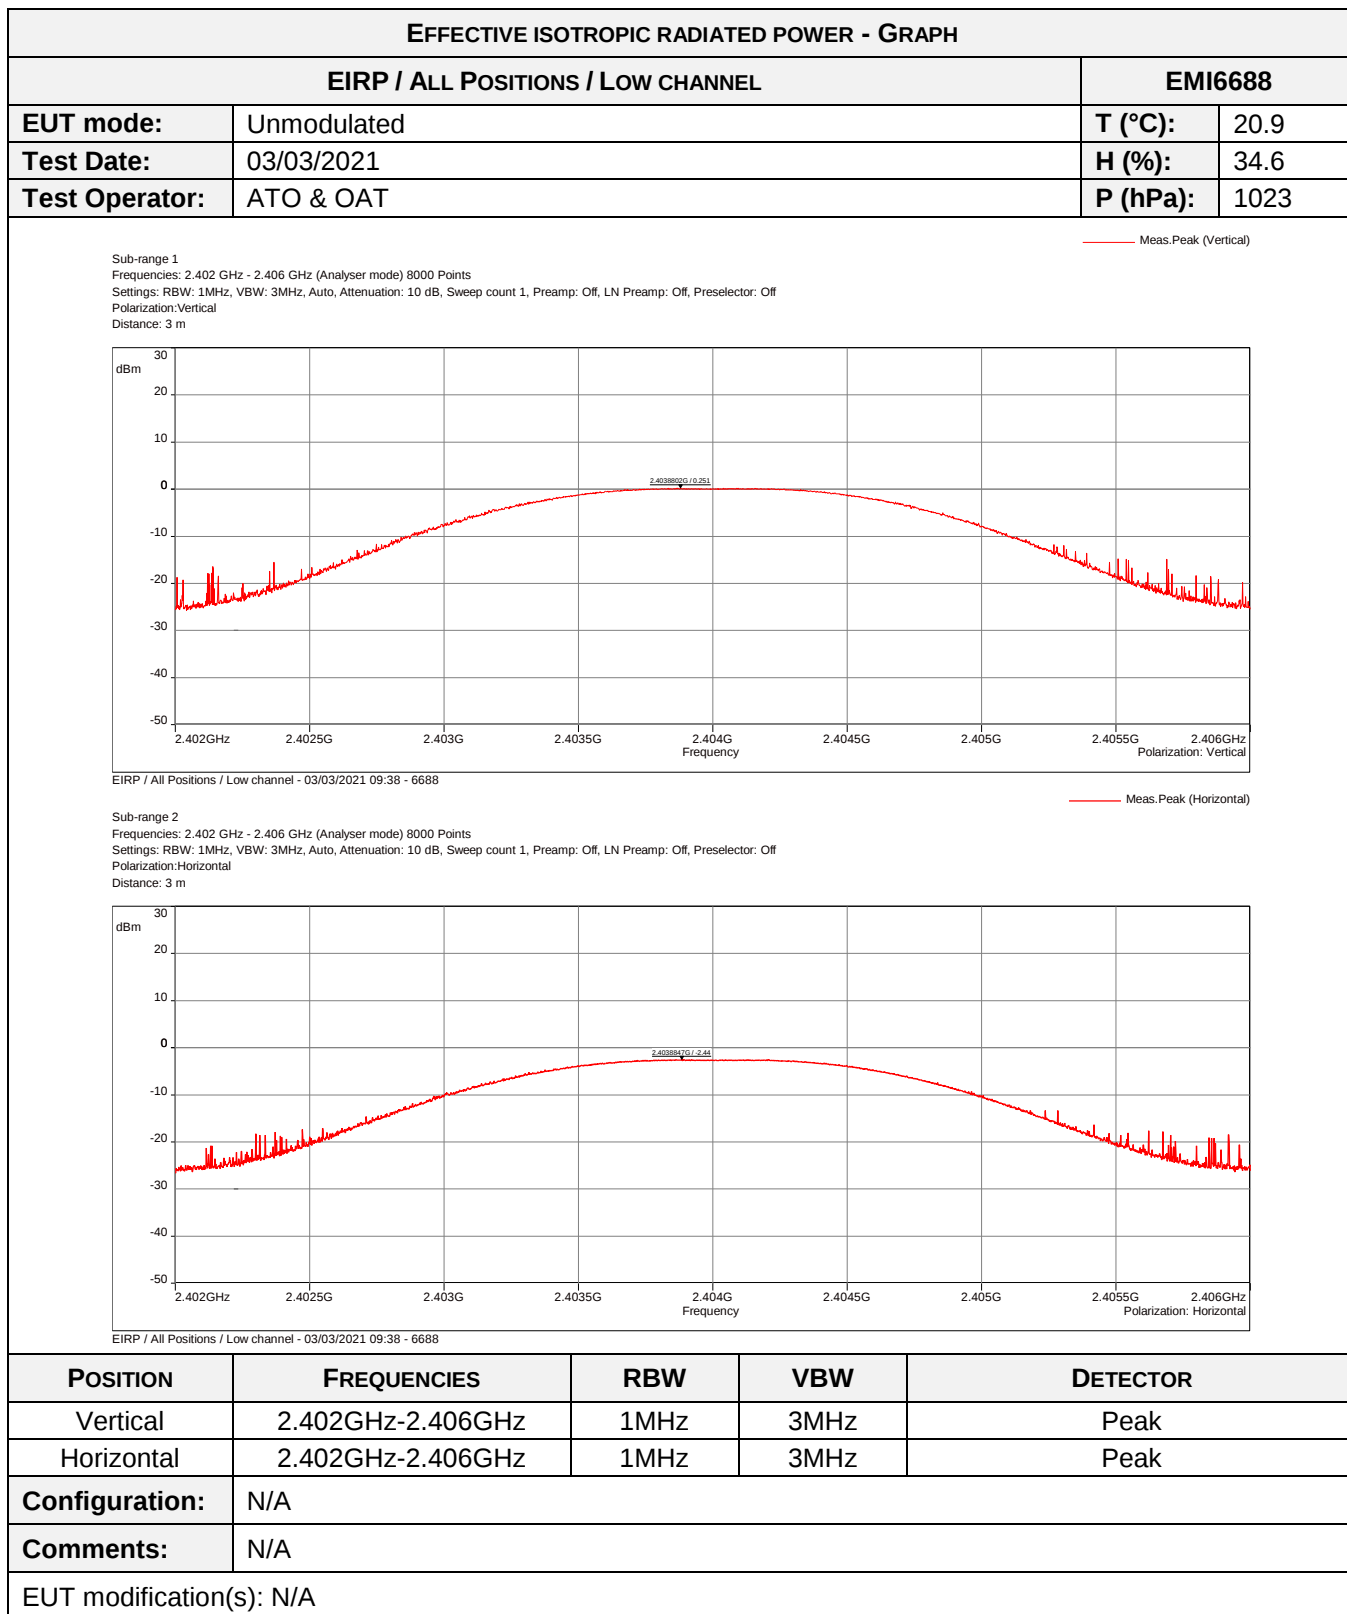

EFFECTIVE ISOTROPIC RADIATED POWER - TABULATED RESULTS			
EIRP / ALL POSITIONS / LOW CHANNEL			EMI6688
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2403.88	Vertical	0.251	30
2403.88	Horizontal	-2.44	30

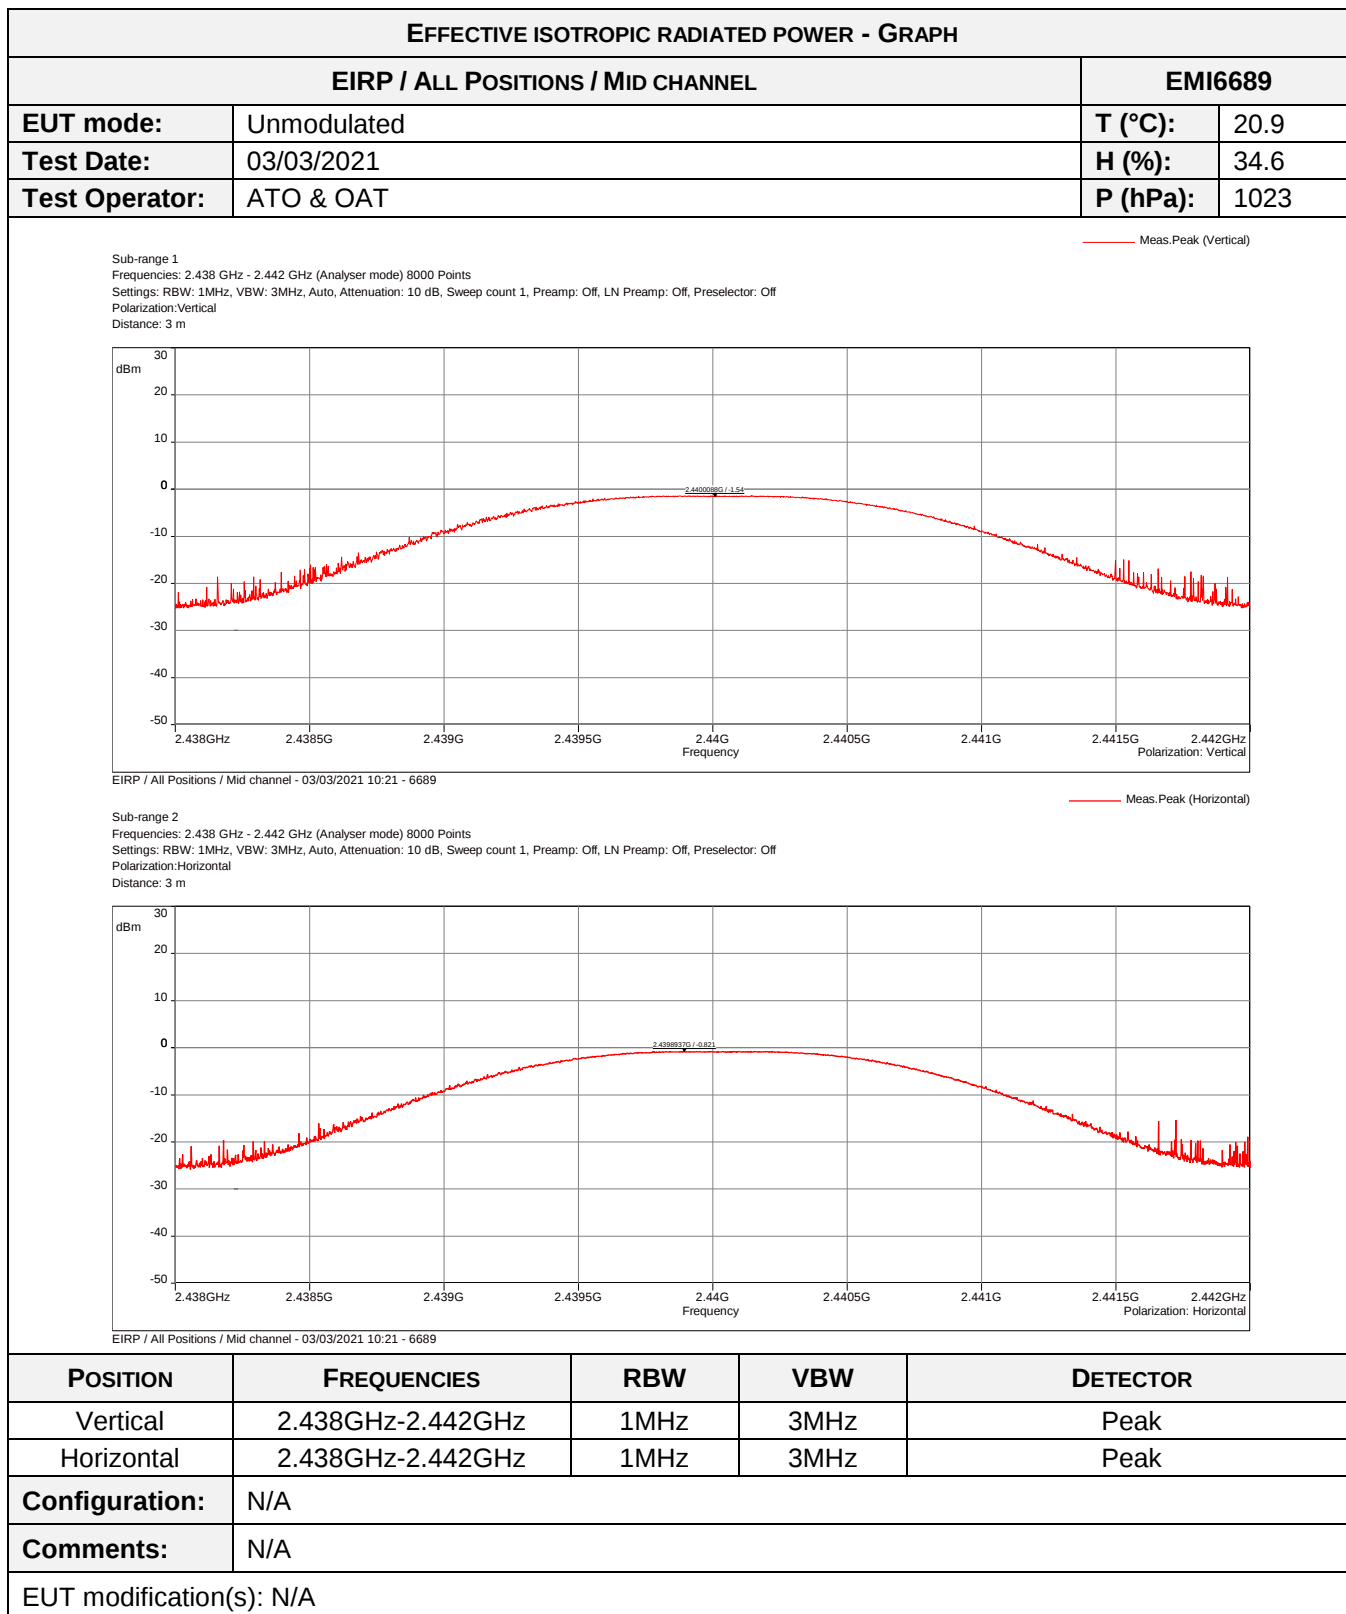

EFFECTIVE ISOTROPIC RADIATED POWER - TABULATED RESULTS			
EIRP / ALL POSITIONS / MID CHANNEL			EMI6689
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2440.00	Vertical	-1.54	30
2439.89	Horizontal	-0.821	30

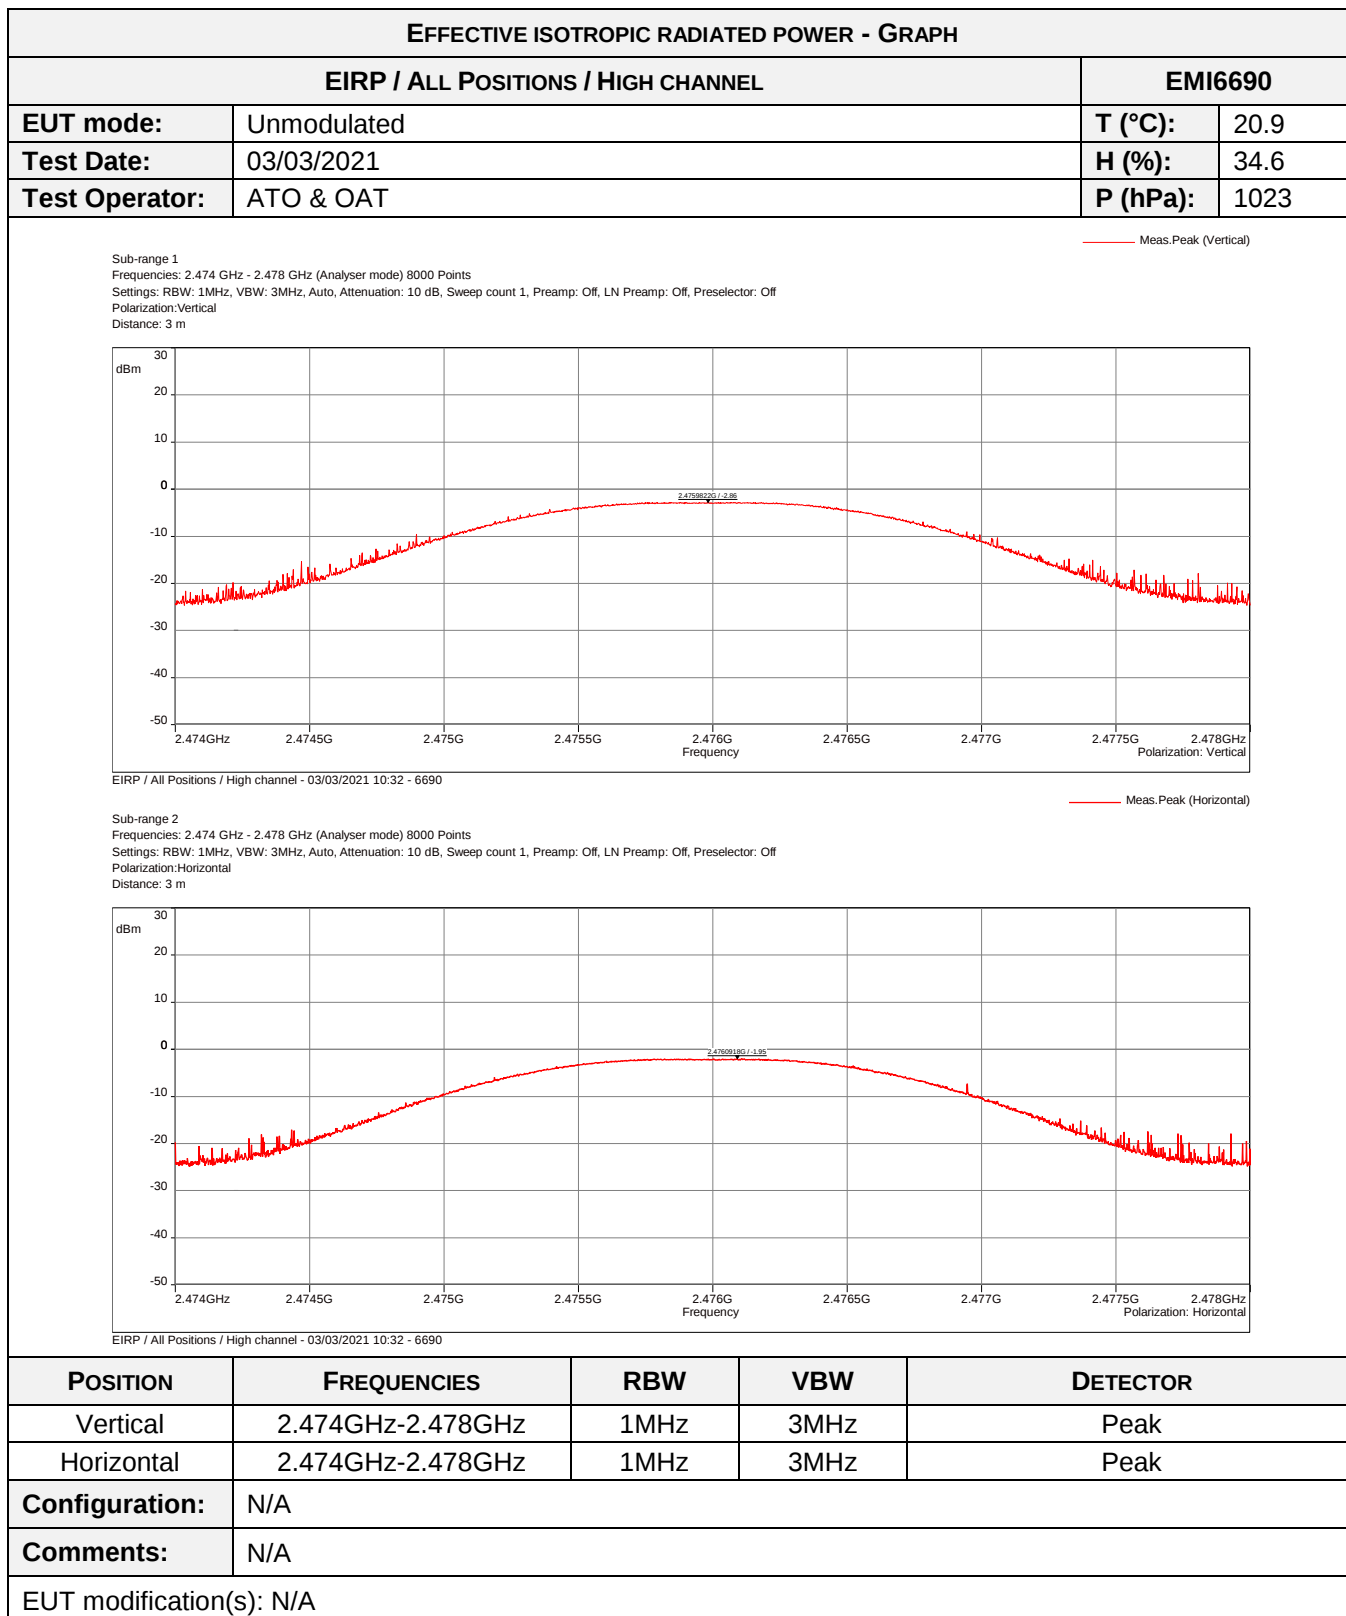

EFFECTIVE ISOTROPIC RADIATED POWER - TABULATED RESULTS			
EIRP / ALL POSITIONS / HIGH CHANNEL			EMI6690
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2475.98	Vertical	-2.86	30
2476.09	Horizontal	-1.95	30

8.5. Band-edge compliance

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	FCC part 15.247 subclause d) and RSS-247
Test description: d) In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. EUT is connected to the measuring receiver via 50Ω attenuator(s). Only the highest levels are recorded.	

TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
All Positions / Low channel	2.38GHz-2.5GHz	>20dBc	EMI6717	PASS
All Positions / Mid channel	2.38GHz-2.5GHz	>20dBc	EMI6719	PASS
All Positions / High channel	2.38GHz-2.5GHz	>20dBc	EMI6721	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(es)
Relative Humidity	20 to 75 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
Test method deviation: N/A		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Cable	SUCOFLEX	N-3m	14379	25/06/2019	25/08/2021
Cable	SUCOFLEX	N-5,5m	14381	25/06/2019	25/08/2021
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Receiver	Rohde & Schwarz	FSW43	14830	29/07/2020	29/09/2021
Shielded enclosure	RAY PROOF	C.V2	1423	04/10/2019	04/12/2022
Software	Nexio		0000		
Thermohygrometer	Testo	608-H1	7562	25/01/2019	25/03/2021
Thermohygrometer	Bioblock Scientific	Météostar	0963	25/01/2019	25/03/2021

BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity

TEST SETUP PHOTO(S) - BAND EDGE / POSITION 1




TEST SETUP PHOTO(S) - BAND EDGE / POSITION 2





TEST SETUP PHOTO(S) - BAND EDGE / POSITION 3




TEST SETUP PHOTO(S) - BAND EDGE

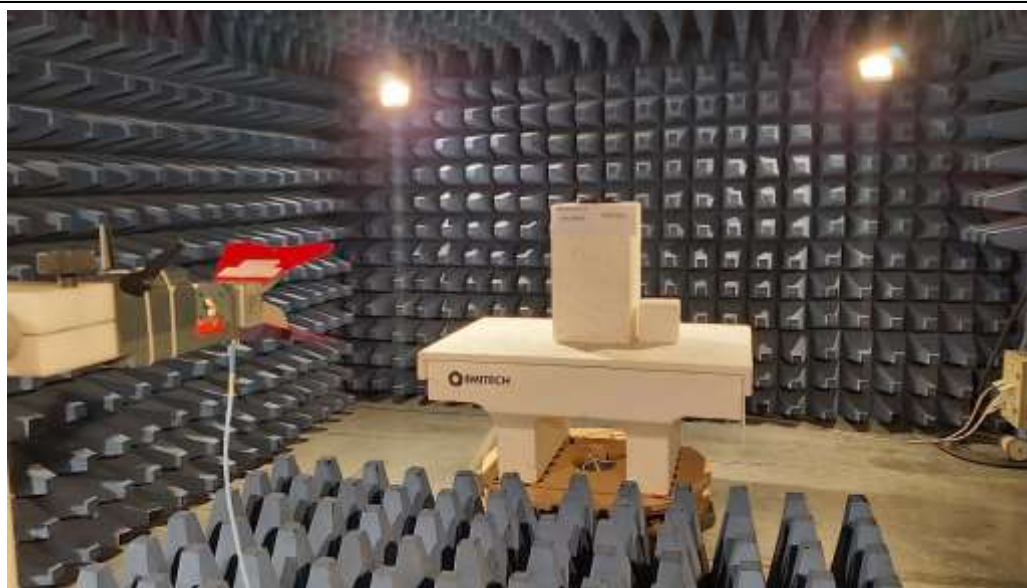

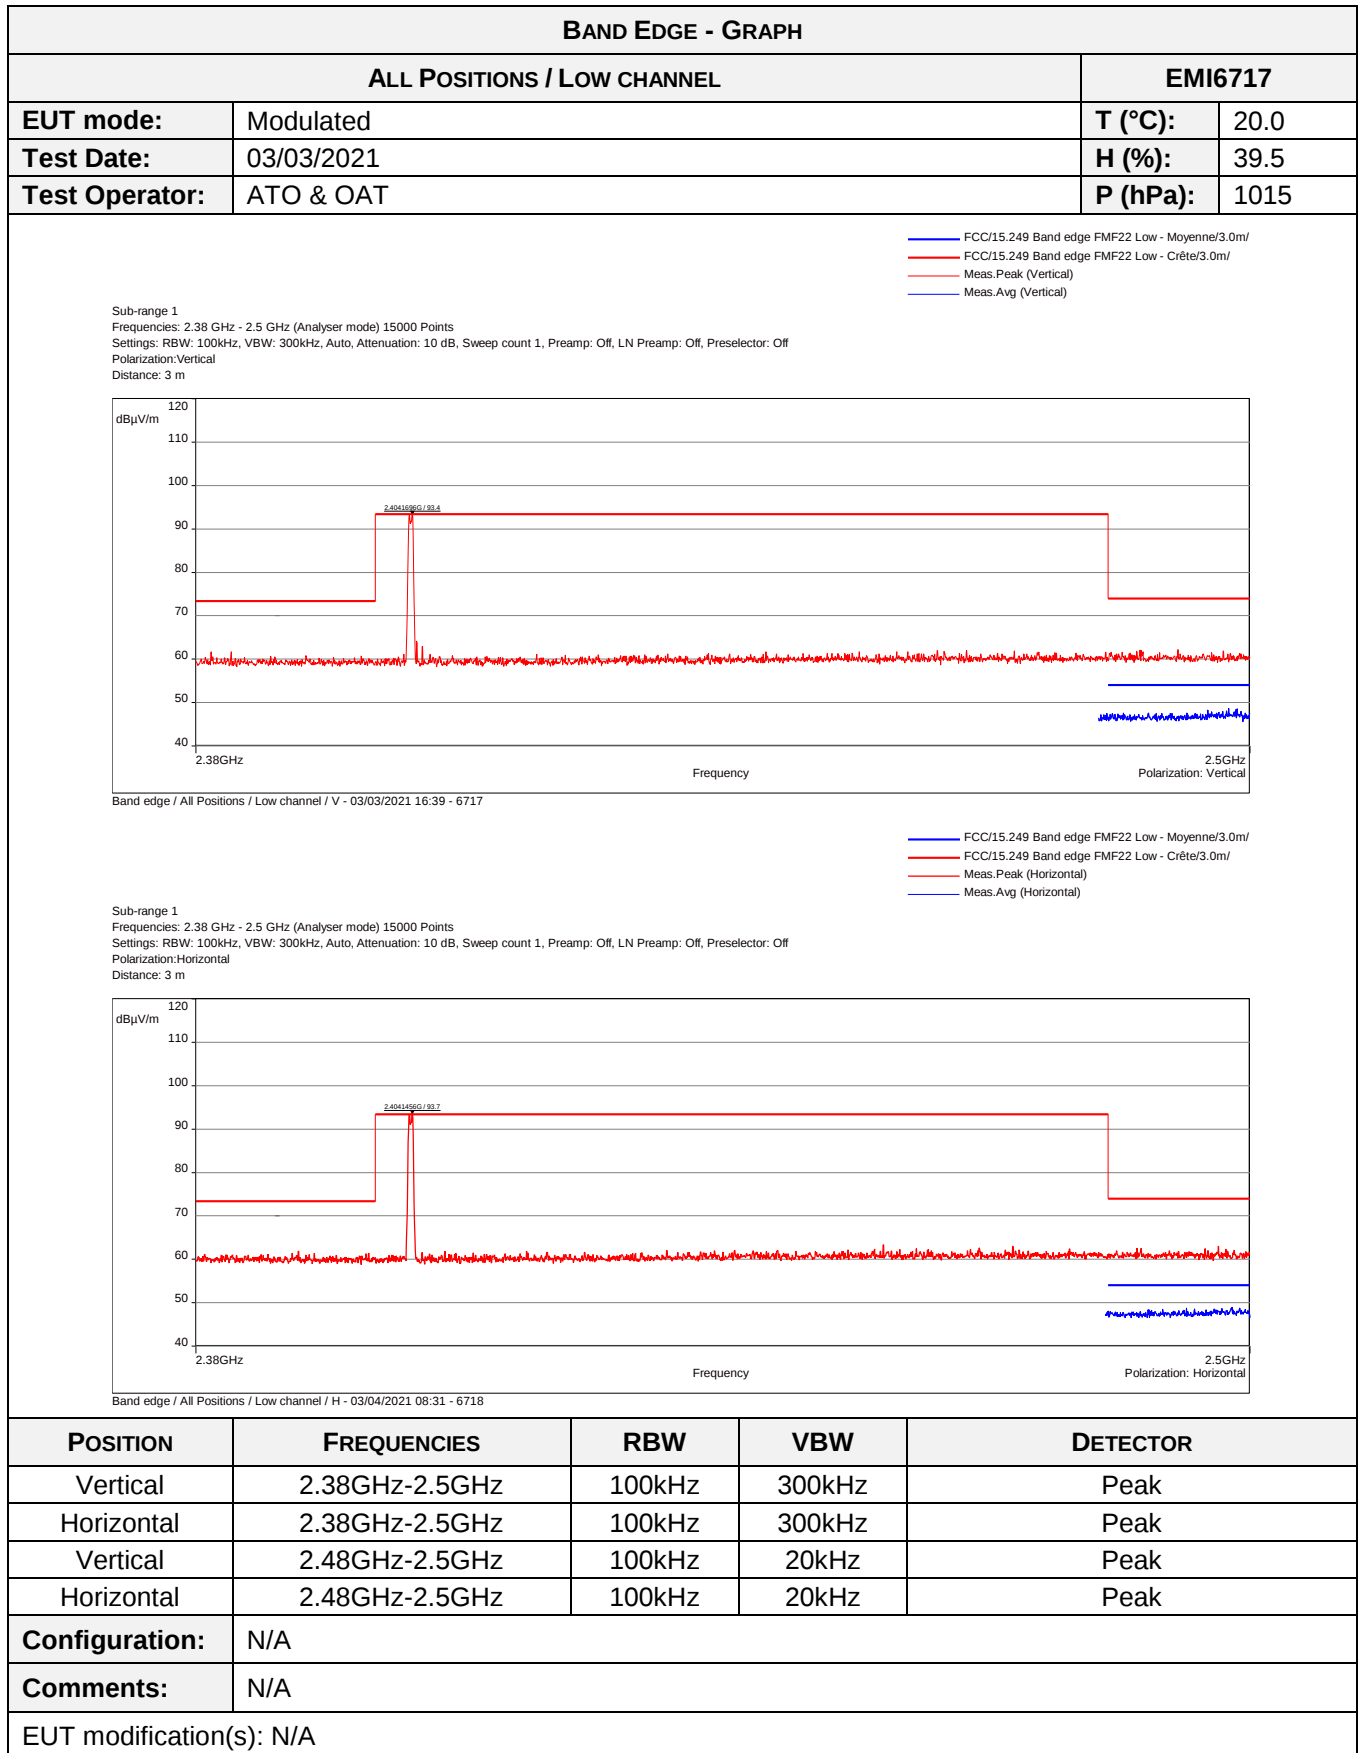

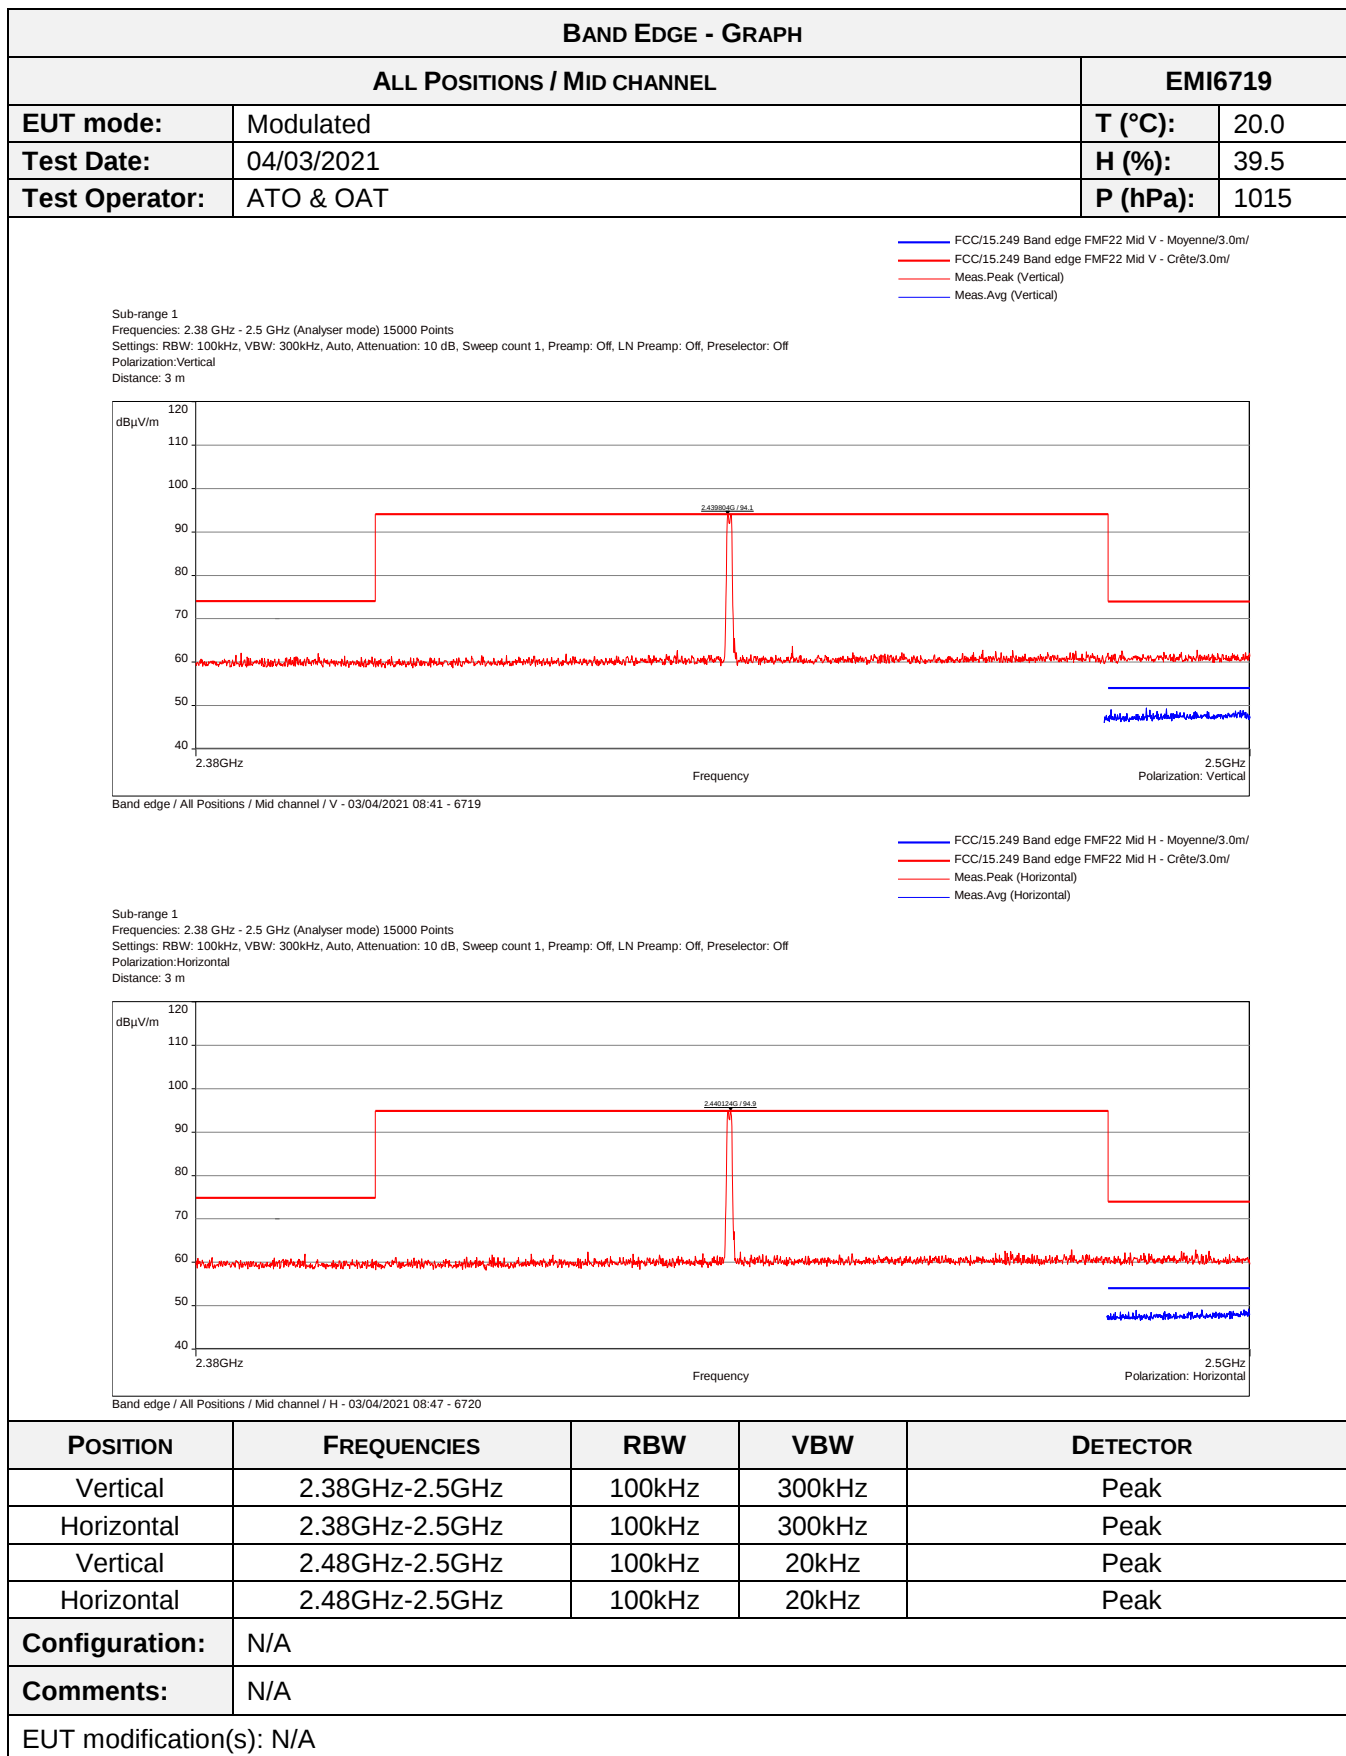

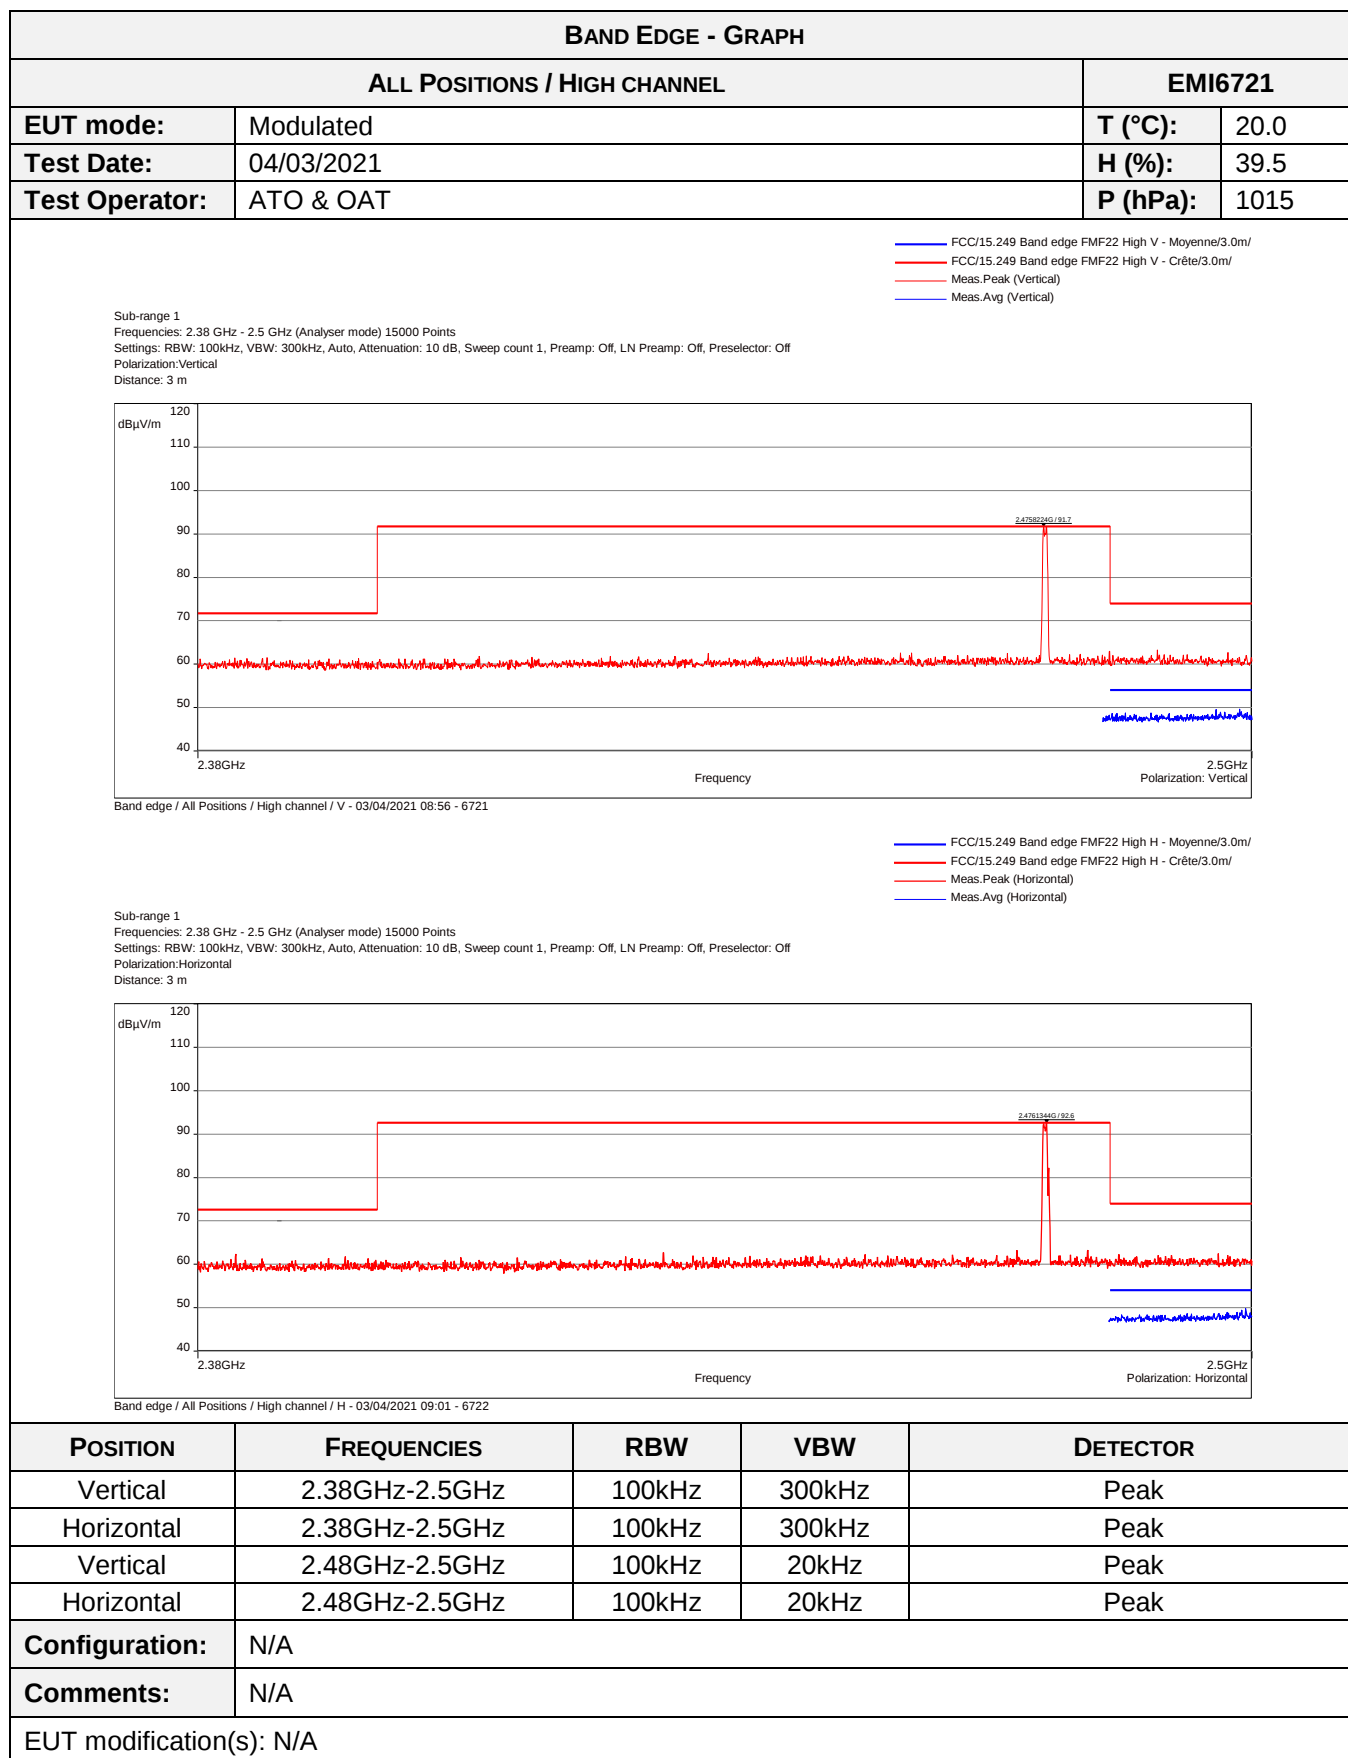

8.6. Power spectral density

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	FCC part 15.247 and RSS-247
Test description: e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density. EUT is connected to the measuring receiver via 50Ω attenuator(s). Only the highest levels are recorded.	

TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
All Positions / Low channel	2.4035GHz- 2.4045GHz	8dBm/3kHz	EMI6703	PASS
All Positions / Mid channel	2.4395GHz- 2.4405GHz	8dBm/3kHz	EMI6704	PASS
All Positions / High channel	2.4755GHz- 2.4765GHz	8dBm/3kHz	EMI6705	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(s)
Relative Humidity	20 to 75 %	See Graph(s)
Atmospheric pressure	N/A	See Graph(s)
Test method deviation: N/A		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Attenuator	EMITECH	SUB.V2-H	14495	13/01/2021	13/03/2022
Attenuator	EMITECH	SUB.V2-V	14496	13/01/2021	13/03/2022
Cable	SUCOFLEX	N-3m	14379	25/06/2019	25/08/2021
Cable	MegaPhase	N-3m	14852	30/10/2018	30/06/2021
Cable	SUCOFLEX	N-5,5m	14381	25/06/2019	25/08/2021
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Receiver	Rohde & Schwarz	FSW43	14830	29/07/2020	29/09/2021
Shielded enclosure	RAY PROOF	C.V2	1423	04/10/2019	04/12/2022
Software	Nexio		0000		
Thermohygrometer	Testo	608-H1	7562	25/01/2019	25/03/2021
Thermohygrometer	Bioblock Scientific	Météostar	0963	25/01/2019	25/03/2021

BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity

TEST SETUP PHOTO(S) - PSD / POSITION 1




TEST SETUP PHOTO(S) - PSD / POSITION 2




TEST SETUP PHOTO(S) - PSD / POSITION 3




TEST SETUP PHOTO(S) - PSD

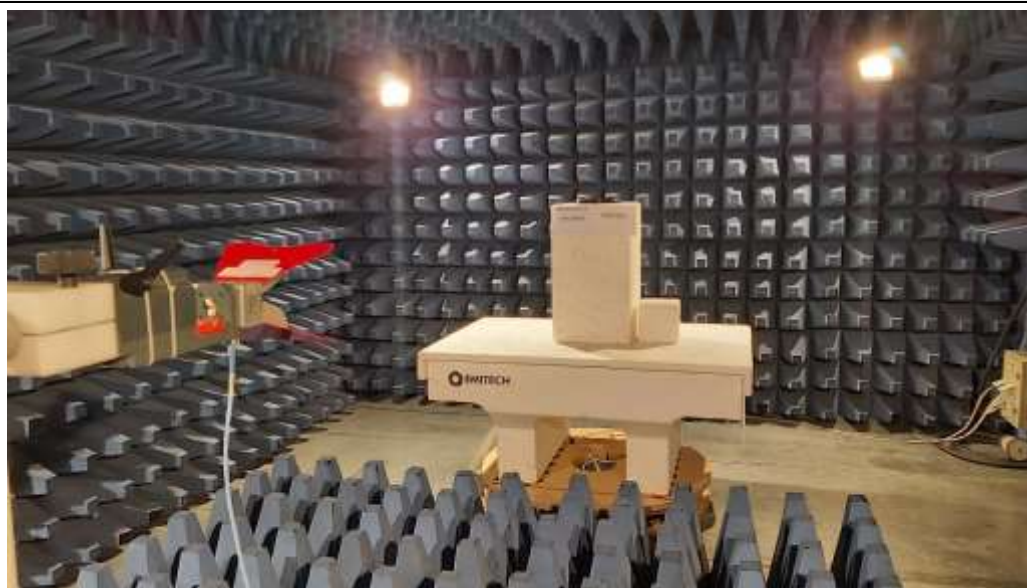


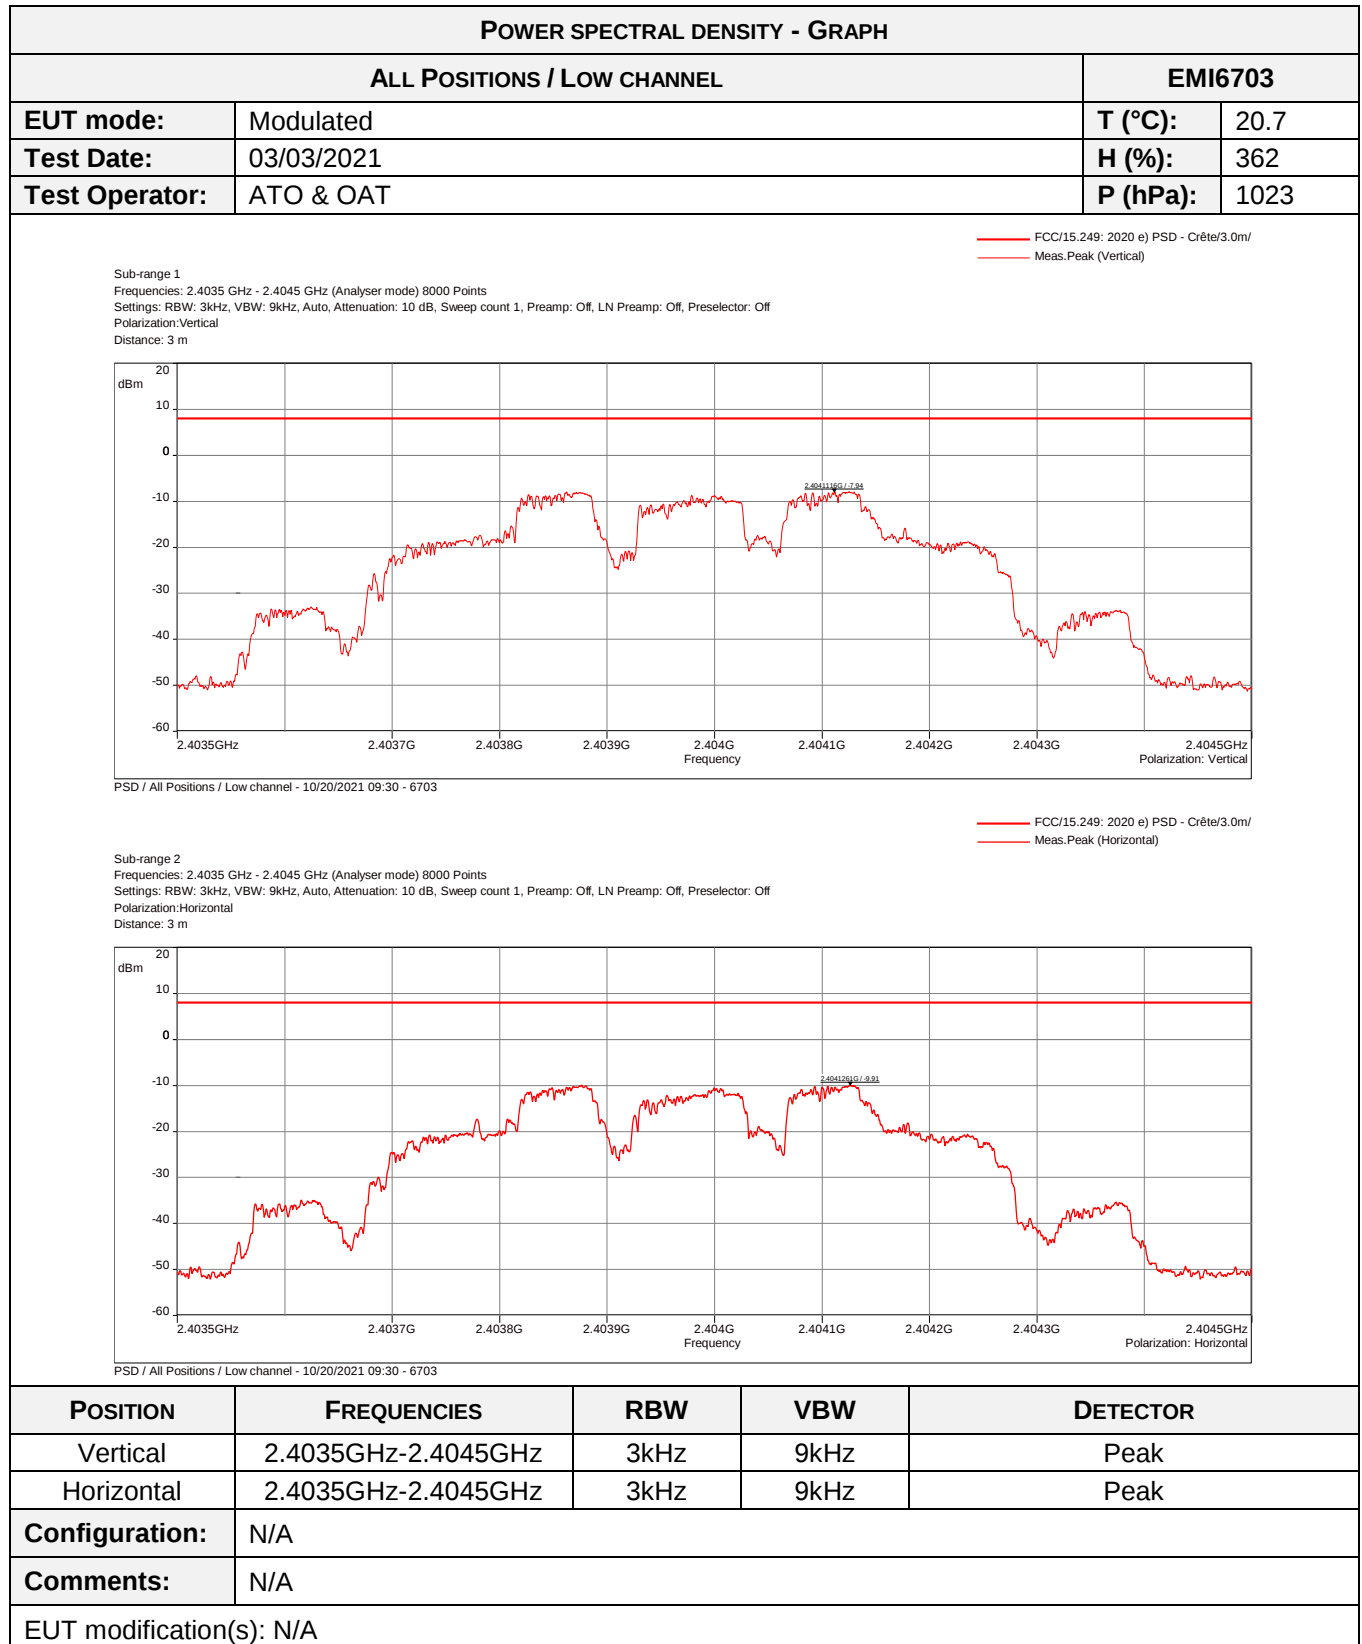

POWER SPECTRAL DENSITY - TABULATED RESULTS			
ALL POSITIONS / LOW CHANNEL			EMI6703
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2404.11	Vertical	-7.94	8
2404.12	Horizontal	-9.91	8

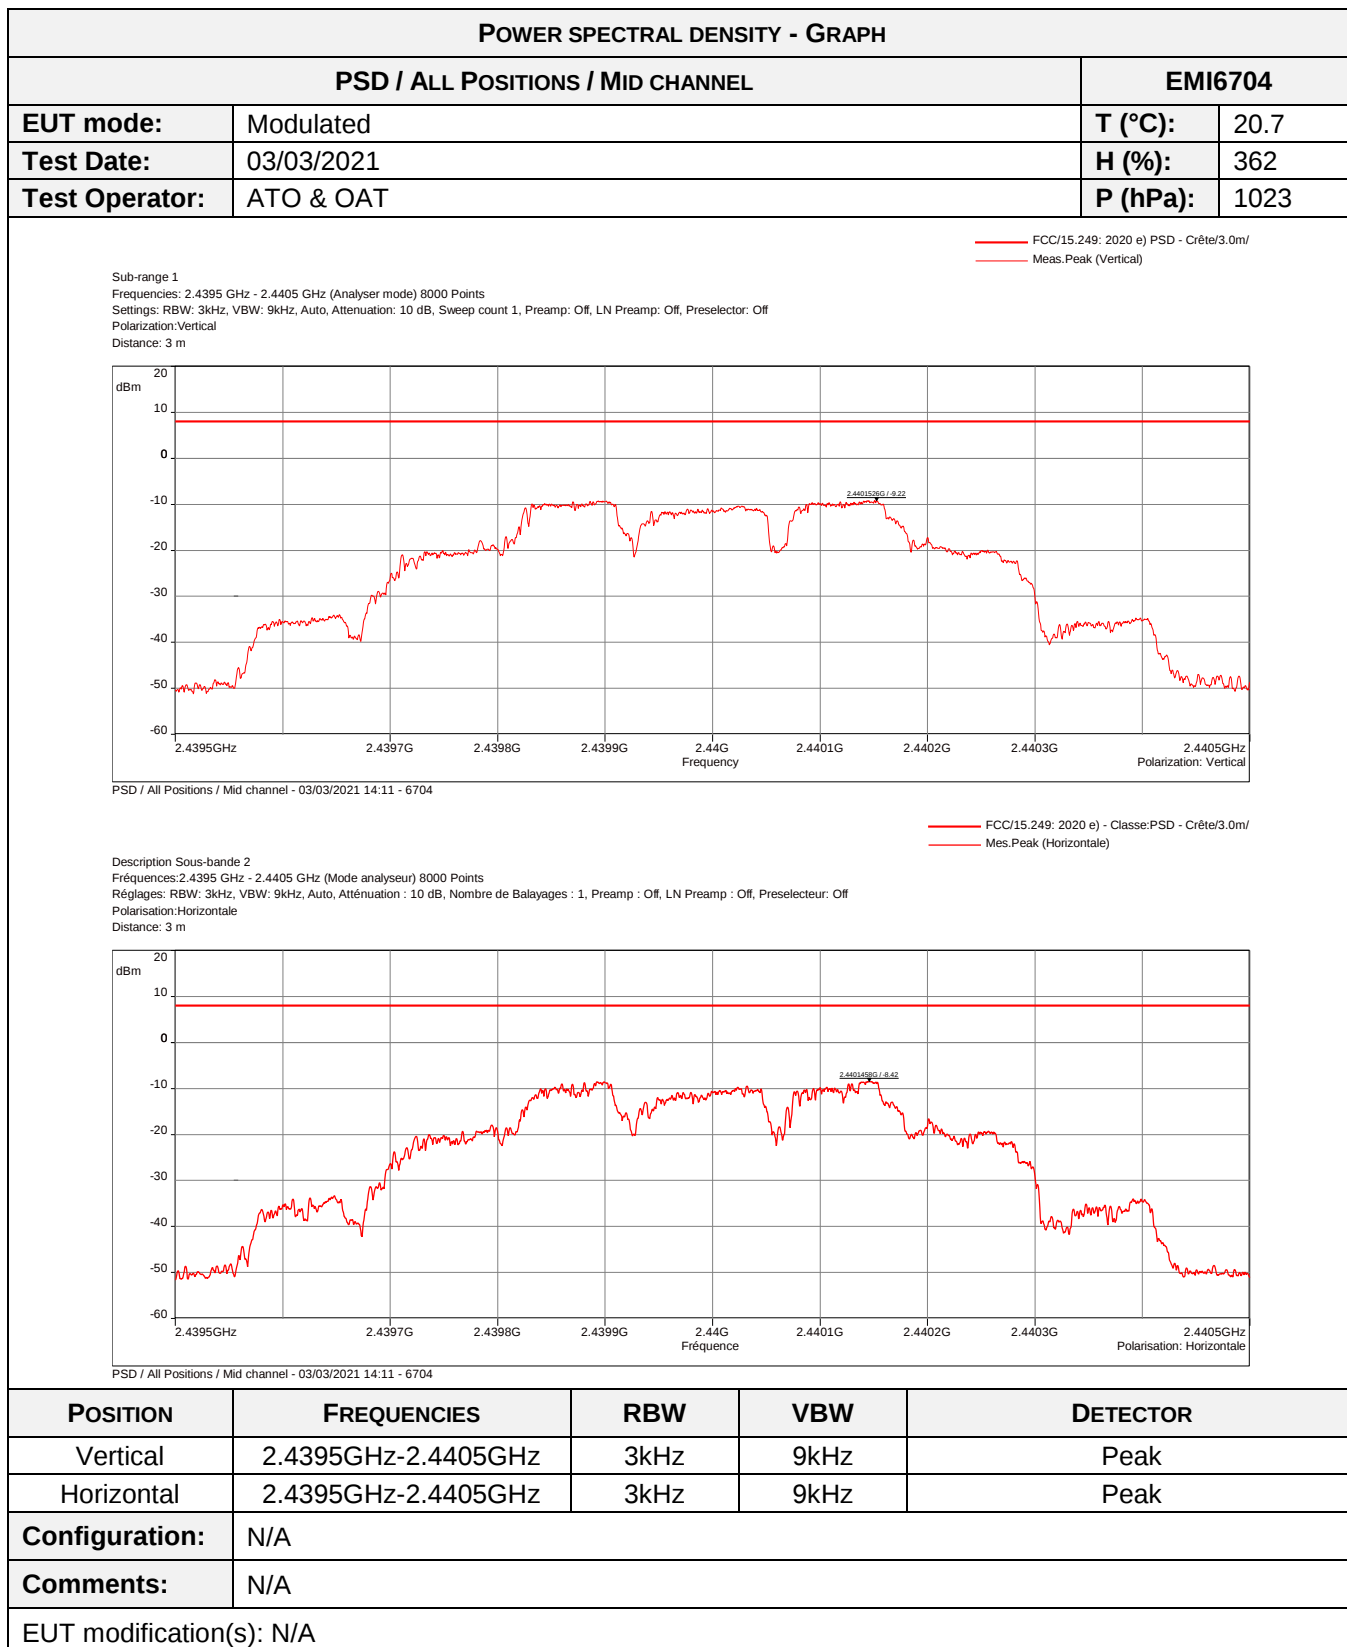

POWER SPECTRAL DENSITY - TABULATED RESULTS			
PSD / ALL POSITIONS / MID CHANNEL			EMI6704
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2440.15	Vertical	-9.22	8
2440.14	Horizontal	-8.42	8

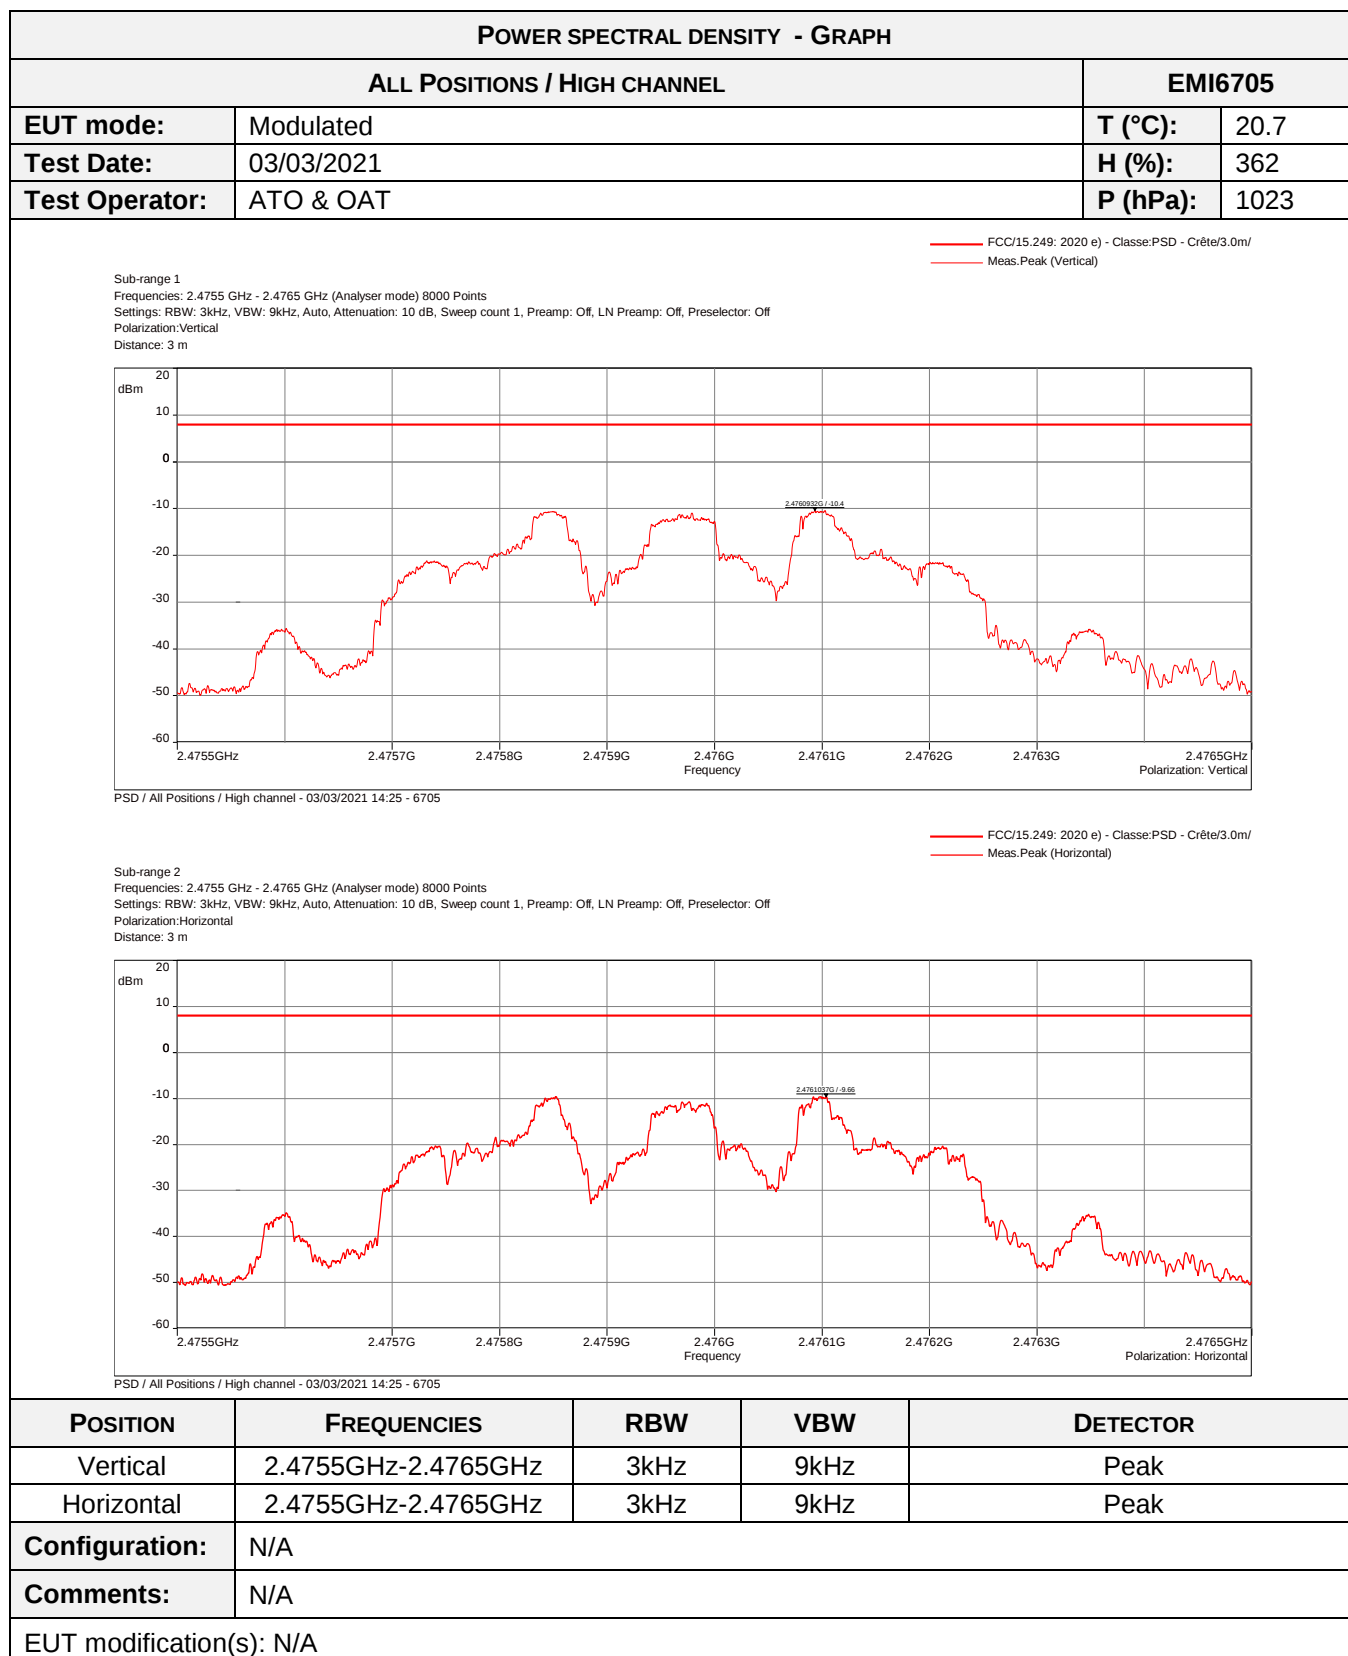

POWER SPECTRAL DENSITY - TABULATED RESULTS			
ALL POSITIONS / HIGH CHANNEL			EMI6705
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)
2476.09	Vertical	-10.4	8
2476.10	Horizontal	-9.66	8

8.7. Transmitter radiated spurious emissions at frequencies <30MHz

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	FCC part 15.109, 15.209, 15.205, 15.215 RSS-247, CNR Gen
General test setup: Spurious domain emission limits are limits on emissions at frequencies other than those of the carrier and sidebands associated with normal test modulation. EUT is set on an insulating support at 80cm above the ground reference plane. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3-meter in a anechoic chamber. The EUT was rotated 360° in order to maximize radiated levels. Test antenna was oriented in 3 axes (0°, 45° and 90°). Final measurements (quasi-peak) were then performed in a 10-meter Open Area Test Site that complies to CISPR 16 in the same measurement conditions. All frequencies were investigated, where applicable.	

TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
Tx Mode / Low channel / 0° - Position 1	9kHz-30MHz	15.209	EMI5053	PASS
Tx Mode / Low channel / 45° - Position 1	9kHz-30MHz	15.209	EMI5054	PASS
Tx Mode / Low channel / 90° - Position 1	9kHz-30MHz	15.209	EMI5055	PASS
Tx Mode / Low channel / 0° - Position 2	9kHz-30MHz	15.209	EMI5056	PASS
Tx Mode / Low channel / 45° - Position 2	9kHz-30MHz	15.209	EMI5057	PASS
Tx Mode / Low channel / 90° - Position 2	9kHz-30MHz	15.209	EMI5058	PASS
Tx Mode / Low channel / 0° - Position 3	9kHz-30MHz	15.209	EMI5059	PASS
Tx Mode / Low channel / 45° - Position 3	9kHz-30MHz	15.209	EMI5060	PASS
Tx Mode / Low channel / 90° - Position 3	9kHz-30MHz	15.209	EMI5061	PASS
Tx Mode / High channel / 0° - Position 1	9kHz-30MHz	15.209	EMI5062	PASS
Tx Mode / High channel / 45° - Position 1	9kHz-30MHz	15.209	EMI5063	PASS
Tx Mode / High channel / 90° - Position 1	9kHz-30MHz	15.209	EMI5064	PASS
Tx Mode / High channel / 0° - Position 2	9kHz-30MHz	15.209	EMI5065	PASS
Tx Mode / High channel / 45° - Position 2	9kHz-30MHz	15.209	EMI5066	PASS
Tx Mode / High channel / 90° - Position 2	9kHz-30MHz	15.209	EMI5067	PASS
Tx Mode / High channel / 0° - Position 3	9kHz-30MHz	15.209	EMI5068	PASS
Tx Mode / High channel / 45° - Position 3	9kHz-30MHz	15.209	EMI5069	PASS
Tx Mode / High channel / 90° - Position 3	9kHz-30MHz	15.209	EMI5070	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(es)
Relative Humidity	20 to 75 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
Test method deviation: N/A		
Supplementary information: From 9 kHz to 30MHz: limit indicated on the curves is calculated with 40 dB/decade extrapolation factor and 51.5 dB conversion factor. From 30MHz to 1GHz Quasi peak limit provided is the limit given in §15.209. Above 1GHz average limit in restricted bands §15.205 is 54dBµV/m. Otherwise, the limit is 20dB under carrier emission level at 3m without averaging.		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	Rohde & Schwarz	HFH2-Z2	5825	24/04/2020	24/06/2022
Cable	MegaPhase	N-3m	14852	29/10/2018	29/12/2020
Cable	SUCOFLEX	N-6,5m	14380	25/07/2019	25/09/2021
Cable	MegaPhase	N-8m	15813	12/11/2018	12/01/2021
Receiver	Rohde & Schwarz	FPL1003	16027	14/08/2020	14/10/2021
Shielded enclosure	COMTEST	SAC 3m	14494	02/10/2019	02/12/2022
Software	Nexio		0000		
Thermohygrometer	Testo	608-H1	7561	25/01/2019	25/03/2021
Thermohygrometer	Bioblock Scientific	Météostar	0963	25/01/2019	25/03/2021

BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES <30MHz - TABULATED RESULTS				
Tx MODE / LOW CHANNEL - ALL POSITIONS (OATS)				
Frequency (kHz)	Preliminary measurement (Pk) (dBμA/m)	Final measurement (Avg) (dBμA/m)	Limit Avg (dBμA/m)	Margin (Avg-Limit)
12.322	52.62	23.50	53.60	-30.10
20.533	42.33	15.62	48.74	-33.12
28.762	40.61	13.83	45.94	-32.11
36.973	25.12	8.02	43.82	-35.80
53.412	32.11	5.92	40.70	-34.78
61.623	22.85	-0.99	39.34	-40.33
69.852	26.45	0.03	38.29	-38.25
102.730	21.64	-4.75	34.93	-39.68
Supplementary information: Spurious which has more than 40 dB of margin compared to the applicable limit is not necessarily reported.				

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES <30MHz - TABULATED RESULTS				
Tx MODE / HIGH CHANNEL - ALL POSITIONS (OATS)				
Frequency (kHz)	Preliminary measurement (Pk) (dBμA/m)	Final measurement (Avg) (dBμA/m)	Limit Avg (dBμA/m)	Marging (Avg-Limit)
45.201	51.71	25.19	42.08	-16.89
135.592	32.70	6.73	32.54	-25.81
225.961	24.00	-0.30	28.11	-28.41
316.347	18.29	-2.40	25.19	-27.59
Supplementary information: Spurious which has more than 30 dB of margin compared to the applicable limit is not necessarily reported. The frequency 45.201 kHz is the utile signal.				

TEST SETUP PHOTO(S) - Tx Mode - POSITION 1



TEST SETUP PHOTO(S) - Tx Mode – POSITION 2



TEST SETUP PHOTO(S) - Tx MODE - POSITION 3





TEST SETUP PHOTO(S) – Tx MODE





TEST SETUP PHOTO(S) - (OATS) - For FINAL MEASUREMENT




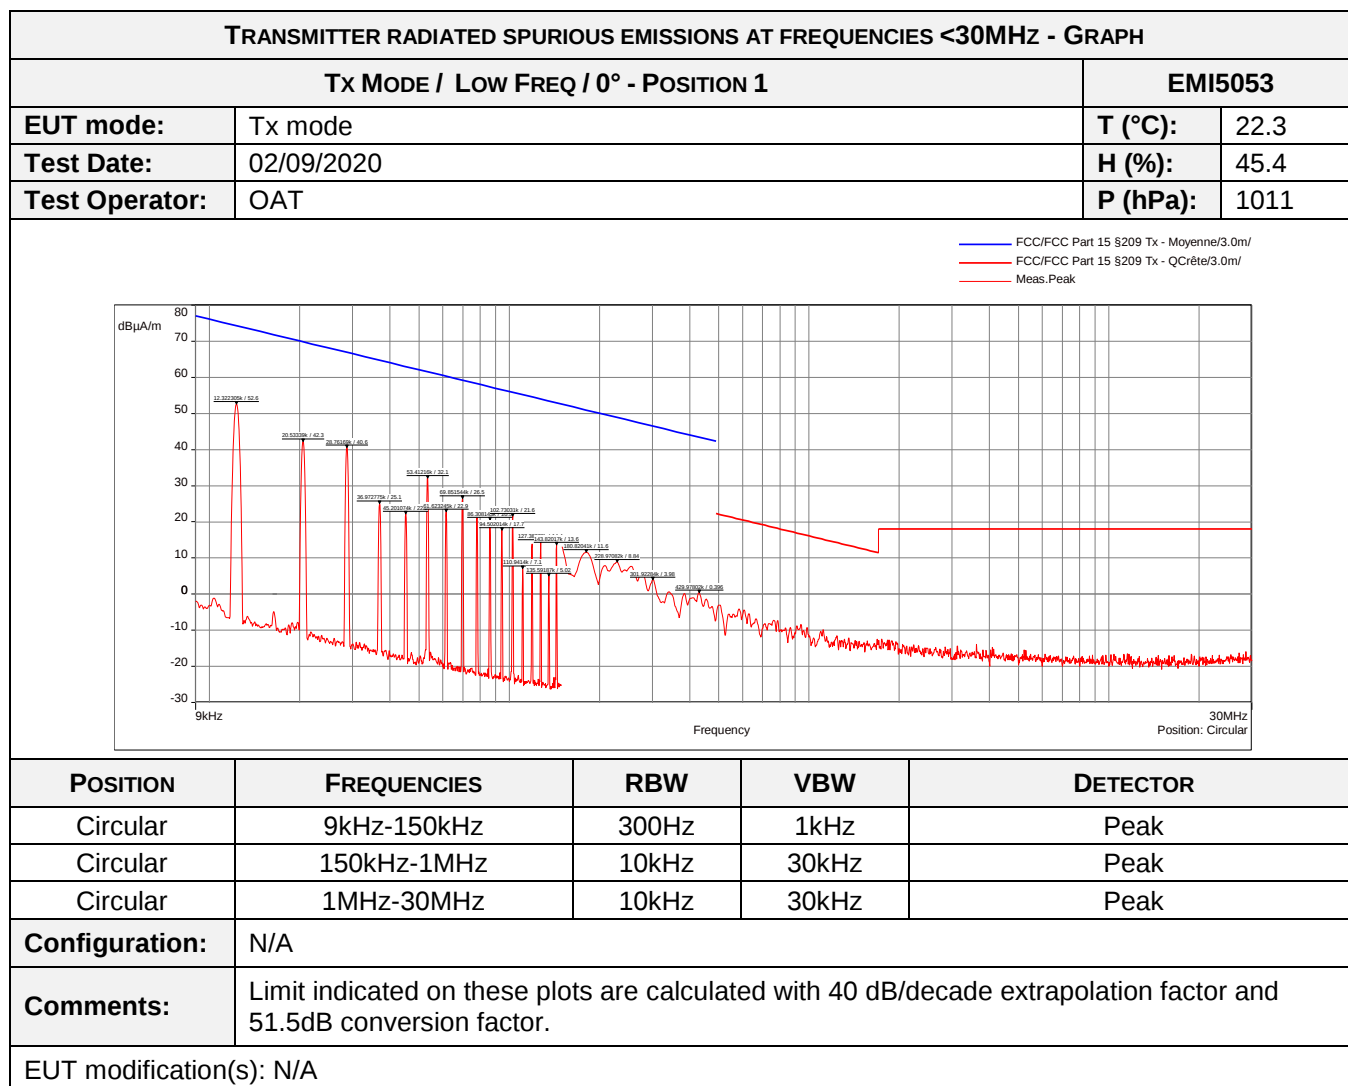


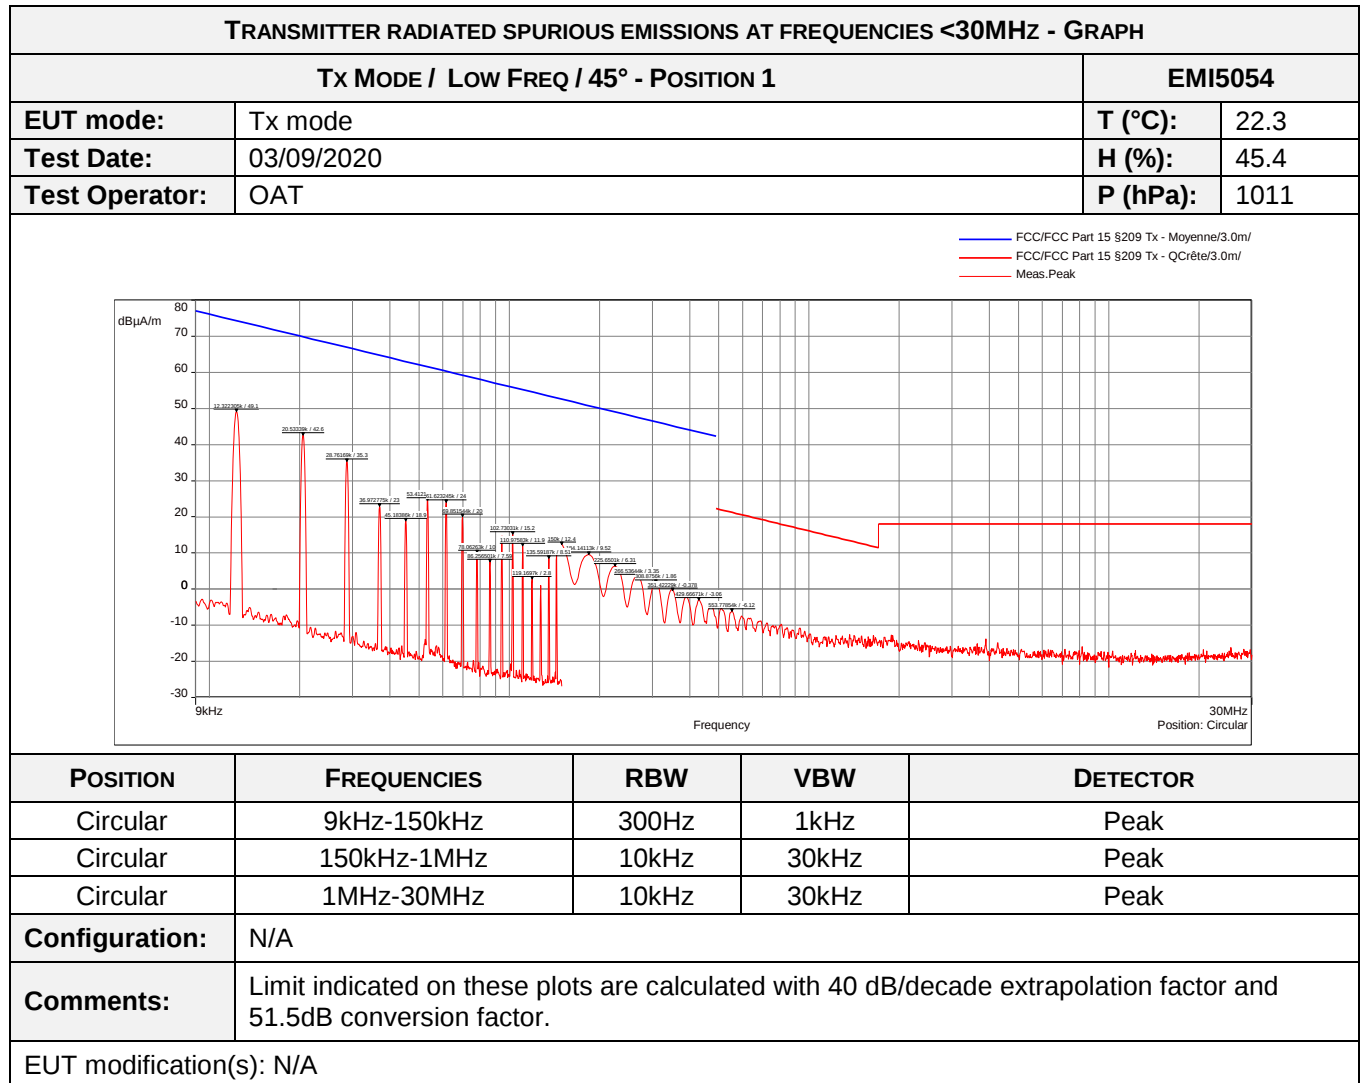


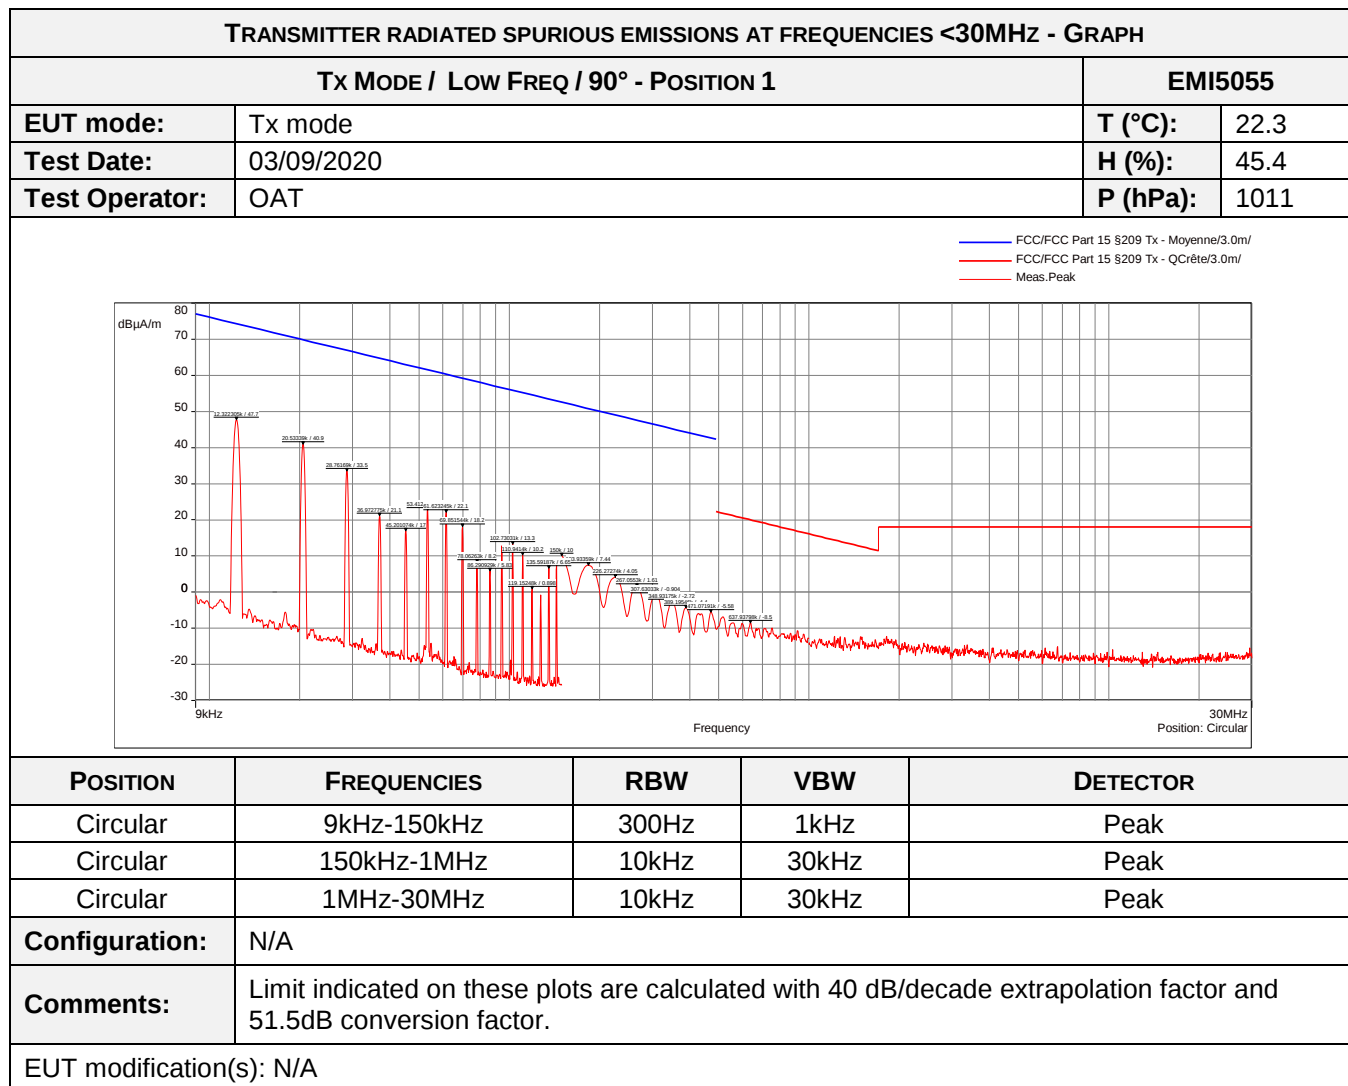

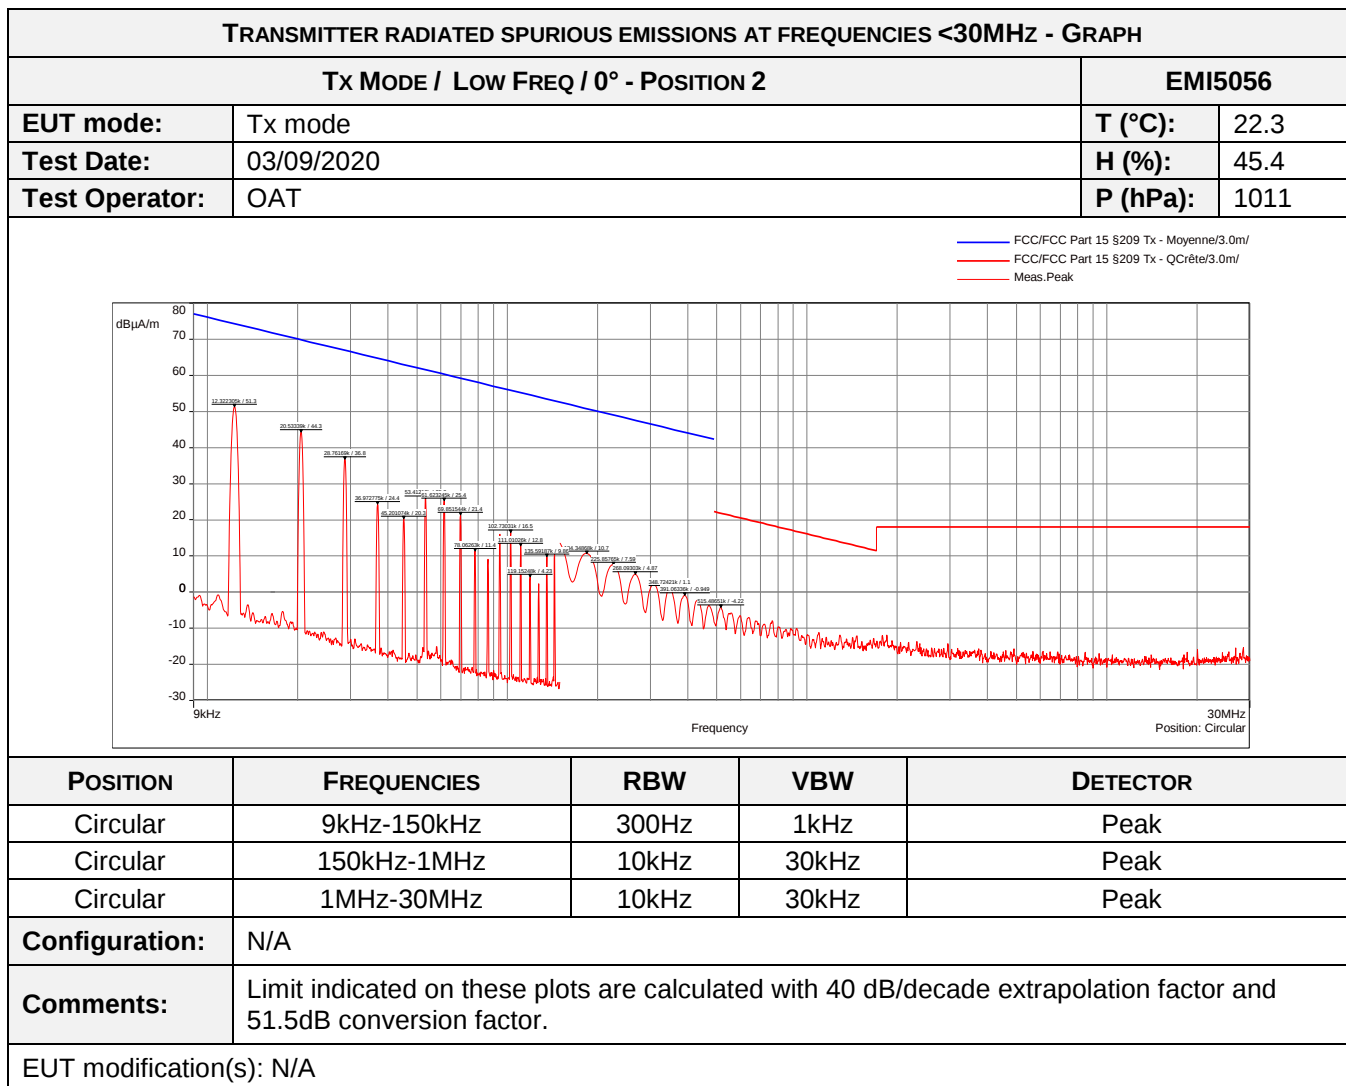


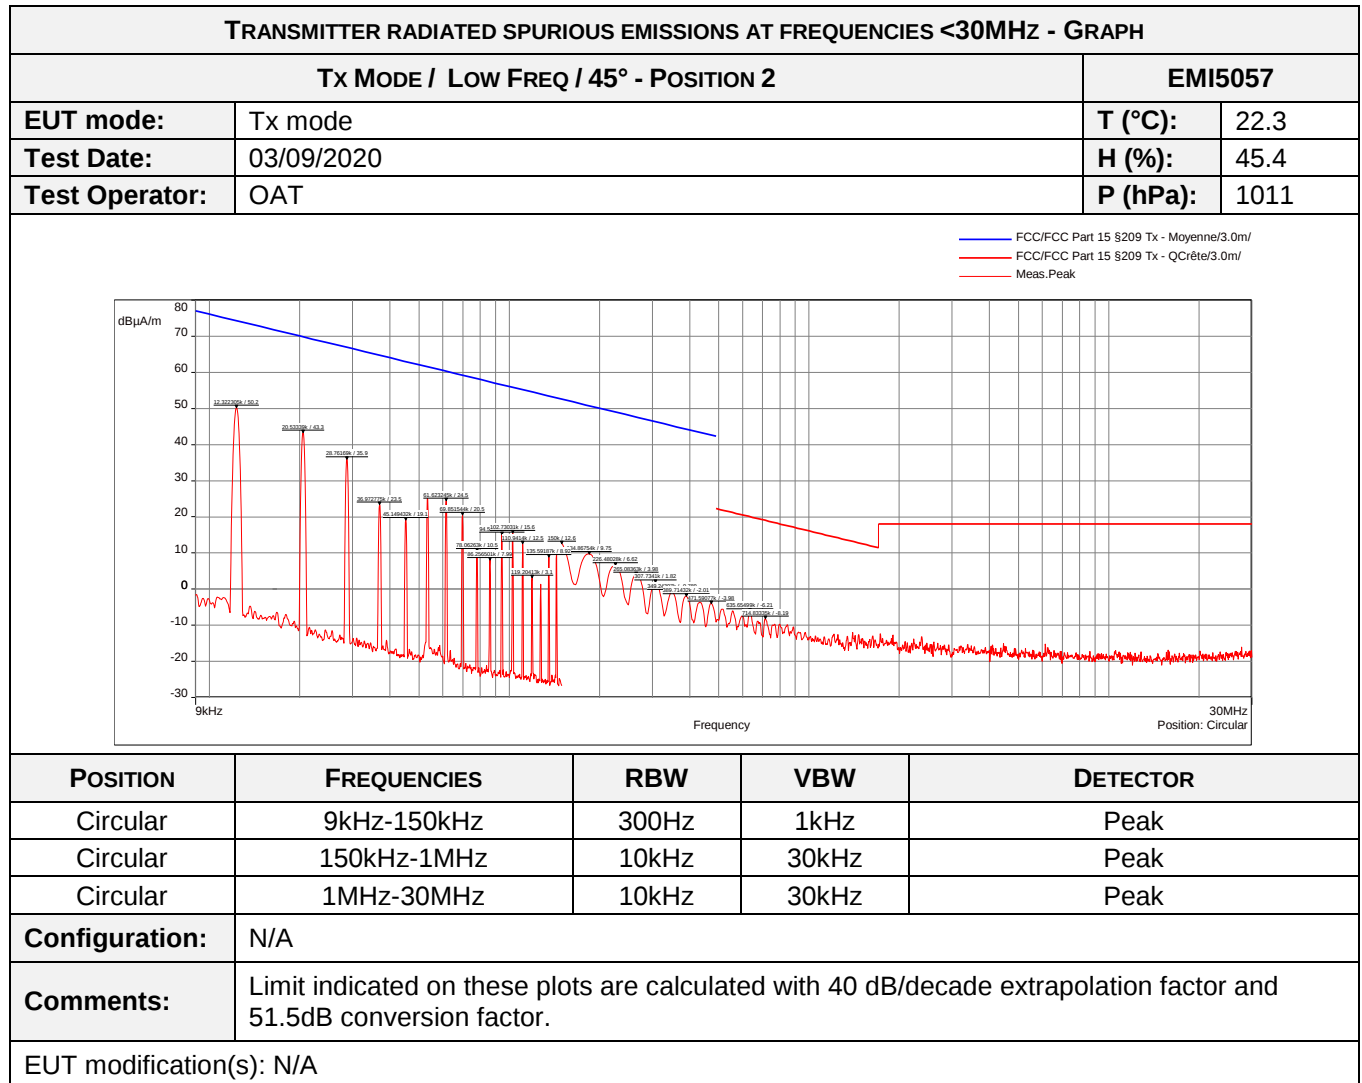


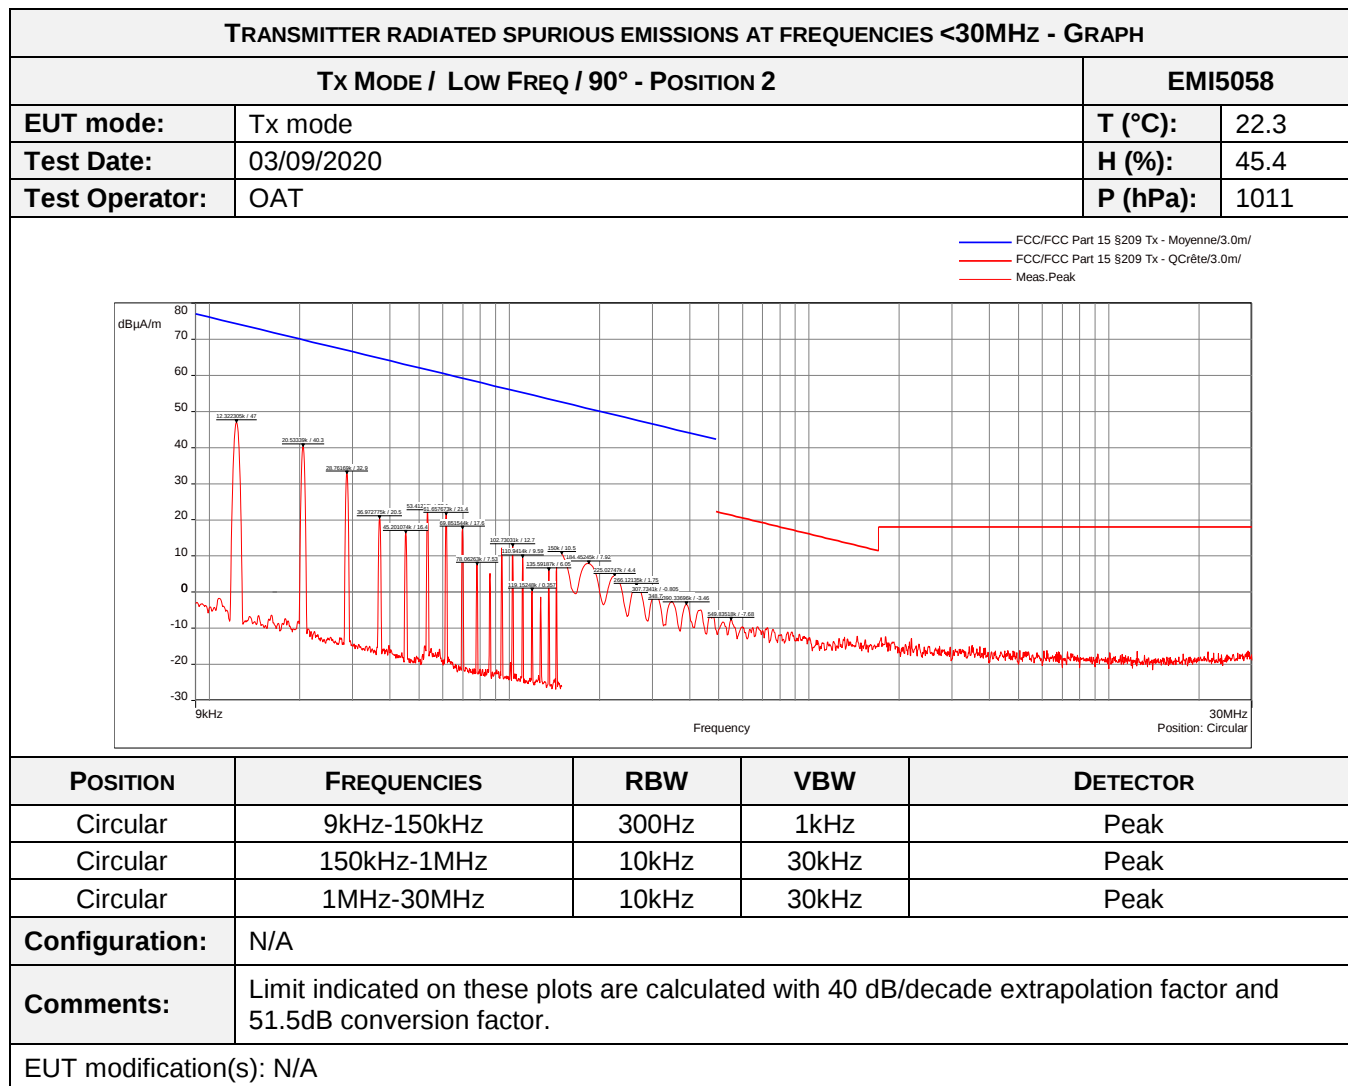


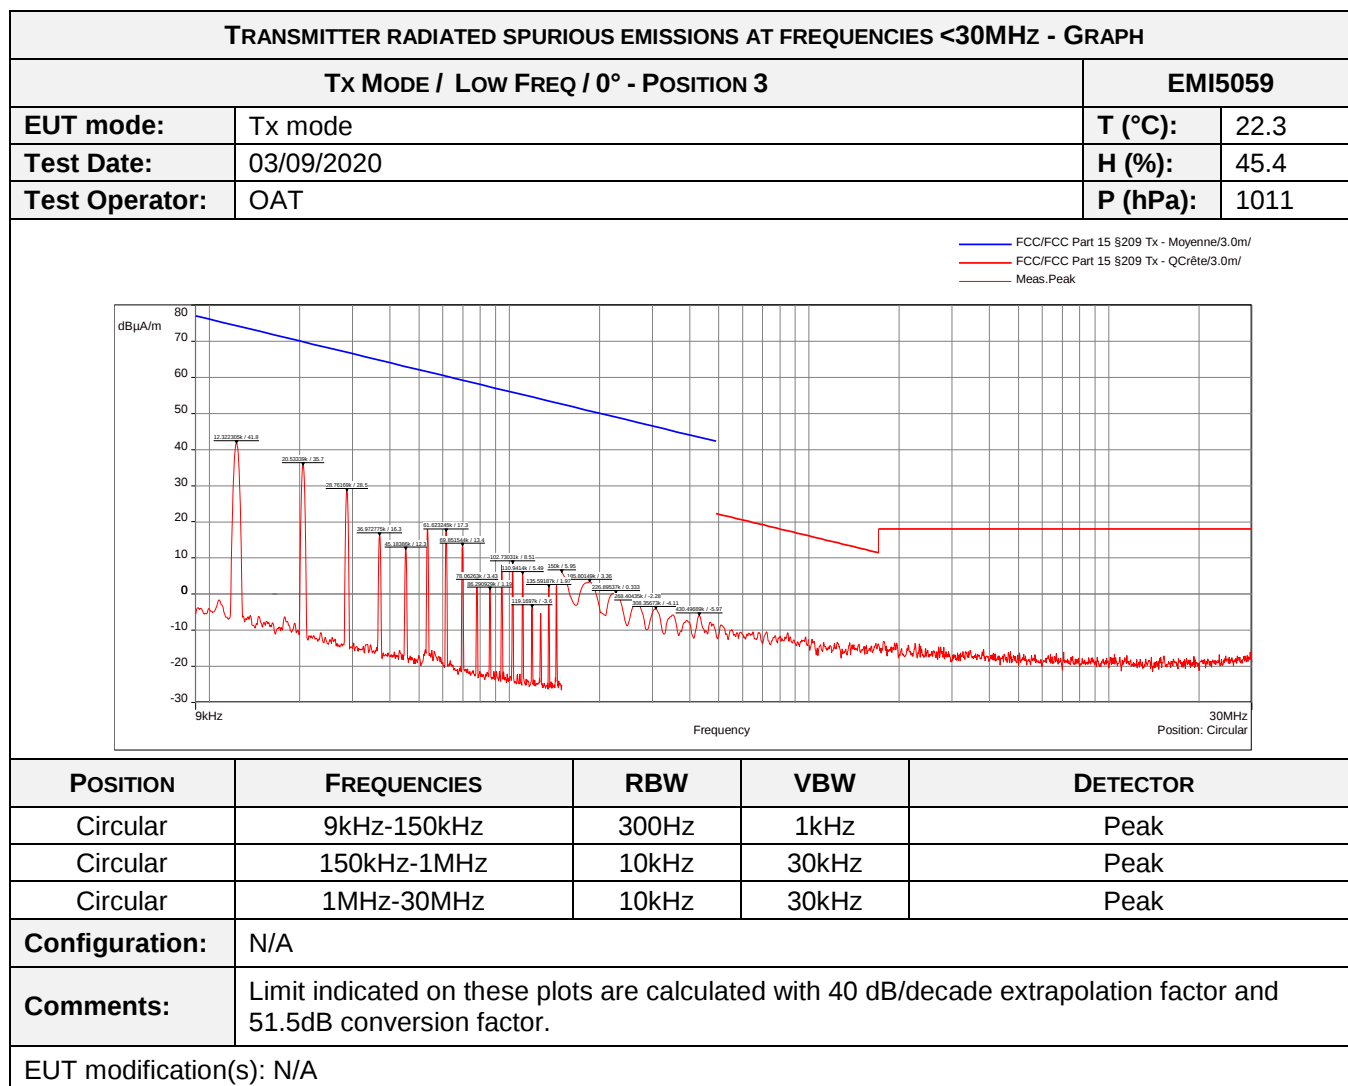



Page 66 on 120

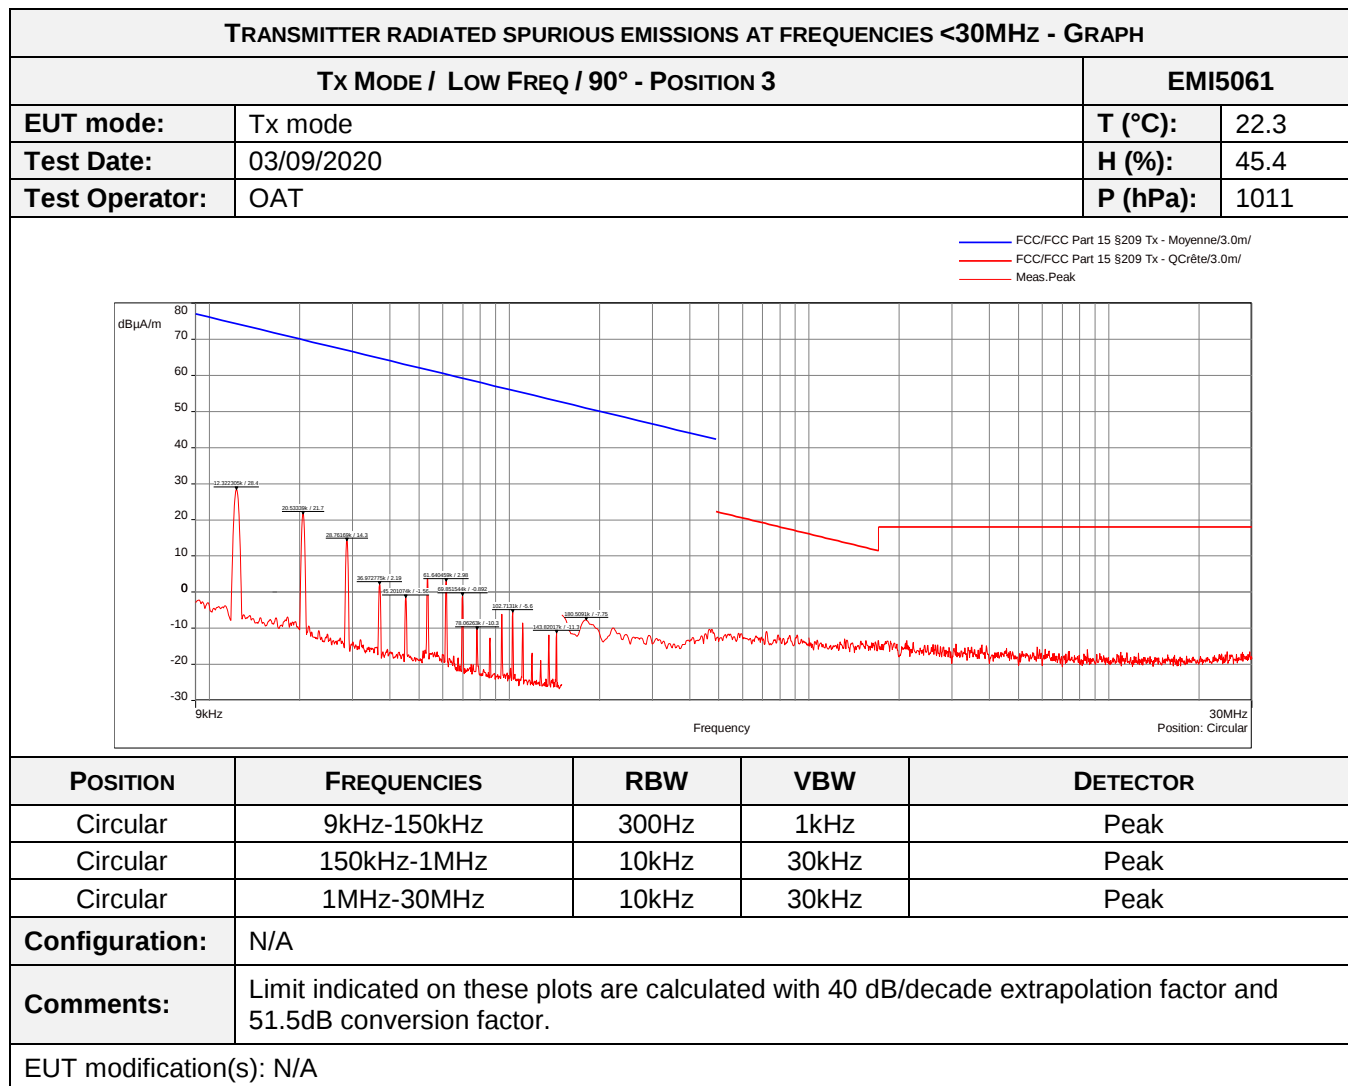


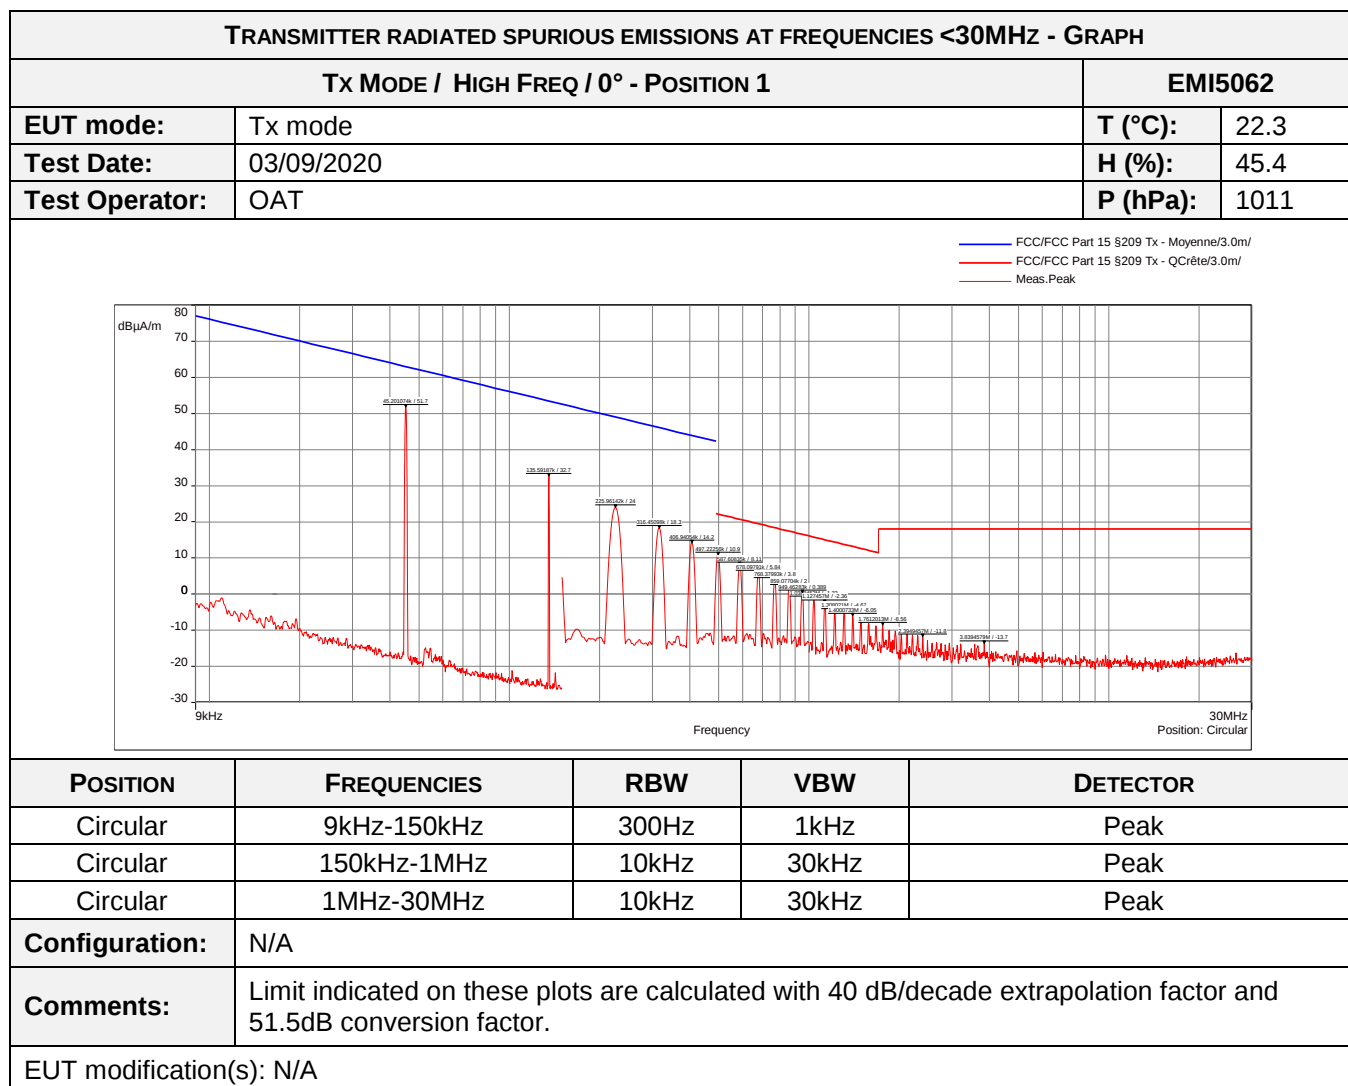


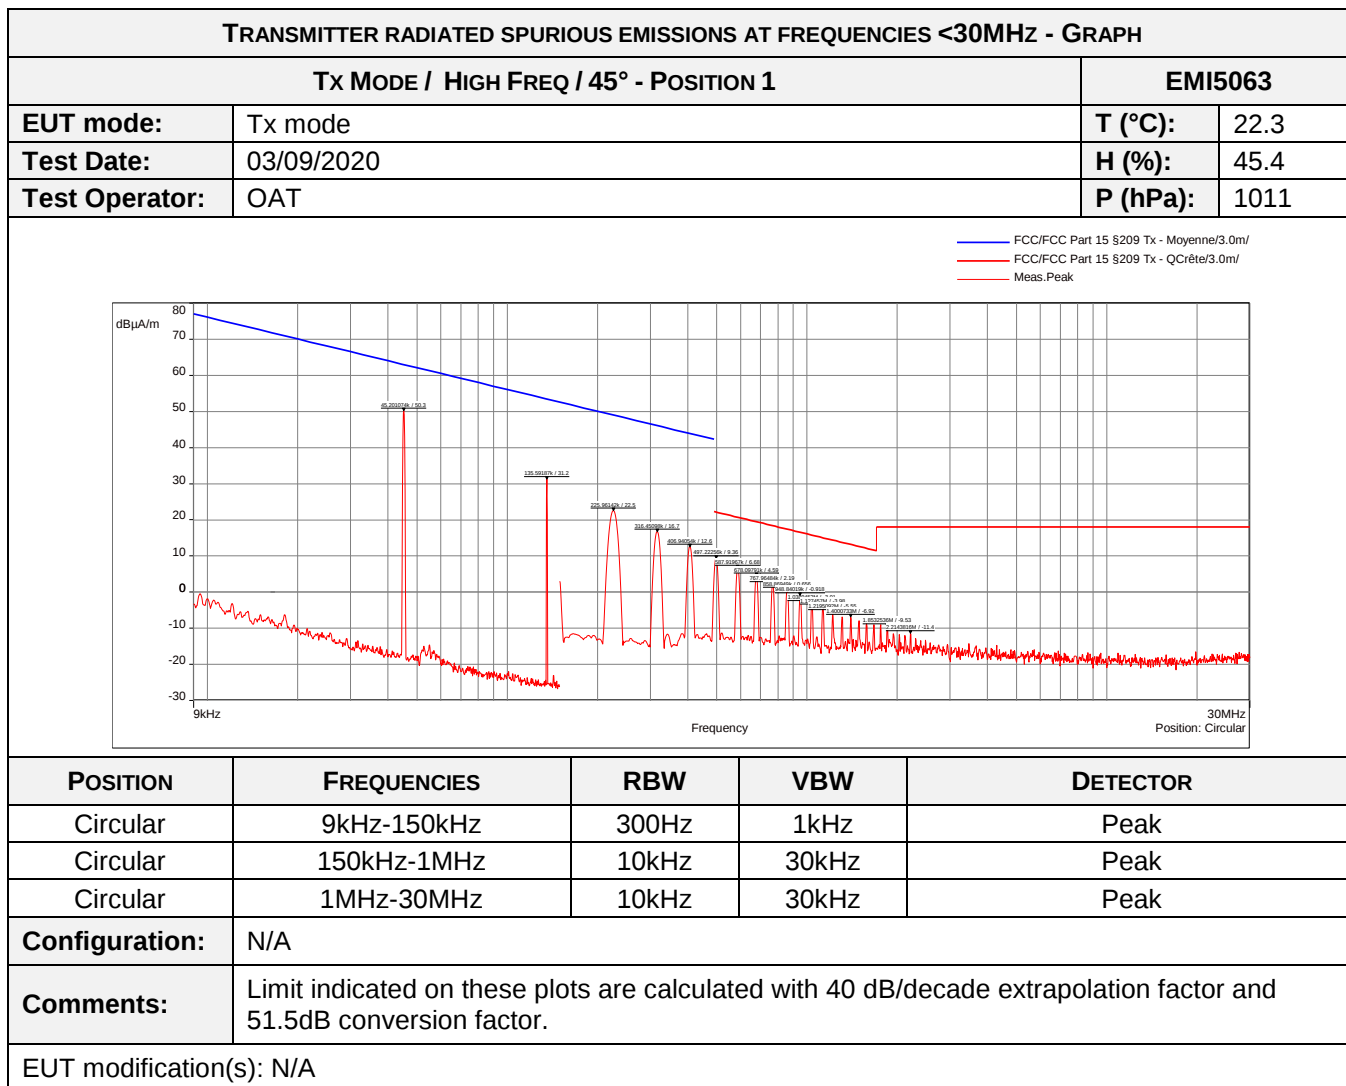

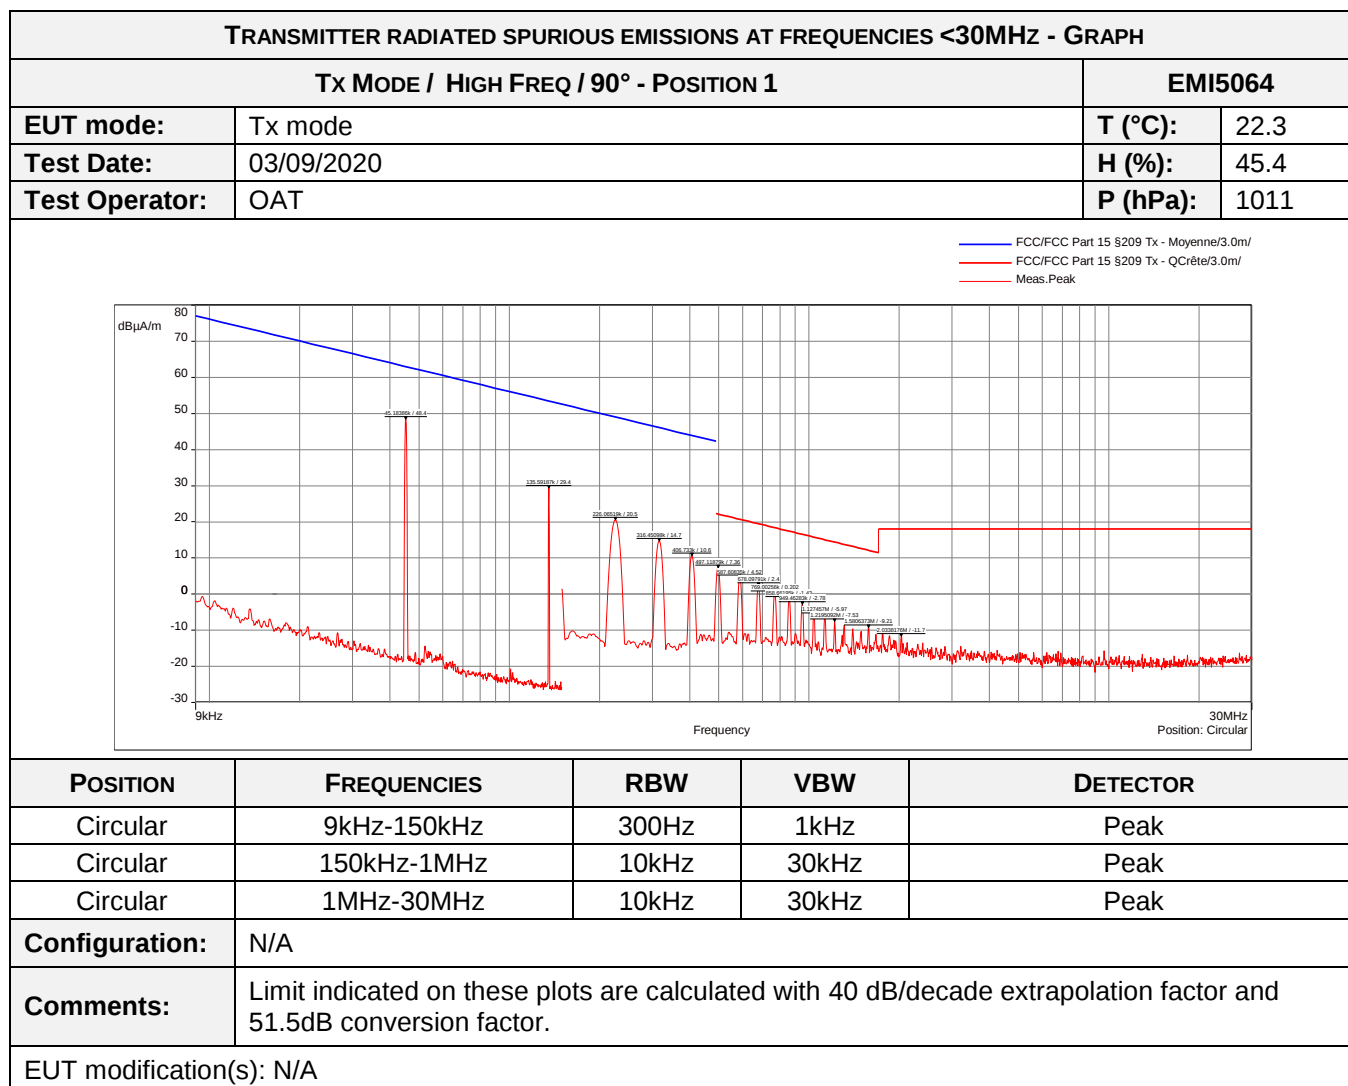


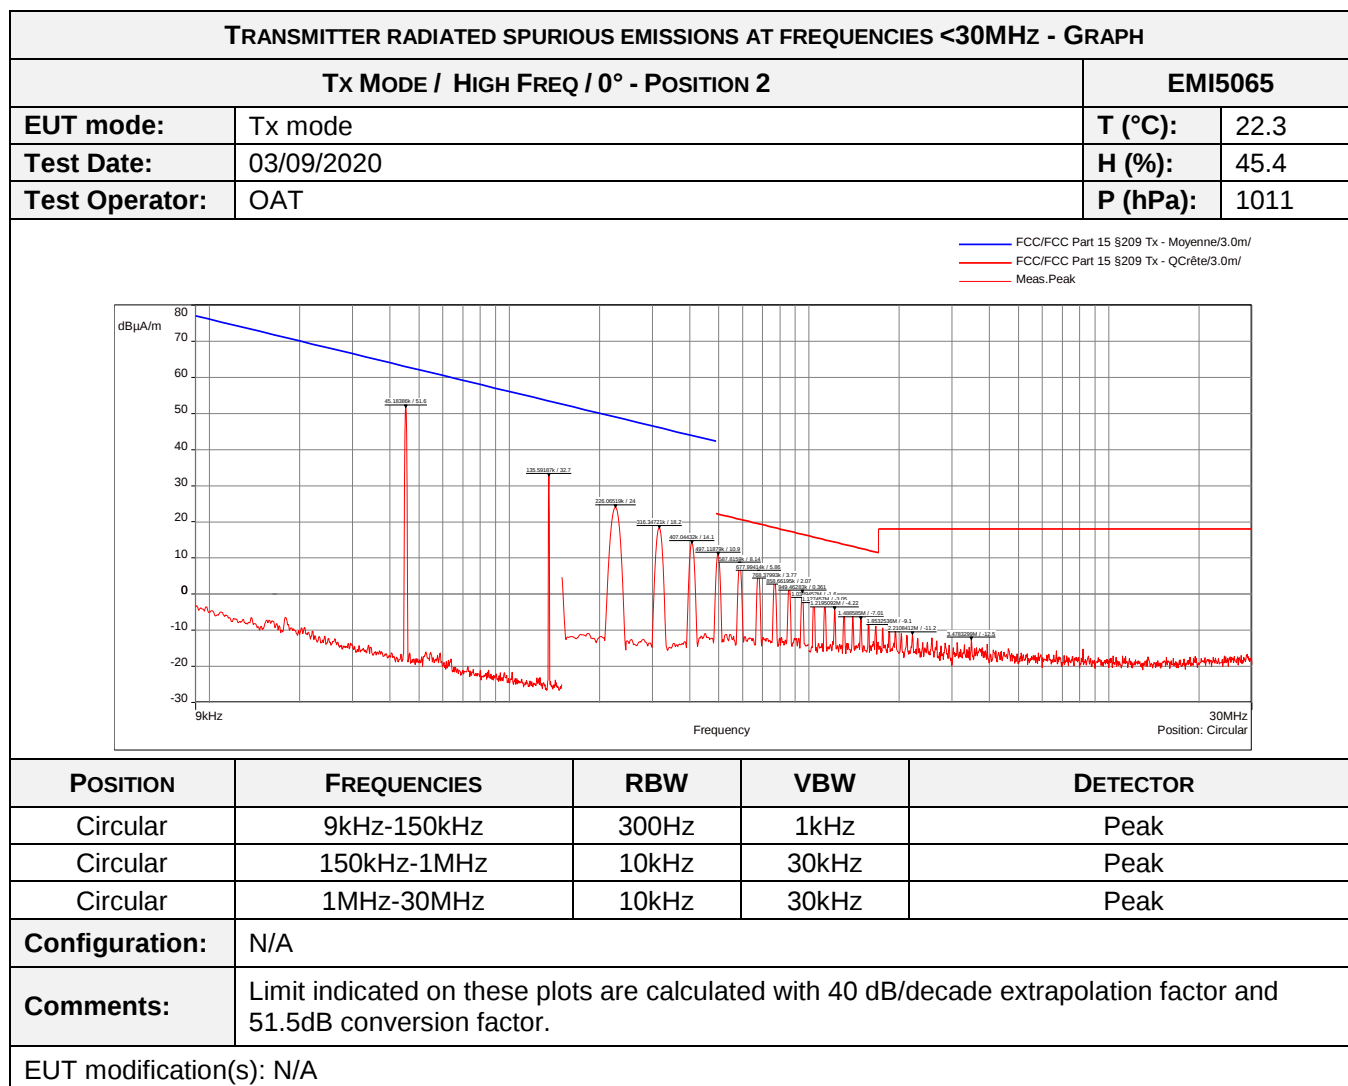


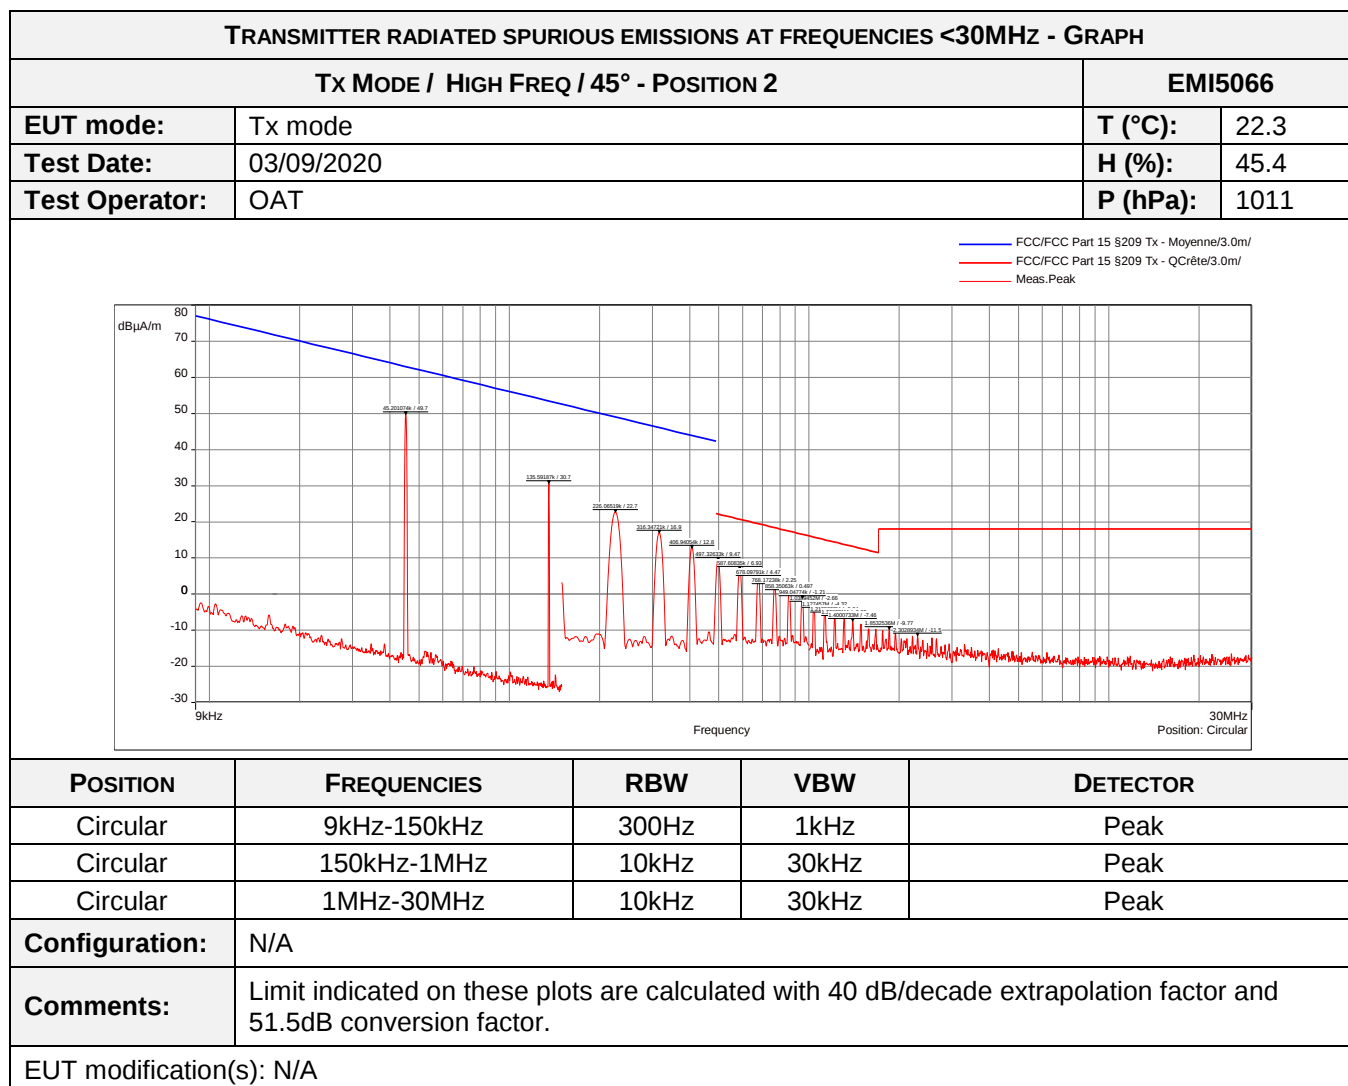

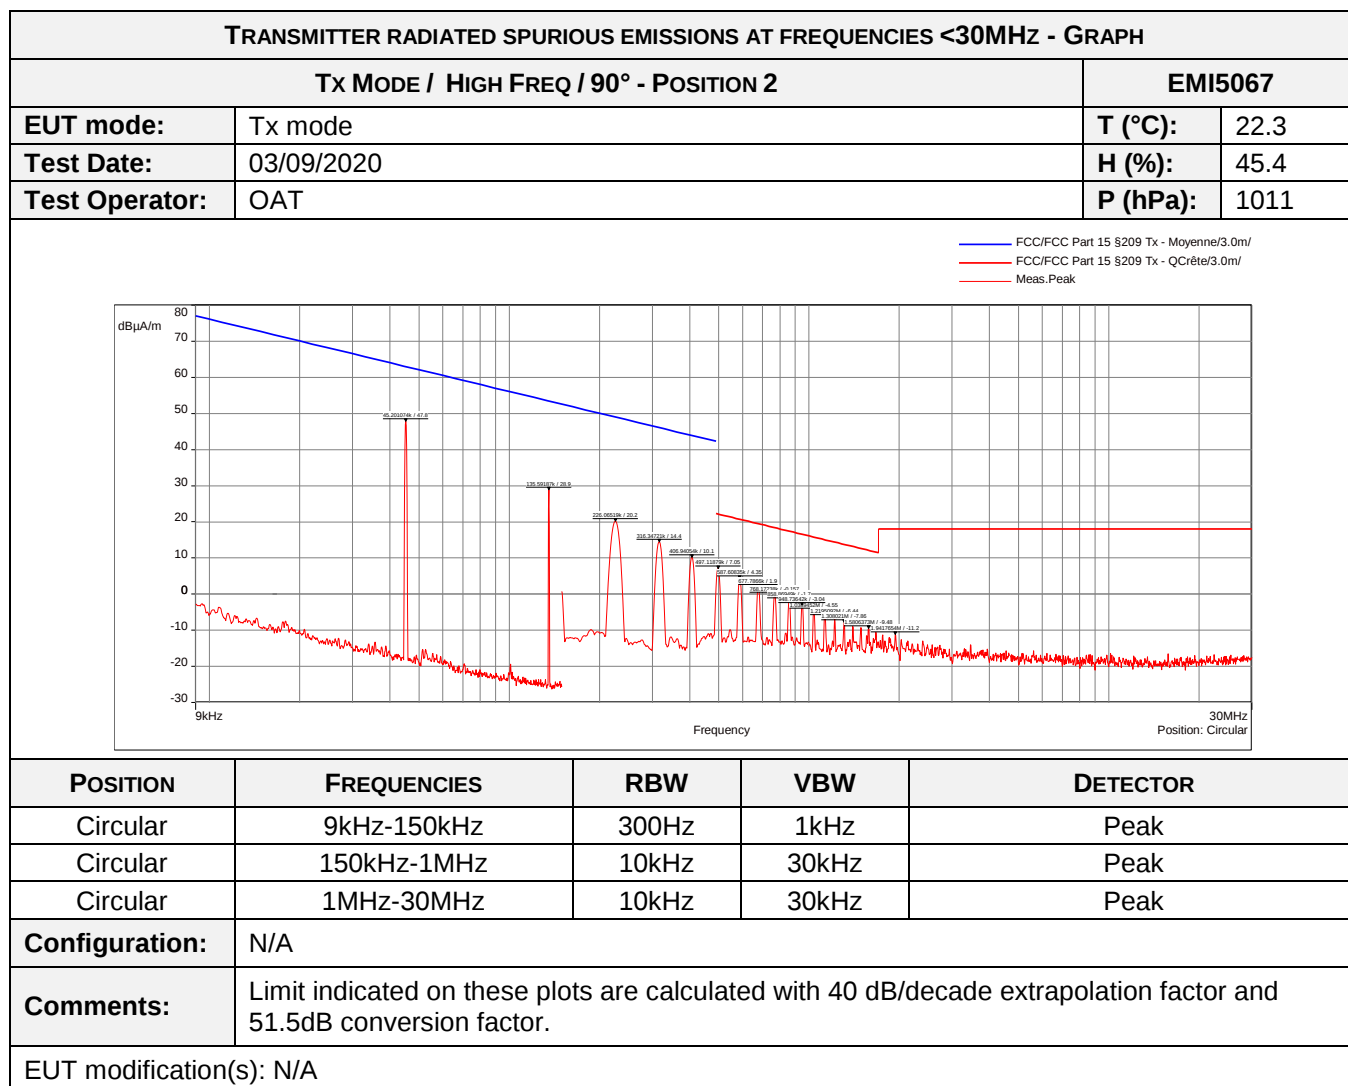

Page 74 on 120

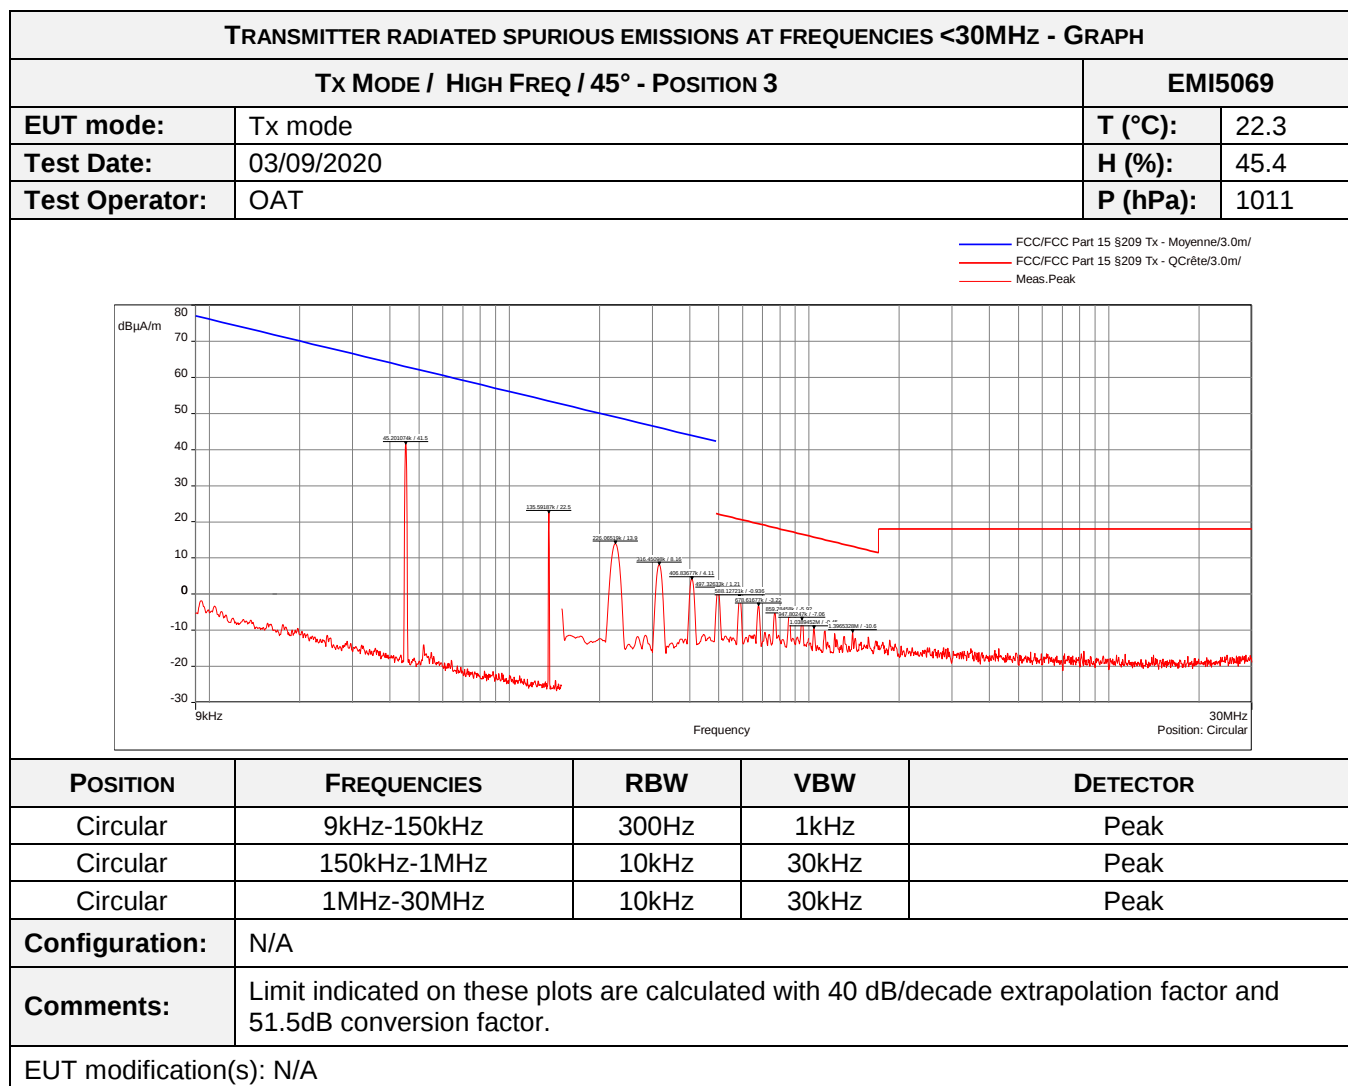

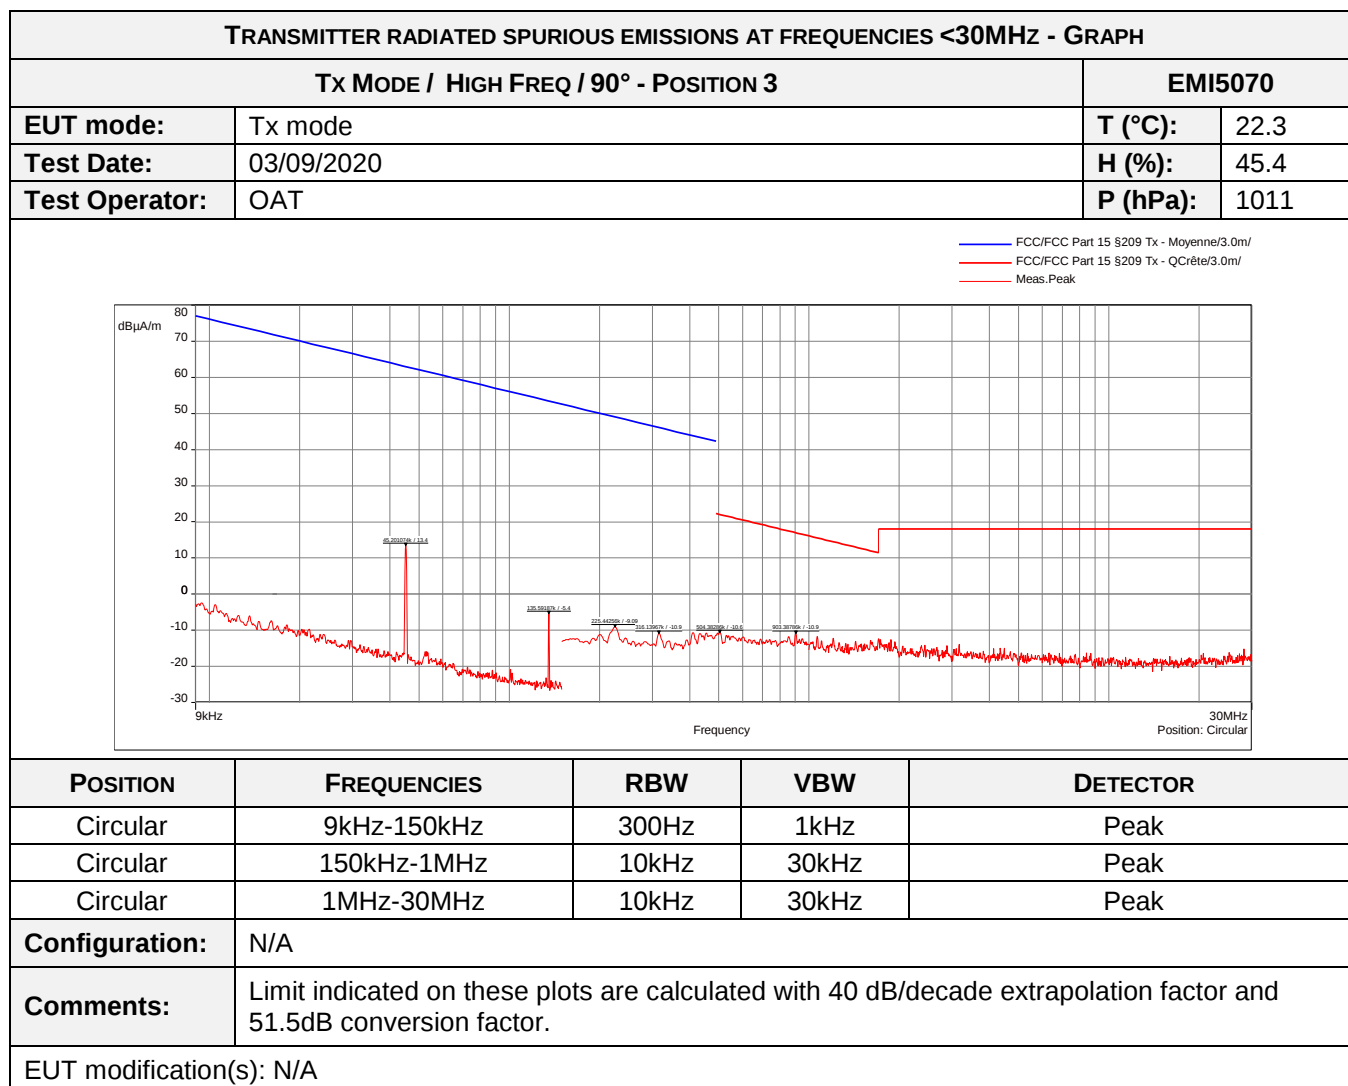

8.8. Transmitter radiated spurious emissions at frequencies >30MHz

Reference standard:	FCC part 15 Radio part 15.209 & CNR-Gen
Test method:	FCC part 15.109, 15.209, 15.205, 15.215, CNR-Gen
General test setup: EUT is set on an insulating support at 80cm above the ground reference plane. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3-meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak or average) were then performed in a semi-anechoic chamber or Open Area Test Site that complies to CISPR 16. The EUT was rotated 360° about its azimuth and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated, where applicable. For portable equipments a research of maximum level is done on the 3 axes. Only the highest levels are recorded.	

TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
Tx mode / All Freq - All Positions	30MHz-1GHz	15.209	EMI5042	PASS
Charging + Tx mode / All Positions / All Freq	30MHz-1GHz	15.209	EMI6983	PASS
Tx mode / All Positions / Low channel / 1GHz to 18GHz	1GHz-18GHz	15.209	EMI6738	PASS
Tx mode / All Positions / Mid channel / 1GHz to 18GHz	1GHz-18GHz	15.209	EMI6741	PASS
Tx mode / All Positions / High channel / 1GHz to 18GHz	1GHz-18GHz	15.209	EMI6742	PASS
Charging + Tx mode / All Positions / Low channel / 1GHz to 18GHz	1GHz-18GHz	15.209	EMI7038	PASS
Charging + Tx mode / All Positions / Mid channel / 1GHz to 18GHz	1GHz-18GHz	15.209	EMI7047	PASS
Charging + Tx mode / All Positions / High channel / 1GHz to 18GHz	1GHz-18GHz	15.209	EMI7048	PASS
Tx mode / All Positions / Low channel / 18GHz to 26.5GHz	18GHz-26.5GHz	15.209	EMI6764	PASS
Tx mode / All Positions / Mid channel / 18GHz to 26.5GHz	18GHz-26.5GHz	15.209	EMI6765	PASS
Tx mode / All Positions / High channel / 18GHz to 26.5GHz	18GHz-26.5GHz	15.209	EMI6768	PASS
Charging + Tx mode / All Positions / Low channel / 18GHz to 26.5GHz	18GHz-26.5GHz	15.209	EMI7271	PASS
Charging + Tx mode / All Positions / Mid channel / 18GHz to 26.5GHz	18GHz-26.5GHz	15.209	EMI7272	PASS
Charging + Tx mode / All Positions / High channel / 18GHz to 26.5GHz	18GHz-26.5GHz	15.209	EMI7273	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(s)
Relative Humidity	20 to 75 %	See Graph(s)
Atmospheric pressure	N/A	See Graph(s)
Test method deviation: N/A		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Antenna	ETS lindgren	3160-09	14690	26/09/2017	26/05/2021
Antenna	Electro Metrics	BIA-30HF	0824	13/06/2018	13/08/2021
Antenna	Rohde & Schwarz	HL223	3126	13/06/2018	13/08/2021
Cable	MegaPhase	F135N1N28	16664	25/10/2019	25/12/2021
Cable	MegaPhase	F135N1N28	16666	25/10/2019	25/12/2021
Cable	JYE BAO	K30K30-5003-40G1	14887	25/06/2019	25/08/2021
Cable	Huber + Suhner	K-5m	14460	25/06/2019	25/08/2021
Cable	C&C	N-1.5m	10554	20/12/2019	20/02/2022
Cable	/	N-1m	3625	27/01/2021	27/03/2023
Cable	/	N-1m	3626	27/01/2021	27/03/2023
Cable	SUCOFLEX	N-3m	14379	25/06/2019	25/08/2021
Cable	MegaPhase	N-3m	14852	29/10/2018	29/12/2020
Cable	MegaPhase	N-3m	14852	30/10/2018	30/06/2021
Cable	SUCOFLEX	N-5,5m	14381	25/06/2019	25/08/2021
Cable	SUCOFLEX	N-6,5m	14380	25/07/2019	25/09/2021
Cable	MegaPhase	N-8m	15813	12/11/2018	12/01/2021
Cable	MegaPhase	N-8m	15813	14/01/2021	14/03/2023
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Cable	MegaPhase	TM18-N1N1-118	12841	14/08/2020	14/10/2022
Cable	MegaPhase	TM18-N1N1-118	12842	02/12/2020	02/02/2023
Filter	Micro-Tronics	HPM 15162	10273	12/01/2019	12/03/2022
Filter	Micro-Tronics	HPM18865	12843	09/06/2018	09/08/2021
Filter	Wainwright Instruments	WRCGV 2402/2480- 2380/2500- 40/10EE-200W	9771	08/01/2019	08/03/2022
Preamplifier	Techniwave	APS16-0087	14040	02/12/2020	02/02/2022
Preamplifier	Wright Technologie	ASL40-B3015	14851	12/08/2020	12/10/2021
Preamplifier	IMPULSE	CA118-546ACN	9169	13/01/2021	13/03/2022
Preamplifier	Mini-circuit	ZFL-1000LN	1321	25/06/2019	25/02/2021
Receiver	Agilent Technologies	E4440A	5824	22/10/2020	22/12/2022
Receiver	Rohde & Schwarz	ESI	9704	03/03/2020	03/05/2021
Receiver	Rohde & Schwarz	FPL1003	16027	14/08/2020	14/10/2021
Receiver	Rohde & Schwarz	FSW43	14830	29/07/2020	29/09/2021
Shielded enclosure	RAY PROOF	C.V2	1423	04/10/2019	04/12/2022
Shielded enclosure	COMTEST	SAC 3m	14494	02/10/2019	02/12/2022
Software	Nexio		0000		
Thermohygrometer	Testo	608-H1	7562	25/01/2019	25/03/2021
Thermohygrometer	Testo	608-H2	12269	07/05/2020	07/07/2022
Thermohygrometer	Bioblock Scientific	Météostar	0963	25/01/2019	25/03/2021

BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz- TABULATED RESULTS					
CHARGING + TX MODE / ALL POSITIONS / ALL CHANNELS				EMI6983	
Frequency MHz	Polarization	Level peak dBμV/m	Level Qpeak dBμV/m	Limit dBμV/m	Margin dB
37.668	Verticale	39.67	33.28	40	-6.72
38.093	Verticale	37.78	30.58	40	-9.42
38.433	Verticale	38.71	31.01	40	-8.99
38.960	Verticale	38.60	31.05	40	-8.95
39.198	Verticale	38.89	30.32	40	-9.68
39.419	Verticale	39.65	31.46	40	-8.54
39.623	Verticale	40.15	31.92	40	-8.08
39.878	Verticale	41.03	31.69	40	-8.31
40.167	Verticale	41.02	32.46	40	-7.54
40.303	Verticale	42.46	32.77	40	-7.23
40.830	Verticale	44.37	35.17	40	-4.83
40.983	Verticale	43.66	35.36	40	-4.64
41.153	Verticale	44.34	36.41	40	-3.59
41.374	Verticale	45.19	36.50	40	-3.5
41.833	Verticale	46.50	37.25	40	-2.75
42.105	Verticale	45.49	36.56	40	-3.44
42.360	Verticale	44.35	35.48	40	-4.52
42.581	Verticale	42.70	34.13	40	-5.87
42.700	Verticale	42.99	33.66	40	-6.34
42.853	Verticale	41.64	32.72	40	-7.28
43.278	Verticale	40.94	32.49	40	-7.51
43.686	Verticale	39.31	31.34	40	-8.66
44.009	Verticale	39.74	32.35	40	-7.65
44.281	Verticale	43.11	33.73	40	-6.27
44.655	Verticale	42.23	34.75	40	-5.25
44.842	Verticale	42.61	35.31	40	-4.69
45.234	Verticale	42.52	35.37	40	-4.63
45.591	Verticale	40.95	34.38	40	-5.62
46.050	Verticale	40.01	34.00	40	-6
46.356	Verticale	41.07	34.78	40	-5.22
46.764	Verticale	40.83	34.59	40	-5.41
47.104	Verticale	39.79	33.93	40	-6.07
47.461	Verticale	39.14	33.29	40	-6.71
47.954	Verticale	38.78	32.33	40	-7.67
48.464	Verticale	38.52	31.07	40	-8.93
48.974	Verticale	36.88	29.39	40	-10.61
49.314	Verticale	35.27	28.50	40	-11.5
49.552	Verticale	34.89	28.00	40	-12
49.807	Verticale	33.97	27.32	40	-12.68
176.725	Verticale	32.95	25.61	43.5	-17.89
177.014	Verticale	34.26	25.84	43.5	-17.66
177.133	Verticale	34.99	25.76	43.5	-17.74
177.422	Verticale	33.79	25.99	43.5	-17.51
177.796	Verticale	35.17	26.17	43.5	-17.33
178.289	Verticale	34.51	26.64	43.5	-16.86

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHZ- TABULATED RESULTS					
CHARGING + TX MODE / ALL POSITIONS / ALL CHANNELS				EMI6983	
178.493	Verticale	35.83	26.65	43.5	-16.85
178.969	Verticale	35.02	26.98	43.5	-16.52
179.326	Verticale	34.98	26.96	43.5	-16.54
179.598	Verticale	35.02	27.12	43.5	-16.38
179.819	Verticale	34.71	27.09	43.5	-16.41
180.176	Verticale	35.26	27.36	43.5	-16.14
180.669	Verticale	35.59	27.77	43.5	-15.73
180.822	Verticale	35.84	27.90	43.5	-15.6
181.162	Verticale	35.78	28.26	43.5	-15.24
181.417	Verticale	35.99	28.63	43.5	-14.87
181.740	Verticale	35.87	28.96	43.5	-14.54
181.961	Verticale	36.39	29.25	43.5	-14.25
182.250	Verticale	36.88	29.64	43.5	-13.86
182.454	Verticale	37.64	30.01	43.5	-13.49
182.692	Verticale	36.98	30.32	43.5	-13.18
183.032	Verticale	38.12	30.64	43.5	-12.86
183.338	Verticale	37.98	30.99	43.5	-12.51
183.627	Verticale	37.92	31.19	43.5	-12.31
183.984	Verticale	37.76	31.48	43.5	-12.02
184.528	Verticale	37.69	31.61	43.5	-11.89
184.698	Verticale	37.76	31.65	43.5	-11.85
185.124	Verticale	37.84	31.60	43.5	-11.9
185.277	Verticale	37.50	31.47	43.5	-12.03
185.549	Verticale	37.88	31.29	43.5	-12.21
186.042	Verticale	37.31	30.97	43.5	-12.53
186.365	Verticale	37.14	30.61	43.5	-12.89
186.722	Verticale	36.52	30.23	43.5	-13.27
187.147	Verticale	36.56	29.65	43.5	-13.85
187.555	Verticale	35.22	28.93	43.5	-14.57
187.912	Verticale	35.07	28.47	43.5	-15.03
188.269	Verticale	34.54	28.06	43.5	-15.44
188.711	Verticale	34.76	27.86	43.5	-15.64
189.085	Verticale	34.39	27.79	43.5	-15.71
189.476	Verticale	34.31	27.79	43.5	-15.71
189.663	Verticale	34.89	27.93	43.5	-15.57
190.071	Verticale	34.56	28.14	43.5	-15.36
190.326	Verticale	34.97	28.31	43.5	-15.19
190.649	Verticale	34.55	28.35	43.5	-15.15
190.853	Verticale	35.11	28.44	43.5	-15.06
191.176	Verticale	35.12	28.45	43.5	-15.05
191.601	Verticale	35.12	28.57	43.5	-14.93
192.026	Verticale	34.99	28.26	43.5	-15.24
192.366	Verticale	35.30	28.07	43.5	-15.43
192.621	Verticale	34.76	27.86	43.5	-15.64
192.859	Verticale	34.63	27.56	43.5	-15.94
193.063	Verticale	34.09	27.36	43.5	-16.14
193.267	Verticale	34.37	27.05	43.5	-16.45
193.777	Verticale	34.14	26.29	43.5	-17.21
153.330	Horizontale	34.65	25.56	43.5	-17.94

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHZ- TABULATED RESULTS					
CHARGING + TX MODE / ALL POSITIONS / ALL CHANNELS				EMI6983	
153.517	Horizontale	35.11	25.92	43.5	-17.58
153.721	Horizontale	35.88	26.31	43.5	-17.19
153.993	Horizontale	36.79	26.77	43.5	-16.73
154.282	Horizontale	37.28	27.50	43.5	-16
154.588	Horizontale	37.73	28.27	43.5	-15.23
154.877	Horizontale	38.20	28.96	43.5	-14.54
155.082	Horizontale	38.63	29.43	43.5	-14.07
155.184	Horizontale	39.05	29.73	43.5	-13.77
155.405	Horizontale	39.17	30.25	43.5	-13.25
155.643	Horizontale	39.88	30.79	43.5	-12.71
155.847	Horizontale	40.16	31.21	43.5	-12.29
156.119	Horizontale	40.59	31.82	43.5	-11.68
156.374	Horizontale	40.95	32.27	43.5	-11.23
156.578	Horizontale	41.68	32.56	43.5	-10.94
157.020	Horizontale	40.92	33.08	43.5	-10.42
157.173	Horizontale	41.35	33.22	43.5	-10.28
157.428	Horizontale	41.14	33.34	43.5	-10.16
157.615	Horizontale	41.10	33.40	43.5	-10.1
157.802	Horizontale	40.30	33.50	43.5	-10
158.108	Horizontale	40.36	33.47	43.5	-10.03
158.278	Horizontale	39.86	33.47	43.5	-10.03
158.550	Horizontale	39.72	33.44	43.5	-10.06
158.788	Horizontale	39.59	33.25	43.5	-10.25
158.958	Horizontale	38.83	33.23	43.5	-10.27
159.230	Horizontale	38.57	33.17	43.5	-10.33
159.502	Horizontale	38.22	33.01	43.5	-10.49
159.740	Horizontale	38.39	32.84	43.5	-10.66
159.944	Horizontale	37.75	32.66	43.5	-10.84
160.233	Horizontale	37.47	32.46	43.5	-11.04
160.505	Horizontale	37.58	32.23	43.5	-11.27
160.641	Horizontale	37.36	32.16	43.5	-11.34
160.777	Horizontale	37.66	32.08	43.5	-11.42
160.998	Horizontale	37.09	31.86	43.5	-11.64
161.202	Horizontale	37.29	31.72	43.5	-11.78
161.423	Horizontale	36.82	31.56	43.5	-11.94
161.627	Horizontale	36.57	31.35	43.5	-12.15
161.797	Horizontale	36.97	31.15	43.5	-12.35

Spurious which has more than 20 dB of margin compared to the applicable limit is not necessarily reported

TEST SETUP PHOTO(S) – TX MODE / POSITION 1



TEST SETUP PHOTO(S) – TX MODE – POSITION 2



TEST SETUP PHOTO(S) – Tx MODE – POSITION 3




TEST SETUP PHOTO(S) – CHARGING + Tx MODE – POSITION 1



TEST SETUP PHOTO(S) - CHARGING + TX MODE – POSITION 2



TEST SETUP PHOTO(S) - CHARGING + TX MODE – POSITION 3

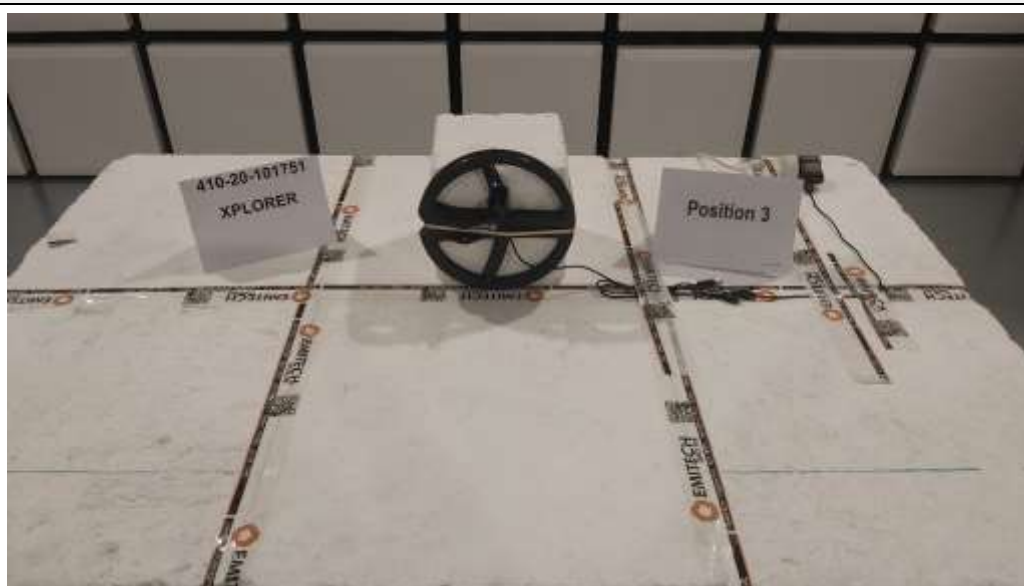


TEST SETUP PHOTO(S) – TX MODE – 30MHZ TO 200MHZ



TEST SETUP PHOTO(S) – TX MODE – 200MHZ TO 1GHZ





TEST SETUP PHOTO(S) – TX MODE – 1GHZ TO 18GHZ

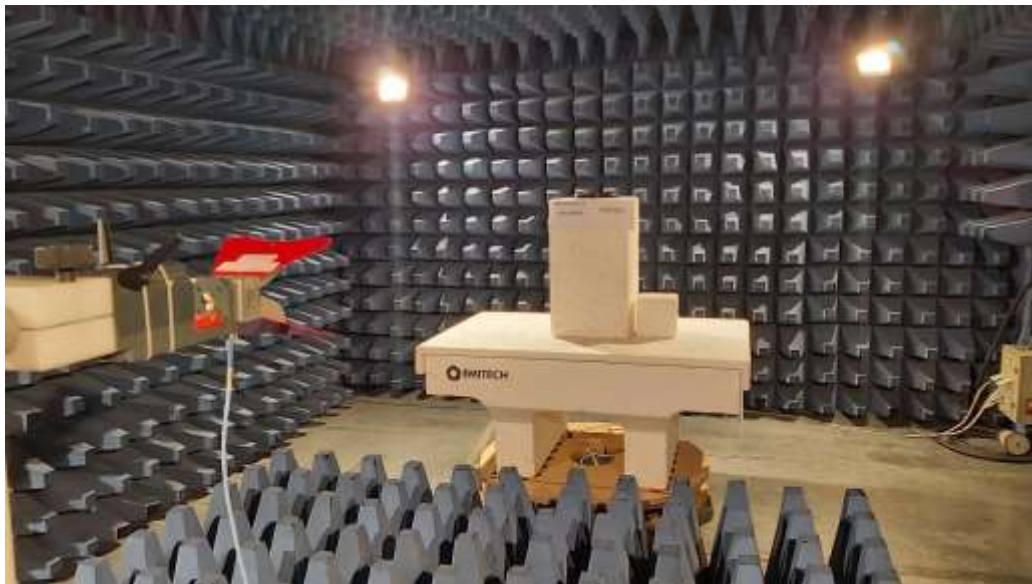



TEST SETUP PHOTO(S) - TX MODE / 18GHZ TO 26.5GHZ




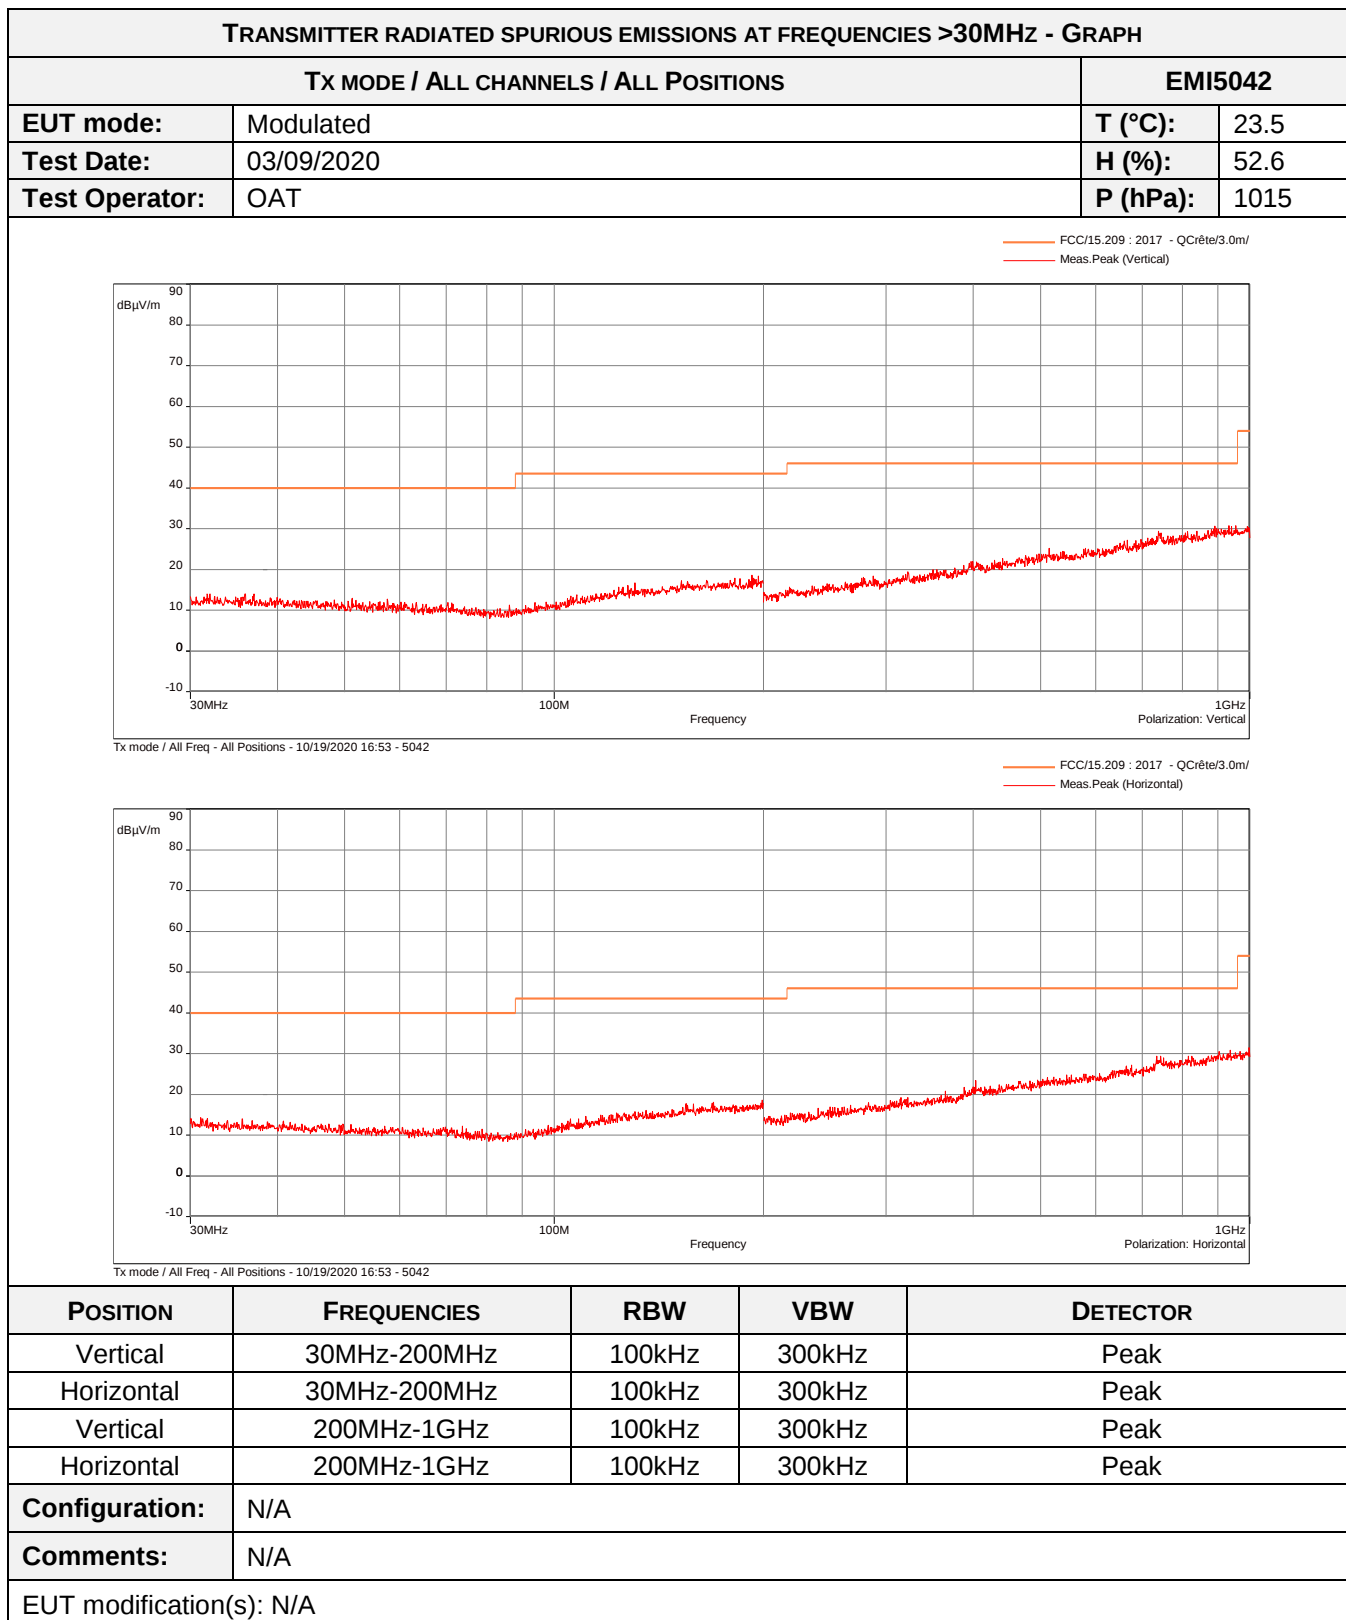


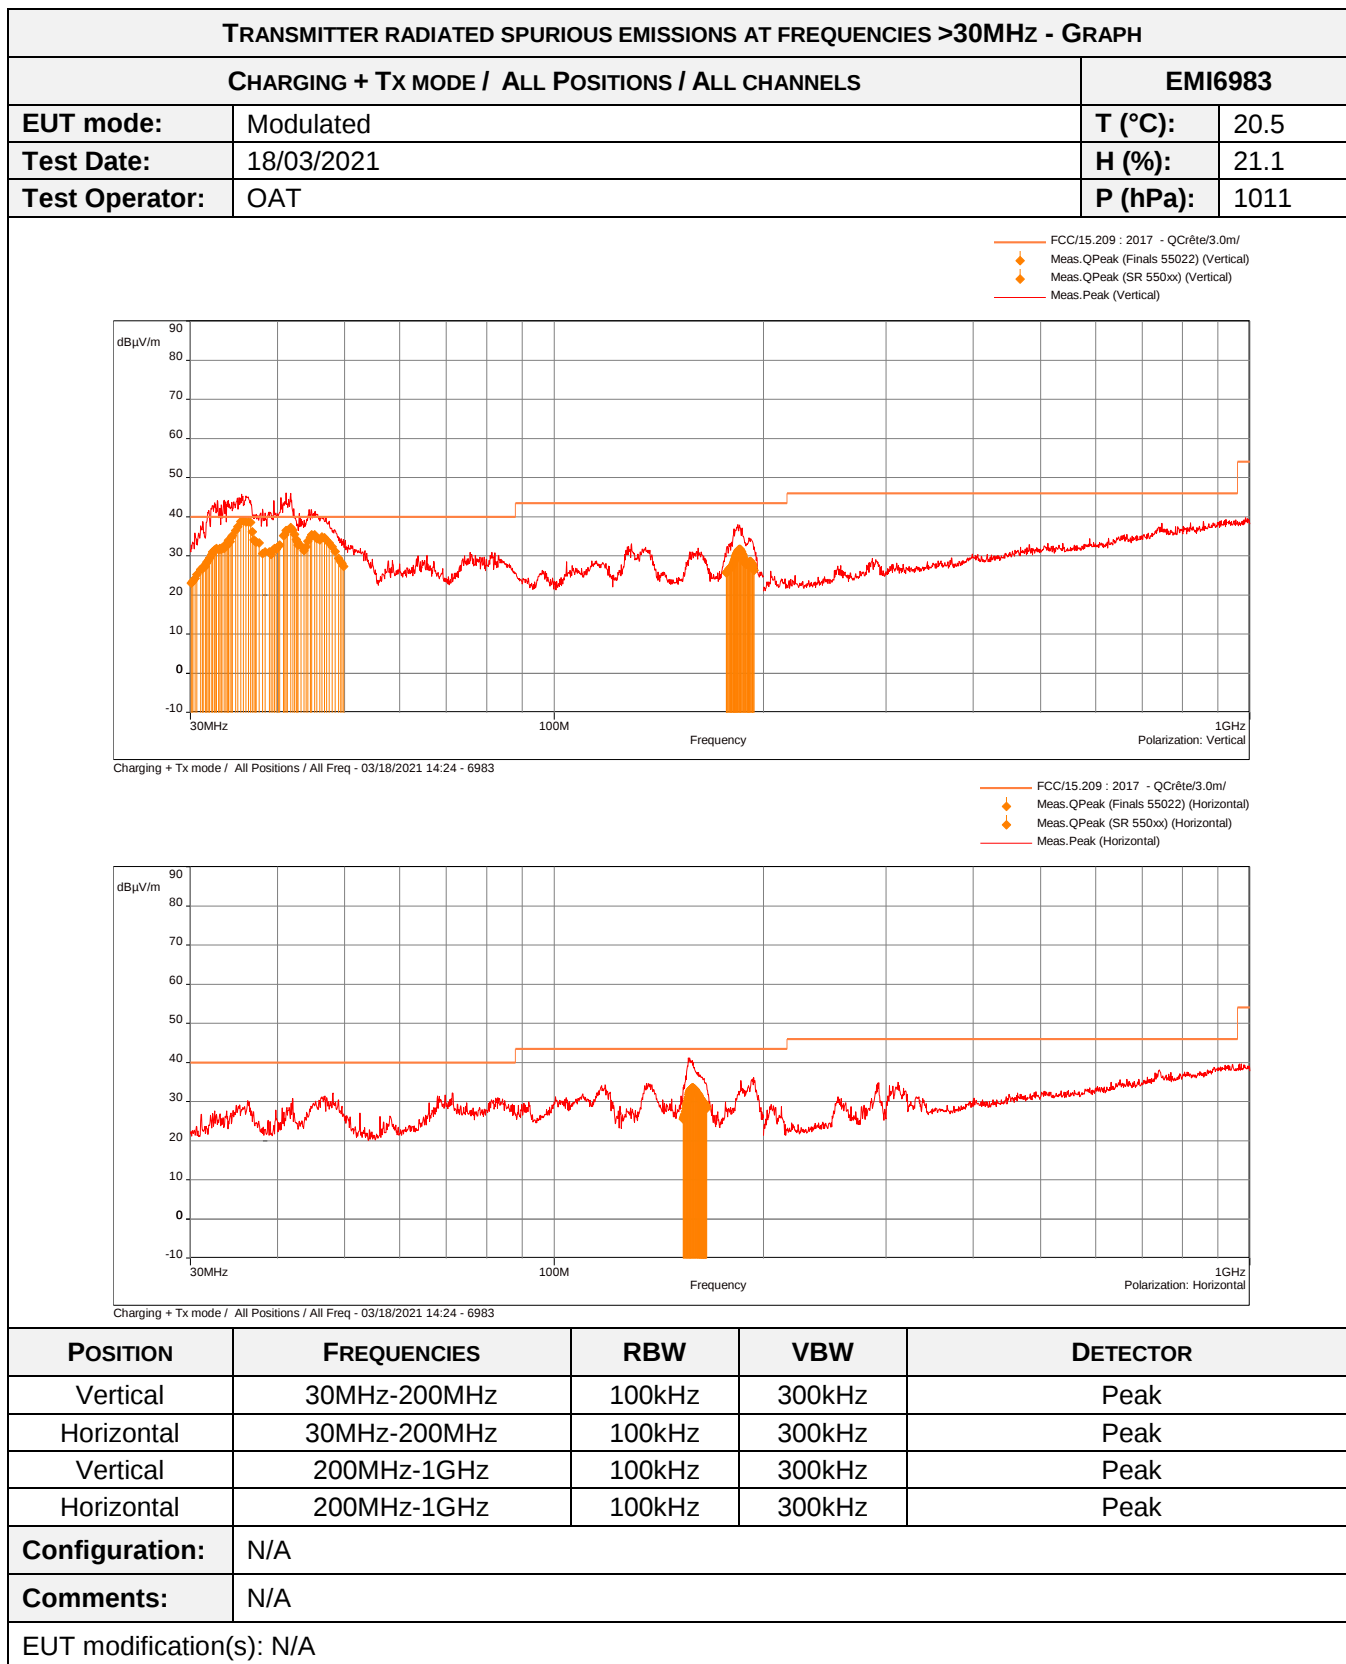


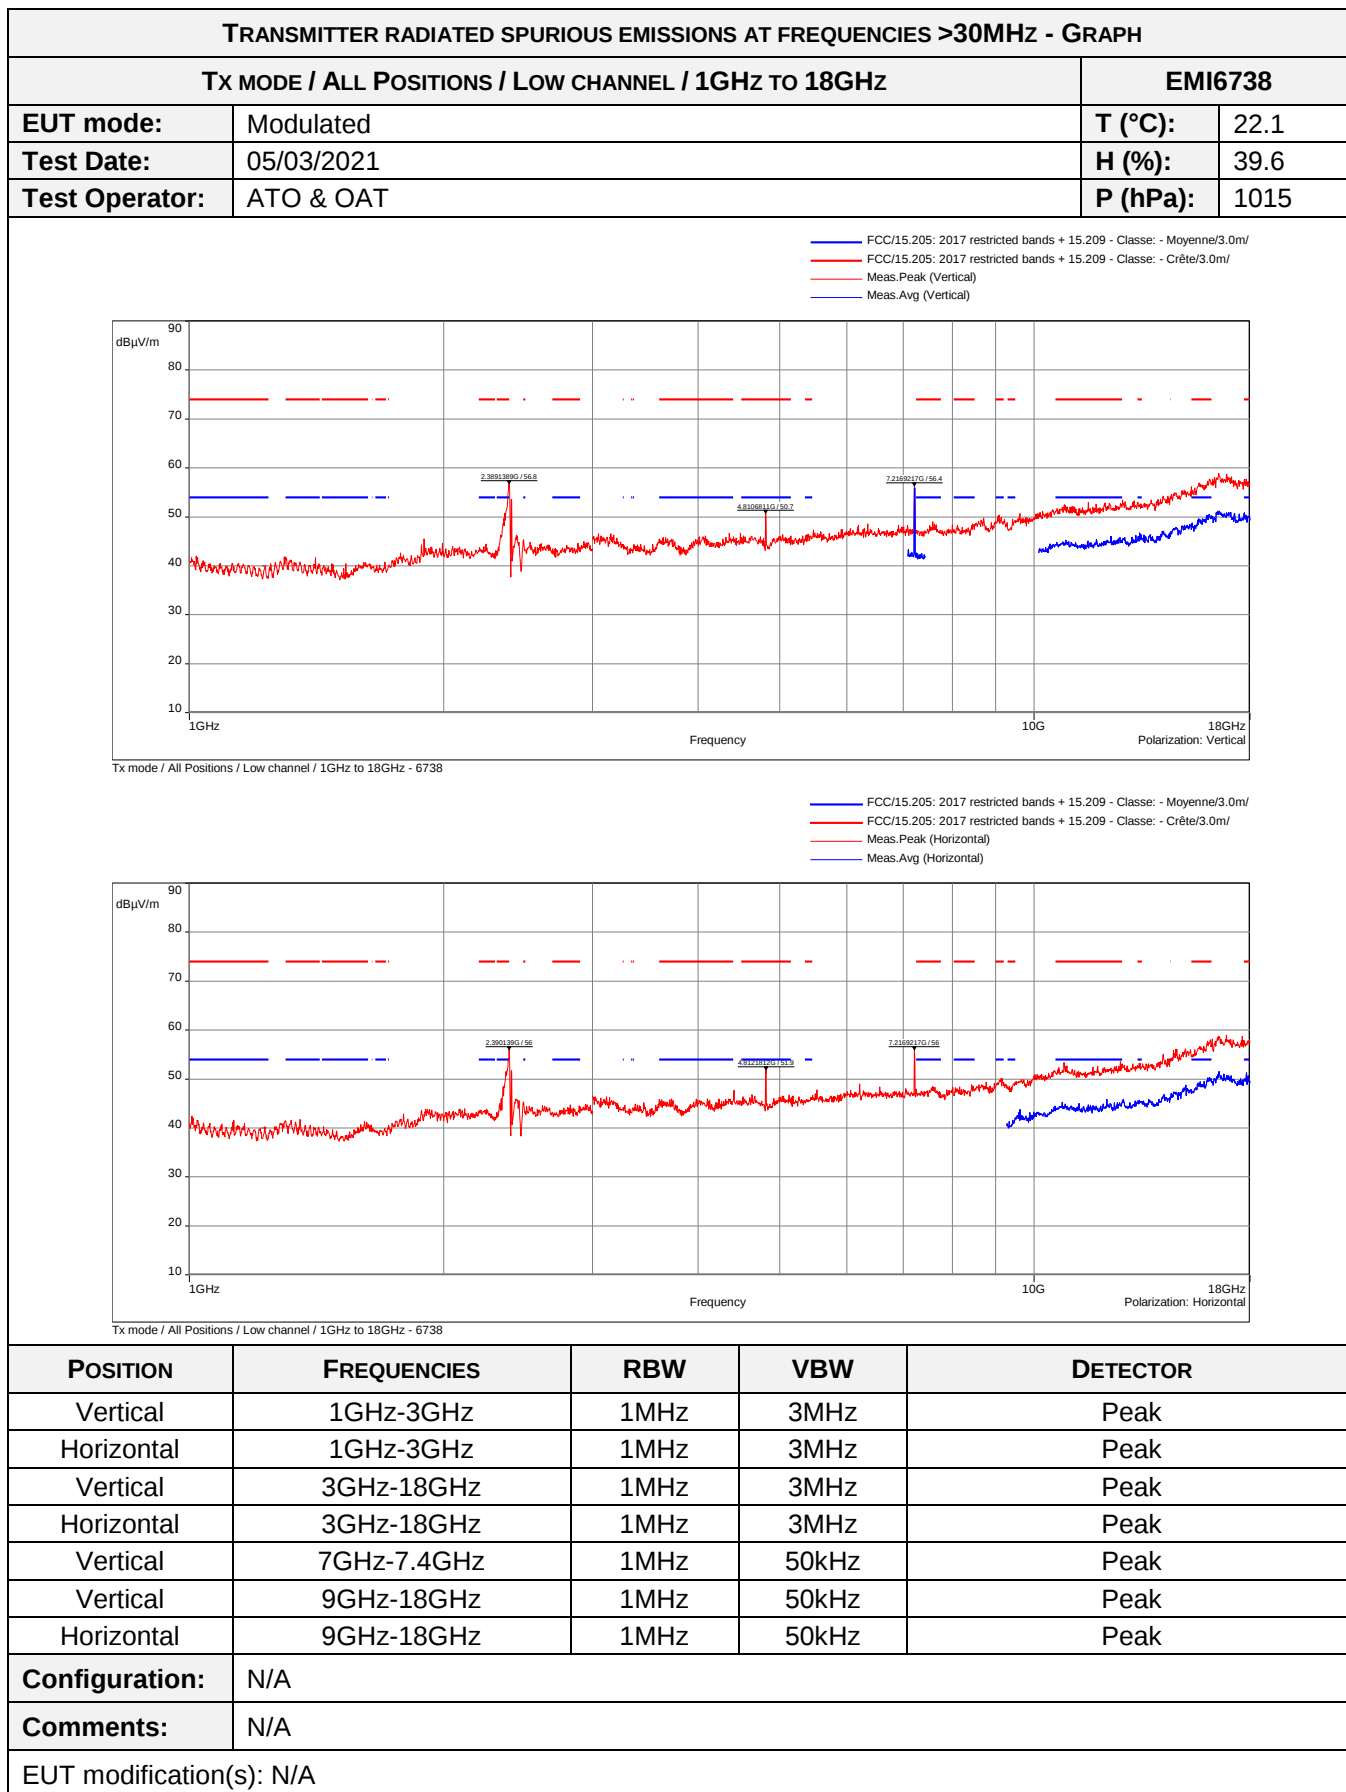


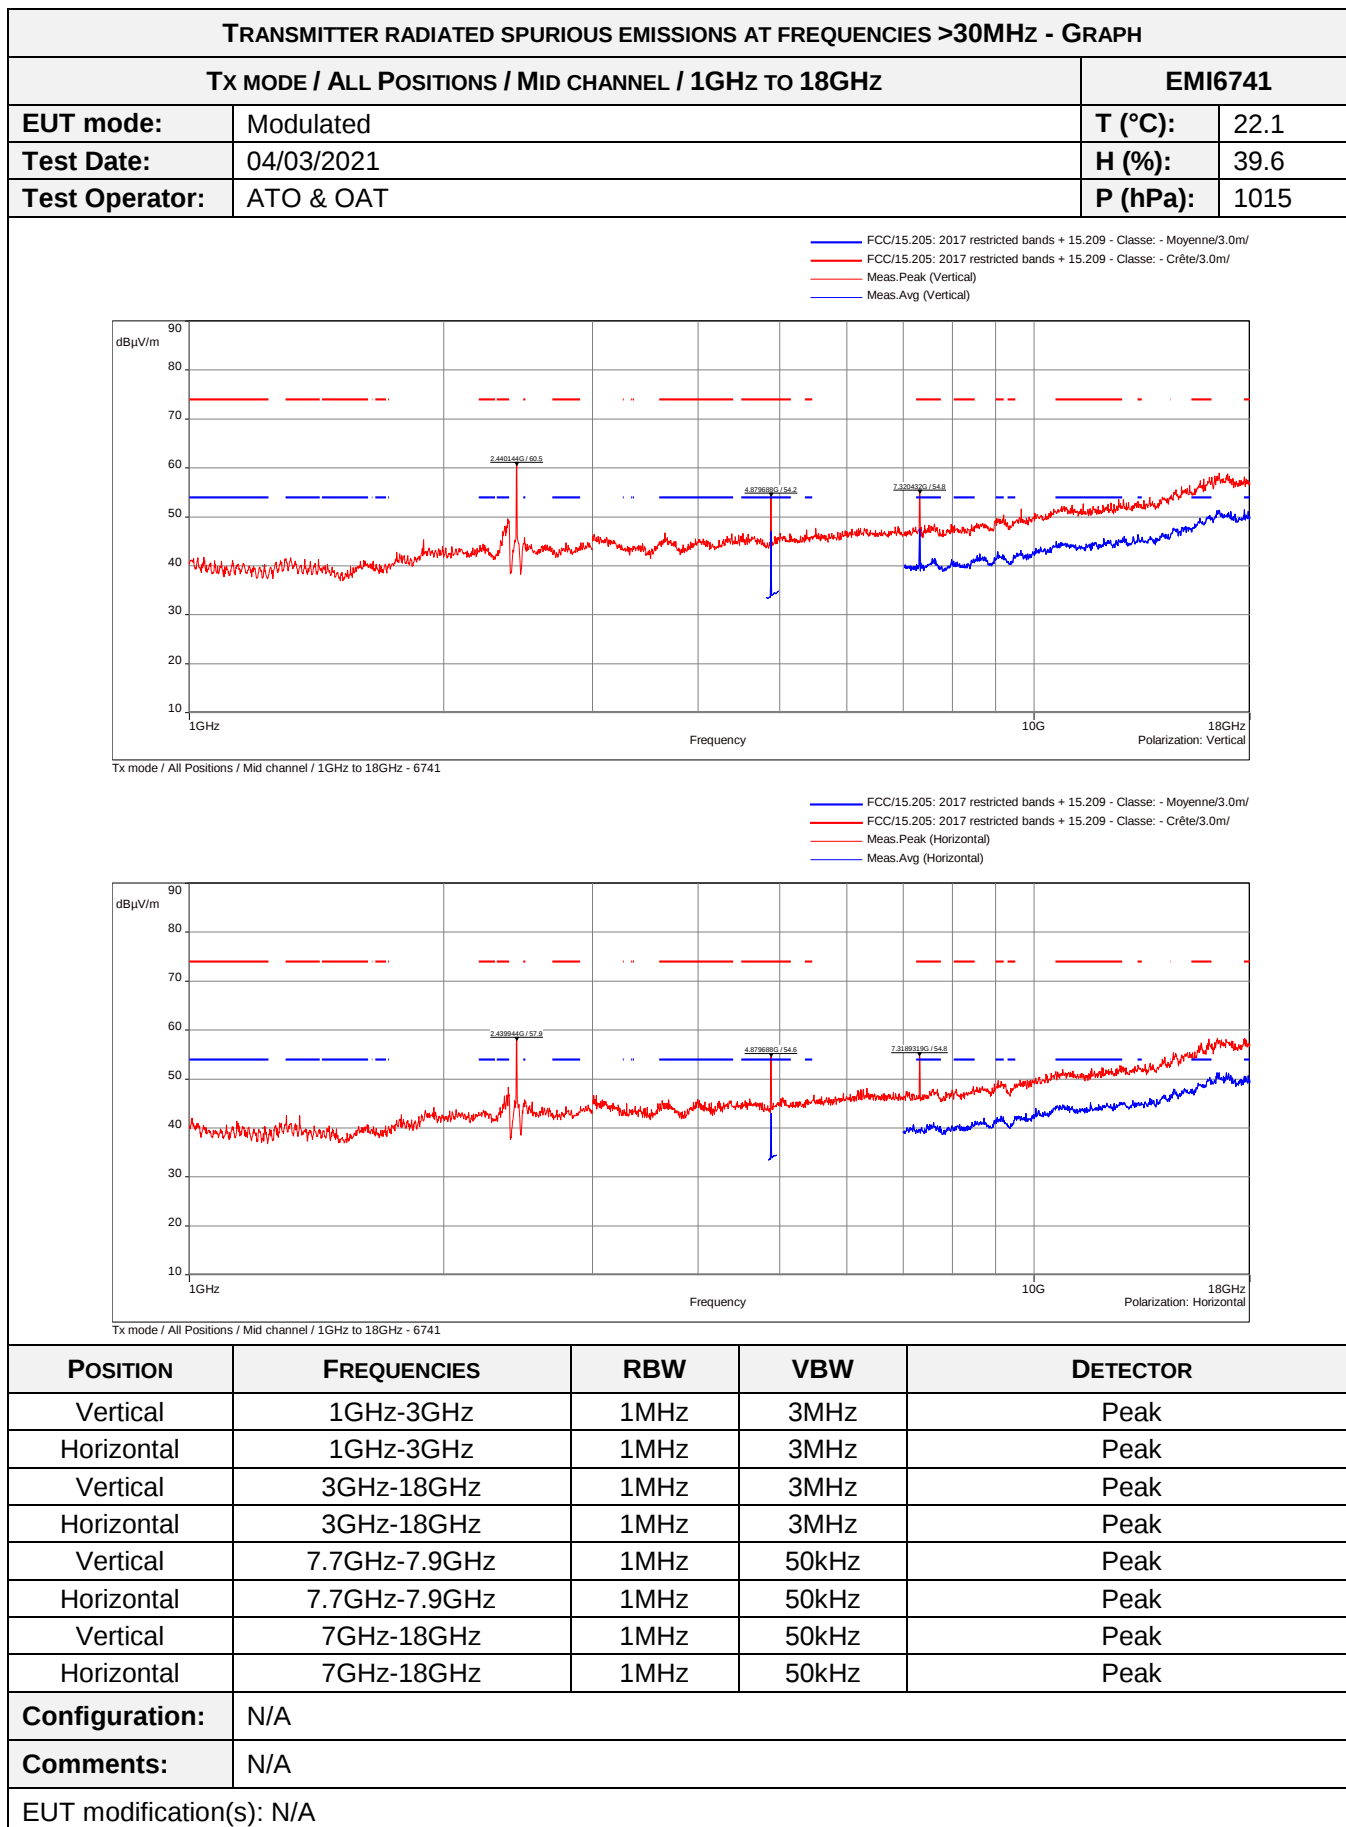


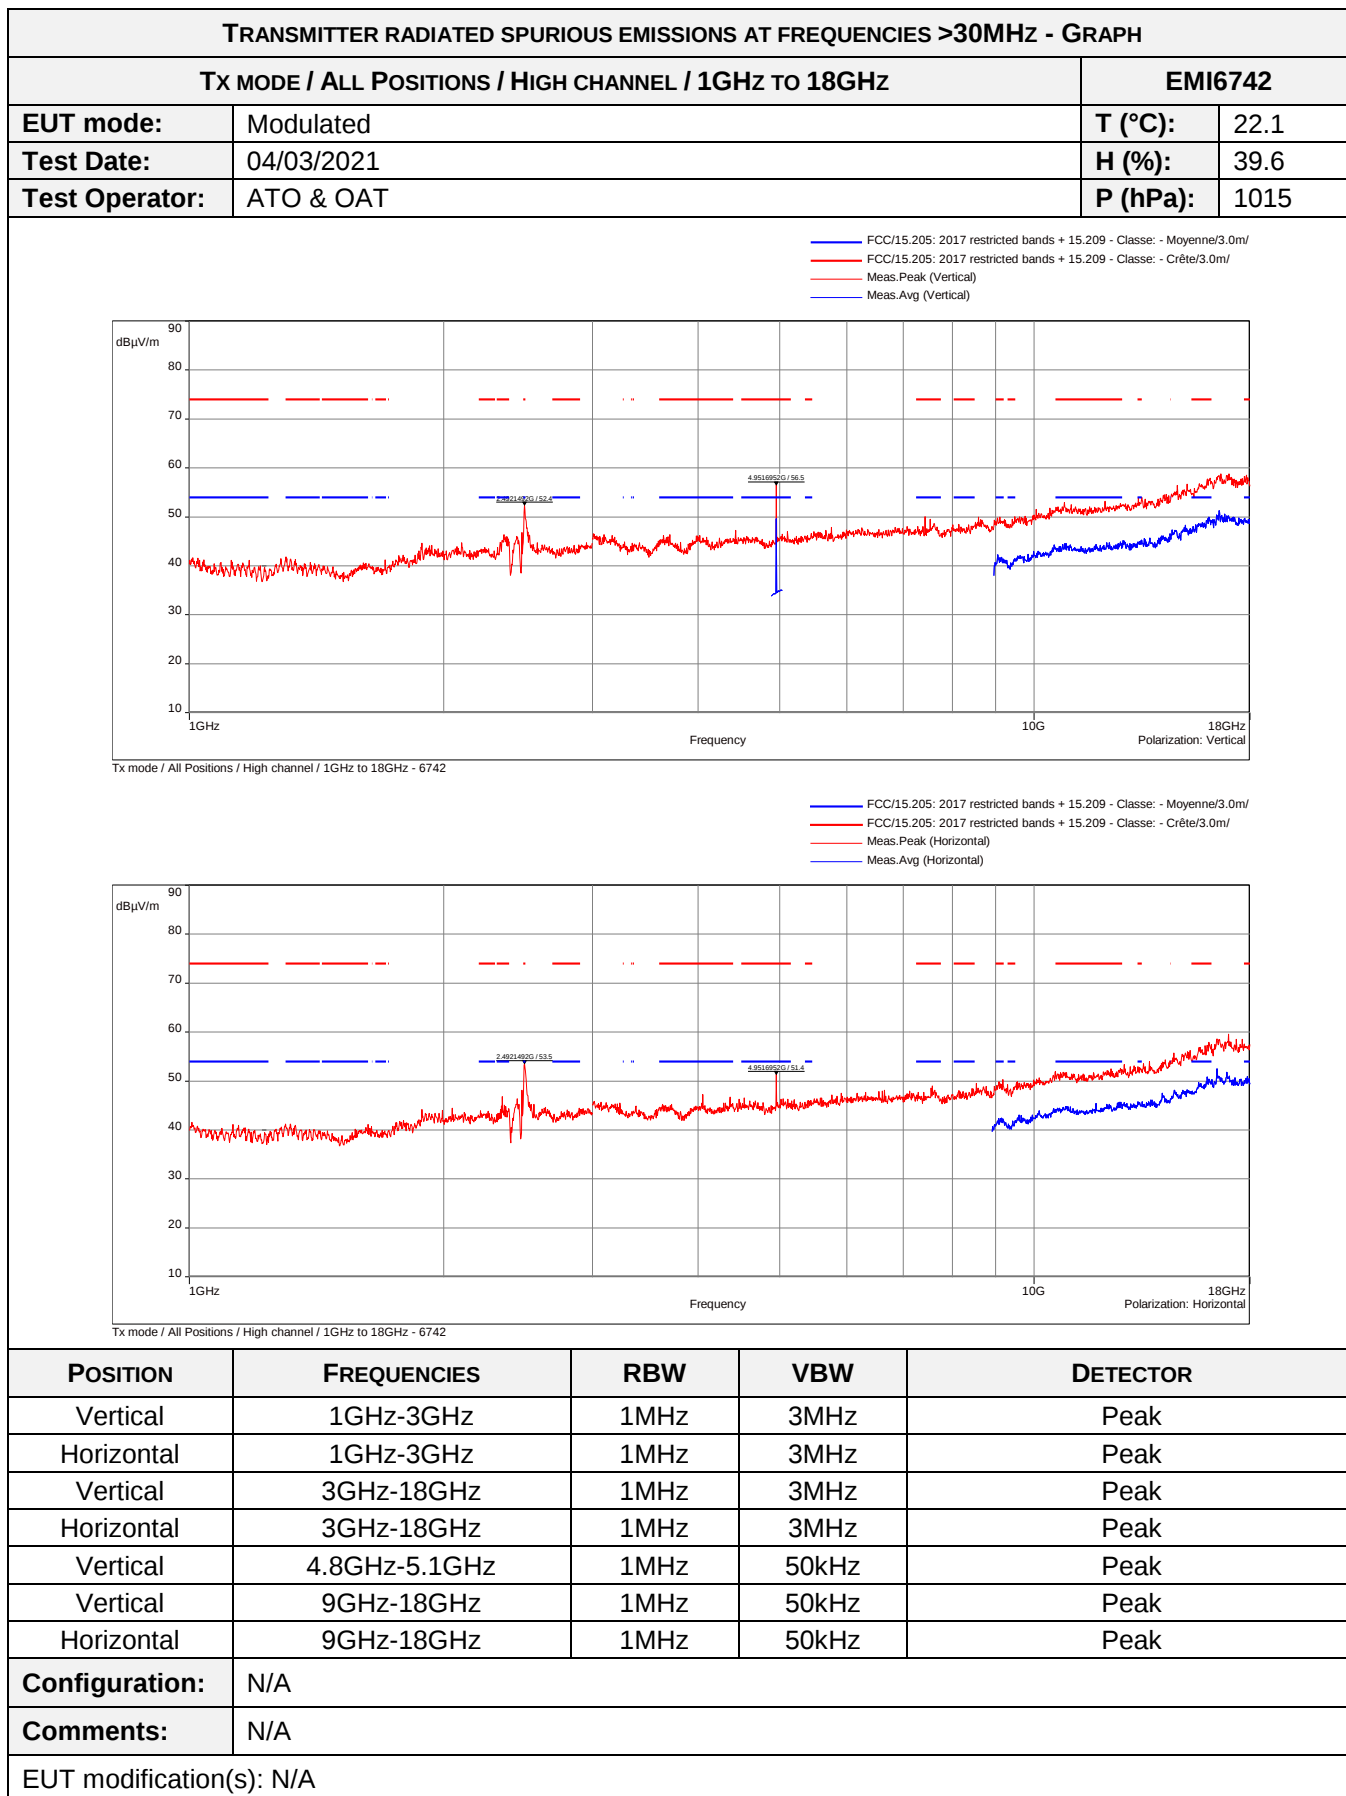

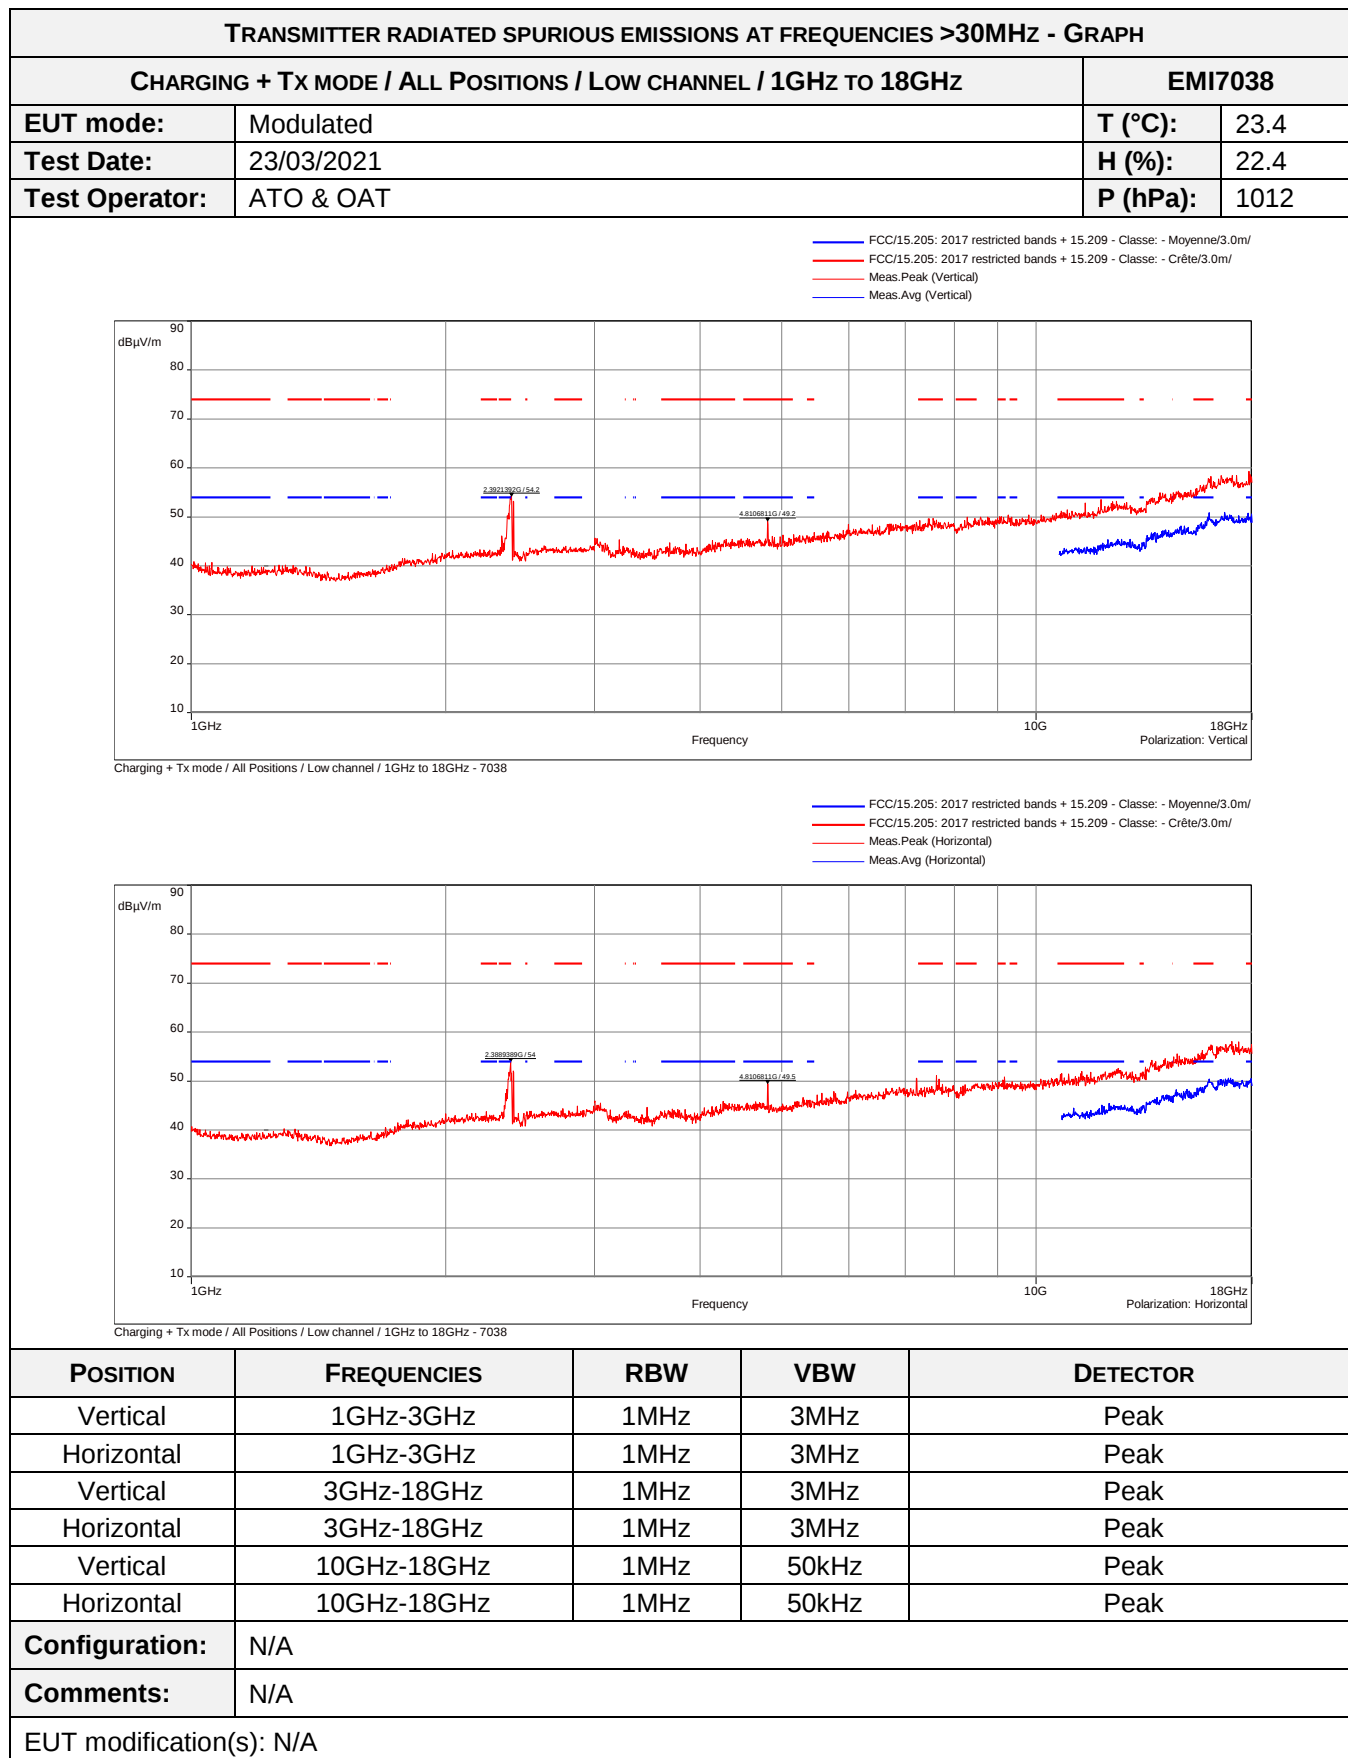


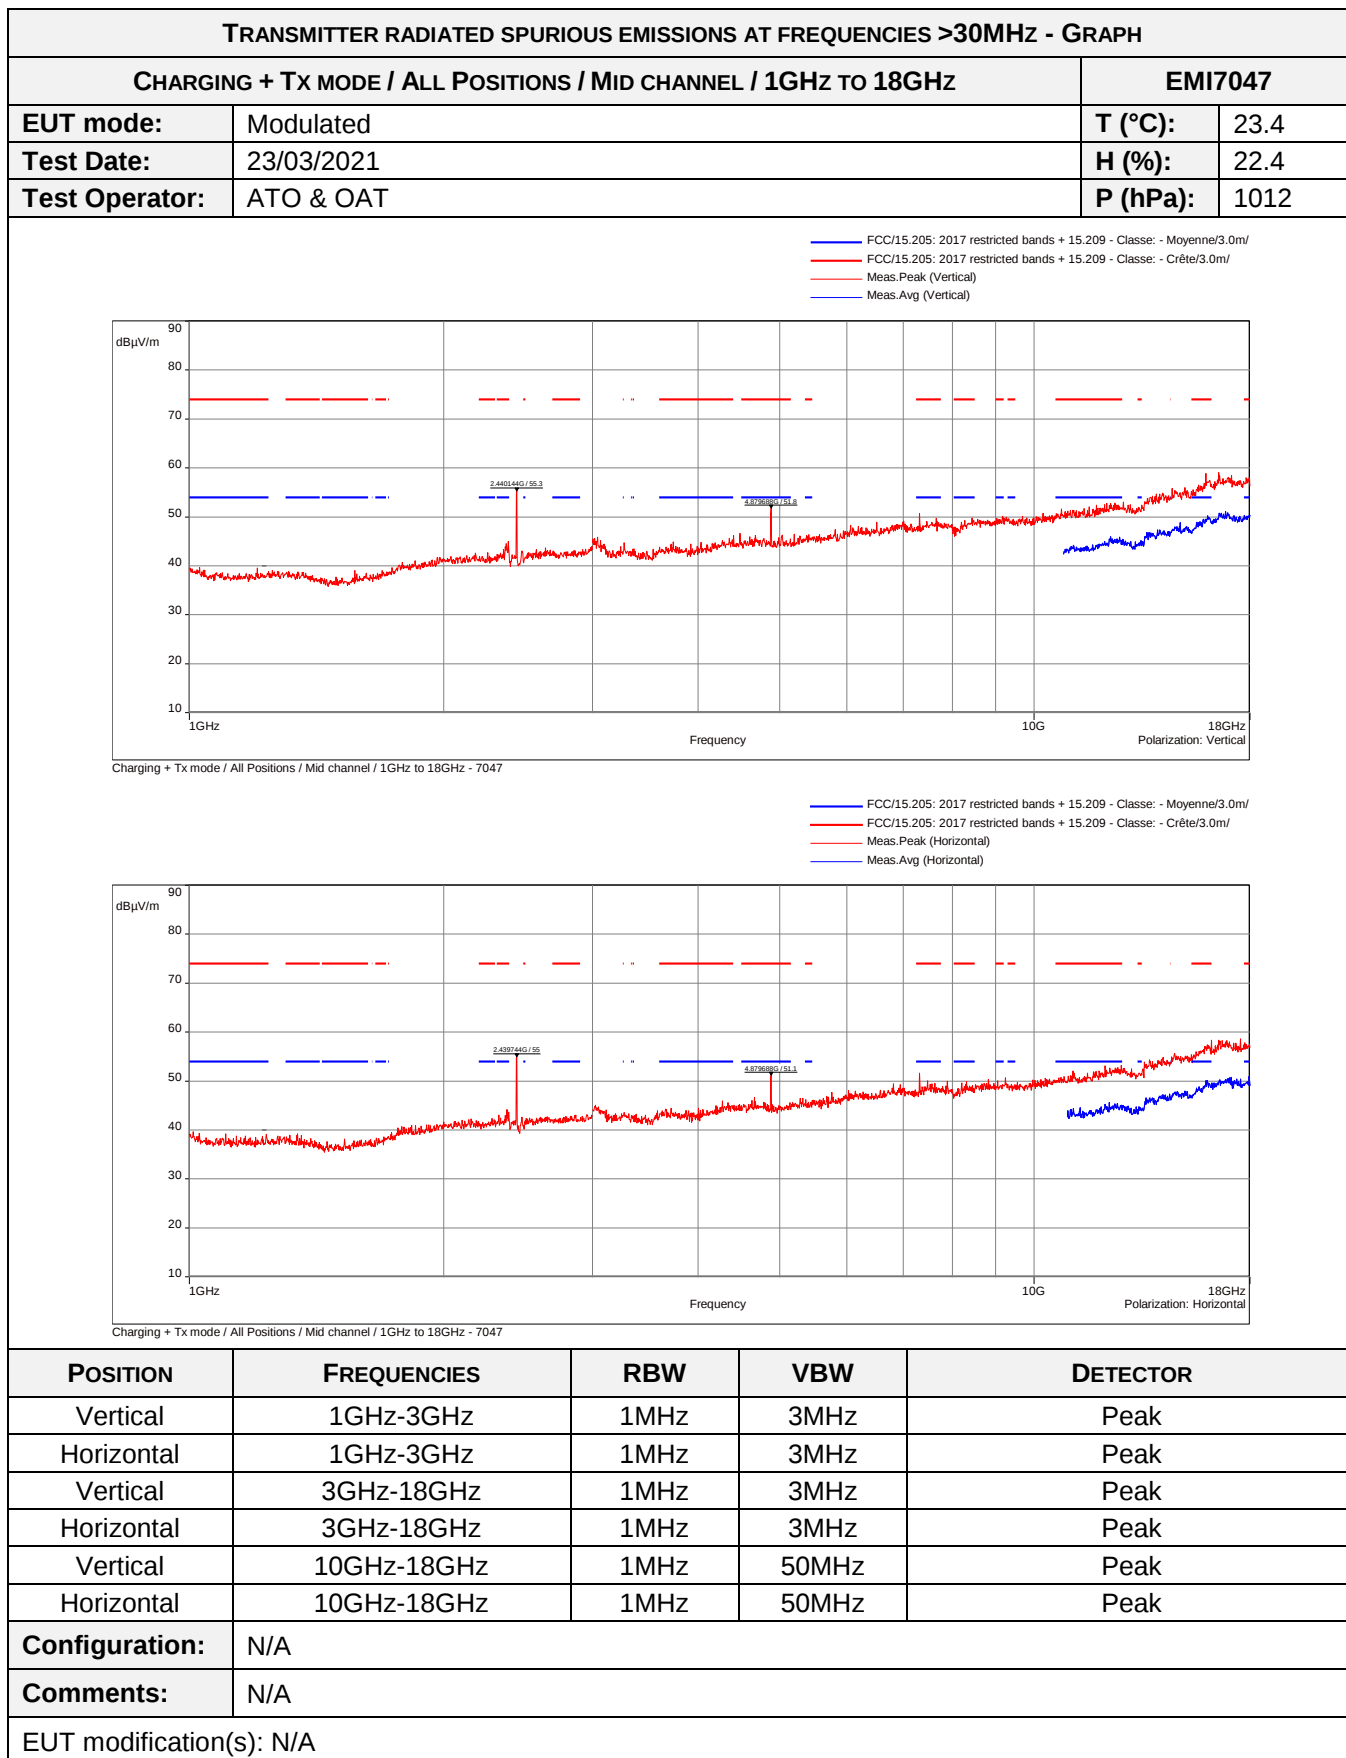

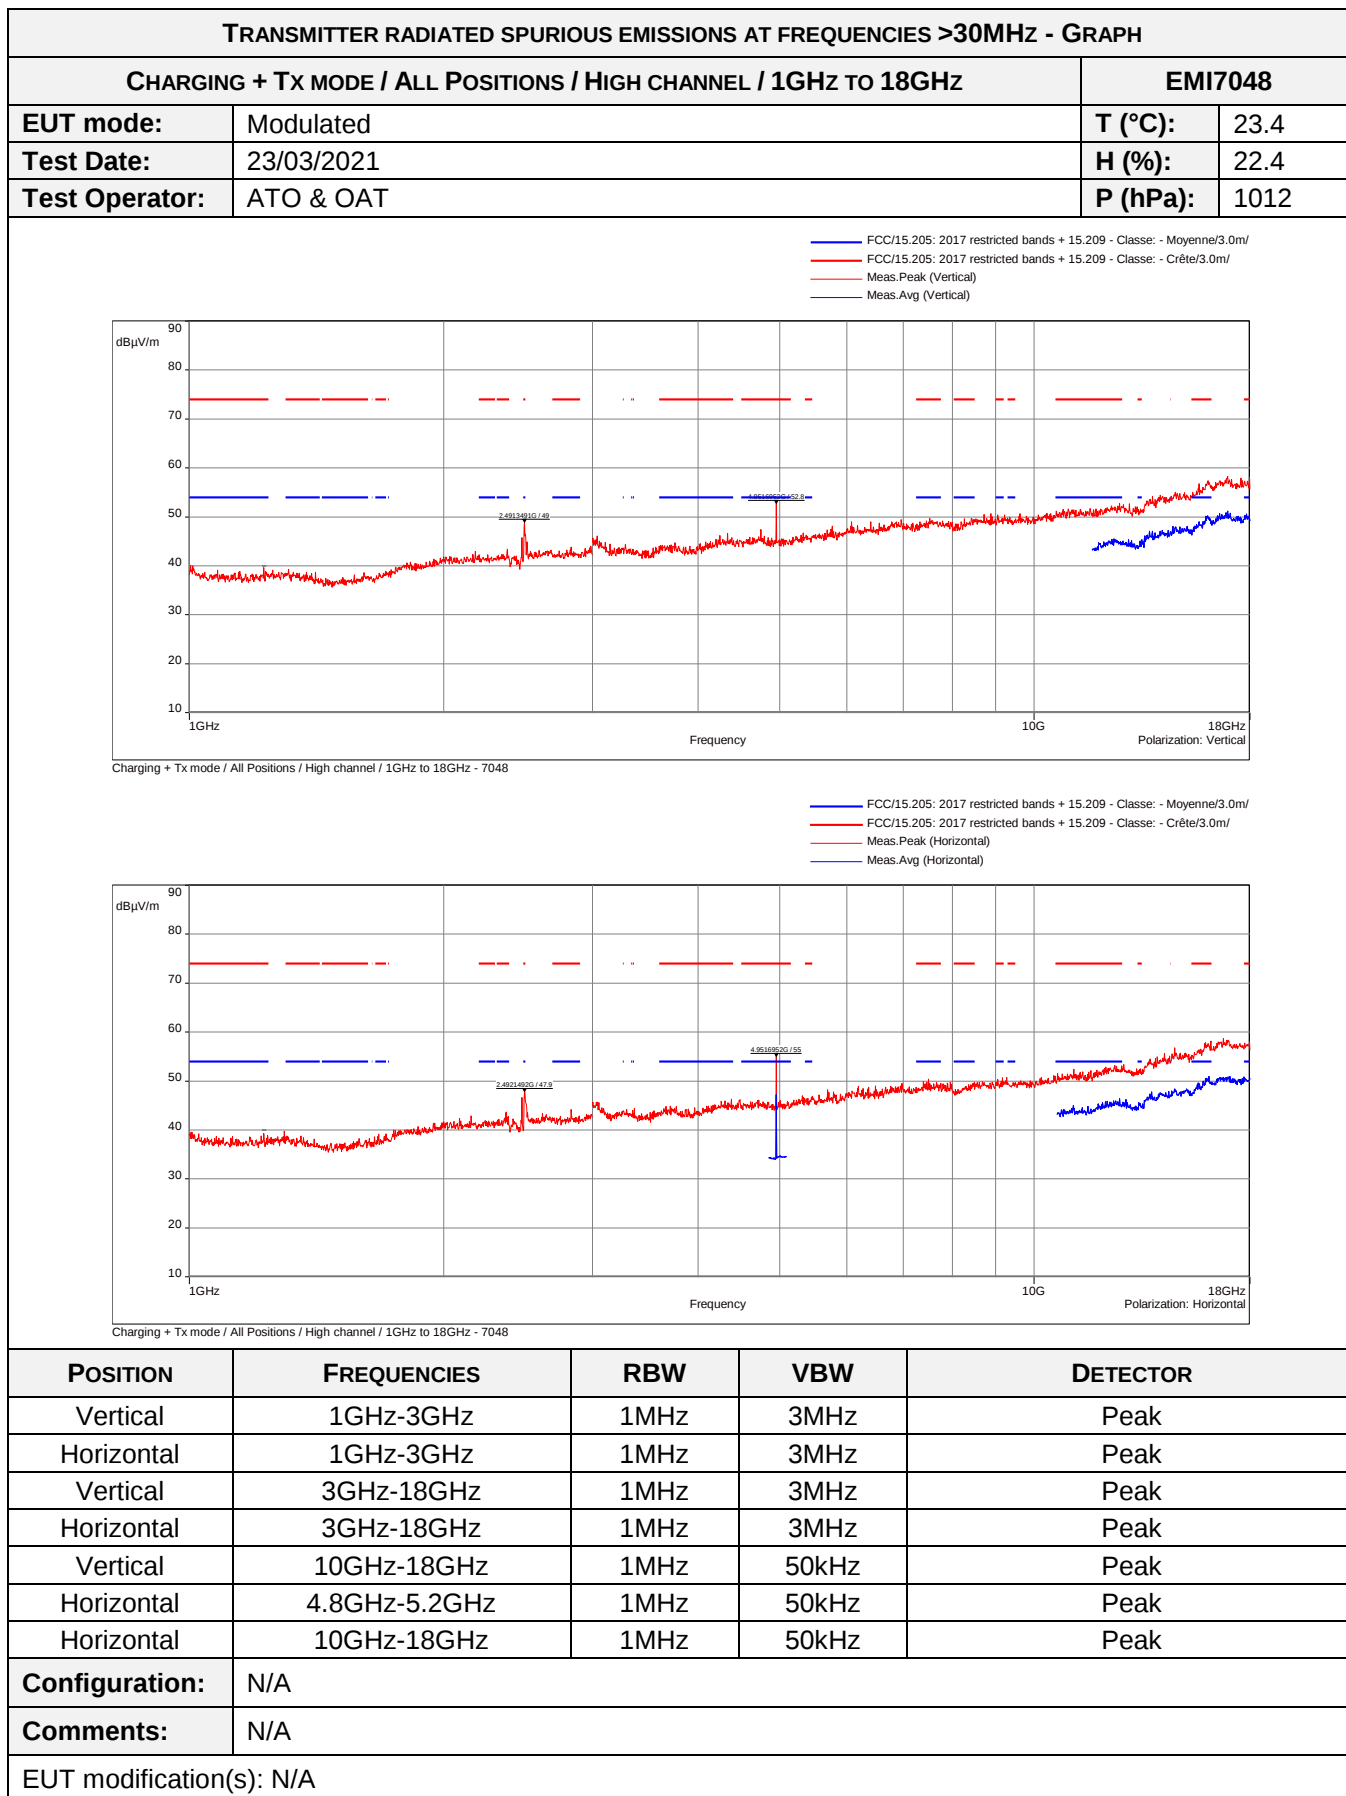


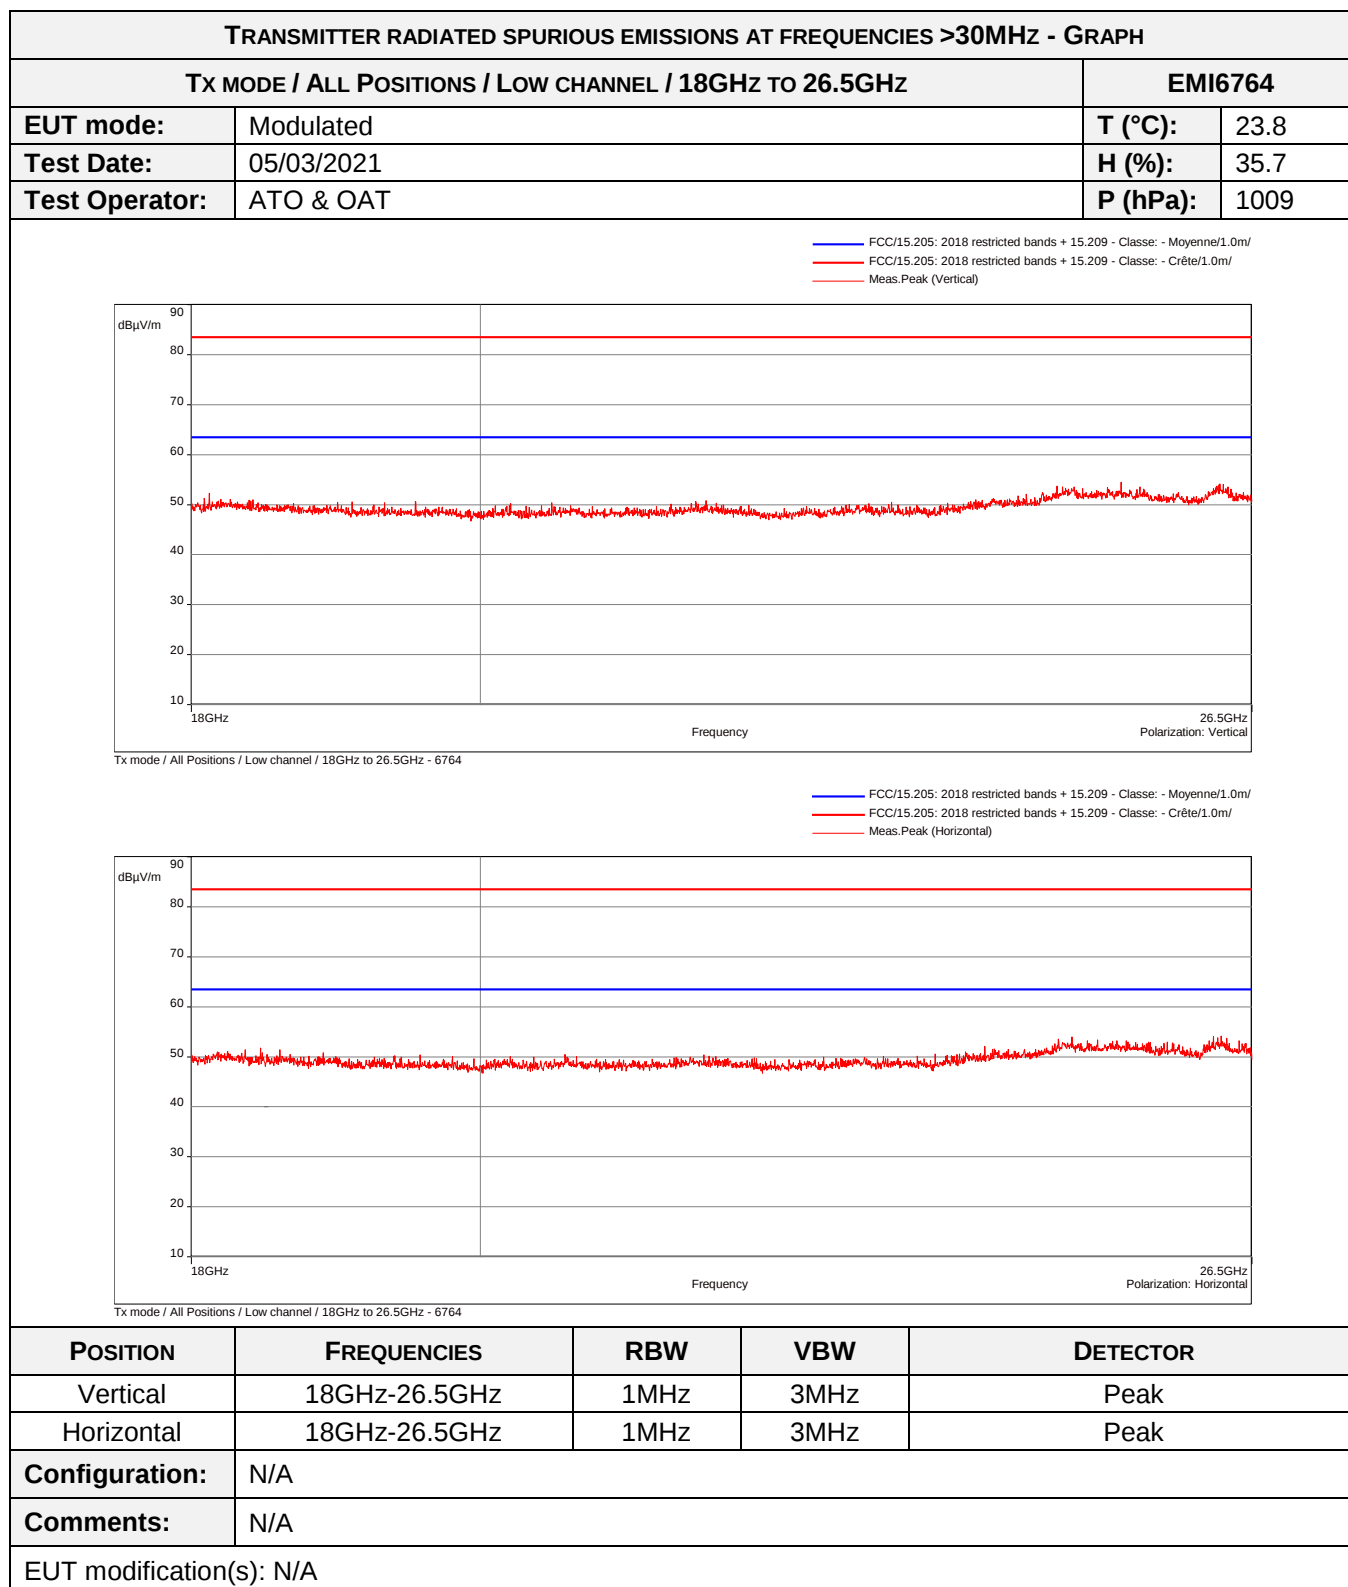


No spurious emissions were detected.

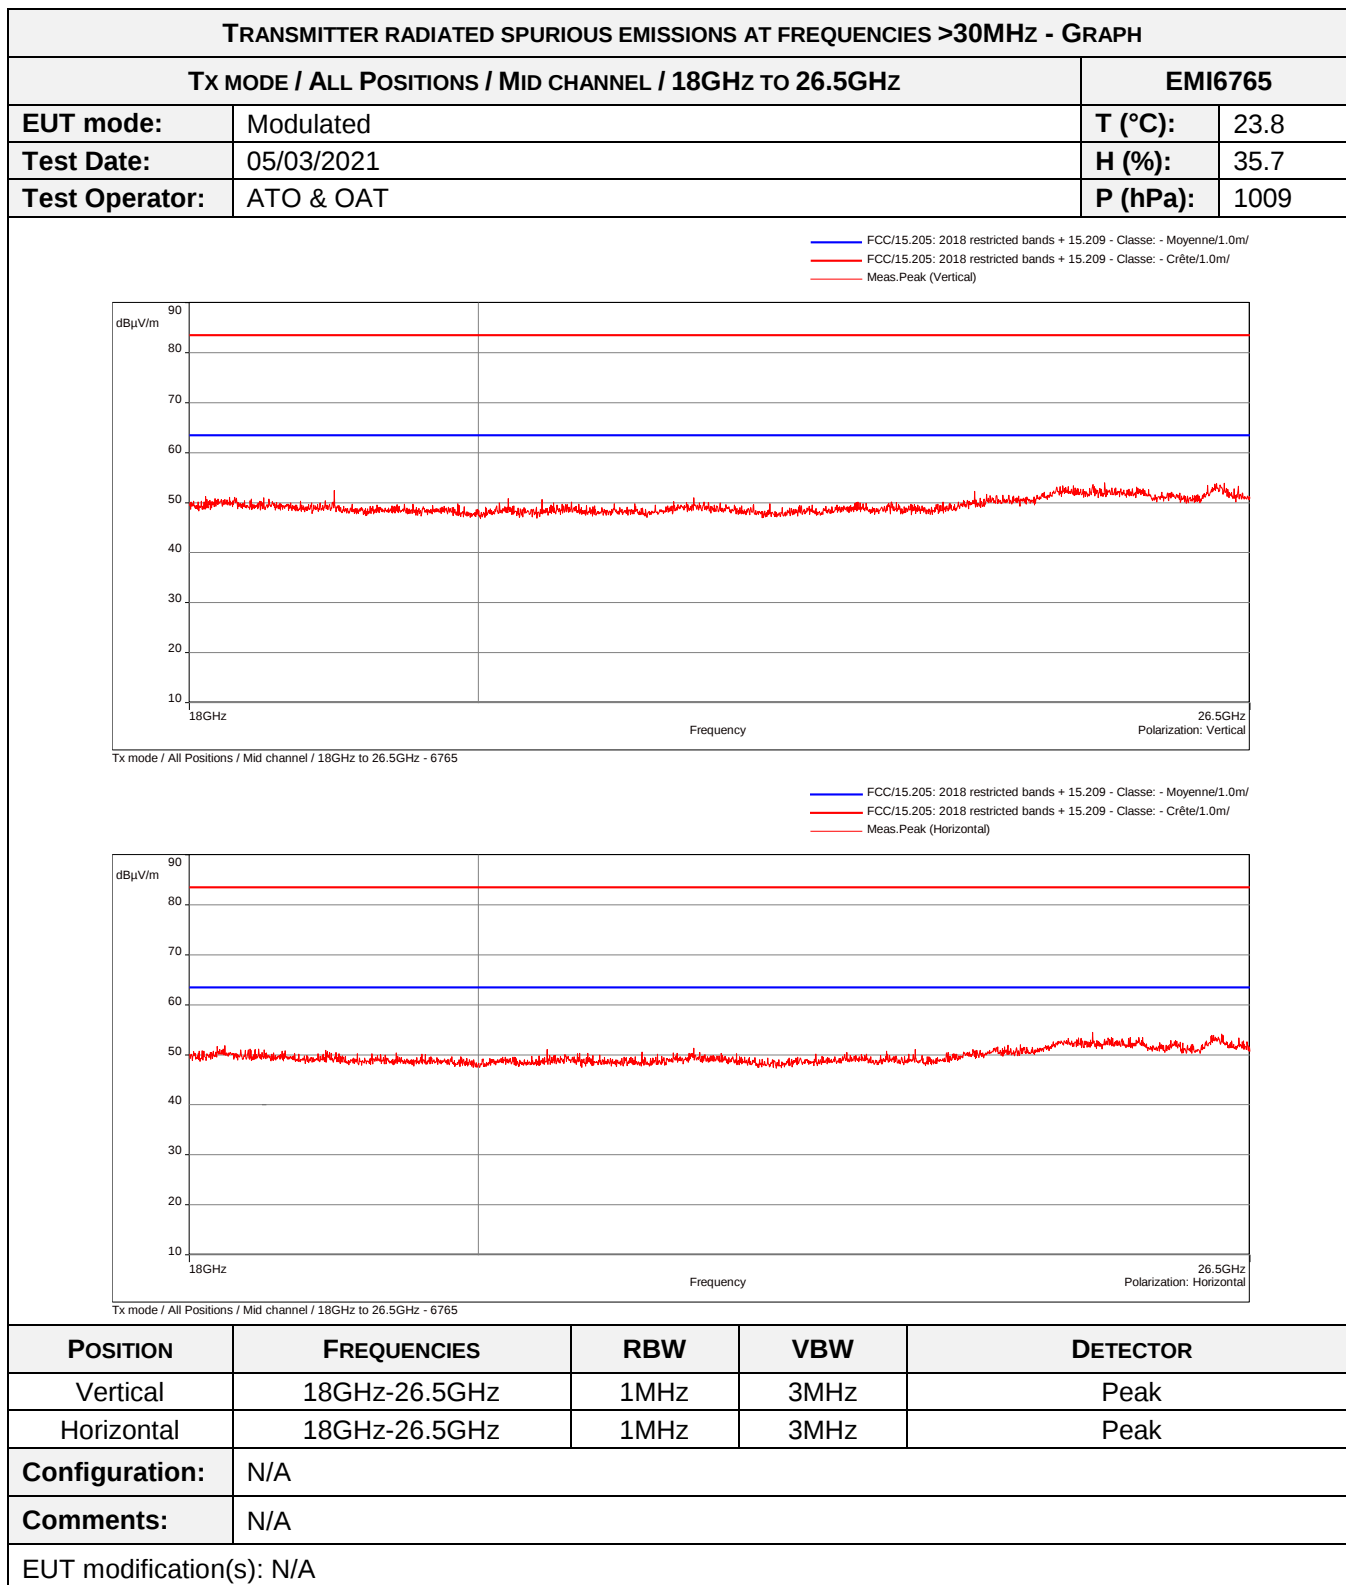


No spurious emissions were detected.

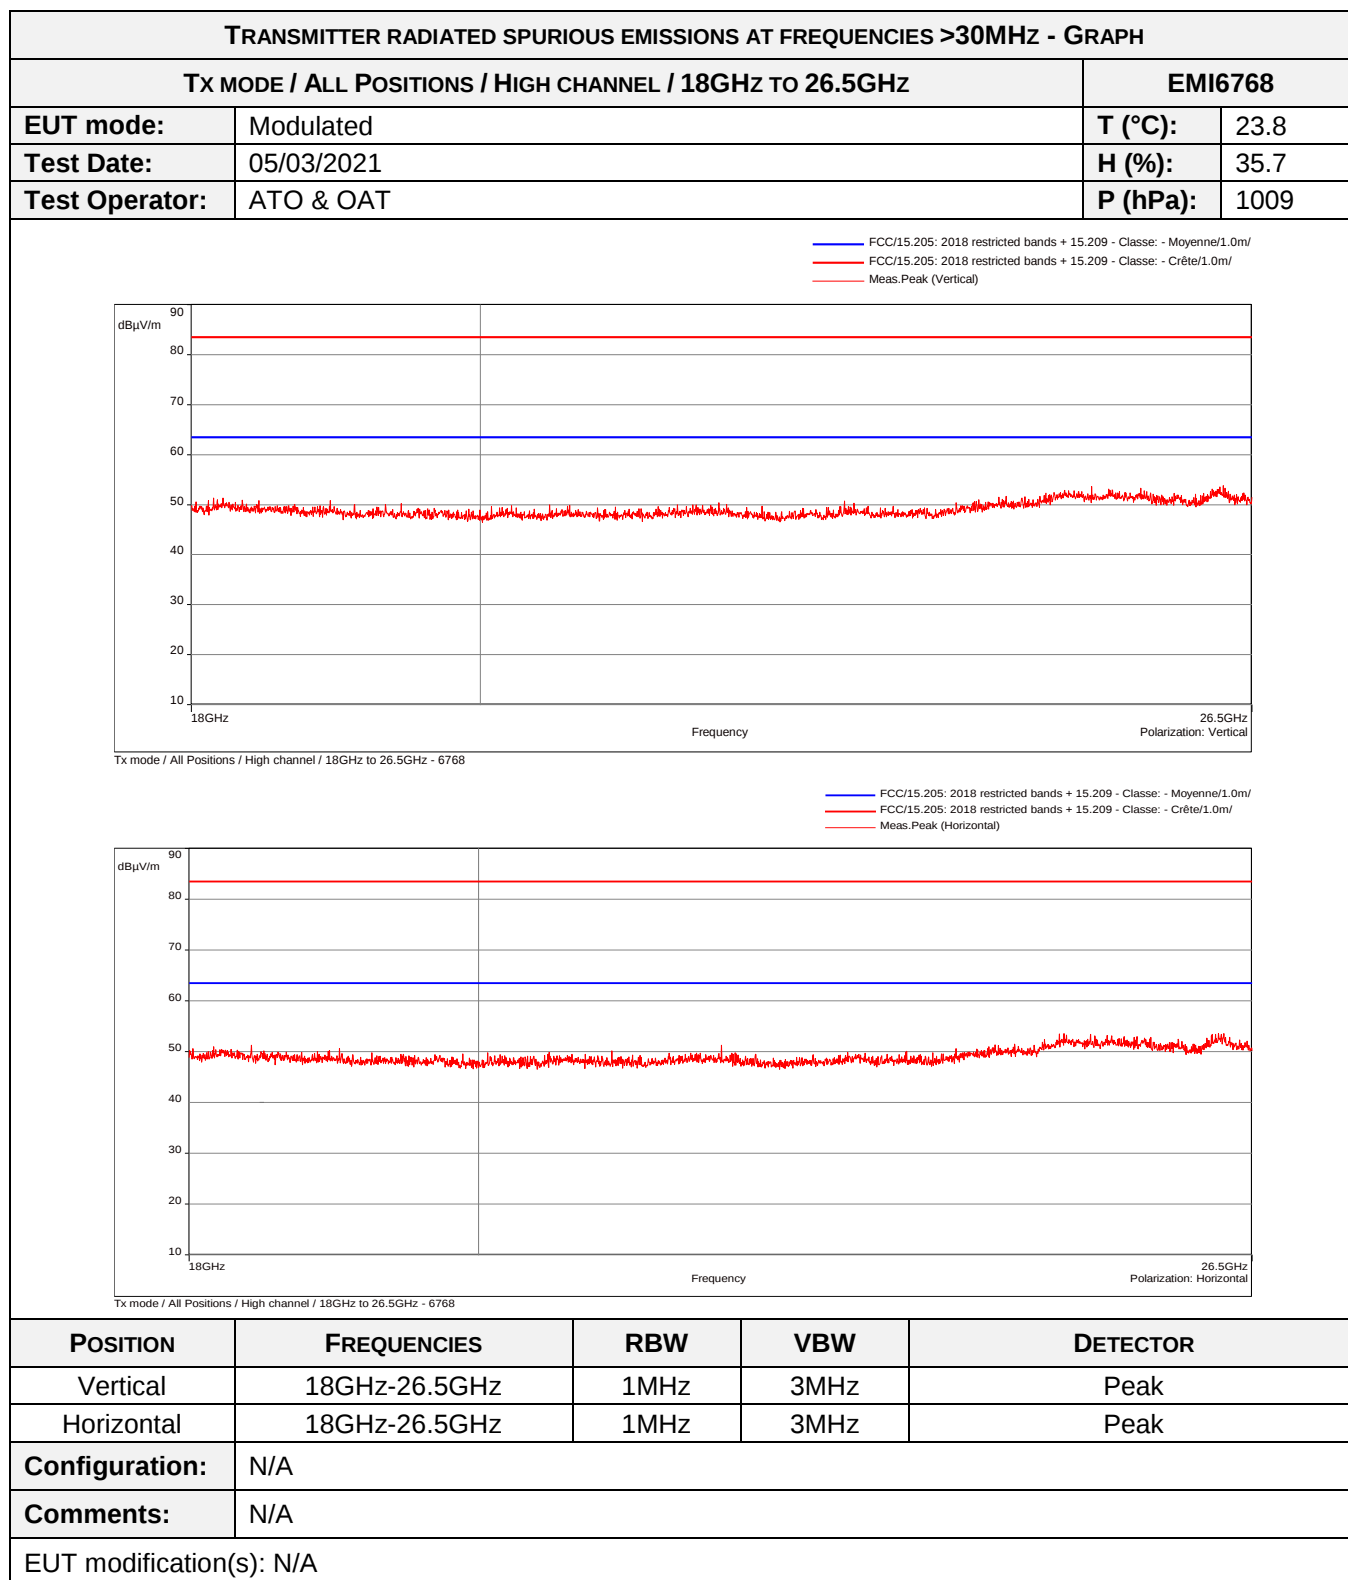


No spurious emissions were detected.

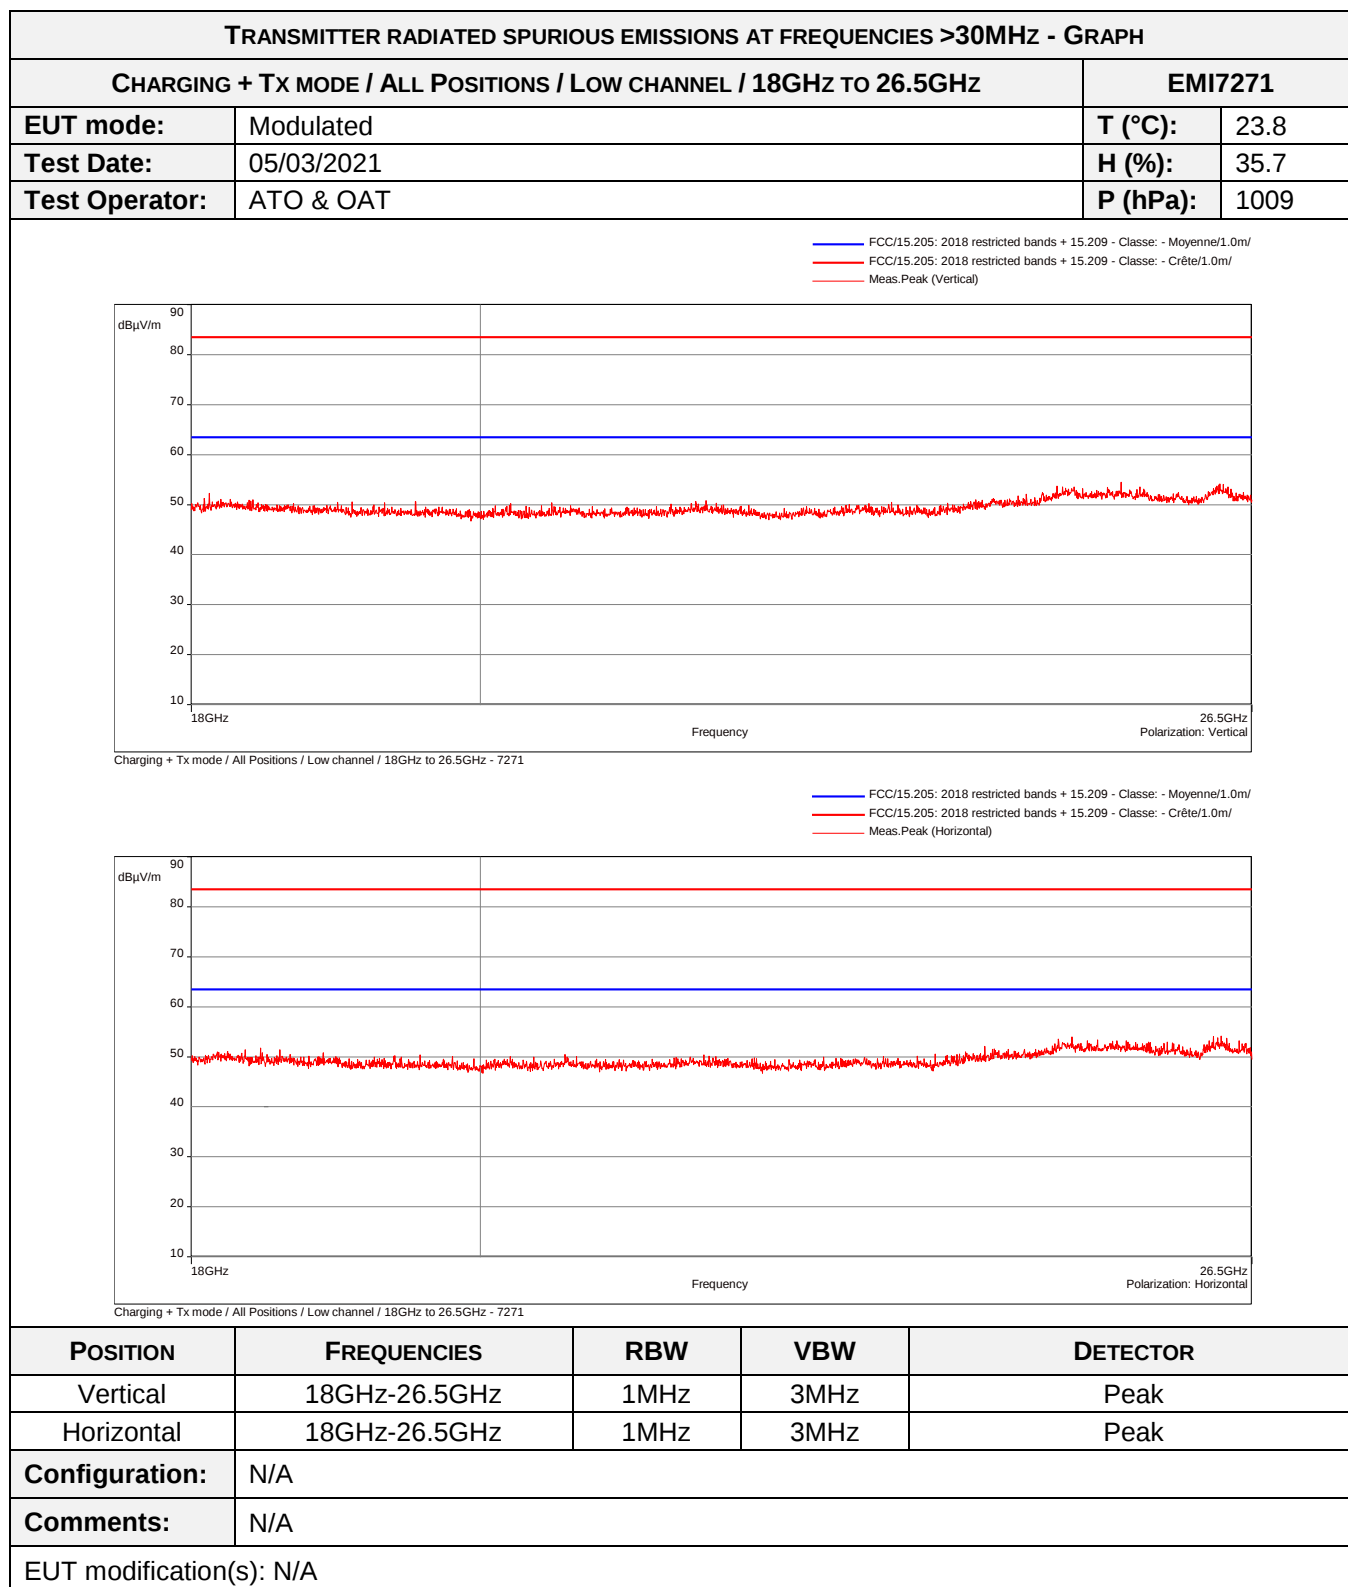

No spurious emissions were detected.

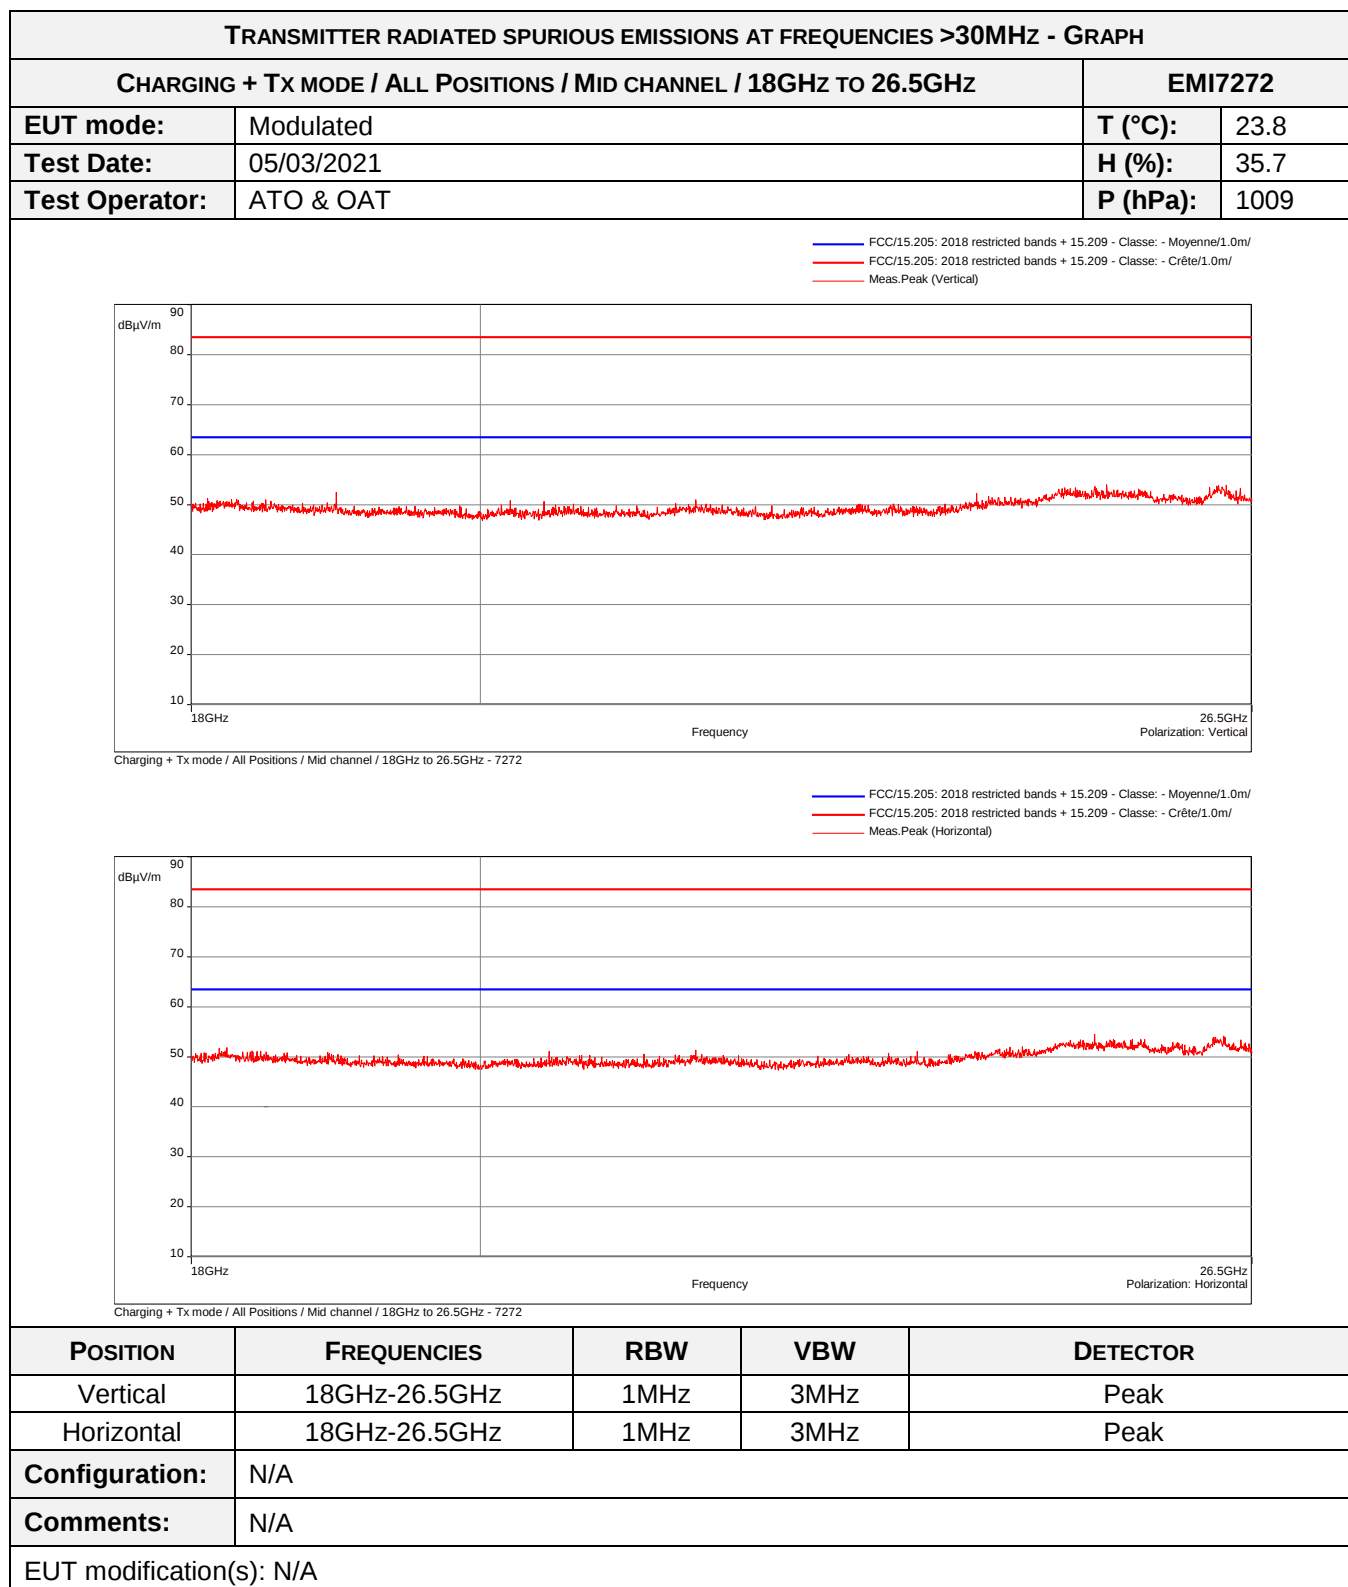

No spurious emissions were detected.

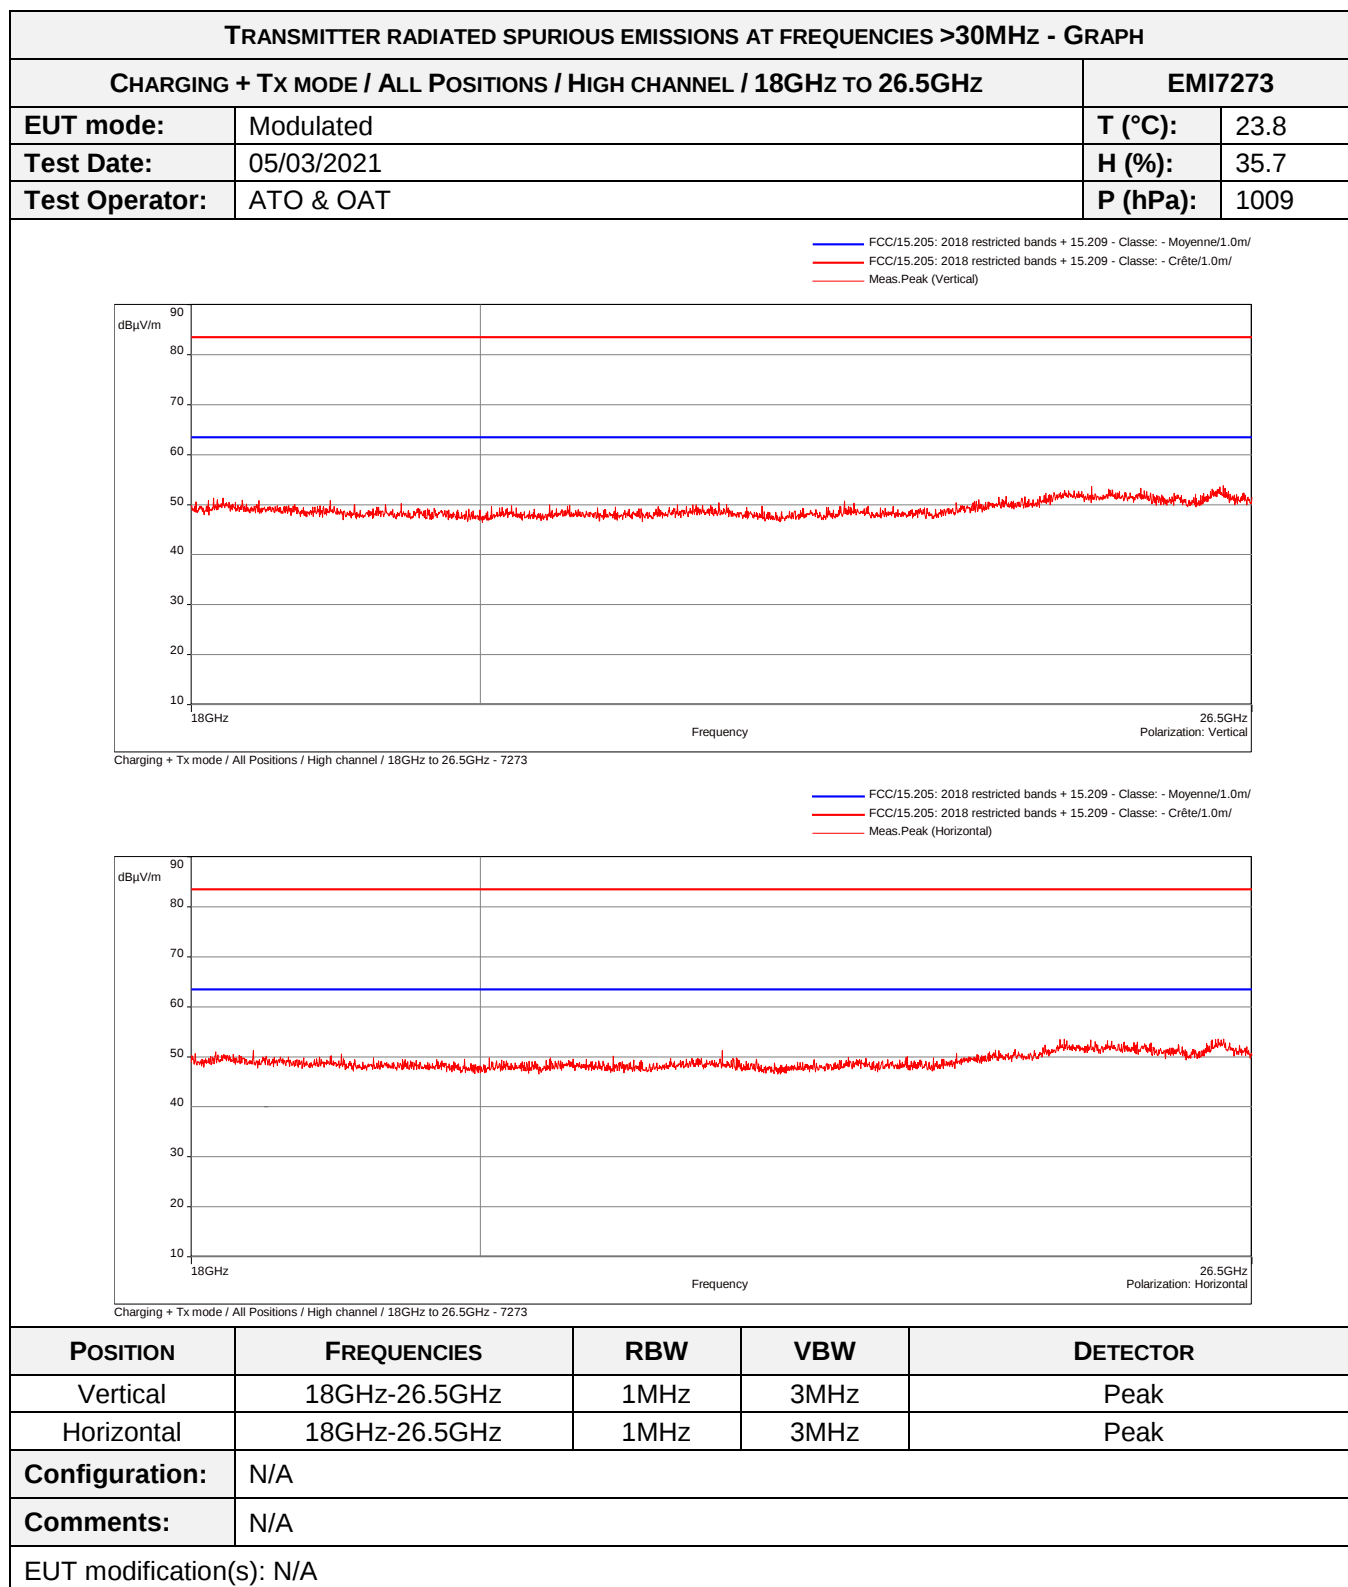

No spurious emissions were detected.

8.9. Radiated spurious emissions (receiver)

Reference standard:	FCC part 15 Radio part 15.209 & CNR-Gen
Test method:	FCC part 15.109, 15.209, 15.205, 15.215, CNR-Gen
General test setup: EUT is set on an insulating support at 80cm above the ground reference plane. Measurement are done on a normalized test site by the substitution method. The test antenna is oriented in the two polarizations (vertical and horizontal), and the product is rotated at 360° in the horizontal plane (See photo(s) for initial position of the EUT(0°)). If applicable the test antenna was raised and lowered through the specified range of height until a maximum signal level is detected. For portable equipments a research of maximum level is done on the 3 axes. Only the highest levels are recorded.	

TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
Rx mode / All Positions / All channels/ For freq <1GHz	30MHz-1GHz	15.209	EMI6973	PASS
Charging + Rx mode / All Positions / All channels	30MHz-1GHz	15.209	EMI6976	PASS
Rx mode / All Positions / All channels / 1GHz to 18GHz	1GHz-18GHz	15.209	EMI7024	PASS
Charging + Rx mode / All Positions / All channels / 1GHz to 18GHz	1GHz-18GHz	15.209	EMI7028	PASS
Rx mode / All Positions / All channels / 18GHz to 26.5GHz	18GHz-26.5GHz	15.209	EMI7294	PASS
Charging + Rx mode / All Positions / All channels / 18GHz to 26.5GHz	18GHz-26.5GHz	15.209	EMI7306	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(s)
Relative Humidity	20 to 75 %	See Graph(s)
Atmospheric pressure	N/A	See Graph(s)
Test method deviation: N/A		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Antenna	ETS lindgren	3160-09	14690	26/09/2017	26/11/2021
Antenna	Electro Metrics	BIA-30HF	0824	13/06/2018	13/08/2021
Antenna	Rohde & Schwarz	HL223	3126	13/06/2018	13/08/2021
Cable	MegaPhase	F135N1N28	16664	25/10/2019	25/12/2021
Cable	MegaPhase	F135N1N28	16666	25/10/2019	25/12/2021
Cable	JYE BAO	K30K30-5003-40G1	14887	25/06/2019	25/08/2021
Cable	Huber + Suhner	K-5m	14460	25/06/2019	25/08/2021
Cable	/	N-1m	3625	27/01/2021	27/03/2023
Cable	SUCOFLEX	N-5,5m	14381	25/06/2019	25/08/2021
Cable	SUCOFLEX	N-6,5m	14380	25/07/2019	25/09/2021
Cable	MegaPhase	N-8m	15813	14/01/2021	14/03/2023
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Cable	Huber + Suhner	SF102K	16042	24/03/2021	24/05/2023
Cable	MegaPhase	TM18-N1N1-118	12841	14/08/2020	14/10/2022
Cable	MegaPhase	TM18-N1N1-118	12842	02/12/2020	02/02/2023
Preamplifier	Wright Technologie	ASL40-B3015	14851	12/08/2020	12/10/2021
Preamplifier	IMPULSE	CA118-546ACN	9169	13/01/2021	13/03/2022
Receiver	Agilent Technologies	E4440A	5824	22/10/2020	22/12/2022
Receiver	Rohde & Schwarz	ESI	9704	03/03/2020	03/05/2021
Receiver	Rohde & Schwarz	FSW43	14830	29/07/2020	29/09/2021
Shielded enclosure	RAY PROOF	C.V2	1423	04/10/2019	04/12/2022
Shielded enclosure	COMTEST	SAC 3m	14494	02/10/2019	02/12/2022
Software	Nexio		0000		
Thermohygrometer	Testo	608-H1	7562	25/01/2019	25/03/2021
Thermohygrometer	Testo	608-H2	12268	07/05/2020	07/07/2022
Thermohygrometer	Testo	608-H2	12269	07/05/2020	07/07/2022
Thermohygrometer	Bioblock Scientific	Météostar	0963	25/01/2019	25/03/2021
Thermohygrometer	Bioblock Scientific	Météostar	0963	26/01/2019	26/09/2021

BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity

RADIATED SPURIOUS EMISSIONS (RECEIVER)- TABULATED RESULTS					
CHARGING + TX MODE / ALL POSITIONS / ALL CHANNELS				EMI6976	
Frequency MHz	Polarization	Level peak dBμV/m	Level Qpeak dBμV/m	Limit dBμV/m	Margin dB
30.068	Verticale	36.29	26.52	40	-13.48
30.119	Verticale	35.92	26.7	40	-13.3
30.221	Verticale	37.11	28.32	40	-11.68
30.408	Verticale	38.16	28.17	40	-11.83
30.578	Verticale	39.83	30.26	40	-9.74
30.731	Verticale	40.43	29.94	40	-10.06
30.867	Verticale	41.78	31.53	40	-8.47
30.969	Verticale	42.58	32.8	40	-7.2
31.139	Verticale	43.64	32.39	40	-7.61
31.275	Verticale	44.92	34.68	40	-5.32
31.343	Verticale	45.17	34.83	40	-5.17
31.428	Verticale	45.79	34.25	40	-5.75
31.530	Verticale	45.9	35.21	40	-4.79
31.785	Verticale	46.16	35.06	40	-4.94
31.887	Verticale	46.09	34.72	40	-5.28
31.972	Verticale	45.84	35.35	40	-4.65
32.176	Verticale	44.81	33.15	40	-6.85
32.244	Verticale	44.67	32.94	40	-7.06
32.601	Verticale	42.32	32.68	40	-7.32
33.009	Verticale	40.46	33.33	40	-6.67
33.281	Verticale	39.4	33.17	40	-6.83
33.451	Verticale	40.31	34.14	40	-5.86
33.689	Verticale	40.24	34.44	40	-5.56
33.774	Verticale	41.19	34.84	40	-5.16
33.876	Verticale	41.57	34.92	40	-5.08
34.284	Verticale	42.67	35.93	40	-4.07
34.505	Verticale	43.85	36.83	40	-3.17
34.811	Verticale	43.98	37.3	40	-2.7
34.947	Verticale	44.52	37.45	40	-2.55
35.169	Verticale	44.07	37.68	40	-2.32
35.526	Verticale	43.17	37.58	40	-2.42
35.662	Verticale	43.2	36.94	40	-3.06
35.985	Verticale	42.53	36.62	40	-3.38
36.223	Verticale	42.15	36.71	40	-3.29
36.427	Verticale	41.1	35.96	40	-4.04
36.767	Verticale	38.45	32.74	40	-7.26
36.920	Verticale	36.9	31.14	40	-8.86
37.039	Verticale	37.51	30.61	40	-9.39
37.124	Verticale	37.48	30.67	40	-9.33
37.243	Verticale	36.46	30.52	40	-9.48
37.311	Verticale	37.38	30.61	40	-9.39
37.447	Verticale	37.91	30.74	40	-9.26
37.617	Verticale	36.23	30.14	40	-9.86
37.838	Verticale	36.5	29.39	40	-10.61
37.923	Verticale	35.18	28.92	40	-11.08

RADIATED SPURIOUS EMISSIONS (RECEIVER)- TABULATED RESULTS					
CHARGING + TX MODE / ALL POSITIONS / ALL CHANNELS				EMI6976	
38.025	Verticale	36.58	29.04	40	-10.96
38.195	Verticale	37.12	28.9	40	-11.1
38.331	Verticale	37.07	29.19	40	-10.81
38.620	Verticale	38.36	29.55	40	-10.45
38.756	Verticale	37.35	29.43	40	-10.57
38.909	Verticale	37.35	29.85	40	-10.15
39.317	Verticale	39.04	30.76	40	-9.24
39.606	Verticale	39.95	32.18	40	-7.82
39.861	Verticale	40.51	32.1	40	-7.9
39.946	Verticale	41	32.98	40	-7.02
40.065	Verticale	40.81	32.9	40	-7.1
40.167	Verticale	40.08	32.88	40	-7.12
40.303	Verticale	41.83	34.2	40	-5.8
40.439	Verticale	41.41	33.49	40	-6.51
40.558	Verticale	42.76	34.56	40	-5.44
40.711	Verticale	42.62	34.37	40	-5.63
40.813	Verticale	42.8	34.83	40	-5.17
40.881	Verticale	42.97	34.67	40	-5.33
40.966	Verticale	42.81	35.02	40	-4.98
41.085	Verticale	41.78	33.77	40	-6.23
41.255	Verticale	42.48	34.41	40	-5.59
41.357	Verticale	41.6	33.5	40	-6.5
41.442	Verticale	42.25	32.8	40	-7.2
41.595	Verticale	41.57	32.84	40	-7.16
41.748	Verticale	40.14	30.81	40	-9.19
42.105	Verticale	39.28	30.27	40	-9.73
42.343	Verticale	39.6	30.06	40	-9.94
42.564	Verticale	39.04	31.05	40	-8.95
42.785	Verticale	39.6	32	40	-8
43.074	Verticale	40.21	33.25	40	-6.75
43.142	Verticale	40.68	33.9	40	-6.1
43.261	Verticale	41.15	34.44	40	-5.56
43.516	Verticale	40.35	34.38	40	-5.62
43.635	Verticale	40.87	34.7	40	-5.3
43.873	Verticale	41.7	35.94	40	-4.06
44.077	Verticale	41.6	36.37	40	-3.63
44.162	Verticale	42.19	36.54	40	-3.46
44.536	Verticale	42.14	36.81	40	-3.19
44.587	Verticale	42.3	36.95	40	-3.05
44.791	Verticale	41.22	36.39	40	-3.61
44.927	Verticale	41.49	36.6	40	-3.4
45.149	Verticale	40.73	35.94	40	-4.06
45.540	Verticale	39.2	34.81	40	-5.19
45.625	Verticale	39.39	34.52	40	-5.48
45.795	Verticale	38.78	34.29	40	-5.71
45.880	Verticale	38.56	33.96	40	-6.04
45.999	Verticale	38.45	33.52	40	-6.48
46.084	Verticale	38.52	33.55	40	-6.45
46.339	Verticale	37.76	32.79	40	-7.21

RADIATED SPURIOUS EMISSIONS (RECEIVER)- TABULATED RESULTS					
CHARGING + TX MODE / ALL POSITIONS / ALL CHANNELS				EMI6976	
46.424	Verticale	37.7	32.8	40	-7.2
46.713	Verticale	37.1	31.67	40	-8.33
46.917	Verticale	35.89	30.91	40	-9.09
30.799	Horizontale	31.2	21.48	40	-18.52
30.986	Horizontale	34.1	23.38	40	-16.62
31.020	Horizontale	33.81	23.76	40	-16.24
31.088	Horizontale	35.31	24.29	40	-15.71
31.156	Horizontale	35.81	24.86	40	-15.14
31.207	Horizontale	36.42	25.25	40	-14.75
31.292	Horizontale	36.96	25.89	40	-14.11
31.428	Horizontale	38	26.54	40	-13.46
31.496	Horizontale	38.26	26.17	40	-13.83
31.598	Horizontale	37.99	25.67	40	-14.33
31.649	Horizontale	38.07	25.28	40	-14.72
31.717	Horizontale	37.27	24.96	40	-15.04
31.785	Horizontale	37.68	24.65	40	-15.35
31.904	Horizontale	36.49	24.14	40	-15.86
31.972	Horizontale	35.34	23.51	40	-16.49
32.040	Horizontale	35.46	23.02	40	-16.98
32.108	Horizontale	34.89	22.69	40	-17.31
32.227	Horizontale	34.09	22.24	40	-17.76
32.295	Horizontale	33.51	21.83	40	-18.17
32.346	Horizontale	32.85	21.56	40	-18.44
32.414	Horizontale	32.08	21.28	40	-18.72
32.499	Horizontale	31.97	21.22	40	-18.78
32.584	Horizontale	31.6	21.04	40	-18.96
32.720	Horizontale	30.93	20.92	40	-19.08
32.771	Horizontale	31.16	20.86	40	-19.14
32.890	Horizontale	29.93	20.67	40	-19.33
33.043	Horizontale	30.04	20.54	40	-19.46
33.196	Horizontale	29.34	20.53	40	-19.47
33.366	Horizontale	29.5	20.4	40	-19.6
33.536	Horizontale	28.83	20.26	40	-19.74
33.604	Horizontale	28.33	20.19	40	-19.81
33.842	Horizontale	27.86	20.18	40	-19.82
179.972	Horizontale	35.76	24.93	43.5	-18.57
180.414	Horizontale	35.62	24.87	43.5	-18.63
180.618	Horizontale	35.57	24.87	43.5	-18.63
180.703	Horizontale	35.57	24.86	43.5	-18.64
180.822	Horizontale	35.97	24.91	43.5	-18.59
180.941	Horizontale	35.96	25	43.5	-18.5
181.145	Horizontale	35.97	25.04	43.5	-18.46
181.298	Horizontale	35.79	25.08	43.5	-18.42
181.468	Horizontale	37.24	25.17	43.5	-18.33
181.621	Horizontale	35.79	25.07	43.5	-18.43
181.842	Horizontale	36.29	25.16	43.5	-18.34
181.944	Horizontale	35.61	25.25	43.5	-18.25
182.114	Horizontale	36.01	25.2	43.5	-18.3
182.318	Horizontale	36.16	25.28	43.5	-18.22

RADIATED SPURIOUS EMISSIONS (RECEIVER)- TABULATED RESULTS					
CHARGING + TX MODE / ALL POSITIONS / ALL CHANNELS				EMI6976	
182.488	Horizontale	36.31	25.23	43.5	-18.27
182.624	Horizontale	35.49	25.27	43.5	-18.23
182.879	Horizontale	35.89	25.26	43.5	-18.24
182.981	Horizontale	35.91	25.26	43.5	-18.24
183.338	Horizontale	35.64	25.34	43.5	-18.16
183.576	Horizontale	35.64	25.29	43.5	-18.21
183.729	Horizontale	36.52	25.28	43.5	-18.22
184.188	Horizontale	35.75	25.49	43.5	-18.01
184.290	Horizontale	35.42	25.26	43.5	-18.24
184.562	Horizontale	35.17	25.39	43.5	-18.11
184.902	Horizontale	35.91	25.33	43.5	-18.17
184.970	Horizontale	34.99	25.24	43.5	-18.26
185.192	Horizontale	35.32	25.29	43.5	-18.21
185.583	Horizontale	35.35	25.24	43.5	-18.26
186.450	Horizontale	35.84	25.34	43.5	-18.16
187.045	Horizontale	34.5	25.3	43.5	-18.2
187.334	Horizontale	34.52	25.26	43.5	-18.24
187.623	Horizontale	35.25	25.17	43.5	-18.33
187.878	Horizontale	34.91	25.17	43.5	-18.33
188.660	Horizontale	34.42	24.85	43.5	-18.65
189.153	Horizontale	33.36	24.7	43.5	-18.8
189.340	Horizontale	33.5	24.56	43.5	-18.94
189.629	Horizontale	32.67	24.46	43.5	-19.04
189.782	Horizontale	33.88	24.41	43.5	-19.09
190.156	Horizontale	32.59	24.33	43.5	-19.17
190.717	Horizontale	33.2	24.3	43.5	-19.2
191.040	Horizontale	32.98	24.24	43.5	-19.26
191.125	Horizontale	32.43	24.3	43.5	-19.2
191.227	Horizontale	32.39	24.26	43.5	-19.24
191.431	Horizontale	31.3	24.29	43.5	-19.21
191.771	Horizontale	31.93	24.33	43.5	-19.17
191.992	Horizontale	31.8	24.36	43.5	-19.14
192.366	Horizontale	32.57	24.35	43.5	-19.15
192.995	Horizontale	32.04	24.38	43.5	-19.12
193.114	Horizontale	31.37	24.45	43.5	-19.05

TEST SETUP PHOTO(S) – Rx MODE / POSITION 1



TEST SETUP PHOTO(S) – Rx MODE – POSITION 2



TEST SETUP PHOTO(S) – RX MODE – POSITION 3



TEST SETUP PHOTO(S) – CHARGING + RX MODE – POSITION 1



TEST SETUP PHOTO(S) - CHARGING + RX MODE – POSITION 2



TEST SETUP PHOTO(S) - CHARGING + RX MODE – POSITION 3




TEST SETUP PHOTO(S) – RX MODE – 30MHz TO 200MHz



TEST SETUP PHOTO(S) – RX MODE – 200MHz TO 1GHz




TEST SETUP PHOTO(S) – RX MODE – 1GHZ TO 18GHZ

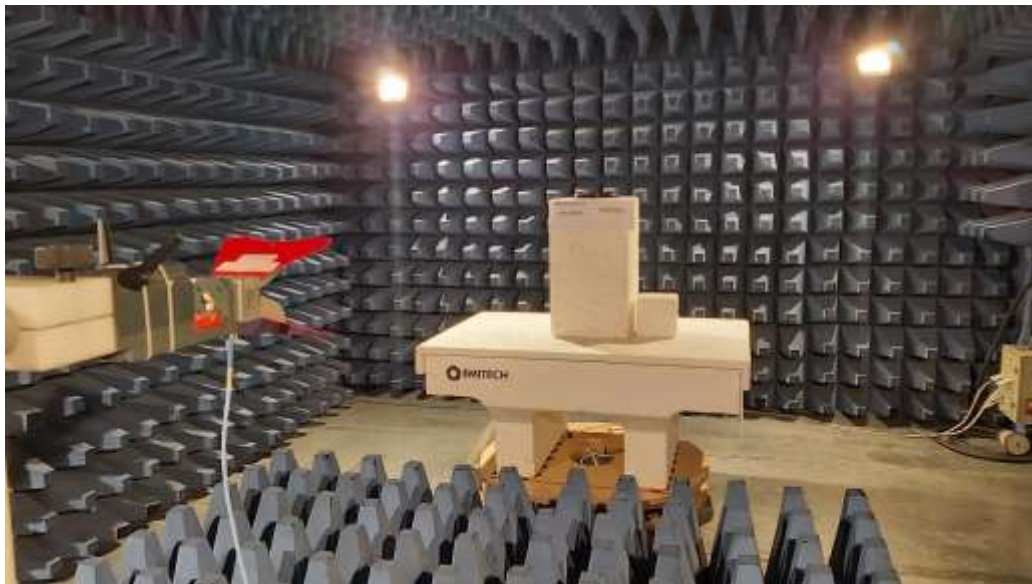



TEST SETUP PHOTO(S) - RX MODE / 18GHZ TO 26.5GHZ




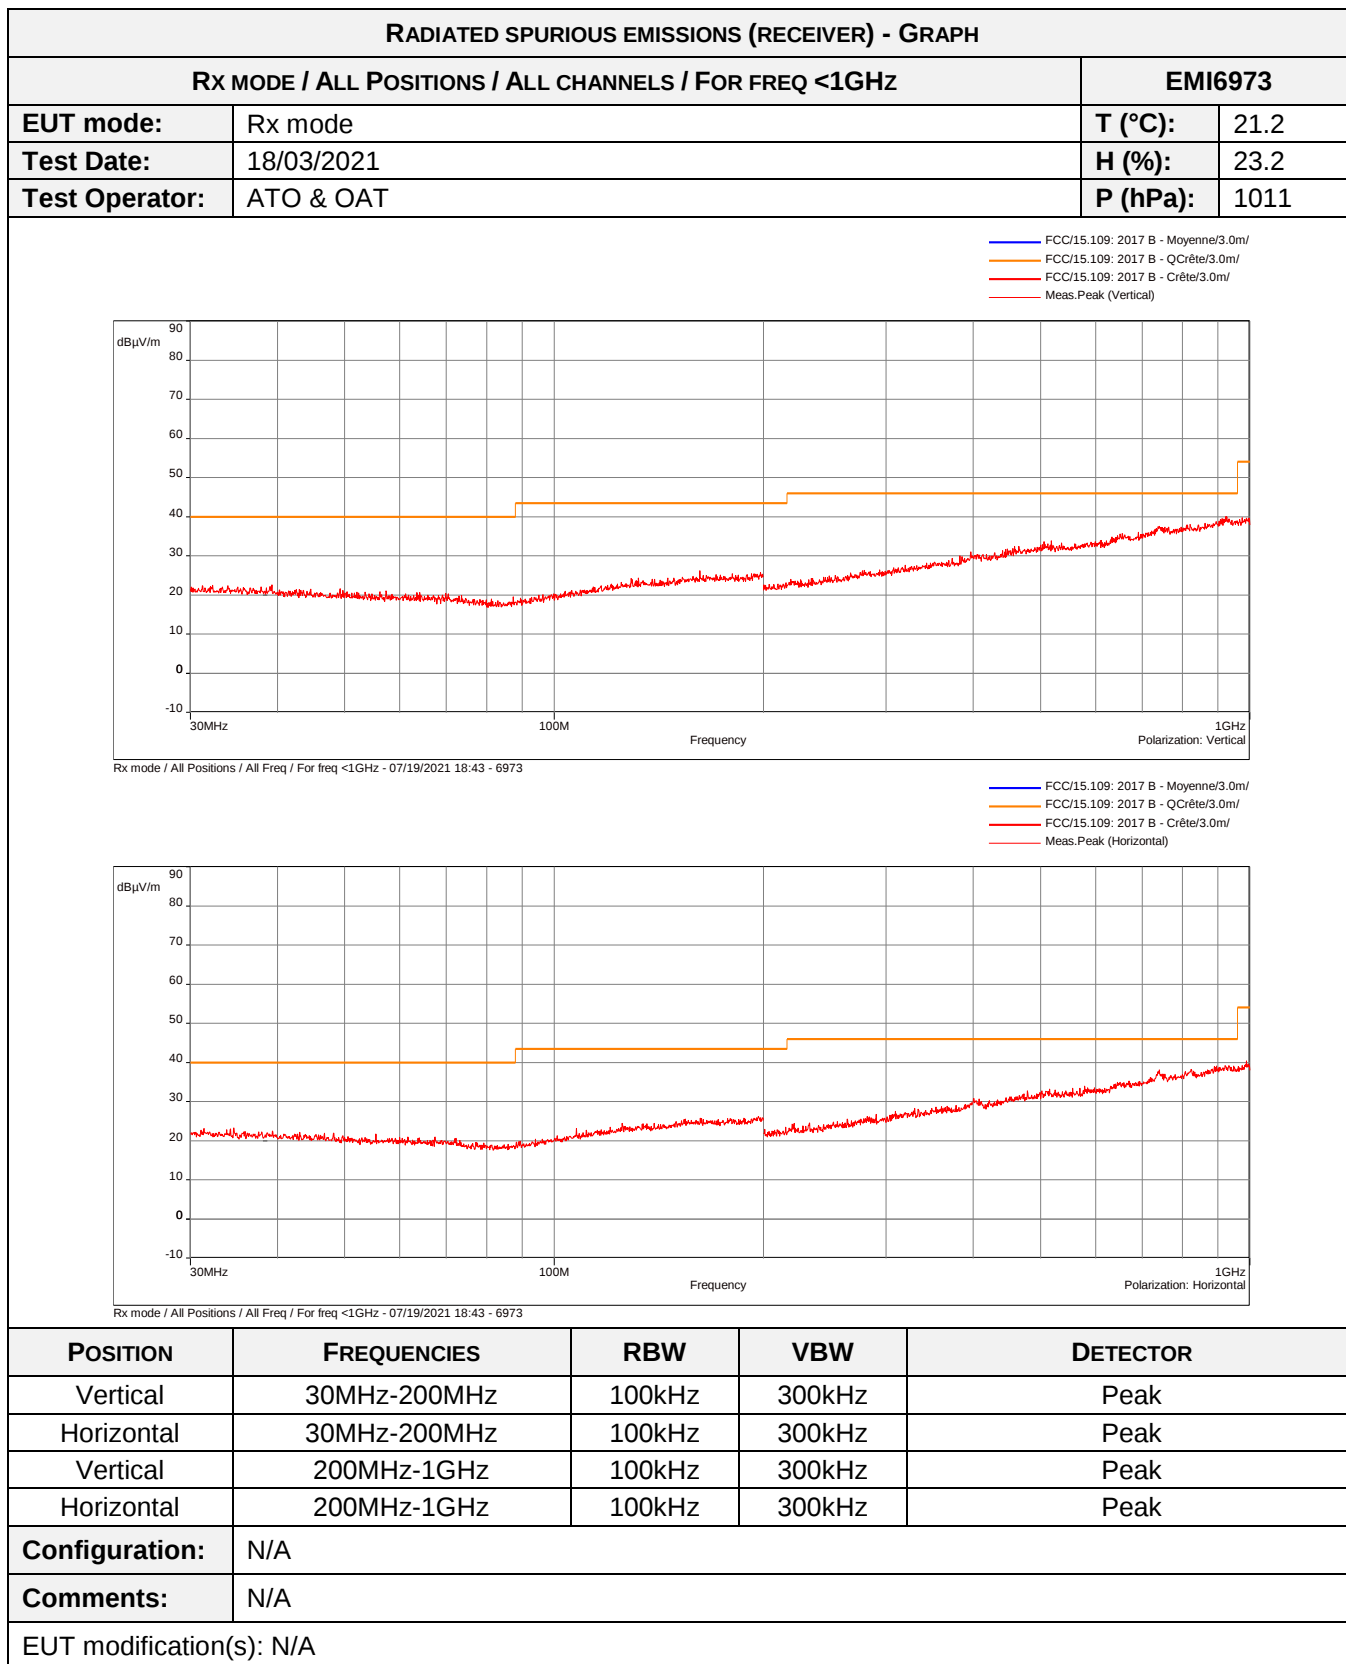



No spurious emissions were detected.

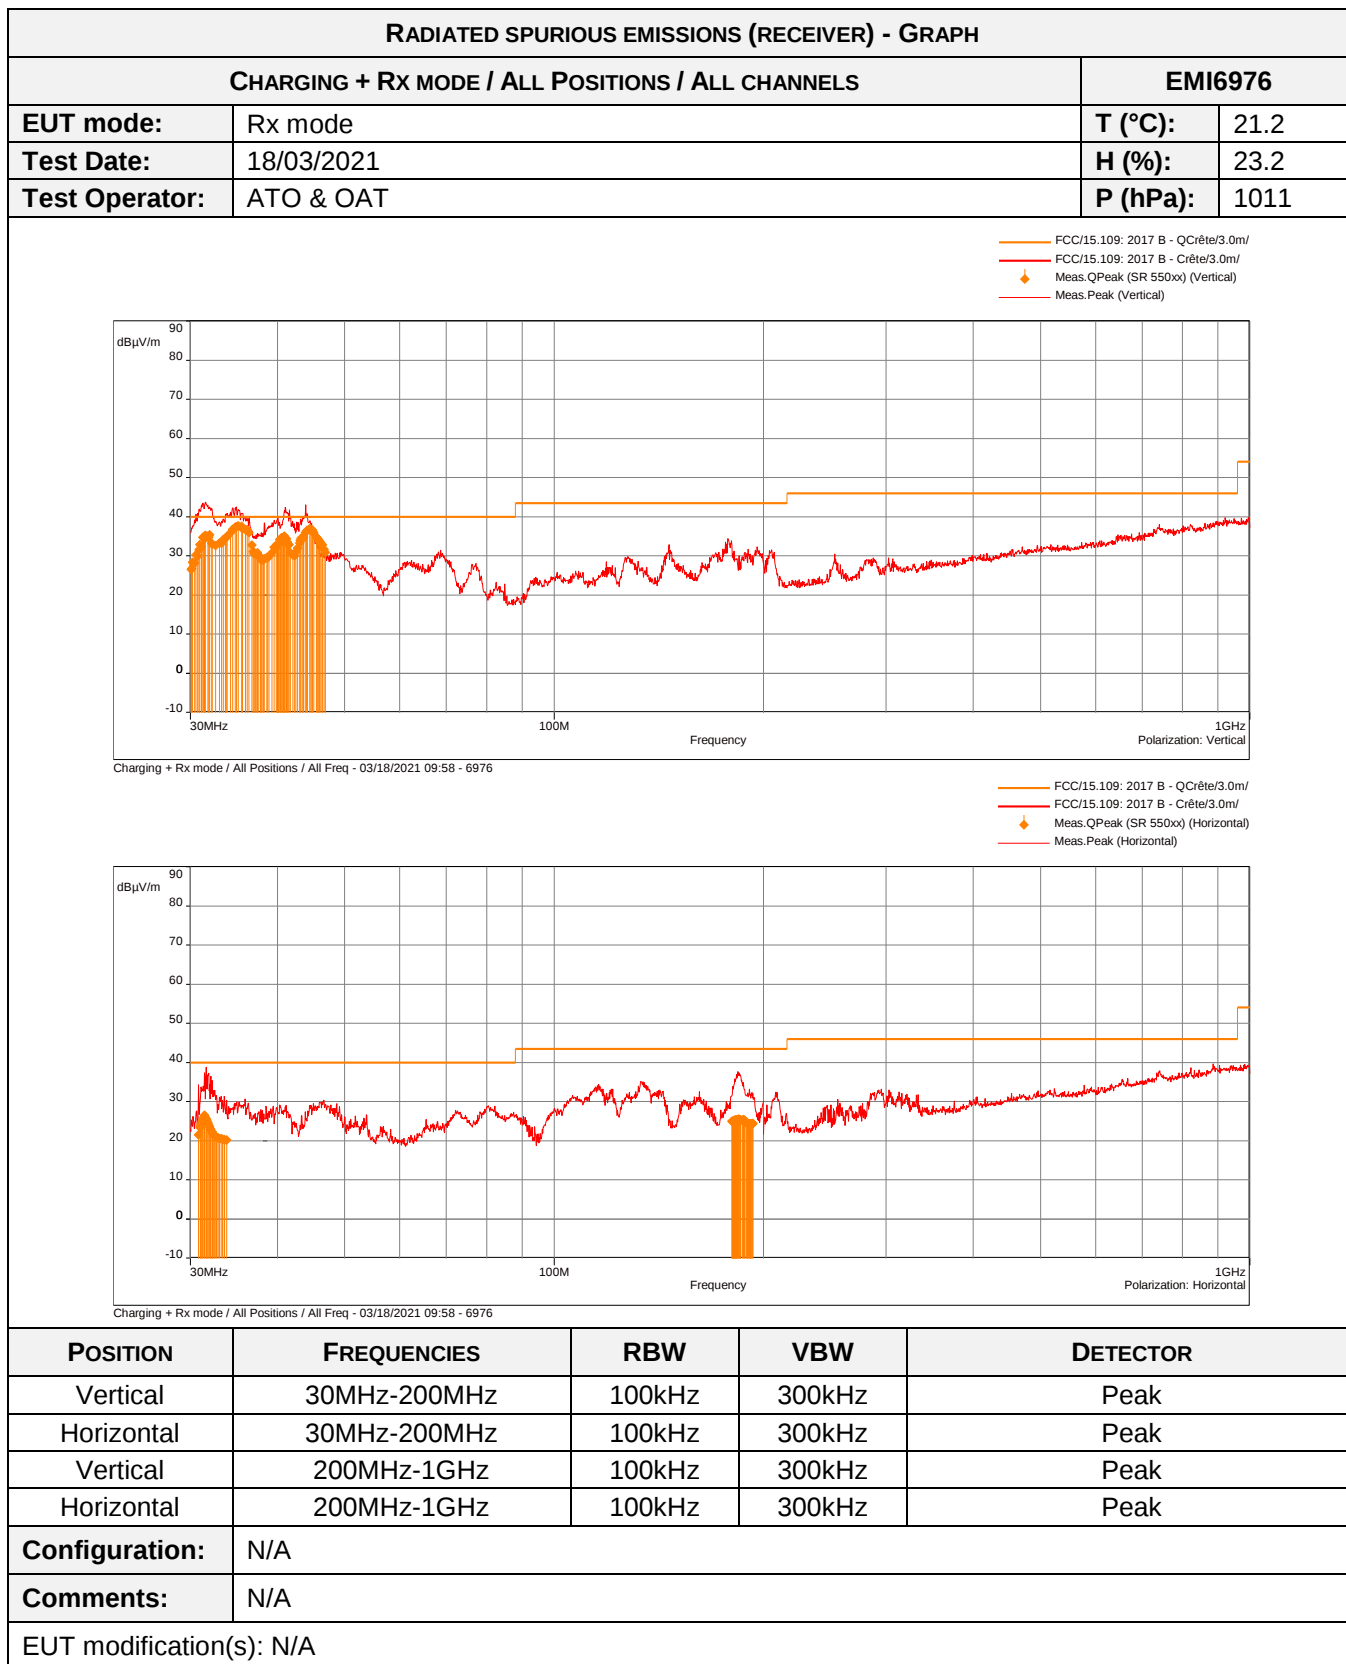

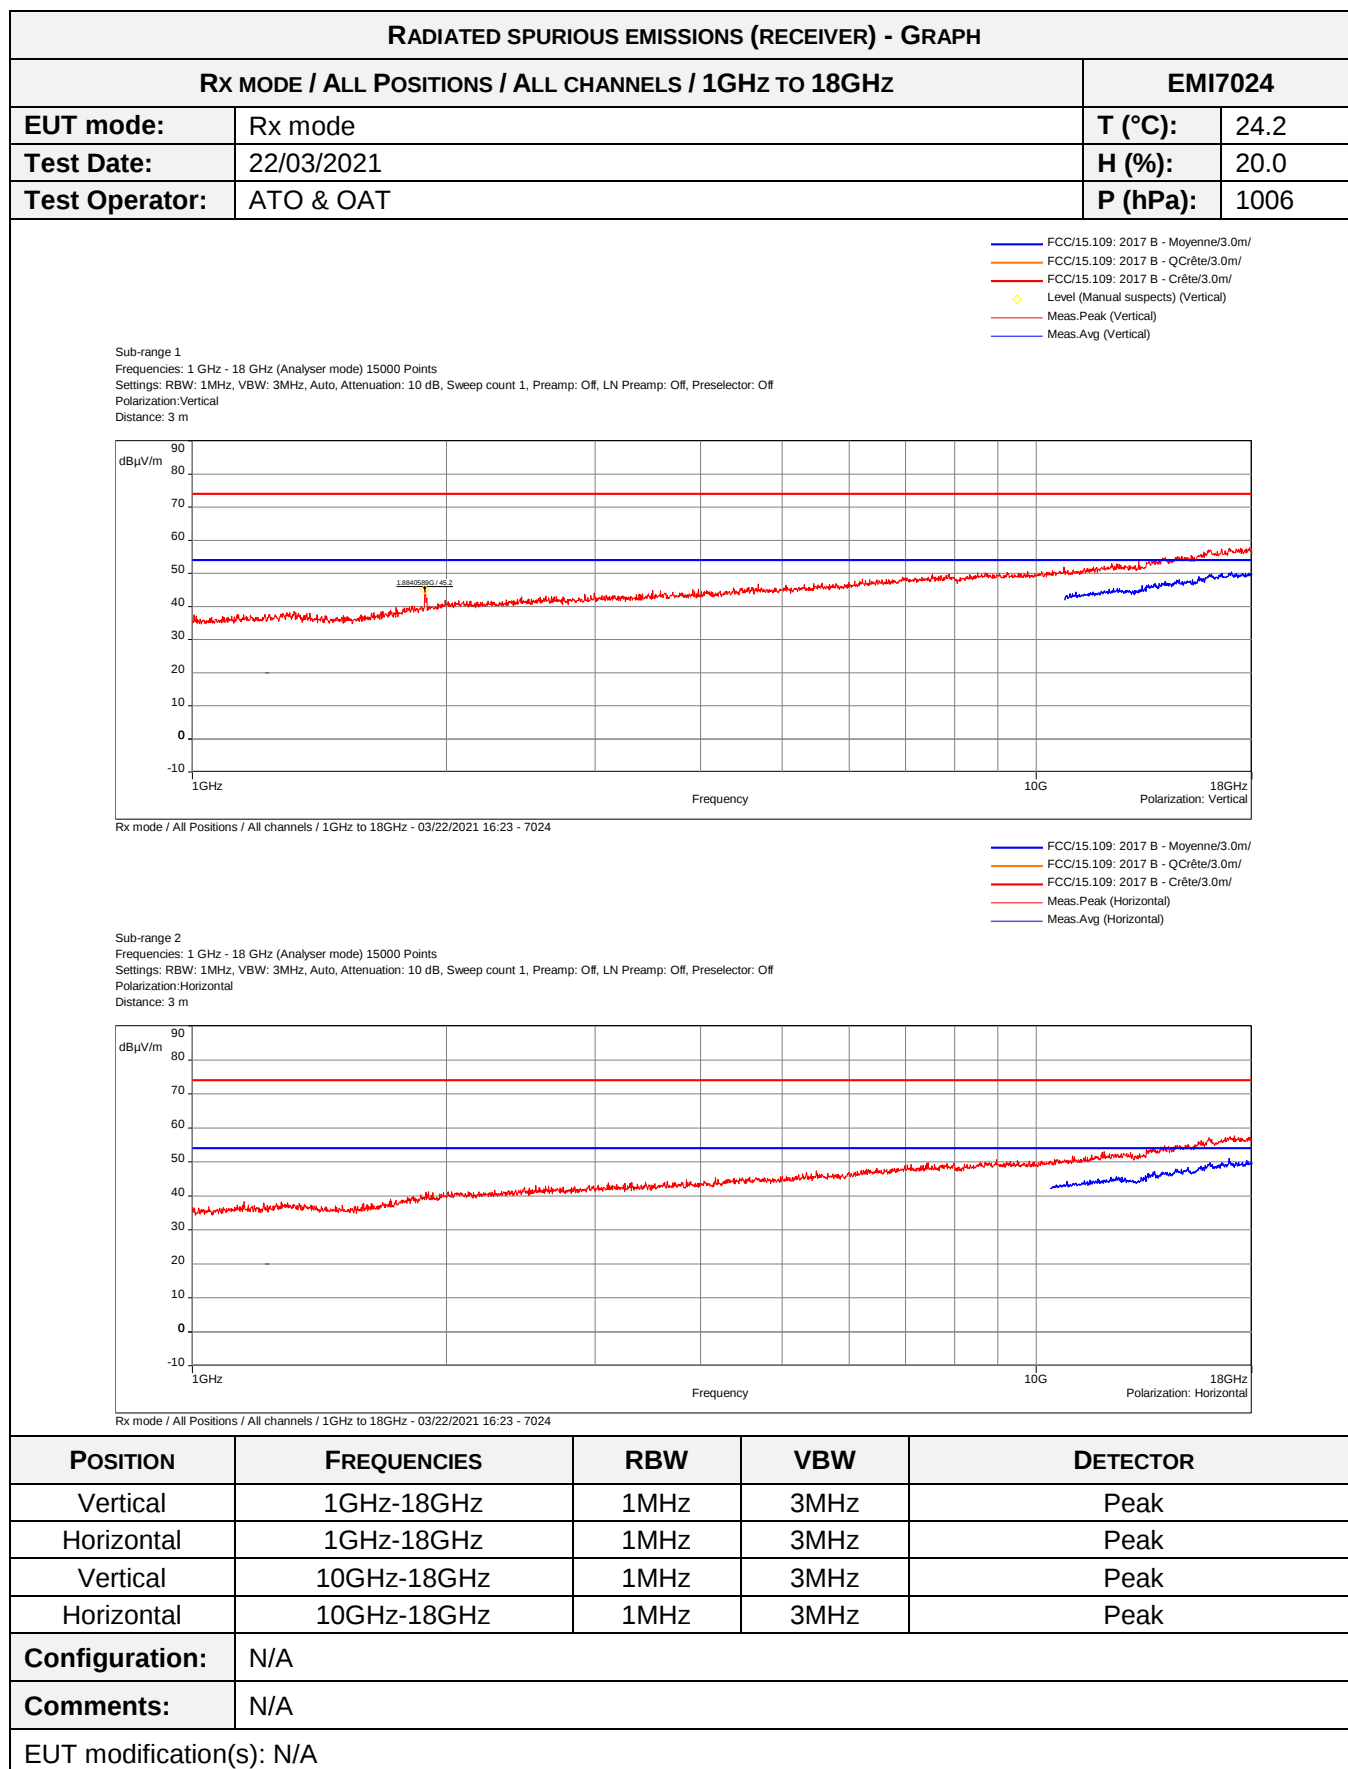

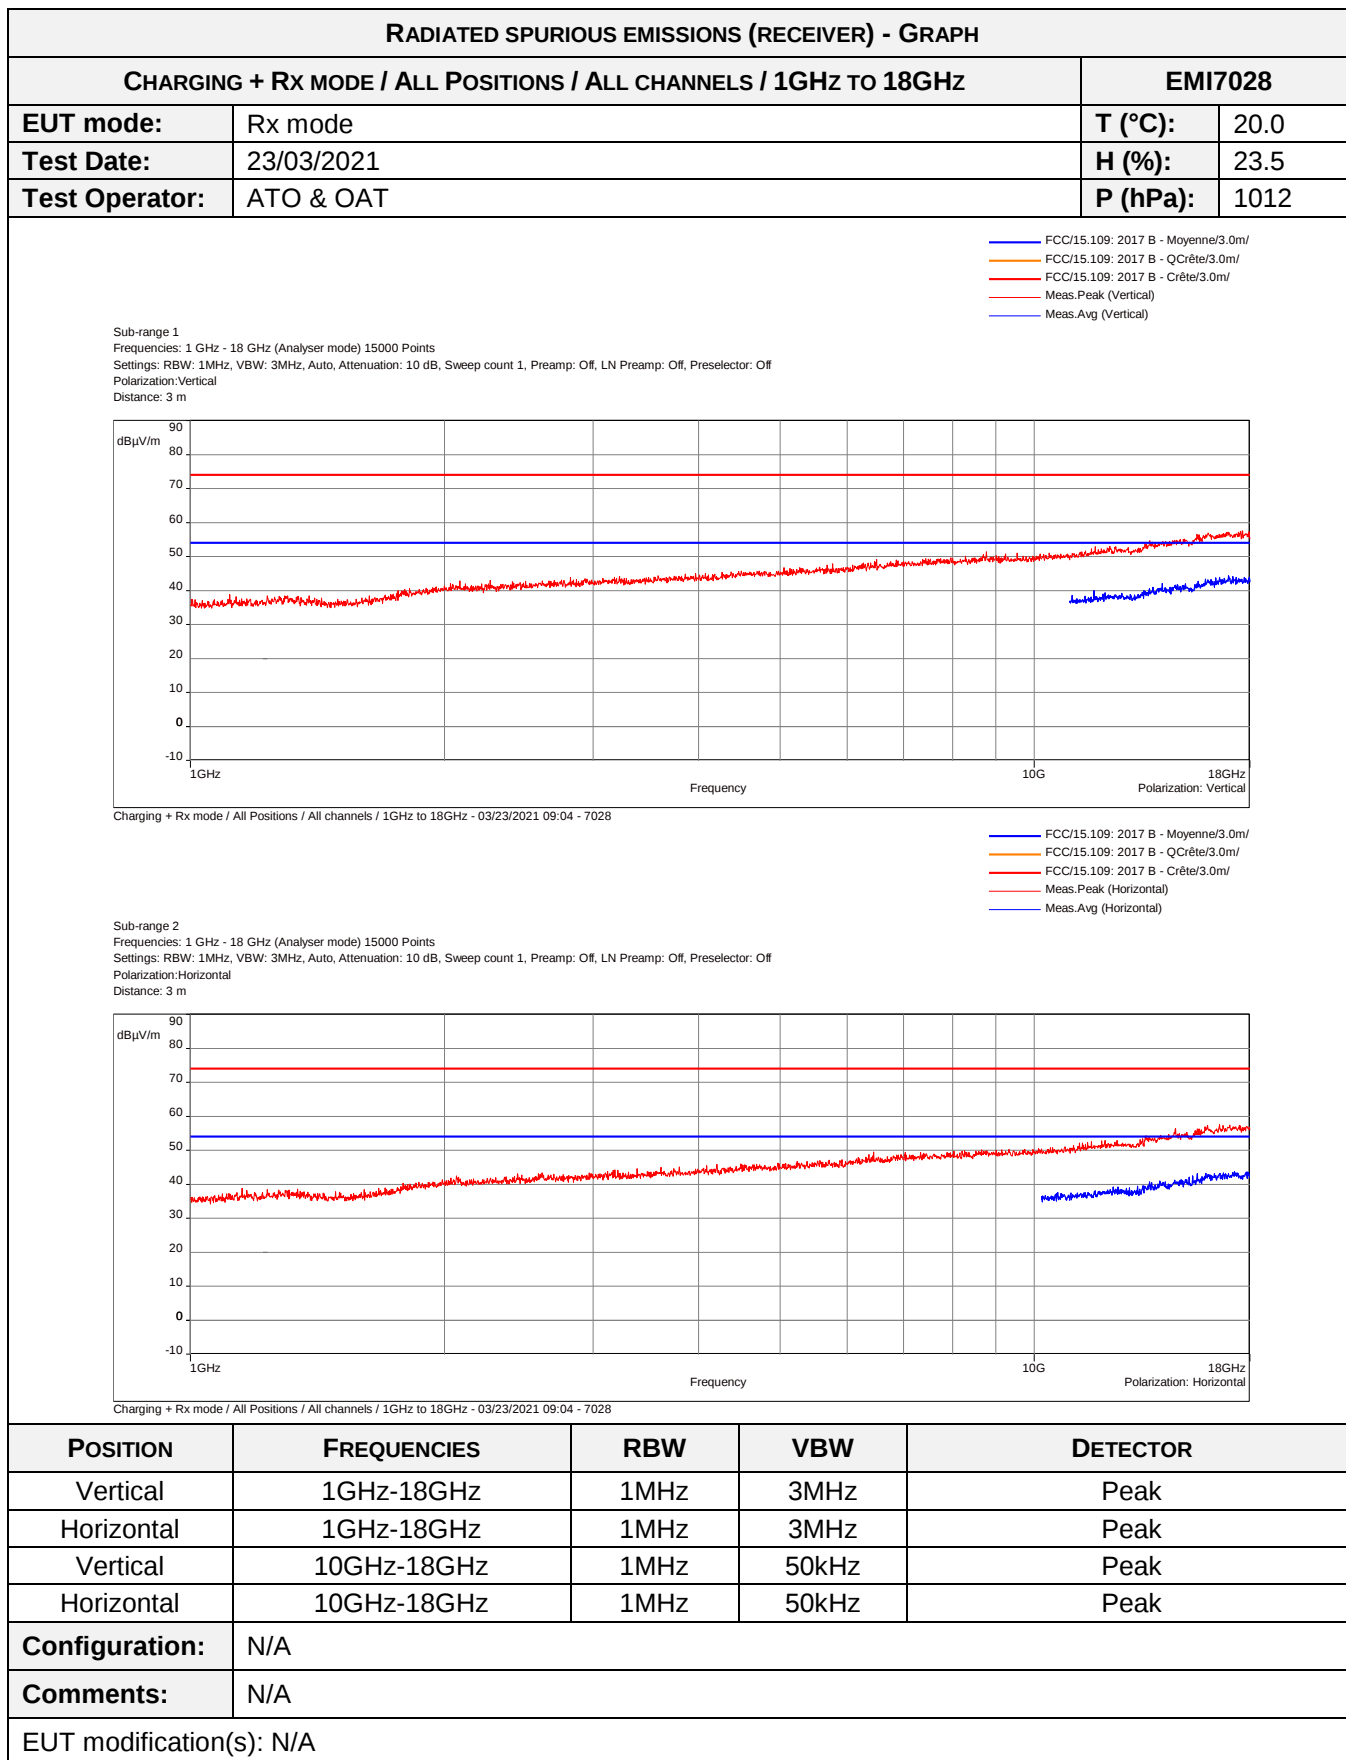

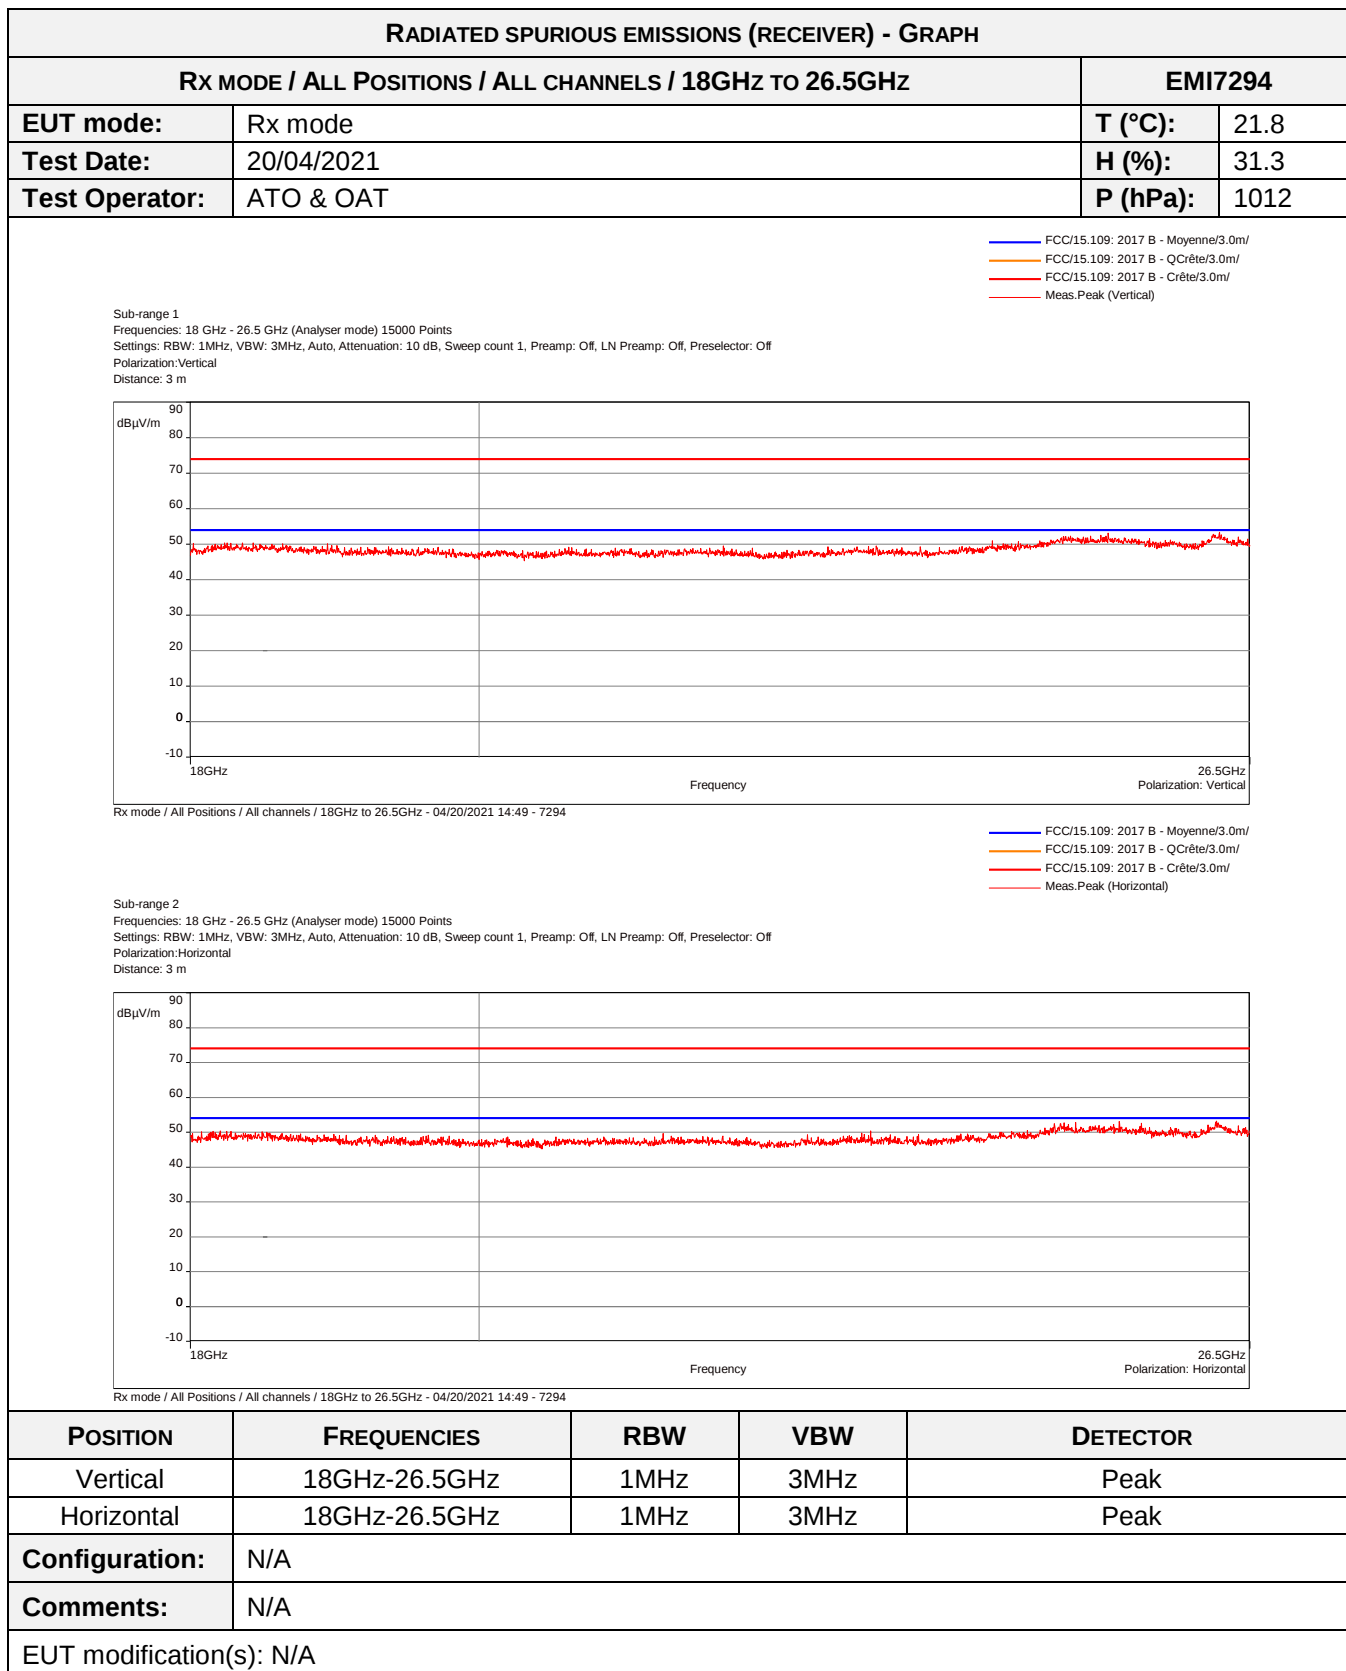

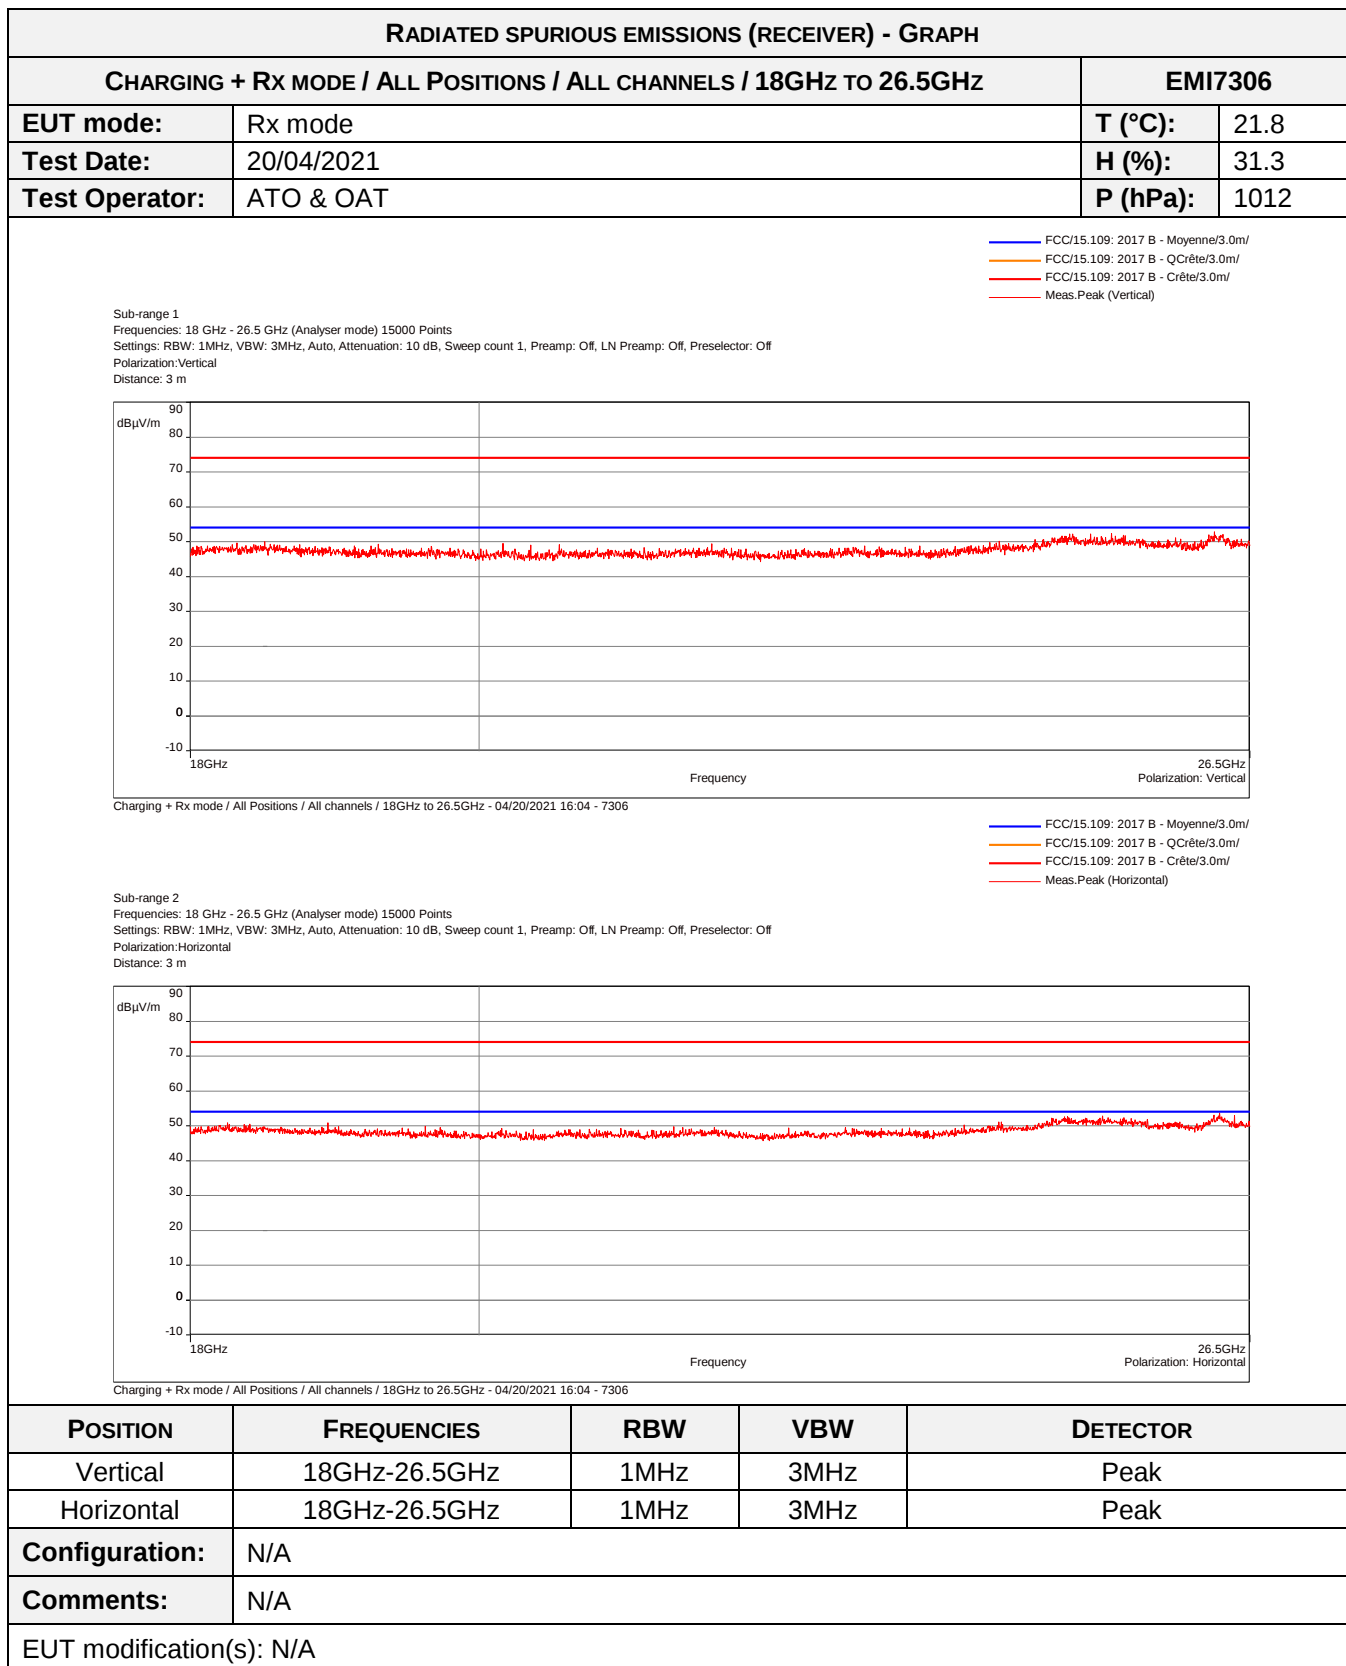

8.10. Frequency error

Reference standard:	FCC part 15 Radio part 15.215 and RSS Gen
Test method:	FCC part 15 Radio part 15.215 and RSS Gen
Test description: Frequency error is the difference between the measured unmodulated carrier frequency under extreme conditions and the nominal Centre Frequency as stated by the manufacturer. This measurement procedure only applies if the EUT can generate an unmodulated carrier. EUT is set inside the climatic enclosure. It is connected to the measuring receiver via 50Ω attenuator(s). RBW=200Hz	

TEST CASE	EUT MODE	SEVERITY	RESULT TAB.	VERDICT
Low channel / 25°C/ 3.7Vdc	Continuous Tx	0.001 %	EMI6786	PASS
Low channel / 25°C/ 4.2Vdc	Continuous Tx	0.001 %	EMI6787	PASS
Low channel / 25°C/ 3.45Vdc	Continuous Tx	0.001 %	EMI6788	PASS
Mid channel / 25°C/ 3.7Vdc	Continuous Tx	0.001 %	EMI6789	PASS
Mid channel / 25°C/ 4.2Vdc	Continuous Tx	0.001 %	EMI6790	PASS
Mid channel / 25°C/ 3.45Vdc	Continuous Tx	0.001 %	EMI6791	PASS
High channel / 25°C/ 3.7Vdc	Continuous Tx	0.001 %	EMI6812	PASS
High channel / 25°C/ 4.2Vdc	Continuous Tx	0.001 %	EMI6813	PASS
High channel / 25°C/ 3.45Vdc	Continuous Tx	0.001 %	EMI6814	PASS
Low channel / -5°C/ 3.7Vdc	Continuous Tx	0.001 %	EMI6851	PASS
Low channel / -5°C/ 4.2Vdc	Continuous Tx	0.001 %	EMI6852	PASS
Low channel / -5°C/ 3.45Vdc	Continuous Tx	0.001 %	EMI6853	PASS
Mid channel / -5°C/ 3.7Vdc	Continuous Tx	0.001 %	EMI6854	PASS
Mid channel / -5°C/ 4.2Vdc	Continuous Tx	0.001 %	EMI6855	PASS
Mid channel / -5°C/ 3.45Vdc	Continuous Tx	0.001 %	EMI6856	PASS
High channel / -5°C/ 3.7Vdc	Continuous Tx	0.001 %	EMI6857	PASS
High channel / -5°C/ 4.2Vdc	Continuous Tx	0.001 %	EMI6858	PASS
High channel / -5°C/ 3.45Vdc	Continuous Tx	0.001 %	EMI6859	PASS
Low channel / 40°C/ 3.7Vdc	Continuous Tx	0.001 %	EMI6923	PASS
Low channel / 40°C/ 4.2Vdc	Continuous Tx	0.001 %	EMI6924	PASS
Low channel / 40°C/ 3.45Vdc	Continuous Tx	0.001 %	EMI6925	PASS
Mid channel / 40°C/ 3.7Vdc	Continuous Tx	0.001 %	EMI6926	PASS
Mid channel / 40°C/ 4.2Vdc	Continuous Tx	0.001 %	EMI6927	PASS
Mid channel / 40°C/ 3.45Vdc	Continuous Tx	0.001 %	EMI6928	PASS
High channel / 40°C/ 3.7Vdc	Continuous Tx	0.001 %	EMI6929	PASS
High channel / 40°C/ 4.2Vdc	Continuous Tx	0.001 %	EMI6930	PASS
High channel / 40°C/ 3.45Vdc	Continuous Tx	0.001 %	EMI6931	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	22.1 °C
Relative Humidity	20 to 75 %	47.3 %
Atmospheric pressure	N/A	999 hPa
Test method deviation: N/A		
Supplementary information: EUT power supply is replaced by a stabilized power supply.		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Attenuator	Radiall	R412710124	17328	22/06/2020	22/08/2023
Attenuator	Radiall	R412710124	17329	22/06/2020	22/08/2023
Cable	N	3m	16417	04/05/2019	04/07/2021
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Cable	Radiall	SMA-0,5m	14890	17/06/2020	17/08/2022
Climatic enclosure	CLIMATS	EXCAL 7714-HA	14261	19/09/2019	19/11/2020
Multimeter	FLUKE	8808A	12446	29/09/2020	29/11/2021
Power supply	TTI	PL303QMD	8496		
Receiver	Rohde & Schwarz	FPL1003	16027	14/08/2020	14/10/2021
Thermo-Hygro-Baromètre	LUFFT	OPUS 20	14563	11/12/2019	11/02/2021
Thermohygrometer	Testo	608-H2	12268	07/05/2020	07/07/2022
Thermohygrometer	Bioblock Scientific	Météostar	0963	25/01/2019	25/03/2021
Wattmeter	Rohde & Schwarz	HMC 8015	17005	05/03/2020	05/05/2021

Blank cells = Permanent validity



FREQUENCY ERROR - TABULATED RESULTS				
TEST CASE	FREQUENCY	FREQUENCY ERROR	LIMIT	RESULT TAB.
Low channel / 25°C/ 3.7Vdc	2.403950470 GHz	0 %	0.001 %	EMI6786
Low channel / 25°C/ 4.2Vdc	2.403950490 GHz	0.0000008 %	0.001 %	EMI6787
Low channel / 25°C/ 3.45Vdc	2.403950484 GHz	0.0000006 %	0.001 %	EMI6788
Mid channel / 25°C/ 3.7Vdc	2.439949987 GHz	0 %	0.001 %	EMI6789
Mid channel / 25°C/ 4.2Vdc	2.439949920 GHz	0.0000027 %	0.001 %	EMI6790
Mid channel / 25°C/ 3.45Vdc	2.439949880 GHz	0.0000044 %	0.001 %	EMI6791
High channel / 25°C/ 3.7Vdc	2.475949258 GHz	0 %	0.001 %	EMI6812
High channel / 25°C/ 4.2Vdc	2.475949224 GHz	0.0000014 %	0.001 %	EMI6813
High channel / 25°C/ 3.45Vdc	2.475949147 GHz	0.0000045 %	0.001 %	EMI6814
Low channel / -5°C/ 3.7Vdc	2.403950281 GHz	0.0000079 %	0.001 %	EMI6851
Low channel / -5°C/ 4.2Vdc	2.403950279 GHz	0.0000079 %	0.001 %	EMI6852
Low channel / -5°C/ 3.45Vdc	2.403950332 GHz	0.0000057 %	0.001 %	EMI6853
Mid channel / -5°C/ 3.7Vdc	2.439949563 GHz	0.0000174 %	0.001 %	EMI6854
Mid channel / -5°C/ 4.2Vdc	2.439949577 GHz	0.0000168 %	0.001 %	EMI6855
Mid channel / -5°C/ 3.45Vdc	2.439949627 GHz	0.0000148 %	0.001 %	EMI6856
High channel / -5°C/ 3.7Vdc	2.475948863 GHz	0.0000160 %	0.001 %	EMI6857
High channel / -5°C/ 4.2Vdc	2.475948864 GHz	0.0000159 %	0.001 %	EMI6858
High channel / -5°C/ 3.45Vdc	2.475948916 GHz	0.0000138 %	0.001 %	EMI6859
Low channel / 40°C/ 3.7Vdc	2.403945679 GHz	0.0001993 %	0.001 %	EMI6923
Low channel / 40°C/ 4.2Vdc	2.403945671 GHz	0.0001998 %	0.001 %	EMI6924
Low channel / 40°C/ 3.45Vdc	2.403945647 GHz	0.0002006 %	0.001 %	EMI6925
Mid channel / 40°C/ 3.7Vdc	2.439944857 GHz	0.0002103 %	0.001 %	EMI6926
Mid channel / 40°C/ 4.2Vdc	2.439944876 GHz	0.0002095 %	0.001 %	EMI6927
Mid channel / 40°C/ 3.45Vdc	2.439944855 GHz	0.0002103 %	0.001 %	EMI6928
High channel / 40°C/ 3.7Vdc	2.475944101 GHz	0.0002038 %	0.001 %	EMI6929
High channel / 40°C/ 4.2Vdc	2.475944096 GHz	0.0002085 %	0.001 %	EMI6930
High channel / 40°C/ 3.45Vdc	2.475944085 GHz	0.0002089 %	0.001 %	EMI6931

End of test report