

Page 1 of 19

TEST REPORT

For

144/430MHz DUAL BAND DIGITAL TRANSCEIVER

In conformity with

FCC CFR 47 Part15 Subpart B (CSR)

Model : FTM-510DR

FCC ID : K6620895X50

Test Item : 144/430MHz DUAL BAND DIGITAL TRANSCEIVER

: WE240919BG1-11 Report No.

: 21 October 2024 **Issue Date**

Prepared for

YAESU MUSEN CO., LTD.

Omori Bellport D building 3F, 6-26-3 Minamioi, Shinagawa-ku,

Tokyo 140-0013 Japan

Prepared by

SGS Japan Inc.

3-5-23, Kiyatamata, Tsuzuki-ku, Yokohama, 224-0021, Japan

Telephone: +81+(0)50-1780-7880

FAX: +81+(0)45-592-7506



Issue Date: 21 October 2024 Report No.: WE240919BG1-11

Model: FTM-510DR Page 2 of 19

Table of contents

1	Gen	eral information	. 3
	1.1	Product description from supplier	3
	1.2	Test(s) performed/ Summary of test result	4
		Test facility	
	1.4	Measurement uncertainty	5
	1.5	Summary of test results	6
	1.6	Setup of equipment under test (EUT)	6
	1.6.1	Test configuration of EUT	6
	1.6.2	Operating condition:	6
	1.6.3		7
	1.7	Equipment modifications	7
	-	Deviation from the standard	
2	Test	t procedure and test data	. 8
	2.1	Radiated emissions	8
	2.2	Conducted emissions for receiver	13
	2.3	AC power line conducted emissions	15
3	Test	t setup photographs	17
		Radiated emissions	
	3.2	AC power line conducted emissions	18
		RF Conducted test	
4	List	of utilized test equipment / calibration	19

History

Report No.	Date	Revisions	Issued By
WE240919BG1-11	21 Oct. 2024	Initial Issue	A.Tamura



Page 3 of 19

General information

1.1 Product description from supplier

Test item : 144/430MHz DUAL BAND DIGITAL TRANSCEIVER

Manufacturer : YAESU MUSEN CO., LTD.

: 43 Utsuroda, Morijuku, Sukagawa-shi, Fukushima-ken 962-0001 JAPAN Address

Model : FTM-510DR FCC ID : K6620895X50

Serial number : SPP01 Hardware version : SPP

: Main Ver.95 / Sub Ver.70 / DSP Ver.7 Software version

Operating frequency range : 108.000 - 550.000 MHz

Highest internal operating Freq. : 494.15 MHz Receipt date of EUT : 04 October 2024 Nominal power source voltages : DC 13.8 V



Page 4 of 19

1.2 Test(s) performed/ Summary of test result

Test specification(s) : FCC CFR 47 Part 15 Subpart B

Test method(s) : ANSI C63.4: 2014 Test(s) started : 08 October 2024 Test(s) completed : 08 October 2024

Purpose of test(s) : Certification as the scanning receiver

Summary of test result : Complied

Note: The above judgment is only based on the measurement data, and it does not include the measurement uncertainty. Accordingly, the statement below is applied to the test result.

The EUT complies with the limit required in the standard in case that the margin is not less than the measurement uncertainty in the Laboratory.

Compliance of the EUT is more probable than non-compliance is case that the margin is less than the measurement uncertainty in the Laboratory.

Test engineer

A. Tamura

(Test Engineer, C&P Connectivity RF Laboratory)

Reviewer

(Manager, C&P Connectivity Wireless)



Page 5 of 19

1.3 Test facility

The Federal Communications Commission has reviewed the technical characteristics of the test facilities at SGS Japan Inc., located in 3-5-23, Kitayamata, Tsuzuki-ku, Yokohama, 224-0021, Japan, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed under registration number 319924 at the Office of the Federal Communications Commission. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The list of all public test facilities is available on the Internet at http://www.fcc.gov.

Registered by Innovation, Science and Economic Development Canada (ISED): The registered CAB identifier is JP0009.

Accredited by National Voluntary Laboratory Accreditation Program (NVLAP) for the emission tests stated in the scope of the certificate under Certificate Number 200780-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.



Measurement uncertainty

The treatment of uncertainty is based on the general matters on the definition of uncertainty in "Guide to the expression of uncertainty in measurement (GUM)" published by ISO. The Lab's uncertainty is determined by referring UKAS Publication LAB34: 2002 "The Expression of Uncertainty in EMC Testing" and CISPR16-4-2: 2011 "Uncertainty in EMC Measurements".

The uncertainty of the measurement results in the level of confidence of approximately 95% (k=2) is as follows.

AC conducted emission (150 kHz - 30 MHz) $: \pm 3.3 \text{ dB}$ RF conducted emission (30 MHz - 6 GHz) $:\pm 1.3 dB$ Radiated emission (30 MHz - 1000 MHz) $: \pm 5.9 \text{ dB}$ Radiated emission (1 GHz - 6 GHz) $: \pm 4.0 \text{ dB}$



Issue Date: 21 October 2024 Report No.: WE240919BG1-11

Model: FTM-510DR Page 6 of 19

1.5 Summary of test results

Requirement	Section in specification	Result	Section in this report
Radiated emissions (30 to 2000 MHz) (*1)	15.109	Complied	2.1
Conducted emission for receiver	15.111	Complied	2.2
AC power line conducted emissions	15.107	N/A (*2)	2.3
38 dB Rejection (cellular band)	15.121 (b)	N/A (*3)	- 1

- (*1) The highest internal operating frequency is 494.15 MHz
- (*2) The EUT is powered by the car battery.
- (*3) This item was not tested in this report.

1.6 **Setup of equipment under test (EUT)**

1.6.1 Test configuration of EUT

Equipment(s) under test

I	No.	Item	Model No.	Manufacture	Serial No.
	1	144/430MHz DUAL BAND DIGITAL TRANSCEIVER	FTM-510DR	YAESU MUSEN CO., LTD.	SPP01
	1	-	-	-	-

Support Equipment(s)

No.	Item	Model No.	Manufacture	Serial No.
2	DTMF Microphone	SSM-85D	YAESU MUSEN CO., LTD.	-
3	External Speaker	MLS-100	YAESU MUSEN CO., LTD.	-
-	- -	-	-	-

Connected cable(s)

No.	Item	From	То	Length [m]	Cable Shielded	Ferrite Core
A	Speaker cable	1	2	1,9	No	\ No
В	Mic cable	1	3	0.5	No	No
C	DC cable	1	DC	2.8	No	No
-	-	-	-	ı	-	


1.6.2 **Operating condition:**

- Receiving mode at Lch (108.000MHz)
- Receiving mode at Mch (329.000MHz)
- Receiving mode at Hch (550.000MHz)



Page 7 of 19

1.6.3 Setup diagram of tested system

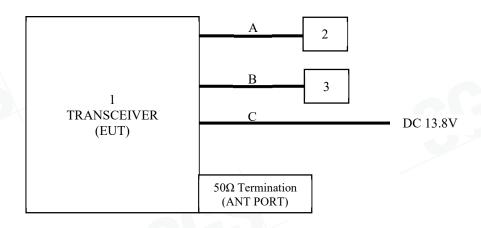

1.7 Equipment modifications

No modifications have been made to the equipment in order to achieve compliance with the applicable standards described in clause 1.2.

1.8 Deviation from the standard

No deviations from the standards described in clause 1.2.



Page 8 of 19

Test procedure and test data

2.1 Radiated emissions

Test setup

Test setup was implemented according to the method of ANSI C63.4 clause 6 "General requirements for EUT equipment arrangements and operation", clause 8.2 and Annex H.3 "Radiated emission measurements setup".

Test procedure

Measurement procedures were implemented according to the method of ANSI C63.4 clauses 8.2.

The EUT is place on a non-conducted table which is 0.8 m height from a ground plane and the measurement antenna to EUT distance is 3 meters. The turn table is rotated for 360 degrees to determine the maximum emission level.

The antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

The spectrum analyzer and receiver are set to the followings;

RBW=100 kHz (up to 1000 MHz) or 1 MHz (above 1000 MHz),

VBW= 300 kHz (up to 1000 MHz) or 3 MHz (above 1000 MHz)

Final measurement is carried out with a receiver RBW of 120 kHz (up to 1000 MHz), or 1 MHz (above 1000 MHz).

Applicable rule and limitation

FCC 15.109 Radiated emissions limits

Frequency [MHz]	Field Strength [µV/m]	Measurement Distance [m]	Field Strength [dBµV/m]
30 - 88	100	3	40.0
88 –216	150	3	43.5
216 – 960	200	3	46.0
Above 960	500	3	53.9

In the emission table above, the tighter limit applies at the band edges.

The emission limits shown in the above table are based on measurements employing a QP detector (up to 1000 MHz) or AVE/PEAK detector (above 1000 MHz).

Test results - Complied with requirement

Test equipment used (refer to List of utilized test equipment)

AC11 (EM)	AC11 (EG)	BA07	CL71	CL35	CL36	DH07
PR15	PR16	TR10	CL81	-	-	-



Page 9 of 19

Test software used

EMI1 Ver. 6.1

Calculation method

The Correction Factor and Result are calculated as followings.

Correction Factor [dB/m] = Ant. Factor [dB/m] + Loss [dB] – Gain [dB] Result $[dB\mu V/m]$ = Reading $[dB\mu V]$ + Correction Factor [dB/m]

Test Data

Operating mode: Rx 108.000 MHz

Range: 30 - 1000 MHz

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	152.596	28.3	11.1	7.1	30.0	16.5	43.5	27.0	Hori.
2	374.122	32.1	15.0	7.9	29.9	25.1	46.0	20.9	\Hori.
3	823.769	30.5	22.1	9.1	30.3	31.4	46.0	14.6	Vert.
	-	-	ı	-	-	-	-		<u> </u>
-	<u>-</u>	-	-	-	-	-	-		-
-	_	-	-	-	-	-	-	-1-0	-

Range: 1000 - 2000 MHz

No.	Frequency [MHz]	Reading PK [dBµV]	Reading AVE [dBµV]	C.Factor [dB/m]	Result PK [dBµV/m]	Result AVE [dBµV/m]	Limit PK [dBµV/m]	Limit AVE [dBµV/m]	Margin PK [dB]	Margin AVE [dB]	Ant.
1	1122.388	44.9	32.6	-7.2	37.7	25.4	73.9	53.9	36.2	28.5	Hori.
2	1870.913	45.8	33.3	-5.8	40.0	27.5	73.9	53.9	33.9	26.4	Hori.
3	1122.488	50.9	46.0	-7.2	43.7	38.8	73.9	53.9	30.2	15.1	Vert.
4	1812.319	47.9	38.9	-5.8	42.1	33.1	73.9	53.9	31.8	20.8	Vert.
5	1870.713	48.1	40.6	-5.8	42.3	34.8	73.9	53.9	31.6	19.1	Vert.
-	-	-	-	-	-	-	-	-	-	ſ	<u>-</u>



Page 10 of 19

Operating mode: Rx 329.000 MHz

Range: 30 - 1000 MHz

Ttunger b	tunge: 50 1000 11112											
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.			
1	374.122	32.1	15.0	7.9	29.9	25.1	46.0	20.9	Hori.			
2	385.663	32.9	15.4	8.0	29.9	26.4	46.0	19.6	Hori.			
3	771.491	32.7	22.2	8.8	30.2	33.5	46.0	12.5	Hori.			
4	385.760	29.0	15.4	8.0	29.9	22.5	46.0	23.5	Vert.			
5	771.491	33.8	22.2	8.8	30.2	34.6	46.0	11.4	Vert.			
-	_	-	-	-	-	-	-	_	-			

Range: 1000 - 2000 MHz

No.	Frequency [MHz]	Reading PK [dBµV]	Reading AVE [dBµV]	C.Factor [dB/m]	Result PK [dBµV/m]	Result AVE [dBµV/m]	Limit PK [dBµV/m]	Limit AVE [dBµV/m]	Margin PK [dB]	Margin AVE [dB]	Ant.
1	1122.388	45.4	32.6	-7.2	38.2	25.4	73.9	53.9	35.7	28.5	Hori.
2	1157.284	45.1	34.5	-6.9	38.2	27.6	73.9	53.9	35.7	26.3	Hori.
3	1543.046	48.8	42.7	-6.9	41.9	35.8	73.9	53.9	32.0	18.1	Hori.
4	1870.813	46.1	36.6	-5.8	40.3	30.8	73.9	53.9	33.6	23.1	Hori.
5	1928.607	44.5	31.7	-5.0	39.5	26.7	73.9	53.9	34.4	27.2	Hori.
6	1122.388	50.5	45.8	-7.2	43.3	38.6	73.9	53.9	30.6	15.3	Vert.
7	1157.384	57.3	55.3	-6.9	50.4	48.4	73.9	53.9	23.5	5.5	Vert.
8	1543.046	49.3	43.6	-6.9	42.4	36.7	73.9	53.9	31.5	17.2	Vert.
9	1870.813	46.3	37.0	-5.8	40.5	31.2	73.9	53.9	33.4	22.7	Vert.
10	1928.807	46.6	35.5	-5.0	41.6	30.5	73.9	53.9	32.3	23.4	Vert.
								·			



Page 11 of 19

Operating mode: Rx 550.000 MHz

Range: 30 - 1000 MHz

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	374.122	34.7	15.0	7.9	29.9	27.7	46.0	18.3	Hori.
2	493.226	33.2	17.9	8.2	29.6	29.7	46.0	16.3	Hori.
3	416.118	29.8	16.5	8.0	29.8	24.5	46.0	21.5	Vert.
4	493.129	34.8	17.9	8.2	29.6	31.3	46.0	14.7	Vert.
-	-	-	-	-	-	-	-		-
=	=	-	-		-	-	-	-	-

Range: 1000 - 2000 MHz


-tung	c. 1000 - 20	OUTITIE									
No.	Frequency [MHz]	Reading PK [dBµV]	Reading AVE [dBµV]	C.Factor [dB/m]	Result PK [dBµV/m]	Result AVE [dBµV/m]	Limit PK [dBµV/m]	Limit AVE [dBµV/m]	Margin PK [dB]	Margin AVE [dB]	Ant.
1	1122.488	45.1	32.7	-7.2	37.9	25.5	73.9	53.9	36.0	28.4	Hori.
2	1479.752	44.6	32.1	-6.7	37.9	25.4	73.9	53.9	36.0	28.5	Hori.
3	1870.613	45.9	34.1	-5.8	40.1	28.3	73.9	53.9	33.8	25.6	Hori.
4	1122.388	50.5	45.9	-7.2	43.3	38.7	73.9	53.9	30.6	15.2	Vert.
5	1479.652	47.5	38.1	-6.7	40.8	31.4	73.9	53.9	33.1	22.5	Vert.
6	1870.813	47.5	39.5	-5.8	41.7	33.7	73.9	53.9	32.2	20.2	Vert.




Page 12 of 19

[Chart (Worst)]

Operating condition: Rx 329.000 MHz

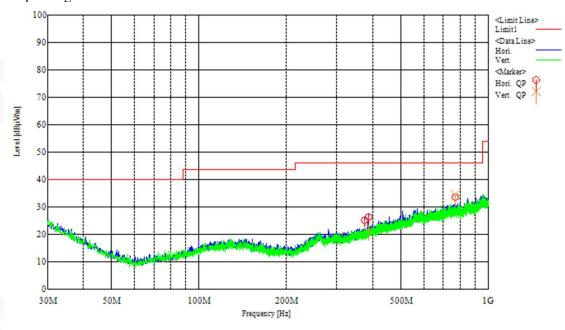

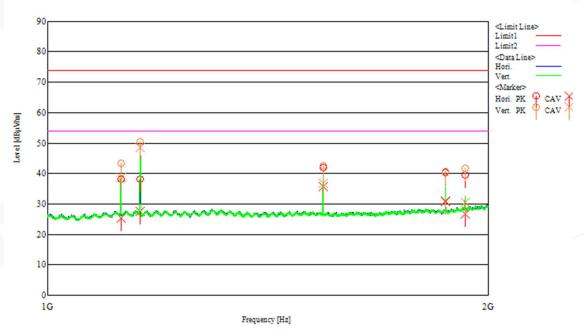

[Test condition]

Tested Date: 08 October 2024

Humidity: 69 % Temperature: Atmos. Press:


24 deg. C 1006 hPa



Page 13 of 19

Conducted emissions for receiver

Test setup



Applicable rule and limitation

§15.111 (b) Antenna power conducted limit: 2 nW (= -57 dBm)

Test equipment used (refer to List of utilized test equipment)

CL36 TR10	-
-----------	---

Test results - Complied with requirement

Test Data

[The maximum spurious level]

	illialli sparious ieverj					
ĺ	Operating freq. [MHz]		cy range 00 MHz	Frequency range 1000 - 2000 MHz		
		Freq. [MHz]	Level [dBm]	Freq. [MHz]	Level [dBm]	
Ī	108.000	374.60	-67.60	1844.40	-66.44	
I	329.000	374.60	-67.69	1542.00	-66.15	
I	550.000	374.60	-67.81	1702.60	-66.44	

[Test condition]


Tested Date: 08 October 2024 Temperature: 24 deg. C Humidity: 69 % Atmos. Press: 1006 hPa




Page 14 of 19

[Chart]

Operating mode: Rx 329.000 MHz (Worst)

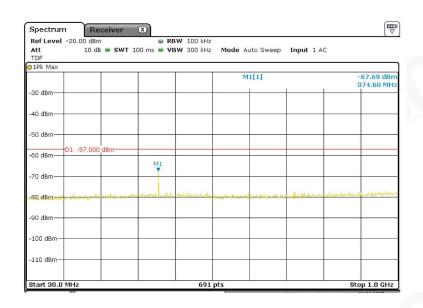

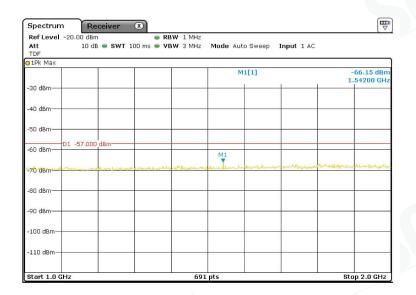



Page 15 of 19

2.3 AC power line conducted emissions

Test setup

Test setup was implemented according to the method of ANSI C63.4 clause 6 "General requirements for EUT equipment arrangements and operation" and Annex H.1 "AC power line conducted emission measurements setup".

Test procedure

Measurement procedures were implemented according to the method of ANSI C63.4 clauses 7, clause 13.1.3 and Annex H.2 "AC power line conducted emission measurements".

Exploratory measurements were used the spectrum analyzer to identify the frequency of the emission that has the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable positions, and with a typical system equipment configuration and arrangement.

Final ac power line conducted emission measurements were performed based on the exploratory tests. The EUT cable configuration and arrangement and mode of operation that produced the emission with the

When the measurement value is greater than average limitation the average detection measurements were performed.

Applicable rule and limitation

§15.107 (b) AC power line conducted limits

Frequency of Emission	Conducted emissions Limit [dBµV]			
[MHz]	Quasi-peak	Average		
0.15 - 0.5	66 to 56 *	56 to 46 *		
0.5 - 5	56	46		
5 - 30	60	50		

highest amplitude relative to the limit are selected for the final measurement.

Test equipment used (refer to List of utilized test equipment)

_			
	l		
_	_	_	_
_	_	_	_

Test software used

EMI1 Ver. 6.1

Calculation method

The Correction Factor and Result are calculated as followings.

Correction Factor [dB] = ISN Factor [dB] + Loss [dB] Result $[dB\mu V]$ = Reading $[dB\mu V]$ + Correction Factor [dB]

Test results - This item was not tested.

^{*} Decreases with the logarithm of the frequency. The lower limit applies at the band edges.



Page 16 of 19

Test Data

[Emission level]

Operating mode: -

Freq. [MHz]	Reading QP [dBµV]	Reading Ave [dBµV]	Factor [dB]	Result QP [dBµV]	Result Ave [dBµV]	Limit QP [dBµV]	Limit Ave [dBµV]	Margin QP [dB]	Margin Ave [dB]	Line
										\

[Chart]

Operating mode: -

[Test condition]

Tested Date: - % Humidity:

Temperature: - deg. C - hPa

Atmos. Press:



Issue Date: 21 October 2024 Report No.: WE240919BG1-11

Model: FTM-510DR Page 19 of 19

List of utilized test equipment / calibration

RFT ID No.	Kind of Equipment and Precision	Manufacturer	Model No.	Serial Number	Calibration Date	Calibrated until
AC11(EM)	Anechoic Chamber	TDK	-	-	2024/08/01	2025/08/31
AC11(EG)	Anechoic Chamber	TDK	-	-	2024/08/02	2025/08/31
BA10	Bilogical Antenna	TESEQ	CBL6111D	32342	2024/06/25	2025/06/30
CL35	RF Cable 2 m	Junkosha	MWX221	1502S020	2024/02/16	2025/02/28
CL36	RF Cable 2 m	Junkosha	MWX221	1502S021	2024/02/16	2025/02/28
CL80	RF Cable 8 m	HUBER&SUHNER	SUCOFLEX104PE	MY3792/4PE	2024/02/16	2025/02/28
CL71	RF Cable for RE	RFT	-	-	2024/01/17	2025/01/31
DH07	DRG Horn Antenna	A.H. Systems	SAS-571	1939	2024/02/08	2026/02/28
PR15	Pre. Amplifier	Anritsu	MH648A	6201156141	2024/06/17	2025/06/30
PR16	Pre. Amplifier (1-26G)	Agilent Technologies	8449B	3008A01538	2024/02/16	2025/02/28
TR10	Test Receiver (F/W: 3.66)	Rohde & Schwarz	ESR26	101313	2024/05/28	2025/05/31

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.