

Report No.: SZEM140500252001

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 88

FCC REPORT

Application No: SZEM1405002520RF

Applicant: Creative Labs Inc.

Manufacturer: Creative Technology Ltd.

Product Name: Sound Blaster X7

Model No.(EUT): SB1580
Trade Mark: Creative

FCC ID: IBAAVPSB1580

Standards: 47 CFR Part 15, Subpart C (2013)

Date of Receipt: 2014-05-26

Date of Test: 2014-05-27 to 2014-06-20

Date of Issue: 2014-07-02

Test Result: PASS *

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM140500252001

Page: 2 of 88

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10 (2009)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS



Report No.: SZEM140500252001

Page: 3 of 88

3 Contents

			Page
1	CC	OVER PAGE	1
2	TE	EST SUMMARY	2
		ONTENTS	
3			
4	GE	ENERAL INFORMATION	4
	4.1	CLIENT INFORMATION	
	4.2	GENERAL DESCRIPTION OF EUT	4
	4.3	TEST ENVIRONMENT	
	4.4	DESCRIPTION OF SUPPORT UNITS	
	4.5	TEST LOCATION	
	4.6	TEST FACILITY	
	4.7 4.8	DEVIATION FROM STANDARDS	
	4.6 4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.10	EQUIPMENT LIST	
5	TE	EST RESULTS AND MEASUREMENT DATA	
Э			
	5.1	Antenna Requirement	
	5.2	CONDUCTED EMISSIONS	
	5.3	CONDUCTED PEAK OUTPUT POWER	
	5.4 5.5	20DB OCCUPY BANDWIDTHCARRIER FREQUENCIES SEPARATION	
	5.6	HOPPING CHANNEL NUMBER	
	5.7	DWELL TIME	
	5.8	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	5.9	Spurious RF Conducted Emissions	
	5.10	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	
	5.11	RADIATED SPURIOUS EMISSION	
		11.1 Radiated Emission below 1GHz	
		11.2 Transmitter Emission above 1GHz	
	5.12	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	79-88



Report No.: SZEM140500252001

Page: 4 of 88

4 General Information

4.1 Client Information

Applicant:	Creative Labs Inc.
Address of Applicant:	1901, McCarthy Boulevard, Milpitas, CA 95035, United States
Manufacturer:	Creative Technology Ltd.
Address of Manufacturer:	31, International Business Park, #03-01 Creative Resource, Singapore 609921

4.2 General Description of EUT

Sound Blaster X7
SB1580
Creative
2402MHz~2480MHz
4.1
This report is for classic mode
Frequency Hopping Spread Spectrum(FHSS)
GFSK, π/4DQPSK, 8DPSK
79
Adaptive Frequency Hopping systems
Fixed production
50,30 (manufacturer declare)
Bluetest3 (manufacturer declare)
Type :Integral
Gain :0.5dBi
150cm(Shielded)
15cm(Unshielded)
120cm(Unshielded)
200cm(Unshielded)
150cm(Unshielded with one ferrite core)
MODEL: GPE060D-240291D
INPUT: 100-240V~50/60Hz 1.5A
OUTPUT: 24V === 2910mA 69.84W
Input: DC 24V 2.91A
AC 120V 60Hz



Report No.: SZEM140500252001

Page: 5 of 88

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz



Report No.: SZEM140500252001

Page: 6 of 88

4.3 Test Environment

Operating Environment:		
Temperature:	25.0 °C	
Humidity:	51 % RH	
Atmospheric Pressure:	1005mbar	

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Microphone	Supply by SGS	N/A

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM140500252001

Page: 7 of 88

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

4.7 Deviation from Standards

None.

4.8 Abnormalities from Standard Conditions

None.

4.9 Other Information Requested by the Customer

None.





Report No.: SZEM140500252001

Page: 8 of 88

4.10 Equipment List

	Conducted Emission				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2014-10-24
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2014-11-10
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2014-11-10
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2014-11-10
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16



Report No.: SZEM140500252001

Page: 9 of 88

	RE in Chamber				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2015-05-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
13	Band filter	Amindeon	82346	SEL0094	2015-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04



Report No.: SZEM140500252001

Page: 10 of 88

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2014-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2014-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R&S	NRVS	SEL0144	2014-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2014-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM140500252001

Page: 11 of 88

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.5dBi.





Report No.: SZEM140500252001

Page: 12 of 88


5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range:	150kHz to 30MHz			
Limit:	Limit (dBuV)			
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithn	n of the frequency.		4
Test Procedure:	 The mains terminal disturt room. 	bance voltage test was	s conducted in a shi	elded
	 The EUT was connected to Impedance Stabilization N impedance. The power call connected to a second LIS reference plane in the sammeasured. A multiple sock power cables to a single Lexceeded. The tabletop EUT was place ground reference plane. A placed on the horizontal ground reference plane. A placed on the horizontal ground reference plane. The LISN unit under test and bonded mounted on top of the ground between the closest points the EUT and associated experience plane associated experience plane. The LISN unit under to find the maximule equipment and all of the in ANSI C63.10: 2009 on contract. 	etwork) which provides oles of all other units of SN 2, which was bonded he way as the LISN 1 for et outlet strip was used ISN provided the rating ced upon a non-metallic and for floor-standing arround reference plane, the a vertical ground reference plane was bonded to the 1 was placed 0.8 m from the vertical ground reference und reference plane. The of the LISN 1 and the quipment was at least 0 am emission, the relative terface cables must be	is a 50Ω/50μH + 5Ω lift the EUT were do to the ground or the unit being do to connect multiple of the LISN was not contained the transperse of the LISN was not do table 0.8m above the transperse of the EUT deference plane. The red reference plane. The end reference plane of the boundary of the plane for LISNs has distance was EUT. All other units 0.8 m from the LISN the positions of	the was ear he of 2.



Report No.: SZEM140500252001

Page: 13 of 88

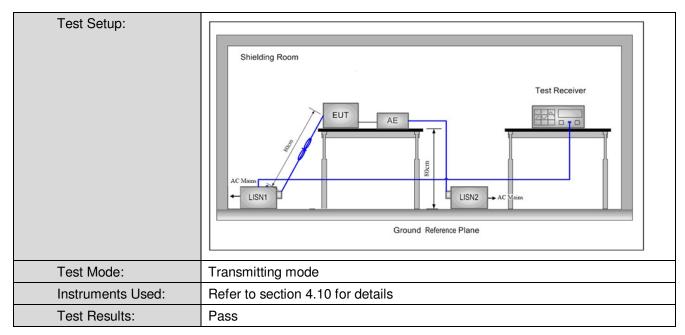

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



Report No.: SZEM140500252001

Page: 14 of 88

Live line:

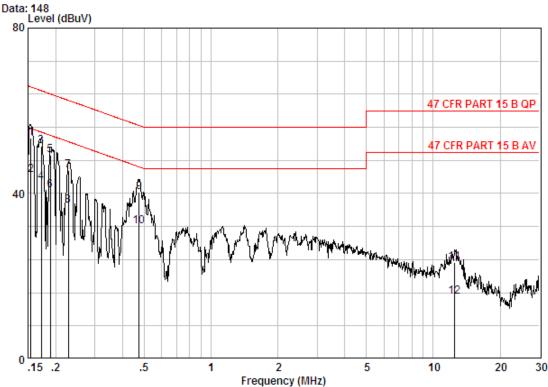

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE LINE

Job No. : 2520RF Mode : TX

	Freq	Cable	LISN Factor	Read	Torrol	Limit	Over	Remark
	rreq	TOSS	ractor	rever	rever	TIME	TIMIL	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 @	0.15485	0.02	9.70	43.78	53.50	65.74	-12.24	QP
2 @	0.15485	0.02	9.70	34.76	44.48	55.74	-11.25	Average
3	0.17215	0.02	9.70	41.81	51.53	64.86	-13.33	QP
4 @	0.17215	0.02	9.70	33.08	42.80	54.86	-12.06	Average
5	0.18938	0.02	9.70	39.60	49.32	64.06	-14.74	QP
6	0.18938	0.02	9.70	31.05	40.77	54.06	-13.30	Average
7	0.22797	0.02	9.70	35.94	45.66	62.52	-16.87	QP
8	0.22797	0.02	9.70	27.40	37.12	52.52	-15.40	Average
9	0.47360	0.01	9.80	30.62	40.43	56.45	-16.02	QP
10	0.47360	0.01	9.80	22.22	32.03	46.45	-14.42	Average
11	12.516	0.01	10.01	13.40	23.42	60.00	-36.58	QP
12	12.516	0.01	10.01	4.98	15.00	50.00	-35.00	Average


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140500252001

Page: 15 of 88

Neutral line:

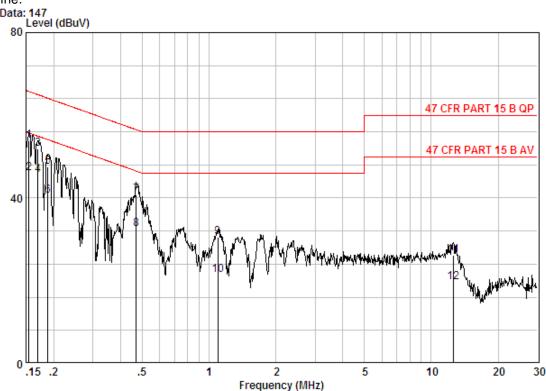

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE NEUTRAL

Job No. : 2520RF Mode : TX

			Cable	LISN	Read		Limit	Over	
		Freq	Loss	Factor	Level	Level	Line	Limit	Remark
		MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	@	0.15485	0.02	9.70	44.04	53.76	65.74	-11.98	QP
2	@	0.15485	0.02	9.70	36.36	46.08	55.74	-9.65	Average
3		0.16944	0.02	9.70	42.07	51.79	64.99	-13.19	QP
4	@	0.16944	0.02	9.70	35.73	45.45	54.99	-9.54	Average
5		0.18838	0.02	9.70	37.79	47.51	64.11	-16.60	QP
6		0.18838	0.02	9.70	30.88	40.60	54.11	-13.51	Average
7		0.47110	0.01	9.80	30.97	40.78	56.49	-15.71	QP
8		0.47110	0.01	9.80	22.72	32.53	46.49	-13.96	Average
9		1.094	0.02	9.80	20.65	30.47	56.00	-25.53	QP
10		1.094	0.02	9.80	11.46	21.28	46.00	-24.72	Average
11		12.582	0.01	10.00	16.16	26.17	60.00	-33.83	QP
12		12.582	0.01	10.00	9.60	19.62	50.00	-30.38	Average

Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM140500252001

Page: 16 of 88

5.3 Conducted Peak Output Power

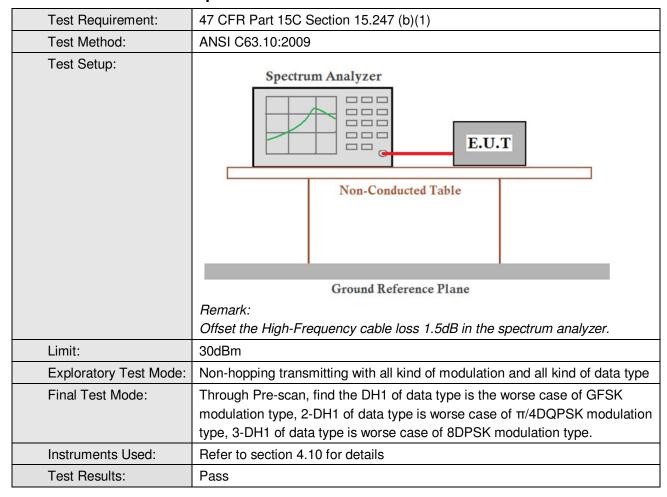



Report No.: SZEM140500252001

Page: 17 of 88

Measurement Data

GFSK mode							
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	-1.49	30.00	Pass				
Middle	1.37	30.00	Pass				
Highest	2.39	30.00	Pass				
	π/4DQPSK mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	-3.70	30.00	Pass				
Middle	-0.83	30.00	Pass				
Highest	0.26	30.00	Pass				
8DPSK mode							
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	-3.20	30.00	Pass				
Middle	-0.21	30.00	Pass				
Highest	0.83	30.00	Pass				






Report No.: SZEM140500252001


Page: 18 of 88

Test plot as follows:

Test mode: GFSK Test channel: Lowest

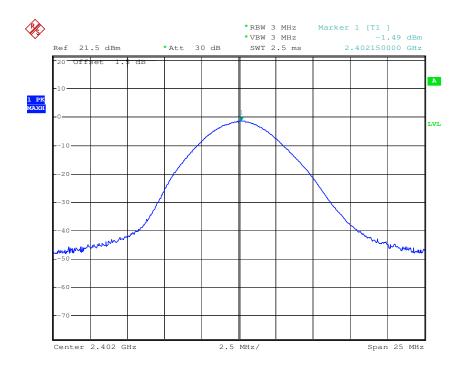



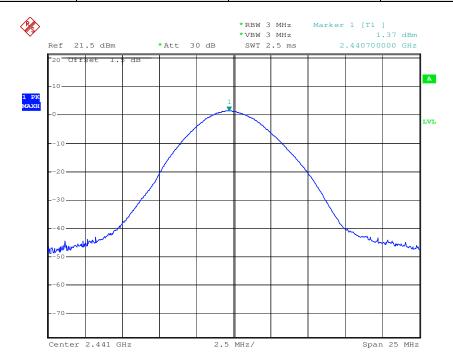





Report No.: SZEM140500252001

Page: 19 of 88

Test mode: GFSK Test channel: Highest

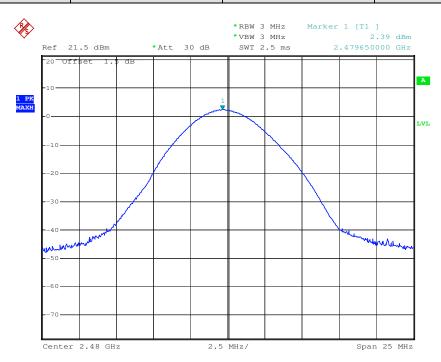



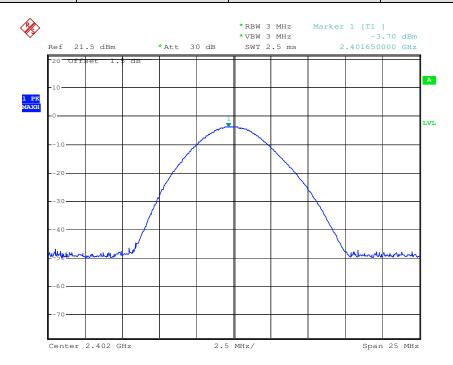





Report No.: SZEM140500252001

Page: 20 of 88

Test mode: π/4DQPSK Test channel: Middle

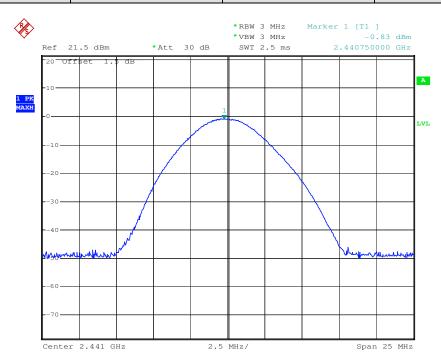



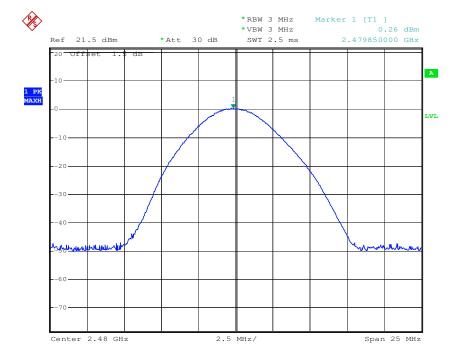





Report No.: SZEM140500252001

Page: 21 of 88

Test mode: 8DPSK Test channel: Lowest

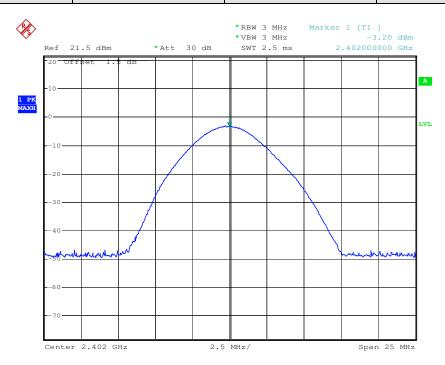



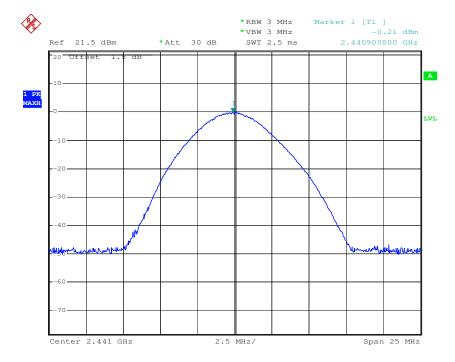




Report No.: SZEM140500252001

Page: 22 of 88

Test mode: 8DPSK Test channel: Highest

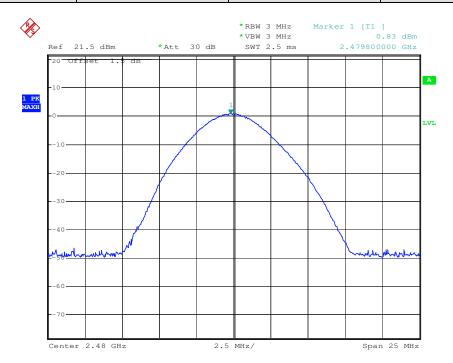




Report No.: SZEM140500252001

Page: 23 of 88

5.4 20dB Occupy Bandwidth

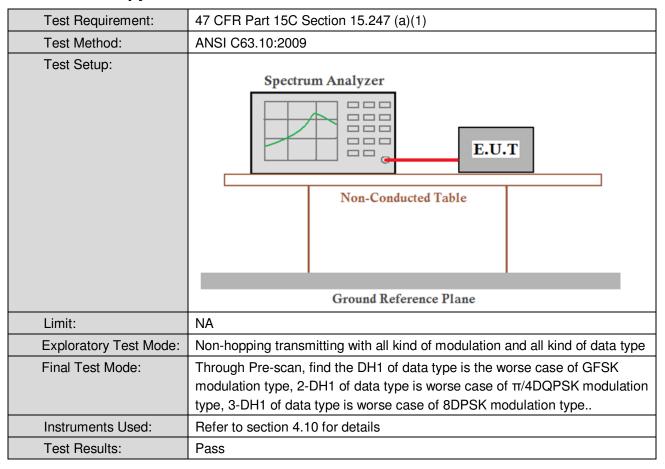

Measurement Data

Tost shannel	20dB Occupy Bandwidth (kHz)				
Test channel	GFSK	π/4DQPSK	8DPSK		
Lowest	876	1218	1212		
Middle	870	1218	1212		
Highest	852	1224	1218		




Report No.: SZEM140500252001


Page: 24 of 88

Test plot as follows:

Test mode: GFSK Test channel: Lowest

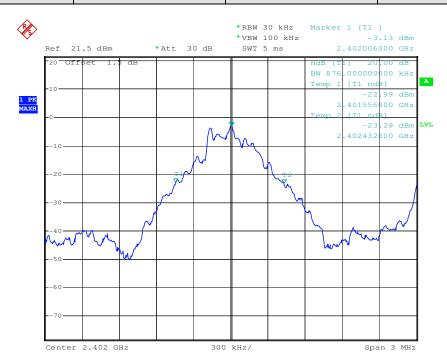

Test mode: GFSK Test channel: Middle

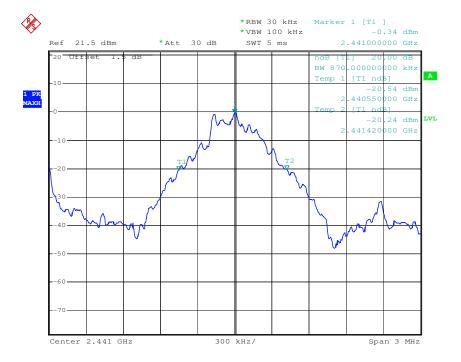





Report No.: SZEM140500252001

Page: 25 of 88

Test mode: GFSK Test channel: Highest

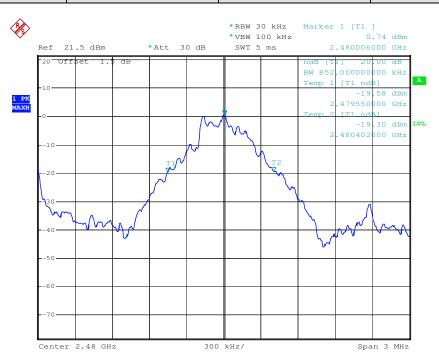



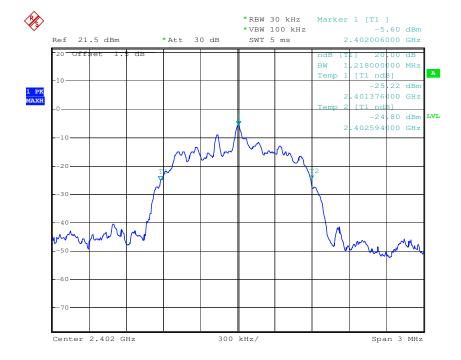





Report No.: SZEM140500252001

Page: 26 of 88

Test mode: π/4DQPSK Test channel: Middle

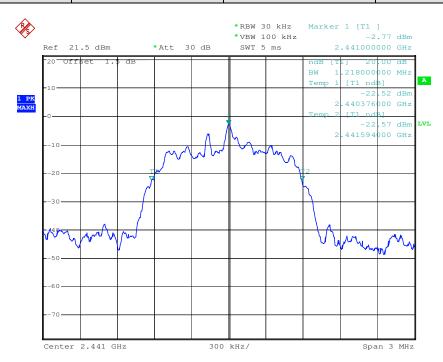



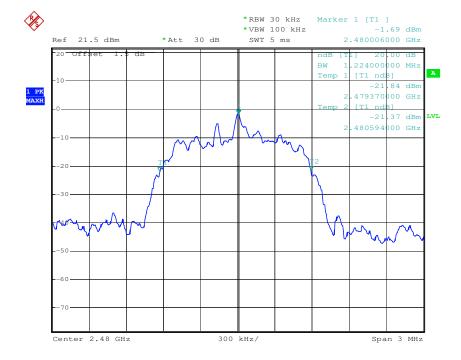





Report No.: SZEM140500252001

Page: 27 of 88

Test mode: 8DPSK Test channel: Lowest

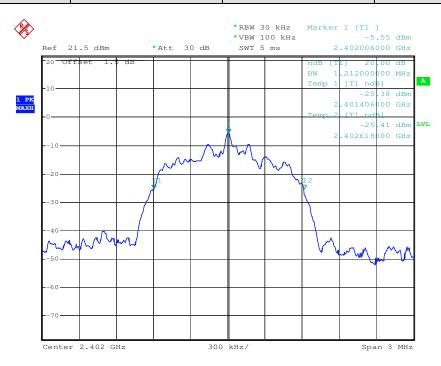

Test mode: 8DPSK Test channel: Middle

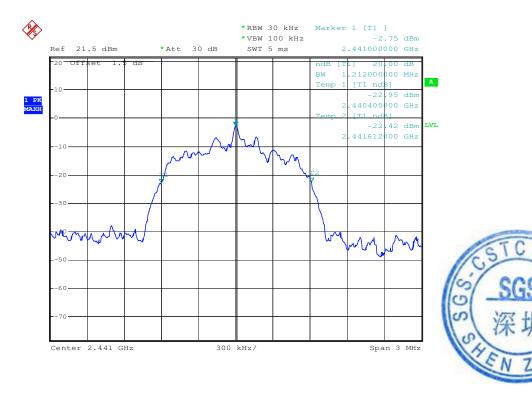




Report No.: SZEM140500252001

Page: 28 of 88

Test mode: 8DPSK Test channel: Highest

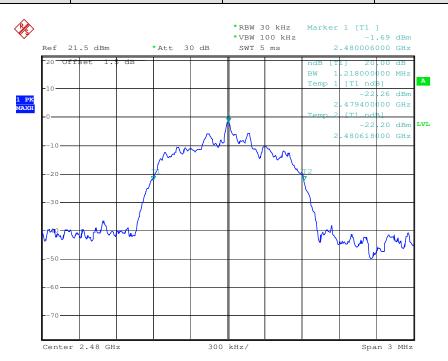




Report No.: SZEM140500252001

Page: 29 of 88

5.5 Carrier Frequencies Separation

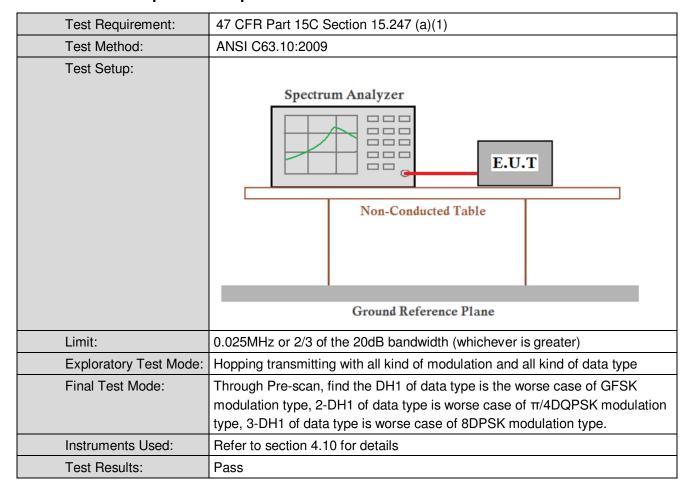



Report No.: SZEM140500252001

Page: 30 of 88

Measurement Data

GFSK mode					
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1000	≥584	Pass		
Middle	1000	≥584	Pass		
Highest	1000	≥584	Pass		
	π/4DQPSK n	node			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1000	≥816	Pass		
Middle	1000	≥816	Pass		
Highest	1000	≥816	Pass		
8DPSK mode					
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1000	≥812	Pass		
Middle	1000	≥812	Pass		
Highest	1000	≥812	Pass		

Note: According to section 5.4,

Mode	20dB bandwidth (kHz)	Limit (kHz)	
	(worse case)	(Carrier Frequencies Separation)	
GFSK	876	584	
π/4DQPSK	1224	816	
8DPSK	1218	812	




Report No.: SZEM140500252001


Page: 31 of 88

Test plot as follows:



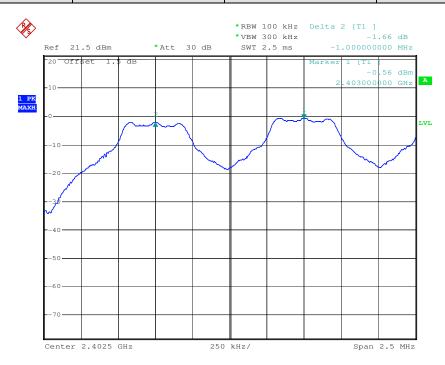



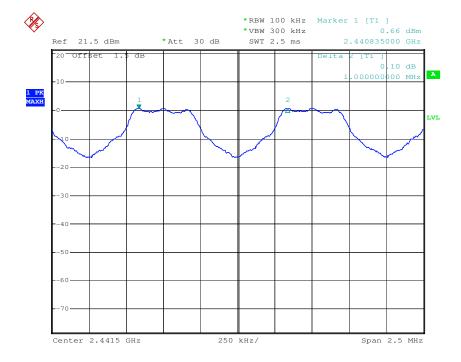





Report No.: SZEM140500252001

Page: 32 of 88

Test mode: GFSK Test channel: Highest

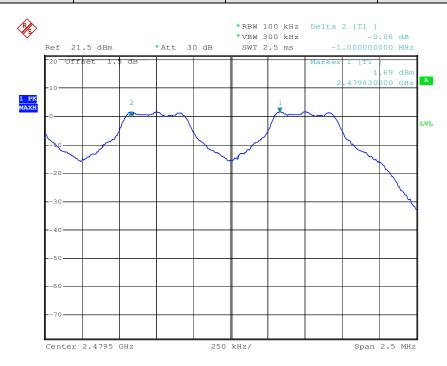



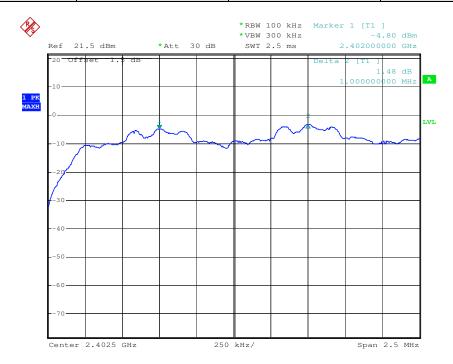




Report No.: SZEM140500252001

Page: 33 of 88

Test mode: π/4DQPSK Test channel: Middle

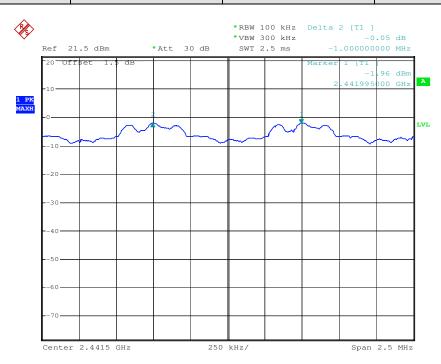

Test mode: π/4DQPSK Test channel: Highest







Report No.: SZEM140500252001

Page: 34 of 88

Test mode: 8DPSK Test channel: Lowest

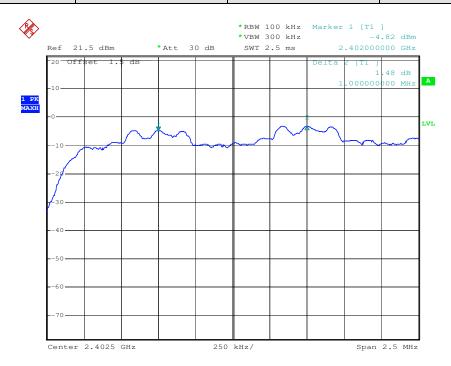

Test mode: 8DPSK Test channel: Middle

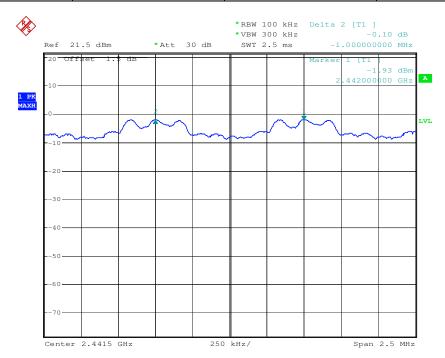




Report No.: SZEM140500252001

Page: 35 of 88

Test mode: 8DPSK Test channel: Highest

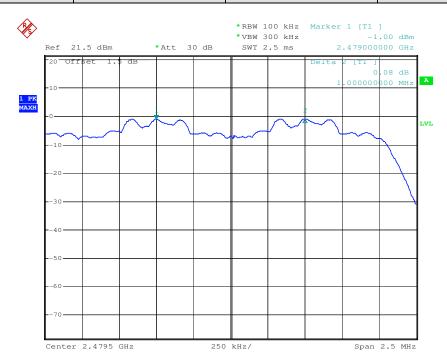




Report No.: SZEM140500252001

Page: 36 of 88

5.6 Hopping Channel Number

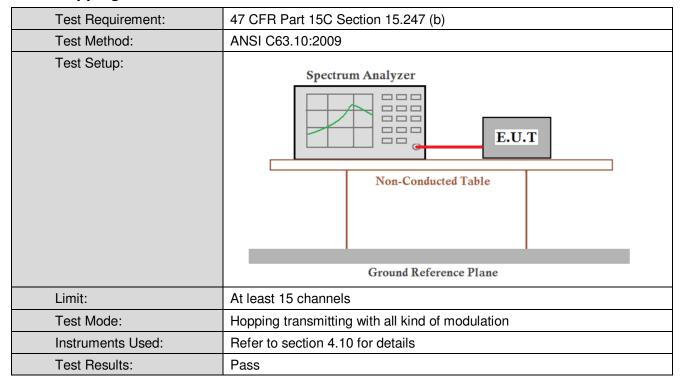

Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15



Report No.: SZEM140500252001


Page: 37 of 88


Stop 2.4835 GHz

π/4DQPSK

Span 83.5 MHz

Test plot as follows

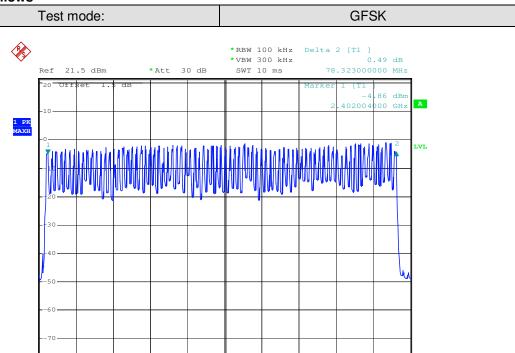

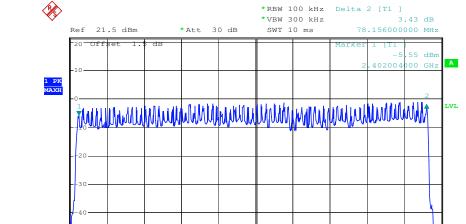

8.35 MHz/

Start 2.4 GHz

Test mode:


Center 2.44175 GHz





Report No.: SZEM140500252001

Page: 38 of 88

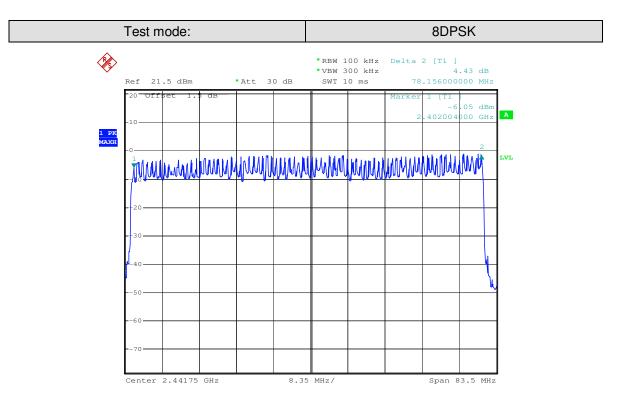




Report No.: SZEM140500252001

Page: 39 of 88

5.7 Dwell Time

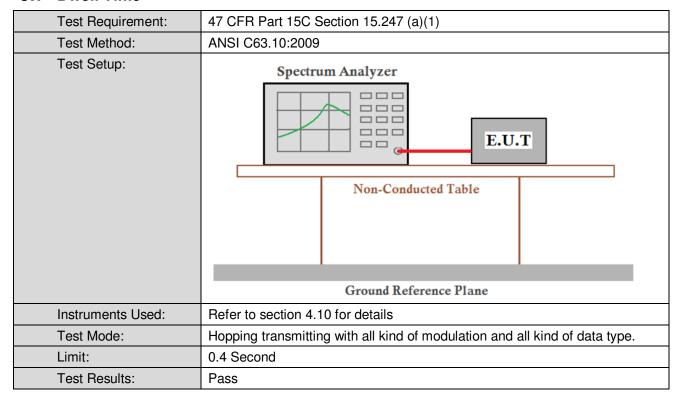

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)	
GFSK	DH1	0.128	0.4	
	DH3	0.264	0.4	
	DH5	0.310	0.4	
π/4DQPSK	2-DH1	0.131	0.4	
	2-DH3	0.266	0.4	
	2-DH5	0.181	0.4	
8DPSK	3-DH1	0.131	0.4	
	3-DH3	0.267	0.4	
	3-DH5	0.310	0.4	

Test Result:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below

DH1 time slot=0.400(ms)*(1600/ (2*79))*31.6=128 ms

DH3 time slot=1.650(ms)*(1600/ (4*79))*31.6=264ms

DH5 time slot=2.910(ms)*(1600/ (6*79))*31.6=310ms




Report No.: SZEM140500252001


Page: 40 of 88

Test plot as follows:

Test mode: GFSK Test channel: Lowest

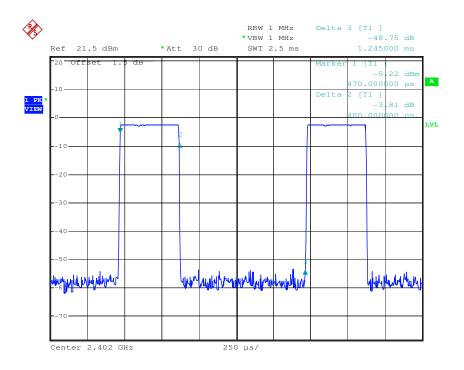

Test mode:	GFSK	Test channel:	Middle
			1111010110

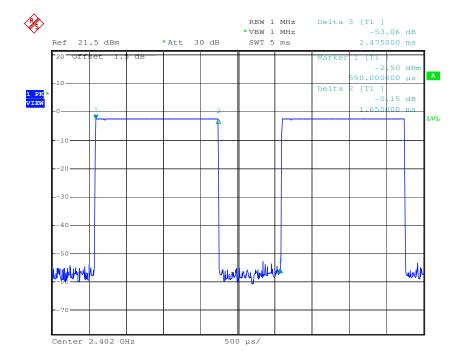





Report No.: SZEM140500252001

Page: 41 of 88

Test mode: GFSK Test channel: Highest

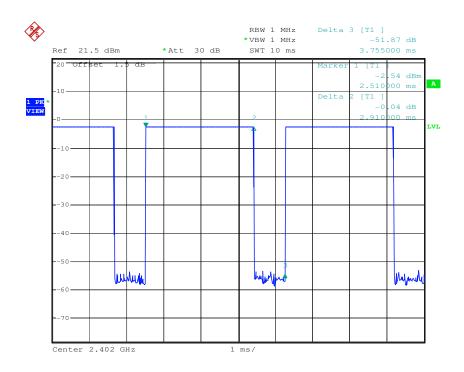

Test mode: π/4DQPSK Test channel: Lowest

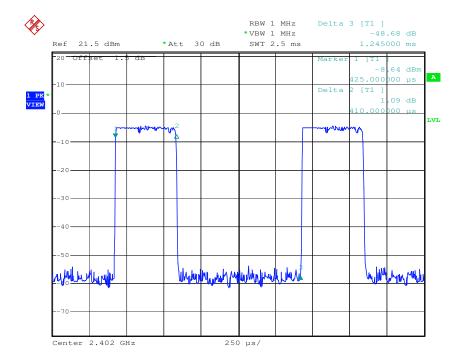





Report No.: SZEM140500252001

Page: 42 of 88

Test mode: π/4DQPSK Test channel: Middle

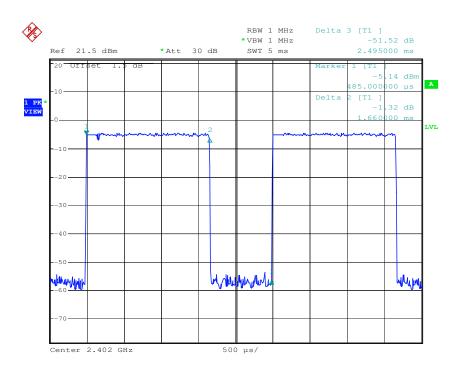

Test mode: π/4DQPSK Test channel: Highest

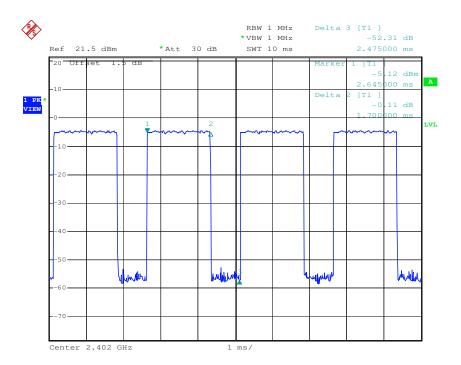






Report No.: SZEM140500252001

Page: 43 of 88

Test mode: 8DPSK Test channel: Lowest

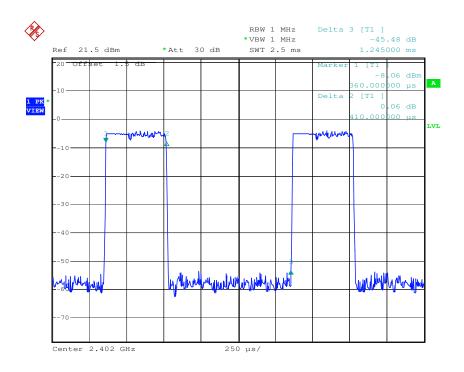



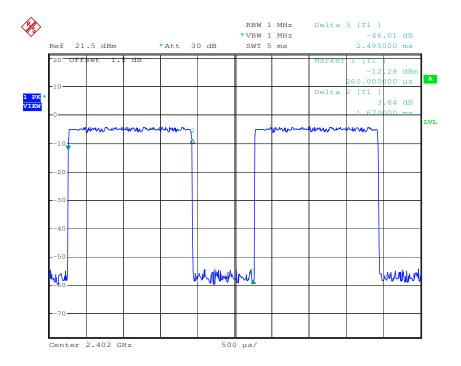




Report No.: SZEM140500252001

Page: 44 of 88

Test mode: 8DPSK Test channel: Highest

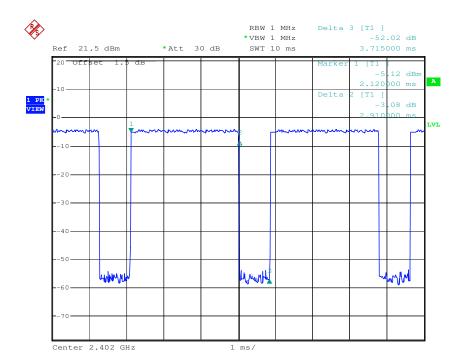




Report No.: SZEM140500252001

Page: 45 of 88

5.8 Band-edge for RF Conducted Emissions

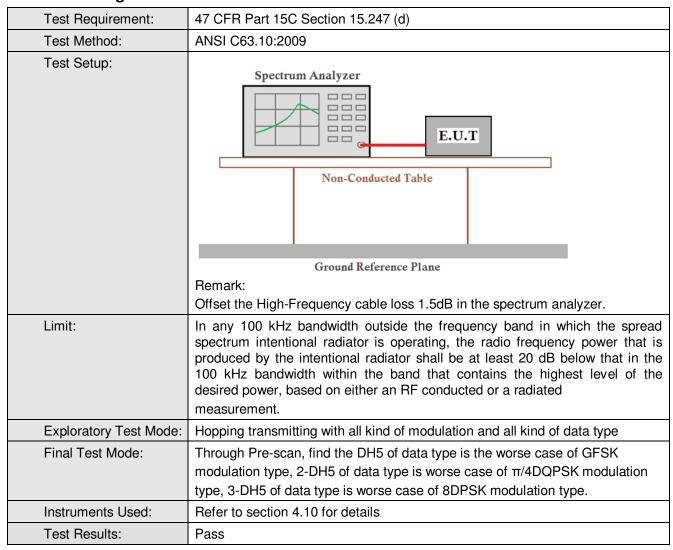





Report No.: SZEM140500252001

Page: 46 of 88

Test plot as follows:



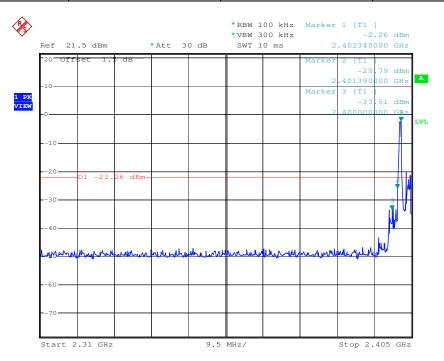

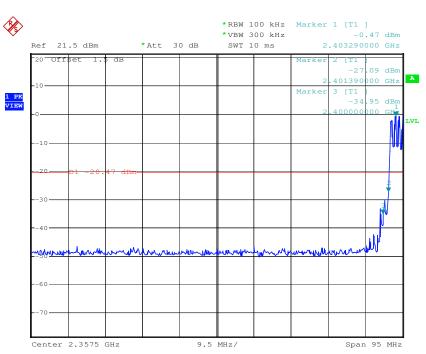





Report No.: SZEM140500252001

Page: 47 of 88



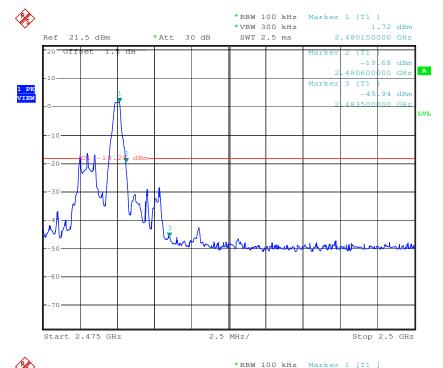

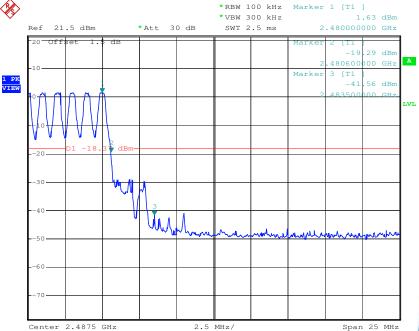






Report No.: SZEM140500252001

Page: 48 of 88



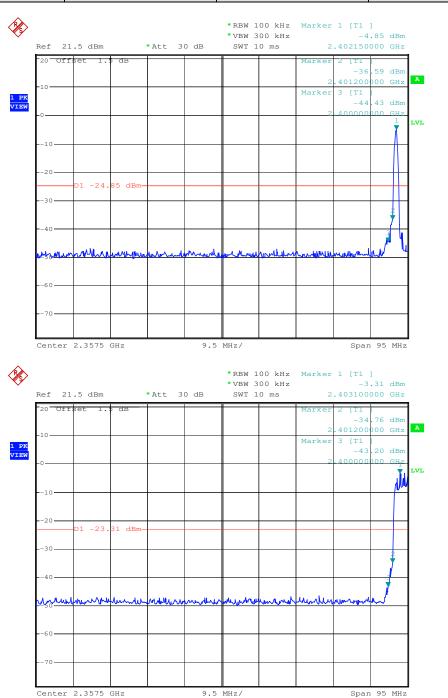




Report No.: SZEM140500252001

Span 25 MHz

Page: 49 of 88



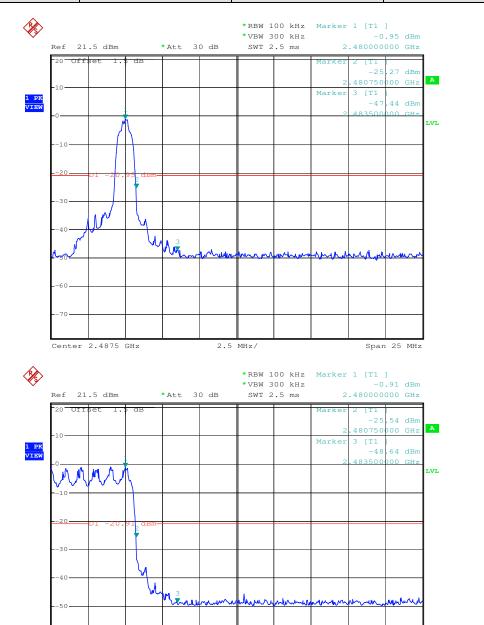

Center 2.4875 GHz


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140500252001

Span 95 MHz

Page: 50 of 88

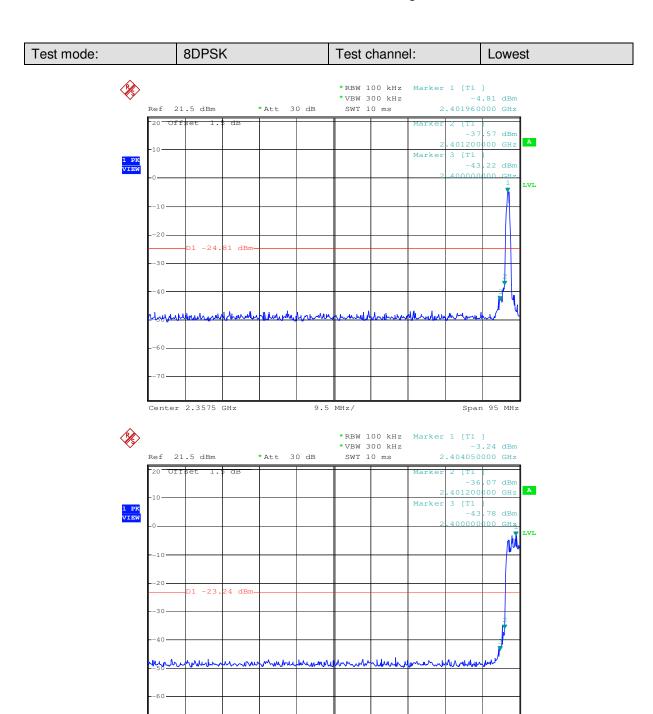

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


Center 2.3575 GHz




Report No.: SZEM140500252001

Stop 2.5 GHz

Page: 51 of 88



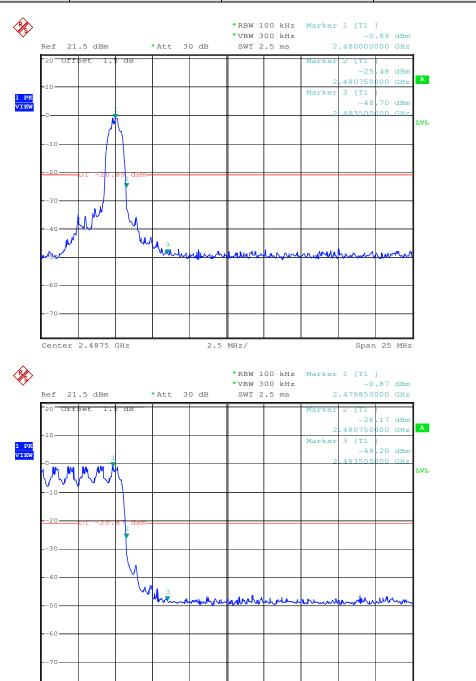

Start 2.475 GHz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140500252001

Page: 52 of 88

5.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.		
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worse case of GFSK modulation type, 2-DH5 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH5 of data type is worse case of 8DPSK modulation type.		
Instruments Used:	Refer to section 4.10 for details		
Test Results:	Pass		




Report No.: SZEM140500252001

Stop 2 GHz

Page: 53 of 88

Test plot as follows:

Test mode: GFSK Test channel: Lowest

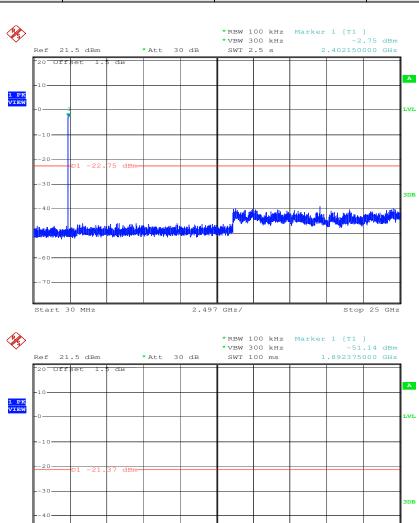



Start 1 GHz



Report No.: SZEM140500252001

Page: 54 of 88

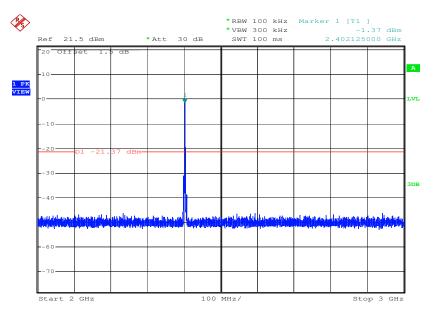

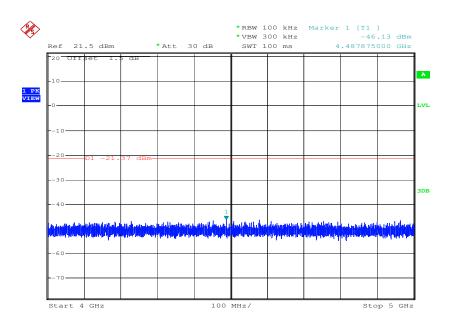





Report No.: SZEM140500252001

Page: 55 of 88

Test mode: GFSK Test channel: Middle

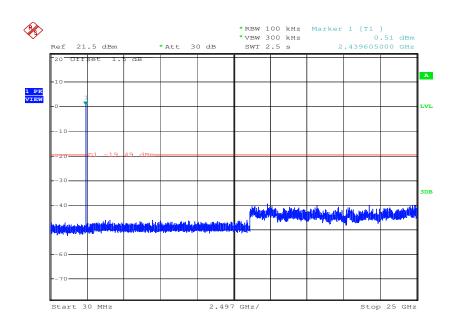


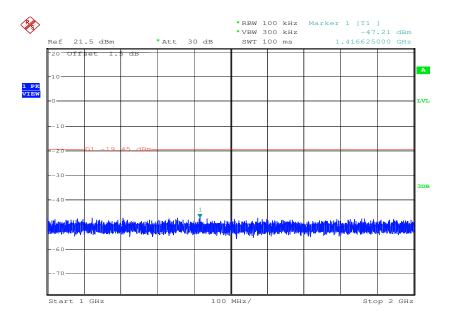




Report No.: SZEM140500252001

Page: 56 of 88

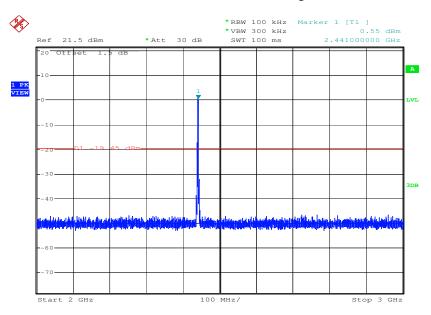

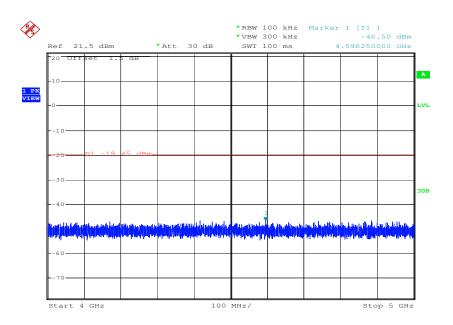






Report No.: SZEM140500252001

Page: 57 of 88



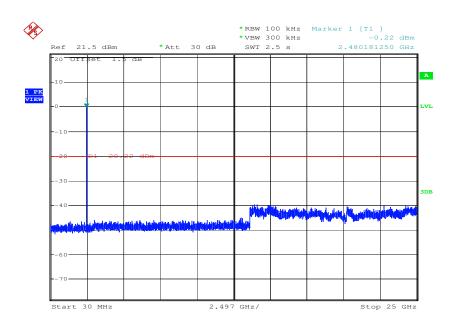

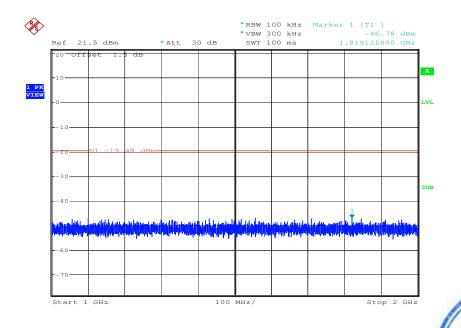


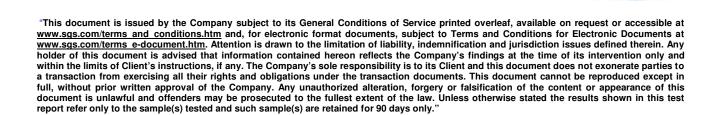




Report No.: SZEM140500252001

Page: 58 of 88

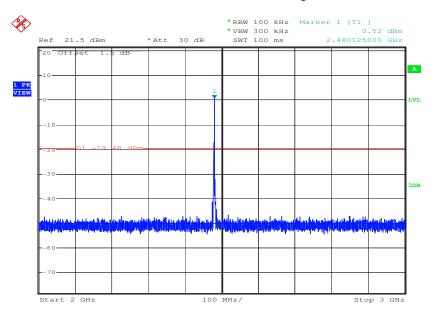


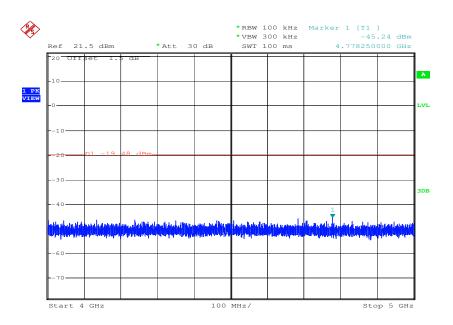




Report No.: SZEM140500252001

Page: 59 of 88

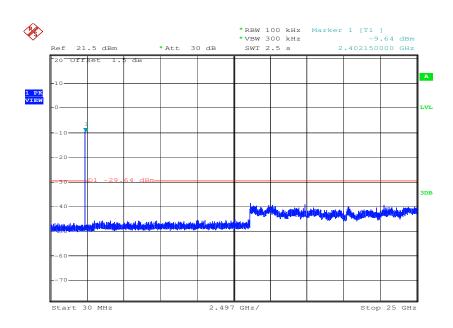


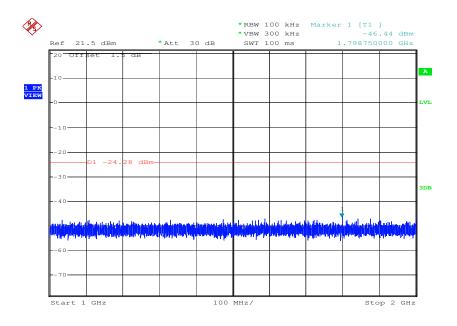




Report No.: SZEM140500252001

Page: 60 of 88

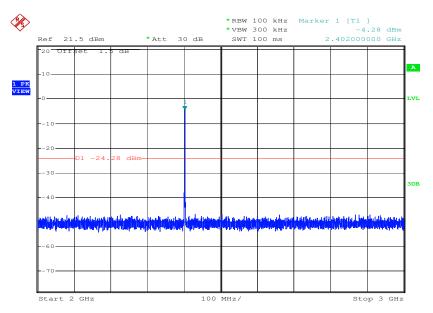

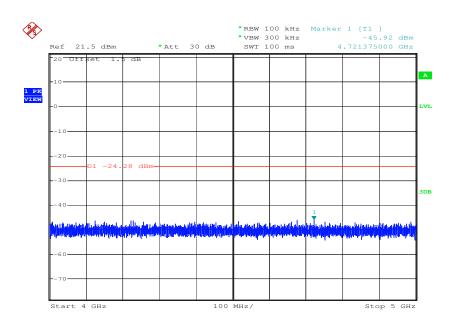





Report No.: SZEM140500252001

Page: 61 of 88

Test mode: π/4DQPSK Test channel: Middle

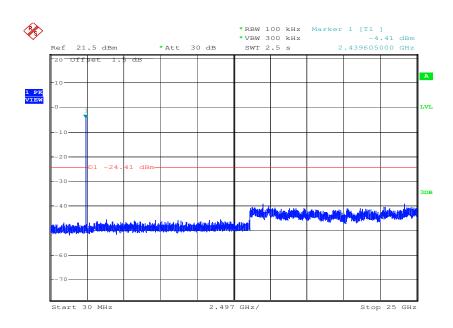


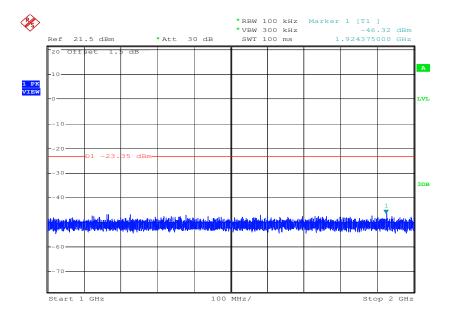




Report No.: SZEM140500252001

Page: 62 of 88

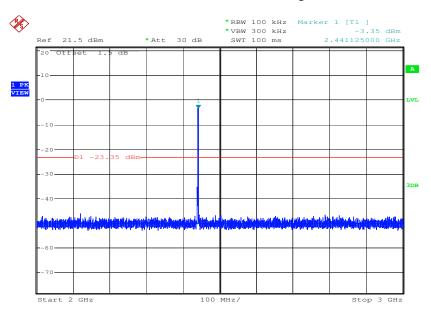

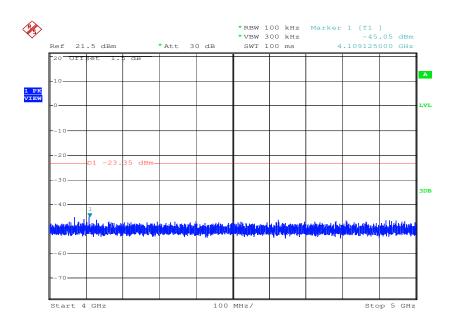





Report No.: SZEM140500252001

Page: 63 of 88

Test mode:	π/4DQPSK	Test channel:	Highest
Tool Infoat.	III ID GI OIL	1 Oot onamon	i ligitoot

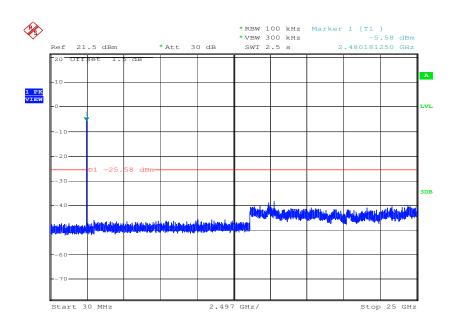


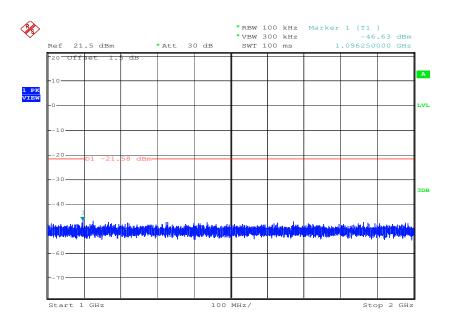




Report No.: SZEM140500252001

Page: 64 of 88

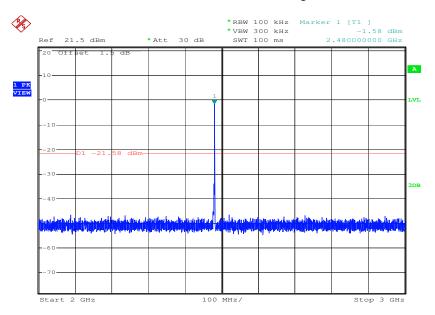

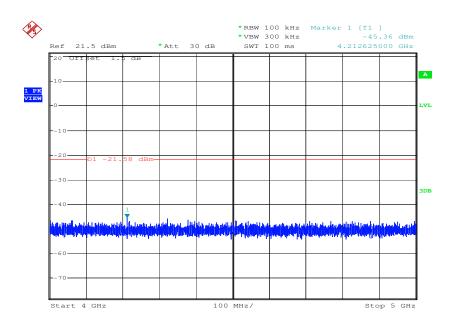





Report No.: SZEM140500252001

Page: 65 of 88

Test mode: 8DPSK Test channel: Lowest

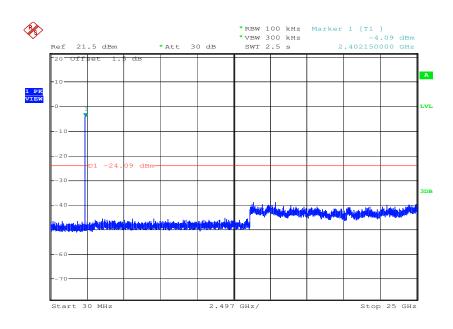


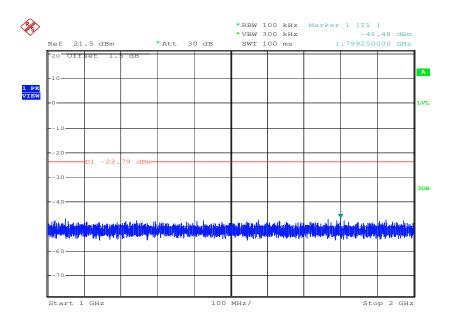




Report No.: SZEM140500252001

Page: 66 of 88

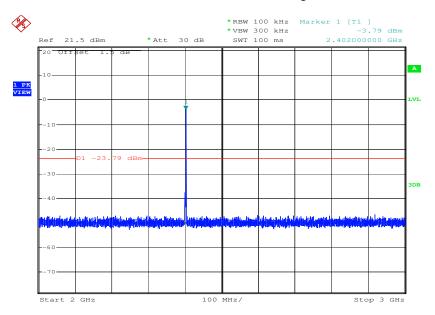

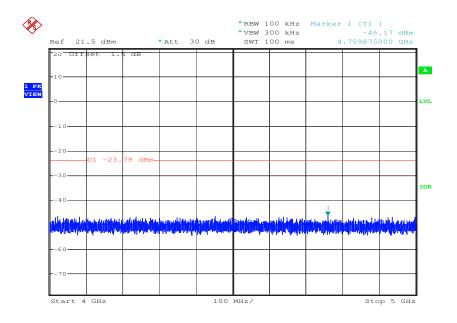





Report No.: SZEM140500252001

Page: 67 of 88

Test mode: 8DPSK Test channel: Middle

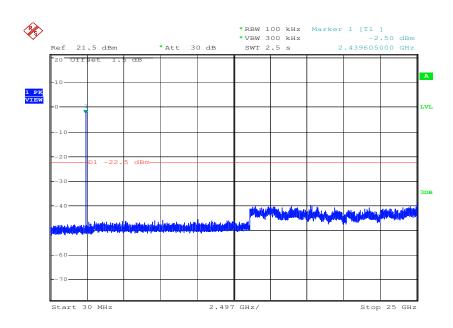


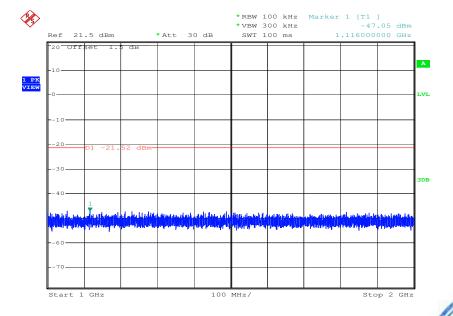




Report No.: SZEM140500252001

Page: 68 of 88

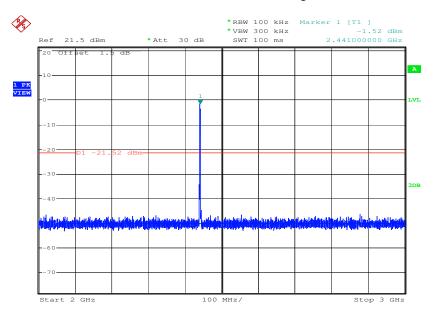

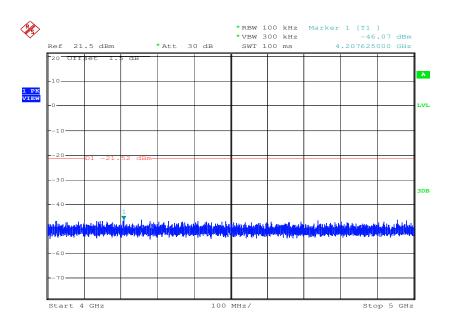





Report No.: SZEM140500252001

Page: 69 of 88

Test mode: 8DPSK Test channel: Highest

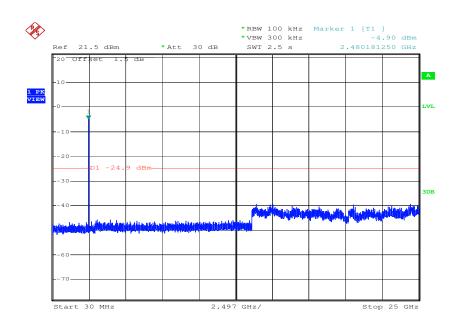


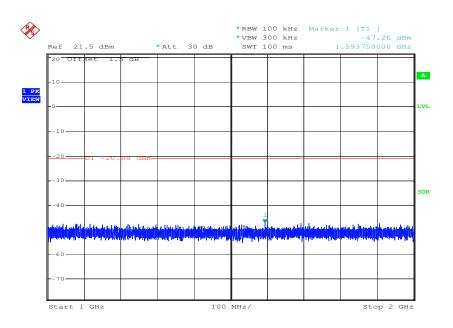



Report No.: SZEM140500252001

Page: 70 of 88

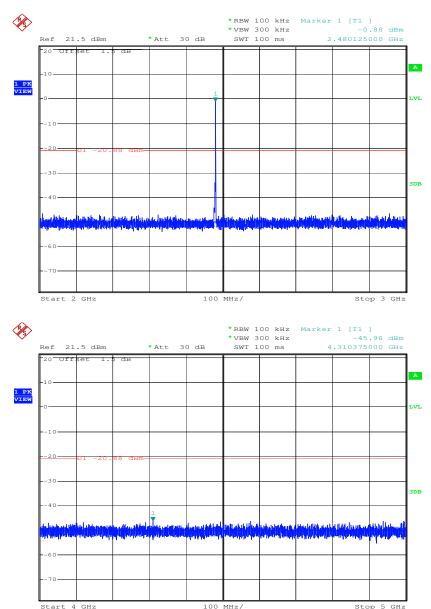

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140500252001

Page: 71 of 88

5.10 Pseudorandom Frequency Hopping Sequence

Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- · Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.



Report No.: SZEM140500252001

Page: 72 of 88

5.11 Radiated Spurious Emission


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10: 2009							
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency Detector RBW VBW Re							
	0.009MHz-0.090MHz		Peak	10kHz	z 30kHz	Peak		
	0.009MHz-0.090MH	Z	Average	10kHz	z 30kHz	Average		
	0.090MHz-0.110MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak		
	0.110MHz-0.490MHz		Peak	10kHz	30kHz	Peak		
	0.110MHz-0.490MH	Z	Average	10kHz	30kHz	Average		
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak		
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak	.k	
	Above 1GHz		Peak	1MHz	3MHz	Peak		
			Peak	1MHz	10Hz	Average		
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measureme distance (m		
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300		
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30		
	1.705MHz-30MHz		30	-	-	30		
	30MHz-88MHz		100	40.0	Quasi-peak	3		
	88MHz-216MHz		150	43.5	Quasi-peak	3		
	216MHz-960MHz		200	46.0	Quasi-peak 3			
	960MHz-1GHz		500	54.0	Quasi-peak	3		
	Above 1GHz		500	54.0	Average	3		
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio from the emissions is 20dB above the maximum permitted average emissions applicable to the equipment under test. This peak limit applies peak emission level radiated by the device.				emission limit			



Report No.: SZEM140500252001

Page: 73 of 88

Test Setup:

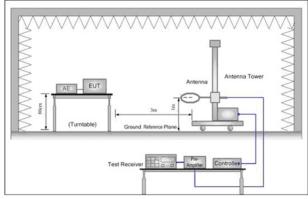

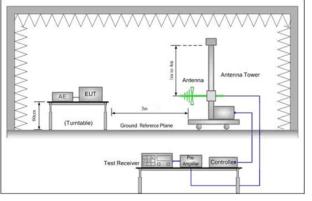


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

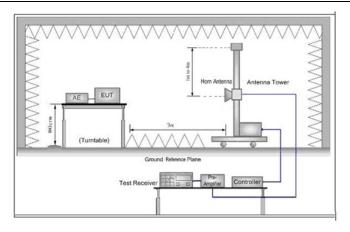


Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average



Report No.: SZEM140500252001

Page: 74 of 88

	method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)
	 h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM140500252001

Page: 75 of 88

5.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

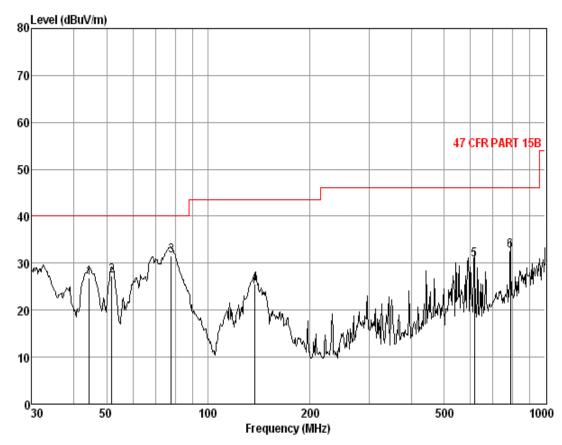

Condition: 47 CFR PART 15B 3m 3142C VERTICAL

Job No. : 2520RF Mode : TX


		C-1-1-A		D	ניים		1:_:.	0
	-			Preamp			Limit	Over
	Freq	Loss	⊬actor	Factor	Level	Level	Line	Limit
	MHz	dB	_dB/m	dB	-dBuV	dBuV/m	dBuV/m	dB
			, III	-		· · · · · · · · · · · · · · · · · · ·	32 St. 7 III	-
1	44.43	0.69	9.80	27.31	43.77	26.95	40 00	-13.05
÷								
2	51.84	0.80	6.65	27. 29	47.07	27.23	40.00	-12.77
3	77.59	1.03	4.87	27.23	52.81	31.48	40.00	-8.52
4	137.90	1.29	8.48	26.97	42.70	25.50	43.50	-18.00
5	616.37	2.74	15.42	27.52	40.04	30.68	46.00	-15.32
6	787.85	3.17	18.20	27.31	38.63	32.69	46.00	-13.31



Report No.: SZEM140500252001

Page: 76 of 88

Test mode: Transmitting Horizontal

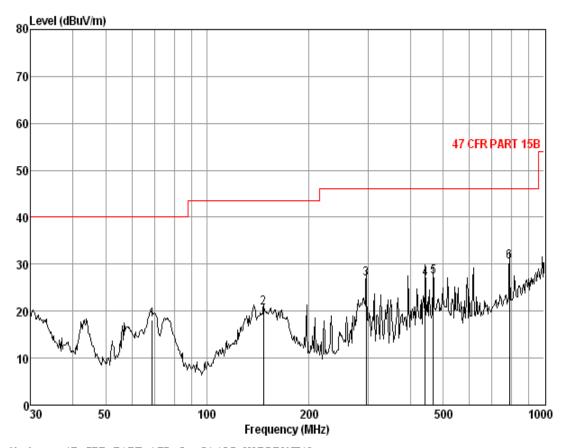

Condition: 47 CFR PART 15B 3m 3142C HORIZONTAL

Job No. : 2520RF

Mode

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	₫B	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	$\overline{\text{dBuV/m}}$	d B
1 2 3 4 5	68. 63 146. 89 296. 18 443. 29 468. 88 787. 85	0.80 1.31 1.88 2.38 2.49	4.72 9.10 9.54 12.59 13.20 18.20	27. 25 26. 92 26. 41 27. 40 27. 54 27. 31	39.83 37.10 41.86 39.29 39.25 36.49	18. 10 20. 59 26. 87 26. 86 27. 40 30. 55	43.50 46.00 46.00 46.00	-21.90 -22.91 -19.13 -19.14 -18.60 -15.45



Report No.: SZEM140500252001

Page: 77 of 88

5.11.2 Transmitter Emission above 1GHz

Worse case i	mode:	GFSK(DH1)	Test	channel:	Lowest	owest Remark		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2957.654	5.02	33.33	40.27	44.08	42.16	74	-31.84	Vertical
3923.367	6.36	33.72	40.98	45.20	44.30	74	-29.70	Vertical
4804.000	7.44	34.70	41.63	46.23	46.74	74	-27.26	Vertical
7206.000	8.72	35.88	39.87	44.46	49.19	74	-24.81	Vertical
9608.000	9.68	37.30	37.80	41.37	50.55	74	-23.45	Vertical
12055.600	11.31	38.95	38.30	40.37	52.33	74	-21.67	Vertical
2942.635	5.01	33.31	40.26	44.55	42.61	74	-31.39	Horizontal
3973.622	6.43	33.78	41.02	45.42	44.61	74	-29.39	Horizontal
4804.000	7.44	34.70	41.63	45.62	46.13	74	-27.87	Horizontal
7206.000	8.72	35.88	39.87	44.72	49.45	74	-24.55	Horizontal
9608.000	9.68	37.30	37.80	41.48	50.66	74	-23.34	Horizontal
11872.880	11.20	38.78	38.22	40.74	52.50	74	-21.50	Horizontal

Worse case	mode:	GFSK(DH1)) Test	t channel:	Middle	Middle Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2965.192	5.04	33.35	40.27	45.40	43.52	74	-30.48	Vertical
3973.622	6.43	33.78	41.02	45.82	45.01	74	-28.99	Vertical
4880.000	7.48	34.59	41.68	46.03	46.42	74	-27.58	Vertical
7320.000	8.87	35.93	39.77	44.03	49.06	74	-24.94	Vertical
9760.000	9.74	37.46	37.66	41.06	50.60	74	-23.40	Vertical
11933.470	11.24	38.83	38.24	40.80	52.63	74	-21.37	Vertical
2927.691	5.01	33.28	40.24	45.24	43.29	74	-30.71	Horizontal
3943.392	6.38	33.74	41.00	45.52	44.64	74	-29.36	Horizontal
4880.000	7.48	34.59	41.68	45.81	46.20	74	-27.80	Horizontal
7320.000	8.87	35.93	39.77	44.15	49.18	74	-24.82	Horizontal
9760.000	9.74	37.46	37.66	41.30	50.84	74	-23.16	Horizontal
11722.720	11.08	38.62	38.16	41.45	52.99	74	-21.00	Horizontal



Report No.: SZEM140500252001

Page: 78 of 88

Worse case	mode:	GFSK(DH1)	Tes	t channel:	Highest Rem		ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2987.923	5.05	33.38	40.30	44.34	42.47	74	-31.53	Vertical
3933.367	6.38	33.74	40.98	45.54	44.68	74	-29.32	Vertical
4960.000	7.53	34.46	41.74	46.62	46.87	74	-27.13	Vertical
7440.000	9.01	35.98	39.67	45.24	50.56	74	-23.44	Vertical
9920.000	9.81	37.63	37.53	40.97	50.88	74	-23.12	Vertical
12178.980	11.36	39.09	38.35	40.40	52.50	74	-21.50	Vertical
2935.153	5.01	33.31	40.26	44.62	42.68	74	-31.32	Horizontal
3973.622	6.43	33.78	41.02	44.95	44.14	74	-29.86	Horizontal
4960.000	7.53	34.46	41.74	46.18	46.43	74	-27.57	Horizontal
7440.000	9.01	35.98	39.67	43.60	48.92	74	-25.08	Horizontal
9920.000	9.81	37.63	37.53	41.13	51.04	74	-22.96	Horizontal
11963.890	11.26	38.87	38.26	40.95	52.82	74	-21.18	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM140500252001

Page: 79 of 88

5.12 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10: 2009							
Test Site:	Measurement Distance: 3m	Measurement Distance: 3m (Semi-Anechoic Chamber)						
Limit:	Frequency	Limit (dBuV/m @3m)	Remark					
	30MHz-88MHz	40.0	Quasi-peak Value					
	88MHz-216MHz	43.5	Quasi-peak Value					
	216MHz-960MHz	46.0	Quasi-peak Value					
	960MHz-1GHz	54.0	Quasi-peak Value					
	Above 1GHz	54.0	Average Value					
	Above IGHZ	74.0	Peak Value					
Test Setup:								

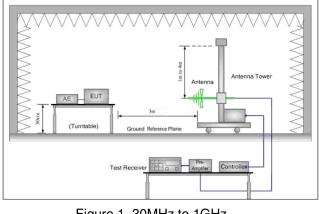

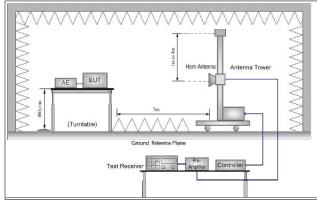


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM140500252001

Page: 80 of 88

T .D .	The ELIT was pleased on the tan of a vetation table 0.0 materials become
Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
	g. Test the EUT in the lowest channel, the Highest channel
	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
	 Repeat above procedures until all frequencies measured was complete.
Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM140500252001

Page: 81 of 88

Test plot as follows:

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Peak Vertical

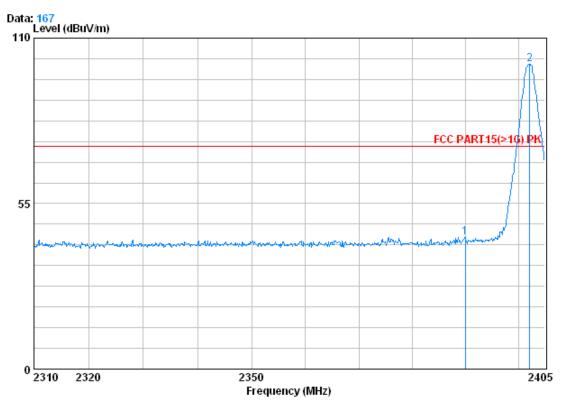

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 2520RF Mode : 2402 BT


		Cable	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	2390.000	2.98	32.51	39.85	48.24	43.88	74.00	-30.12
X	2402.150	2.98	32.51	39.86	105.66	101.30	74.00	27.30
		MHz	Freq Loss MHz dB 2390.000 2.98	Freq Loss Factor MHz dB dB/m 2390.000 2.98 32.51	Freq Loss Factor Factor MHz dB dB/m dB 2390.000 2.98 32.51 39.85	Freq Loss Factor Factor Level MHz dB dB/m dB dBuV 2390.000 2.98 32.51 39.85 48.24	MHz dB dB/m dB dBuV dBuV/m 2390.000 2.98 32.51 39.85 48.24 43.88	Freq Loss Factor Factor Level Level Line MHz dB dB/m dB dBuV dBuV/m dBuV/m 2390.000 2.98 32.51 39.85 48.24 43.88 74.00



Report No.: SZEM140500252001

Page: 82 of 88

Worse case mode: G	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
--------------------	------------	---------------	--------	---------	------	------------

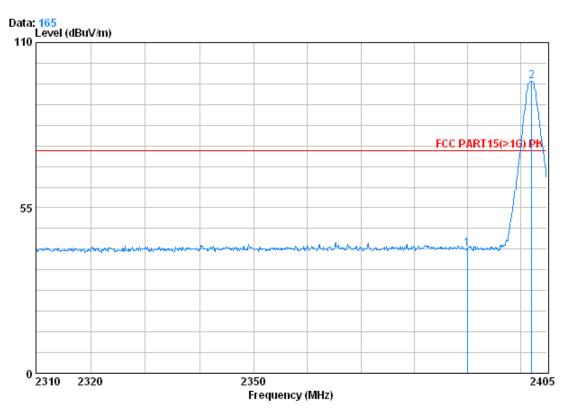

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 2520RF Mode : 2402 BT


1040	. 2-02 D1	Freq			Preamp Factor	Read Level		Limit Line	
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 V		2390.000				45.69		74.00	



Report No.: SZEM140500252001

Page: 83 of 88

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Average Vertical

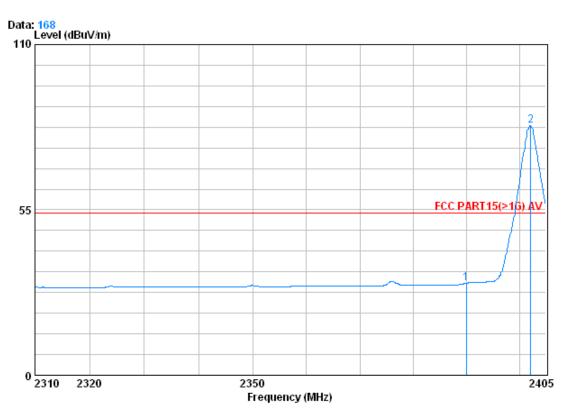

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 2520RF Mode : 2402 BT


			Cable	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	34.98	30.63	54.00	-23.37
2	0	2402.150	2.98	32.51	39.86	87.42	83.05	54.00	29.05



Report No.: SZEM140500252001

Page: 84 of 88

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Average Horizontal

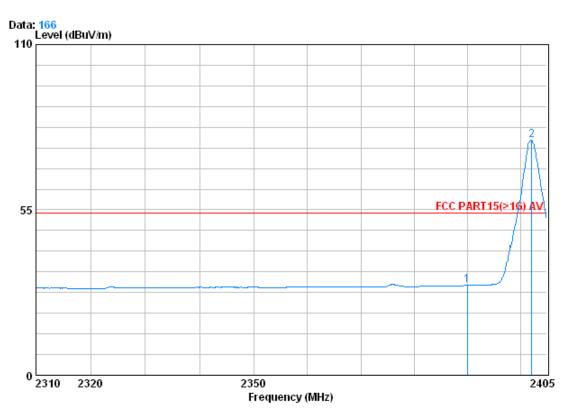

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 2520RF Mode : 2402 BT


			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	${\tt dBuV/m}$	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	34.32	29.97	54.00	-24.03
2	X	2402.150	2.98	32.51	39.86	82.50	78.14	54.00	24.14



Report No.: SZEM140500252001

Page: 85 of 88

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Peak Vertical

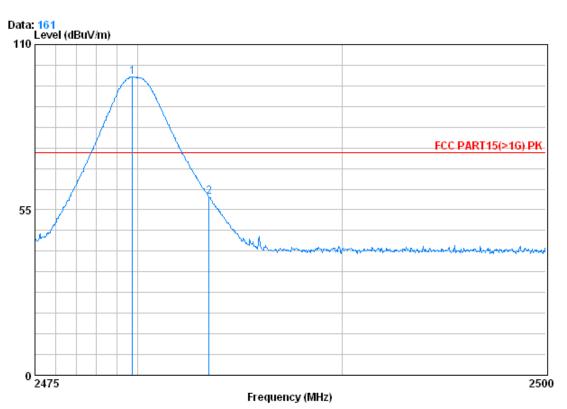

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 2520RF Mode : 2480 BT


		Freq		Antenna Factor	•				Over Limit
	•	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2479.750	3.03	32.67	39.92	103.39	99.17	74.00	25.17
2		2483.500	3.03	32.67	39.92	63.43	59.21	74.00	-14.79



Report No.: SZEM140500252001

Page: 86 of 88

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Peak Horizontal

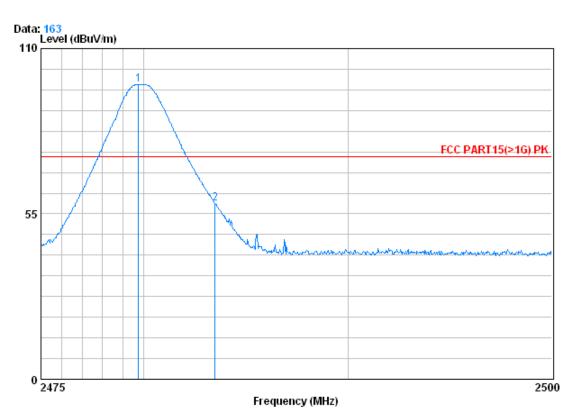

Condition: FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 2520RF Mode : 2480 BT


> CableAntenna Preamp Read Limit Over Loss Factor Factor Freq Level Level Line Limit dBuV dBuV/m dBuV/m MHzdΒ dB/m dΒ 1 X 2479.750 3.03 32.67 39.92 102.37 98.15 74.00 24.15 2483.500 3.03 32.67 39.92 62.62 58.40 74.00 -15.60



Report No.: SZEM140500252001

Page: 87 of 88

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Average Vertical

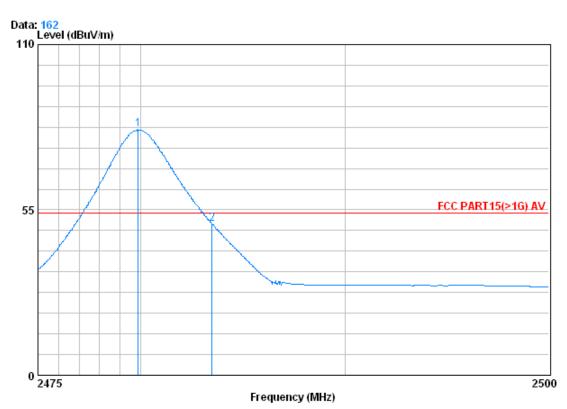

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 2520RF Mode : 2480 BT

		Cablei	lntenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	_							
	MHz	dB	dB/m	dB	-dBuV	dBuV/m	dBuV/m	dB
	******		0.27 1.1	42	aza.	az a 1 / 10	GD G. 7 III	
4 57	2470 075	2 02	22 67	20.02	05.00	01 76	F4 00	20.00
1 X	2479.875	J.UJ	34.67	39.92	05.90	01./6	54.00	27.76
2	2483.500	3.03	32.67	39.92	54.46	50.24	54.00	-3.76






Report No.: SZEM140500252001

Page: 88 of 88

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	------------	---------------	---------	---------	---------	------------

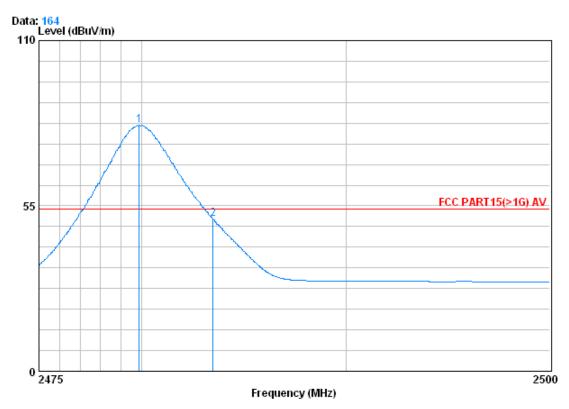

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 2520RF Mode : 2480 BT

			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2479.875	3.03	32.67	39.92	86.03	81.81	54.00	27.81
2		2483.500	3.03	32.67	39.92	54.76	50.54	54.00	-3.46

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."