


R-8518-1 Chamberlain Occupied Bandwidth PL 5/9/00

REF 79.9 dBμV ATTN 0 dB

hp
10 dB/

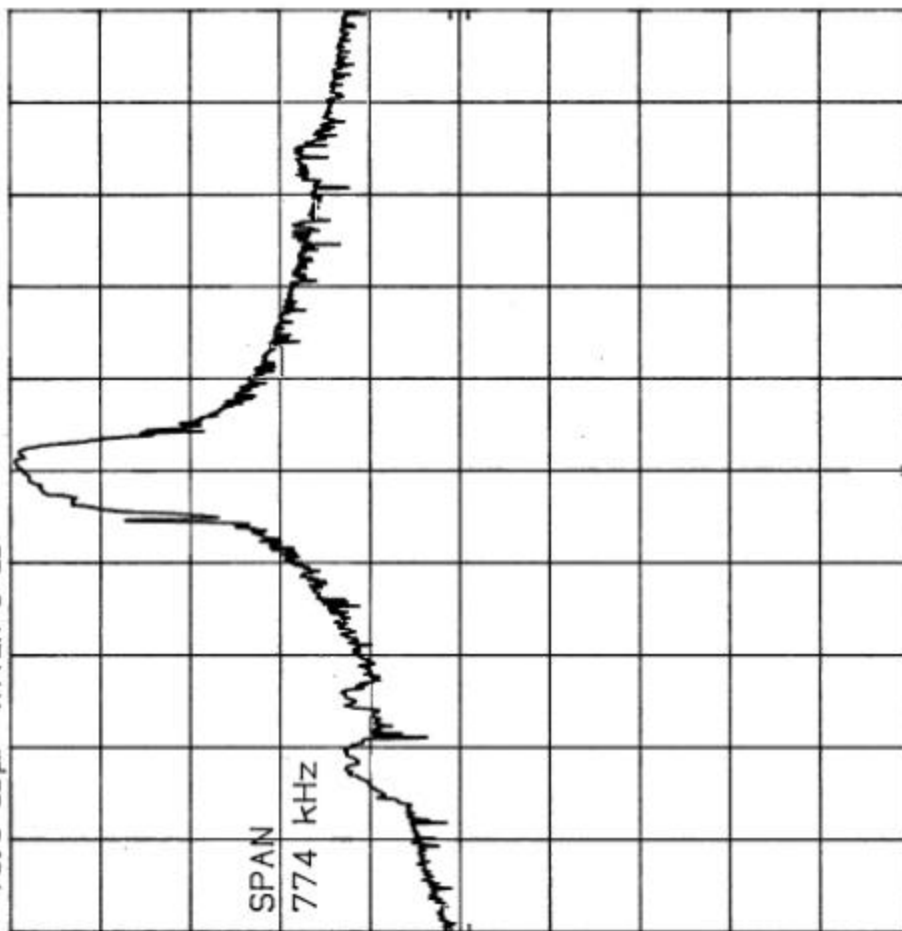

SPAN 774 kHz
SWP 30.0 msec

VBW 30 kHz

CENTER 309.555 MHz
RES BW 10 kHz

Customer:	Chamberlain
Test Sample:	Pulsed RF Transmitter
Model No.:	Triode TX1
Test Method:	FCC 15.231(c) Occupied Bandwidth
Notes:	The Bandwidth of the emission is not greater than 25% of the center frequency 20dB down from the modulated carrier
Date:	May 9, 2000
Tech:	Peter Lannan
Sheet	1 of 2




Retlif Testing Laboratories

Report No. R-8518-1

R-8518-1 Chamberlain Occupied Bandwidth PL 5/9/00

REF 71.5 dBμV ATTEN 0 dB

hp
10 dB/

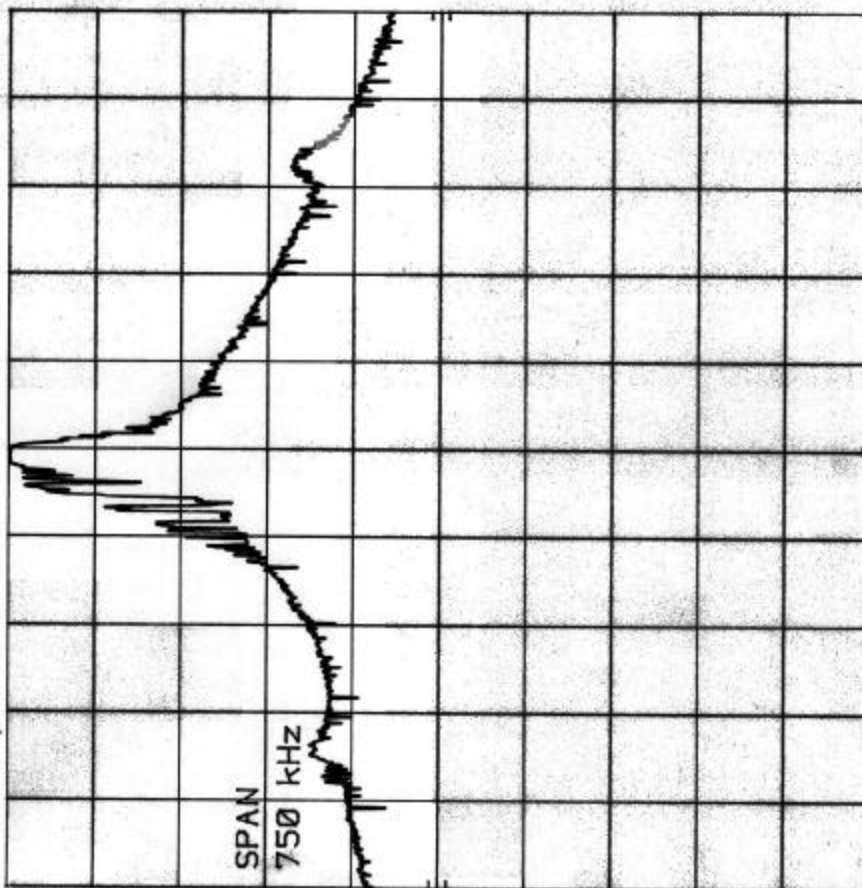

CENTER 298.535 MHz
RES BW 10 kHz
VBW 30 kHz
SPAN 750 kHz
SWP 30.0 msec

Customer:	Chamberlain
Test Sample:	Pulsed RF Transmitter
Model No.:	Tricorde TX4
Test Method:	FCC 15.231(c) Occupied Bandwidth
Notes:	The Bandwidth of the emission is not greater than .25% of the center frequency 20dB down from the modulated carrier
Date:	May 9, 2000
Tech:	Peter Lanan
Sheet	2 of 2



Retlif Testing Laboratories

Report No. R-8518-1