



Report No.:SZ14040088W07

FCC PART 15C TEST REPORT



Issued to

GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD.

For

Mobile Phone

Model Name: OPPO X9076
Trade Name: OPPO
Brand Name: OPPO
FCC ID: R9C-X9076
Standard: 47 CFR Part 15 Subpart C
Test date: April 17, 2014 – May 6, 2014
Issue date: May 7, 2014

By

Shenzhen Morlab Communications Technology Co., Ltd.

FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District,
ShenZhen, Guangdong Province, P. R. China 518101

Tested by Xiao Xiong
Xiao Xiong
(Test Engineer)

Date 2014.5.7



Approved by Zeng Dexin
Zeng Dexin
(Chief Engineer)

Date 2014.5.7

Review by Peng Huarui
Peng Huarui
(Dept. Manager)

Date 2014.5.7

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate

Shenzhen Morlab Communications Technology Co., Ltd.

Phone: +86 (0) 755 36698555

Web site: <http://www.morlab.cn/>

Fax: +86 (0) 755 36698525



TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 EUT DESCRIPTION.....	4
1.2 TEST STANDARDS AND RESULTS	6
1.3 FACILITIES AND ACCREDITATIONS	7
1.3.1 FACILITIES	7
1.3.2 TEST ENVIRONMENT CONDITIONS	7
1.3.3 MEASUREMENT UNCERTAINTY	7
2. 47 CFR PART 15C REQUIREMENTS	8
2.1 ANTENNA REQUIREMENT	8
2.1.1 APPLICABLE STANDARD	8
2.2 CONDUCTED EMISSION	9
2.2.1 TEST REQUIREMENT	9
2.2.2 TEST EQUIPMENT	9
2.2.3 TEST SETUP	10
2.2.4 TEST RESULT	10
2.3 RADIATED EMISSION	13
2.3.1 TEST REQUIREMENT	13
2.3.2 TEST EQUIPMENT	14
2.3.3 TEST SETUP	14
2.3.4 TEST RESULT	16
2.4 FREQUENCY TOLERANCE	19
2.4.1 TEST REQUIREMENT	19
2.4.2 TEST EQUIPMENT	19
2.4.3 TEST SETUP	19
2.4.4 TEST RESULT	19
2.5 20DB BANDWIDTH	21
2.5.1 TEST REQUIREMENT	21
2.5.2 TEST EQUIPMENT	21
2.5.3 TEST SETUP	21
2.5.4 TEST RESULT	21



Change History		
Issue	Date	Reason for change
1.0	May 7, 2014	First edition

1. GENERAL INFORMATION

1.1 EUT Description

EUT Type:	Mobile Phone
Serial No:	(n.a., marked #1 by test site)
Hardware Version:	214076
Software Version:	X9076_12_A.01_140410
Applicant:	GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD. NO.18 HAIBIN ROAD, WUSHA, CHANG'AN, DONGGUAN, GUANGDONG, CHINA
Manufacturer:	GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD. NO.18 HAIBIN ROAD, WUSHA, CHANG'AN, DONGGUAN, GUANGDONG, CHINA
Frequency Range:	13.553MHz~13.567MHz
Frequency:	13.56MHz
Channel Number:	1
Modulation Type:	ASK
Antenna Type:	Patch Antenna
Antenna Gain:	0

Power supply:	Battery	
	Brand Name:	OPPO
	Model No.:	BLP575
	Serial No.:	(n.a. marked #1 by test site)
	Capacity:	3000mAh
	Rated Voltage:	3.8V
	Charge Limit:	4.35V
Ancillary Equipment1:	AC Adapter (Charger for Battery)	
	Brand Name:	OPPO
	Model No.:	AK717
	Serial No.:	(n.a. marked #1 by test site)
	Rated Input:	~ 100-240V, 50/60Hz, 300mA
	Rated Output:	= 5V, 2000mA
Ancillary Equipment2:	AC Adapter (Charger for Battery)	
	Brand Name:	OPPO
	Model No.:	AK719
	Serial No.:	(n.a. marked #1 by test site)
	Rated Input:	~ 100-240V, 50/60Hz, 700mA
	Rated Output:	= 5V, 4500mA

NOTE:

1. The EUT is a Mobile Phone, It supports GSM850MHz, 1900MHz, GPRS, EDGE, WCDMA Band II , BandIV, Band V , HSDPA, HSUPA, HSPA+, LTE Band4, Band17, GPS, NFC, ISM 2.4GHz Bluetooth band and WIFI (802.11a/b/g/n/ac) band. Only NFC was tested in this report.
2. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C:

No.	Identity	Document Title
1	47 CFR Part 15(10-1-13 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.203	Antenna requirement	PASS
2	15.207	Conducted Emission	PASS
3	15.209 15.225(a)(b)(c)(d)	Radiated Emission	PASS
4	15.225(e)	Frequency Tolerance	PASS
5	15.215(c)	20dB Bandwidth	PASS

NOTE:

The tests were performed according to the method of measurements prescribed in ANSI C63.4-2009.

1.3 Facilities and Accreditations

1.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.4-2009 and CISPR Publication 22:2008; the FCC registration number is 695796.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	±1.8dB
Uncertainty of Radiated Emission:	±3.1dB

2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The EUT has a PCB printed antenna for NFC module. Please refer to EUT photos for more photos.



Result: Compliant

2.2 Conducted Emission

2.2.1 Test Requirement

According to FCC section 15.207, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50


NOTE:

- a) The limit subjects to the Class B digital device.
- b) The lower limit shall apply at the band edges.
- c) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.2.2 Test Equipment

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Narda	PMM 9060	001WX11001	2014.2.21	2015.2.20
Receiver	Narda	PMM 9010	595WX11007	2014.2.21	2015.2.20
LISN	Schwarzbeck	NSLK 8127	812744	2014.2.24	2015.2.23
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	(n.a.)	(n.a.)


2.2.3 Test Setup

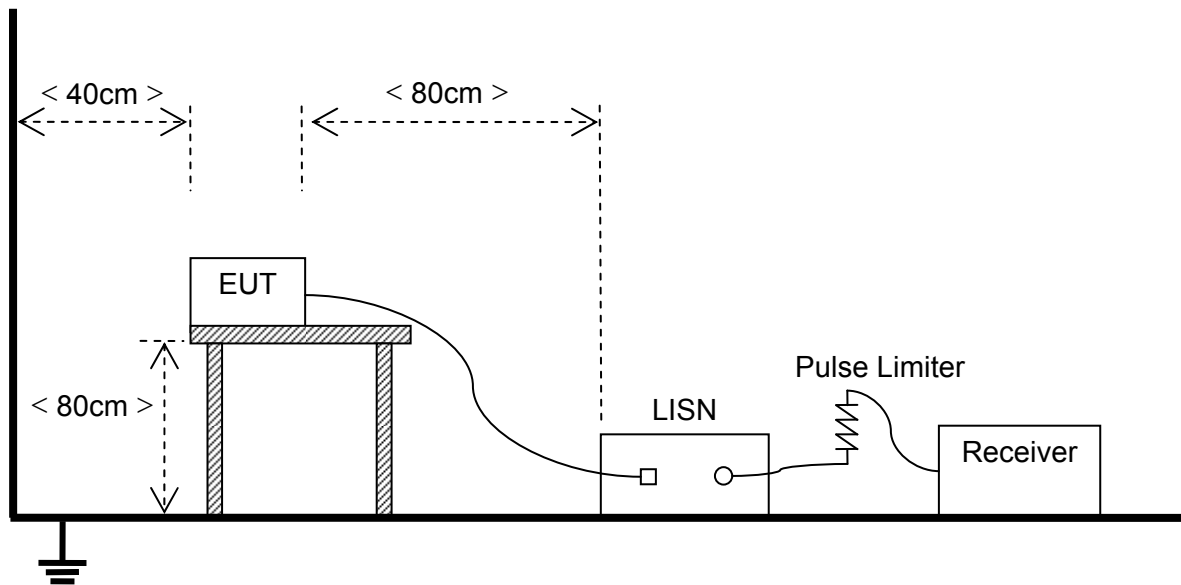

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The RF Card is used for the call between with the EUT, and the EUT was measured by transmitter mode continuously. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


2.2.4 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

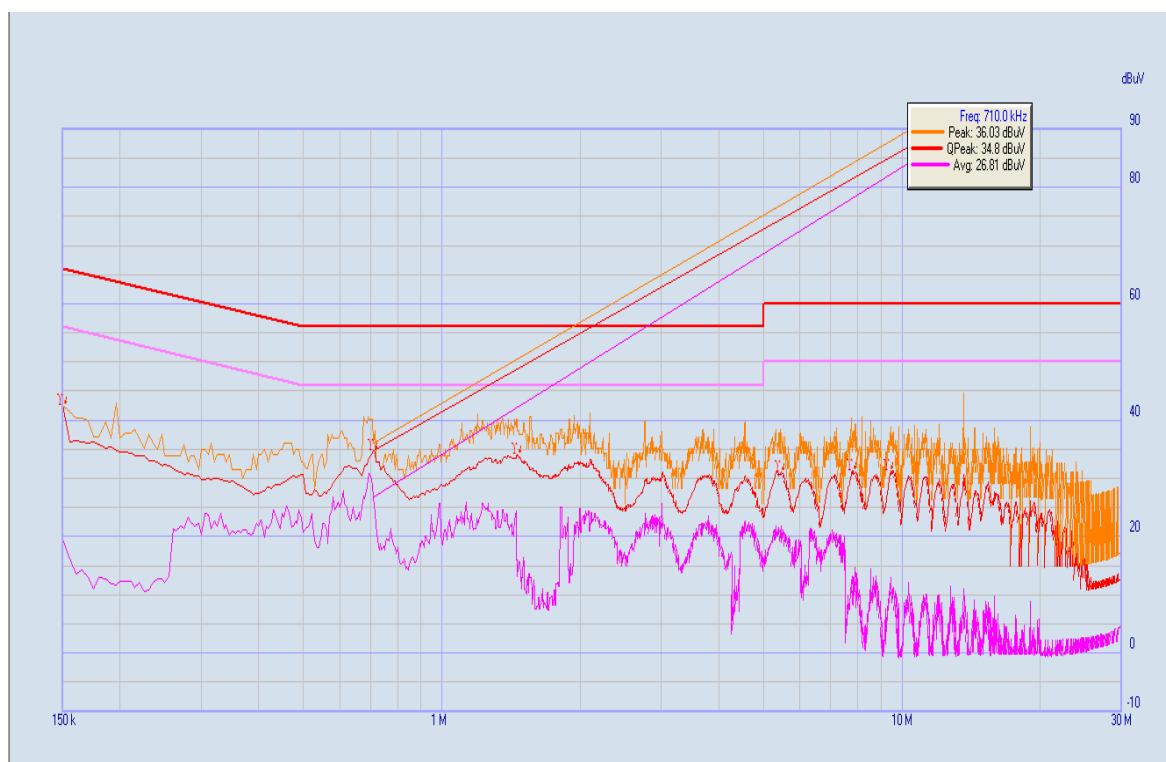

(Plot A: L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	42.43	19.39	66.00	56.00	Line	PASS
2	0.71	34.80	26.81	56.00	46.00		PASS
3	1.46	33.99	13.14	56.00	46.00		PASS
4	5.455	30.73	20.98	60.00	50.00		PASS
5	7.795	31.12	12.92	60.00	50.00		PASS
6	9.395	30.80	8.87	60.00	50.00		PASS

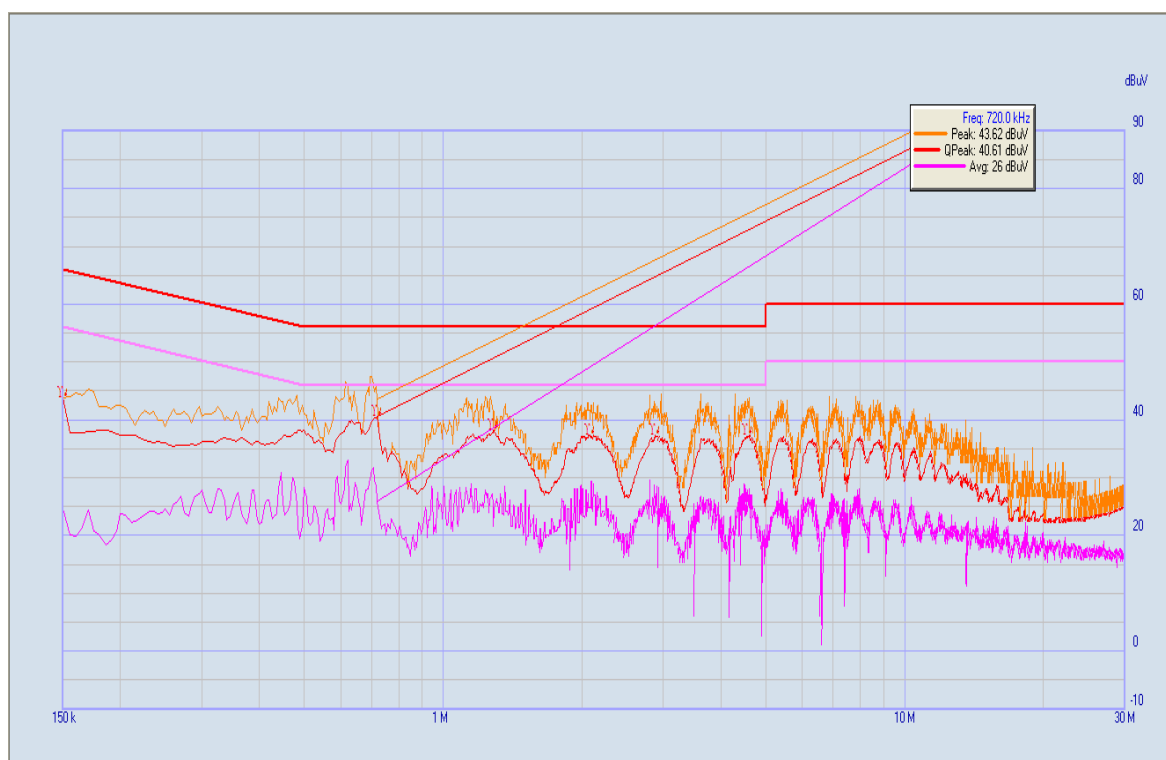

(Plot B: N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	43.91	24.68	66.00	56.00	Neutral	PASS
2	0.72	40.61	26.00	56.00	46.00		PASS
3	1.28	37.88	25.22	56.00	46.00		PASS
4	2.075	37.36	24.74	56.00	46.00		PASS
5	2.89	36.82	27.33	56.00	46.00		PASS
6	4.57	36.88	28.17	56.00	46.00		PASS

Result: PASS

2.3 Radiated Emission

2.3.1 Test Requirement

A. Radiated Emission <30MHz (9KHz-30MHz, H-field)

According to FCC section 15.225, for <30MHz, Radiated emissions were measured according to ANSIC63.4. The EUT was set to transmit at the highest output power. The EUT was set 30 meter away from the measuring antenna. The loop antenna was positioned 1 meter above the ground from the center of the loop. The measuring bandwidth was set to 10KHz. (Note: During testing the receive antenna was rotated about its axis to maximize the emission from the EUT)

There was no detected Restricted bands and Radiated Spurious emission below 30MHz. The 30m limit was converted to 3m Limit using square factor(x) as it was found by measurements as follows;

$$3 \text{ m Limit(dBuV/m)} = 20\log(X) + 40\log(30/3) = 20\log(15848) + 40\log(30/3) = 124\text{dBuV}$$

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency range (MHz)	Field Strength@30m		Field Strength@3m
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
Below 13.110	30	29.5	69.5
13.110 ~ 13.410	106	40.5	80.5
13.410 ~ 13.553	334	50.5	90.5
13.553 ~ 13.567	15848	84	124
13.567 ~ 13.710	334	50.5	90.5
13.710 ~ 14.010	106	40.5	80.5
Above 14.010	30	29.5	69.5

NOTE:

- a) Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
- b) In the emission tables above, the tighter limit applies at the band edges.

B. Radiated Emission >30MHz (30MHz-1GHz, E-field)

According to FCC section 15.205, the field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength	
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

NOTE:


- a) Field Strength (dB μ V/m) = 20*log[Field Strength (μ V/m)].
- b) In the emission tables above, the tighter limit applies at the band edges.

2.3.2 Test Equipment


Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMC Analyzer	Agilent	E7405A	US44210471	2014.2.21	2015.2.20
Receiver	Narda	PMM 9060	001WX11001	2014.2.21	2015.2.20
Receiver	Narda	PMM 9010	595WX11007	2014.2.21	2015.2.20
Semi-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2014.2.21	2015.2.20
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2014.2.25	2015.2.24
Test Antenna - Horn	Schwarzbeck	BBHA 9120D	9120D-963	2014.2.25	2015.2.24
Test Antenna -Loop	Schwarzbeck	FMZB 1519	1519-022	2014.2.25	2015.2.24
T-Flash Card	SanDisk	256MB	(n.a.)	(n.a.)	(n.a.)

2.3.3 Test Setup


- 1) For radiated emissions from 9kHz to 30MHz

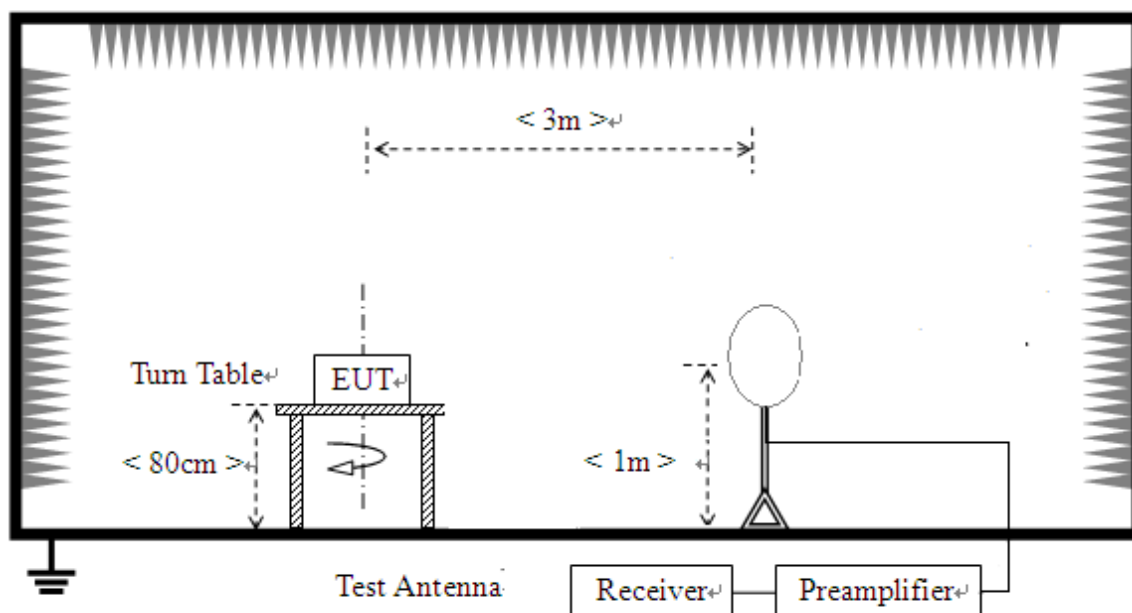

2) For radiated emissions from 30MHz to 1GHz

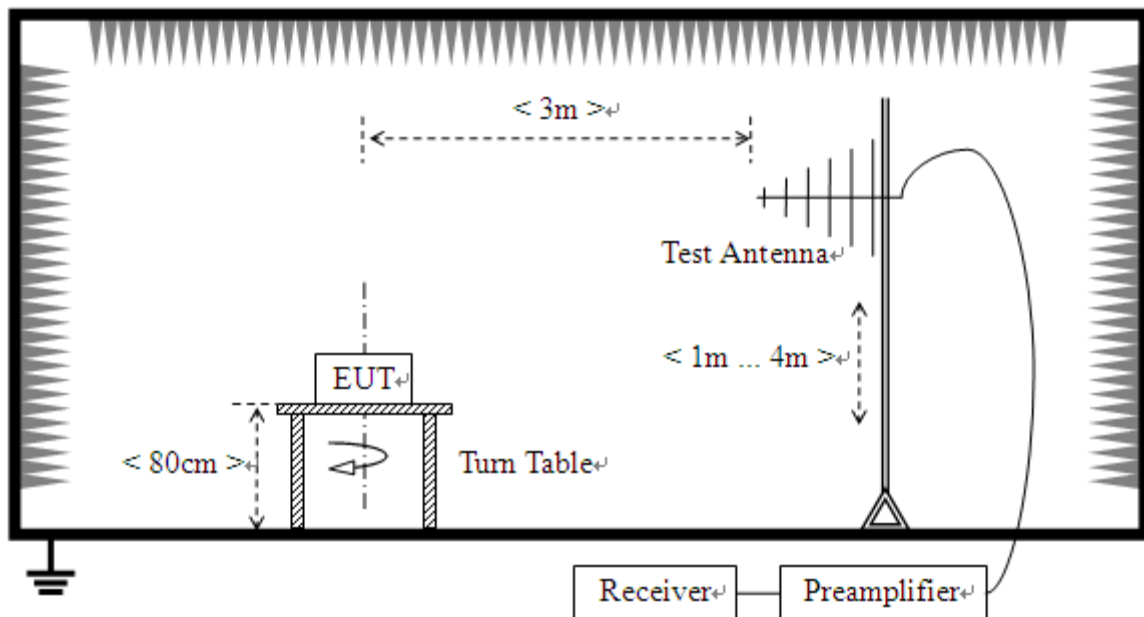

3) For radiated emissions above 1GHz

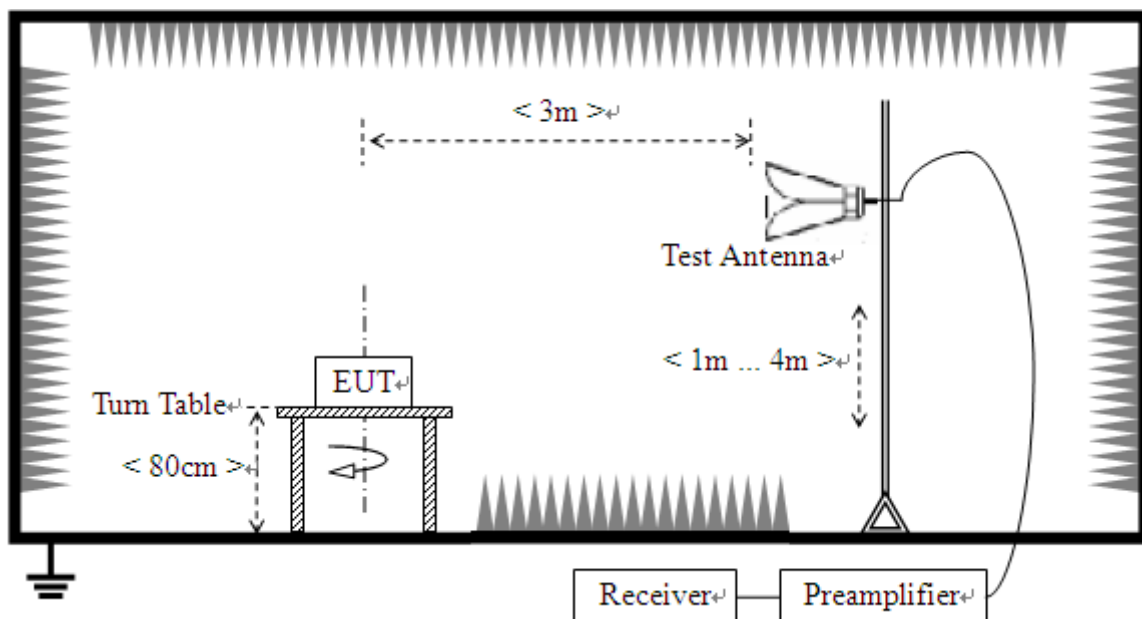

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:


1) In the frequency range of 9KHz to 30MHz, magnetic field is measured with Loop Test Antenna. The

Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

- 2) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.


2.3.4 Test Result

A. Radiated Emission <30MHz (9KHz-30MHz)

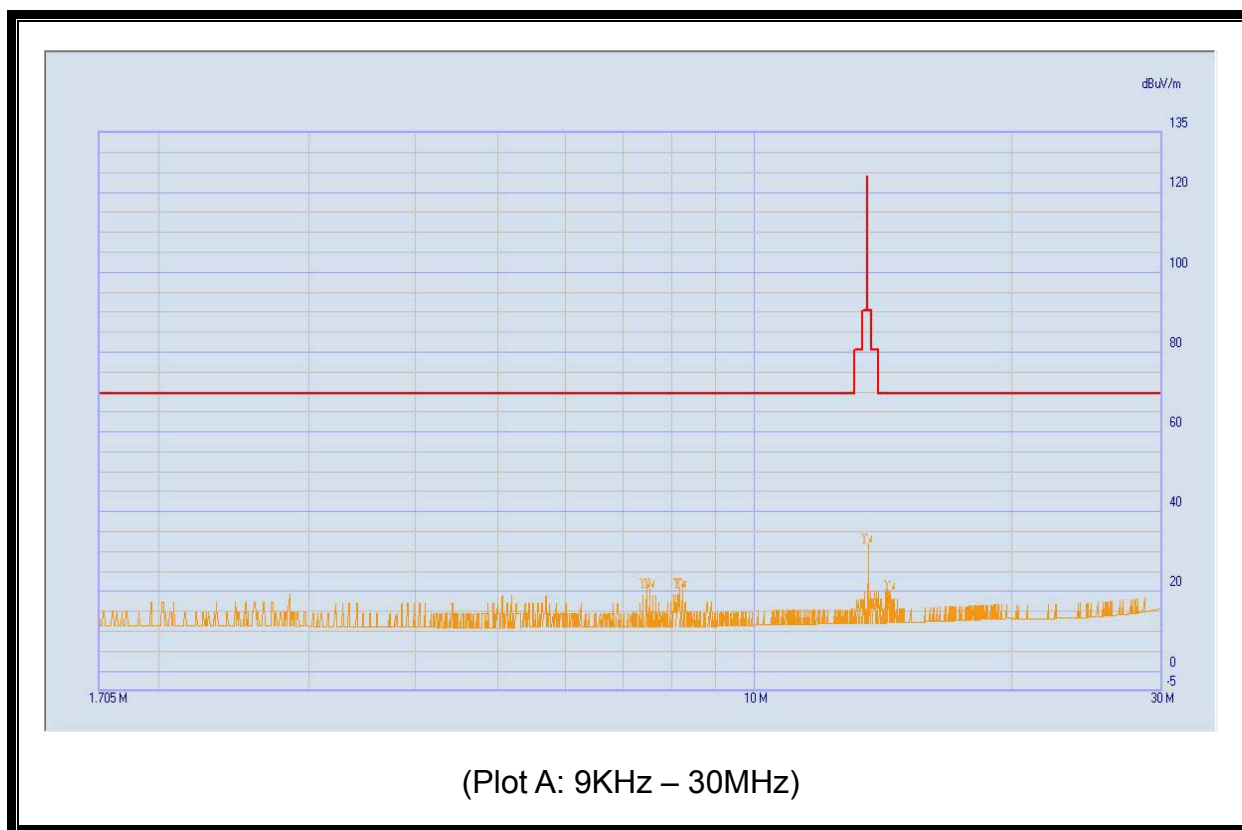


NO.	Fre. (MHz)	Pk	QP	AV	Limit- PK	Limit- QP	Limit- AV	Verdict
1	7.455	N.A	20.69	N.A	N.A	69.5	N.A	Pass
2	7.52	N.A	20.70	N.A	N.A	69.5	N.A	Pass
3	8.15	N.A	20.75	N.A	N.A	69.5	N.A	Pass
4	8.215	N.A	20.59	N.A	N.A	69.5	N.A	Pass
5	13.56	N.A	32.03	N.A	N.A	124	N.A	Pass
6	14.385	N.A	20.09	N.A	N.A	69.5	N.A	Pass

B. Radiated Emission >30MHz (30MHz-1GHz)

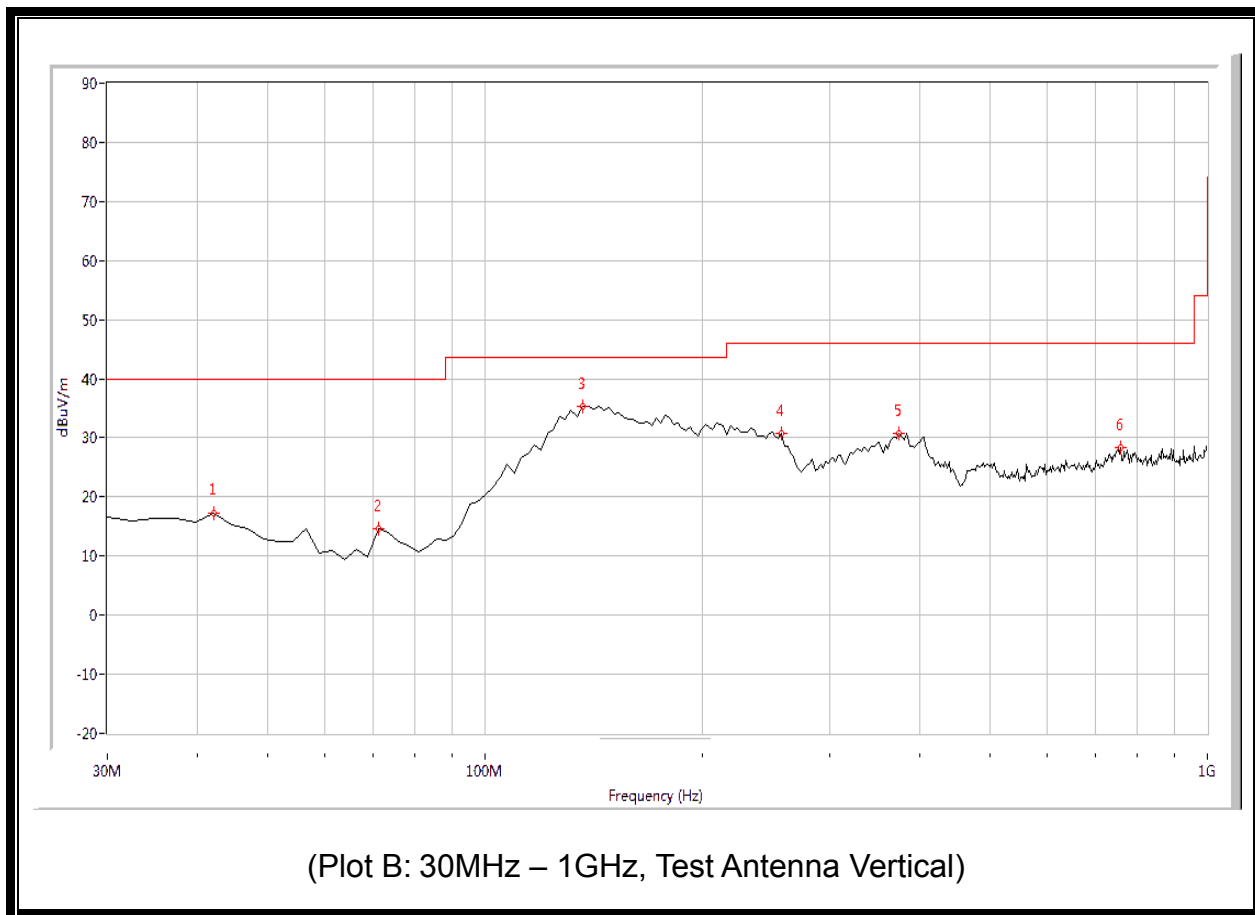

NO.	Fre. (MHz)	Pk	QP	AV	Limit- PK	Limit- QP	Limit- AV	Antenna	Verdict
1	42.095	N.A	17.31	N.A	N.A	40.0	N.A	Vertical	Pass
2	71.122	N.A	14.66	N.A	N.A	40.0	N.A	Vertical	Pass
3	136.434	N.A	35.32	N.A	N.A	43.5	N.A	Vertical	Pass
4	257.382	N.A	30.78	N.A	N.A	46.0	N.A	Vertical	Pass
5	373.491	N.A	30.72	N.A	N.A	46.0	N.A	Vertical	Pass
6	758.105	N.A	28.29	N.A	N.A	46.0	N.A	Vertical	Pass

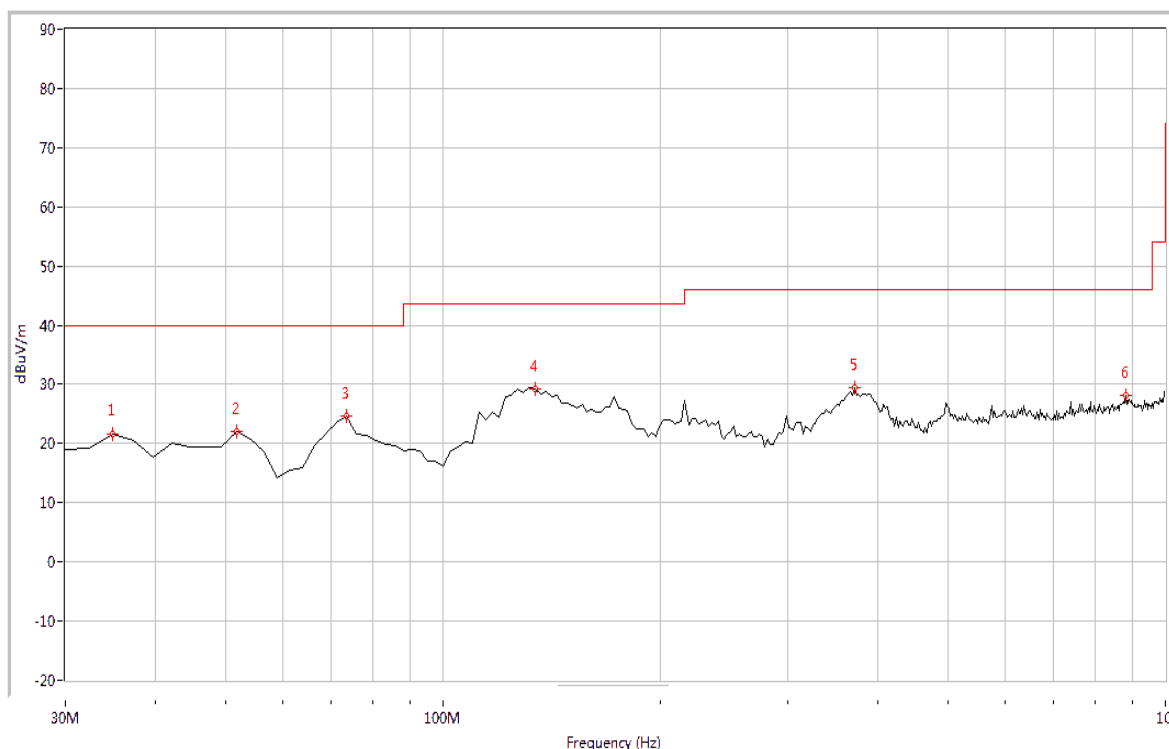

(Plot C: 30MHz – 1GHz, Test Antenna Horizontal)

NO.	Fre. (MHz)	Pk	QP	AV	Limit- PK	Limit- QP	Limit- AV	Antenna	Verdict
1	34.838	N.A	21.54	N.A	N.A	40.0	N.A	Horizontal	Pass
2	51.771	N.A	21.98	N.A	N.A	40.0	N.A	Horizontal	Pass
3	73.541	N.A	24.75	N.A	N.A	40.0	N.A	Horizontal	Pass
4	134.015	N.A	29.32	N.A	N.A	43.5	N.A	Horizontal	Pass
5	371.072	N.A	29.41	N.A	N.A	46.0	N.A	Horizontal	Pass
6	881.471	N.A	28.11	N.A	N.A	46.0	N.A	Horizontal	Pass

Result: PASS

2.4 Frequency Tolerance


2.4.1 Test Requirement

According to FCC section 15.225, the devices operating in the 13.553~13.567 MHz shall maintain the carrier frequency within 0.01% of the operating frequency over the temperature variation of -20°C to +50°C using an environmental chamber. The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

2.4.2 Test Equipment

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.2.21	2015.2.20
DC Power Supply	Good Will	GPS-3030DD	EF920938	2014.2.21	2015.2.20
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2014.2.21	2015.2.20
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.2.25	2015.2.24

2.4.3 Test Setup

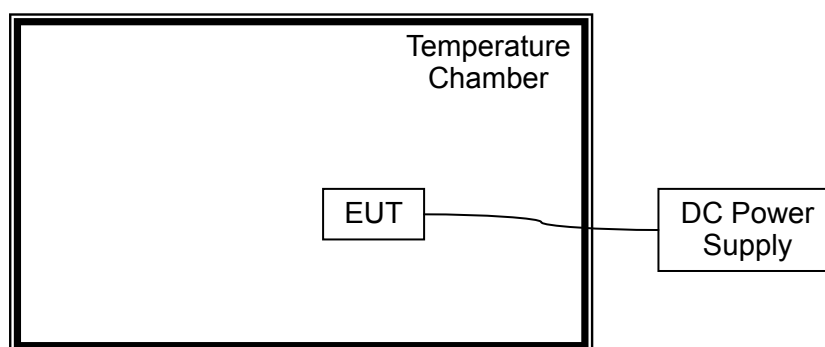

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT was measured by transmitter mode continuously.

2.4.4 Test Result

Operating Frequency: 13,560,000 Hz

Deference Voltage: 3.8V

Deviant Limit: $\pm 0.01\%$

VOLTAGE(%)	Test Conditions		Frequency(Hz)	Deviation(%)	Verdict
	Power (VDC)	Temperature (°C)			
100	3.8	+20°C(Ref)	13,560,305	+0.002248	PASS
100		-20	13,559,685	-0.002321	
100		-10	13,559,677	-0.002382	
100		0	13,559,652	-0.002566	
100		+10	13,559,614	-0.002845	
100		+20	13,559,562	-0.003229	
100		+25	13,559,553	-0.003297	
100		+30	13,559,544	-0.003363	
100		+40	13,559,551	-0.003311	
100		+50	13,560,579	+0.004269	
Battery End Point	3.6	+20	13,559,571	-0.003163	
115	4.35	+20	13,559,592	-0.003008	

2.5 20dB Bandwidth


2.5.1 Test Requirement

According to FCC section 15.215(c), the 20dB bandwidth should be contained within the frequency band designated in the rule section under which the EUT is operated, it was measured with a spectrum analyzer connected the EUT while the EUT is operating in transmission mode.

2.5.2 Test Equipment

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.2.21	2015.2.20
DC Power Supply	Good Will	GPS-3030DD	EF920938	2014.2.21	2015.2.20


2.5.3 Test Setup



2.5.4 Test Result

Centre Frequency	Measurement		Limit		Verdict
	20dB Bandwidth (KHz)	Frequency Range (MHz)	20dB Bandwidth(KHz)	Frequency Range (MHz)	
13.56MHz	4.25	13.55700~13.56125	14	13.553~13.567	Pass

Please refer to the following plot:

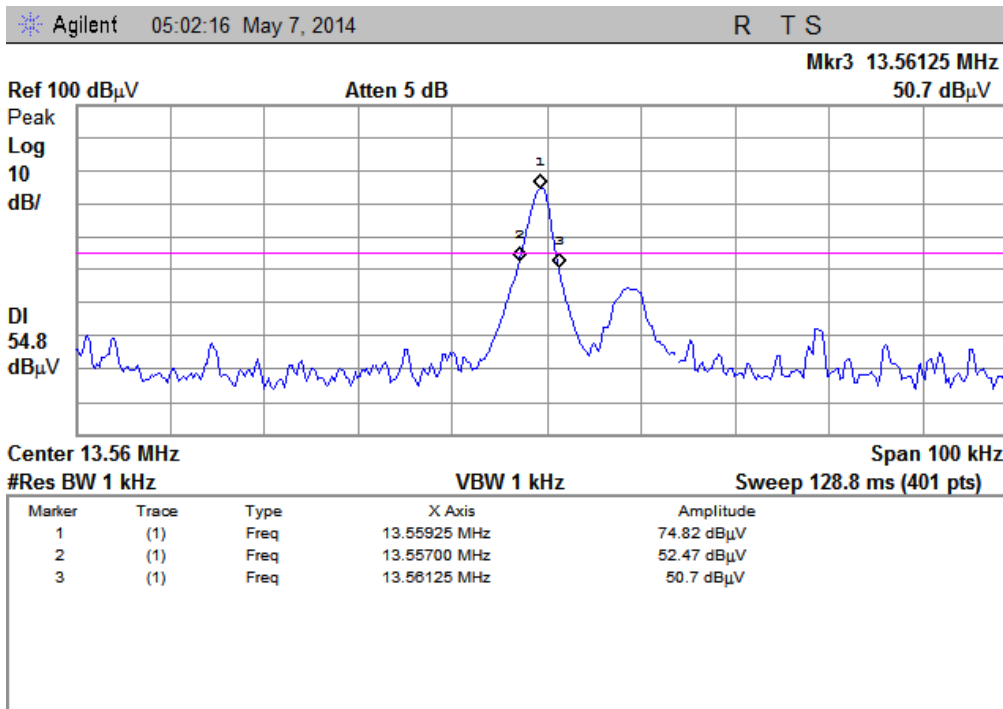

**** END OF REPORT ****