



# EMC Test Report

**Product Name:**     **LTE CPE**

**Product Model:**    **B612-533**

**Report Number:**    **SYBH(Z-EMC)20190926029001-2**

**FCC ID: QISB612-533**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

**(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)**

No.2, New City Avenue, Songshan Lake Sci. & Tech. Industry Park, Dongguan, 523808, P.R.C

Tel: +86 769 23830808   Fax: +86 769 23837628

## Notice

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01
3. The laboratory has been recognized by the Innovation, Science and Economic Development Canada (ISED) to test to Canadian radio equipment requirements. The CAB identifier is CN0003, and the ISED# is 21741.
4. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd.) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd.” , the both names have coexisted since 2009.
5. The laboratory has been recognized by the US Federal Communications Commission (FCC) to perform compliance testing subject to the Commission's Certification rules. The Designation Number is CN1173, and the Test Firm Registration Number is 294140.
6. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
7. The test report is invalid if there is any evidence of erasure and/or falsification.
8. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
9. Normally, the test report is only responsible for the samples that have undergone the test.
10. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
11. If any question about this report, please contact the laboratory (PublicGCTC@huawei.com).

**Applicant:** Huawei Technologies Co., Ltd.  
**Address:** No.2 New City Avenue Songshan Lake Sci. &Tech.  
Industry Park, Dongguan, Guangdong, P.R.C

**Date of Receipt Test Item:** 2019-10-15  
**Start Date of Test:** 2019-10-18  
**End Date of Test:** 2019-10-27

**Test Result:** Pass

**Operator  
(Test Engineer)**

2019-10-28  
Date

FuLiangliang  
Name




Signature

**Approved By  
(Lab Manager)**

2019-10-30  
Date

HeHao  
Name



Signature

**Modification Record**

No.	Last Report Version	Modification Description
1	V1.0	First report

## **TABLE OF CONTENT**

1	General Information .....	6
1.1	EUT Description .....	6
1.2	Test Site Information .....	8
1.3	Applied Standards .....	8
2	Summary of Results.....	9
3	System Configuration during EMC Test.....	10
3.1	Test Mode .....	10
3.2	Test System Configuration.....	11
3.3	Associated Equipment Used during Test.....	11
4	Electromagnetic Interference (EMI).....	12
4.1	Radiated Disturbance 30MHz to 18GHz .....	12
4.2	Conducted Disturbance 0.15 MHz to 30MHz.....	14
5	Main Test Instruments.....	15
6	System Measurement Uncertainty .....	15
7	Test Data and Graph.....	16
7.1	Radiated Disturbance.....	16
7.2	Conducted Disturbance.....	18

# 1 General Information

## 1.1 EUT Description

EUT Description	
Product Name	LTE CPE
Model Number	B612-533
Input voltage	Vnom 12V
TX Frequency	GSM850: 824MHz To 849MHz GSM1900: 1850MHz To 1910MHz WCDMA Band II: 1850MHz To 1910MHz WCDMA Band IV: 1710MHz To 1755MHz WCDMA Band V: 824MHz To 849MHz LTE BAND 2:1850MHz to 1910MHz LTE BAND 4:1710MHz to 1755MHz LTE BAND 5:824MHz to 849MHz LTE BAND 7:2500MHz to 2570MHz LTE BAND38:2570MHz to 2620MHz LTE BAND 41:2545MHz to 2655MHz WIFI 2.4G: 2422MHz – 2472MHz
RX Frequency	GSM850: 869MHz To 894MHz GSM1900: 1930MHz To 1990MHz WCDMA Band II: 1930MHz To 1990MHz WCDMA Band IV: 2110MHz To 2155MHz WCDMA Band V: 869MHz To 894MHz LTE BAND 2:1930MHz to 1990MHz LTE BAND 4: 2110MHz To 2155MHz LTE BAND 5: 869MHz To 894MHz LTE BAND 7:2620MHz to 2690MHz LTE BAND38:2570MHz to 2620MHz LTE BAND 41:2545MHz to 2655MHz WIFI 2.4G: 2422MHz – 2472MHz
HW Version	WL2B612M01
SW Version	10.0.2.1 (H200SP5C00)
EUT Accessory	
External Antenna	Manufacturer: Huawei Technologies Co.,Ltd. antenna gain: 1dBi
External Antenna	Manufacturer: Huawei Technologies Co.,Ltd. antenna gain: 3dBi
LAN cable	Outsourcing Cable, Straight Through Cable,1.5m,RJ45,CAT5e,RJ45,8P8C,CCS,Gold-Plated 3u",Yellow(114C),Transparent Connector, Yellow Rubber Head, Different Cable OD, Used in 100M,Terminal Dedicated
Tel cable	Outsourcing Cable,RJ11 Cable,1.5m,RJ11,2 core Wire,RJ11,6P2C,CCA,Gold-Plated 3u",CoolGray 3U,Transparent Connector, Terminal Dedicated
Adapter	Manufacturer: Huawei Technologies Co.,Ltd. Model: HW-120100E01 Input voltage: 100V-240V~50-60Hz, 0.5A Output voltage: +12V --- 1A SN: A9442BK6M09992 SN: U94404K5D01651

Adapter	Manufacturer: Huawei Technologies Co.,Ltd. Model: HW-120100B01 Input voltage: 100V-240V~50-60Hz, 0.5A Output voltage: +12V $\overline{\text{---}}$ 1A SN: A9432BK7200680 SN: U94303K7405768
Adapter	Manufacturer: Huawei Technologies Co.,Ltd. Model: HW-120100U01 Input voltage: 100V-240V~50-60Hz, 0.5A Output voltage: +12V $\overline{\text{---}}$ 1A SN: A9662BK7LO1953 SN: U96604J8Z00720
Adapter	Manufacturer: Huawei Technologies Co.,Ltd. Model: HW-120100A01 Input voltage: 100V-240V~50-60Hz, 0.5A Output voltage: +12V $\overline{\text{---}}$ 1A SN: TA661K9P00072 SN: UA6604K4700244

Remark: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed information.

## 1.2 Test Site Information

Test Site 1:	RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD.
Test Site Location:	No.2 New City Avenue Songshan Lake Sci. &Tech. Industry Park, Dongguan, Guangdong, P.R.C

## 1.3 Applied Standards

### APPLIED STANDARD

47 CFR FCC Part 15, Subpart B  
ICES-003 Issue 6



## 2 Summary of Results

Summary of Results				
Test Items	Test Mode	Performance Class & Required Performance Criteria	Result	Site
<u>Radiated Emissions</u> Enclosure Port	Mode1	CLASS B	Pass	Site1
<u>Conducted Emissions</u> <input type="checkbox"/> DC Power Port <input checked="" type="checkbox"/> AC Power Port <input type="checkbox"/> Telecommunication Ports	Mode1 Mode2	CLASS B	Pass	Site1
Note: 1, Measurement taken is within the uncertainty of test system. 2, <input checked="" type="checkbox"/> The item has been tested; <input type="checkbox"/> The item has not been tested.				

During the measurement, the environmental conditions complied with the range listed as below.

Item	Required
Ambient temperature	15°C ~ 35°C
Relative humidity	25% ~ 75%
Atmospheric pressure	86kPa ~ 106kPa

### 3 System Configuration during EMC Test

#### 3.1 Test Mode


The EUT was configured, installed, arranged and operated in a manner consistent with typical application. The following mode(s) were applied during the compliance test.

Test Mode	
Mode 1:	EUT with Adapter + USB + TEL + LAN/WAN + Wireless Service Idle Mode
Mode 2:	EUT with Adapter + USB + TEL + LAN/WAN + Wireless Service Traffic Mode

Remark:

- 1) If there is one kind of accessories with different models, each one should be applied throughout the compliance test respectively, however, only the worst case will be recorded in this report.
- 2) If EUT has more than one typical operation, only the worst test mode will be recorded in this report.

### 3.2 Test System Configuration

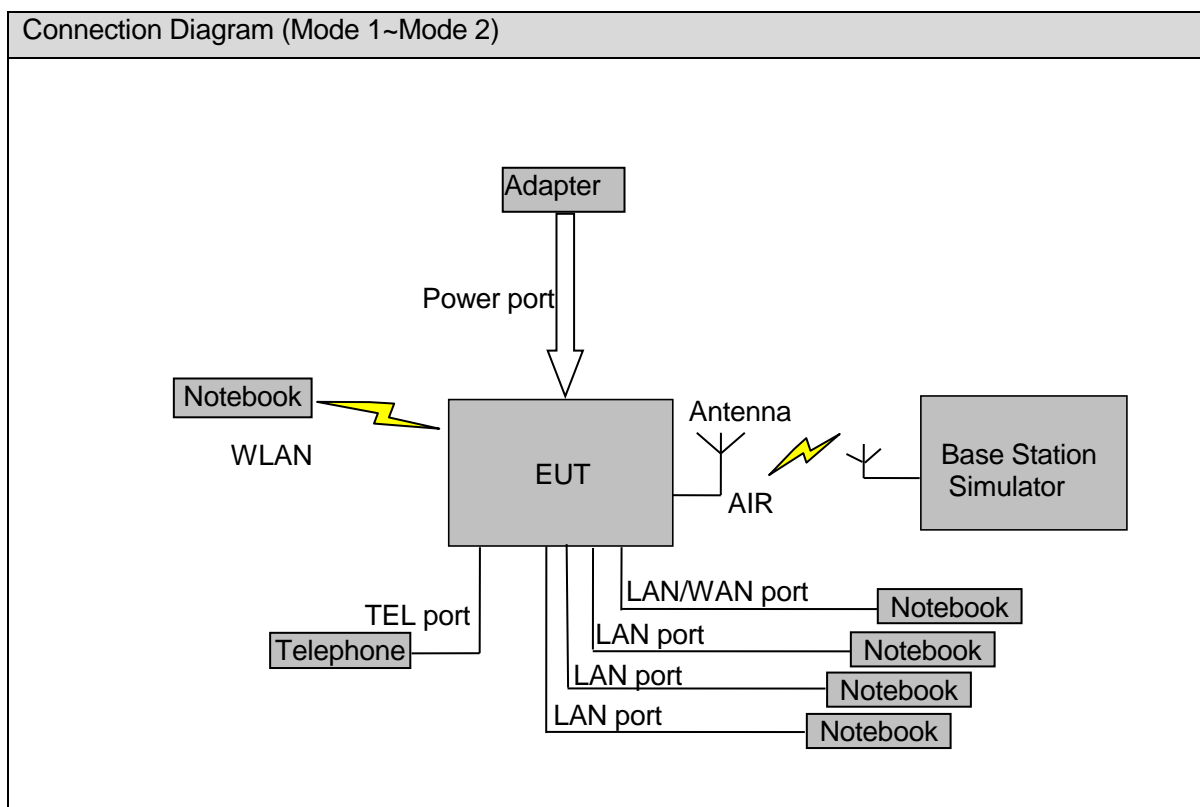

### 3.3 Associated Equipment Used during Test

Name	Model	Manufacturer	S/N	Calibrated Deadline
Radio Communication tester	CMU200	R&S	3607033573	2020-01-14
Radio Communication tester	MT8820C	Anritsu	A110518805	2020-02-29
Notebook	X230	Lenovo	A130911985	N/A
Notebook	X230	Lenovo	A131113804	N/A
Notebook	X230	Lenovo	A130911972	N/A
Notebook	X230	Lenovo	A131111954	N/A
Telephone	HCD8166TSD	HUAWEI	N/A	N/A

## 4 Electromagnetic Interference (EMI)

### 4.1 Radiated Disturbance 30MHz to 18GHz

#### 4.1.1 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4-2014. The test distance was 3m. The set-up and test methods were according to ANSI C63.4-2014.

A preliminary scan and a final scan of the emissions were made from 30 MHz to 18 GHz by using test script of software; The emissions were measured using Quasi-Peak Detector (30MHz~1GHz) and AV/PK detector (above 1GHz). The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m. The azimuth range of turntable was 0° to 360°. The receiving antenna has two polarizations V and H.

Measurement bandwidth (RBW) for 30MHz to 1000 MHz: 120 kHz;

Measurement bandwidth (RBW) for 1000MHz to 18000 MHz: 1MHz;

EUT was configured in idle mode and the test performed at worst emission state.

#### 4.1.2 Test setup

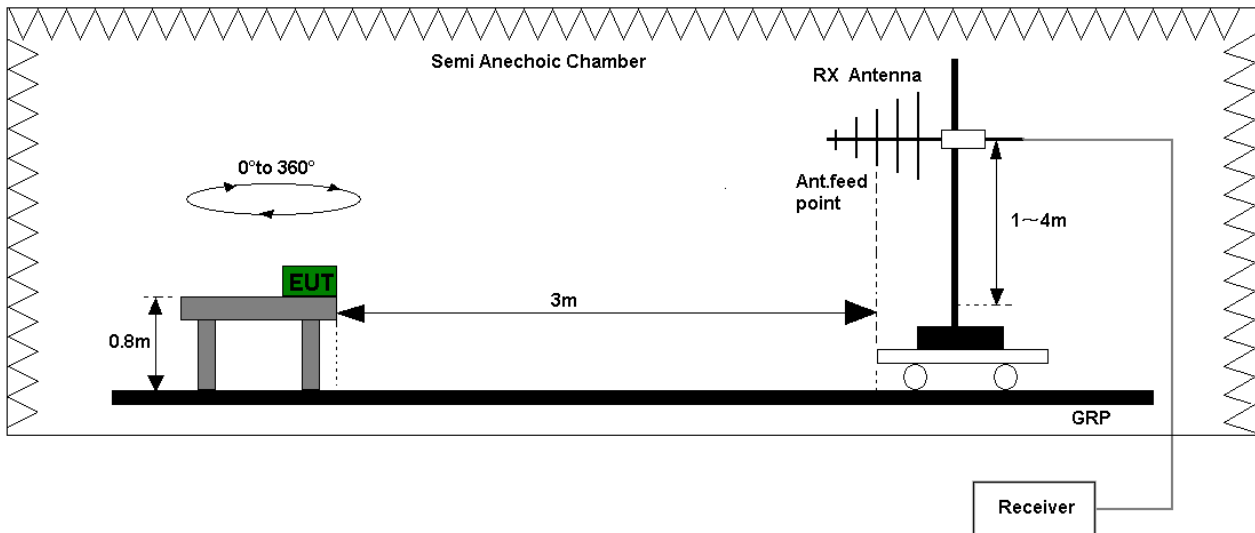


Figure 1. Test set-up of radiated disturbance(30MHz-1GHz)

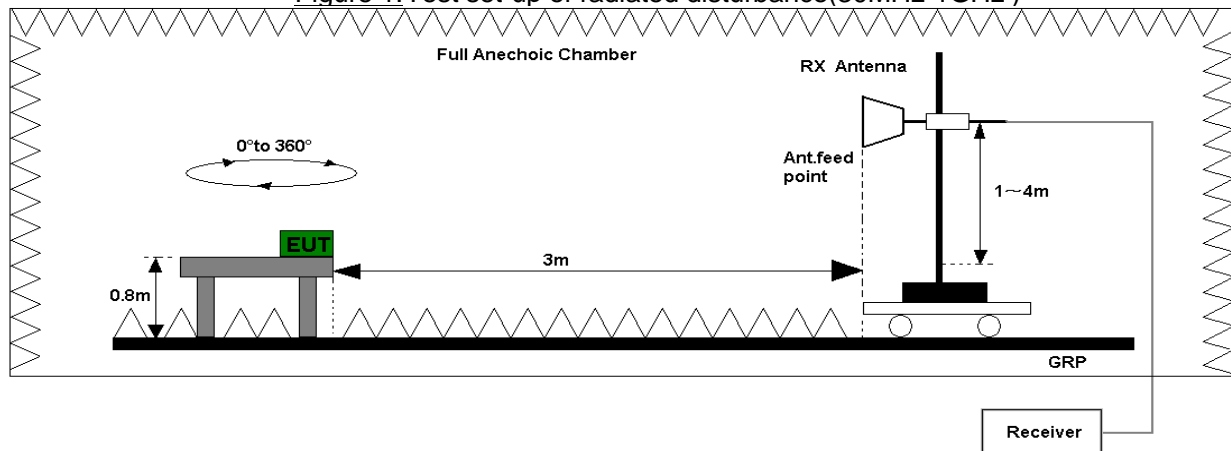


Figure 2. Test set-up of radiated disturbance(above 1GHz)

#### 4.1.3 Test Results

The EUT has met the requirements for Radiated Emission of enclosure port.

Refer to the section 7.1 of this report for test data.

Test Limits (Class B)				
Frequency of Emission (MHz)	Radiated Limit			
	Unit( $\mu$ V/m)		Unit(dB $\mu$ V/m)	
30-88	100		40	
88-216	150		43.5	
216-960	200		46	
Above 960	500		54	
Above 1000	AV	PK	AV	PK
	500	5000	54	74

## 4.2 Conducted Disturbance 0.15 MHz to 30MHz

### 4.2.1 Test Procedure

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm away from LISN. The set-up and test methods were according to ANSI C63.4-2014. Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector.

EUT was communicated with the simulator through Air interface, the simulator controls the EUT to transmitter the maximum power which defined in specification of product. The EUT operated on the typical channel.

Measurement bandwidth (RBW) for 150 kHz to 30 MHz: 9 kHz;

The EUT was set in the shielded chamber and operated under nominal conditions.

### 4.2.2 Test Setup

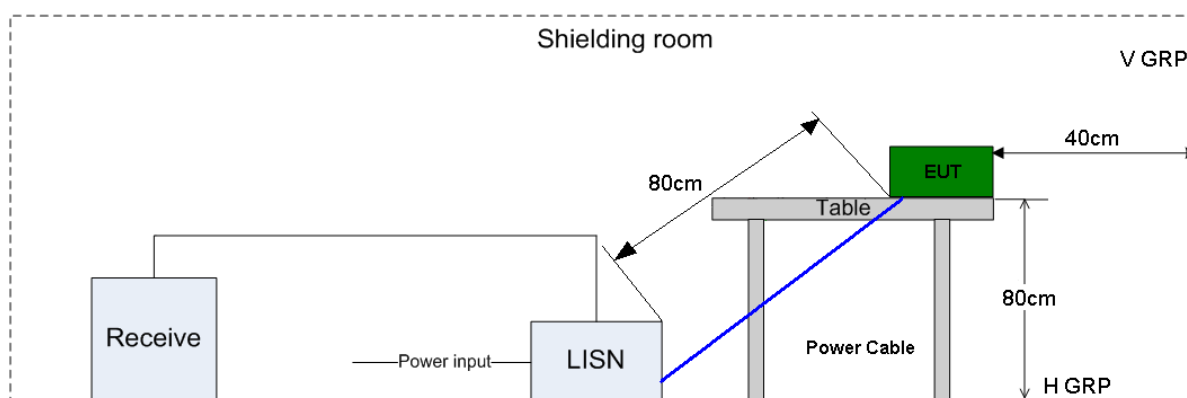


Figure 3. Test Set-up of conducted disturbance

### 4.2.3 Test Results

The EUT has met requirements for Conducted disturbance of power lines. Refer to the section 7.2 of this report for test data.

Test Limit of AC Power Port		
Frequency range	150kHz ~ 30MHz	
Frequency	Voltage limits	
	QP (dBμV)	AV (dBμV)
0.15MHz~0.5MHz	66-56	56-46
0.5MHz-5MHz	56	46
5MHz~30MHz	60	50

## 5 Main Test Instruments

Main Test Equipments						
Test item	Test Instrument	Model	S/N	Manufacturer	Calibrated Deadline	Cal interval
RE	EMI Test receiver	ESU26	100150	R&S	Jan. 14, 2020	12
	Broadband Antenna	VULB 9163	9163-491	SCHWARZ BECK	Feb. 22, 2021	24
	Horn Antenna	HF906	100683	R&S	Mar. 15, 2021	24
CE	EMI Test receiver	ESU26	101163	R&S	Jan. 14, 2020	12
	Artificial Mains Network	ENV216	100382	R&S	Feb. 29, 2020	12
Software Information						
Test Item	Software Name	Manufacturer		Version		
RE	EMC32	R&S		V9.25.0		
CE	EMC32	R&S		V9.25.0		

## 6 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty		
Items		Extended Uncertainty
RE(30MHz-1GHz)	Field strength (dB $\mu$ V/m)	U=5.24dB; k=2
RE(1GHz-18GHz)	Field strength (dB $\mu$ V/m)	U=4.84 dB; k=2
CE	Disturbance Voltage (dB $\mu$ V)	U=2.3 dB; k=2


## 7 Test Data and Graph

### 7.1 Radiated Disturbance

#### 7.1.1 30MHz~1GHz

**Test Mode1:** EUT with Adapter + USB + TEL + LAN/WAN + Wireless Service Idle Mode

Full Spectrum

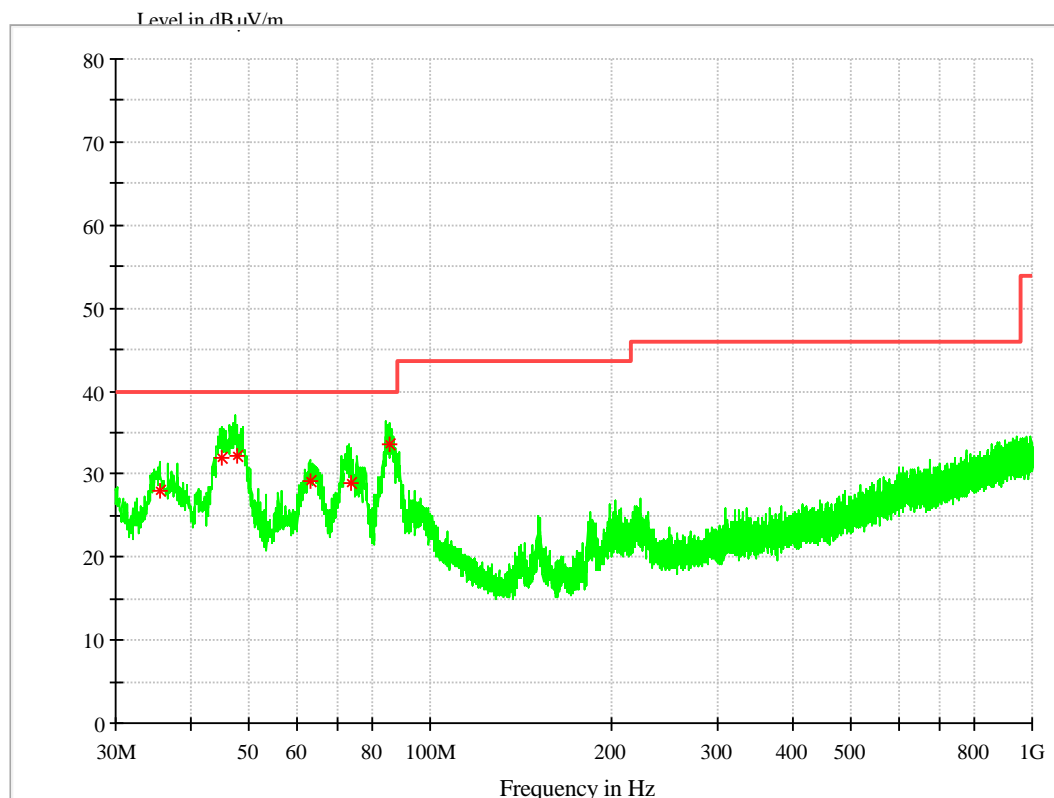

#### MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
35.621400	27.97	12.9	40.00	12.03	101.0	4.0	V
45.182040	31.85	14.1	40.00	8.15	100.0	329.0	V
47.614800	32.30	14.0	43.50	7.70	101.0	274.0	V
63.160720	29.08	12.1	46.00	10.92	101.0	208.0	V
73.714880	28.86	8.8	46.00	11.14	101.0	41.0	V
85.873860	33.53	11.4	46.00	6.47	142.0	269.0	V

Note:


Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.



## 7.1.2 1GHz~18GHz

**Test Mode1:** EUT with Adapter + USB + TEL + LAN/WAN + Wireless Service Idle Mode

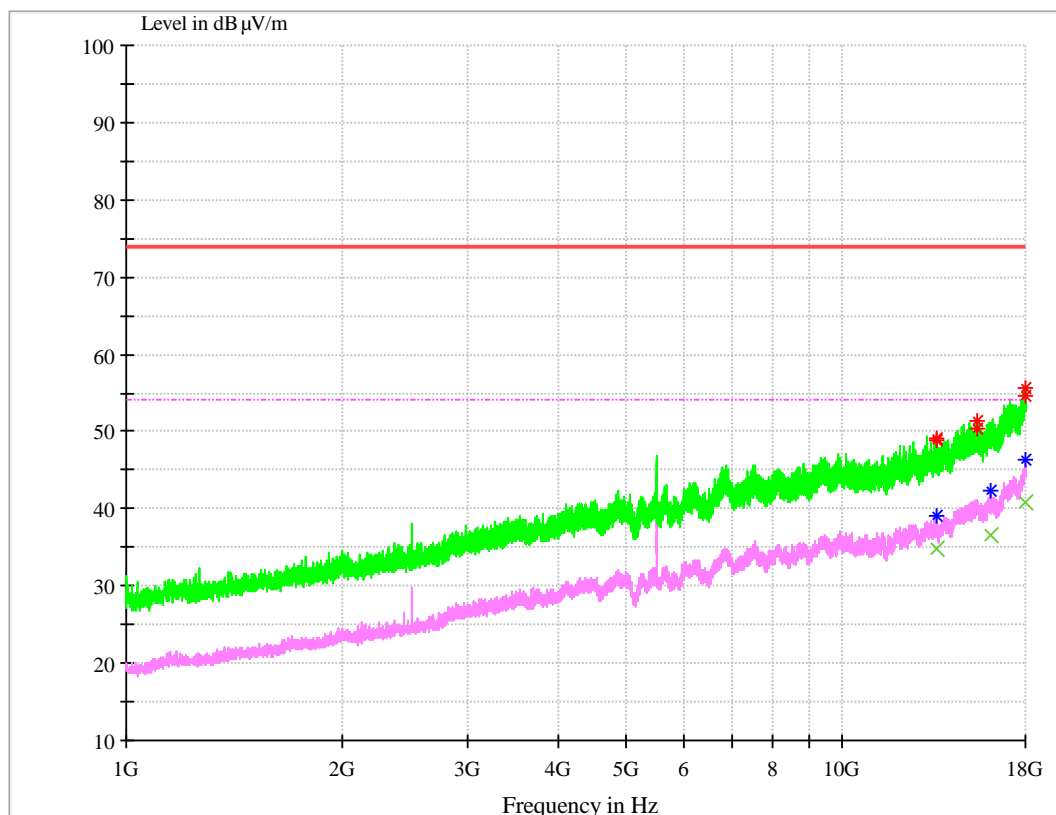

### MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
13500.39067	48.77	7.9	74.0	25.23	100	206	V
15369.24533	50.26	10.1	74.0	23.74	151	345	H
17980.15067	54.6	15.9	74.0	19.4	100	17	H

### MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
13490.30267	34.76	7.9	54.0	19.24	100.0	241	V
16118.44067	36.67	11	54.0	17.33	100.0	0	H
17993.90796	40.8	16.1	54.0	13.2	100.0	0	H


Note:

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)  
The reading level is calculated by software which is not shown in the sheet.

## 7.2 Conducted Disturbance

### 7.2.1 AC Port Test Data

**Test Mode2:** EUT with Adapter + USB + TEL + LAN/WAN + Wireless Service Traffic Mode

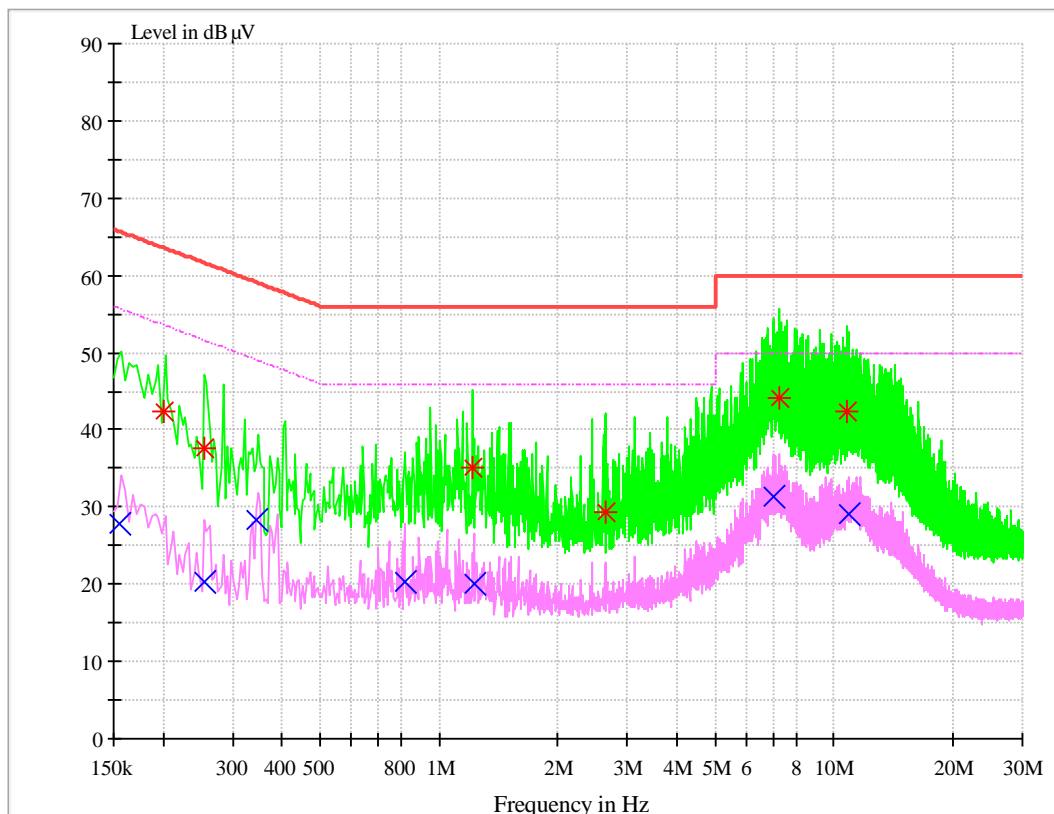

#### MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV	Line	Transd dB	Margin dB	Limit dBμV	PE
0.199955	42.27	N	9.7	21.34	63.61	FLO
0.253317	37.73	N	9.7	23.92	61.65	FLO
1.214466	35.08	N	9.7	20.92	56.00	FLO
2.64529	29.32	N	9.7	26.68	56.00	FLO
7.261697	44.21	L1	9.9	15.79	60.00	FLO
10.820828	42.39	N	10.0	17.61	60.00	FLO

#### MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV	Line	Transd dB	Margin dB	Limit dBμV	PE
0.154296	27.92	L1	9.7	27.85	55.77	FLO
0.254721	20.25	N	9.7	31.35	51.6	FLO
0.343411	28.4	L1	9.7	20.72	49.12	FLO
0.822202	20.23	N	9.7	25.77	46.00	FLO
1.222752	19.95	N	9.7	26.05	46.00	FLO
6.991651	31.35	L1	9.9	18.65	50.00	FLO
10.952043	29.07	L1	10.0	20.93	50.00	FLO

Note:

Level= Reading level+ Transd (cable loss + correction factor)

The reading level is calculated by software which is not shown in the sheet.

-----**END**-----