



- [Amplifiers](#) [Antennas](#) [Cable & Pigtails](#) [Lightning Protectors](#) [Connectors / Adapters](#) [Power-Over-Ethernet](#) [Signal Splitters](#) [Frequency Converters](#)
- [Signal Filters](#) [Wireless Kits](#) [Power Supplies](#) [Tools](#) [Weatherproof Enclosures](#) [Accessories](#) [OEM Products](#) [New Products](#)

[WiFi ANTENNAS](#)

[Select By Frequency](#)

- 900 MHz
- 1.9 GHz
- 2.3 GHz
- 2.4 GHz
- 2.6 GHz
- 4.9 GHz
- 5.3 GHz
- 5.8 GHz

[Wireless Audio/Video](#)

- 2.4 GHz

[Mobile Antennas](#)

- Antenna Kits
- Mobile Mounts
- Antennas

[Antenna Accessories](#)

- Antenna Mounting Kits

[Frequency Converters](#)

- 2.4 to 5.8 GHz 2-Way

[Main Menu](#)

- **NEW PRODUCTS**
- Amplifiers
- Antennas
- Cable Products
- Lightning Protectors
- Connectors
- Adapters
- PoE
- Wireless Kits
- Signal Splitters
- Frequency Converters
- Signal Filters
- Power Supplies
- Tools
- Accessories
- Weatherproof Enclosures
- OEM Products
- Site Map
- **SPECIALS & SALE ITEMS**
- **CLEARANCE ITEMS**

[Ordering Info](#)

- [My Cart](#)
- [Order](#)

2.4 GHz 2.2 dBi Reverse Polarity SMA "Rubber Duck" Wireless LAN Antenna HyperGain® HG2402RD-RSF

Features

- Compact size, only 4.7" long
- Tilt and swivel design
- RP-SMA Connector
- 802.11b, 802.11g and Bluetooth® compatible



Order

Part Number Wholesale-Direct Pricing Buy Online

HG2402RD-RSF	Quantity 1-4: \$6.95 each
	Quantity 5-9: \$6.45 each
	Quantity 10+: \$6.25 each



Description

This compact 2.4GHz omnidirectional "rubber-duck" WiFi antenna provides broad coverage and 2.2 dBi gain. It is a coaxial sleeve design with an omni-directional pattern. It is ideally suited for IEEE 802.11b and 802.11g wireless LANs, Bluetooth® and other WLAN applications.

Only 4.7" long, this flexible antenna features a tilt-and-swivel reverse-polarity SMA plug connector, allowing them to be used vertically, at a right angle, or any angle in-between. It is suitable as a replacement antenna for many access points and radios that are equipped with reverse-polarity SMA connectors including D-Link®, Linksys® WET11 and others (Note: This RF antenna is used as a "replacement" antenna rather than a "range extender" antenna. It should yield similar range to most radio's stock antennas)


Specifications

Electrical Specifications


Frequency	2400-2500 MHz
Gain	2.2 dBi
Impedance	50 Ohm
VSWR	< 2.0

Mechanical Specifications

Weight	0.52 oz. (15 g)
Length	4.7" (105 mm)
Diameter	0.4" (10 mm)
Finish	Matte Black
Connector	Reverse Polarity SMA Plug
Operating Temperature	-40° C to to 85° C (-40° F to 185° F)
Polarization	Vertical

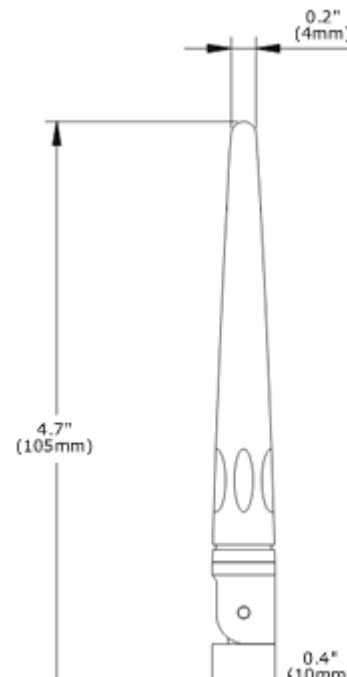

Antenna Gain Pattern

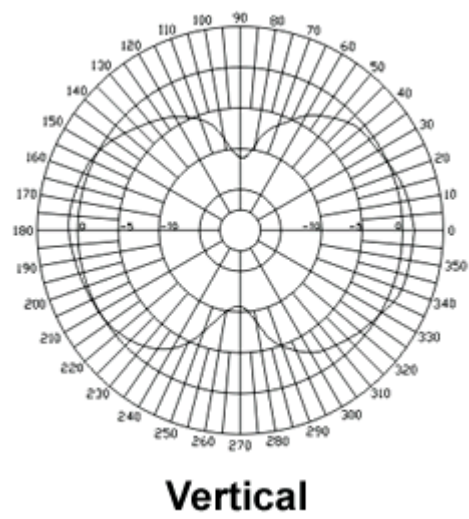

Guaranteed Quality

This product is backed by Hyperlink's Limited Warranty